




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05F 3/10	A1	(11) International Publication Number: WO 95/16845 (43) International Publication Date: 22 June 1995 (22.06.95)
(21) International Application Number: PCT/GB94/02668 (22) International Filing Date: 6 December 1994 (06.12.94) (30) Priority Data: 9325906.7 17 December 1993 (17.12.93) GB (71) Applicant (for all designated States except US): NT DOOR CONTROLS LIMITED [GB/GB]; The Crescent, Birmingham Business Park, Birmingham B37 7YX (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): GUTHRIE, Duncan, Richard [GB/GB]; 72 Beechwood Avenue, Melbourn, Hertfordshire SG8 6BW (GB). (74) Agents: MOSEY, Stephen, George et al.; Marks & Clerk, Alpha Tower, Suffolk Street Queensway, Birmingham B1 1TT (GB).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: DEVICE FOR CONTROLLING THE MOVEMENT OF A WING

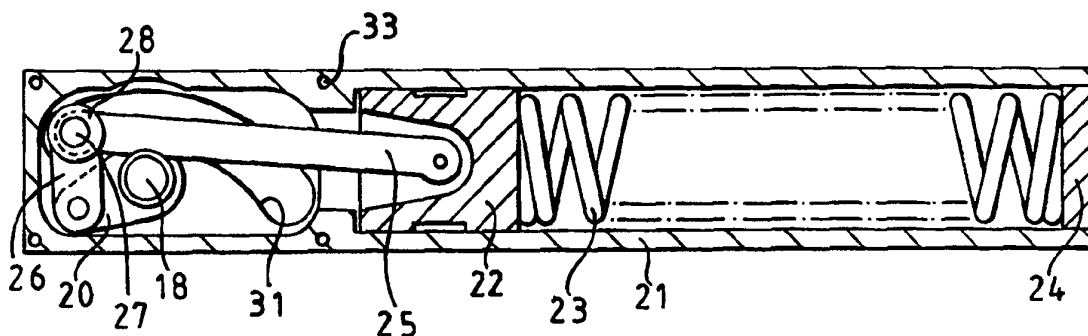

(57) Abstract

A door closer comprises a housing (21) in which a compression spring (23) urges a piston (22) in one direction, an operating spindle (18) in the housing defining an axis (19) about which an arm mechanism (52) connected to the housing is angularly movable to effect movement of the piston in the opposite direction. Connected between said axis (19) and the piston (22) is a linkage mechanism which provides that, in use, maximum torque is exerted on the arm mechanism at the near closed position of the door. The linkage mechanism can have a pivotal connection (27) between links (25, 26) thereof constrained to follow a continuous curve by means of a cam track (30, 31) or an additional link (48).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Larvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

DEVICE FOR CONTROLLING THE MOVEMENT OF A WING

This invention relates to a device for controlling the movement of a wing, and is particularly for use where the wing is a door. However the term 'wing' includes in its scope alternatives such as panels and like swingable members.

Devices for the automatic closing of a door are well known, and in one form such a device comprises a spindle rotatable in use about an axis parallel to the axis of rotation of the door and means converting rotation of the spindle in one direction into compression of a spring when the door is opened, some form of arm arrangement being provided between the door or frame, i.e. whichever does not have the closer attached thereto, and the closer spindle, in order to rotate the spindle in said one direction upon said opening of the door.

A common form of arm arrangement comprises a main arm extending from the closer spindle, with a link pivotally connected at one of its ends to the free end of the main arm and intended to be fixed at its opposite end to the one of the door and frame which does not carry the closer. Such an arrangement acts in a 'scissors' manner as the door is opened and closed.

Instead of a multi-arm linkage between the door or frame and the closer spindle, a more aesthetically pleasing linkage is now considered desirable, and accordingly the linkage is now often in the form of a single link arm coupled at one of its ends to the closer spindle and

engaging into a guide rail by way of suitable means, such as a slider or a roller, at its other end.

With many doors, a closer used therewith must operate so that the torque exerted thereby is sufficient to close the door against a catch when the door is in its fully closed position. Normally the arrangement of the closer spring is such that the force it exerts and thus the torque generated at the spindle is at a minimum at the door closed position and maximum at the door fully open position. This is clearly contrary to the desired characteristic, namely low torque when the door is open and high torque at door opening.

The torque generated at the closer spindle is thus an important consideration, and, for example, with a single link arm closer referred to above, the closing moments are unfavourable. Even by using a relatively long guide rail, the problem may be only marginally mitigated, if at all.

Various arrangements have been used in a door closer to try to achieve the desired torque characteristics, such as a pair of relatively movable pistons, gears in mesh with the closer spindle, a rack with differently radiused sections and/or sections with differently shaped teeth, and a stroke-producing cam disc.

Figures 1 and 2 show a prior art arrangement in a door closer where the closer spindle 10 has a crank part 11 forming a first link. Pivotally connected to the part 11 at one of its ends is a short second link 12. The closer spring 13 has its end nearest the spindle held against a stop 14, its other end being engaged by a piston 15 slidable in a cylindrical

housing, the piston being centrally grooved for reception of an appropriate seal (not shown). A third, relatively long link 16 is pivotally connected at one end to the piston, extends through the coiled compression spring 13, and has its other end pivotally connected to the other end of the second link 12. Finally a fourth link 17 has one of its ends pivotally secured to the closer body at a position below the position of the spindle axis and between said axis and the stop 14, as viewed in Figures 1 and 2. The other end of the fourth link is pivotally connected at the pivotal connection of the second and third links, marked 'A' in the figures. The pivotal connection of the first and second links is marked 'B' and the pivot of the fourth link to the closer body marked 'C'. The fourth link is longer than the second link and angular movement of this link guides the common pivot of the second and third links in an arcuate path when the spindle moves angularly.

Figure 1 shows the positions of the four links when the door is in its closed position and the spring 13 is in its relaxed state. When the door is opened, the closer spindle is moved angularly by the external door closer linkage and the link 12 is pulled around anti-clockwise with the part 11. This movement of the link 12 effectively pulls the link 16 generally axially of the housing thereby pulling the piston 15 towards the stop 14 and compressing the spring.

As the link 12 moves, its pivotal connection to the link 16 is guided by the link 17 as explained above, so that this connection 'A' moves along an arc of the circle centred at 'C' and having a radius equal to the distance AC. Clearly connection 'B' similarly moves along an arc of the

circle centred on the closer spindle, and having a radius equal to the distance from the axis of the spindle to connection 'B'.

Figure 3 is a graph showing torque plotted against spindle rotation for the arrangement of Figures 1 and 2. The torque profile is for the closer itself, the actual torque produced at the door being modified by the external linkage. However for comparison referred to hereinafter, the angles shown can effectively be regarded as degrees of door opening.

It will thus be appreciated that the torque profile of this closer does not satisfy the requirements referred to.

It is an object of the invention to provide an improved device for controlling the movement of a wing.

According to the present invention there is provided a device for controlling the movement of a wing comprising a housing, resilient means in the housing, a piston reciprocally movable in one direction under the influence of said resilient means and in the opposite direction under the influence of an arm mechanism connected to the housing, in use, the arm mechanism having an arm angularly movable about an axis defined in the housing, and a linkage mechanism between said axis and the piston arranged so that a greater torque is exerted, in use, on said arm when the resilient means is in its least or substantially least compressed state, corresponding to a closed or near closed position of the wing, in use, than when the resilient means is compressed beyond its least or substantially least compressed state, corresponding to an open position of the wing.

Preferably the maximum torque exerted on said arm is in the near closed position of the wing.

Desirably the linkage mechanism comprises a first link angularly movable about said axis, a second link pivotally connected to the piston, and a third link having spaced pivotal connections to said first and second links respectively, the connection of said second and third links being constrained to move along a predetermined path upon angular movement of said first link, in use. Preferably said predetermined path has at least a portion of arcuate form with the centre of curvature thereof lying outside said housing.

Conveniently in one embodiment said connection is constrained to move along a single arc. Advantageously the arc is defined as a cam track in the housing which is engaged by a cam follower at said connection. Alternatively said connection can be constrained to move by means of a fourth link pivotally connected to the housing and also pivotally connected to said second and third links at said connection.

A kit of parts according to the invention comprises a device of the invention as hereinbefore defined together with an arm mechanism in the form of a single link arm, connectible at one end to said housing for angular movement about said axis defined in the housing, and a guide rail with which the other end of the single link arm engages.

Figures 1 and 2 are schematic diagrams showing the positions of the links of a four arm linkage mechanism of a prior art door closer at the door closed and door open positions respectively;

Figure 3 is a graph showing torque at one of the links connected, in use, to an external arm mechanism, against the angle of angular movement of said link;

Figures 4 and 5 are views as Figures 1 and 2, but for a device according to the invention;

Figures 6 and 7 are views as Figures 1 and 2, but for a device constructed according to a further embodiment of the invention;

Figure 8 is a graph as in Figure 3, but for the further embodiment shown in Figures 6 and 7;

Figures 9 and 10 are a part-sectional side view and a part-sectional top view respectively of the device of the invention shown in Figures 4 and 5, with the linkage mechanism in its 'door closed' position;

Figure 11 is a part-sectional exploded side view of various parts of the construction of Figures 9 and 10;

Figure 12 is a plan view of one of the components of Figure 11;

Figure 13 is a view like Figure 10 of a device of the invention according to a still further embodiment;

Figures 14 and 15 are a side view and a perspective view respectively of part of a housing of the device of Figure 13;

Figure 16 is a graph showing door closing moment against door angular movement for the device of Figure 13 when fitted to a door;

Figure 17 is a diagram showing the geometry of the linkage arrangement of a device of the invention;

Figures 18 to 20 respectively show an inner face, an outer face and a side view of an alternative form of the component of Figures 14 and 15;

Figures 21 to 24 respectively are cross-sections on the lines A-A and B-B on Figure 19, and on the lines C-C and D-D on Figure 18;

Figure 25 is a diagram to an enlarged scale showing a cam track in the component of Figures 18 to 24;

Figure 26 shows plots of door movement torque against door movement angle for door opening and closing respectively;

Figure 27 schematically shows part of one of the plots of Figure 26 as part of at least two parabolas; and

Figures 28 to 32 show diagrammatically various alternative ways of mounting a device of the invention together with its associated single slide arm and guide rail at a door and associated transom.

As described, the operation of the linkage arrangement shown in the door closer of Figures 1 and 2 does not provide maximum torque at the closer output spindle as has been described as being desirable. The

present invention provides a device for controlling the movement of a wing, particularly in the form of a door closer, which does provide the torque characteristics desired.

Before describing a first embodiment of such a door closer of the invention in detail, reference is made to Figures 4 and 5 which, like Figures 1 and 2 show the arrangement of the links of the linkage mechanism within the door closer at the door closed and door opened positions respectively.

As can be seen from Figures 4 and 5, there is a operating spindle 18 arranged, as will be described, to be mounted in a housing of the closer for angular movement about an axis 19 defined thereby. The spindle has an integral crank part 20 mid-way between its ends, this part 20 extending generally radially from the axis of the spindle and constituting a first link. Like the prior art arrangement shown in Figures 1 and 2, the embodiment of the invention shown in Figures 4 and 5 has a cylindrical housing 21 within which is reciprocally movable a piston 22 which is in engagement with resilient means in the form of a coiled compression spring 23. However the arrangement illustrated is in essence the reverse of that shown in the prior art arrangement in that as can be seen from Figures 4 and 5, the piston is between the spring and the operating spindle so that the stop 24 against which the end of the spring remote from the piston engages is itself remote from the linkage arrangement. Thus as shown in Figure 4, the piston is nearest the spindle 18 in the door closed position and furthest therefrom in the door open position, namely the reverse of that shown with the prior art arrangement, so that whereas in Figure 1 the crank part 11 moves anti-clockwise to cause

compression of the spring 13, the crank part 20 of Figure 4 moves clockwise. However the linkage arrangement of the invention could instead be used with a closer having its spring at the side of the piston nearer the crank part, i.e. as in Figures 1 and 2.

Extending into the housing 21 shown in Figures 4 and 5, in a direction generally axially, is an elongated second link 25 which at its one end is pivotally connected to the piston. As shown in Figure 10 the piston is cut-away adjacent this pivot to allow for limited angular movement of the link each side of the central axis of the cylindrical housing.

Pivotally connected to the end of the crank part away from the spindle 18 is a double-armed third link 26, the two arms being aligned one above the other at opposite sides of the crank part with a pivot pin therethrough, this constituting the pivot 'B' shown in Figures 4 and 5. At their opposite ends respectively the arms engage at respective opposite sides of the end of the link 25 remote from the piston. Passing through this connection of the link 25 to the link 26 is a cylindrical pivot pin 27 on the opposite ends of which are respective circular cam followers 28, 29 with internal bearings. Bearings are also provided for the spindle 18 to move angularly in the housing.

These cam followers are received in respective aligned upper and lower cam tracks 30, 31 respectively, (Figures 9-12), provided in respective side cheeks forming part of the housing. As can be seen for cam track 30 from Figures 4 and 5, the cam track is arcuate, being part of a circle centred at the point 'C' which, in this embodiment, and as viewed in Figures 4 and 5, is below the axis of the spindle 18 on a line

therethrough normal to the axis of the housing 21. In this embodiment the radius of the circle of which the cam track is part is of a length such that the majority of the cam track is at the side of the spindle axis away from the centre 'C', and moreover the section of the arc provided for the cam tracks is not symmetrical about the vertical line through the centre 'C' and the axis of the spindle, but extends to a greater extent to the right of this line, namely towards the cylindrical housing 21. However, as will become apparent, the path through which the cam followers are guided need not be a single arc. It can be any continuous curve, the instantaneous centre of curvature of which can be chosen to allow optimisation of the torque profile, and, for example, could have two or more sections of different radii respectively so as to 'fine tune' the torque characteristics. Use can be made of the ability to 'tune' the output torque profile by varying the cam track from a circular arc. The basic mechanism geometry, as described, provides a basis by giving a sharp rise in torque at closing. The cam track can then be 'tuned' to optimise the torque profile. An example of such tuning is described hereinafter with reference to Figures 13 to 16 where the position of the centre 'C' and the length of the radius taken from 'C' are varied. As referred to herein, the cam profile is the path which the centre line of a cam follower describes.

Figures 9 to 12 show constructional features of the embodiment of Figures 4 and 5 in more detail, with the numerals used in those figures also being used in Figures 9 to 12. In particular it will be noted that the housing for the piston and compression spring is in this embodiment formed with the stop 24 being removable, and having an integral forward extension 32 to opposite sides of which are secured by means of

screw holes 33 upper and lower housing parts 34, 35 respectively in the form of cheeks, in which are defined the upper and lower cam tracks 30, 31 respectively. These housing parts also serve to journal the spindle 18 as shown in Figure 9. As previously described a portion of approximate sector shape is cut-away from the centre of the piston in a horizontal plane, as viewed in Figure 9, to allow for movement of this end part of the link 25. Figure 12 shows a housing part 34, (housing part 35 being a mirror image), in inside plan view.

The relative positions of the links are as shown in Figure 4 when the door is closed, namely with the cam followers at the extreme left hand ends of their respective cam tracks, and the piston thus at the extreme left hand end of its travel in the housing 21, the compression spring thus being in its least compressed state. Maximum torque on the door closer arm, to be described, is exerted upon initial opening of the door or at a near closed position, i.e. when it is opened at a small angle, such as 2° as per DIN standard. However as used herein, 'near closed' could with certain closer arrangements include an opening angle of up to 10° , although normally the angle would be 5° or less.

Thereafter for at least a substantial portion of the door opening or further opening, the torque falls, with any subsequent rises in torque only reaching levels which are well below the initial opening torque described. Eventually, as can be seen in Figure 5, the cam followers reach the end of their respective tracks, this occurring simultaneously, so that the maximum opening position of the door has then been reached, the piston having compressed the spring.

Although it is possible to use a 'scissors' form of exterior arm mechanism with a device of the present invention, it is preferable that the spindle 18 is connected to one end of a single link arm, the other end of which has a slide portion, such as a slider or roller, engaged in a guide rail, so that as the door is opened and closed this single arm pivots about the spindle 18 whilst simultaneously sliding along the guide rail. As described previously, this form of linkage from the closer to the door or transom/frame is more aesthetically pleasing than previous multi-arm arrangements, such as those of the 'scissors' type and the like, and the link arrangement of the invention is particularly suitable for use with a single external link arm, in that it does not require the use of a relatively long guide rail as previously proposed with single link arm door closers to try to mitigate the poor torque/rotation profile.

A further embodiment of a device of the present invention shown in Figures 6 and 7 is generally similar to that shown in Figures 4 and 5 and like numerals have thus been used for equivalent parts. The only difference is the way in which the pivot point 'A' is guided for movement upon movement of the spindle 18. Instead of cam followers and associated cam tracks used in the earlier embodiment described, the guiding here is provided by a fourth link 48. This link, in effect, a physical connection between the point 'C' shown in the embodiment of Figures 4 and 5 and the common pivot point 'A' between the links 25 and 26. Thus for example the link 48 can have the same centre as the centre 'C' (but limited to being in the housing) with the distance AC the same as the equivalent distance in the earlier described embodiment. It will thus be appreciated that again the point 'A' will follow an arcuate path of movement upon angular movement of the spindle between the

door closed and fully opened positions respectively. This four-arm linkage is a special version of the three-arm linkage of Figures 4 and 5. When the cam track is an arc of a circle, it can effectively be replaced by a fourth link.

Figure 8 shows, for a device of the invention, a graph which is a plot of torque at the operating spindle against spindle (crank) rotation, and can thus be compared with the graph shown in Figure 3. Apart from small effects due to different levels of friction loss, this graph will be identical for the mechanisms of Figures 4 and 5 and Figures 6 and 7 respectively and it can be seen that there is an initial large torque requirement at the crank rest position (door closed), this then falling continually as the door is opened and the crank moves angularly up to approximately 60° .

Thereafter there is a slight increase in torque, until there is a further falling off from approximately 140° of crank angular movement onwards, with it being shown from Figure 7, and also from Figure 8, that 190° of crank angular movement can be obtained. Again, as described with the first embodiment, it is desirable for the closer to use a single link arm engaging with a guide rail rather than a multi-link arm arrangement. As described, the torque profile of Figure 8 is for the closer itself, the actual torque produced at a door, and the door opening angle, being further modified by the external linkage. As stated, the profile is best reproduced by the use of a single link arm.

Although the embodiment of Figures 6 and 7 produces the desired torque effect, the embodiment of Figures 4 and 5 is advantageous in allowing for the provision of 'fine tuning' and in providing a more efficient, stronger and more compact mechanism.

Figures 13 to 16 relate to a still further embodiment of the invention in which the cam track of the first embodiment of Figures 4 and 5 is fine tuned as earlier mentioned. However equivalent parts are similarly numbered, with the addition of the suffix 'a'.

Figure 13 is a view of the door closer of this still further embodiment in a similar form to that shown in Figure 10. However here the linkages are relatively positioned slightly differently in this 'door closed' position and, more importantly, it can be seen that the cam track in each cheek forming part of opposite sides of the body is no longer a simple circular arc. Instead the cam track 30a is made up of a series of points using differing radii of curvature and differently positioned centres, with a curve being constructed between the points. An alternative way of regarding the profile is that it made up of a series of arcs of different curvature and centres.

Figures 13 and 14 include dimensions in mm for the links and the cheek (and thus for this end part of the housing), whilst Table 1 gives values for the X and Y co-ordinates of the centre line of the cam track, the origin for the co-ordinate data being at the axis 19a of spindle 18a. Table 2 gives values of the co-ordinates for the instantaneous centres of curvature and radii of curvature for the centre line of the cam track of Table 1, i.e. for each of the series of points (arcs) making up the track.

Figure 16 is a graph of door closing moment against door opening angle for this still further embodiment, and it can be seen that when the cam tracks are 'tuned' the closing moment or torque more closely approaches the ideal requirement for the whole of the door opening movement, up

to, in this example, over 180° . Compared to the graph of Figure 8, it can be seen that with this 'tuned' cam track arrangement, the fall after initial opening of 2° is much steeper and that from about 10° to 90° of door opening the moment is almost constant, before thereafter reducing at 100° of opening and then remaining substantially constant to maximum door opening. However the two curves are different in principle because the Figure 16 curve depends upon the geometry of the external links and the mounting on the door, whereas the Figure 8 curve is a property of the closer alone. The external links alter not just the torque but also the opening angle. Thus at 190° crank rotation the door may have opened through less than 180° .

The co-ordinate values given in Table 2 indicate that some of the centres lie outside of the closer housing, these being those where $Y > 25$ mm or $Y < -25$ mm.

Figure 17 is a diagram showing the link geometry for a crank slider mechanism moving along a portion of a cam track defined by an arc of circle radius R . In other words it represents the geometry of the arrangement of Figures 4 and 5.

The crank part 20 has a length ℓ_1 , with the link 25 having a length ℓ_3 and the link 26 having a length ℓ_2 . The angle which the link 25 makes with the line along which the crank slider moves is denoted by β , whilst the distance in a line parallel to said line between axis 19 and the pivot of link 25 to the piston slider 22 is x . A line is shown through axis 19 parallel to the line along which the crank slider moves, and the angle of crank part 20 to that line is denoted by ϕ . Similarly the angle of link 26

to a line through point B parallel to the crank slider line of movement is denoted by δ . Finally the radius R is shown struck from a centre C which is defined by co-ordinates a and b with an origin at axis 19, and the parallel lines through the axis 19 and along which the crank slider moves respectively, are spaced apart by a distance y. From this geometry three equations can be written:

$$\begin{aligned} (1) \quad y &= \ell_1 \sin \phi + \ell_2 \sin \delta - \ell_3 \sin \beta \\ (2) \quad (a + \ell_1 \cos \phi - \ell_2 \cos \delta)^2 + (b + \ell_1 \sin \phi + \ell_2 \sin \delta)^2 &= R^2 \\ (3) \quad x &= \ell_2 \cos \delta - \ell_1 \cos \phi + \ell_3 \cos \beta \end{aligned}$$

From equations (1) and (2) it is possible to derive expressions for β and δ in terms of ϕ , ℓ_1 , ℓ_2 , ℓ_3 , a, b, y and R. By substituting for β and δ in equation (3) it is possible to derive an expression for x which is a function of ϕ , ℓ_1 , ℓ_2 , ℓ_3 , a, b, y and R, i.e.

$$x = x(\phi, \ell_1, \ell_2, \ell_3, a, b, y, R)$$

This relates the position of the piston pivot to the geometry and crank angle only, since for a particular linkage ℓ_1 , ℓ_2 , ℓ_3 and y are fixed and a, b and R are either fixed, where the path of movement of A is a circular arc, or are variable, but known, for the points making up the cam track, as described previously in relation to Tables 1 and 2. Accordingly by selecting values satisfying this expression, the linkage will provide the torque curve required, as a result of there being a high mechanical advantage around initial door opening. Thereafter a reduction takes place which is proportional to the torque curve given. The mechanical advantage is present in the linkage in the closer itself, and also in the

TABLE 2 - Co-ordinates for the instantaneous centres of curvature and radius of curvature for the centre line of the cam track

X (mm)	Y (mm)	X (mm)	Y (mm)	Radius (mm)
-25.2875000	14.2236500	-14.038411	-6.4604996	23.545192
-24.5718000	14.5971300	-14.038401	-6.460508	23.545204
-23.8654000	14.9359100	-14.169443	-6.1792787	23.234948
-23.1685000	15.2422000	-14.252972	-5.9805746	23.019401
-22.4813000	15.5179700	-14.387021	-5.629553	22.643654
-21.8038000	15.7649900	-14.445398	-5.4612139	22.46548
-21.1360000	15.9848500	-14.515548	-5.2333931	22.227106
-20.4782000	16.1790100	-14.608426	-4.9051815	21.886009
-19.8302000	16.3487700	-14.67401	-4.6364808	21.60942
-19.1922000	16.4953200	-14.739937	-4.3310159	21.296918
-18.5640000	16.6197700	-14.793033	-4.0381195	20.999252
-17.9438000	16.7231100	-14.84237	-3.7169913	20.674357
-17.3374000	16.8062600	-14.878351	-3.4197375	20.374933
-16.7390000	16.8700600	-14.91151	-3.0638923	20.017547
-16.1504000	16.9152800	-15.053439	-0.161228	17.111705
-15.5716000	16.9426300	>100	<-100	>100
-15.2871000	16.9476950	>100	<-100	>100
-15.0026000	16.9527600	-18.516075	46.444555	29.700344
-10.9230700	17.7312000	-0.200187	-27.384745	46.37271
-6.8435400	18.5096400	-0.1005176	-28.189136	47.183091
-4.9592600	18.7431200	0.0005644	-29.007028	48.007046
-3.16631000	18.8934500	0.0001059	-28.997411	47.99742
-1.44195000	18.9783400	-0.0002557	-28.995658	47.995656
0.23136900	18.9994400	-0.0001661	-29.00503	48.005028
1.86784000	18.9636400	-0.000256	-29.002366	48.002361
3.47880400	18.8737700	<-100	<-100	>100
11.9955979	18.0961145	<-100	<-100	>100
16.6279066	17.6711462	15.69506	7.7147507	10.00000
19.2253797	17.0708640	15.695059	7.7147497	10.00000
21.5719458	15.8056237	15.695061	7.714753	9.99999
23.5008295	13.9653484	15.695055	7.7147483	10.00000
24.8749412	11.6808303	45.63772	20.676148	22.627609
25.3656800	10.6236300	49.37345	22.562401	26.81244
26.1907600	9.09131500	54.738933	25.666391	33.011079
27.0445700	7.70104700	59.297154	28.612502	38.438498
27.9228000	6.40511500	61.968902	30.492949	41.705644
28.8229200	5.18080400	62.116935	30.596635	41.886226
29.7430600	4.01867200	59.619785	28.537728	38.649745
30.6814600	2.91788900	55.230381	24.640677	32.7800
31.63161300	1.88457100	50.122775	19.701151	25.674629
32.6045600	0.93152900	45.195122	14.403249	18.439347
33.5835000	0.07915300	41.178815	9.4224938	12.041047
34.5685800	-0.64188000	38.425733	5.1921801	6.9938465
35.5538200	-1.18481000	37.03898	2.0530576	3.5622306
36.5306700	-1.47272000	36.839788	3.0673249	4.5505562
38.0392193	-1.38556281			

geometry from the closer to the door. The spring rate of the closer remains constant.

Typical values for the fixed lengths in the expression for x , are:

$$\ell_1 = 20.5 \text{ mm}$$

$$\ell_2 = 23.00 \text{ mm}$$

$$\ell_3 = 97.00 \text{ mm}$$

$$y = 8.00 \text{ mm}$$

a , b , R and x are inter-related to optimise the torque profile.

Figures 18 to 24 show an alternative form of the fine-tuned cam track of Figures 13 to 15. Like Figures 14 and 15, dimensions in mm. are included for the lower cheek 35b, with the corresponding upper cheek being a mirror image. As compared to upper cheek 34a of Figures 13 to 15, lower cheek 35b has equivalent parts similarly numbered, but with suffix 'b'.

Figure 25 is an enlarged view of the fine-tuned cam track 30b. This can be regarded as made up of a series of values defining the centre line of the cam track, with the origin for the co-ordinate data being at the axis 19b of spindle 18b. Selected values are set out in Table 3, in the same way as for Table 1.

TABLE 3 - Co-ordinates for the centre line of the cam track

<u>X</u> (mm)	<u>Y</u> (mm)
-26.4456100	-12.9493200
-25.3109800	-13.6996000
-24.2001600	-14.3639500
-23.1139500	-14.9509700
-22.0529000	-15.4680500
-21.0173900	-15.9216300
-20.0076400	-16.3173700
-19.0238000	-16.6602900
-18.0659200	-16.9548800
-17.1339500	-17.2051800
-16.2278500	-17.4148900
-14.1265742	-17.8241944
-12.0089078	-18.1384341
-10.3456193	-18.3363006
-9.05655545	-18.4870864
-7.62389558	-18.6546690
-5.78420007	-18.8670509
-4.17214971	-19.0584303
-3.51039247	-19.1358381
-2.59498593	-19.2294837
-0.70792060	-19.3335732
0.81268573	-19.3309173
3.11883242	-19.1793679
5.10646466	-18.9041328
6.14432895	-18.7059733
7.50415763	-18.3882282
8.51216390	-18.1089752
10.5619785	-17.4211828
12.8940495	-16.4296269
15.4724350	-15.0441400
18.1569158	-13.2234346
21.5339298	-10.4234073
24.6094131	-7.84277036
27.3289566	-5.56080245
29.5765136	-3.55453564
30.8654138	-2.28725028
31.6919344	-1.42428094
33.1249000	0.16915000
34.0890000	1.21649000
35.0679000	2.20638000
35.9992252	3.10617680
36.9553252	3.95751680
37.9199939	4.69741631
38.8091477	5.24985140
39.7885366	5.76303077
40.8126684	6.18007045

The cam track 30b can also, however, in a simplified form, be regarded as being reduced to a series of radii, as shown in Figure 25, which includes typical values of radii, as well as other dimensions for this particular example. The centres about which the respective arcs are struck are also shown.

As can be seen from Figure 25, a part-circular left hand end of the track merges to a first part defined by an arc 'a'. There then follows a second part defined by an arc 'b' which is joined to a third arc 'c' by a straight line, which is in fact tangential. There is then a fourth arc 'd' joined by a further tangential straight line to the third arc 'c', and the centre line of the cam track is completed by fifth and sixth arcs 'e' and 'f' respectively. The right hand end of the track is part-circular, but has a local relief to assist assembly, in use, of the follower.

Figure 26 shows two plots of door movement torque against door movement angle for a door closer of the invention incorporating a pair of cheeks each having the cam track of Figures 18 to 25. The upper graph corresponds to door opening and the lower graph corresponds to door closing, the difference being attributable to hysteresis loss.

Figure 27 shows how, at least as an approximation, two interlinked parabolic curves can be fitted to the closing graph of Figure 26 from the maximum torque position at 2° to approximately 30° of door movement, the first curve 'A' opening downwardly and the second curve 'B' opening upwardly. The torque profiles shown in Figure 26 are believed to be

almost the optimum and to represent an improvement over those of known door closer devices in two aspects, namely:

- i) efficiency- less force being required to open the door whilst maintaining the minimum 60Nm specification (DIN) for closing,
- ii) torque drop-off and 'flat' portion (meeting a minimum torque figure)

It will be appreciated that a maximum torque position is reached when the rate of change of the torque with door opening or closing is zero.

Figures 28 to 32 show various possible arrangements for mounting a device of the present invention at a door and associated transom (frame).

In Figure 28 there is shown a door 49 with associated transom 50, a device of the invention being shown at 51 having a single slide arm 52 which engages in a guide rail 53. In this embodiment the device 51 is mounted on the pull side of the door with the door being hinged to the transom in a standard manor. With this arrangement it has been found that at 2° of opening the moment (torque) is 58 Nm whilst at 90° of opening the moment is 29 Nm. The embodiment shown in Figure 29 is similar to that shown in Figure 28 but uses an offset hinge arrangement. Here the equivalent moments are 54 Nm and 36 Nm respectively. With the third construction, shown in Figure 30, the device 51 is mounted on the transom at the pull side of the door and standard hinges are used as with the arrangement shown in Figure 28. Here the moment at 2° of opening is 69 Nm and at 90° of opening is 36 Nm.

Figure 31 shows an arrangement where the device 51 is transom mounted at the push side of the door, with a maximum opening of 100°. The moment at 2° of opening is 34 Nm with a value of 13 Nm at 90° of opening. Finally with the arrangement shown in Figure 32, the device 51 is door mounted at the push side thereof, with a maximum opening of 130°. The moment 2° of opening is 60 Nm and 45 Nm at 90° of opening. All these quoted moment values are approximate and may vary within the range of experimental error. The transom mounted arrangement can give the same initial torque as the Figure 28 application, but thereafter the geometry will change the torque profile. They do however illustrate the desired fall-off in force needed to move the door through ninety degrees.

As well as relating to a device for controlling the movement of a wing, the present invention also relates to such a device together with an arm mechanism in the form of a single slide arm, connectable at one end to the housing for angular movement about the axis defined in the housing and having a slide portion (slide, roller or the like) at its other end, and a guide rail with which the slide portion of the single slide arm engages. A kit of parts would thus be sold comprising the device, the slide arm and the guide rail together with appropriate ancillary fixing means.

Further, although the invention has been described specifically in relation to an overhead door closer, the device of the invention is also applicable for use with a floor spring for controlling the movement of a wing, for example a door. Suitable equivalent resilient means can be used in any versions of devices of the invention instead of a compression spring, for

example a bag containing compressible gas. Instead of a pair of spaced cheeks each having the cam track therein, there could be a single cam follower in a single cam track in a single central housing part, the cam follower projecting to opposite sides of the single part where it is connected by respective link arms to the door closer spindle and also to the piston.

CLAIMS

1. A device for controlling the movement of a wing, comprising a housing, resilient means in the housing, a piston reciprocally movable in one direction under the influence of said resilient means and in the opposite direction under the influence of an arm mechanism connected to the housing, in use, the arm mechanism having an arm angularly movable about an axis defined in the housing, and a linkage mechanism between said axis and the piston arranged so that a greater torque is exerted, in use, on said arm when the resilient means is in its least or substantially least compressed state, corresponding to a closed or near closed position of the wing, in use, than when the resilient means is compressed beyond its least or substantially least compressed state, corresponding to an open position of the wing.
2. A device as claimed in Claim 1, wherein the linkage mechanism comprises a first link angularly movable about said axis, a second link pivotally connected to the piston, and a third link having spaced pivotal connections to said first and second links respectively, the connection of said second and third links being constrained to move along a predetermined path upon angular movement of said first link, in use.
3. A device as claimed in Claim 2, wherein said third link is connected at its respective opposite ends to said first and second links.
4. A device as claimed in Claim 2 or Claim 3, wherein said predetermined path is in the form of a continuous curve.




5. A device as claimed in Claim 4, wherein the centre of curvature of at least a portion of said curve lies outside of said housing.
6. A device as claimed in Claim 4, wherein said curve is a single arc.
7. A device as claimed in Claim 6, wherein the centre of curvature of said single arc lies outside of the housing.
8. A device as claimed in any one of Claims 4 to 7, wherein said curve is defined as a cam track in the housing along which a cam follower at said connection moves, in use.
9. A device as claimed in Claim 8, wherein said axis in the housing is defined by an operating spindle, respective opposite ends of said spindle being journalled in a pair of spaced housing parts which have identically shaped and positioned cam tracks in respective facing internal surfaces thereof.
10. A device as claimed in Claim 9, wherein said first link is defined by a crank part of said operating spindle, a pair of arms forming said third link is arranged at respective opposite sides of said crank part and pivotally connected together at said crank part, a pivot pin extends through said arms and part of said second link disposed therebetween, and cam followers carried on respective opposite ends of the pivot pin are respectively received in said cam tracks in said internal surfaces of the housing parts.






11. A device as claimed in Claim 2 or Claim 3, wherein said connection is constrained to move along a single arc by a fourth link pivotally connected to the housing and also pivotally connected to said second and third links at said connection.
12. A device as claimed in any one of Claims 2 to 11, wherein the second link is pivotally connected at one of its ends to the piston.
13. A device as claimed in Claim 12, wherein the piston has a sector-like recess about the position of its pivotal connection to the second link to allow for angular movement of said second link.
14. A device as claimed in any one of Claims 2 to 13, wherein the resilient means is arranged to act on an end of the piston opposite to that from which said second link extends.
15. A device as claimed in Claim 14, wherein the resilient means acts between said movable piston and an end stop of the housing.
16. A device as claimed in any one of the preceding claims, in which said resilient means is a compression spring.
17. A device as claimed in any one of the preceding claims, wherein the maximum torque exerted on said arm is in the near closed position of the wing, in use.

18. A kit of parts comprising a device as claimed in any one of the preceding claims, an arm mechanism connectible, in use, at one of its ends to said housing for angular movement about said axis defined in the housing, and a guide rail with which the other end of the arm mechanism engages.



19. A kit of parts as claimed in Claim 18, wherein the arm mechanism is in the form of a single link arm.

1 / 10

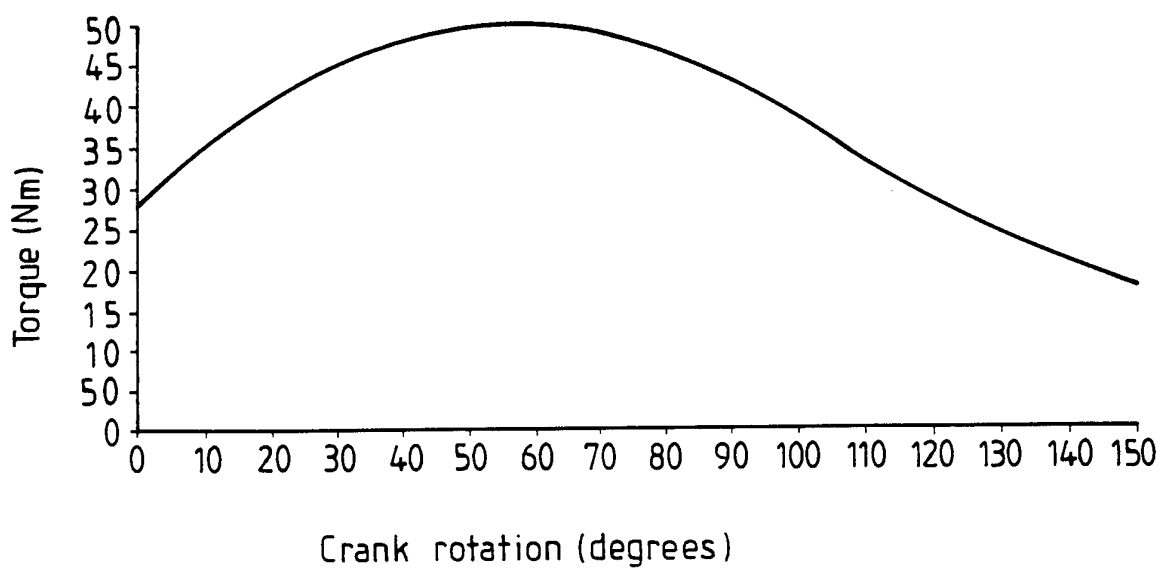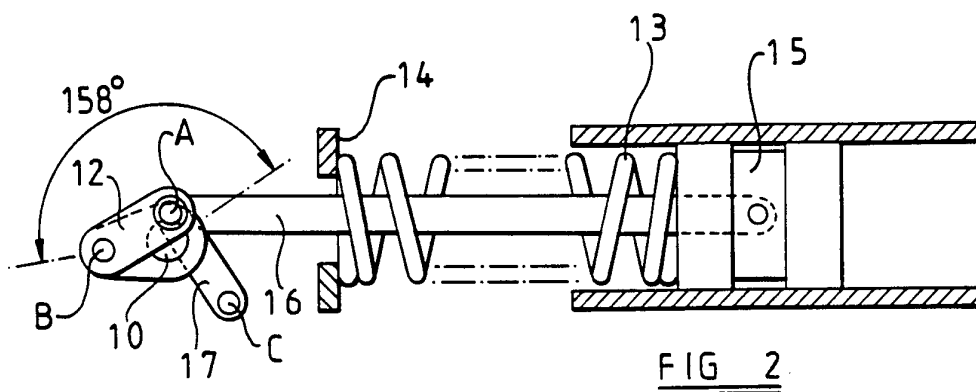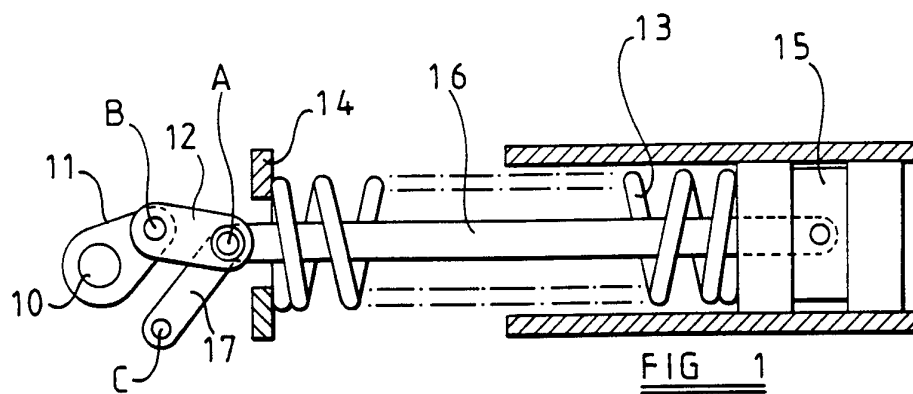

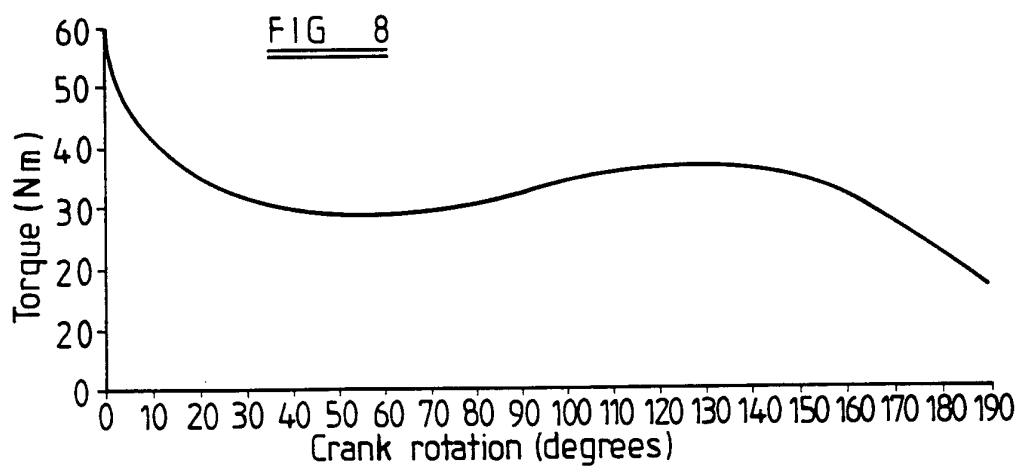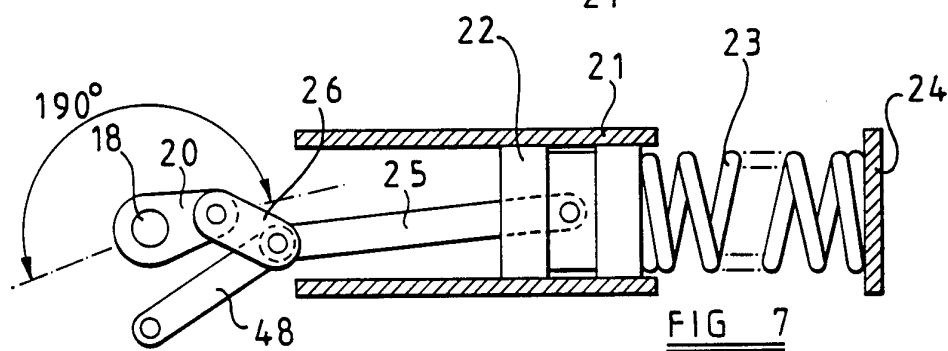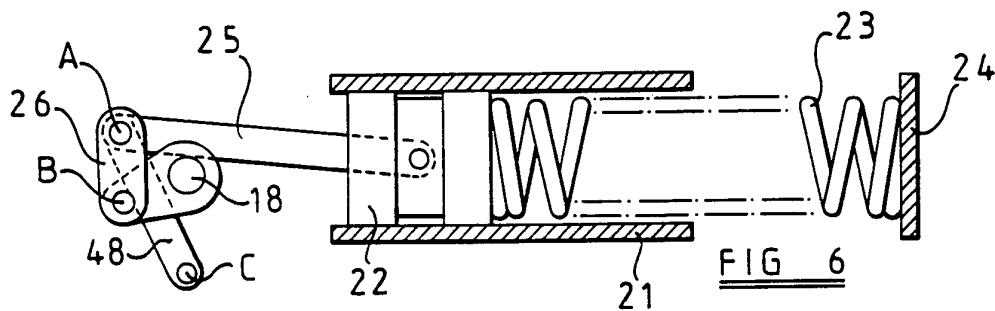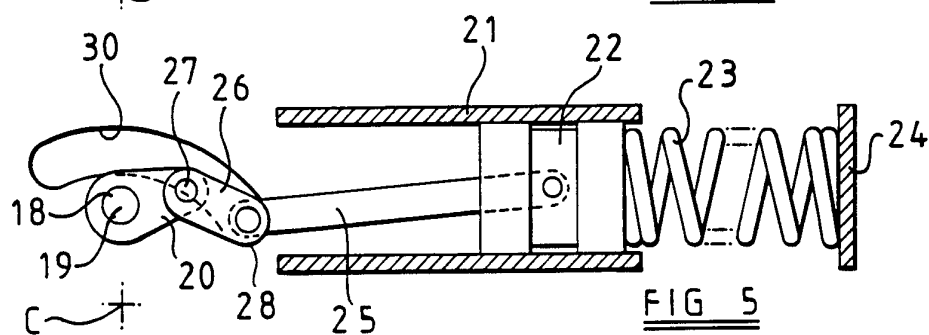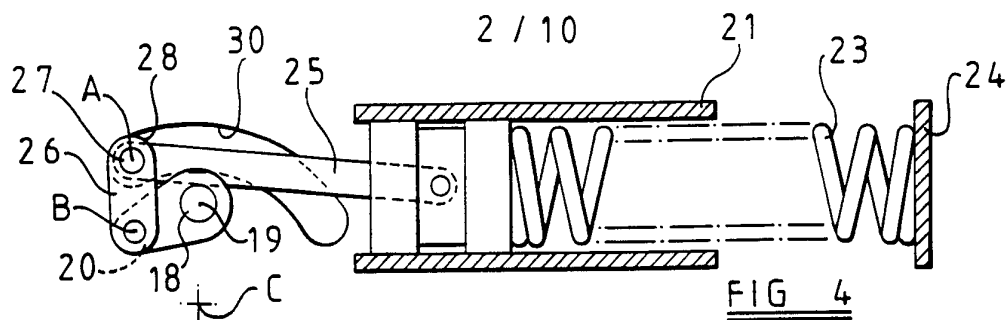

3 / 10

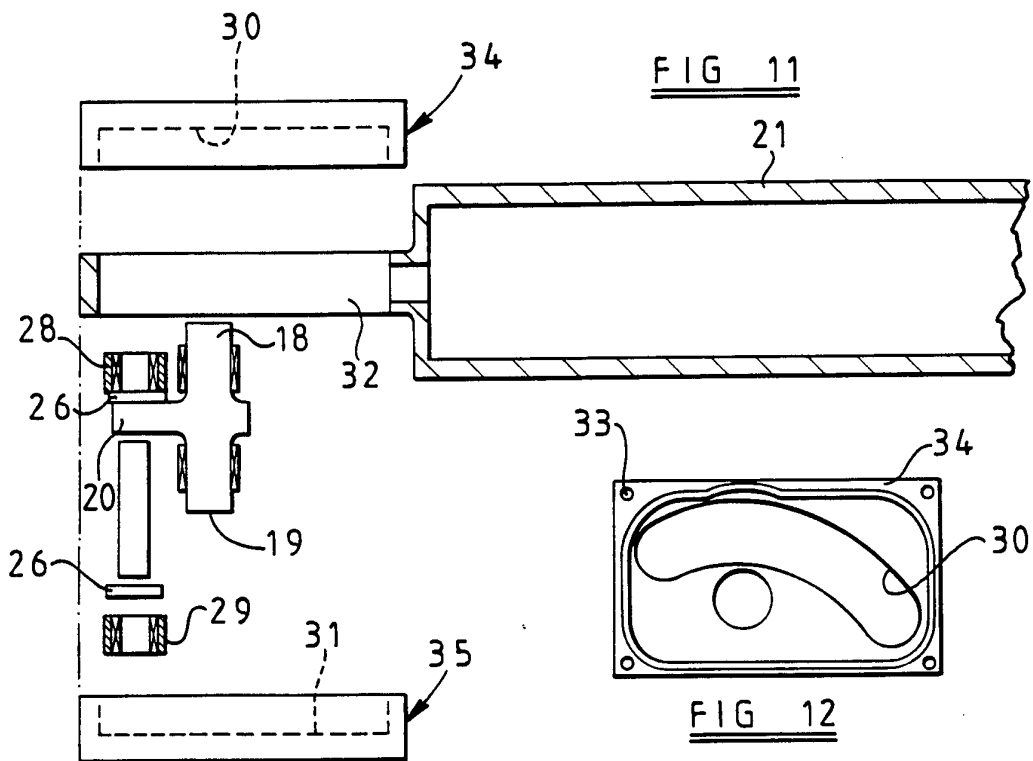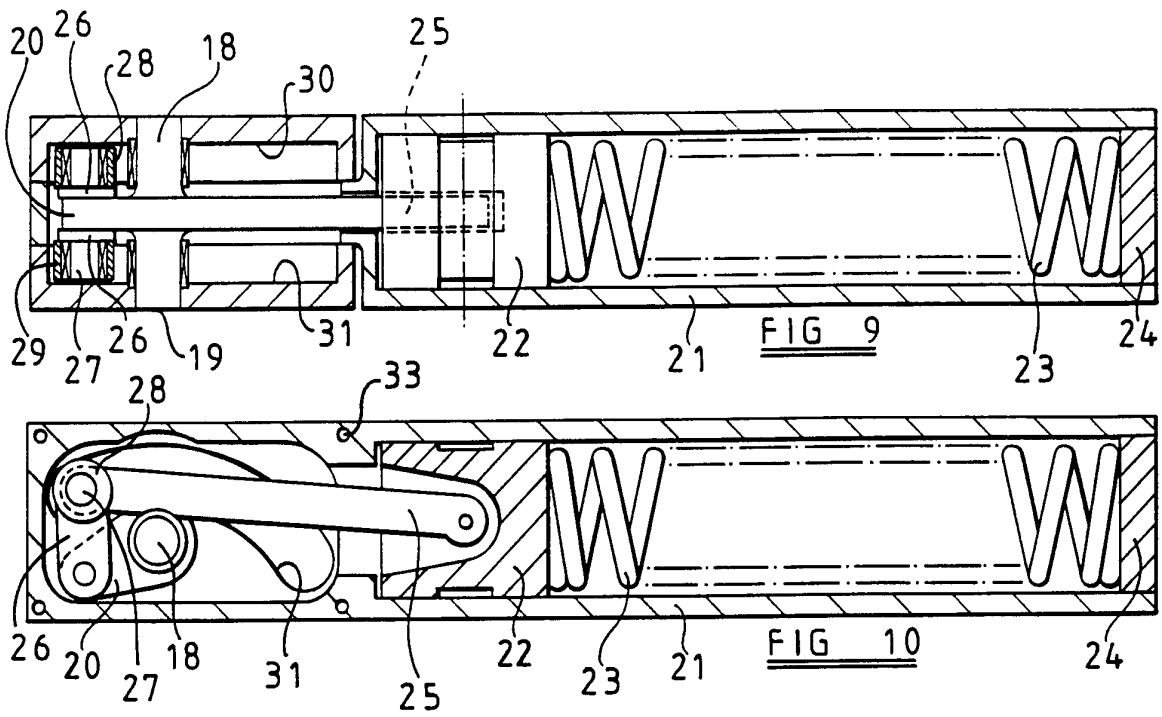

5 / 10

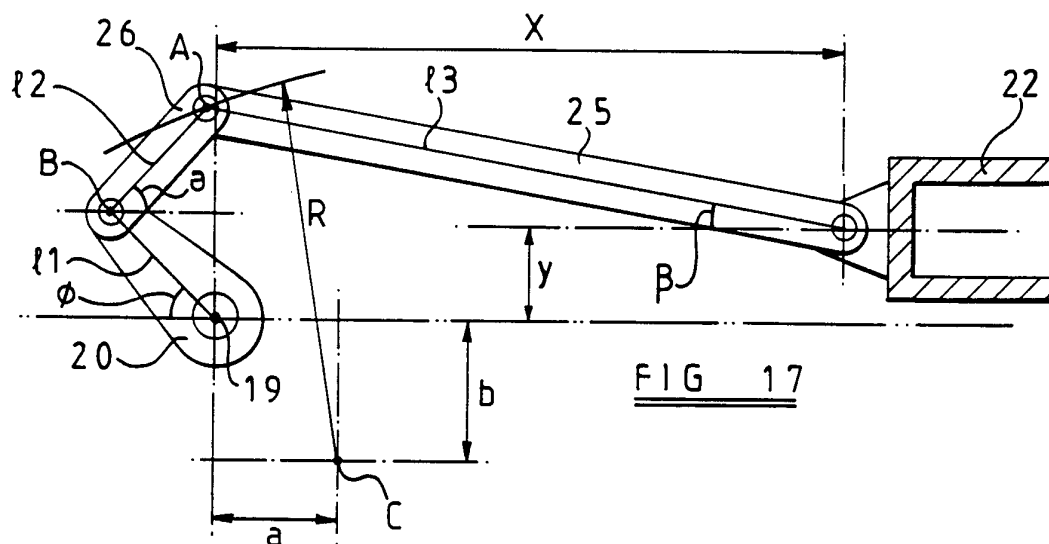


FIG 17

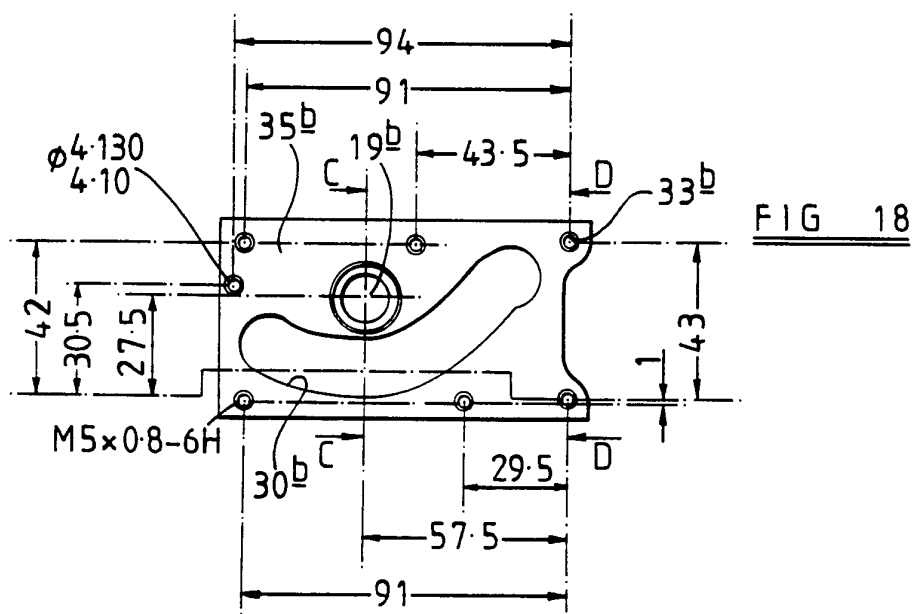


FIG 18







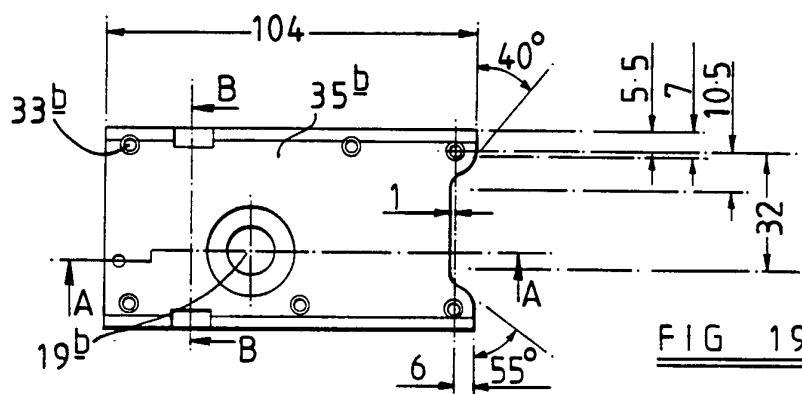


FIG 19


6 / 10

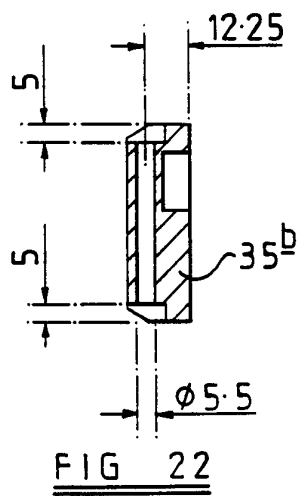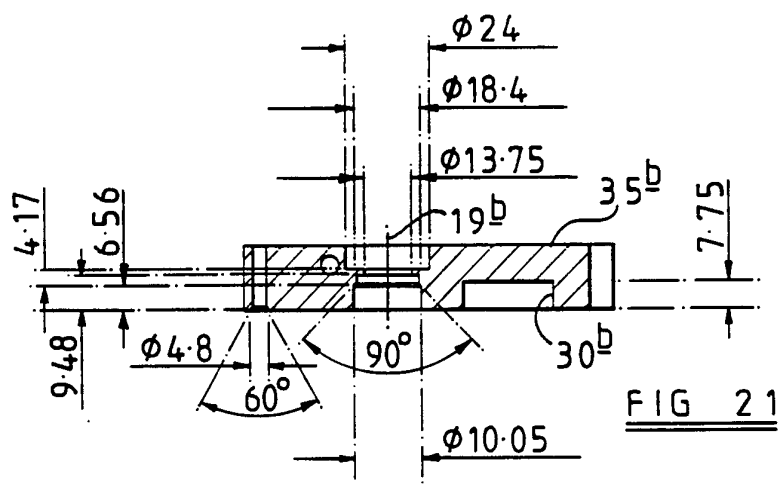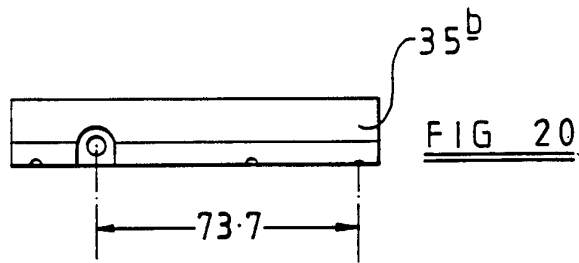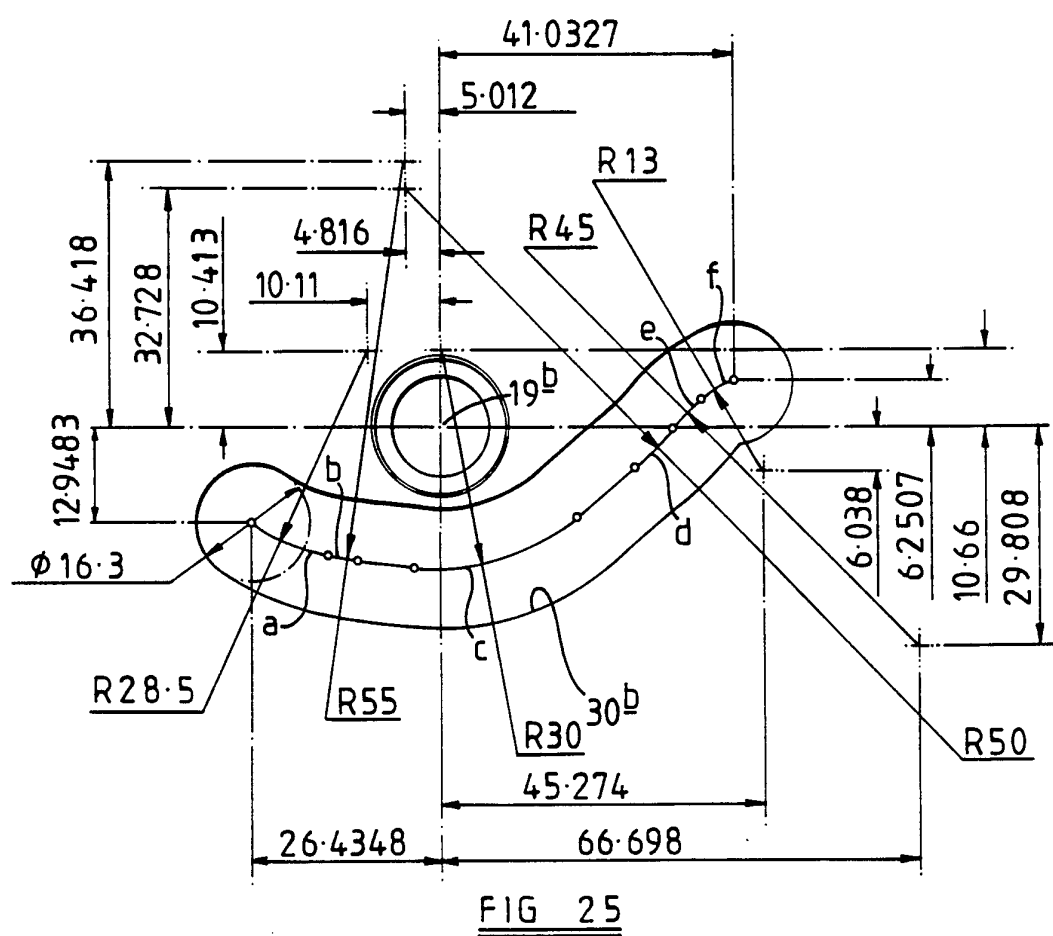

7 / 10

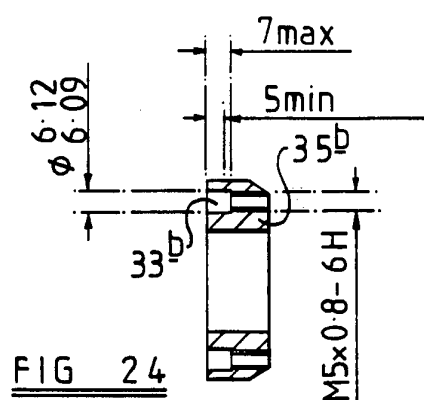

8 / 10

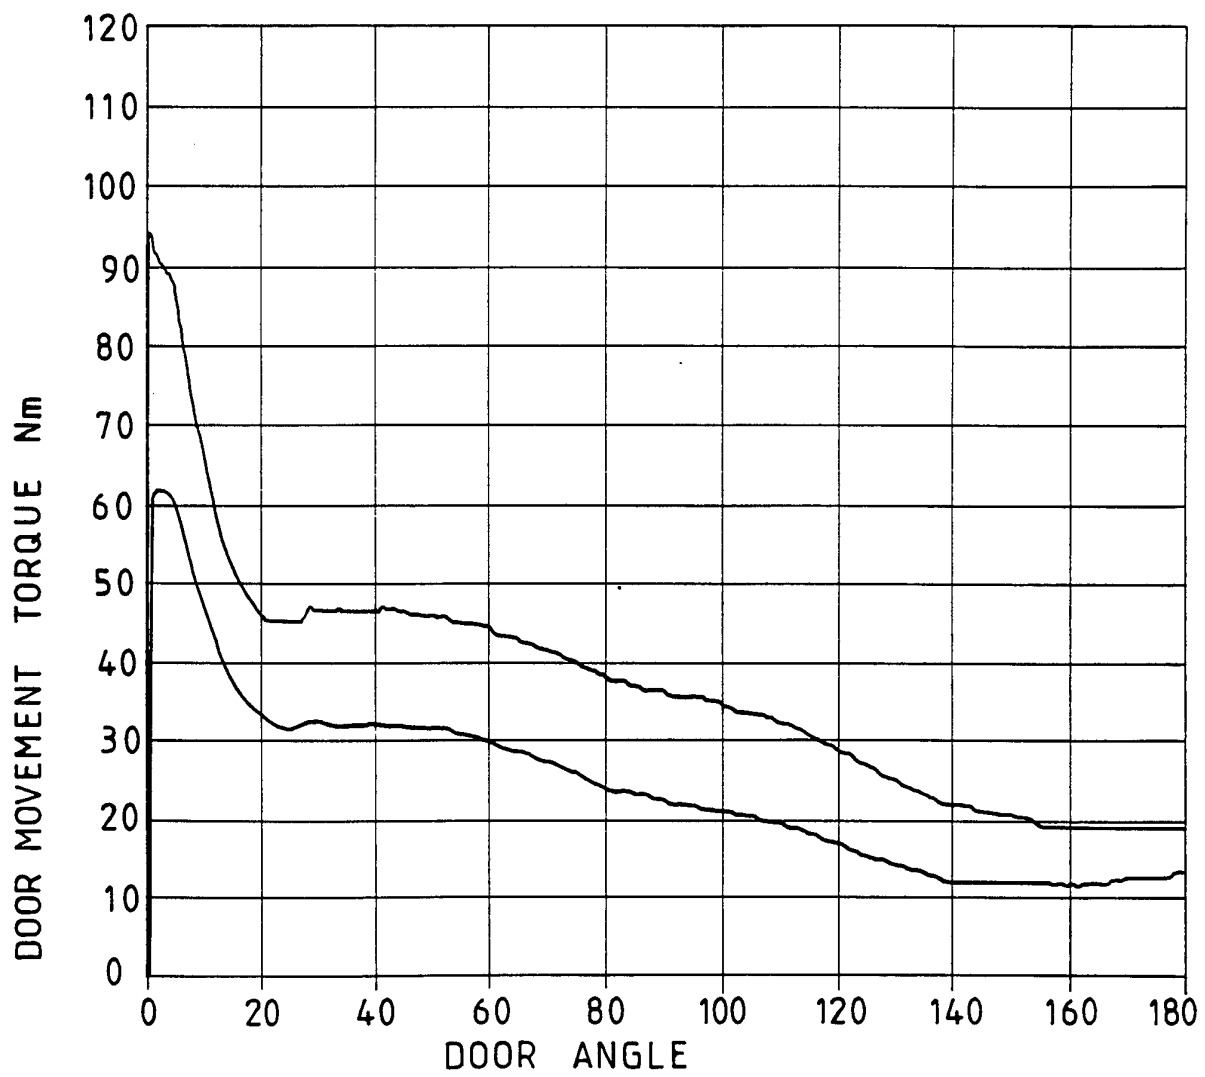FIG 26

9 / 10

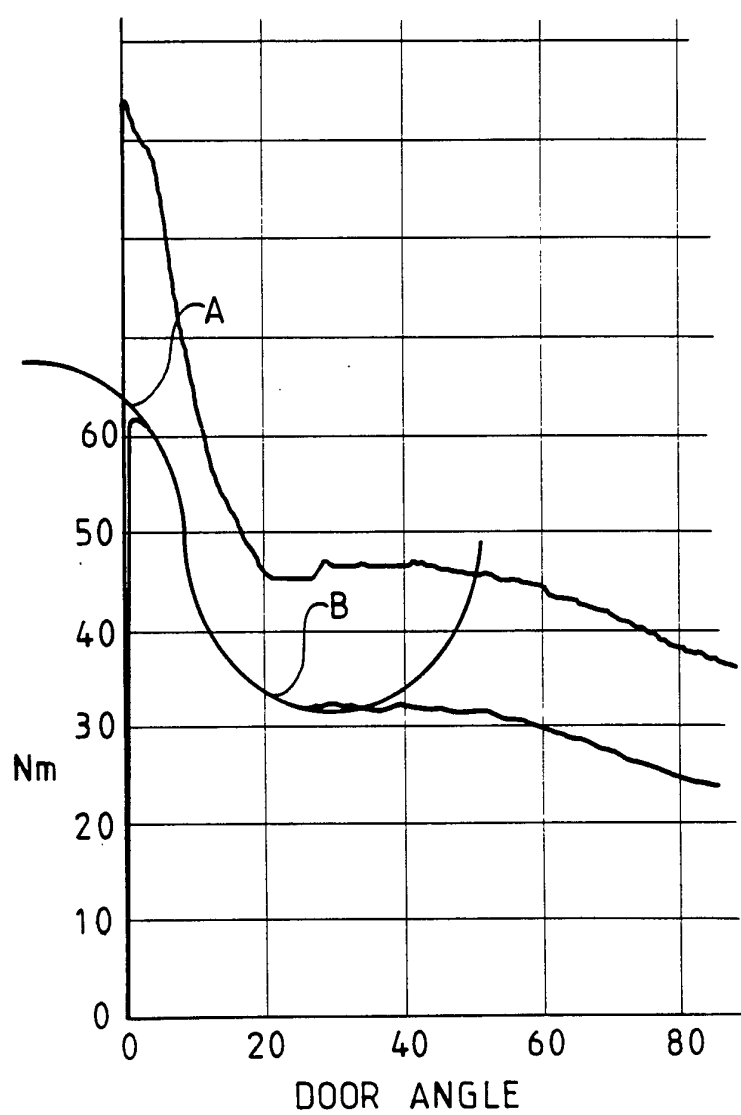
FIG 27

FIG 28

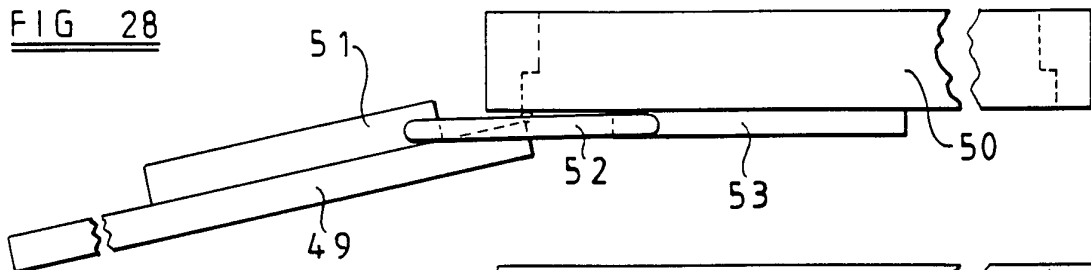


FIG 29

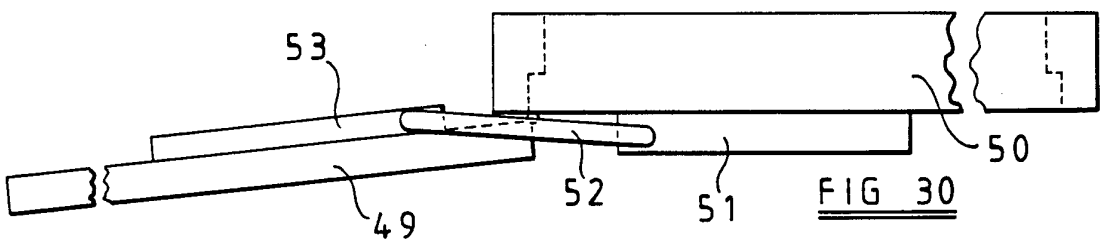
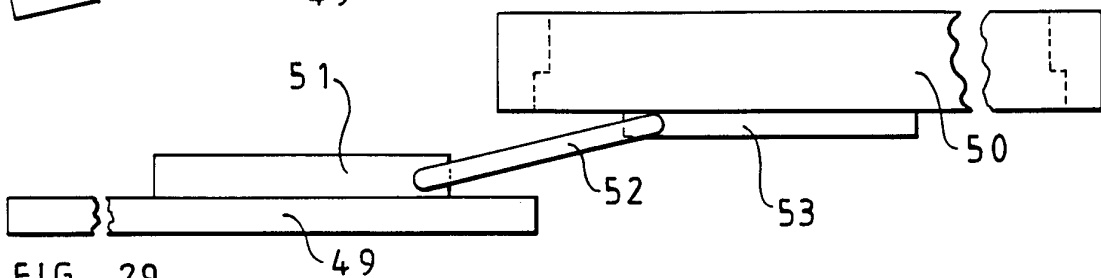


FIG 31


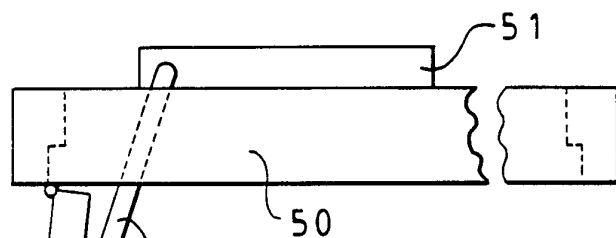


FIG 32

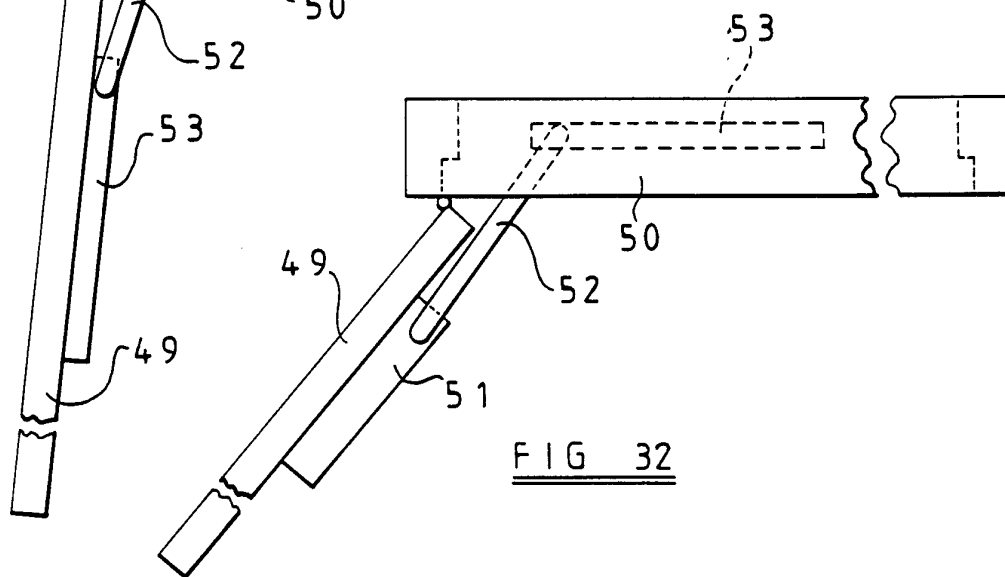

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 94/02668

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 E05F3/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 E05F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB,A,1 207 841 (BROWN) 7 October 1970	1-4,6, 11,12, 16,17 10,18
A	see page 2, line 10 - line 29 see page 2, line 128 - page 3, line 100; figure 1	
Y	GB,A,842 988 (VEREINIGTE BAUBESCHLAG-FABRIKEN GRETSCH & CO. G.M.B.H.) 4 August 1960	1-4,6, 11,12, 16,17 18
A	see page 2, line 29 - line 62 see page 3, line 114 - line 130 see page 4, line 84 - line 90 see figures 1,2,6,12	
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

4 April 1995

Date of mailing of the international search report

19.05.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Kessel, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 94/02668

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,22 58 583 (VEREINIGTE BAUBESCHLAGFABRIKEN GRETSCH & CO GMBH) 6 June 1974 see page 5, line 5 - line 12; figure 2 ---	13
A	EP,A,0 207 251 (GEZE G.M.B.H.) 7 January 1987 see figures 3,8 ---	14
A	FR,A,2 198 528 (VEREINIGTE BAUBESCHLAGFABRIKEN GRETSCH & CO. G.M.B.H.) 29 March 1974 see page 7, line 28 - line 33; figure 5 ---	17
A	US,A,4 788 742 (EDGETT ET AL) 6 December 1988 -----	18,19

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 94/02668

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-1207841	07-10-70	NONE	
GB-A-842988		NONE	
DE-A-2258583	06-06-74	NONE	
EP-A-0207251	07-01-87	DE-A- 3524185	15-01-87
		DE-A- 3638353	29-10-87
		JP-A- 62013677	22-01-87
		US-A- 4763385	16-08-88
		US-A- 4744125	17-05-88
FR-A-2198528	29-03-74	DE-A- 2243475	14-03-74
		GB-A- 1402795	13-08-75
US-A-4788742	06-12-88	NONE	