



US 20030098069A1

(19) United States

(12) Patent Application Publication

Sund et al.

(10) Pub. No.: US 2003/0098069 A1

(43) Pub. Date: May 29, 2003

(54) HIGH PURITY FLUID DELIVERY SYSTEM

Publication Classification

(76) Inventors: **Wesley E. Sund**, Eden Prairie, MN (US); **Joseph C. Dille**, Telford, PA (US); **Michael J. Barger**, Sauderton, PA (US); **Gary E. Pawlas**, Louisville, CO (US)

(51) Int. Cl.⁷ F16K 31/12

(52) U.S. Cl. 137/487.5

Correspondence Address:

Mark L. Gleason

Howery Simon Arnold & White, LLP

750 Bering Drive


Houston, TX 77057-2198 (US)

(57) ABSTRACT

A fluid delivery system includes a flow control device and a Coriolis mass flowmeter in fluid communication with the flow control device. The Coriolis flowmeter has a flow-tube made of a high-purity plastic material, such as PFA, making the delivery system suitable for high purity applications. A controller provides a control output signal to the flow control device, which may comprise a pinch valve, so as to vary the flow control device output in response to a setpoint signal and measurement signals received from the flowmeter.

(21) Appl. No.: **09/995,067**

(22) Filed: **Nov. 26, 2001**

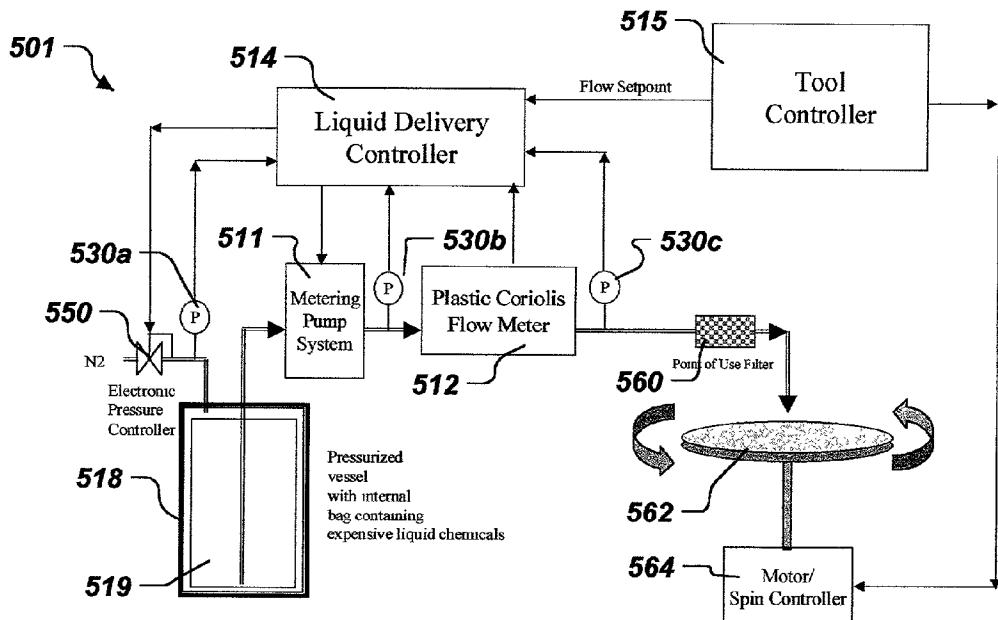

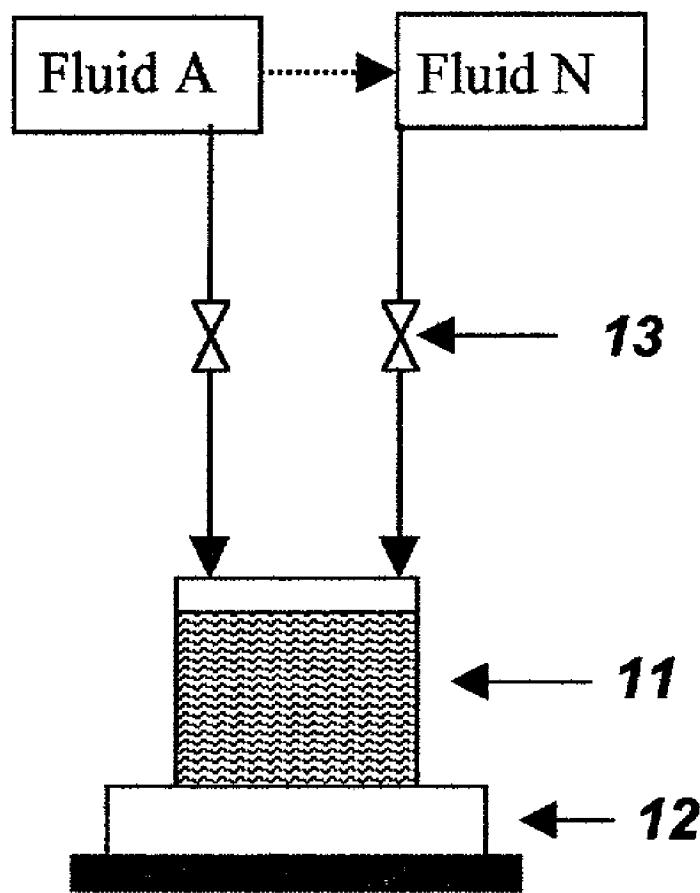
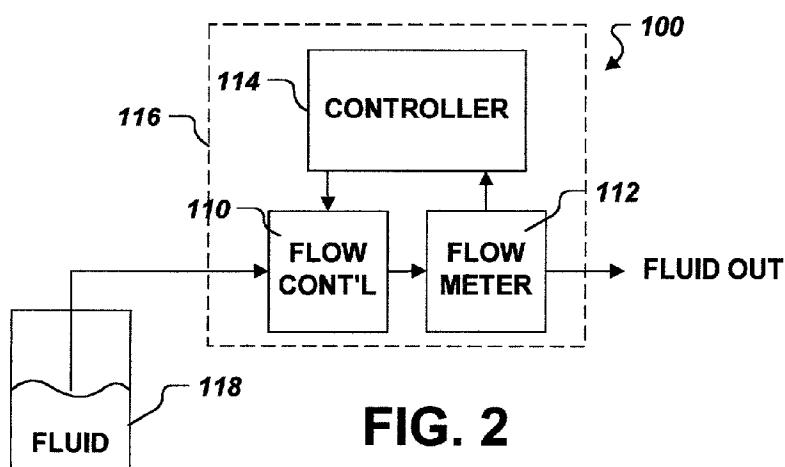
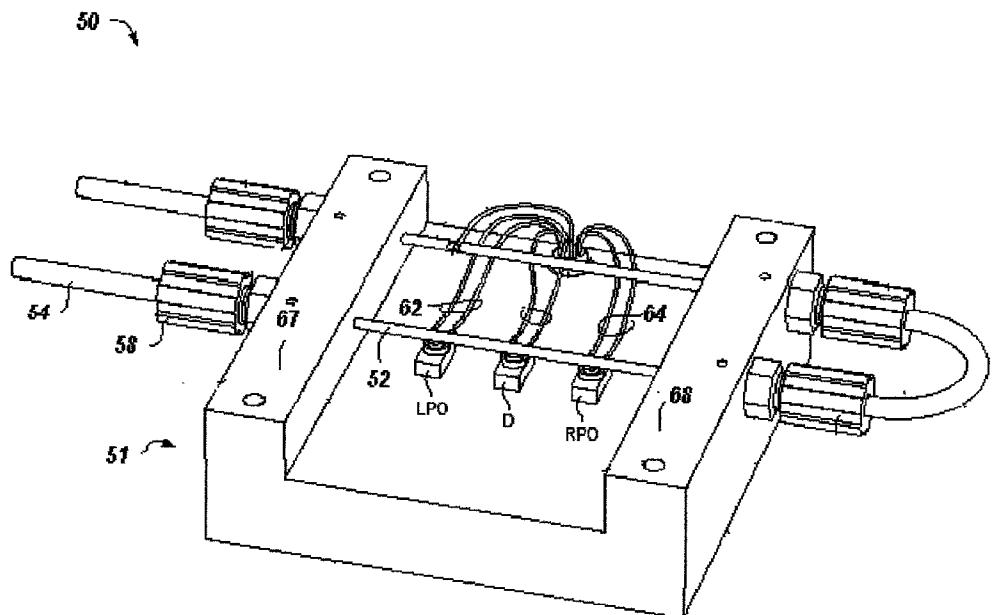
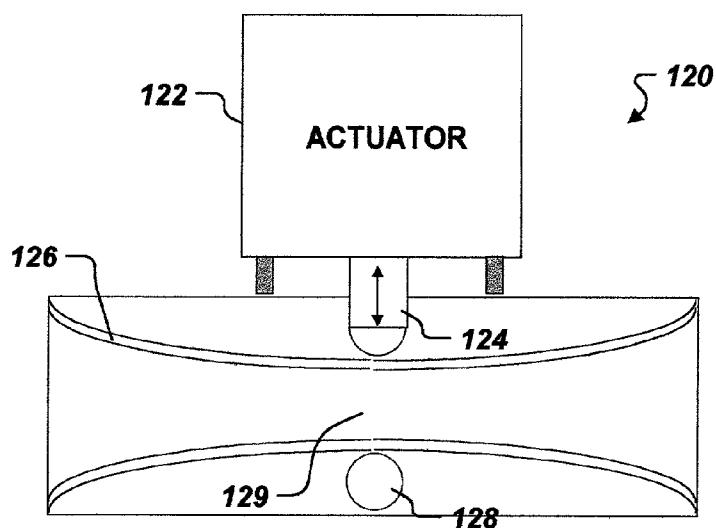
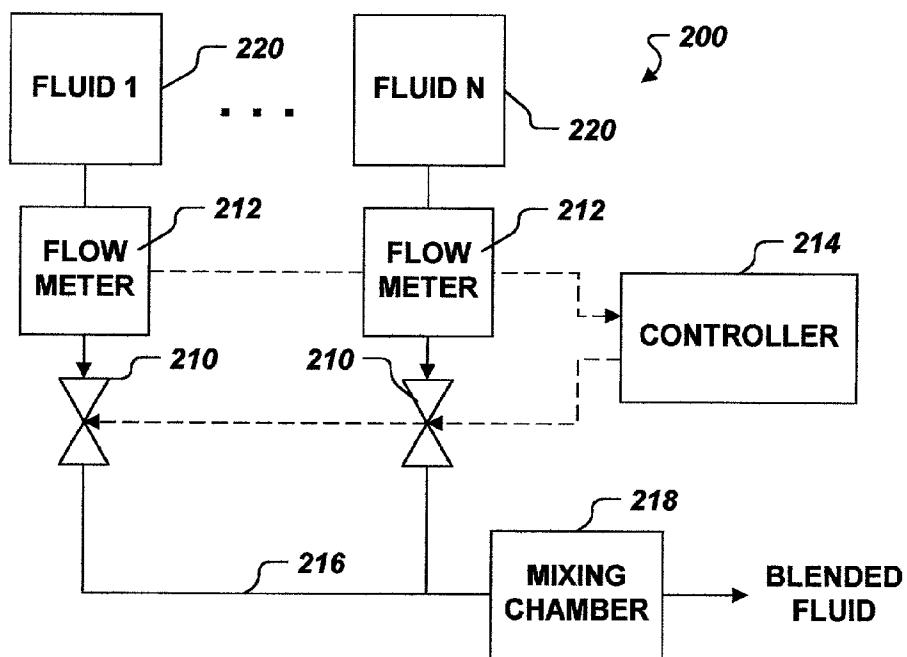


FIG. 1
(prior art)

**FIG. 2****FIG. 3**

**FIG. 4****FIG. 5**

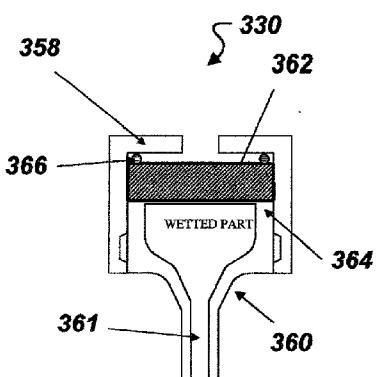


FIG. 7A

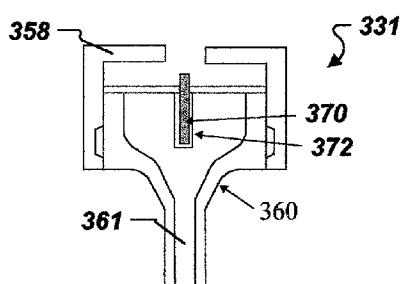


FIG. 7B

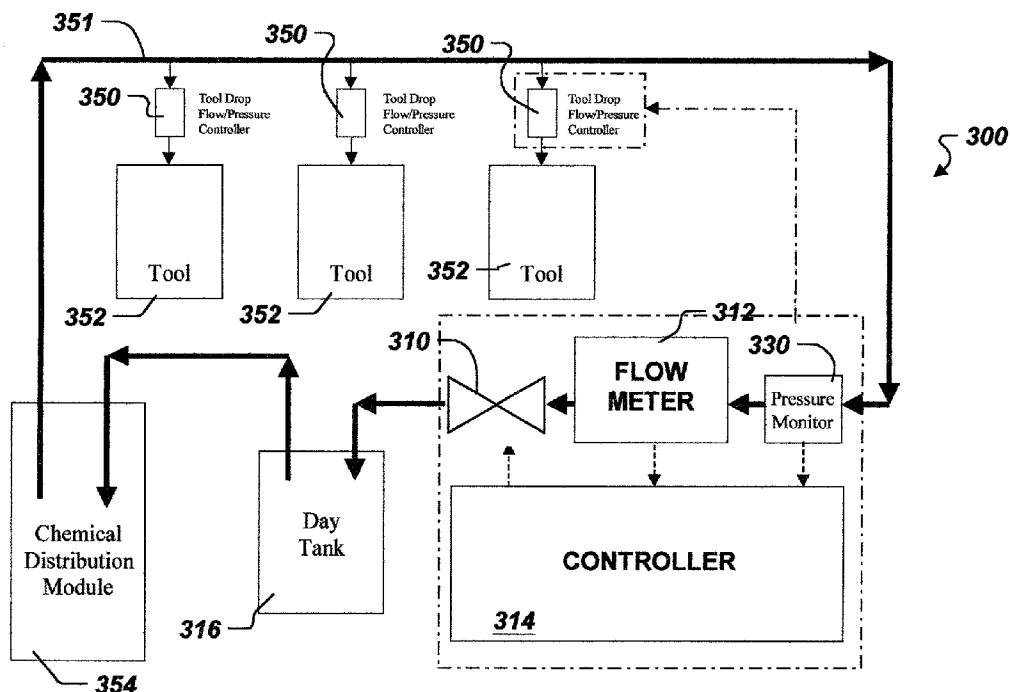
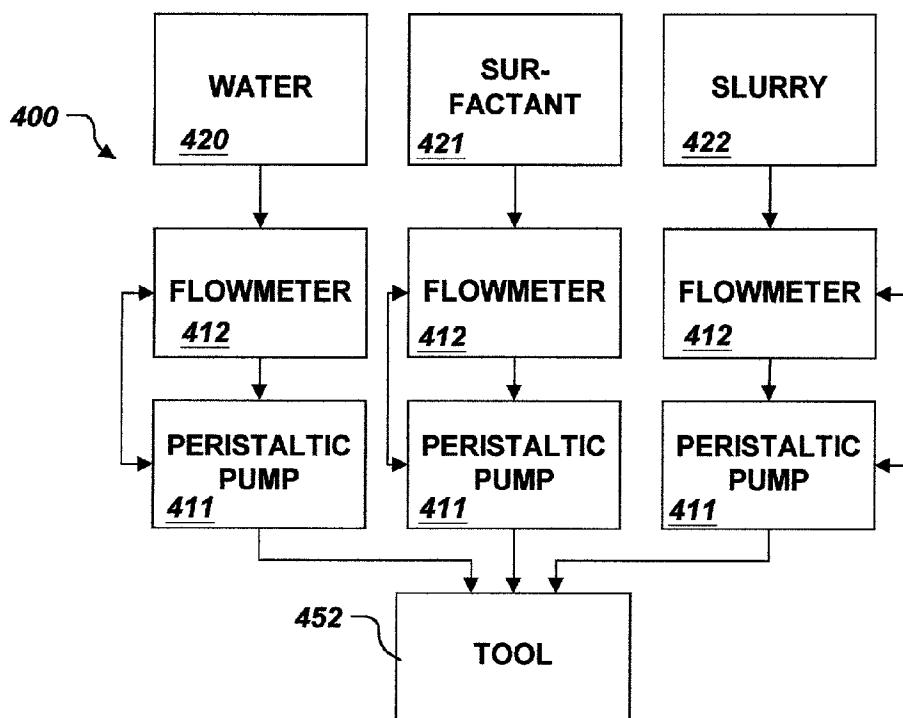
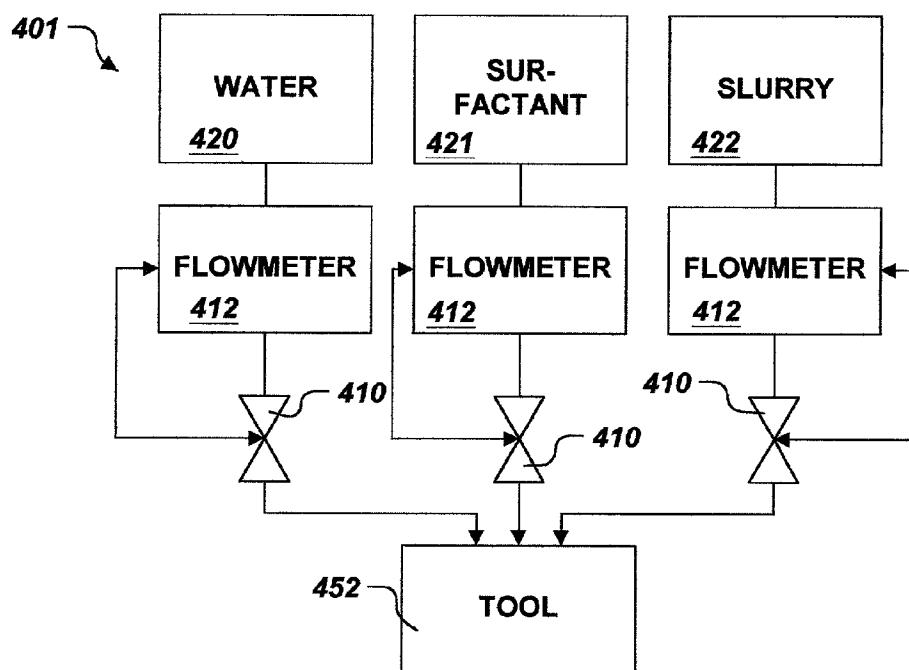
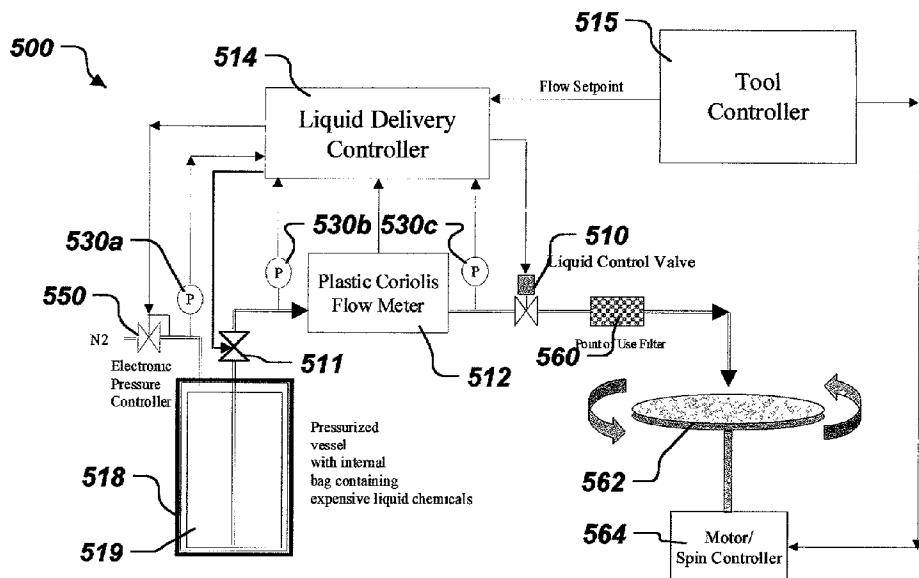
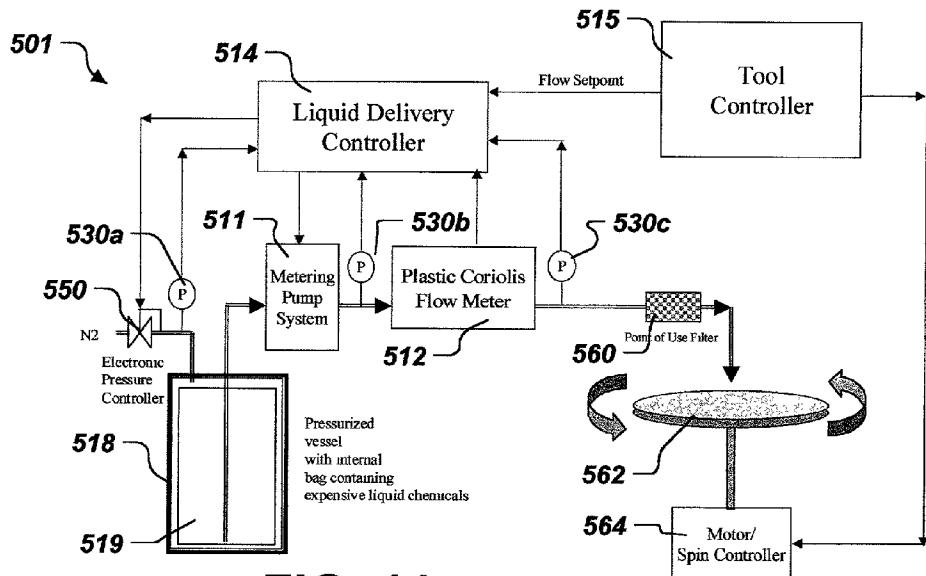


FIG. 6

**FIG. 8****FIG. 9**

**FIG. 10****FIG. 11**

HIGH PURITY FLUID DELIVERY SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is related to U.S. patent applications entitled "High Purity Coriolis Mass Flow Controller," "Flowmeter for the Precision Measurement of an Ultra-Pure Material Flow," "Methods of Manufacturing a PFA Coriolis Flowmeter," "Manufacturing Mass Flow Meters Having a Flow Tube Made of a Fluoropolymer Substance" and "Compensation Method for a PFA Coriolis Flowmeter," each filed on the same day as this application. The entire disclosures of the referenced applications are incorporated by reference herein.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates generally to fluid delivery systems, and more particularly, to improved fluid delivery systems and methods that are suitable for the direct application of ultra-pure fluids to a wafer surface in processes such as CMP, photolithography and dielectric processes.

[0004] 2. Description of Related Art

[0005] Many industries such as semiconductor, pharmaceutical, and bio-technology experience fluid delivery problems due to the typically low flow rates, the use of abrasive and aggressive chemical fluids, and the need for contaminant free, accurate, compact, and real-time fluid delivery and/or blending systems.

[0006] Generally the semiconductor industry uses the word "tool" to refer to a system comprised of pieces of hardware that perform an operation on a wafer surface. These operations include the creation of thin films with some form of chemical deposition or fluid coating process, the etching of films in precise patterns, the polishing of films to reduce deposited films to a planar surface and the cleaning of surfaces to remove unneeded films, particles and chemical contaminants. The tool can either be stand alone or incorporated with other tools in a cluster structure where multiple sequential operations on the wafer are done in one location.

[0007] For example, Chemical-Mechanical Planarization (CMP) is a critical process in the semiconductor industry that involves a process to flatten the wafer surface of a semiconductor by applying an ultra-pure fluid containing small abrasive particles and a reactive agent between the wafer surface and a polishing pad. In most applications, the polishing pad rotates at a controlled speed against the wafer to flatten the surface. Over-polishing the wafer can result in altering or removing critical wafer structures. Conversely, under-polishing of the wafer can result in an unacceptable wafer surface. The polishing rate of the wafer is highly dependent upon the delivery rate of the fluid and the total amount of fluid delivered during a polishing operation.

[0008] In addition to fluid flow rate, prevention of contaminants in the fluid being applied to the polishing pad is critical. It is a problem in some applications that the instruments used to control the process are a source of contaminants to the process material. This is undesirable for use in systems where material an ultra high of purity must be

delivered to a user's application. For example, the metal flow tube of a typical Coriolis flowmeter can be a source of contaminates. This is the case in the fabrication of semiconductor wafers, which requires the use of material that is free of contaminants including ions migrating from the flow tube wall. This released material can cause the chips on a semi-conductor wafer to be defective. The same is true for a glass flow tube, which can release the leaded ions from the glass into the material flow. The same is also true for the flow tubes formed of conventional plastics.

[0009] Because prevention of ionic contaminants is critical, the majority of CMP processes utilize peristaltic pumps along with a suitable high purity tubing material to supply fluid to the polishing pad. While the clean flow path non-intrusive characteristic of peristaltic pumps is acceptable for CMP applications, the use of these pumps to attempt to control fluid flow rate is very inaccurate since they are operated open-loop with no flow measurement feedback

[0010] Another process used in the semiconductor industry requiring accurate control of fluid flows and a contaminant free environment is the photolithography process. As is known in the art, photolithography is a process that applies a light sensitive polymer, known as resist, to the wafer surface. A photomask containing a pattern of the structures is to be fabricated on the wafer surface is placed between the resist covered wafer and a light source. The light reacts with the resist by either weakening or strengthening the resist polymer. After the resist is exposed to light, the wafer is developed with the application of fluid chemicals that remove the weakened resist.

[0011] A modification of this process applies a host of new liquids to the wafer surface to create films that will become an integral part of the final semiconductor. The primary function of these films is to act as an insulator between electrical conducting wires. A variety of "spin-on" materials are being evaluated with a wide variety of chemical compositions and physical properties. The key difference between the lithography process and the spin-on deposition is that any defect in the film (such as a void, bubble or particle) is now permanently embedded in the structure of the semiconductor and could result in non-functioning devices and a financial loss for the semiconductor producer.

[0012] Both of these processes take place in a tool called a "track." The purpose of the track is to apply a precise volume of fluid to the surface of a stationary or slowly spinning wafer. After the liquid application, the wafer rotation speed is rapidly increased and the liquid on the wafer surface is spun off the edge. A very thin, consistent thickness of liquid remains from the center of the wafer to the edge. Some of the variables that affect liquid thickness include the resist or dielectric viscosity, solvent concentration in the resist or dielectric, the amount of resist/dielectric dispensed, speed of dispense, etc.

[0013] The track will also provide additional processing steps after liquid application that changes the liquid to a polymer using a bake process that also removes any solvent in the film. Dielectric films can also be exposed to other chemical treatments to convert the liquid film to the proper solid structure. The track also controls the environment around the wafer to prevent changes in humidity or temperature and chemical contaminants from affecting the performance of the film. Track system performance is deter-

mined by the accuracy and repeatability of liquid delivered to the wafer surface in addition to minimizing defects in the film caused by voids, bubbles and particles.

[0014] Problems associated with currently available fluid delivery systems used in processes such as CMP and spin-on applications include the inability to provide closed loop flow measurement, the inability to provide an accurate fluid delivery rate based on changing head pressure of the pump system, variances in the volume of tubing used in the pump, and pulsations from the pump. Further, periodic weekly or even daily calibration of the pump may be required. Other problems associated with current fluid delivery systems involve contamination of the fluid from shedding tubing particles.

[0015] Additional factors typically important in these industries include the need for real-time fluid property data such as flow rate, fluid temperature, viscosity, density and pressure. While all of the foregoing fluid properties can be measured using a combination of various instruments such as differential pressure transmitters, viscometers, densitometers, pressure transmitters, temperature elements or a combination of the instruments and a control system to calculate the fluid property values, the use these instruments can be expensive, have significant space requirements, require increased maintenance, and provide a greater potential for fluid leakage and process contamination. Therefore, there is a need for an efficient, compact and contaminant free solution to fluid delivery systems in the foregoing industries.

[0016] In other processes there is an increased need for a real-time blending system of multiple fluids requiring a high-purity flow path. In addition, blending based on a volumetric basis is generally unacceptable since typical blending formulas are based on molar ratios. Current blending methods include adding multiple fluids to a container on a weigh scale in an off-line manner, as shown in FIG. 1. Multiple fluids, A through N, flow into a container 11 placed on a scale 12. One fluid is allowed to run through a flow valve 13 at a time. The scale total is examined and when the desired amount of Fluid A has been added, the valve 13 is closed. The same process is repeated with the remaining fluids. Eventually, a total mixture is obtained. If too much or too little of any fluid has been added the process must continue until the proper mass of each fluid, within some acceptable error band, has been added.

[0017] Another known approach uses a level sensor to measure the volume of each fluid of the blend as it is being added to the vessel. This requires a very precise knowledge of the volume of the vessel with small increments of vessel height.

[0018] Unfortunately, the current batch production method can result in too much or too little of the final product being available when needed. Since having too little product available would shut a process down, extra product is always produced, meaning some product will be left over and not used. Since these products often have a limited shelf life (e.g. several hours) this excess product must be disposed of. This disposal is costly for several reasons. The product is typically uses very expensive chemicals, and the fluid mixture can often be very hazardous meaning it must be disposed of in a controlled and costly manner.

[0019] As technology develops, the need for manipulation of the blending formulas based on the differences in the

product requirements, and additional new material components continues to increase, thus requiring a greater need for flexible, accurate and contaminant free real-time continuous blending systems. Another important factor includes the need for accurate pressure control to ensure proper blending and accurate fluid flow rates to the processing tool.

[0020] Thus, there is a need for fluid delivery systems that address shortcomings associated with the prior art.

SUMMARY OF THE INVENTION

[0021] In one aspect of the present invention a fluid delivery system includes a flow control device, a Coriolis mass flowmeter having a flow-tube made of a high-purity plastic material, and a controller, such as a PID controller. The Coriolis flowmeter provides output signals to the controller indicating, for example, mass flow rate, temperature, and/or density measurements of a process fluid. The control device receives a setpoint signal and the flowmeter output signals, and provides a control output signal to the flow control device to vary the control device's output in order to provide the desired flow rate for the fluid delivery system.

[0022] The Coriolis mass flowmeter's flow-tube is made of the high-purity plastic material to prevent transferring unwanted (e.g. metal) ions to the process fluid. Perfluoralkyl (PFA) plastic is a suitable material for the flow tube. The flow control device may be embodied by, for example, a control valve, a pump, or a controlled pressurized reservoir. In exemplary embodiments, the control valve is a pinch valve having a solenoid or stepper motor actuator.

[0023] In accordance with other aspects of the invention, a recirculating fluid distribution system includes a fluid reservoir and a distribution conduit in fluid communication with the reservoir. The distribution conduit has a plurality of tool drops for providing fluid from the reservoir to tools attached to the tool drops. A flow control device, such as a variable output pump or a pinch valve, is in fluid communication with a Coriolis mass flowmeter that has a flow-tube made of a high-purity plastic material. A pressure transmitter is in fluid communication with the Coriolis mass flowmeter. A controller receives a setpoint signal and output signals from the Coriolis flowmeter and the pressure transmitter, and provides a control output signal to the flow control device to vary the flow control device output to maintain a predetermined pressure and flow rate in the distribution conduit.

[0024] In accordance with still further aspects of the invention, a fluid delivery system, includes a reservoir having an inlet for receiving a gas to pressurize the reservoir and an outlet for dispensing fluid contained in the reservoir. A first flow control device is connected to the reservoir inlet and a second flow control device is in fluid communication with the reservoir outlet to control fluid flow out of the reservoir. A Coriolis mass flowmeter is in fluid communication with the second flow control device. The Coriolis flowmeter has a flow-tube made of a high-purity plastic material, such as PFA. A controller receives a setpoint signal and output signals from the Coriolis flowmeter, and provides control output signals to the first and second flow control devices to vary the pressure of the reservoir and the flow rate of fluid from the reservoir.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] Other objects and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings in which:

[0026] **FIG. 1** schematically illustrates a prior art off-line blending system;

[0027] **FIG. 2** is a block diagram schematically illustrating a fluid delivery system in accordance with the present invention;

[0028] **FIG. 3** is a perspective view of a Coriolis flowmeter having a high purity flow tube suitable for use in the various embodiments of the present invention;

[0029] **FIG. 4** schematically illustrates a pinch valve in accordance with the present invention;

[0030] **FIG. 5** is a block diagram illustrating aspects of a real-time, high purity blending system in accordance with embodiments of the present invention;

[0031] **FIG. 6** is a block diagram illustrating a recirculating fluid distribution system in accordance with embodiments of the present invention;

[0032] **FIG. 7A** schematically illustrates a high purity pressure transmitter in accordance with aspects of the present invention;

[0033] **FIG. 7B** illustrates an alternative embodiment of a high purity pressure transducer containing an encapsulated sapphire sensor;

[0034] **FIG. 8** is a block diagram conceptually illustrating aspects of a high purity fluid delivery system for a CMP process tool in accordance with embodiments of the present invention;

[0035] **FIG. 9** is a block diagram conceptually illustrating aspects of an alternative high purity fluid delivery system for a CMP process tool in accordance with embodiments of the present invention;

[0036] **FIG. 10** is a block diagram illustrating a closed-loop fluid delivery system for a spin-on process in accordance with embodiments of the present invention; and

[0037] **FIG. 11** is a block diagram illustrating an alternative closed-loop fluid delivery system for a spin-on process in accordance with embodiments of the present invention.

[0038] While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE INVENTION

[0039] Illustrative embodiments of the invention are described below. In the interest of clarity, not all features of an actual implementation are described in this specification. It is will of course be appreciated that in the development of

any such actual embodiment, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the art having the benefit of this disclosure.

[0040] **FIG. 2** schematically illustrates a fluid delivery system **100** in accordance with exemplary embodiments of the invention. The mass flow-based delivery system **100** is suitable, for example, to control the flow of fluid to a tool or a work piece supported by a tool, such as a polishing pad of a CMP system or a track used for semiconductor spin-on applications. In general, the system **100** includes a flow control device **110**, a mass flowmeter **112**, and a controller **114**.

[0041] The controller **114** receives a setpoint signal representing a desired parameter, such as mass flow rate. The controller **114** also receives an output signal from the flowmeter **112**. The flowmeter signal is conditioned and processed by the controller **114**, which then provides a control output signal to the flow control device **110** so as to vary the fluid flow rate. The controller **114** is electronic and has an electronic interface, and may comprise, for example, a proportional-integral-derivative (PID) controller. The setpoint input to the controller **114** is typically an electronic signal, such as a 0-5V, 4-20 mA signal or a digital word. A pneumatic setpoint interface could also be used. The controller **114** may also include a valve override feature, where an additional signal is sent into the controller **114** that causes the controller **114** to ignore the setpoint and fully open or close the flow control device **110**. This feature is often used for shutting the flow off or purging the system.

[0042] In certain embodiments, such as fluid delivery systems for chemical blending applications, the mass flowmeter **112** is preferably a Coriolis mass flowmeter. A direct mass flowmeter is generally preferable over a volumetric flowmeter since the desired chemical reactions typically are driven on a mole (mass) basis. Volumetric flow rate measurements can be made and corrected to standard conditions resulting in the equivalent of a mass measurement. However, additional information is required (fluid density, temperature, and/or pressure) making the measurement more difficult and costly. Mass flow rate measurements are typically more accurate than volumetric measurements which are converted to a mass measurement and, this accuracy results in a higher quality final product. This would increase the process yield and thus improve the profitability of companies utilizing this invention.

[0043] Many applications, such as those associated with the semiconductor, pharmaceutical, and biotechnology industries, require the flow path (all surfaces wetted by the process fluid) of fluid delivery systems be constructed of high purity, chemically inert/resistant, materials to protect the purity of the chemicals used. Plastics are desirable because the ultra pure chemicals used in the semiconductor wafer fabrication processes can be contaminated if metal ions are leached or removed from metal flow tubes due to a variety of mechanical and chemical processes. High purity grade plastics are thus used in these industries since this

generally prevents transferring unwanted (e.g. metal) ions to the process material. In addition, the smooth surface finish inherent in the manufacturing of a plastic flow tube reduces the ability of bacteria to attach to the tube and contaminate the fluid with organic materials.

[0044] The wetted path of the flowmeter 112 is designed such that it has no cracks, crevices, etc. that could harbor bacteria. A suitable high purity plastic is PFA (perfluoroalkoxy copolymer), which is an advanced fluoropolymer with superior chemical resistance and mechanical properties. A variety of fluorinated polymers such PVDF and PTFE are also suitable.

[0045] In addition to using high purity materials, the high purity flow path should have a constant diameter and no intrusions or multiple flow paths—a dual tube sensor or a curved flow path should be avoided. This minimizes pressure drop, reduces the shear rate on the fluid to a minimum, which is critical in some industries and applications. It also prevents plugging with certain materials, such as slurries.

[0046] A suitable Coriolis mass flowmeter having a flowtube made of a high-purity plastic material is shown in FIG. 3. The Coriolis flowmeter 50 has a flow tube 52 inserted through legs 67, 68 of a base 51. The flow tube 52 is preferably made of PFA. Pick offs LP0 and RP0 and a driver D are coupled to the flow tube 52. The flowmeter 50 receives a process material flow from a supply tube 54 and extends the flow through a connector 58 to the flow tube 52. The flow tube 52 is vibrated at its resonant frequency with material flow by the driver D. The resulting Coriolis deflections are detected by pick offs LP0 and RP0 which apply signals over conductors 62 and 64 to meter electronics (not shown), which determines the phase difference between the Coriolis deflections and applies output signals based thereon. Suitable Coriolis flowmeters having high purity flow tubes are disclosed in detail in the incorporated application entitled “Flowmeter for the Precision Measurement of an Ultra-Pure Material Flow.”

[0047] The flow control device 110 may comprise a control valve. As with the mass flowmeter 112, in high purity applications the control device must be made of materials that will minimize contamination of the fluid. Moreover, the control device 110 should be designed to have no places where stagnant fluid can collect and no sliding or rubbing parts that could create particles in the fluid.

[0048] For example, an all-plastic diaphragm valve made from plastics that are acceptable in high purity chemical environments could be used. For slurries, however, such a valve is not the ideal solution. Pinch valves have proven to be a good solution to slurry control. A suitable pinch valve 120 in accordance with the present invention is conceptually illustrated in FIG. 4. An actuator 122 forces a ram 124 onto a flexible tube 126 and against a reference surface 128 to pinch the tube 126 closed. The tube 126 is preferably made of a high purity plastic such as PFA. The tube's flexibility allows the tubing walls to conform around any trapped particles or imperfections in the walls to provide a tight seal. The flow path is straight through, minimizing pressure drop and turbulence. The fluid contacts only the flow tube 126 preventing wear or corrosion of the other valve parts and preventing metal contamination of the slurry in the case of high purity applications, such as semiconductor polishing operations.

[0049] The actuation of known pinch valves is usually bi-stable—on and off. Some known pinch valves have a manual actuator with a multi-turn handle, but this type of valve would not be conducive to closed loop flow control. Other pinch valves are used for dispensing applications in batch processes, in which the amount of material dispensed is controlled by the time that the valve is on. This does not allow dynamically controlling the flow rate.

[0050] A valve that has only two states can be controlled by applying varying current or voltage to the valve actuator. In one embodiment, pulse-width modulation (PWM) is used to control the valve. PWM is achieved by generating a square wave signal at a frequency above the valve's mechanical response frequency. The duty cycle of the signal is varied to determine the appropriate voltage or current sent to the device. For example, if the PWM signal operates between 0-12 volts, 0% duty cycle=0 volts, 50% duty cycle=6 volts, and 100% duty cycle=12 volts. The “averaging” takes place because the signal is at a frequency above the valve's mechanical response frequency. The position of the valve is based on the average current that is supplied. The resulting supply voltage is proportional to the pulse width of the signal.

[0051] If the signal frequency is too low, the valve will have time to respond completely to on and off signals creating a pulsed flow output, which is generally not desirable. A typical pinch valve actuator is a solenoid, which has a spring element with a preload adjustment that determines the current required to close the solenoid. Adjusting the preload on the valve spring can improve the valve's control range. In other implementations, the solenoid plunger element is replaced with a spring-suspended plunger. The spring-suspended plunger minimizes the non-linear valve response due to friction, which minimizes the hysteresis and dead band common in available solenoid-actuated pinch valves.

[0052] An alternative approach to the PWM-controlled solenoid is to use a stepper motor actuator, which translates a controlled, deterministic angular rotation to a linear ram drive by a worm gear type arrangement. Stepper controllers can be designed to produce a specific number of steps proportional to an analog signal input. Backlash, and thus valve hysteresis can be minimized by any number of appropriate worm gear designs that minimize backlash. A stepper motor generally provides immunity to temperature and pressure fluctuations, which may cause changes in the pinch tubing. A stepper motor is a means to control position, so the stepper is immune changes in the pinch tubing. With a pinch valve, the pinch tube is an integral part of the system—current is applied to the valve actuator, which applies force to the pinch tube, which pinches the tube. If the tube properties change due to temperature or pressure, the amount the tube closes, and thus the flow rate with a solenoid, changes. Moreover, a stepper actuator can remain at the last position to provide fast response to achieving setpoint at the start of a fluid delivery cycle.

[0053] The Coriolis flowmeter 112 and flow control device 110 may be configured as an integral unit, housed in a single enclosure 116, and additionally the controller 114 may also be housed in the same enclosure 116 to provide an integrated high purity, Coriolis mass flow controller. A suitable high purity, Coriolis mass flow controller is disclosed in addi-

tional detail in the incorporated application entitled "High Purity Coriolis Mass Flow Controller."

[0054] Alternatively, the flow control device 110 may comprise a variable output pump, such as a peristaltic pump. In still further embodiments, a pressurized vessel or reservoir in which the pressure is varied to change the flow rate of fluid dispensed from the vessel functions as the flow control device 110. For example, referring to FIG. 2, a fluid reservoir 118 may be variably pressurized to vary the flow rate of fluid exiting the reservoir 118. Controlling the fluid flow rate in this manner may be in addition to, or in place of, the illustrated flow control device 110. Such alternative flow control devices are discussed in further detail herein below in conjunction with further exemplary embodiments of the invention.

[0055] FIG. 5 illustrates a real-time blending system 200 in accordance with aspects of the present invention. The illustrated system is high purity, corrosion resistant and mass based to address shortcomings associated with the prior art. At least two key factors are needed to achieve these features. One is a high purity flow path, and another is a mass flow rate measurement. Accordingly, the system 200 includes Coriolis flowmeters 212 having high purity plastic flow tubes as described above. The Coriolis flowmeters 212 provide a density measurement that may be used as a feedback of the actual blend concentration when the blend is a binary solution of a heavy component such as an acid with water. Solids concentration in a slurry can also be monitored using the density measurement. In addition to mass flow rate and density, the flowmeters 212 may be configured to provide additional measurement output signals, such as a temperature measurement.

[0056] Using the mass flowmeters 212 allows real-time, on-line blending of multiple fluid streams 220. As noted above, a mass flow rate measurement is preferred over a volumetric flow rate measurement since the desired chemical reactions are typically driven on a mole (mass) basis.

[0057] The real time blending system 200 further includes flow control devices 210, such as the pinch valves described above. The flowmeters 212 provide output signals indicative of, for example, fluid flow rate, temperature and density to the controller 214. Based on pre-determined or real-time fluid stream flow rate setpoint parameters, the controller 214 sends control signals to the flow control devices 210 in order to supply the desired amount of blended fluid to a work piece. In this manner, the various fluids 220 are merged to form a single fluid stream that is provided to a common conduit 216. A mixing chamber 218 may further be provided to achieve complete blending of the fluids 220. Additionally, check valves (not shown) may be provided to ensure the individual fluid streams 220 are not contaminated due to variations in fluid stream supply pressures.

[0058] A man-machine-interface (MMI) may further be provided. The MMI provides an interface that, for example, communicates the values and status of input and output signals as well as providing predetermined alarms when the value of a programmed input signal or other measurement falls outside of an accepted range of values. In addition, the input and output signals between the various components of the system 200 can all be connected over a single pair fieldbus cable. Further, in certain embodiments, the system is also capable of calibration, testing and maintenance of the

system via the controller 214, as well as configuration and selection of the pre-configured blending recipes. While the system 200 invention as illustrated in FIG. 4 shows the flowmeter 212, flow control device 210 and controller 214 as separate components, it should be appreciated that various combinations of these components may be configured as an integral unit in a common enclosure.

[0059] A recirculating fluid distribution system 300 is illustrated in FIG. 6. The distribution system 300 includes a Coriolis flowmeter 312 having a flow tube made of a high purity plastic material as discussed above. The flowmeter 312 is in fluid communication with a flow control device, such as a pinch valve 310, and a pressure transmitter 330. A controller 314 receives measurement signals from the flowmeter 312 and the pressure transmitter 330, and provides a control signal to the valve 310. The controller 314, Coriolis flowmeter 312, pressure transducer 330 and valve 310 may be individual components, or may be combined as an integral flow and pressure control system.

[0060] A reservoir 316 contains fluid to be delivered to a plurality of tool drops 350 via a conduit 351. The tool drops 350 are each connectable to a respective tool 352 such as a cleaning, etching or CMP tool to provide fluid to the tool 352. A distribution module 354, such as a pump, circulates fluid from the reservoir 316 through the system 300. Alternatively, an inert gas such as nitrogen may be supplied to the reservoir 316 to pressurize the reservoir 316 and circulate the fluid.

[0061] The Coriolis mass flowmeter 312 allows a user to monitor flow rate in the system 300. Via the mass flow and pressure control system, a minimum pressure can be maintained at each of the tool drops 350 to eliminate pressure based dispense fluctuations that could affect the performance of the associated tools 352. A miniaturized version of the pressure/flow controller can be used to maintain a pressure and mass flow rate to each tool to compensate for variations in loop pressure. Such pressure/flow controllers associated with each tool could be individually operated, or the controller 314 could act as a master controller.

[0062] As noted above, the Coriolis mass flowmeter 312 can provide a density measurement which can be used as a feedback of the actual blend concentration when the blend is a binary solution of a heavy component such as an acid with water. Solids concentration in a slurry can also be monitored using the density measurement.

[0063] Paste

[0064] As noted above, to achieve a high purity system the entire flow path must be made of a high purity, chemically inert/resistant material. FIG. 7A schematically illustrates a high purity pressure transmitter 330 with the wetted process connection including the pressure diaphragm constructed out of a single piece of high purity plastic. A key requirement of any instrumentation used in a high purity distribution system is that none of the devices can be a source of leaks. Threaded connections are avoided; the preferred method of making process connections is the use of a face to face seal. Fabricating the process connection 360 out of a single piece of plastic assures that there are no threaded connections, which can be a source of leaks.

[0065] The pressure transmitter 330 includes a sensor holder 358, which may be constructed of polypropylene

since it is not part of the flow path A pressure chamber **360** constructed of a high purity material such as PFA is nested in the sensor holder **358**. The pressure chamber **360** defines a process fluid in-take guide **361** extending therefrom. To provide stable pressure measurement performance, a ceramic pressure sensor **362** is bonded to a high purity diaphragm **364** (for example, 1 mm thick PFA) and any relaxation of the plastic (also called creep) is compensated for by elastomer o-rings **366** situated on top of the ceramic sensor **362**, which maintains the ceramic sensor against the plastic diaphragm **364** with a constant force. In this manner, the entire wetted part of the pressure transmitter **330** is PFA or another suitable high purity plastic material.

[0066] An alternative pressure sensor **331** is shown in **FIG. 7B**. The pressure sensor **331** uses a small capacitance pressure sensor **370** constructed from sapphire. The sensor is encapsulated in a high purity material such as PFA **372** and extends into the pressure chamber **360** in such a way that the fluid pressure squeezes the sensor **370**. An advantage of the approach shown in **FIG. 8B** is no fixed reference, such as a sturdy structure, is required for accurate pressure measurement. The encapsulated pressure sensor **370** is an integral part of the pressure chamber **360** and is constructed out of a single piece of high purity plastic.

[0067] **FIG. 8** is a block diagram conceptually illustrating aspects of a high purity fluid delivery system **400** for a CMP process tool in accordance with aspects of the invention. The delivery system **400** provides various fluids, for example, water **420**, surfactant or reactive agent **421** and slurry **422**, to a process tool **452** for application to a semiconductor wafer. The tool typically includes a wafer support and a polishing pad. Peristaltic pumps **411** are in communication with each of the fluid sources **420,421,422** to pump the respective fluids to the tool **452**. Further, high purity Coriolis flowmeters **412** are placed in-line with each fluid source to provide mass flow rate feedback. A closed loop system can then be achieved through the use of control electronics and/or software, such as a PID controller.

[0068] Another fluid delivery system **401** is shown in **FIG. 9**, in which control valves **410**, such as the pinch valve disclosed herein above, are used in conjunction with the high purity Coriolis mass flowmeters **412** to achieve high purity, closed loop control in a CMP process. In certain embodiments, the process tool **452** could supply an on-off signal to each individual fluid control loop if the control loops are set at a desired flowrate.

[0069] Different wafers, however, may need to be processed differently and thus require a different “recipe” of fluids be delivered to the polishing pad. The CMP process tool **452** could command a particular flow rate by using, for example, standard industry protocols such as a 4-20 mA signal, to each controller. As in the system **300** shown in **FIG. 6**, the CMP tool could merely command a different recipe and the controller **314** device would control the delivery rates. The main controller **314** sets flow rates and fluid ratios in real-time as necessary.

[0070] **FIG. 10** shows a closed-loop fluid delivery system **500** for a spin-on process used in a photoresist or dielectric liquid application process. A reservoir **518** is pressurized with an inert gas, such as nitrogen, which is supplied via a supply conduit. The process fluid in the reservoir **518** may be contained within a polymer bag **519** to isolate the fluid

from the pressurizing gas. In other embodiments, a diaphragm may be used to isolate the process fluid from the gas. A pressure control valve **550** is located within the inert gas supply conduit to controllably adjust the inert gas being supplied to the reservoir **518**. The pressure control valve **550** is capable of receiving an output signal from a liquid delivery controller **514** that adjusts the position of the valve **550** from open to close based on a pressure signal received from a first pressure transmitter **530a**. The controller **514** adjusts the position of the pressure control valve **550** to increase or decrease the pressure of the reservoir **518**, based on a predetermined pressure setpoint compared to the output of the pressure transmitter **530a**.

[0071] The reservoir **518** is connected to a high purity Coriolis mass flowmeter **512** via an outlet conduit, through which the process fluid exits the reservoir **518**. A point of use filter **560** is provided to filter process fluid being applied to a spinning work piece **562**, which is controlled by a spin controller **564**.

[0072] The Coriolis flowmeter **512** in the flow path measures the actual flow rate and provides a signal to the liquid delivery controller **514**. If the flow of fluid is low the pressure applied to the liquid inside the reservoir **518** is increased to provide more flow. Increased pressure for liquid delivery may be necessary due to plugging of the point of use filter **560** or in the tubing carrying the liquid. Second and third pressure sensors **530b,530c** upstream and downstream of the flowmeter **512** measure the differential pressure required to drive the liquid through the flowmeter **512**. The flow rate and differential pressure measurements provided by the flowmeter **512** and pressure sensors **530b,530c** can be used to determine the viscosity of the fluid, since the length of the tube is known. The viscosity measurement would indicate any changes to the chemical structure of the fluid. A control valve **510** controls the flow rate of the process fluid via control signals from the liquid delivery controller **514**. A stepper driven valve would maintain last position.

[0073] A tool controller **515**, which may be the same controller as the liquid delivery controller **514** or a separate controller, provides control signals to the spin controller **564** and also provides a flow setpoint to the delivery controller **514**. A fast acting fluid on/off valve **509** is further provided at the outlet of the reservoir **518** in some embodiments, which is activated by the liquid delivery controller **514** to turn flow on/off based on the requirements from the tool controller **515**. The liquid delivery controller **514** maintains in memory a table of liquid delivery pressure and flow rates as would be provided by the pressure sensor **530b** and Coriolis flowmeter **512**, respectively, correlated with various positions of the control valve **510**. Based on fluid demand requirements from the tool controller **515**, the liquid delivery controller **514** provides optimal settings of pressure on the fluid and control valve settings to provide the proper amount of fluid during the time the valve **509** is open.

[0074] An alternative spin-on fluid delivery system **501** is shown in **FIG. 11**. In the delivery system **501**, the Coriolis flowmeter **512** is downstream of a metering pump **511** to act as a feedback mechanism to assure that the proper amount of liquid is being applied to the work piece **562**. Prior art metering pump systems are typically open loop, and any plugging of the system downstream of the pump that increases the head pressure will change the fluid delivery to

the work piece. The signal from the Coriolis flowmeter 512 allows the liquid delivery controller 514 to change the operation of the pump 511 to provide a higher output pressure to compensate for the increased head pressure.

[0075] The particular embodiments disclosed above are illustrative only, as the invention may be modified and practiced in different but equivalent manners apparent to those skilled in the art having the benefit of the teachings herein. Furthermore, no limitations are intended to the details of construction or design herein shown, other than as described in the claims below. It is therefore evident that the particular embodiments disclosed above may be altered or modified and all such variations are considered within the scope and spirit of the invention. Accordingly, the protection sought herein is as set forth in the claims below.

What is claimed is:

1. A fluid delivery system, comprising:
 - a flow control device;
 - a Coriolis mass flowmeter in fluid communication with the flow control device, the Coriolis flowmeter having a flow-tube made of a high-purity plastic material, the Coriolis flowmeter providing an output signal;
 - a controller receiving a setpoint signal, the controller receiving the output signal from the Coriolis flowmeter and providing a control output signal to the flow control device, wherein the flow control device output varies in response to the control output signal.
2. The fluid delivery system of claim 1, wherein the high-purity plastic material comprises PFA.
3. The fluid delivery system of claim 1, wherein the flow control device is comprises a valve.
4. The fluid delivery system of claim 3, wherein the valve comprises a pinch valve.
5. The fluid delivery system of claim 4, wherein the pinch valve comprises:
 - an actuator having a ram operatively connected thereto;
 - a reference surface positioned generally opposite the ram;
 - a high purity, flexible tube positioned between the ram and the reference surface.
6. The fluid delivery system of claim 5, wherein the actuator comprises a solenoid.
7. The fluid delivery system of claim 5, wherein the actuator comprises a stepper motor.
8. The fluid delivery system of claim 1, wherein the flow control device comprises a pump having a variable output.
9. The fluid delivery system of claim 8, wherein the pump comprises a peristaltic pump.
10. The fluid delivery system of claim 1, wherein the flow control device comprises a reservoir, the reservoir being selectively pressurizable.
11. The fluid delivery system of claim 10, wherein the reservoir includes a bag situated therein for containing a fluid.
12. The fluid delivery system of claim 1, wherein the controller comprises a PID controller.
13. The fluid delivery system of claim 1, further comprising:
 - a plurality of the flow control devices;
 - a plurality of the Coriolis mass flowmeters; and
 - a mixing chamber in fluid communication with the flow control devices;
 - wherein the controller varies the outputs of the flow control devices to achieve a predetermined fluid mixture.
14. The fluid delivery system of claim 1, wherein the output signal provided by the Coriolis mass flowmeter includes a mass flowrate measurement.
15. The fluid delivery system of claim 1, wherein the output signal provided by the Coriolis mass flowmeter includes a fluid density measurement.
16. The fluid delivery system of claim 1, wherein the output signal provided by the Coriolis mass flowmeter includes a fluid temperature measurement.
17. A recirculating fluid distribution system, comprising:
 - a fluid reservoir;
 - a distribution conduit in fluid communication with the reservoir, the distribution conduit having a plurality of tool drops for providing fluid from the reservoir to tools attached to the tool drops;
 - a flow control device;
 - a Coriolis mass flowmeter in fluid communication with the flow control device, the Coriolis flowmeter having a flow-tube made of a high-purity plastic material, the Coriolis flowmeter providing a output signal;
 - a pressure transmitter in fluid communication with the Coriolis mass flowmeter, the pressure transmitter providing an output signal;
 - a controller receiving a setpoint signal, the controller receiving the output signals from the Coriolis flowmeter and the pressure transmitter and providing a control output signal to the flow control device, wherein the flow control device output varies in response to the control output signal to maintain a predetermined pressure and flow rate in the distribution conduit.
18. The recirculating fluid distribution system of claim 17, further comprising:
 - a plurality of tool drop flow control devices, each of the tool drop flow control devices being in-line with a respective tool drop; and
 - a plurality of tool drop Coriolis mass flowmeters, each of the tool drop Coriolis mass flowmeters being in-line with a respective tool drop, the tool drop Coriolis mass flowmeters each having a flow-tube made of a high-purity plastic material, the tool drop Coriolis mass flowmeters each providing an output signal;
 - wherein the controller receives the output signals from the tool drop Coriolis mass flowmeters and provides control signals to the tool drop flow control devices.
19. The recirculating fluid distribution system of claim 18, further comprising a plurality of tool drop controllers, each of the tool drop controllers being associated with a respective tool drop flow control device and a tool drop Coriolis mass flow meter, each tool drop controller receiving the output signal from the associated tool drop Coriolis mass flowmeters and providing control signals to the associated tool drop flow control devices.
20. The recirculating fluid distribution system of claim 17, wherein the flow control device comprises a pinch valve.

21. The recirculating fluid distribution system of claim 17, wherein the pressure transmitter comprises:

- a sensor holder;
- a pressure chamber including a diaphragm situated in the sensor holder, the pressure chamber and diaphragm constructed of a high purity plastic;
- a pressure sensor bonded to the diaphragm; and
- an o-ring situated between the diaphragm and the sensor holder.

22. The recirculating fluid distribution system of claim 17, wherein the pressure transmitter comprises:

- a sensor holder;
- a pressure chamber situated in the sensor holder;
- a pressure sensor encapsulated in a high purity plastic material extending into the pressure chamber.

23. The recirculating fluid distribution system of claim 22, wherein the pressure sensor is constructed from sapphire.

24. A fluid delivery system, comprising:

- a reservoir having an inlet for receiving a gas to pressurize the reservoir and an outlet for dispensing fluid contained in the reservoir;
- a first flow control device connected to the reservoir inlet;
- a second flow control device in fluid communication with the reservoir outlet to control fluid flow out of the reservoir;
- a Coriolis mass flowmeter in fluid communication with the second flow control device, the Coriolis flowmeter having a flow-tube made of a high-purity plastic material, the Coriolis flowmeter providing an output signal;
- a controller receiving a setpoint signal, the controller receiving the output signal from the Coriolis flowmeter and providing control output signals to the first and second flow control devices to vary the pressure of the reservoir and the flow rate of fluid from the reservoir.

25. The fluid delivery system of claim 24, further comprising a pressure transmitter connected to the reservoir inlet, the pressure transmitter providing an output signal to the controller.

26. The fluid delivery system of claim 24, further comprising a pressure transmitter connected to the reservoir outlet.

27. The fluid delivery system of claim 26, wherein the pressure transmitter is connected to the reservoir outlet downstream of the Coriolis mass flowmeter.

28. The fluid delivery system of claim 26, wherein the pressure transmitter is connected to the reservoir outlet upstream of the Coriolis mass flowmeter.

29. The fluid delivery system of claim 24, further comprising first and second pressure transmitters connected to the reservoir outlet upstream and downstream of the Coriolis mass flowmeter, respectively.

30. The fluid delivery system of claim 29, wherein the controller calculates the viscosity of fluid flowing through the system.

31. The fluid delivery system of claim 24, wherein the controller further controls a tool for processing a work piece.

32. The fluid delivery system of claim 24, wherein the controller comprises a fluid delivery controller, the system further comprising a tool controller that controls a tool for processing a work piece, the tool controller providing the setpoint signal to the fluid delivery controller.

33. The fluid delivery system of claim 24, further comprising a filter connected to the reservoir outlet.

34. The fluid delivery system of claim 24, further comprising a bag situated in the reservoir for containing fluid.

35. The fluid delivery system of claim 24, wherein the second flow control device comprises a pinch valve.

36. The fluid delivery system of claim 24, wherein the second flow control device comprises a metering pump.

* * * * *