




(86) Date de dépôt PCT/PCT Filing Date: 2020/04/21
(87) Date publication PCT/PCT Publication Date: 2020/10/29
(45) Date de délivrance/Issue Date: 2023/10/24
(85) Entrée phase nationale/National Entry: 2021/02/25
(86) N° demande PCT/PCT Application No.: EP 2020/061051
(87) N° publication PCT/PCT Publication No.: 2020/216730
(30) Priorité/Priority: 2019/04/26 (AT A 50383/2019)

(51) Cl.Int./Int.Cl. *B65G 53/10* (2006.01),
B65G 53/42 (2006.01), *B65G 53/66* (2006.01)
(72) Inventeurs/Inventors:
REICH, ALEXANDER, DE;
WEISS, RALF, DE;
BARTLING, WERNER, DE
(73) Propriétaire/Owner:
NOWE GMBH, DE
(74) Agent: MACRAE & CO.

(54) Titre : DISPOSITIF POUR REMPLIR UN CONTENANT DE PRODUIT EN VRAC, EN PARTICULIER DE SABLE
(54) Title: APPARATUS FOR FILLING A CONTAINER WITH BULK MATERIAL, IN PARTICULAR SAND

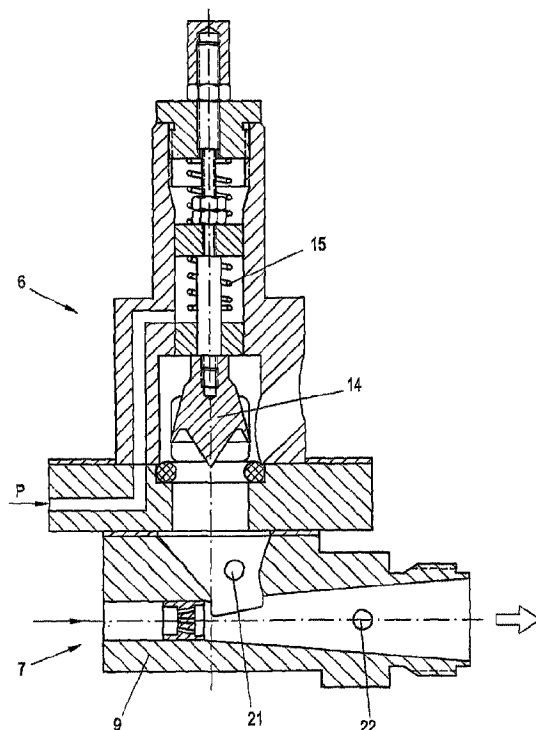

(57) Abrégé/Abstract:

The invention relates to an apparatus (1) for filling a container (B) with bulk material (2), in particular sand, having a storage container (3) for the bulk material (2) with a closable lid (4) and an outlet (5), a metering device (6) arranged beneath the storage container (3), and a pneumatic feeding device (7), arranged under the metering device (6), for feeding the bulk material (2), into the container (B) to be filled, with the aid of compressed air (P) via a feed hose (8). According to the invention, the feeding device (7) has an injector (9) with a plurality of, preferably at least five, holes (10, 10') for the compressed air (P).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
29. Oktober 2020 (29.10.2020)(10) Internationale Veröffentlichungsnummer
WO 2020/216730 A1

(51) Internationale Patentklassifikation:

B65G 53/10 (2006.01) B65G 53/66 (2006.01)
B65G 53/42 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2020/061051

(22) Internationales Anmeldedatum:
21. April 2020 (21.04.2020)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
A 50383/2019 26. April 2019 (26.04.2019) AT(71) Anmelder: **NOWE GMBH** [DE/DE]; Heilswannenweg
66, 31008 Elze (DE).(72) Erfinder: **REICH, Alexander**; Posener Straße 15, 40670
Meerbusch (DE). **WEISS, Ralf**; Eimer Straße 11, 31029
Banteln (DE). **BARTLING, Werner**; Schafswende 5,
31008 Elze (DE).(74) Anwalt: **BEETZ, Rainer**; SONN & PARTNER PATENT-
ANWÄLTE, Riemergasse 14, 1010 Wien (AT).(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ,
RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI,
SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Erklärungen gemäß Regel 4.17:

- hinsichtlich der Berechtigung des Anmelders, ein Patent zu beantragen und zu erhalten (Regel 4.17 Ziffer ii)
- Erfindererklärung (Regel 4.17 Ziffer iv)

(54) Title: APPARATUS FOR FILLING A CONTAINER WITH BULK MATERIAL, IN PARTICULAR SAND

(54) Bezeichnung: VORRICHTUNG ZUM BEFÜLLEN EINES BEHÄLTERS MIT SCHÜTTGUT, INSBESONDERE SAND

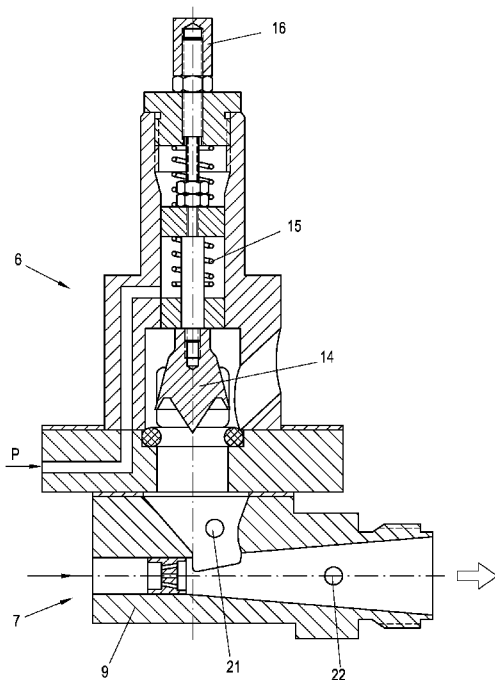


Fig. 2

(57) **Abstract:** The invention relates to an apparatus (1) for filling a container (B) with bulk material (2), in particular sand, having a storage container (3) for the bulk material (2) with a closable lid (4) and an outlet (5), a metering device (6) arranged beneath the storage container (3), and a pneumatic feeding device (7), arranged under the metering device (6), for feeding the bulk material (2), into the container (B) to be filled, with the aid of compressed air (P) via a feed hose (8). According to the invention, the feeding device (7) has an injector (9) with a plurality of, preferably at least five, holes (10, 10') for the compressed air (P).

(57) **Zusammenfassung:** Die Erfindung betrifft eine Vorrichtung (1) zum Befüllen eines Behälters (B) mit Schüttgut (2), insbesondere Sand, mit einem Vorratsbehälter (3) für das Schüttgut (2) mit einem verschließbaren Deckel (4) und einem Auslass (5), einer unter dem Vorratsbehälter (3) angeordneten Dosiereinrichtung (6) und einer unter der Dosiereinrichtung (6) angeordneten pneumatischen Fördereinrichtung (7) zum Fördern des Schüttguts (2) mit Hilfe von Druckluft (P) über einen Förderschlauch (8) in den zu befüllenden Behälter (B). Erfindungsgemäß weist die Fördereinrichtung (7) einen Injektor (9) mit mehreren, vorzugsweise zumindest fünf, Bohrungen (10, 10') für die Druckluft (P) auf.

WO 2020/216730 A1

WO 2020/216730 A1

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz
3)

- 1 -

APPARATUS FOR FILLING A CONTAINER WITH BULK MATERIAL, IN
PARTICULAR SAND

The invention relates to an apparatus for filling a
5 container with bulk material, in particular sand, comprising a
storage container for the bulk material with a closable lid and
an outlet, a metering device arranged beneath the storage
container and a pneumatic feeding device arranged under the
metering device for feeding the bulk material into the container
10 to be filled with the aid of compressed air via a feed hose.

The present invention relates principally but not
exclusively to an apparatus for filling a sand container such as
is used in particular in rail-mounted and driven vehicles in
sanding systems for supporting the braking and drive technology.
15 The containers for the bulk material, in particular the sand
containers in vehicles, in particular rail vehicles, are usually
filled by hand or semi-automatically with the bulk material, in
particular grit. Apart from the fact that the filling of bulk
material containers is very time-consuming and physically
20 demanding, this frequently also results in considerable
formation of dust with the result that the health of the staff
is endangered or protective measures are required.

Stationary filling apparatuses additionally have the
disadvantage that in the case of various vehicles whose storage
25 containers are to be filled with bulk material and with various
vehicle lengths, various feed paths must be created for the bulk
material and bridged, with the result that the filling process
takes even longer and the costs also increase.

EP 561 679 B1 describes an apparatus for the filling of a
30 container with bulk material, wherein the bulk material is
transported pneumatically via a hose line into the container to
be filled. The end of the hose line is held manually in the
opening of the container to be filled by the operating staff.

US 2003/0160459 A1 describes an apparatus for filling a
35 sand container in a rail vehicle, wherein the bulk material is

- 2 -

stored in a pressurized container and transported via a line into the container to be filled. Since the storage container for the bulk material comprises a pressure container, this must be designed to be particularly robust and heavy, which requires a fixed position of the storage container, with the result that the filling apparatus is very inflexible or large lengths of hose must be bridged for filling.

A mobile filling apparatus of the present type is described, for example, in DE 19 935 726 A1, wherein the metering of the bulk material is accomplished via a poppet valve in the lower region of the storage container into a further container, the transfer container, which is pressurized for the pneumatic conveyance of the metered bulk material via a compressed air line. Since the transfer container is configured as a pressure container, this means a higher constructive expenditure. Furthermore blockages of the conveyor hose can occur relatively easily when too much bulk material is metered in the transfer container.

The object of the present invention consists in providing an aforesaid filling apparatus which allows a particularly simple and rapid filling of the container with bulk material and in addition is constructed in the simplest possible and most space-saving manner so that a mobile application can also be provided. Disadvantages of known filling apparatuses should be avoided or at least reduced.

The object according to the invention is solved by an aforesaid filling apparatus in which the feeding device has an injector with a plurality of holes for the compressed air. As a result of the specially configured feeding device in the form of a so-called propulsive jet injector with a plurality of holes for the compressed air for feeding the bulk material, a simple, energy-efficient and uniform feeding of the bulk material through the feed hose can be achieved even over larger feed lengths and with differences in height. Since the compressed air is only introduced into the feeding device formed by the

- 3 -

injector, neither the metering device nor the storage container needs to be robust or designed as a pressure container. As a result, the components can be produced very cost-effectively and with low weight, for example, by using light metal. As a result of the plurality of holes for the compressed air in the injector, even at low pressure a uniform pneumatic feeding of the bulk material through the feed hose can be achieved. Since the bulk material is transported through the feed hose in a quasi-suspended manner, less abrasion takes place at the inner wall of the feed hose with the result that the lifetime of the feed hose can be increased or the feed hose need not be designed to be particularly robust. Since the components of the filling apparatus can be configured to be relatively simple and light, this results in low manufacturing costs and a low overall weight with the result that the components can be arranged in a simple manner even on a platform which is configured to be mobile.

Preferably the injector has at least five holes. This has corresponding advantages with regard to the feeding of the bulk material through the feed hose.

According to a further feature of the invention, one hole in the injector is arranged to run centrally and the further holes are arranged in a circular shape around the central hole, preferably at the same angular distances from one another. As a result of such a design of the holes in the injector, a relatively uniform flow profile inside the feed hose and therefore a uniform feeding of the bulk material in the feed hose is achieved.

In this case, the holes arranged around the central hole are preferably arranged so that they run outwards conically. Due to such an oblique arrangement of the outer holes, an optimal distribution of the compressed air takes place over the cross-section of the outlet of the injector or the cross-section of the feed hose. The inclination of the outer holes can, for example, be in the range between 2.5 and 7.5 degrees depending on the design.

- 4 -

The storage container is substantially cylindrical and configured to converge conically towards the outlet. This constitutes a usual but advantageous embodiment of a container for bulk material whereby it is ensured that the bulk material
5 arrives at the outlet at the lowest point due to gravity without means for feeding the bulk material to the outlet being required.

Since the storage container is not exposed to any pressure and this therefore need not be designed as a pressure container, it can be formed of aluminium or an aluminium alloy and can be
10 designed to be correspondingly light. Naturally suitable plastic materials can also be used for the storage container.

A pressure relief valve can be arranged on the storage container in order to be able to release any excess pressure in the storage container.

15 If a viewing glass is arranged in the storage container, a visual inspection of the fill level of the bulk material can be made.

Additionally or alternatively to a viewing glass, a sensor for detecting the fill level of the bulk material can be provided
20 in the storage container. This sensor can, for example, be implemented in the form of a capacitive sensor. Other types of sensor, for example, sensors which measure the weight of the storage container or ultrasound sensors or optical sensors which measure the fill level in a contactless manner are also feasible.

25 The metering device can be formed by a pneumatically or electromagnetically actuatable metering piston and a return spring. This forms a simple and robust embodiment of a metering device. When using a pneumatically actuated metering piston, there is the advantage that the compressed air necessary in any
30 case for feeding the bulk material can also be used for the metering. When using an electromagnetically actuatable metering piston on the other hand, an electrical lead is required which, however, is usually required for other components of the filling apparatus and is present in any case.

- 5 -

If the metering device has an adjusting screw for adjusting the opening of the metering piston, a simple and robust specification of the maximum metering during a single piston stroke of the metering piston can be performed. The further
5 metering of the bulk material can be adjusted by controlling the opening time of the metering piston and/or the number of necessary piston strokes.

In the lower region of the storage container above the outlet at least one nozzle can open into the storage container
10 which at least one nozzle is connected to a pressure regulator by means of a compressed air line. By means of such a so-called bypass line the bulk material can be loosened in the region of the outlet and thus the metering of the bulk material can be supported and any blocking of the bulk material in the region of
15 the outlet can be prevented.

Preferably a control device is provided in the apparatus which controls the filling apparatus, which results in a simple handling for the user. The control device is preferably formed by a microprocessor or microcontroller which is supplied with
20 electrical energy by a corresponding voltage supply. The control device is connected to operating elements or a user interface in order to enable various settings.

This control device can be configured for active activation of the feeding device over a predefined time interval after
25 deactivation of the feeding of the bulk material. As a result, the feed hose can be blown free of bulk material, in particular sand. By this means, when pulling out the feed hose from the opening of the container to be filled, sand can be prevented from trickling out of the feed hose and resulting in
30 contaminations and dust formation. By means of such a time-controlled after-blowing function after completion of the filling process which is, for example, maintained over several seconds, the feed hose can thus be kept free of bulk material residue. Instead of specifying a specific time interval, a sensor
35 in the feed hose can also provide the information that no more

- 6 -

bulk material is being fed and the after-blowing function is stopped automatically depending on the sensor signal.

A pressure sensor can be arranged in the feeding device which pressure sensor is connected to the control device. By
5 means of such a pressure sensor, the counter-pressure which is established when the container to be filled reaches the filling limit can be detected in a simple manner. Upon detecting such a counter-pressure which, for example, lies in the range of a few millibar, an automatic switch-off of the feeding of the bulk
10 material is initiated.

Furthermore, a sensor for detecting the flow of bulk material can be provided in the feeding device), which sensor is connected to the control device. As a result, a monitoring of the flow of bulk material can be performed during feeding and
15 for example, blockages can be determined automatically and result in the output of an optical or acoustic message or also in the automatic switch-off of the feeding. If no flow of bulk material is determined even after activating the feeding, this can also be an indication that no more bulk material is present
20 in the storage container or a blockage has occurred in the feed line. During the ongoing filling process, fluctuations of the flow sensor are an indication of fluctuations or also of interruptions of the feeding of the bulk material.

If a compressed air connection is provided at the filling
25 apparatus, an existing compressed air line can be connected thereto and in this way the filling apparatus can be supplied with the necessary compressed air.

Alternatively or additionally to a compressed air connection, a compressor can also be provided to provide the
30 compressed air.

According to a further feature of the invention, a blow-out lance is arranged at the free end of the feed hose. By means of such a blow-out lance, the end of the feed hose can also be optimally placed in an opening adapted thereto or the filling
35 connector in the container to be filled.

- 7 -

If an extraction nozzle is arranged at the blow-out lance, any dust produced during the filling process can be extracted and escape into the atmosphere can be prevented. As a result, it is not necessary for the operating staff to use protective apparatus such as, for example, respiratory masks.

The extraction nozzle is preferably arranged displaceably and fixably in the longitudinal direction of the blow-out lance. As a result, an optimal positioning of the extraction nozzle and therefore an optimal detection of dust or extraction of dust can be performed.

The extraction nozzle is connected via an extraction hose to an extraction and dust removal device. In the dust removal device the dust detected and extracted if necessary is collected in corresponding collecting containers and can be simply and reliably removed in this way. Since dust from bulk material, in particular grit is usually inhalable dust, this waste should be treated as hazardous material and must be appropriately disposed of.

The extraction and dust removal device preferably comprises a filter and a dust collecting container. Any escape of the dust which possibly occurs during filling into the atmosphere is largely prevented by components in the extraction and dust removal device. Depending on the bulk material used and dust which occurs, suitable filters, for example, microfine filters are used accordingly. The filter system can have an automatic filter cleaning function which allows trouble-free operation of the extraction and dust removal device and therefore of the entire filling apparatus.

An actuating element, preferably an on/off switch can be arranged at the blow-out lance, which actuating element is connected to the control device. By means of the actuating element, the operating staff can thus undertake a control of the filling process even at a certain distance from the filling apparatus.

- 8 -

The feed hose, the extraction hose and any electrical leads can be connected to one another via clips or the like. By means of this measure, the weight of the feed hose is certainly increased slightly and therefore its handling made more difficult but as a result of the plurality of hoses or lines, this results in no entanglements of the same. The risk of tripping over the hoses or lines can also be minimized thereby.

If wheels or the like are provided, the filling apparatus can be transported particularly easily and brought rapidly into the vicinity of the container to be filled. Furthermore, the length of the feed hose can be reduced and the pressure necessary for feeding the bulk material can be reduced. Instead of or in addition to wheels, runners can also be arranged on the underside of the filling apparatus which make it possible to lift and manoeuvre the filling apparatus with the aid of a fork lift truck or the like. Furthermore, hooks, eyes or the like can also be arranged on the upper side of the filling apparatus which allow a movement of the filling apparatus with the aid of a crane.

A manoeuvring of the filling apparatus can be made easier if at least one wheel is connected to a drive, preferably an electric drive.

If an energy storage device, in particular an accumulator, is provided on the apparatus for the provision of electrical energy, this can result in an independence from the connection of a power supply network at least over certain time intervals and a cable lead to the filling apparatus can be omitted.

The present invention is explained in detail with reference to the appended drawings. In the figures:

Fig. 1 shows a schematic view of an apparatus for filling a container with bulk material, in particular sand;

Fig. 2 shows a schematic detailed view of the metering and feeding device of a filling apparatus in cutaway view;

Fig. 3 shows a detail of the feeding device according to Fig. 2 configured as an injector in enlarged view; and

- 9 -

Fig. 4 shows the time behaviour of the compressed air for operating the feeding device according to a preferred exemplary embodiment.

Figure 1 shows schematically an apparatus 1 for filling a
5 container B with bulk material 2, in particular sand. The
apparatus 1 comprises a storage container 3 for the bulk material
2 with a closable lid 4, preferably on the upper side. Located
on the lower side of the storage container 3 is an outlet 5 via
10 which the bulk material 2 passes into the metering device 6
located thereunder. In the present design of the filling
apparatus 1 the storage container 3 is not designed as a pressure
container which is why this can be formed of light metal, for
example, aluminium or an aluminium alloy or even plastic and has
a relatively low weight. The storage container 3 is preferably
15 substantially cylindrical and is configured to converge
conically towards the outlet 5. A visual inspection of the fill
level of the bulk material 2 can be performed by means of a
viewing glass 11 which may be present in the storage container
3. Alternatively or additionally sensors 13 can also be arranged
20 in the storage container 3 to detect the fill level of the bulk
material 2. Such sensors 13 can be implemented in various ways,
for example, as capacitive or optical sensors. Located below the
metering device 6 is the pneumatic feeding device 7 for feeding
the bulk material 2 which is configured in the form of an
25 injector 9 with a plurality of holes 10, 10' for the compressed
air P (see Fig. 2).

Preferably a pressure relief valve 12 can be arranged on
the upper side of the storage container 3 via which excess
pressure, in particular during filling of the storage container
3, can escape. The compressed air P is provided via a compressed
30 air connection 23 or via its own compressor 24 and is guided via
a pressure regulator 19 to the different positions, in particular
the pneumatic feeding device 7 and the metering device 6 which
is pneumatically configured if necessary. In addition,
35 compressed air lines 18 can be provided which open into at least

one nozzle 17 in the lower region of the storage container 3 above the outlet 5. By means of such a so-called bypass line, the running of the bulk material 2, in particular sand, can be supported and the bulk material 2 can be loosened by appropriate regulation of the air volume and air pressure which passes to the nozzle 17 via the pressure line 18. The quantity of the bulk material 2 running out via the outlet 5 in the storage container 3 can be influenced in a very simple manner via the pressure regulator 19.

The feed hose 8 is connected at the outlet of the pneumatic feeding device 7 via which the bulk material 2 is transported through the feed hose 8 in a substantially suspended manner. A blow-out lance 25 is preferably arranged at the free end of the feed hose 8, which forms the connecting piece to the filling connector of the container B to be filled, for example, in a vehicle, in particular rail vehicle. The blow-out lance 25 is preferably designed as a thick-walled stainless steel tube and provided in a corresponding length depending on the respective type of vehicle. A pressure sensor 21 and a sensor 22 for measuring the flow of the bulk material 2 can be arranged in the pneumatic feeding device 7. A counter-pressure can be detected by means of the pressure sensor 21 and an automatic switch-off of the feeding of the bulk material 2 can be initiated. A counter-pressure of at least 2 mbar, for example, can be detected easily by means of measurement technology. The sensor 22 for measurement of the flow of bulk material 2 can deliver important information about any blockages or an irregular feeding of the bulk material 2.

Preferably a control device 20 is provided which is connected with the most important components of the filling apparatus 1, in particular the said pressure sensor 21, the sensor 22 for detecting the flow of bulk material or an actuating element 31 preferably arranged at the end of the feed hose 8 or the blow-out lance 25. The control device 20 is supplied with electrical energy via a corresponding electrical line 32.

Alternatively to this or also additionally, an energy storage device 36, in particular an accumulator can be provided which supplies electrical energy for the duration of the filling process for the supply of the electrical components.

5 Preferably arranged on the blow-out lance 25 is an extraction nozzle 26 which is preferably displaceable and fixable in the longitudinal direction of the blow-out lance 25 so that a corresponding adaptation to the respective structural circumstances can be made. Any dust produced during the filling
10 process is extracted via the extraction nozzle 26 and collected along an extraction hose 27 in an extraction and dust removal device 28, preferably with a filter 29 and a dust collecting container 30. As a result, any contamination can be prevented or at least reduced and any danger to staff due to the dust can be
15 avoided.

The feed hose 8 and extraction hose 27 and any electrical leads 32 can be connected to one another via suitable clips 33 or the like.

If all the components of the filling apparatus 1 are
20 arranged on a suitable support platform and wheels 34 or the like can be provided thereon, the filling apparatus 1 can be easily moved to the container 3 to be filled with the result that shorter feed paths result and in consequence the energy costs can be reduced. If at least one wheel 34 is connected to
25 a corresponding drive 35, the movement of the filling apparatus 1 can be facilitated.

Figure 2 shows a schematic detailed view of the metering device 6 and feeding device of a filling apparatus 1 in cutaway view. In this embodiment the metering device 6 is also operated
30 with compressed air P by providing a pneumatically actuatable metering piston 14 and a return spring 15. By blowing in compressed air P, the metering piston 14 can be moved against the return spring 15 and the bulk material 2 passes into the metering device 6 via a corresponding sand feed, here arranged
35 obliquely, and further into the pneumatic feeding device 7

- 12 -

arranged thereunder. Instead of a pneumatically actuatable metering piston 14, an electromagnetically actuatable metering piston 14 and a corresponding return spring 15 can form the metering device 6 (not shown).

5 The pneumatic feeding device 7 is formed in the form of an injector 9 with a plurality of, preferably at least 5, holes 10, 10', wherein one hole 10 is arranged to run centrally in the injector 9 and the further holes 10' are arranged circularly around the central hole 10, preferably at the same angular
10 distances to one another. The holes 10' arranged around the central hole 10 can be arranged to run outwards. This construction of a so-called propellant jet nozzle ensures an optimal feeding of the bulk material 2 in the feed hose 8 which is arranged following the pneumatic feeding device 7. As already
15 mentioned above, a pressure sensor 21 and/or a sensor 22 for detecting the flow of the bulk material 2 can be provided in the pneumatic feeding device 7, which sensors are connected to the control device 20.

 Figure 3 shows a detail of the pneumatic feeding device 7
20 configured as injector 9 according to Fig. 2 in enlarged view. Here the holes 10, 10' for the compressed air P are easier to see. As already mentioned, the outer holes 10' arranged around the central hole 10 can be arranged to run conically outwards, for example, at an angle α between 2.5 and 7.5 degrees. This
25 ensures an optimal flow profile of the compressed air P in the outlet of the injector 9 and in the feed hose 8 and as a result, a quasi-suspended conveyance of the bulk material 2 inside the feed hose 8 to the container B to be filled.

 Finally Fig. 4 shows the time behaviour of the compressed
30 air P for operating the pneumatic feeding device 7 according to a preferred exemplary embodiment. At the time t_A , the pneumatic feeding device 7 is activated by applying the corresponding compressed air P with a working pressure P_A to the pneumatic feeding device 7 and thus the compressed air P passes into the
35 pneumatic feeding device 7 via the holes 10, 10'. At the time t_E

- 13 -

the feeding of the bulk material 2 is ended. According to a preferred exemplary embodiment, the pneumatic feeding device 7 is operated further over a pre-settable time interval Δt , that is compressed air P is still blown into the pneumatic feeding
5 device 7, with the result that the feeding device 7 and the feed hose 8 can be blown free of bulk material 2. Depending on the length of the feed hose 8, the time interval Δt of the after-blowing function can, for example, be between 3 and 10 seconds. Instead of a pre-set time interval Δt , the end of the flow of
10 bulk material 2 through the feed hose 8 can also be detected with the aid of suitably arranged sensors and then the compressed air P can be switched off.

CLAIMS:

1. Apparatus (1) for filling a container (B) with bulk material (2) comprising a storage container (3) for the bulk material (2) with a closable lid (4) and an outlet (5), a metering device (6) arranged beneath the storage container (3) and a pneumatic feeding device (7) arranged under the metering device (6) for feeding the bulk material (2) into the container (B) to be filled with the aid of compressed air (P) via a feed hose (8), characterized in that the pneumatic feeding device (7) has an injector (9) with a plurality of holes (10, 10') for the compressed air (P) and that a control device (20) is provided and is configured for active activation of the pneumatic feeding device (7) over a predefined time interval (Δt) after deactivation of the feeding of the bulk material (2) and that a sensor (13) for detecting the fill level of the bulk material (2) is provided in the storage container (3) and that a blow-out lance (25) is arranged at a free end of the feed hose (8) and that an extraction nozzle (26) is arranged at the blow-out lance (25) and that the extraction nozzle (26) is arranged displaceably and fixably in the longitudinal direction of the blow-out lance (25).

2. The filling apparatus (1) according to Claim 1, characterized in that the bulk material (1) is sand.

3. The filling apparatus (1) according to Claim 1 or 2, characterized in that the injector (9) has at least five holes (10, 10').

4. The filling apparatus (1) according to any one of Claims 1 to 3, characterized in that one hole (10) in the injector (9) is arranged to run centrally and further holes (10') are arranged circularly around the central hole (10).

5. The filling apparatus (1) according to Claim 4, characterized in that the further holes (10') are arranged

circularly around the central hole (10) at the same angular distances from one another.

6. The filling apparatus (1) according to Claim 4 or 5, characterized in that the further holes (10') arranged around the central hole (10) are arranged so that they run outwards conically.

7. The filling apparatus (1) according to any one of Claims 1 to 6, characterized in that the metering device (6) is formed by a pneumatically or electromagnetically actuatable metering piston (14) and a return spring (15).

8. The filling apparatus (1) according to any one of Claims 1 to 7, characterized in that in a lower region of the storage container (3) above the outlet (5) at least one nozzle (17) opens into the storage container (3) wherein the at least one nozzle (17) is connected to a pressure regulator (19) by means of a compressed air line (18).

9. The filling apparatus (1) according to any one of Claims 1 to 8, characterized in that a pressure sensor (21) is arranged in the feeding device (7) wherein the pressure sensor (21) is connected to the control device (20).

10. The filling apparatus (1) according to any one of Claims 1 to 9, characterized in that a sensor (22) for detecting the flow of bulk material (2) is provided in the feeding device (7), wherein the sensor (22) is connected to the control device (20).

11. The filling apparatus (1) according to any one of Claims 1 to 10, characterized in that a compressed air connection (23) is provided.

12. The filling apparatus (1) according to any one of Claims 1 to 11, characterized in that a compressor (24) is provided to provide the compressed air (P).

13. The filling apparatus (1) according to any one of Claims 1 to 12, characterized in that the extraction nozzle (26) is connected via an extraction hose (27) to an extraction and dust removal device (28).

14. The filling apparatus (1) according to Claim 13, characterized in that the extraction and dust removal device (28) comprises a filter (29) and a dust collecting container (30).

15. The filling apparatus (1) according to any one of Claims 1 to 14, characterized in that an actuating element (31) is arranged at the blow-out lance (25), wherein the actuating element (31) is connected to the control device (20).

16. The filling apparatus (1) according to any one of Claims 1 to 15, characterized in that wheels (34) are provided.

17. The filling apparatus (1) according to Claim 16, characterized in that at least one wheel (34) is connected to a drive (35).

18. The filling apparatus (1) according to any one of Claims 1 to 17, characterized in that an energy storage device (36) is provided for the provision of electrical energy.

19. The filling apparatus (1) according to Claim 18, characterized in that the energy storage device (36) is an accumulator.

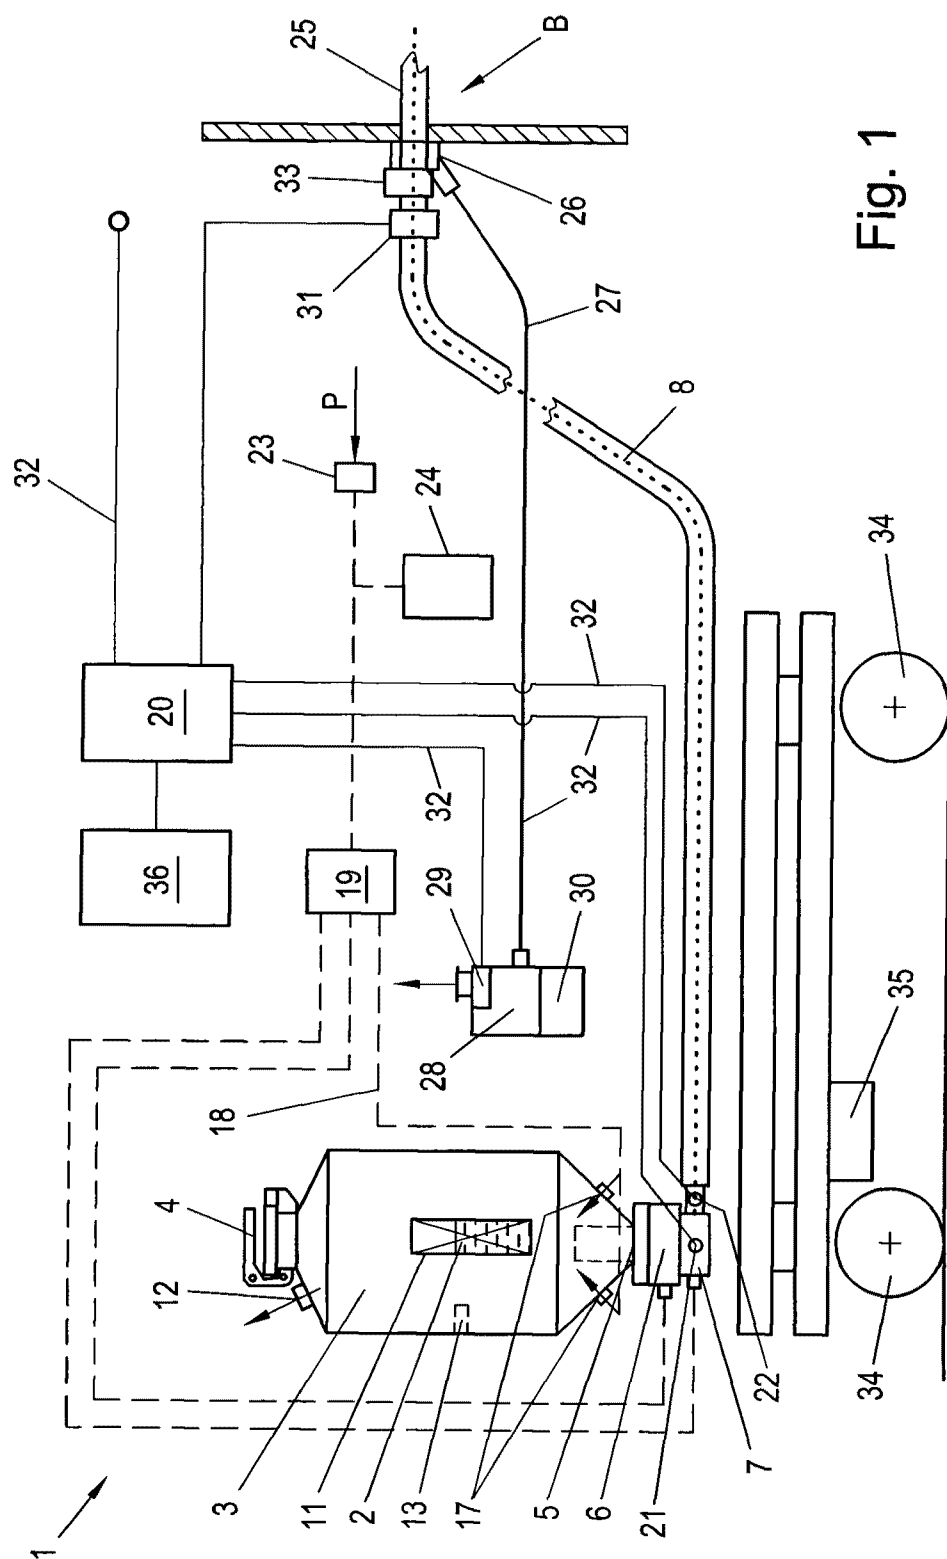


Fig. 1

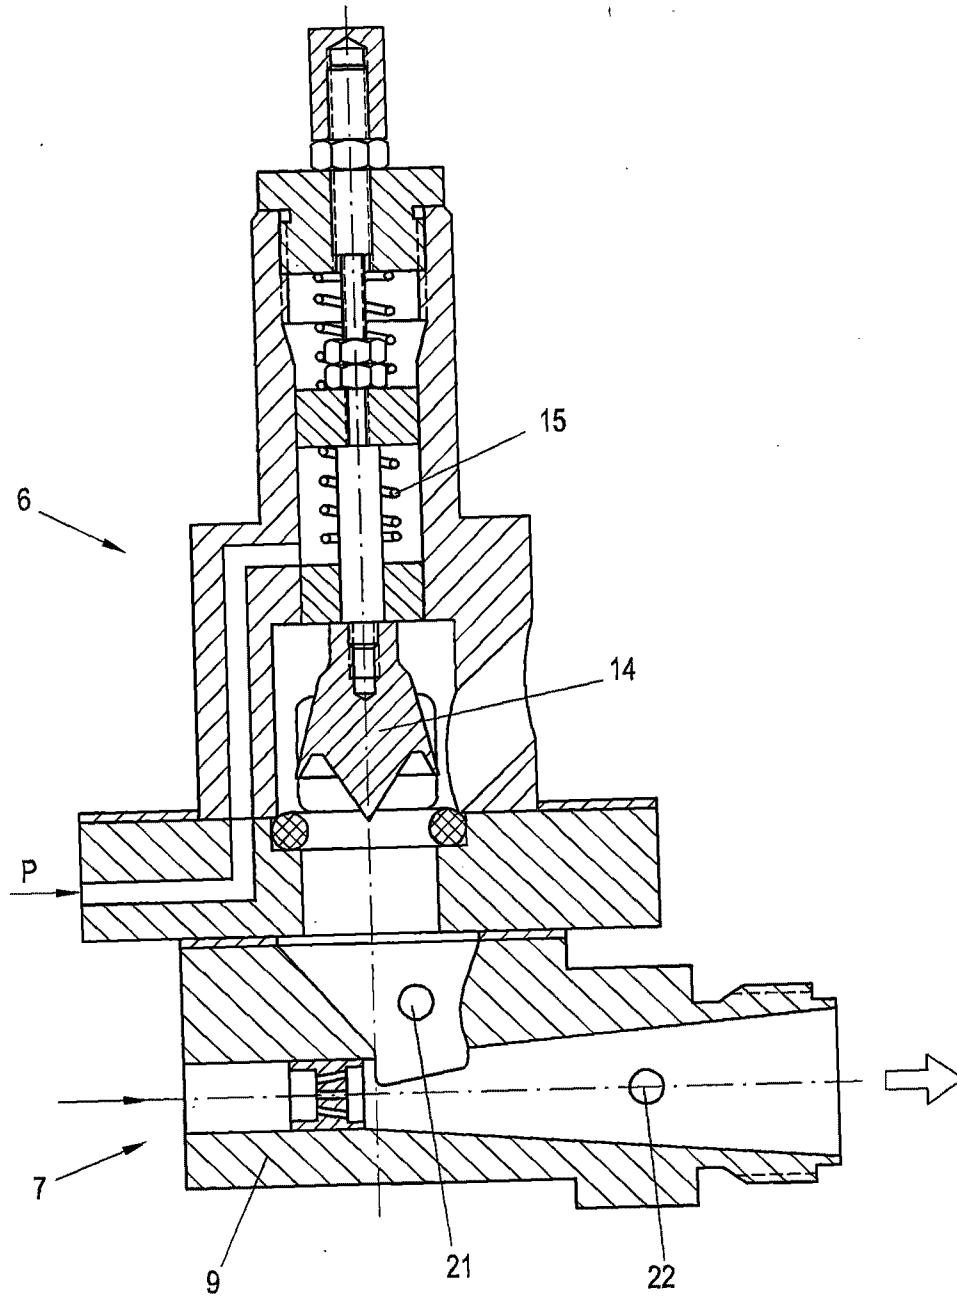


Fig. 2

3/3

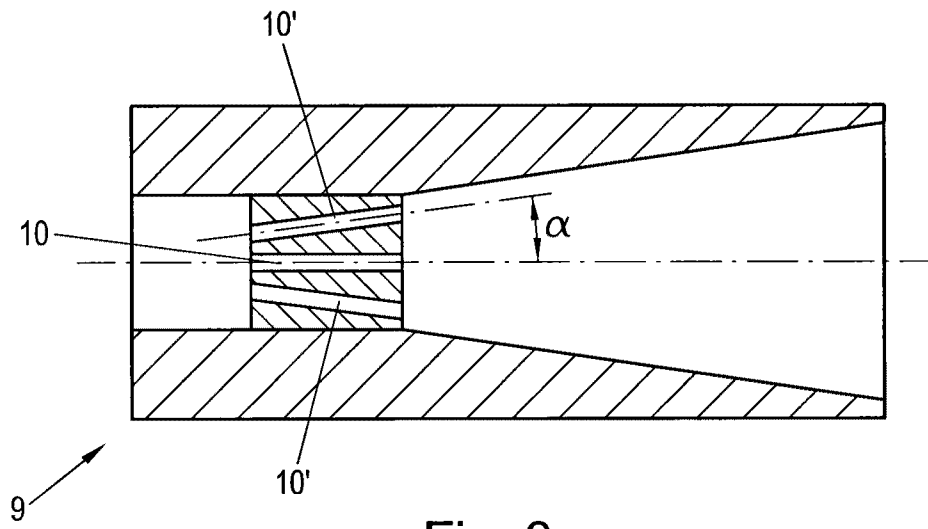


Fig. 3

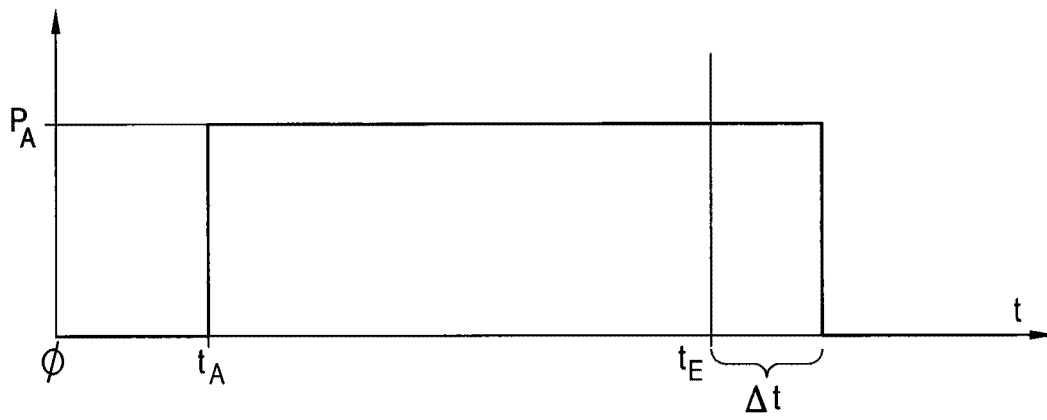


Fig. 4

