

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 August 2006 (24.08.2006)

PCT

(10) International Publication Number
WO 2006/087104 A1

(51) International Patent Classification:

H03J 1/00 (2006.01) **H04N 5/50** (2006.01)
H04H 9/00 (2006.01)

(21) International Application Number:

PCT/EP2006/000888

(22) International Filing Date: 1 February 2006 (01.02.2006)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

05003684.7 21 February 2005 (21.02.2005) EP

(71) Applicant (for all designated States except US): **SONY DEUTSCHLAND GMBH** [DE/DE]; Hugo-Eckener-Strasse 20, 50829 Köln (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JERYE, Matthias** [DE/DE]; Irionweg 5, 70734 Fellbach (DE).

(74) Agent: **MÜLLER, Frithjof, E.**; Müller . Hoffmann & Partner, Innere Wiener Strasse 17, 81667 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR TUNING A SYSTEM TO A PLURALITY OF SERVICE SIGNALS

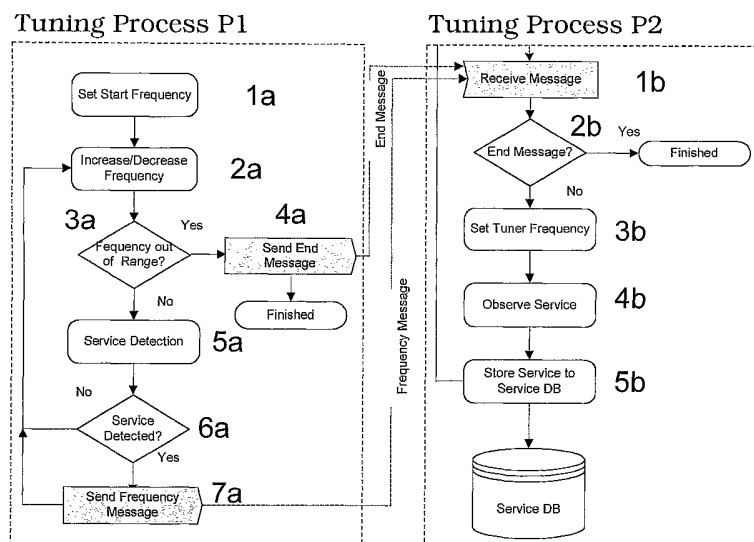

- Advanced Tuning Process

(57) Abstract: The present invention relates to a method for tuning a system (10) to a plurality of service signals (S1, ..., Sn). The inventive method uses a first and a second tuning process (P1, P2). The first tuning process (P1) is adapted and performed in order to search and find carrier signals (C1, ..., Cn) of potential service signals (S1, ..., Sn) and to determine frequencies (f1, ..., fn) of potential services (s1, ..., sn) corresponding to said service signals (S1, ..., Sn). Said second tuning process (P2) is adapted and used in order to register to said system (10) said services (s1, ..., sn) corresponding to said service signals (S1, ..., Sn) based on said determined frequencies (f1, ..., fn).

METHOD FOR TUNING A SYSTEM TO A PLURALITY OF SERVICE SIGNALS

The present invention relates to a method for tuning a system. More particular, the present invention relates to a method for tuning a system to a plurality of service signals, which correspond to a according plurality of potential services. The present invention more particular relates to a fast tuning method or tuning algorithm.

Nowadays the exchange of data between different customer devices or the like becomes more and more important. The exchange of data is realized wireless, via cable or by any other means. Generally, different channels for communicating data between different customer devices are possible and they are often simultaneously involved. For establishing a communication channel it is necessary for a potential receiving device to tune to the different channels in order to get the information which is necessary to build up a valid communication between a sending device and a receiving device. Establishing such a communication channel is realized at least in part by a so called tuning method or tuning process.

However, known methods or processes of tuning a system to a plurality of service signals which might correspond to possible services is rather time consuming as different actions are necessary in order to detect the service signals and to analyze the same with respect to certain technical criteria for establishing a communication channel between a transmitting device and a receiving device.

It is an object underlying the present invention to provide a method for tuning a system to a plurality of service signals which might correspond to potential services which can realize the tuning operation with a reduced tuning time but at the same time in a comparable reliable manner.

The object underlying the present invention is solved by a method for tuning a system with the features of independent claim 1. Preferred embodiments of the invention method for tuning a system are within the scope of the dependent sub-claims. The object is further achieved by an apparatus, by a computer program product as well as by a computer readable storage medium according to independent claims 14, 16, and 17, respectively.

The present invention proposes a method for tuning a system of devices to a plurality of service signals of an according plurality of services wherein a first and a second tuning process are used and performed, wherein said first tuning process is adapted and performed in order to search for and find
5 carrier signals of potential service signals and to determine frequencies of said potential service signals and wherein said second tuning process is adapted and performed in order to register said system to said services corresponding to said service signals based on said determined frequencies.

10 It is therefore a key idea of the present invention to split up the whole tuning operation into a first tuning process and into a second tuning process which carry out operations which are more or less independent from each other in the sense that they can be carried out based on independent operation steps and/or by independent technical means. The first tuning process is designed
15 in order to search for and find carrier signals of possible service signals and the respective frequencies thereof and to communicate these frequencies to the second tuning process which in turn is designed in order to carry out a deeper analysis of the properties of the service corresponding to the receivable service signals in order to characterize the underlying services for a
20 later evaluation or reception. As these first and second tuning processes are more or less independent from each other - of course besides the fact that the carrier frequencies have to be found and communicated before the second communicating process can be started - there is a respective tuning means and the processes itself can be designed more or less ad libitum.
25 Therefore a flexible design with a optimized time consumption and/or with a optimized equipment is - in contrast to prior art tuning apparatuses and/or methods - possible.

According to a preferred embodiment of the method for tuning a system of
30 devices to a plurality of service signals of an according plurality of services according to the present invention said first tuning process may be adapted in order to communicate said frequencies of found carrier signals of said potential service signals of said services, in particular directly to said second tuning process.

35 According to an additional or alternative embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention said second tuning process may be adapted in order to receive said found frequencies of found

carrier of potential service signals of said potential services, in particular directly from said first tuning process.

5 Additionally or alternatively, said first and said second tuning processes or parts thereof may be performed parallelly in accordance with an advantageous embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention.

10 Further, said first and said second tuning processes or parts thereof may alternatively be performed consecutively in accordance with an advantageous embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention.

15 In this case each single determined frequency of found carrier signals of potential service signals of potential services may be provided to said second tuning process immediately after said respective frequency has been determined in accordance with still another advantageous embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention.

25 Alternatively, determined frequencies of found carrier signals of potential service signals of potential services may be provided to said second tuning process in a group-wise manner each group consisting of a sub-set of said determined frequencies in accordance with a further advantageous embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention.

30 Further alternatively, determined frequencies of found carrier signals of potential service signals of potential services may be provided to said second tuning process in its entirety at a given instant of time after the plurality of frequencies has been determined in its entirety in accordance with still a further advantageous embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention.

In accordance with a further additional or alternative embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of services according to the present invention said first tuning process may comprise steps of setting a start frequency as a value for
5 a search frequency, increasing the value of the search frequency, detecting for each value of said search frequency a possible service or service signal.

In accordance with still a further embodiment of the method for tuning a system of devices to a plurality of service signals of an according plurality of
10 services according to the present invention said second tuning process may additionally or alternatively comprise steps of receiving a value of a frequency of a service or a service signal, setting for each received value of a frequency an observation frequency to the respective received frequency, observing the respective services or the respective service signal at said
15 observation frequency, extracting information data from said observed service or said observed service signal, storing said information data.

A first tuning device may preferably be used in order to perform said first tuning process. A second tuning device may be used in order to perform said
20 second tuning process.

In this case a first tuning device may be used which comprises a minimal set of technical means for carrying out the first tuning process and a process of communicating with said second tuning device only.
25

Additionally or alternatively, a second tuning device may be used which comprises a minimal set of technical means for carrying out said second tuning process and a process of communicating with said first tuning device only.
30

It is a further aspect of the present invention to provide an apparatus, in particular a receiver, which is adapted and arranged and which comprises means for carrying out the inventive method for tuning a system and which in particular comprises ASIC means or application specific integrated circuit
35 means.

Additionally, it is a further aspect of the present invention to provide a computer program product comprising computer program means which is adapted in order to perform and realize a method for tuning a system

according to the present invention and the steps thereof when it is executed on a computer or a digital signal processing means.

Further, a computer readable storage medium proposed comprising a
5 computer program product according to the present invention.

These and further aspects of the present invention will be further discussed in the following:

10 The present invention inter alia relates in particular to a fast tuning method and algorithm.

Devices which can receive signals from air, via cable or via satellite often need to perform an auto tuning process to observe available signals and their
15 characteristics. Often this process takes rather long time. The invention proposes a solution which can cut the time significantly making use of a second tuner with limited functionality.

TV chassis are shipped with 1 tuner or 2 tuners. To keep the software concept
20 simple, an one tuner scan process is used.

The customer will walk through a setup when he/she switch on the product the first time. A slow acting procedure may be the first and permanent impression of the user.

25 The combination of hardware and software will save time for everyone who presets the product. It is ready earlier.

A method is outlined for a faster algorithm for appliances which have two
30 tuners e.g. of the same type.

Overview

Appliances, which are capable to receive signals from air via cable or satellite,
35 lite, usually provide auto-installation functions to search and store parameters and properties of all available programmes in the particular network. This process normally takes a lot of time, as the found signals have to be analysed each by each before the information can be stored into a service list. The following idea helps to minimise the time for the whole process by

making use of a second tuner and signal path, which is available in most of the high end appliances anyway. Hereby the following invention is allowing the second tuning circuit to be much simpler keeping the additional costs for hardware low.

5

Conventional auto-tuning method

Fig. 3 shows a conventional auto-tuning algorithm. The whole process runs sequential in one task. After the start frequency is chosen in step 1 and increased in step 2, the frequency range will be checked (step 3) and if it is in range the corresponding data is sent to the tuner (step 4). Then a basic criterion is checked (step 6) to judge if a service is available or possible on that frequency. If not, the steps 2, 3, 4, 5 will be repeated whilst increasing the frequency until a carrier is detected. If a carrier has been detected the next step 7 is to explore the signal for advanced information such as network identification or special data broadcast. Once all information is gathered all relevant service data can be stored in a service list.

20

Optimised Method (two tuner solution)

Looking at the conventional method there are two different tasks, which may take time. The first task is to find a basic signal, which needs altering the tuning frequency continuously until a basic signal condition is detected. The second task, which takes time, is to observe the found signal and extract any information concerning the particular service. The figure below shows the basic idea of the invention, which splits the whole process into two tasks. The first task is searching for basic signals passing the tuning parameters to the second task, which explores the particular services on that frequency and stores the result into a service list.

30

Fig. 2 shows the advanced auto tuning process in more detail. This solution separates the previous single task job in two independent working tasks. The task of the 1st tuner is searching for the carriers where the second task is analysing the found signals and storing them. Steps 1a, 2a, 3a, 5a, 6a of this first tuning process T1 are at least in part comparable to that of the conventional method as shown in Fig. 3. However instead of analysing the signal the first tuning process T1 is sending a message containing the frequency details to said second tuning process T2. This is done in step 7a. After this the first tuning process T1 monotonically increases or decreases the

frequency and starts looking for the next carrier C_j . This loop is continued for the whole frequency range.

5 The second tuning process T2 now receives the message, tunes to the referred frequency and starts analysing the signal. The actions taken here are at least comparable to the respective steps 4, 5, 7 of the conventional method, as shown in Fig. 3. If a valid service s_j is found all relevant data ID will be stored and the next available message will be processed.

10 How the tasks are split may strongly depend on the available hardware and the time needed for the different steps, taking into account that the service detection as well as the observation of the service can have several steps in it.

15 Some examples where such mechanism can be implemented are for analogue and digital TVs, as well as for analogue and digital audio broadcast.

20 In the following these and further aspects of the present invention will be elucidated in more detail by taking reference to the accompanying and schematical figures based on preferred embodiments of the present invention.

25 **Fig. 1** is a schematical block diagram elucidating details of a first preferred embodiment of the inventive method for tuning a system and of a respective inventive tuning apparatus itself.

Fig. 2 is a schematical block diagram which elucidates by means of a flow chart details of a further preferred embodiment of the inventive method for tuning a system.

30

Fig. 3 is a schematical block diagram which elucidates details of a conventional method for tuning a system by means of a flow chart.

35 In the following functional and structural similar or equivalent elements and structures will be denoted with the same reference symbols. Not in each case of their occurrence a detailed description will be repeated.

Fig. 1 is a schematical block diagram which elucidates some basic aspects of the inventive method for tuning a system 10 and for a tuning apparatus and a system 10 in which the inventive method is carried out.

5 According to the present invention a signal is received which might be a radio frequency signal or RF signal. Said received signal may comprise service signals $S_1, \dots, S_n$ for possible or potential services $s_1, \dots, s_n$. Said service signals $s_1, \dots, s_n$ possess some carrier $C_1, \dots, C_n$ at given frequencies $f_1, \dots, f_n$.

10

As can be seen from Fig. 1 according to a first tuning process P_1 performed in a first tuning device T_1 the received RF signal is searched for said service signals $s_1, \dots, s_n$ by sweeping a search frequency f_s starting from a starting frequency f_0 and incrementing the search frequency f_s . If a carrier c_j at a given frequency f_j is found a communication channel CC from the first tuning process P_1 or the first tuning device T_1 to the second tuning process P_2 or the second tuning device T_2 is opened in order to communicate the found frequencies f_j and - if any - some further identification information from the found service signals s_j and the respective service s_j and carrier c_j from said first tuning process P_1 or first tuner T_1 to the second tuning process P_2 and tuning device T_2 . After the frequencies f_j have been communicated by said first tuning process P_1 and said first tuning device T_1 and have been received by said second tuning process P_2 and said second tuning device T_2 , the second tuning process P_2 and second tuning device T_2 registers the respective found services S_j with the respective carrier C_j at the given frequency f_j of the received service signal s_j contained in said received radio frequency signal by further investigating the same thereby generating some information data which are useful and necessary for registering the respective service S_j to the system 10.

30

Fig. 2 explains in more detail the different aspects of the first and second tuning processes P_1 and P_2 and the respective capabilities of the corresponding tuning devices T_1 and T_2 .

35 However, at this point the conventional tuning process is described first taking reference to Fig. 3.

The conventional tuning process is initialized and the analysis of a received radio frequency signal is started by setting a start frequency as a value for a

search frequency f_s in processing step 1. Then the frequency is increased according to processing step 2.

5 Increasing the frequency is done monotonically. Alternatively, the frequency may monotonically be decreased. Both frequency modification alternatives are meant simultaneously in the foregoing and in the following description.

10 After increasing/decreasing the frequency in step 2 it is checked in processing step 3 whether or not the increased/decreased frequency is still in the range of a loud processing or searching frequencies. If the increased frequency is out of range the tuning process is stopped and terminated. If the increased frequency value for the search frequency f_s is not out of range the respective system is tuned to a respective possible service and processing step 4. In the following processing step 5 it is checked whether or
15 not a service can be detected for the given said search frequency f_s . If no service can be detected at the present said search frequency f_s the processing is branched in the following processing steps 6 back to processing step 2 for further increasing the search frequency f_s . If however in processing step 6 the service could be detected then the further search
20 and increasing process for the search frequency f_s is stopped. The most recent value for the search frequency f_s is taken as an observation frequency f_o in order to observe the detected service at the given observation frequency f_o in processing step 7. Thereby extracting the necessary registering or information data ID which are then stored in a service data base in a
25 following processing step 8 the termination of which refers back to a further increment of the search frequency f_s , i.e. to processing step 2.

30 As can be seen from Fig. 3 the process of searching for the services which might be contained in the received radio frequency signal and tuning the system to the respective services is in each case of a detected service interrupted in order to further observe and analyse the found service. The search and tuning process is then continued after the most recent found service has been analysed and the respective information data ID have been stored to a service data base.

35

Fig. 2 demonstrates in contrast to the conventional processing the process structure of the inventive method for tuning a system.

First of all the first tuning process P1 performed by the first tuner device T1 begins by initializing the whole process and by setting the start frequency in a processing step 1a. Then in a following processing step 2a the start frequency is increased and used as a search frequency fs.

5

Again, increasing the frequency is done monotonically. Again alternatively, the frequency may monotonically be decreased. Both frequency modification alternatives are meant simultaneously in the foregoing and in the following description.

10

Then in a following processing step 3a it is checked on whether or not the increased/decreased search frequency fs is out of range. If the search frequency is out of range in a following step 4a a message is sent to the second tuning process P2 and the second tuning device T2 as an end message. Consequently in such a case both processes P1 and P2 are terminated. If the increased/decreased search frequency fs is not out of range a service is detected in a following processing step 5a within said first tuning process P1 within said first tuning device T1. If a service is not detected in a following step 6a the processing of said first tuning process is branched back to the processing step 2a of increasing the search frequency fs. If a service could be detected a processing step 7a follows in which the found frequency fj as a value of the search frequency fs and being connected to the service signal sj and the corresponding service sj is sent and communicated to the second tuning process P2 and the second tuning device T2. In contrast to the prior art immediately after having found the service sj and having communicated the respective frequency fj the search for further services is resumed and the processing is branched back to the processing step 2a for further increasing the search frequency fs. Therefore in contrast to prior art methods for tuning a system the search for services is more or less carried out without any interruption as the process for registering the respective service is executed in a outsourcing process, namely the second tuning process P2.

The second tuning process P2 starts with a first processing step 1b for receiving a respective message. This message could be - as described above - and end message when no frequency is submitted but could also be the message containing the frequency fj for a detected service sj which has been found by the first tuning process P1 performed in said first tuning device T1. After having received a frequency fj in a following step 3b the tuning

35

frequency or observing frequency f_o is set to said received frequency value f_j . Then in a following processing step 4b the respective service s_j corresponding to the service signal s_j at the frequency f_j is observed in order to extract from this observation respective information data ID. Said
5 information data ID is then stored in a service data base in the following step 5b. After the information data ID have been stored in the service data base the processing of the second tuning process P2 is referred back to the step 1b of receiving a further message. Each received message stemming from processing step 1b is analyzed in a processing step 2b. If the received
10 message in step 2b is an end message the processing of second tuning process P2 is terminated.

Reference Symbols

10	system to be tuned
c _j	carrier, carrier signal, $j = 1, \dots, n$
D	display
f _j	frequency, $j = 1, \dots, n$
f _o	observation frequency, tuning frequency
f _s	search frequency
P1	first tuning process
P2	second tuning process
S _j	service, potential service, $j = 1, \dots, n$
s _j	service signal, potential service signal, $j = 1, \dots, n$
T1	first tuning device, first tuner
T2	second tuning device, second tuner

Claims

1. Method for tuning a system (10) of devices to a plurality of service signals (S1, ..., Sn) of an according plurality of services (s1, ..., sn):
 - wherein a first and a second tuning process (P1, P2) are used and performed,
 - 5 - wherein said first tuning process (P1) is adapted and performed in order to search for and find carrier signals (C1, ..., Cn) of potential service signals (S1, ..., Sn) and to determine frequencies (f1, ..., fn) of said potential service signals (S1, ..., Sn) and
 - wherein said second tuning process (P2) is adapted and performed in
 - 10 order to register said system (10) to said services (s1, ..., sn) corresponding to said service signals (S1, ..., Sn) based on said determined frequencies (f1, ..., fn).
2. Method according to claim 1,
 - 15 wherein said first tuning process (P1) is adapted in order to communicate said frequencies (f1, ..., fn) of found carrier signals (C1, ..., Cn) of said potential service signals (S1, ..., Sn) of said services (s1, ..., sn), in particular directly to said second tuning process (P2).
- 20 3. Method according to any one of the preceding claims,
 - wherein said second tuning process (P2) is adapted in order to receive said found frequencies (f1, ..., fn) of found carrier signals (C1, ..., Cn) of potential service signals (S1, ..., Sn) of said potential services (s1, ..., sn), in particular directly from said first tuning process (P1).
 - 25
4. Method according to any one of the preceding claims,
 - wherein said first and said second tuning processes (P1, P2) or parts thereof are performed parallelly.
- 30 5. Method according to any one of the preceding claims,
 - wherein said first and said second tuning processes (P1, P2) or parts thereof are performed consecutively.
6. Method according to claim 5,
 - 35 wherein each single determined frequency (f1, ..., fn) of found carrier signals (C1, ..., Cn) of potential service signals (S1, ..., Sn) of potential services (s1,

..., sn) is provided to said second tuning process (P2) immediately after said respective frequency (f1, ..., fn) has been determined.

7. Method according to claim 5,

- 5 wherein determined frequencies (f1, ..., fn) of found carrier signals (C1, ..., Cn) of potential service signals (S1, ..., Sn) of potential services (s1, ..., sn) are provided to said second tuning process (P2) in a group-wise manner each group consisting of a sub-set of said determined frequencies (f1, ..., fn).

10 **8.** Method according to claim 5,

- wherein determined frequencies (f1, ..., fn) of found carrier signals (C1, ..., Cn) of potential service signals (S1, ..., Sn) of potential services (s1, ..., sn) are provided to said second tuning process (P2) in its entirety at a given instant of time after the plurality of frequencies (f1, ..., fn) has been
15 determined in its entirety.

9. Method according to any one of the preceding claims,

wherein the first tuning process (P1) comprises steps of:

- setting (1a) a start frequency (f0) as a value for a search frequency (fs),
- 20 - increasing (2a) the value of the search frequency (fs),
- detecting (5a) for each value of said search frequency (fs) a possible service (s1, ..., sn) or service signal (S1, ..., Sn).

10. Method according to any one of the preceding claims,

25 wherein said second tuning process (P2) comprises steps of:

- receiving (1b) a value of a frequency (f1, ..., fn) of a service (s1, ..., sn) or a service signal (s1, ..., sn),
- setting for each received value of a frequency (f1, ..., fn) an observation frequency (fo) to the respective received frequency (f1, ..., fn),
- 30 - observing the respective services (s1, ..., sn) or the respective service signal (S1, ..., Sn) at said observation frequency (fo),
- extracting information data (ID) from said observed service (s1, ..., sn) or said observed service signal (S1, ..., Sn),
- storing said information data (ID).

35

11. Method according to any one of the preceding claims,

- wherein a first tuning device (T1) is used in order to perform said first tuning process (P1) and

- wherein a second tuning device (T2) is used in order to perform said second tuning process (P2).

12. Method according to claim 11,

- 5 wherein a first tuning device (T1) is used which comprises a minimal set of technical means for carrying out the first tuning process (P1) and a process of communicating with said second tuning device (T2) only.

13. Method according to any one of the preceding claims 11 or 12,

- 10 wherein a second tuning device (T2) is used which comprises a minimal set of technical means for carrying out said second tuning process (P2) and a process of communicating (CC) with said first tuning device (T1) only.

14. Apparatus, in particular receiver,

- 15 which is adapted and arranged and which comprises means for carrying a method for tuning a system (10) according to any one of the claims 1 to 13 and the steps thereof.

15. Apparatus according to claim 14,

- 20 which comprises application specific integrated circuit means for carrying out the method for tuning a system (10) according to any one of the claims 1 to 13 and the steps thereof.

16. Computer program product,

- 25 comprising computer program means which is adapted in order to perform and realize a method for tuning a system (10) according to any one of the claims 1 to 13 and the steps thereof when it is executed on a computer or a digital signal processing means.

17. Computer readable storage medium,

- 30 comprising a computer program product according to claim 16.

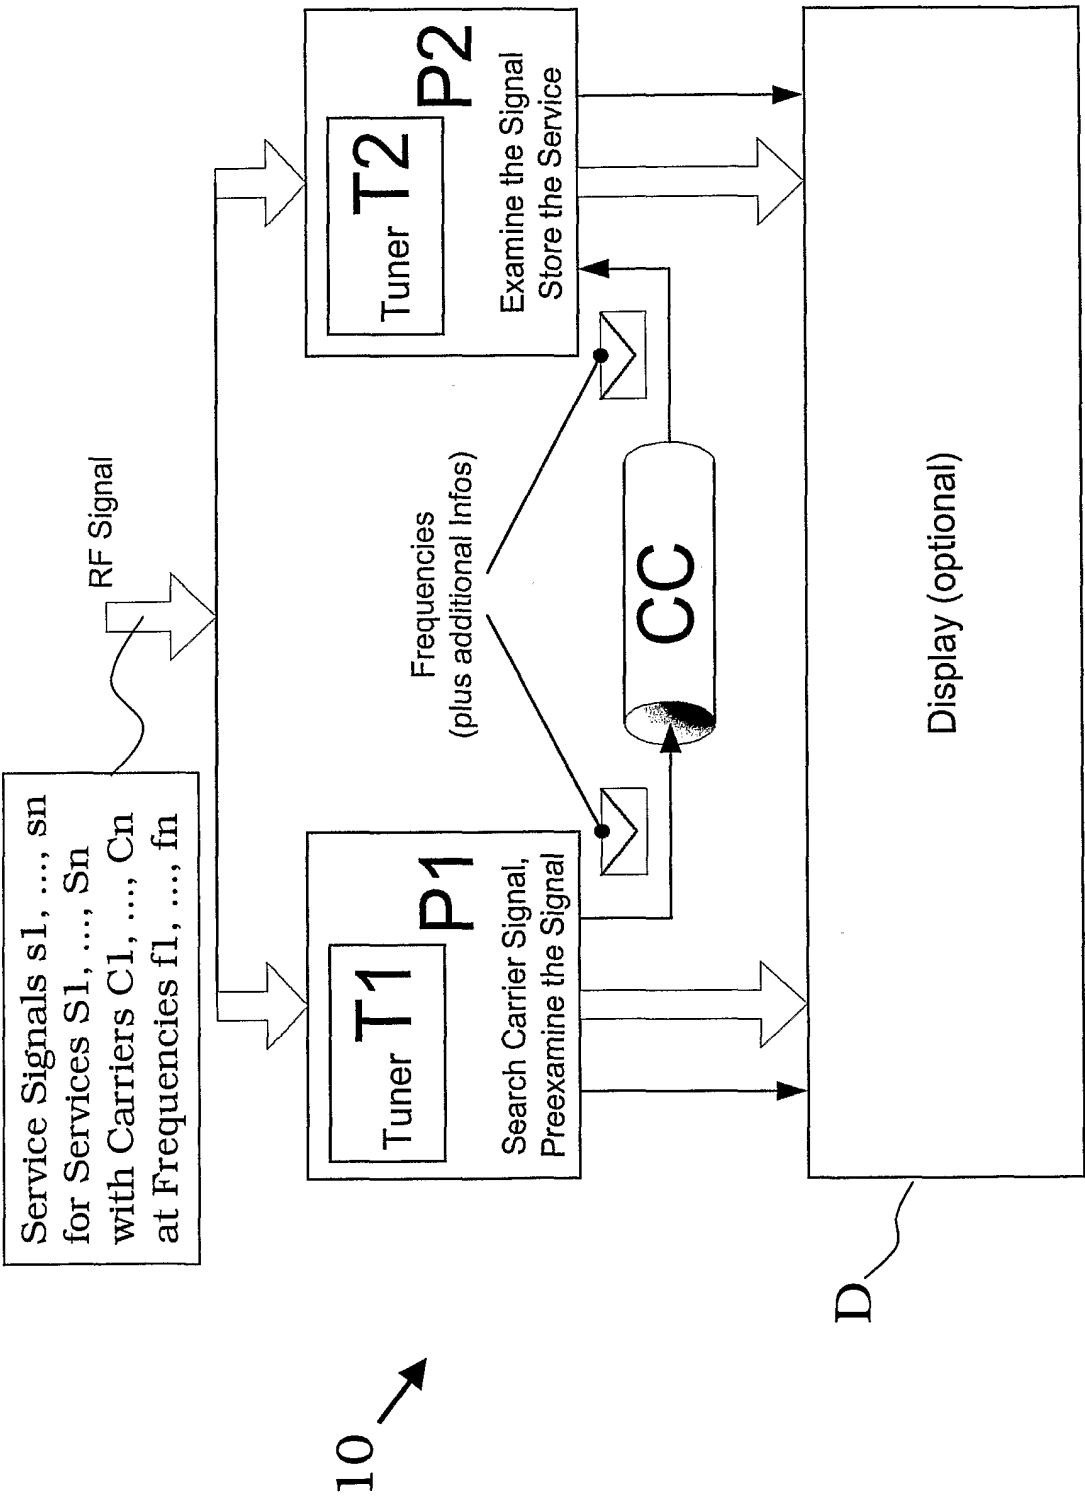


Fig. 1

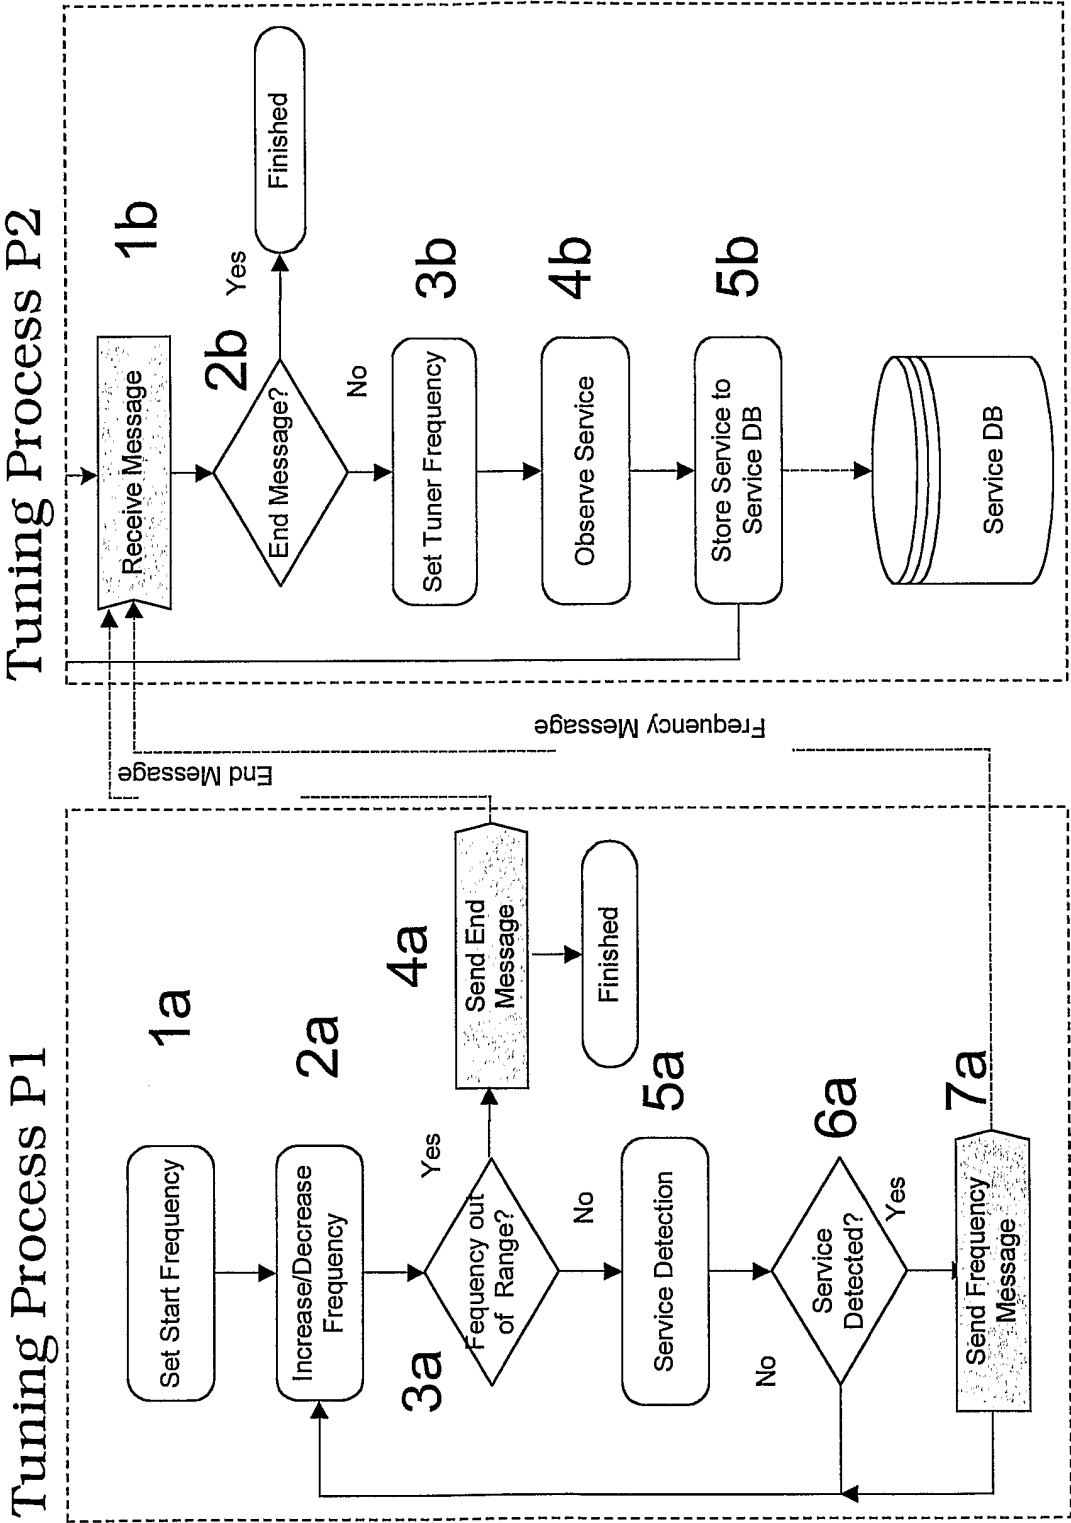


Fig. 2 - Advanced Tuning Process

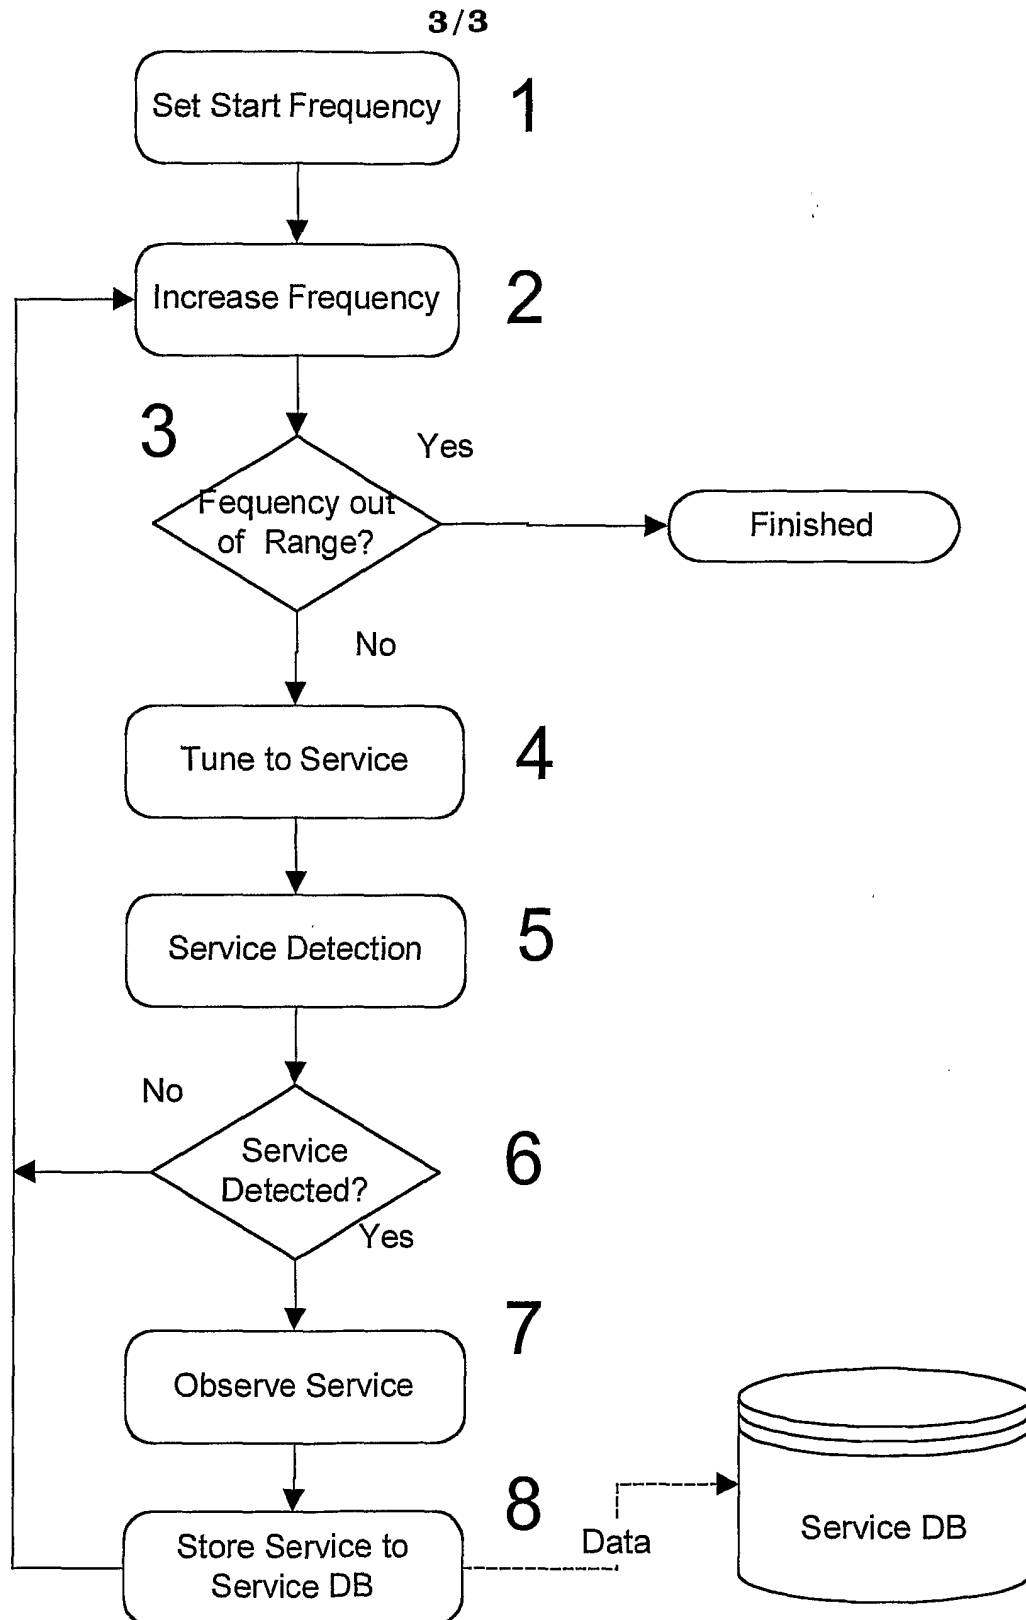


Fig. 3 - Conventional Tuning Process

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2006/000888

A. CLASSIFICATION OF SUBJECT MATTER

INV. H03J1/00 H04H9/00 H04N5/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H03J H04N H04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 12, 5 December 2003 (2003-12-05) & JP 2004 023128 A (CLARION CO LTD), 22 January 2004 (2004-01-22)	1-9, 11-17
A	abstract	10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

7 April 2006

Date of mailing of the international search report

18/04/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fouasnon, O

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2006/000888

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2004023128 A	22-01-2004	NONE	