



(51) International Patent Classification:

H01M 8/12 (2006.01) H01M 4/86 (2006.01)

H01M 4/88 (2006.01) H01M 4/90 (2006.01)

(21) International Application Number:

PCT/EP2015/064392

(22) International Filing Date:

25 June 2015 (25.06.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14174663.6 27 June 2014 (27.06.2014) EP

(71) Applicant: HALDOR TOPSØE A/S [DK/DK]; Haldor Topsøes Allé 1, DK-2800 Kgs. Lyngby (DK).

(72) Inventors: HEIREDAL-CLAUSEN, Thomas; Silkeborgsgade 21, 5.tv., DK-2100 Copenhagen Ø (DK). LUND FRANDSEN, Henrik; Topsøe Fuel Cell A/S, Nymøllevej 66, DK-2800 Kgs. Lyngby (DK). PETERSEN, Thomas Karl; c/o Topsøe Fuel Cell A/S, Nymøllevej 66, DK-2800 Kgs. Lyngby (DK). MADSEN, Mads Finn; TOPSØE FUEL CELL A/S, Nymøllevej 66, DK-2800 Kgs. Lyngby (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: ANODE SUPPORT CREEP

Fig. 1/1

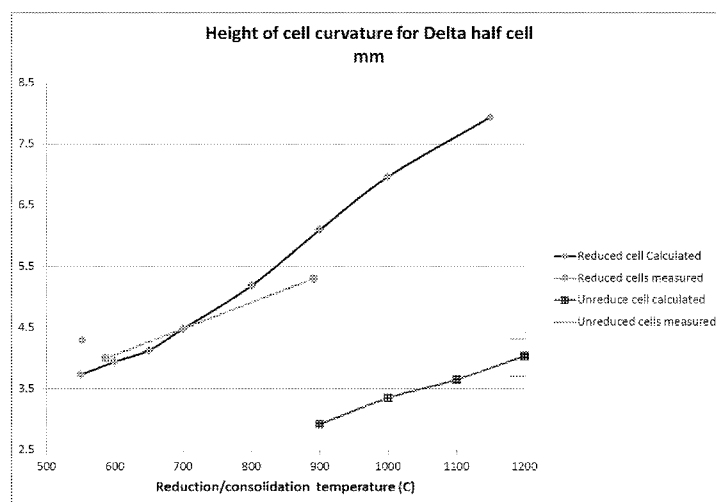

(57) Abstract: Initial reduction temperature of an SOC is kept higher than the highest intended operation temperature of the SOC to keep the electrolyte under compression by the Anode Support at all temperatures equal to and below the maximum intended operation temperature.

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*


Title: Anode Support Creep**FIELD OF THE INVENTION**


5 The invention relates to a production process for a solid oxide cell (SOC), in particular a solid oxide fuel cell (SOFC) stack system or a solid oxide electrolysis cell (SOEC) stack system. Specifically the invention concerns a process to control the anode support creep during reduction
10 to control thermo-mechanical stress in cells in SOC stacks.

BACKGROUND OF THE INVENTION

15 In the following, the structure of a solid oxide cell stack is explained in relation to fuel cells. The fuel cells may however also run in "reverse mode" and thus operate as electrolysis cells.

A Solid Oxide Fuel Cell (SOFC) comprises a solid electrolyte that enables the conduction of oxygen ions, a cathode where oxygen is reduced to oxygen ions and an anode where hydrogen is oxidised. The overall reaction in an SOFC is that hydrogen and oxygen electrochemically react to produce electricity, heat and water. In order to produce the required hydrogen, the anode normally possesses catalytic activity for the steam reforming of hydrocarbons, particularly natural gas, whereby hydrogen, carbon dioxide and carbon monoxide are generated. Reforming of methane, the main component of natural gas, can be described by the following
20 reactions:
25
30





During operation an oxidant such as air is supplied to the
5 solid oxide fuel cell in the cathode region. Fuel such as
hydrogen is supplied in the anode region of the fuel cell.
Alternatively, a hydrocarbon fuel such as methane is sup-
plied in the anode region, where it is converted to hydro-
gen and carbon oxides by the above reactions. Hydrogen
10 passes through the porous anode and reacts at the anode/-
electrolyte interface with oxygen ions generated on the
cathode side that have diffused through the electrolyte.
Oxygen ions are created in the cathode side with an input
of electrons from the external electrical circuit of the
15 cell.

To increase voltage, several cell units are assembled to
form a stack and are linked together by interconnects. In-
terconnects normally serve as a gas barrier to separate the
20 anode (fuel) and cathode (air/oxygen) sides of adjacent
cell units, and at the same time they enable current con-
duction between the adjacent cells, i.e. between an anode
of one cell with a surplus of electrons and a cathode of a
neighbouring cell needing electrons for the reduction pro-
25 cess. Further, interconnects are normally provided with a
plurality of flow paths for the passage of fuel gas on one
side of the interconnect and oxidant gas on the opposite
side.

30 The way the anode and cathode gas flows are distributed in
an SOFC stack is by having a common manifold for each of
the two process gasses. The manifolds can either be inter-

nal or external. The manifolds supply process gasses to the individual layers in the SOFC stack by the means of channels to each layer. The channels are normally situated in one layer of the repeating elements which are comprised in the SOFC stack, i.e. in the spacers or in the interconnect.

The SOC is a combination of several layers all with different Thermal Expansion Coefficients (TEC).

During production of the SOC, the layers are sintered together in a way that puts the thin electrolyte in compression by the thicker Anode Support. This is achieved by sintering the layers together at high temperature (app. 1200°C) and by the fact that the TEC of the electrolyte is lower than the Anode Support. This means that the Anode Support will contract more than the electrolyte during cooling from the 1200°C, and thereby put the electrolyte in compression.

The reason for putting the thin electrolyte under compression by the Anode Support is that the thin layer will fracture easily if it is under tension, whereas the thick Anode Support can handle the tension better. The electrolyte will be in compression for all temperatures below the sintering temperature, but will be in tension at temperatures above the sintering temperature.

In the sintering stage, the Anode Support comprises a cermet of NiO and YSZ. To activate the Anode and Anode Support, the NiO has to be reduced into Ni. This reduction of the SOC is done after assembly and conditioning of the SOC

stack at a temperature above 500°C - the reduction temperature.

5 It has been discovered that the Anode Support creeps very fast during the beginning of the reduction of NiO to Ni, which means that the internal stress in the SOC is relaxed, the electrolyte is no longer in compression by the Anode Support!

10 When the first part of the reduction is done, the creep rate of the Anode is "back to normal", which means that in a practical aspect, it does not creep anymore. This means that cooling the stack from the reduction temperature will again put the electrolyte under compression, because of the
15 difference in TEC between the Anode Support and the electrolyte. But as the case was with the sintering temperature, the electrolyte is only in compression for temperatures below the reduction temperature.

20 When the SOC stack is put into operation, it is vital for the integrity of the electrolyte that it is under compression in all places at all times. The operation temperature of the SOC stack compared to the reduction temperature is thus an important parameter in order to avoid electrolyte
25 fracture.

US2009221421 describes a catalyst for producing hydrogen comprising a porous body, as a support, comprising either one of an amorphous phase oxide and a composite oxide containing titanium and zirconium in which titanium has a mol
30 ratio of 5 to 75 percent and zirconium has a mol ratio of 25 to 95 percent to the sum of these two, the porous body

having a micro-hole diameter distribution peak in the range of 3 nm to 30 nm; and catalytic active metal grains carried on the a gas contact surface of the support, and the catalytic active metal has a content of 1 to 30 percent by mass to the sum of the porous body and the catalytic active metal, and a method of manufacturing thereof. This suppresses sintering or coking causing activity deterioration, thereby minimizing reaction ratio variations with time. A fuel reformer having the above catalyst, and a fuel cell having the fuel reformer are also described.

In US2002177032 an electrode layer for fuel cells which is improved in the efficiency of a catalyst, the diffusion capability of fuel, the stabilization and the high output is disclosed. An electrode for fuel cells which consists of current collector layer which consists of a conductive fiber, and a catalyst layer formed on current collector layer, the conductivity of the thickness direction of the layer in a catalyst layer is raised by using the carbon nano fiber which grew perpendicularly to plane of current collector as a catalyst layer.

US2009068523 discloses a fuel electrode for a solid oxide electrochemical cell including: an electrode layer constituted of a mixed phase including an oxide having mixed conductivity and another oxide selected from the group including an aluminum-based oxide and a magnesium-based composite oxide, said another oxide having, supported on a surface part thereof, particles of at least one member selected from nickel, cobalt, and nickel-cobalt alloys; a meshy wiring formed on a surface layer part of the electrode layer and made of a material having higher electronic

conductivity than the electrode layer; and a current collector which overlies the electrode layer and is in contact with at least the wiring.

5 US2010028757 relates to an anode for a high-temperature fuel cell having an anode substrate and/or a functional anode layer, comprising a porous ceramic structure having a first predominantly electron-conducting phase with the general empirical formula $Sr_{1-x}Ln_xTiO_3$ wherein $Ln=Y, Gd$ to Lu
10 and $0.03 < x < 0.2$, and having a second predominantly ion-conducting phase component comprising yttrium or scandium-stabilized zirconium dioxide (YSZ or ScSZ). In the anode substrate and/or the functional anode layer, the ratio by volume of the first phase to the second phase ranges from
15 80:20 to 50:50, and particularly from 70:30 to 60:40. The porosity of the entire anode ranges between 15 and 50 percent by volume. The anode additionally comprises a catalyst in the amount of no more than 15 percent of the total volume, which is disposed on the surface of the pores of the
20 ceramic structure.

None of the above described known art provides a solution to the above described problems of keeping the electrolyte under compression at all times of operation of the SOC or
25 SOC stack.

With reference to the above listed considerations, there is a need for a method to ensure that the operation temperature of the SOC at all times anywhere in the SOC is lower
30 than the reduction temperature to ensure compression of the electrolyte to avoid fracture.

These and other objects are achieved by the invention as described below.

SUMMARY OF THE INVENTION

5

During operation of the SOC, a temperature profile is present across the cell, and the maximum temperature of the profile should always be lower than the reduction temperature.

10

The invention is to use the knowledge about the Anode Support creep during reduction to design a reduction process, where the temperature during the beginning of the reduction is kept higher, with a safety margin, than the highest temperature during normal operation. The reduction process should not necessarily compensate for any unforeseen operation situation. If operation instructions are not complied with, or if a break-down of a support system component occurs, the temperature of the SOC may rise above the intended operation temperature. However this is not a normal occurrence, and the present invention does not necessarily provide a solution for unexpected temperature occurrences, since that would mean a reduction process with high temperatures and an undefined temperature regime, since it is not known what temperatures would occur at unexpected operation situations. The present invention is therefore designed for the intended, expected operation temperatures of an SOC and an SOC stack.

20
25
30

In an embodiment of the invention, the SOC stack is reduced at app. 810°C and operated at a maximum temperature of app. 800°C.

Features of the invention.

1. Process for activating an anode and an anode support
comprised in a Solid Oxide Cell by reduction of the Solid
Oxide Cell, the Solid Oxide Cell further comprising an
electrolyte and a cathode, the process comprising the step
of -
 - heating the Solid Oxide Cell to a reduction temperature higher than the maximum intended operation temperature of the Solid Oxide Cell, whereby the electrolyte is kept under compression by the anode support during operation.
2. Process according to feature 1, wherein the Solid Oxide Cell further comprises one or more barrier layers.
3. Process according to feature 1 or 2, wherein the solid Oxide cell further comprises one or more contacting layers.
4. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is above 800°C.
5. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is above 775°C.
6. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is above 750°C.
7. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is above 700°C.

8. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is above 600°C.

5 9. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is above 500°C.

10 10. Process according to feature 1, wherein the reduction temperature of the Solid Oxide Cell is the maximum intended operation temperature plus a temperature range, ΔT .

11. Process according to feature 10, wherein ΔT is 0 - 500°C, preferably 0 - 300°C, preferably 0 - 100°C.

15 12. Process according to any of the preceding features, wherein the anode support comprises a cermet of NiO and YSZ and the activation is done by reducing the NiO into Ni.

20 13. Process according to any of the preceding features, wherein the CTE of the electrolyte is lower than the CTE of the anode support.

25 14. Solid Oxide Cell produced in a process according to any of the preceding features, wherein the electrolyte of the cell is kept under compression by the anode support at all temperatures at, and below the reduction temperature.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is further illustrated by the accompanying drawing showing an example of an embodiment of the invention.

Fig. 1 shows a diagram of the effect of different reduction temperatures of an SOC.

DETAILED DESCRIPTION

The diagram of Fig. 1 has on the X-axis the reduction temperature and on the Y-axis the height of the cell curvature for a half cell according to the invention.

To investigate the Anode Support creep as described above, the effect of different reduction temperatures were modelled and tested on three SOC stacks.

Curvature of the cells was used as a measure of the internal stress in the cells at room temperature caused by the difference in TEC.

Fig. 1 shows a plot of the results. The lower curve represents the modelled curvature of the TOFC cells unreduced after sintering as a function of sintering temperature.

The three short lines at the far right (1200°C) of the diagram show the measured curvature of the cells used in the experiments sintered at app. 1200°C.

The longest, top curve shows the calculated curvature of the reduced cells as a function of reduction temperature, assuming that Anode Support creep happens and the cell is relaxed at the reduction temperature.

5

The three round markers and the middle curve is the experimental data after varying the reduction temperature, which is in good consistency with the calculated values. This proves the theory of the invention is working in practice.

10

CLAIMS.

1. Process for activating an anode and an anode support
comprised in a Solid Oxide Cell by reduction of the Solid
Oxide Cell, the Solid Oxide Cell further comprising an
electrolyte and a cathode, the process comprising the step
of -
- heating the Solid Oxide Cell to a reduction temperature higher than the maximum intended operation temperature of the Solid Oxide Cell, whereby the electrolyte is kept under compression by the anode support during operation.
2. Process according to claim 1, wherein the Solid Oxide Cell further comprises one or more barrier layers.
3. Process according to claim 1 or 2, wherein the solid Oxide cell further comprises one or more contacting layers.
4. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is above 800°C.
5. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is above 775°C.
6. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is above 750°C.
7. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is above 700°C.

8. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is above 600°C.

5 9. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is above 500°C.

10 10. Process according to claim 1, wherein the reduction temperature of the Solid Oxide Cell is the maximum intended operation temperature plus a temperature range, ΔT .


11. Process according to claim 10, wherein ΔT is 0 - 500°C, preferably 0 - 300°C, preferably 0 - 100°C.

15 12. Process according to any of the preceding claims, wherein the anode support comprises a cermet of NiO and YSZ and the activation is done by reducing the NiO into Ni.

20 13. Process according to any of the preceding claims, wherein the CTE of the electrolyte is lower than the CTE of the anode support.

25 14. Solid Oxide Cell produced in a process according to any of the preceding claims, wherein the electrolyte of the cell is kept under compression by the anode support at all temperatures at, and below the reduction temperature.

Fig. 1/1

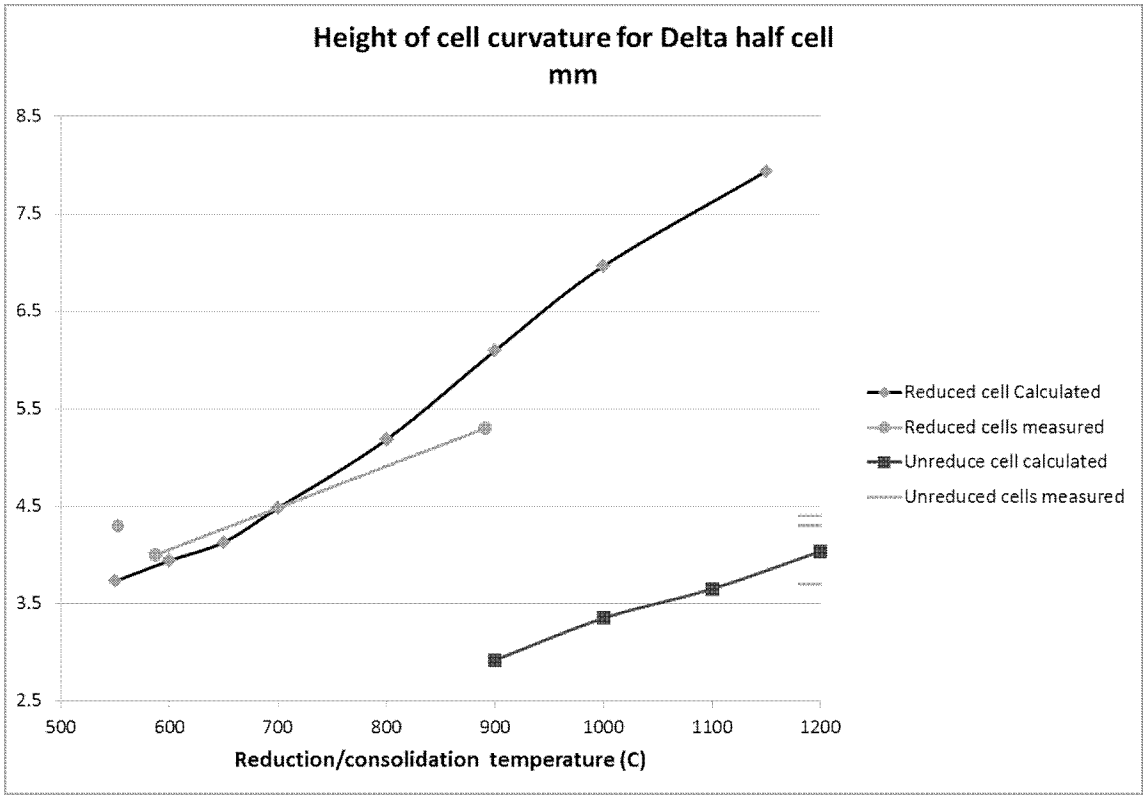

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/064392

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01M8/12 H01M4/88
ADD. H01M4/86 H01M4/90

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 928 049 A1 (UNIV DENMARK TECH DTU [DK]) 4 June 2008 (2008-06-04) paragraphs [0004], [0031], [0050], [0060], [0080] claims 1-3	1-14
X	EP 2 104 165 A1 (UNIV DENMARK TECH DTU [DK]) 23 September 2009 (2009-09-23) paragraphs [0020], [0042], [0051] claims 1-14 ----- -/-	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 August 2015

Date of mailing of the international search report

03/09/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Reich, Claus

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/064392

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/052938 A1 (SAINT-GOBAIN CERAMICS & PLASTICS INC) 11 April 2013 (2013-04-11) page 2, lines 5-9 page 8, line 21 - page 11, line 25 page 23, lines 3-11 page 26, lines 5-12 page 29, lines 5-12 claims 1-72 -----	1-14
X	JP 2003 263996 A (MITSUBISHI MATERIALS CORP; KANSAI ELECTRIC POWER CO) 19 September 2003 (2003-09-19) abstract -----	14
A	WO 2011/060756 A1 (FORSCHUNGSZENTRUM JUELICH GMBH [DE]; PLANSEE SE [AT]; MUECKE ROBERT [D] 26 May 2011 (2011-05-26) claims 1-21 page 3, lines 23-27 page 5, lines 19-27 -----	1-14
A	WO 2011/137916 A1 (HALDOR TOPSOE AS) 10 November 2011 (2011-11-10) page 2, line 24 - page 3, line 14 -----	1-14
A	US 2014/178799 A1 (KOO BON SEOK [KR] ET AL) 26 June 2014 (2014-06-26) paragraph [0045] -----	1-14
A	US 2010/159356 A1 (MAHONEY F MICHAEL [US]) 24 June 2010 (2010-06-24) paragraph [0046] -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/064392

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1928049	A1	04-06-2008	
		AU 2007323291 A1	29-05-2008
		CA 2669811 A1	29-05-2008
		CA 2797177 A1	29-05-2008
		CN 101563805 A	21-10-2009
		CN 103861470 A	18-06-2014
		EP 1928049 A1	04-06-2008
		EP 2084772 A2	05-08-2009
		EP 2701227 A1	26-02-2014
		JP 5219298 B2	26-06-2013
		JP 2010510635 A	02-04-2010
		KR 20090094273 A	04-09-2009
		RU 2009119261 A	27-12-2010
		US 2010062312 A1	11-03-2010
		WO 2008061782 A2	29-05-2008
EP 2104165	A1	23-09-2009	
		AU 2009226760 A1	24-09-2009
		CA 2718954 A1	24-09-2009
		CN 101978537 A	16-02-2011
		EP 2104165 A1	23-09-2009
		EP 2269252 A1	05-01-2011
		JP 5489125 B2	14-05-2014
		JP 2011514644 A	06-05-2011
		KR 20100124821 A	29-11-2010
		RU 2010137964 A	27-04-2012
		US 2011089028 A1	21-04-2011
		US 2014223730 A1	14-08-2014
		WO 2009115319 A1	24-09-2009
WO 2013052938	A1	11-04-2013	
		EP 2764570 A1	13-08-2014
		JP 2014528636 A	27-10-2014
		KR 20140068227 A	05-06-2014
		US 2013093129 A1	18-04-2013
		WO 2013052938 A1	11-04-2013
JP 2003263996	A	19-09-2003	NONE
WO 2011060756	A1	26-05-2011	
		CA 2781176 A1	26-05-2011
		CN 102986069 A	20-03-2013
		EP 2333883 A1	15-06-2011
		EP 2502297 A1	26-09-2012
		JP 5540108 B2	02-07-2014
		JP 2013511795 A	04-04-2013
		KR 20120085321 A	31-07-2012
		TW 201123596 A	01-07-2011
		US 2012244456 A1	27-09-2012
		WO 2011060756 A1	26-05-2011
WO 2011137916	A1	10-11-2011	
		AU 2010352713 B2	31-07-2014
		CA 2798206 A1	10-11-2011
		CN 103026539 A	03-04-2013
		DK 2567422 T3	27-10-2014
		EA 201291140 A1	30-05-2013
		EP 2567422 A1	13-03-2013
		EP 2811567 A1	10-12-2014
		EP 2811568 A1	10-12-2014
		ES 2508115 T3	16-10-2014
		JP 5738983 B2	24-06-2015
		JP 2013530490 A	25-07-2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/064392

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 20130071435 A	28-06-2013
		TW 201218496 A	01-05-2012
		US 2013052548 A1	28-02-2013
		WO 2011137916 A1	10-11-2011

US 2014178799 A1	26-06-2014	JP 2014123543 A	03-07-2014
		US 2014178799 A1	26-06-2014

US 2010159356 A1	24-06-2010	CN 102292858 A	21-12-2011
		EP 2377192 A2	19-10-2011
		JP 5667078 B2	12-02-2015
		JP 2012513096 A	07-06-2012
		KR 20110104049 A	21-09-2011
		US 2010159356 A1	24-06-2010
		WO 2010080507 A2	15-07-2010
