

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 July 2006 (20.07.2006)

PCT

(10) International Publication Number  
**WO 2006/076115 A1**

(51) International Patent Classification:  
**G02B 6/44** (2006.01) **H04M 1/02** (2006.01)  
**H04Q 1/02** (2006.01)

(74) Agent: **DREMANN, Christopher, C.**; Corning Cable Systems LLC, 800 17Th Street NW, PO Box 489, Hickory, NC 28603 (US).

(21) International Application Number:  
PCT/US2005/045243

(22) International Filing Date:  
14 December 2005 (14.12.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
11/035,232 13 January 2005 (13.01.2005) US

(71) Applicant (for all designated States except US): **CORNING CABLE SYSTEMS LLC** [US/US]; 800 17Th Street NW, PO Box 489, Hickory, NC 28603 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NAPIORKOWSKI, John, J.** [US/US]; 7609 Primrose Drive, Irving, TX 75063 (US). **GRUNWALD, Brad, N.** [US/US]; 511 Westcliff Drive, Euless, TX 76040 (US). **KEENUM, John, A.** [US/US]; 5201 Springlake Pkwy #604, Haltom City, TX 76117 (US). **VO, Chanh, C.** [US/US]; 4001 Kimbell Drive, Keller, TX 76248 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: NETWORK INTERFACE DEVICE HAVING INTEGRAL SLACK STORAGE COMPARTMENT

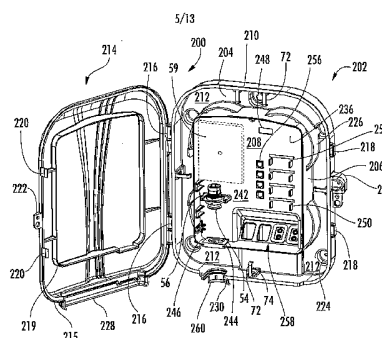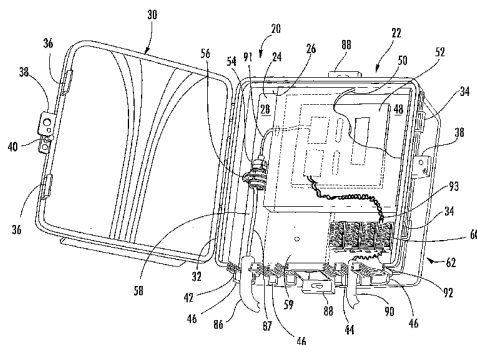

(57) Abstract: A network interface device (NID) for a fiber optic communications network is provided for housing optical, electrical and/or coaxial connections and active and/or passive components. The NID includes a base and a movable panel defining a connection area and a components area. In one embodiment, a first base defines a first compartment for housing the panel and a second base defining a second compartment for storing drop cable slack, the first base being movably attached to the second base to provide access to the drop cable slack without disturbing the connections. In another embodiment, the panel defines a first compartment for optical and electrical connections and a second compartment for active and passive components, the second compartment being accessible to only the service provider. In another embodiment, the panel is removable and interchangeable to permit the service provider to upgrade the services or to expand services provided to a subscriber.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **NETWORK INTERFACE DEVICE HAVING INTEGRAL SLACK STORAGE COMPARTMENT**

### **BACKGROUND OF THE INVENTION**

#### **FIELD OF THE INVENTION**

[0001] The present invention relates generally to an enclosure for providing communications services to a subscriber premises in a fiber optic communications network. More particularly, the invention is a network interface device (NID) for connecting a network fiber optic drop cable to subscriber wiring at a subscriber premises in a fiber optic communications network.

#### **TECHNICAL BACKGROUND**

[0002] Communications service providers are currently installing fiber optic communications networks that extend to homes and businesses. Such networks are commonly referred to as "fiber-to-the-home (FTTH)" or "fiber-to-the-business (FTTB)" networks, and the homes and businesses are commonly referred to as "subscriber premises." As with conventional copper communications networks, there is a need in a fiber optic network for an enclosure, referred to herein as a network interface device (NID), located at the subscriber premises that provides convenient access to the connections between the fiber optic network and the subscriber wiring. The NID serves as the mandatory demarcation point between the fiber optic cable routed to the NID, referred to herein as the "network fiber optic drop cable" or "drop cable," and the subscriber wiring. Depending on the type of communications services provided and the subscriber's communications equipment, the subscriber wiring may be a fiber optic cable containing one or more optical fibers, an electrical cable containing one or more electrical conductors (e.g. twisted wire pairs), or a coaxial cable containing a central electrical conductor and a concentric ground. Similarly, the communications services may initially

be provided by an electrical drop cable or a coaxial drop cable that is subsequently replaced by a fiber optic drop cable.

[0003] The NID permits the service provider to access the terminating devices that connect the network drop cable and the subscriber wiring, as well as any passive or active components housed within the NID, for installation, reconfiguration and test operations. Such active components may include, for example, optical-to-electrical converters for converting optical signals to electrical signals and electrical signals to optical signals. At the same time, the NID is typically configured to prevent unauthorized access to the passive or active components belonging to the service provider. As a result, the NID is usually mounted in a location having restricted access, such as a utility closet inside the subscriber premises. Alternatively, the NID may be mounted outside the subscriber premises, for example a home, and provided with a protective outer cover that can be opened only by the subscriber and the service provider to access the connections. The NID is further provided with an inner cover having a security feature to prevent the subscriber and others from accessing the passive or active components belonging to the service provider that are housed within the enclosure.

[0004] Typically, the passive or active components belonging to the service provider are installed on the same vertical plane inside the NID as the connections to the subscriber wiring, thereby utilizing a significant amount of space and requiring the NID to have a relatively large footprint. In addition, communications service providers are increasingly demanding the use of standard length pre-connectorized drop cables to reduce material and field labor costs. Consequently, there is often an excess length of the network drop cable, referred to herein as drop cable slack, which must be coiled and stored in an accessible, yet aesthetic manner. Current practice is to coil and store the drop cable slack within the NID above or below the termination equipment (e.g. furcations, fanout kits, splice trays, routing guides, adapters, surge protectors, etc.) and the optical, electrical or coaxial connections. Alternatively, the drop cable slack is coiled and stored within a separate slack storage enclosure mounted near the NID. The downstream end of the drop cable is then routed from the slack storage enclosure to the NID. When the drop cable slack is stored within the NID, the connections must be disturbed if it becomes necessary to remove the drop cable slack for repair (e.g., re-connectorization) or replacement. When the drop cable slack is stored in a separate slack storage enclosure mounted near the NID, cable routing, drip loop and aesthetic considerations must be accommodated.

[0005] Accordingly, it would be desirable to provide a NID that is adapted to accommodate optical, electrical and/or coaxial connections, while providing the mandatory demarcation point between the service provider and the subscriber and preventing unauthorized access to the passive or active components belonging to the service provider. At the same time, it would be highly desirable to utilize the NID instead of a separate slack storage enclosure to coil and store drop cable slack in an accessible and aesthetic manner, thereby minimizing additional material, tooling, manufacturing and installation costs, without disturbing the optical, electrical and/or coaxial connections within the NID.

#### SUMMARY OF THE INVENTION

[0006] One broad aspect of the present invention includes a network interface device (NID) for connecting at least one optical fiber of a network fiber optic drop cable with at least one electrical wire (e.g. a twisted wire pair) of subscriber wiring leading from communications equipment at a subscriber premises. The NID comprises a first base having a first floor and a first sidewall defining an outer compartment for housing optical connections, terminating devices and electrical connections, and a second base having a second floor and a second sidewall defining an inner compartment for storing drop cable slack, the first base being movably attached to the second base.

[0007] In another broad aspect of the invention, a NID comprises a base having a floor and a first sidewall defining a first compartment. A connections area is provided within the first compartment at a first elevation above the floor and a components area is provided within the first compartment between the floor and the connections area at a second elevation different from the first elevation. A second sidewall may be provided such that the floor and the second sidewall define a second compartment radially outwardly from the first compartment for storing drop cable slack.

[0008] In another broad aspect of the invention, a NID comprises a base having a floor and a first sidewall defining a first compartment. A first panel having an outer side and an inner side defining a first configuration is removably mounted within the first compartment and interchangeable with a second panel having an outer side and an inner side defining a second configuration. The outer side of the first panel and the second panel defines a connections area, and the inner side of the first panel and the second panel defines a components area. A second sidewall may be provided such that the floor and

the second sidewall define a second compartment radially outwardly from the first compartment for storing drop cable slack.

[0009] The invention will be understood more easily and other objects, characteristics, details and advantages thereof will become more apparent in the course of the following explanatory description, which is given, without intending to imply any limitation of the invention, with reference to the attached drawings.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0010] FIG. 1 is a perspective view of an exemplary embodiment of a network interface device (NID) according to the present invention showing the first compartment of the first base.

[0011] FIG. 2 is a perspective view of the NID of FIG. 1 showing the second compartment of the second base.

[0012] FIG. 3 is a perspective view of the NID of FIG. 1 showing the rear of the second base.

[0013] FIG. 4 is a perspective view of another exemplary embodiment of a NID according to the present invention shown with the protective outer cover in the opened position and the connections and components panel in a first position.

[0014] FIG. 5 is a perspective view of another exemplary embodiment of a NID according to the present invention shown with the protective outer cover in the opened position and the connections and components panel in a first position.

[0015] FIG. 6 is a perspective view of the NID of FIG. 5 shown with the protective outer cover in the closed position.

[0016] FIG. 7 is a perspective view of the NID of FIG. 5 showing the rear of the base.

[0017] FIG. 8 is an end view of the NID of FIG. 5 showing the bottom of the NID.

[0018] FIG. 9 is a perspective view of the NID of FIG. 5 showing the connections and components panel in a second position rotated outwardly from the first position.

[0019] FIG. 10 is a perspective view of another exemplary embodiment of a NID according to the present invention shown with the protective outer cover in the opened position and a first example of an interchangeable connections and components panel disposed within the NID with a Telco door in the closed position.

[0020] FIG. 11 is a perspective view of the first example of the interchangeable connections and components panel shown with the Telco door in the opened position.

[0021] FIG. 12 is a perspective view of the NID of FIG. 10 shown with a second example of an interchangeable connections and components panel disposed within the NID in a first position.

[0022] FIG. 13 is a perspective view of the second example of the interchangeable connections and components panel shown in a second position rotated outwardly from the first position.

[0023] FIG. 14 is a perspective view of the NID of FIG. 10 shown with a third example of an interchangeable connections and components panel disposed within the NID in a first position.

[0024] FIG. 15 is a perspective view of the third example of the interchangeable connections and components panel shown in a second position rotated outwardly from the first position.

#### DETAILED DESCRIPTION OF THE INVENTION

[0025] The invention is described more fully hereinafter with reference made to the accompanying drawings, in which preferred embodiments of the invention are shown. The invention may, however, be embodied in many different forms, and therefore, should not be construed as being limited to the particular embodiments shown and described herein. Illustrative embodiments are set forth herein so that this description will be both thorough and complete, and will fully convey the intended scope of the claimed invention while enabling those skilled in the art to make and practice the invention without undue experimentation. Positional terms, such as left, right, top, bottom, front, rear, side, etc., and relational terms, such as larger, smaller, nearer, farther, etc., are utilized herein for purposes of explanation only, and as such, should not be construed as limiting the scope of the invention or the appended claims in any manner.

[0026] FIGS. 1-3 show an exemplary embodiment of a network interface device (NID) 20 according to the present invention. As best shown in FIG. 1, the NID 20 includes a first base 22 comprising first floor 24 and first continuous sidewall 26 depending upwardly around the periphery of the first floor 24. Together, first floor 24 and sidewall 26 define an outer compartment 28 for housing termination equipment and connections, such as optical, electrical or coaxial connections, as will be described.

[0027] NID 20 further comprises protective outer cover 30 movably attached to first base 22. First base 22 and outer cover 30 may be made of any relatively rigid material, for example sheet metal, but preferably are made of a molded plastic, such as PVC, polyethylene, or polypropylene. Outer cover 30 may be movably attached to first base 22 in any suitable manner, but preferably is attached to the first base 22 by one or more hinges 32 provided along one side of first base 22. Accordingly, outer cover 30 pivots about hinges 32 between a closed position and the opened position shown in FIG. 1 to provide access to the outer compartment 28 within the NID 20.

[0028] As shown, first base 22 is provided with slots 34 and outer cover 30 is provided with snaps or latches 36 that are received within slots 34 to secure outer cover 30 onto first base 22 in the closed position. First base 22 and outer cover 30 may also be provided with means 38 opposite hinges 32 for locking outer cover 30 onto first base 22. For example, means 38 may comprise a security screw 40 that requires an industry specific tool to remove. Alternatively, means 38 may comprise aligned openings through first base 22 and outer cover 30 that receive a combination or key lock (not shown) belonging to the subscriber. NID 20 is typically mounted in a location having restricted access, such as a utility closet inside a subscriber premises. Alternatively, NID 20 may be mounted outside the subscriber premises and outer cover 30 locked onto first base 22, as described above, to prevent unauthorized access to the termination equipment and connections housed within the NID 20.

[0029] At least one network drop cable entry port 42 is provided through first sidewall 26 in communication with outer compartment 28 to permit a network drop cable 86, as will be described hereinafter, to be routed from the network into the NID 20. NID 20 may be provided with any convenient number of network drop cable entry ports 42. Preferably, however, NID 20 is provided with at least one network drop cable entry port 42 for receiving a network fiber optic drop cable from a fiber optic communications network. Entry port 42 may be provided with a removable grommet or breakable seal to prevent contaminants, such as dirt, dust, moisture or infestations, from entering the NID 20 when entry port 42 is not in use. When in use, entry port 42 may also be sealed with a gel or grease around the fiber optic cable in a known manner to prevent contaminants from entering the NID 20. As shown and described herein, entry port 42 for receiving the network drop cable is located along the lower edge of first sidewall 26 adjacent the side of first base 22 having hinges 32. Entry port 42 may, however, be located at any suitable

location as long as the entry port **42** remains in communication with outer compartment **28** of NID **20**.

[0030] First base **22** further comprises at least one subscriber cable entry port **44** that is likewise in communication with outer compartment **28** to permit a subscriber cable **90**, as will be described hereinafter, to be routed from the subscriber premises into the NID **20**. Subscriber cable entry port **44** provides a means by which a subscriber cable can enter the NID **20** for connection to the drop cable **86** from the network. Preferably, first base **22** comprises a plurality of subscriber cable entry ports **44**. As shown, entry ports **44** are located along the lower edge of first sidewall **26** adjacent the side of first base **22** opposite hinges **32**. Entry ports **44** may, however, be located at any suitable location as long as the entry ports **44** remain in communication with outer compartment **28** of NID **20**.

[0031] Both the network drop cable(s) **86** and the subscriber cable(s) **90** may be strain relieved as they enter the outer compartment **28** within the NID **20**. For example, drop cable entry port **42** and subscriber cable entry ports **44** may be provided with an arcuate strain relief bracket **46** adjacent the corresponding entry port for strain relieving the network drop cable(s) **86** and/or subscriber cable(s) **90** with a clamping device, such as a conventional cable tie (not shown).

[0032] NID **20** includes a components area **48** having a security cover **50** for preventing unauthorized access to the components area **48** and the components therein that belong to the service provider. The cover **50** may be secured over the components area **48**, for example, by a security screw that requires an industry specific tool to remove. An original equipment manufacturer (OEM) may provide a printed circuit board (PCB) **52** mounted within the components area **48**. Area **48** may be configured for mounting PCB **52** above first floor **24**, for example by mounting the PCB **52** to first floor **24** via standoffs. Alternatively, the PCB **52** may be mounted directly or via standoffs to the back side of cover **50** (i.e. the side of cover **50** facing components area **48**). As will be appreciated by those skilled in the art, components area **48** may contain optical, electrical or coaxial components. As shown and described herein, components area **48** contains both optical and electrical components, and the PCB **52** includes an optical-to-electrical converter for converting optical signals to electrical signals and electrical signals to optical signals. Accordingly, PCB **52** is commonly referred to as an opto-electronic device or interface. Components area **48** may contain active and/or passive components, and such components may be located and configured on the PCB **52** in any manner desired by the OEM or the service provider.

[0033] The portion of outer compartment 28 outside the components area 48 forms a connections area 58. As shown and described herein, NID 20 further includes at least one fiber optic connection 54 mounted to first floor 24 via bracket 56 for connecting one or more optical fibers of the network fiber optic drop cable 86 to one or more optical fiber of a fiber optic pigtail 91. Fiber optic connection 54 may, for example, be a conventional connector adapter sleeve by which one or more fiber optic pigtails 91 are optically connected to the network fiber optic drop cable 86. Alternatively, connection 54 may be an OptiTap™ type fiber optic receptacle available from Corning Cable Systems LLC of Hickory, North Carolina, for receiving opposing fiber optic connectors mounted upon the ends of the network fiber optic drop cable 86 and the fiber optic pigtail 91. Regardless, fiber optic connection 54 is configured to receive at least one fiber optic connector, such as an SC style connector, on each side. If a connector adapter sleeve or receptacle is used, the optical fibers of the drop cable 86 are preferably connectorized and inserted into one end of the connection 54. At least one connectorized pigtail 91 is then inserted into the other end of the connection 54 to align and optically connect the optical fiber of the pigtail 91 with the corresponding optical fiber of the drop cable 86. Preferably, the network fiber optic drop cable 86 and the fiber optic pigtail 91 are pre-connectorized (i.e. connectorized in the factory) in order to simplify and expedite the connection process, thereby reducing field labor costs. The fiber optic pigtail 91 may then be routed into the components area 48 through an opening provided in cover 50 and optically connected to a passive component on the PCB 52. Alternatively, if the optical fibers of the drop cable 86 are not pre-connectorized, outer compartment 28 may optionally include a conventional splice tray and/or splice holder 59 for aligning and holding one or more splices between optical fibers of the drop cable 86 routed into the splice tray 59 and optical fibers of a transport tube (not shown) spliced thereto by conventional methods well known in the art, such as by mechanical or fusion splicing. The optical fibers contained within the transport tube are then routed through the opening provided in the cover 50 and optically connected to a passive component on the PCB 52.

[0034] At least one terminating device 60, such as a conventional insulation displacement connector (IDC) shown in FIG. 1 may be mounted onto first floor 24 in outer compartment 28 outside components area 48 (i.e. in the connections area 58). Preferably terminating devices 60 are removably mounted onto first floor 24, such as by the use of conventional slots that engage with feet provided on the terminating devices 60. Jumper wires 93, such as a conventional twisted wire pair, are routed through an opening

provided on the cover **50** and used to connect an electrical component within components area **48**, for example an optical-to-electrical converter on PCB **52**, with a corresponding terminating device **60**. The jumper wires **93** may be provided with spades for engaging screw terminals on the terminating device **60**, or as shown, inserted into openings on the terminating device **60** to engage the IDC. Subscriber wiring **92**, such as a conventional twisted wire pair, from subscriber cable **90** is then connected to the corresponding terminating device **60** so that an electrical connection is made between the subscriber wiring **92** and the electrical component on the PCB **52**.

[0035] Because certain electrical components are generally susceptible to electromagnetic interference (EMI), the back side of cover **50** desirably may be shielded against EMI, thereby minimizing or eliminating a source of electrical noise on the subscriber wiring **92**. Such EMI shielding may be provided by locating a metallic shield between cover **50** and PCB **52**. The EMI shield may be in the form of a metallic plate, or may be in the form of a suitable EMI mitigating coating which is applied directly to the back side of cover **50**.

[0036] NID **20**, as best shown in FIG. 2, further comprises a second base **62** for storing an excess length of the network fiber optic drop cable **86**, referred to herein as drop cable slack (not shown). The second base **62** is movably attached to first base **22**, such as by hinges **64**, so that the drop cable slack may accessed without disturbing the optical and electrical connections in connections area **58**. Preferably, hinges **64** are located along the lower edge of second base **62** so that first base **22** may be rotated downwardly about the hinges **64** as shown, thereby providing access to the interior of second base **62**.

[0037] Second base **62** comprises floor **66** and continuous sidewall **68** extending upwardly from the floor **66**. Together, floor **66** and sidewall **68** define inner compartment **70** within NID **20** for storing the drop cable slack. Second base **62** may also include retaining members **72** for retaining the drop cable slack in a desired configuration, for example a plurality of stacked coils of the drop cable slack. Retaining members **72** may be removable to facilitate coiling or otherwise positioning the drop cable slack within inner compartment **70**. As depicted in FIG. 2, retaining members **72** may, for example, be fitted into slotted receiving portions **74** medially along the inside surface of sidewall **68**, and retained by a friction fit, an adhesive, or other methods known in the art. Floor **66** preferably includes slotted openings **76**, also shown in FIG. 3, for mounting NID **20**, for example to a wall of a structure, using conventional screws. However, the method for mounting NID **20** should not be construed as limiting the invention and NID **20** may be mounted by any other conventional methods known in the art.

[0038] Sidewall 68 preferably includes at least one drop cable entry port 80 and at least one drop cable exit port 82. Preferably, drop cable entry ports 80 are located both at the top right-hand side of the second base 62 and at the bottom left-hand side of the second base 62 when NID 20 is mounted on a vertical surface, such as a wall of a structure. Drop cable exit port 82 as depicted in FIGS. 2 and 3, is preferably located at the bottom right-hand side of the second base 62 opposite the entry port 80 located on the top right-hand side of sidewall 68. In this manner, a drop cable 86 may be routed into the second base 62 from above through the top right-hand side cable entry port 80 or from below through the bottom left-hand side cable entry port 80. Regardless, the drop cable slack is coiled in a clockwise manner within the inner compartment 70 under retaining members 72 and routed out of the second base 62 through exit port 82 and into first base 22 through drop cable entry port 42. In this manner, an arcuate drip loop may be formed in drop cable 86 below the NID 20 to prevent moisture from entering the outer compartment 28 through drop cable entry port 42. However, the drop cable entry ports 80 and the drop cable exit port 82 may be positioned at any convenient location along sidewall 68. Positioning exit port 82 along the bottom of second base 62, however, advantageously provides an opening for draining moisture (such as rain or melted snow) from the inner compartment 70. Furthermore, entry ports 80 and exit port 82 may each be fitted with a removable grommet or penetrable seal 84 to prevent contaminants, such as moisture, dirt, or infestations, from entering second base 62.

[0039] Second base 62 is particularly useful when a standard length of a pre-connectorized network drop cable 86 is used to reduce field labor costs. In the event that a customized length of a pre-connectorized network drop cable 86 is utilized, or the drop cable 86 is cut to length and connectorized or spliced in the field, second base 62 may be optionally detached from first base 22 at hinges 64 and NID 20, comprising only first base 22, may thereafter be mounted, for example to a wall of a structure, via mounting feet 88 (FIG. 2).

[0040] Network drop cable 86 comprises a relatively flexible jacket made of a weatherproof material, such as plastic, for protecting at least one, and preferably at least a pair, of optical fibers. Typically, the jacket of drop cable 86 encases at least one optical fiber contained within a transport tube 87 for protection. As previously described, the drop cable 86 is routed into second base 62 of NID 20 through a drop cable entry port 80. A slack length of the drop cable 86 may be coiled within inner compartment 70 under retaining members 72, or the retaining members 72 may be positioned on the sidewall 68

of the second base 62 after the drop cable slack has been coiled if the retaining members 72 are removable. Typically, the end of the drop cable 86 is then routed out of the second base 62 through cable exit port 82 and into outer compartment 28 of first base 22 through cable entry port 42. Optionally, optical fibers of the drop cable 86 to be used initially are separated from optical fibers that are to be stored within cavity 70 and used later if the subscriber requires additional fiber optic communications service. Unused, or "dark," optical fibers may be stored as bare optical fiber or in transport tubes within inner compartment 70 along with the slack length of drop cable 86.

[0041] Subscriber cable 90 is an optical, electrical or coaxial cable leading from an indoor outlet in a subscriber premises. As shown herein, subscriber cable 90 comprises a relatively flexible jacket made of a weatherproof material, such as plastic, for protecting at least one, and preferably at least a pair, of electrical wires, such as a twisted wire pair. The subscriber cable 90 enters first base 22 of NID 20 through entry port 44 and individual subscriber wires 92 are broken out from the cable jacket within outer compartment 28 and routed directly to a terminating device 60. A fiber optic pigtail 91 is connected to one end of connection 54 opposite the connectorized optical fiber(s) of the drop cable 86 contained within transport tube 87. Alternatively, in the event that drop cable 86 is not connectorized, the optical fiber(s) of the drop cable 86 may be spliced by a conventional method, such as with a mechanical or fusion splice within splice tray or splice holder 59, to un-connectorized optical fiber(s) of the fiber optic pigtail 91. In either event the fiber optic pigtail 91 is routed into components area 48 and optically connected to an optical component on PCB 52. Similarly, jumper wires 93 are connected to one end of terminating device 60 opposite subscriber wiring 92, routed into components area 48 and electrically connected to an electrical component on PCB 52.

[0042] FIG. 4 shows another exemplary embodiment of a NID 100 in accordance with the present invention. NID 100 includes base 102 comprising floor 104 and continuous sidewall 106 depending upwardly around the periphery of the floor 104. NID 100 further comprises a protective cover 108 movably attached to base 102. The base 102 and the cover 108 may be made of any relatively rigid material, such as sheet metal, but preferably are made of a molded plastic, such as PVC, polyethylene, or polypropylene. Cover 108 may be movably attached to base 102 in any suitable manner, but preferably is movably attached to base 102 by one or more hinges 110 located along one side of the base 102 and the cover 108 such that cover 108 pivots about hinges 110 between a closed position and an opened position to provide access to the interior of the NID 100.

[0043] As shown, base 102 is provided with slots 112 and cover 108 is provided with snaps 114 that are received within slots 112 to secure cover 108 on base 102 in the closed position. Base 102 and cover 108 may also be provided with means 116 opposite the hinges 110 for locking cover 108 on base 102. For example, means 116 may comprise locking screw 40 that requires an industry specific tool to remove. Alternatively, means 116 may comprise aligned openings through base 102 and cover 108 that receive a combination or key lock (not shown) belonging to the subscriber. Base 102 may be mounted, for example to a wall of a structure, by way of feet 120 provided on base 102. Alternatively, NID 100 may comprise one or more slotted holes (not shown) through floor 104 for mounting NID 100 to a wall at the subscriber premises using conventional screws.

[0044] At least one drop cable entry port 122 is in communication with connections area 124 of base 102 to permit a network drop cable (not shown) to be routed into NID 100. NID 100 may be provided with any convenient number of drop cable entry ports 122. Preferably, however, the NID 100 is provided with at least one entry port 122 for receiving a network drop cable, as described hereinabove, from a fiber optic communications network. Entry port 122 may be provided with a removable grommet or penetrable seal (not shown) to prevent contaminants, such as moisture, dirt, or infestations, from entering the NID 100 when entry port 122 is not in use. When in use, entry port 122 may also be sealed with a gel or grease around the fiber optic drop cable in a known manner to prevent contaminants from entering NID 100. As shown and described herein, entry port 122 is located adjacent the hinged side of base 102 and cover 108. However, entry port 122 may be located at any convenient location along the sidewall 106 of base 102. Base 102 further comprises at least one subscriber cable entry port 128 along sidewall 106 to permit a subscriber cable (not shown) to be routed into connections area 124 of NID 100, as previously described.

[0045] As shown in FIG. 4, NID 100 further comprises connections and components panel 130 positioned within base 102. Panel 130 is shaped, sized, and configured to be removably mounted within base 102. Additionally, connections and components panel 130 may be hinged such that panel 130 can be rotated outwardly from base 102 about hinges (not shown), thereby providing access to the portion of base 102 behind panel 130, hereinafter referred to as components area 132. Standoffs 134 positioned within components area 132, and preferably along the inside surface of sidewall 106, operate to position the panel 130 at a fixed elevation above floor 104. Once positioned, panel 130 is

secured within base **102** by conventional fasteners such as snap locks, screws, rivets, or the like. As such, panel **130** comprises a first compartment in base **102** that defines connections area **124** located on the outer side of panel **130**, and a second compartment in base **102** that defines components area **132** located on the inner side of panel **130** (i.e. between floor **104** and the connections and components panel **130**). Connections area **124** and components area **132** may be shaped, sized, and located within base **102** in any suitable manner, but are intentionally located on separate elevations with respect to floor **104** in a stacked or layered configuration. OEMs may provide, for example, the previously shown and described printed circuit board PCB **52** mounted within components area **132**. Components area **132** may be configured for mounting the PCB **52** on floor **104** or above floor **104**, such as by mounting the PCB **52** to floor **104** via standoffs. Similarly, PCB **52** may be mounted on the inner side of panel **130** (i.e. the side of panel **130** facing components area **132**) or below panel **130** via standoffs. Components area **132** may contain active components, passive components, or both active and passive components, and such components may be located and configured on the PCB **52** as desired by the OEM in the manner previously described.

[0046] As shown and described herein, connections area **124** includes fiber optic connection **54** mounted to the outer side of panel **130** on a mounting bracket **56** for optically connecting one or more optical fibers of the network fiber optic drop cable with one or more optical fibers within the NID **100**. If connection **54** is a connector adapter sleeve or receptacle, the optical fiber(s) of the drop cable are preferably pre-connectorized, and the pre-connectorized drop cable is received within one end of the connection **54**. At least one connectorized fiber optic pigtail may then be received within the other end of the connection **54** and optically aligned with a corresponding optical fiber on the drop cable. The fiber optic pigtail may then be routed into the components area **132** through an opening in the panel **130**, identified in FIG. 4 by panel port **136**. The fiber optic pigtail is then optically and physically connected to an optical component within components area **132**, such as an optical-to-electrical converter. Panel port **136** may be located at any convenient location on the panel **130**. Alternatively, if the optical fibers of the drop cable are not connectorized, connections area **124** may further include a conventional splice tray and/or splice holder **59** for housing one or more splices between the optical fiber(s) of the drop cable and optical fiber(s) spliced thereto by conventional methods as are known in the art, such as by mechanical or fusion splicing.

[0047] Terminating devices 60, such as conventional insulation displacement connectors (IDCs) shown in FIG. 4 may be mounted on panel 130. Preferably, terminating devices 60 are removably mounted onto panel 130, such as by the use of conventional slots that engage with feet provided on the terminating devices 60. Alternatively, panel 130 may contain an opening indicated by dashed line 138 in FIG. 4 through which terminating devices 60 mounted on PCB 52 protrude through panel 130 from the components area 132 into the connections area 124. Additional openings 140 may be formed through panel 130 into which OEM-provided connector receptacles or jacks (not shown), such as modular RJ-11 or RJ-45 jacks, may be inserted to receive corresponding plugs from subscriber communications equipment or line testing equipment, such as a conventional handset. The OEM-provided connector receptacles or jacks may be mounted on the outer side of the PCB 52 so that they protrude outwardly through openings 140 when the PCB 52 is mounted within components area 132 of NID 100 and panel 130 is in its fully installed position inside base 102 abutting standoffs 134. The OEM-provided connector receptacles or jacks are electrically connected to an electrical component on the PCB 52 via jumper wires. Alternatively, the jumper wires may be connected between the PCB 52 and one end of a terminating device 60. The subscriber wiring is then connected to the other end of the terminating device 60, as previously described, to electrically connect the subscriber wiring to an electrical component, such as an electrical-to-optical converter, on the PCB 52. For example, the jumper wires may be terminated at the end opposite the terminating device 60 with an appropriate modular plug, such as an OEM-provided RJ-11 plug, which is in turn attached to and electrically connected with an electrical component on the PCB 52.

[0048] Components area 132 may be shielded against EMI by locating a suitable shield between panel 130 and PCB 52. The EMI shield may be in the form of a metallic plate, or it may be in the form of a suitable EMI mitigating coating which may be applied directly to the back (i.e. inner) side of panel 130.

[0049] As previously described, connections area 124 is located at a first elevation within base 102 on the front (i.e. outer) side of panel 130. Components area 132, on the other hand, is located at a second elevation within base 102 that is different than the first elevation. In particular, components area 132 is located between floor 104 of base 102 and the back (i.e. inner) side of panel 130. Thus, base 102 is divided by panel 130 into a first, outer compartment and a second, inner compartment bordered by sidewall 106.

[0050] The network drop cable may be strain relieved as it enters connections area **124** of base **102**. As shown herein, drop cable entry port **122** comprises a strain relief bracket **142** for strain relieving the drop cable with a clamping device (not shown), such as a cable tie. Similarly, subscriber cable entry port **128** is comprises a strain relief bracket **142** for strain relieving the subscriber cable as it enters the connections area **124**.

Furthermore, NID **100** may optionally comprise second base **62**, as previously shown and described with respect to the embodiment of FIGS. 1-3, for storing drop cable slack.

When so configured, base **102** is movably attached to second base **62**, for example by hinges **64**, to provide access to the drop cable slack without disturbing the optical and electrical connections within base **102**, and second base **62** is secured, for example, to a wall at the subscriber premises.

[0051] FIGS. 5-9 show another exemplary embodiment of a NID according to the present invention, indicated generally by reference numeral **200**. NID **200** includes base **202** comprising floor **204** and a continuous first sidewall **206** depending upwardly from the floor **204** within base **202**. Together, floor **204** and first sidewall **206** define a first, inner compartment **208**. A second, continuous sidewall **210** depends upwardly from the floor along the outer periphery of the floor **204**. The area within the base **202** above floor **204** and between the first sidewall **206** and the second sidewall **210** defines a second, outer compartment **212** disposed about the periphery of the first (i.e. inner) compartment **208**.

[0052] NID **200** further comprises a protective outer cover **214** movably attached to base **202**. Base **202** and cover **214** may be made of any relatively rigid material, such as sheet metal, but preferably are made of a molded plastic, such as PVC, polyethylene, or polypropylene. Outer cover **214** is movable between an opened position, as shown in FIG. 5, and a closed position, as shown in FIG. 6. Cover **214** may be movably attached to base **202** in any suitable manner, but preferably is attached to base **202** by one or more hinges **216** located along one side of base **202** and cover **214**. Accordingly, cover **214** pivots about hinges **216** between the closed position and the opened position to provide access to the interior of NID **200**. A lip **215** is disposed about the periphery of cover **214** and depends inwardly in the direction of base **202**. Lip **215** may include a channel (not shown) which extends substantially around the periphery of outer cover **214**. Second sidewall **210** preferably abuts lip **215** when cover **214** is in the closed position, and serves as a barrier to the ingress of liquid, such as water, into NID **200**. If a channel is provided on lip **215**, second sidewall **210** engages within the channel to form a mechanical seal. The channel may optionally include an elastic sealing material, such as a rubber gasket,

for improving the seal between cover **214** and base **202**. Cover **214** may further include a ridge **219** depending inwardly from the interior surface of outer cover **214**. Ridge **219** preferably abuts first sidewall **206** when cover **214** is in the closed position, and provides an additional barrier to the ingress of liquid into first compartment **208**. Ridge **219** may optionally include a channel and/or gasket in the manner previously described for lip **215**. [0053] As shown, base **202** is provided with slots **218** and cover **214** is provided with snaps **220** that are received within slots **218** to secure cover **214** on base **202** in the closed position. Base **202** and cover **214** may also be provided with means **222** opposite hinges **216** for locking cover **214** on base **202**. For example, means **222** may comprise locking screw **40** (FIG. 6) that requires an industry specific tool to remove. Alternatively, means **222** may comprise aligned openings through base **202** and cover **214** that receive a combination or key lock (not shown) belonging to the subscriber. Base **202** may further comprise one or more mounting points **224** (FIG. 7), such as slotted holes or sockets for mounting NID **200** in a known manner to a wall at the subscriber premises using conventional screws. Alternatively, NID **200** may be mounted by way of feet (not shown) provided on base **202**. Typically, NID **200** is mounted in a location having restricted access, such as a utility closet inside a subscriber premises. Alternatively, NID **200** may be mounted outside the subscriber premises and cover **214** locked on base **202**, as described hereinabove, to thereby prevent unauthorized access to the connections and components housed within the NID **200**.

[0054] As described, second (i.e. outer) compartment **212** preferably is provided with arcuate inner walls **226** for coiling an excess length of a network fiber optic drop cable containing one or more optical fibers without exceeding the minimum bend radius of the optical fibers and without creating kinks or tight bends which may interfere with the performance of the optical fibers. Preferably, the drop cable slack is coiled loosely between arcuate walls **226** and second sidewall **210**. The second compartment **212** may also be provided with retaining members **72** for retaining the drop cable slack within the second compartment **212** in a desired configuration. Retaining members **72** may be removable to facilitate coiling or otherwise positioning the drop cable slack in second compartment **212**. As best shown in FIG. 9, retaining members **72** may, for example, be fitted into slotted receiving portions **74** along the inside surface of second sidewall **210**, and retained by a friction fit, an adhesive, or other methods known in the art.

[0055] As shown, second sidewall **210** extends upwardly from floor **204** a greater distance along the bottom of NID **200**. Accordingly, cover **214** has a corresponding

recess **228** formed therein to accommodate the extension of second sidewall **210** and at least one drop cable entry port **230**. The drop cable entry port **230** is in communication with second compartment **212** to permit a network fiber optic drop cable, as described hereinabove, to be routed into NID **200**. NID **200** may be provided with any convenient number of entry ports **230**, but typically is provided with only one entry port **230** for receiving a single drop cable containing one or more optical fibers from an optical communications network. Entry port **230** may be provided with a removable grommet or penetrable seal **232** (FIG. 8) to prevent contaminants, such as moisture, dirt, or infestations, from entering the NID **200** when entry port **230** is not in use. When in use, entry port **230** may also be sealed with a gel or grease around the fiber optic drop cable in a known manner to prevent contaminants from entering NID **200**. As shown and described herein, drop cable entry port **230** is located adjacent the hinged side of base **202** and cover **214**. However, entry port **230** may be located at any convenient location along second sidewall **210** as long as the entry port **230** remains in communication with second compartment **212**.

[0056] As best shown in FIGS. 6-8, base **202** further comprises at least one passageway **234** through floor **204** of base **202** and in communication with first compartment **208**, but not in communication with second compartment **212**, for receiving a subscriber cable. Passageway **234** provides a means by which a subscriber cable may enter NID **200** and be routed into first compartment **208** without passing through second compartment **212**.

Advantageously, passageway **234** extends beneath any drop cable slack which may be stored in second compartment **212**, thereby permitting the drop cable slack to be removed from the base **202** of NID **200** without disturbing any subscriber cables routed through passageway **234** and connected within NID **200**. Preferably, base **202** comprises a plurality of passageways **234**. As shown, passageways **234** are located along the bottom first sidewall **206** and second sidewall **210** opposite hinges **216**. However, passageways **234** may be located at any convenient location along the sidewalls **206**, **210** as long as each passageway **234** remains in communication with first compartment **208** within base **202**.

[0057] As described above, base **202** and first sidewall **206** define first compartment **208** for housing optical, electrical and/or coaxial connections and components within NID **200**. As best shown in FIG. 9, a removable connections and components panel **236** is positioned within first compartment **208**. Panel **236** is shaped, sized, and configured to be movably attached to the floor **204** or to an interior surface of first sidewall **206**.

Preferably, panel **236** is hinged to the floor **204** or first sidewall **206** such that panel **236** may swing outwardly from first compartment **208** by rotating about the hinges, thereby providing access to that portion of first compartment **208** on the back (i.e. inner) side and behind panel **236**, hereinafter referred to as components area **238**. A plurality of standoffs **240** are provided within components area **238**, preferably about the interior surface of first sidewall **206**, to position panel **236** at a fixed elevation above floor **204**. Once positioned and secured within first compartment **208** by conventional fasteners, such as snap locks, screws, rivets, or the like, panel **236** defines connections area **242** located on the front (i.e. outer) side and above panel **236**. Accordingly, panel **236** separates first compartment **208** into a connections area **242** between panel **236** and outer cover **214** and a components area **238** between panel **236** and floor **204**. Connections area **242** and components area **238** may be shaped and sized within first compartment **208** in any desirable manner, but preferably are positioned at different elevations with respect to floor **204** in a stacked or layered configuration. OEMs may provide, for example, PCB **52** previously shown and described mounted within components area **238**. Components area **238** may be configured for mounting PCB **52** to floor **204** or above floor **204** via standoffs, or PCB **52** may be similarly mounted to the back side of panel **236** (i.e. the side of panel **236** facing components area **238**). First sidewall **206** preferably comprises at least one entry port **244** for routing one or more optical fibers of the network drop cable into first compartment **208**, and more particularly into connections area **242**. Entry port **244** may be provided with a removable grommet or penetrable seal **246**, as shown in FIG. 5, to prevent contaminants, such as moisture, dirt, or infestations, from entering first compartment **208** when entry port **244** is not in use. When in use, entry port **244** may also be sealed with a gel or grease around the fiber optic cable or transport tube containing the optical fiber(s) of the drop cable in a known manner to prevent contaminants from entering the NID **200**.

[0058] As shown and described herein, connections area **242** may include fiber optic connection **54** mounted to the front (i.e. outer) side of panel **236** on mounting bracket **56** for connecting the optical fiber(s) of the drop cable with one or more optical fibers of fiber optic pigtails, as previously described. Fiber optic connection **54** may, for example, be a connector adapter sleeve or receptacle (such as the OptiTap™ fiber optic receptacle available from Corning Cable Systems LLC of Hickory, North Carolina) by which the fiber optic pigtail(s) are optically connected to the optical fiber(s) of the drop cable. If a connector adapter sleeve or receptacle is used, the optical fiber(s) of the drop cable are

preferably pre-connectorized and the connector(s) received within one end of the adapter connector sleeve or receptacle. At least one connectorized pigtail is then received within the other end of the connector adapter sleeve or receptacle and optically aligned with a corresponding optical fiber of the drop cable. The fiber optic pigtail is then routed from the connection 54 to the components area through panel port 248. Panel port 248 may be located at any convenient location on the panel 236. Alternatively, if the optical fiber(s) of the drop cable are not connectorized, connections area 242 may optionally include a conventional splice tray and/or splice holder 59 for holding one or more splices between the optical fiber(s) of the drop cable and the fiber optic pigtails spliced thereto by conventional methods well known in the art, such as by mechanical or fusion splicing.

[0059] Snap members 250 on the front surface of panel 236 provide mounting locations for terminating devices 60 previously shown and described, such as conventional insulation displacement connectors (IDCs). Grooves 252 formed in the outer surface of panel 236 may be used to accommodate electrical wires from a subscriber cable which may be connected to the terminating devices. Alternatively, panel 236 may contain one or more openings 256 through which PCB-mounted terminating devices may protrude from the PCB 52 through panel 236 from components area 238 into connections area 242. Additional openings 256 may be formed through panel 236 into which OEM-provided connector receptacles or jacks (not shown), such as modular RJ-11 or RJ-45 jacks, may be inserted to receive corresponding plugs from subscriber communications equipment or line testing equipment, such as a conventional handset. The OEM-provided connector receptacles or jacks may be mounted on the outer side of the PCB 52 so that they protrude outwardly through openings 256 when the PCB 52 is mounted within components area 238 of NID 200 and panel 236 is in its fully installed position inside first sidewall 206 of base 202 abutting standoffs 240. The OEM-provided connector receptacles or jacks are electrically connected to an electrical component on the PCB 52 via jumper wires. Alternatively, the jumper wires may be connected between the PCB 52 and one end of a terminating device 60. The subscriber wiring is then connected to the other end of the terminating device 60, as previously described, to electrically connect the subscriber wiring to an electrical component, such as an electrical-to-optical converter, on the PCB 52. For example, the jumper wires may be terminated at the end opposite the terminating device 60 with an appropriate modular plug, such as an OEM-provided RJ-11 plug, which is in turn attached to and electrically connected with an electrical component on the PCB 52.

[0060] Panel 236 may further include subscriber cable access opening 258 to provide access to passageways 234 which open into first compartment 208. Thus, subscriber wiring routed into NID 200 passes through at least one passageway 234 and enters connections area 242 through access opening 258. The passageway 234 may be fitted with a removable grommet or penetrable seal adjacent access opening 258 to prevent contaminants, such as moisture, dirt, or infestations, from entering first compartment 208.

[0061] As electrical components may be susceptible to electromagnetic interference (EMI), the back (i.e. inner) side of panel 236 desirably may be shielded against EMI, thereby minimizing or eliminating a source of electrical noise on the subscriber wiring. Such shielding may be provided by locating a metallic shield between panel 236 and PCB 52. The EMI shield may be in the form of a metallic plate, or it may be in the form of a suitable EMI mitigating coating which may be applied directly to the back side of panel 236.

[0062] As previously described, connections area 242 is located at a first elevation within first compartment 242 of base 202 on the front (i.e. outer) side of panel 236. Components area 238, on the other hand, is located at a second elevation within first compartment 208 of base 202 that is different than the first elevation. In particular, components area 238 is located between floor 204 of base 202 and the back (i.e. inner) side of panel 236. Thus, first compartment 208 is divided by panel 236 into a first, outer connections area 242 and a second, inner components area 238 bordered by first sidewall 206.

[0063] Second compartment 212 manages the drop cable that enters the NID 200 through drop cable entry port 230. If desired, the drop cable may be strain relieved as it enters second compartment 212. As shown herein, entry port 230 comprises a strain relief bracket 260 for strain relieving the drop cable with a clamping device (not shown), such as a cable tie. In addition, an excess length of the drop cable may be stored within the second compartment 212 between arcuate walls 226 and second sidewall 210. As previously described, second compartment 212 further comprises at least one, and preferably a plurality, of retaining members 72 that project into the second compartment 212 for retaining the drop cable slack between the floor 204 and the retaining members 72.

[0064] Connections area 242 further manages the optical fiber(s) of the drop cable that enter the first compartment 208 of NID 200 through entry port 244. Connections area 242 is accessible to both the service provider and the subscriber and serves as the mandatory demarcation point for the optical, electrical and/or coaxial connections

between the network and the subscriber wiring. In particular, the optical fiber(s) of the drop cable are first connectorized (and preferably, pre-connectorized) and then optically connected through connection **54** to connectorized fiber optic pigtail(s). The fiber optic pigtail(s) are then routed through panel opening **248** to PCB **52** and optically connected to an optical component in the components area **238**, such as an optical-to-electrical converter to convert the optical signals to electrical signals. Similarly, a subscriber cable containing subscriber wiring is first routed through passageway **234** into connections area **242** and the subscriber wiring (e.g. a twisted wire pair) is connected to one side of a terminating device **60**, such as an IDC. Jumper wires having a modular connector or plug on one end may then be connected to the other side of the terminating device **60**. The modular connector or plug is then connected to an electrical component on the PCB **52**, such as an electrical-to-optical converter within components area **242** to electrically connect the subscriber wiring to the PCB **52**. Alternatively, the subscriber wiring may be provided with a modular connector or plug that is received within modular receptacle or jack **256** protruding through panel **236** and mounted directly to PCB **52**.

[0065] An excess length of the drop cable may be coiled within second compartment **212** in a clockwise direction under retaining members **72**, or the retaining members **72** may be positioned over the second compartment **212** after the drop cable slack has been coiled therein in the event that the retaining members **72** are removable. If desired, optical fibers to be used initially may be separated from optical fibers that are to be stored within second compartment **212** and used later when the subscriber requires additional communications services. The unused, or "dark," optical fibers (not shown) may be stored as bare fiber or in transport tubes within second compartment **212** along with the drop cable slack.

[0066] FIGS. 10-15 show various examples of another exemplary embodiment of a NID **300** according to the present invention. NID **300** includes base **302**, protective outer cover **320**, and a connections and/or components panel **330**. Base **302** comprises a floor **304** (FIG. 13 and FIG. 15) and a continuous sidewall **306** depending upwardly around the periphery of the floor **304**. As previously described, outer cover **320** is movably attached to base **304** between a closed position and an opened position shown in FIGS. 10-15. Preferably, hinges **310** are provided along one side of base **302** and outer cover **320** such that the outer cover **320** rotates about the hinges **310** between the closed position and the opened position. Means **316** are provided for securing the outer cover **320** on the base **302** in the closed position. As is well known, means **316** may comprise aligned openings

in the outer cover 320 and the base 302 for receiving a subscriber combination or key lock and a security screw 40 that requires an industry specific tool to remove. The security screw 40 permits the service provider to override the subscriber lock and thereby gain access to the interior of the NID 300 for repair or to reconfigure the connections within the NID 300 without requiring the subscriber to remove the subscriber lock. Base 302 may also comprise feet 308 for mounting NID 300 to a wall at a subscriber premises. As shown, at least one network drop cable entry port 322 and at least one subscriber cable entry port 324 are provided along the lower edge of sidewall 306. Each such entry port 322, 324 may be formed by a removable grommet or penetrable seal 326, as previously described, to permit a network fiber optic drop cable and a subscriber cable, respectively, to enter the NID 300.

[0067] In each of the examples, the connections and components panel 330 is removably mounted within the interior of the NID 300 and thereby interchangeable with another panel 330 having a different configuration. In this manner, the service provider can initially install an empty NID 300, for example during construction of the subscriber premises, and subsequently install a connections and components panel 330 having a suitable configuration when the subscriber orders communications services. For example, the communication network may only support copper subscriber wiring or the subscriber may initially order only plain old telephone service (POTS). Accordingly, the service provider will install a removable and interchangeable connections and components panel 330 having a configuration suitable for both copper network wiring and copper subscriber wiring. Alternatively, the communications network may also support coaxial transmissions and the subscriber may desire both POTS and video services. Accordingly, the service provider will remove and replace the copper connections and components panel 330 with a different connections and components panel 330 configured for high-speed copper/coaxial voice and video transmissions. Later, the service provider may upgrade the network to a fiber optic communications network and the subscriber may desire voice, video and data services. Accordingly, the service provider will remove and replace the copper/coaxial connections and components panel 330 with a different connections and components panel 330 configured for high-speed voice, video and data transmissions. As such, the service provider can reduce or delay materials and field labor costs by utilizing the same NID 300 regardless of the type of communications network or the services desired by the subscriber. As a result, the service provider can readily

upgrade the panel 330 as the transmission technology changes, or can customize subscriber installations to minimize equipment costs.

[0068] Connections and components panel 330 may be removably mounted within the interior of NID 300 in any suitable manner. Preferably, however, panel 330 is rotatably and detachably mounted to the lower edge of floor 304 or sidewall 306 such that panel 330 rotates between a closed position and an opened position. In the closed position, the panel 330 separates the interior of the NID 300 into a first (i.e. outer) compartment 340 and a second (i.e. inner) compartment 350. The first compartment 340 is defined by the area of base 302 within sidewall 306 and above panel 330. The second compartment 350 is defined by the area of base 302 within sidewall 306 and below panel 330 (i.e. the area between floor 304 and the inner surface of panel 330). As described hereinabove, the first compartment 340 comprises a connections area 342 for accommodating optical, electrical and or coaxial connections between the network fiber optic drop cable and the subscriber wiring. Similarly, the second compartment 350 comprises a components area 352 for accommodating passive and/or active optical, electrical coaxial components, such as an optical-to-electrical converter (O/E converter), an optical-to-coaxial converter, etc. Panel 330 is preferably supported by a plurality of standoffs 354 along the sidewall 306 of base 302 such that first compartment 340 is positioned at a fixed elevation above the floor 304. Connections area 342 may be shaped and sized within first compartment 340 in any desirable manner and components area 352 may likewise be shaped and sized within second compartment 350 in any desirable manner. Preferably, however, connections area 342 and components area 352 are positioned at different elevations with respect to floor 304 in a stacked or layered configuration. In particular, connections area 342 is positioned at a first elevation above floor 304 and components area 352 is positioned at a second elevation above floor 304 that is different than the first elevation.

[0069] In a first example of the NID 300 shown in FIGS. 10 and 11, connections and components panel 330 comprises at least one terminating device 60 in connections area 342 for connecting subscriber wiring in the form of one or more copper twisted wire pairs from a subscriber cable with network wiring in the form of a copper twisted wire pair from a network electrical drop cable. First compartment 340 further comprises a service provider security shield or door 344, commonly referred to as a "Telco door," disposed over a portion of connections area 342. As shown, door 344 is movably attached to panel 330 by hinges 345 located adjacent sidewall 306 such that door 344 rotates about hinges 345 between a closed position and an opened position. Door 344 is also provided with a

security screw 346 that requires an industry specific tool to remove in the same manner as security screw 40 to prevent unauthorized access to termination equipment belonging to the service provider located on panel 330 beneath door 344. As shown in FIG. 11, connections area 342 further comprises at least one overvoltage surge protector 348, also referred to herein as a station protector, mounted on panel 330 beneath door 344. As is known, network wiring in the form of at least one copper twisted wire pair from a network electrical drop cable is routed through cable entry port 322 into connections area 342 beneath door 344 and electrically connected to a grounded station protector 348. Jumper wires are then routed from the station protector 348 to the corresponding terminating device 60 to electrically connect the network wiring to the subscriber wiring. As such, panel 330 provides termination equipment and electrical connections for a conventional copper communications network.

[0070] In a second example of the NID 300 shown in FIGS. 12 and 13, connections and components panel 330 again comprises at least one terminating device 60 in connections area 342 for connecting one or more copper twisted wire pairs from a subscriber cable with a copper twisted wire pair from a network electrical drop cable. The NID 300 in FIGS. 12 and 13 is identical to the NID 300 in FIGS. 10 and 11 except as described hereinafter. In particular, first compartment 340 further comprises a stepped cover 343 disposed over a portion of connections area 342 in place of the service provider Telco door 344 described in the previous example. Similar to door 344, stepped cover 343 is likewise provided with a security screw 346 (FIG. 13) that requires an industry specific tool to remove, and thereby prevents unauthorized access to termination equipment belonging to the service provider located beneath panel 330 in second compartment 350. As shown in FIG. 13, components area 352 comprises at least one station protector 348, mounted on the back (i.e. inner) side of panel 330 beneath stepped cover 343. As will be readily appreciated by those skilled in the art, the station protector(s) 348 may also be mounted on the floor 304 of the NID 300, or if the NID 300 has sufficient depth, on the back (i.e. inner) side of panel 330 opposite the terminating device(s) 60. Obviously, NID 300 may be configured in any desirable manner as long as station protectors 348 are located in the components area 352, and only the service provider has access to the components area 352. For example, panel 330 could be formed in halves with only the stepped cover 343 portion of panel 330 provided with security screw 348 and rotatable relative to the base 302 of NID 300. As is known, network wiring in the form of at least one copper twisted wire pair from a network electrical drop cable is routed through cable

entry port 322 into components area 352 beneath stepped cover 343 and electrically connected to a grounded station protector 348. Jumper wires are then routed from the station protector 348 to the corresponding terminating device 60 in connections area 342 to electrically connect the network wiring to the subscriber wiring. As such, panel 330 provides termination equipment and electrical connections for a conventional copper communications network.

[0071] In a third example of the NID 300 shown in FIGS. 14 and 15, connections and components panel 330 is configured for a fiber optic communications network instead of a conventional copper communications network. As such, the panel 330 providing termination equipment and electrical connections shown in FIGS. 10 and 11 or FIGS. 12 and 13 is removed and replaced with the panel 330 shown in FIGS. 14 and 15 and described hereinafter. As shown, connections and components panel 330 comprises at least one terminating device 60 in connections area 342 for connecting subscriber wiring in the form of one or more copper twisted wire pairs from a subscriber cable with network wiring in the form of one or more optical fibers of a network fiber optic drop cable. First compartment 340 further comprises fiber optic connection 54 mounted on mounting bracket 56 for receiving a connectorized end of the network fiber optic drop cable through drop cable entry port 322, as previously described. A connectorized fiber optic pigtail (not shown) is connected to the other end of connection 54 and routed into components area 352 within second compartment 350 through panel port 136, as previously described. If desired, any excess length of the fiber optic pigtail may be coiled around and stored on slack storage hub 349. Panel 330 is provided with a security screw 346 (FIG. 15) that requires an industry specific tool to remove, and thereby prevents unauthorized access to termination equipment belonging to the service provider located beneath panel 330 in second compartment 350. The fiber optic pigtail is optically connected to an optical component on a passive or active component, such as the PCB 52 previously described, mounted on the back (i.e. inner) side of panel 330. PCB 52 preferably comprises an optical-to-electrical converter and jumper wires in the form of a copper twisted wire pair are routed from the PCB 52 to the terminating device 60 or the connector jack 140 on the front (i.e. outer) side of panel 330, as previously described. A copper twisted wire pair from a subscriber cable is routed through subscriber cable entry port 324 to the terminating device 60 or connector jack 140 to thereby electrically connect the network wiring to the subscriber wiring, as previously described. As such, panel 330 provides termination equipment and optical and electrical connections for a fiber optic

communications network. Because the connections and components panels **330** shown in FIGS. 10-15 are each removable and interchangeable, the panel **330** shown in FIGS. 14 and 15 may be used to upgrade a conventional copper communications network to a fiber optic communications network or to expand the communications service from voice only to high-speed voice, video and/or data service.

**[0072]** Although preferred embodiments of the invention have been shown and described herein, many modifications and other embodiments of the invention will readily come to mind to one skilled in the art to which this invention pertains, and particularly, to one skilled in the art having the benefit of the teachings presented in the foregoing description and accompanying drawings. Therefore, it is to be understood that the invention is not intended to be limited to the specific embodiments disclosed herein and that further modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

That which is claimed is:

1. A network interface device for providing communications services to a subscriber, the network interface device comprising:

a first base comprising a first floor and a first sidewall that define a first compartment for connecting a network drop cable to a subscriber cable; and

a second base comprising a second floor and a second sidewall that define a second compartment for storing an excess length of the network drop cable, the first compartment being movable relative to the second compartment to provide access to the excess length of network drop cable without disturbing the connections between the network drop cable and the subscriber cable.

2. The network interface device according to claim 1 further comprising a connections and components panel disposed within the first compartment, the panel having an outer side defining a connections area and an inner side defining a components area.

3. The network interface device according to claim 2 wherein the panel is movably disposed within the first compartment between a first position for providing access to the connections area and a second position for providing access to the components area.

4. The network interface device according to claim 3 wherein the panel comprises a security screw for securing the panel to the first base in the first position and thereby prevents unauthorized access to the components area.

5. The network interface device according to claim 2 wherein the network drop cable is a fiber optic cable containing at least one optical fiber and wherein the connections area comprises a fiber optic connection for receiving a connectorized optical fiber of the fiber optic drop cable and a connectorized pigtail that is routed into the components area and optically connected to an optical component disposed within the components area.

6. The network interface device according to claim 5 wherein the optical component is disposed on a printed circuit board (PCB) comprising an optical-to-electrical converter.

7. The network interface device according to claim 2 wherein the subscriber cable is an electrical cable containing at least one twisted wire pair and wherein the connections area comprises at least one terminating device for receiving the twisted wire pair and a pair of jumper wires that are routed into the components area and electrically connected to an electrical component disposed within the components area.
8. The network interface device according to claim 2 wherein the network drop cable is a fiber optic cable containing at least one optical fiber and wherein the connections area comprises a splice tray for receiving the optical fiber of the fiber optic drop cable and an optical fiber pigtail that is routed into the components area and optically connected to an optical component disposed within the components area.
9. The network interface device according to claim 2 wherein the subscriber cable is an electrical cable containing at least one twisted wire pair and wherein the connections area comprises at least one connector jack for receiving the twisted wire pair and a pair of jumper wires that are routed into the components area and electrically connected to an electrical component disposed within the components area.
10. A network interface device according to claim 1 wherein the first base is rotatably mounted to the second base and wherein the first base rotates outwardly relative to the second base to provide access to the excess length of network drop cable.
11. A network interface device for providing communications services to a subscriber, the network interface device comprising:  
  
a base comprising a floor, a first sidewall extending upwardly from the floor to define a first compartment for connecting a network drop cable to a subscriber cable and a second sidewall extending upwardly from the floor to define a second compartment for storing an excess length of the network drop cable, the second compartment being disposed radially outwardly from the first compartment to provide access to the excess length of network drop cable without disturbing the connections between the network drop cable and the subscriber cable.
12. The network interface device according to claim 11 further comprising a connections and components panel disposed within the first compartment, the panel

having an outer side defining a connections area and an inner side defining a components area.

13. The network interface device according to claim 12 wherein the connections area is positioned within the first compartment at a first elevation and the components area is positioned within the first compartment between the connections area and the floor at a second elevation that is different than the first elevation.

14. The network interface device according to claim 12 wherein the panel is movably disposed within the first compartment between a first position for providing access to the connections area and a second position for providing access to the components area.

15. The network interface device according to claim 14 wherein the panel comprises a security screw for securing the panel to the base in the first position and thereby prevents unauthorized access to the components area.

16. A network interface device according to claim 1 further comprising a connections and components panel disposed within the first compartment, the panel being removable and interchangeable between a first panel having a first configuration adapted for use with a first communications services network and a second panel having a second configuration adapted for use with a second communications network.

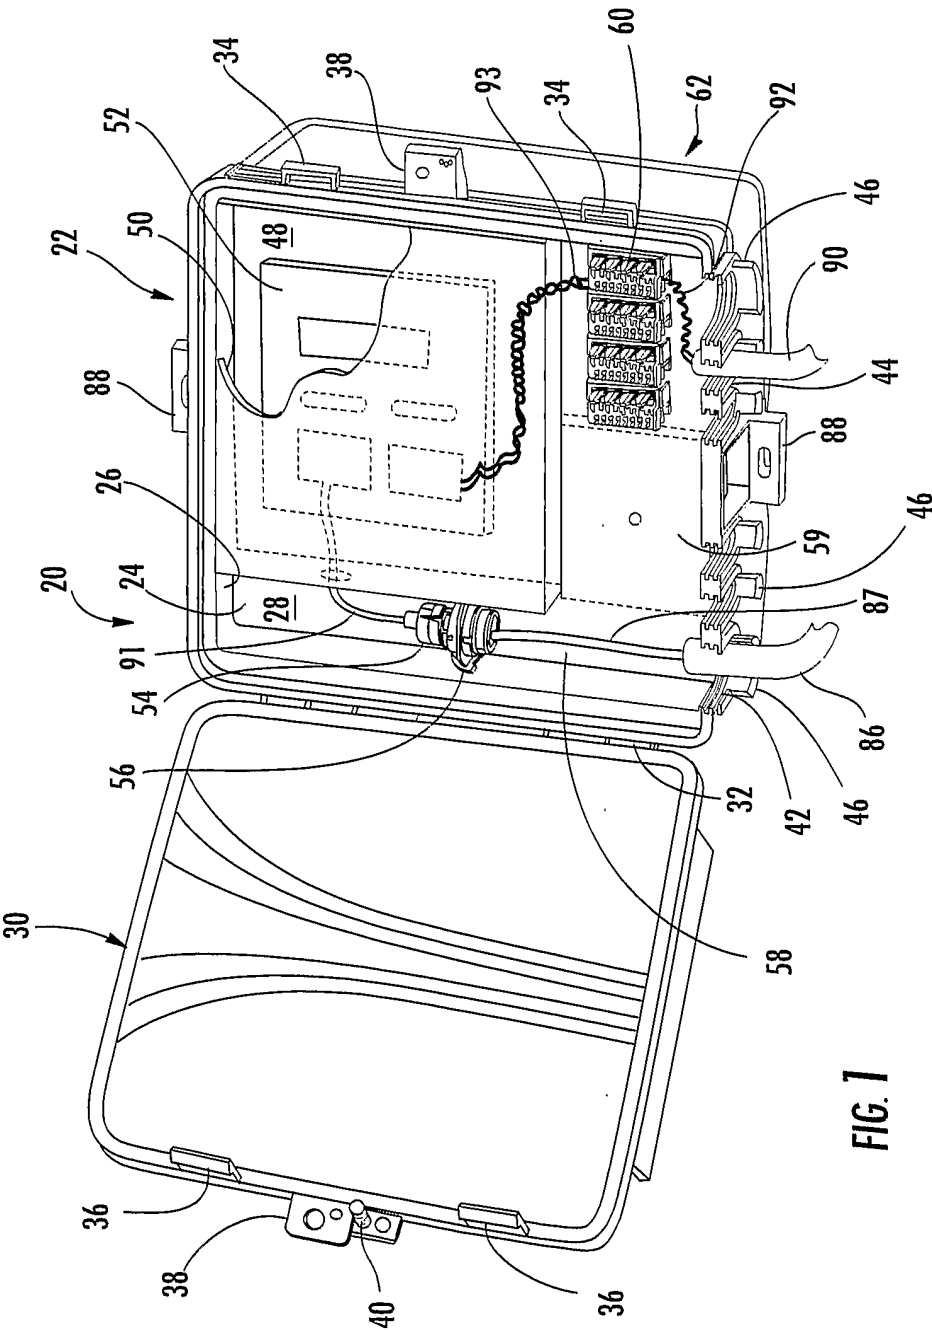


FIG. 1

2/13

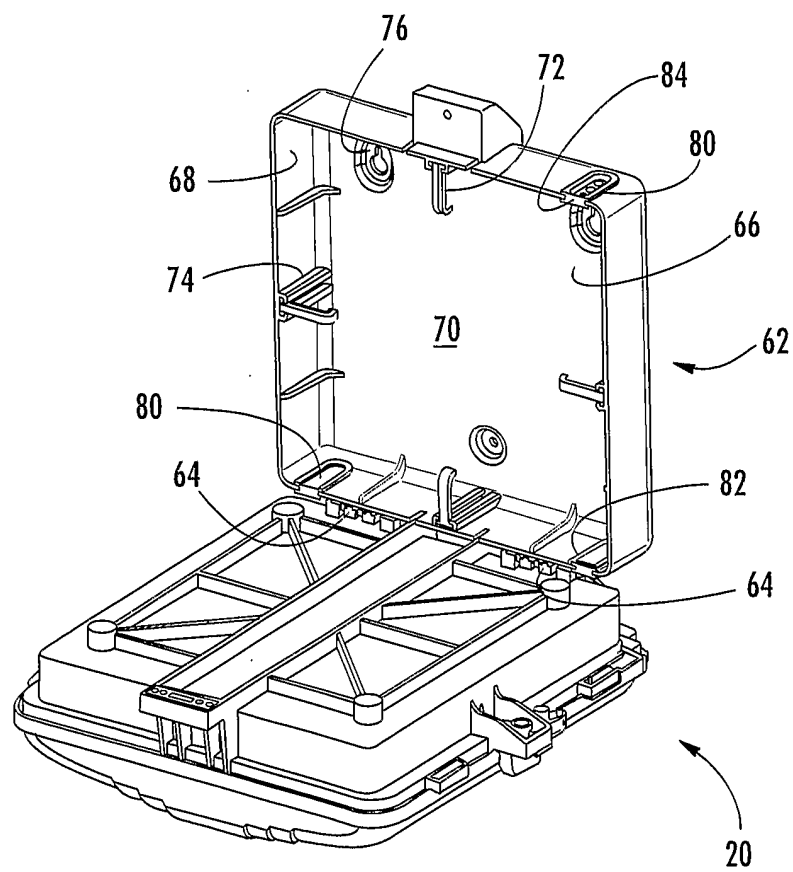


FIG. 2




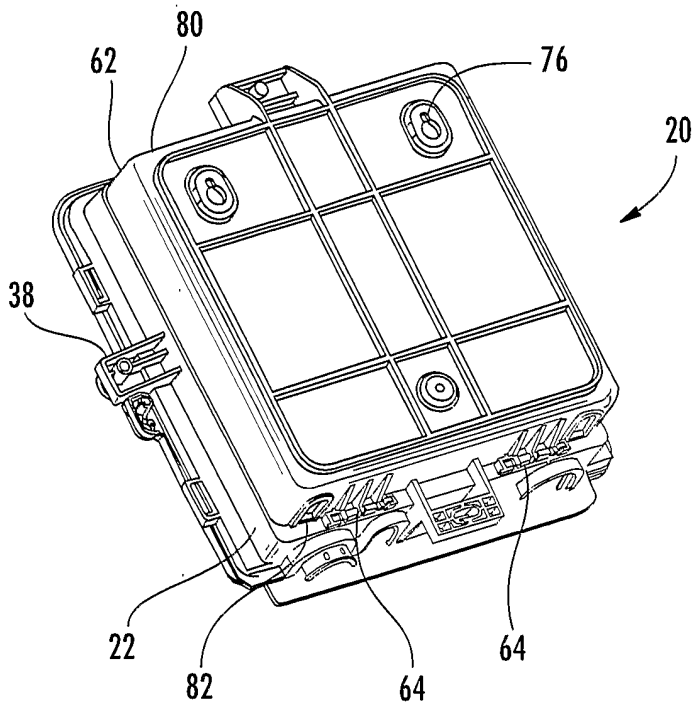


FIG. 3

4/13

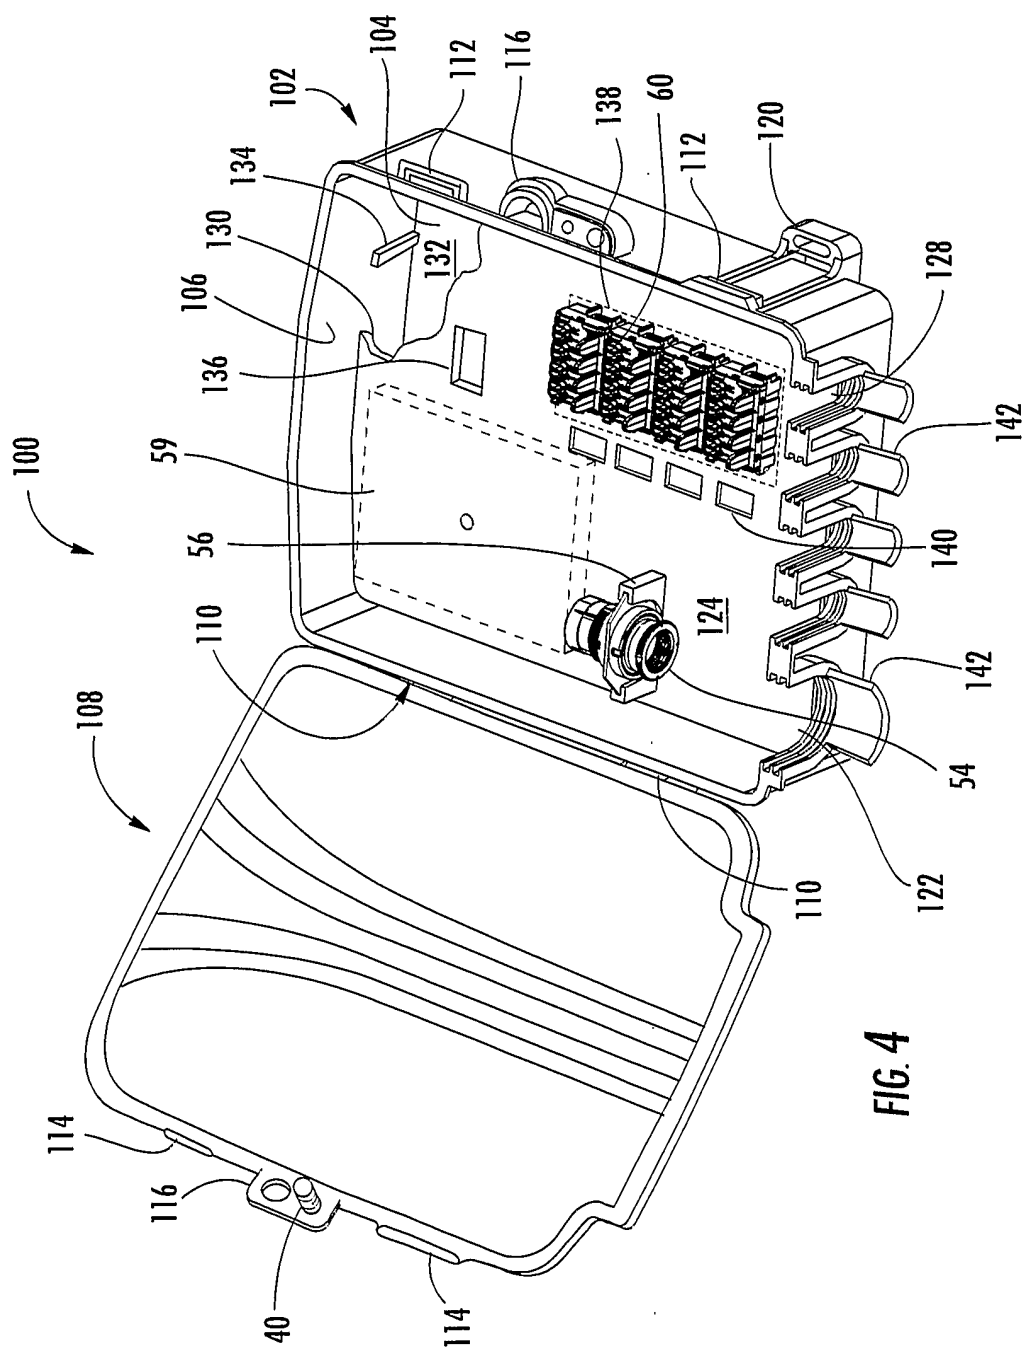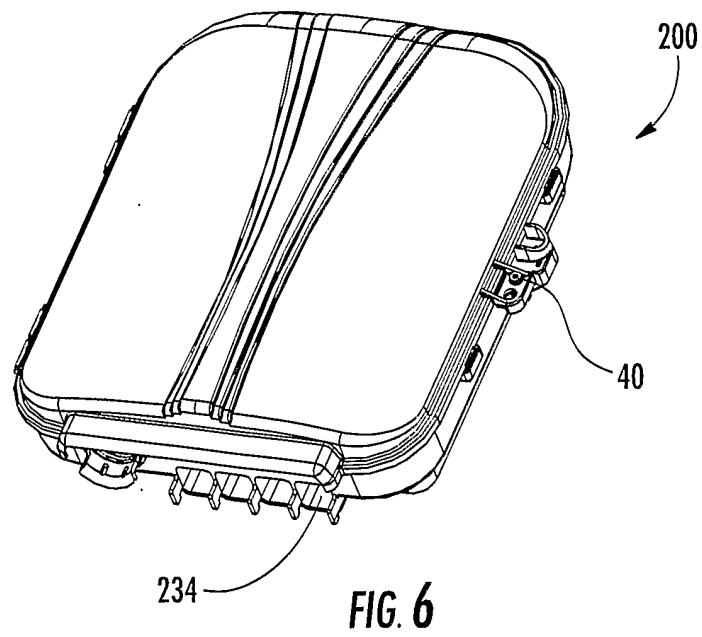

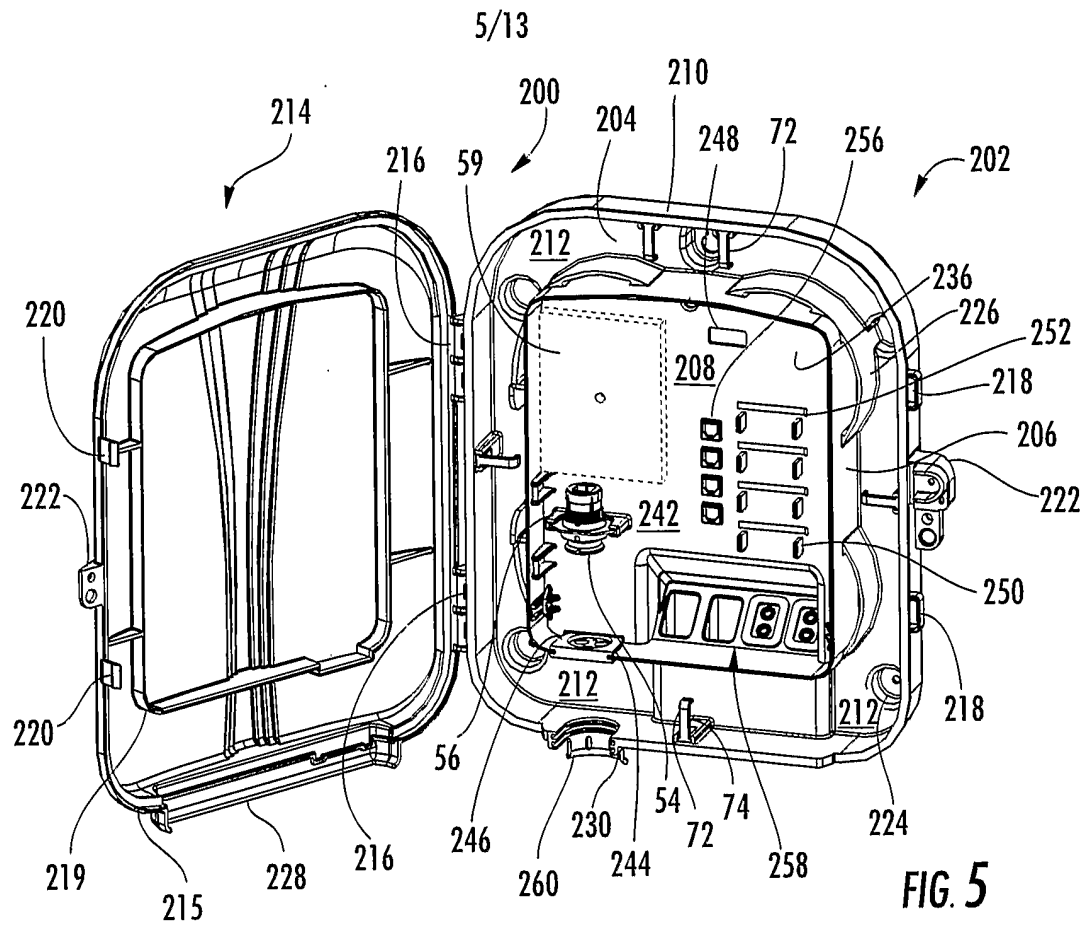

6/13

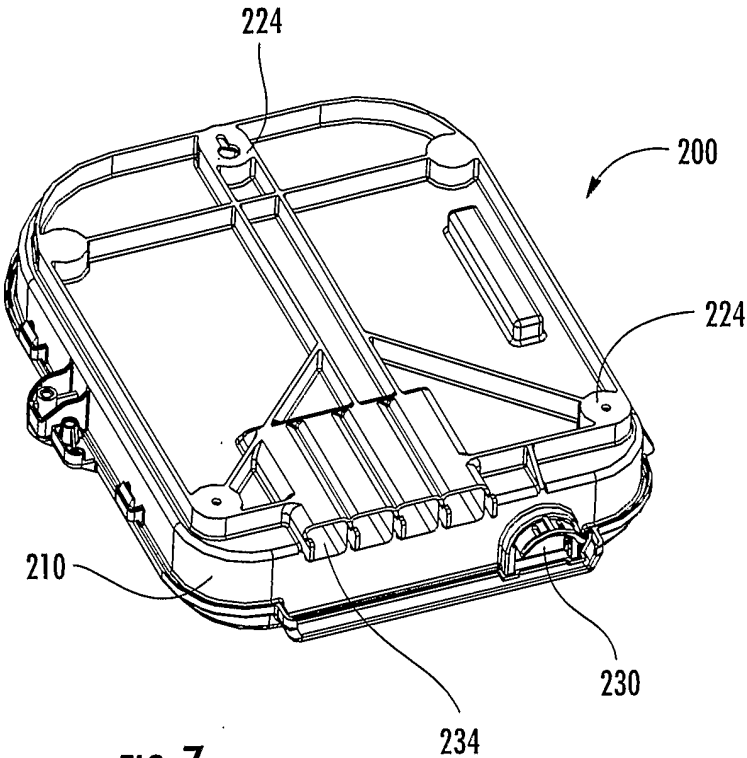


FIG. 7

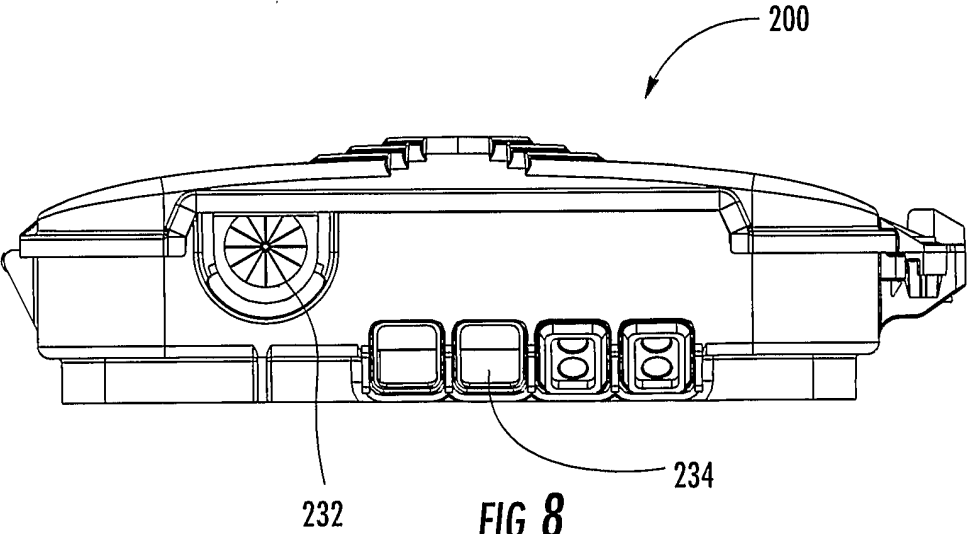


FIG. 8

7/13

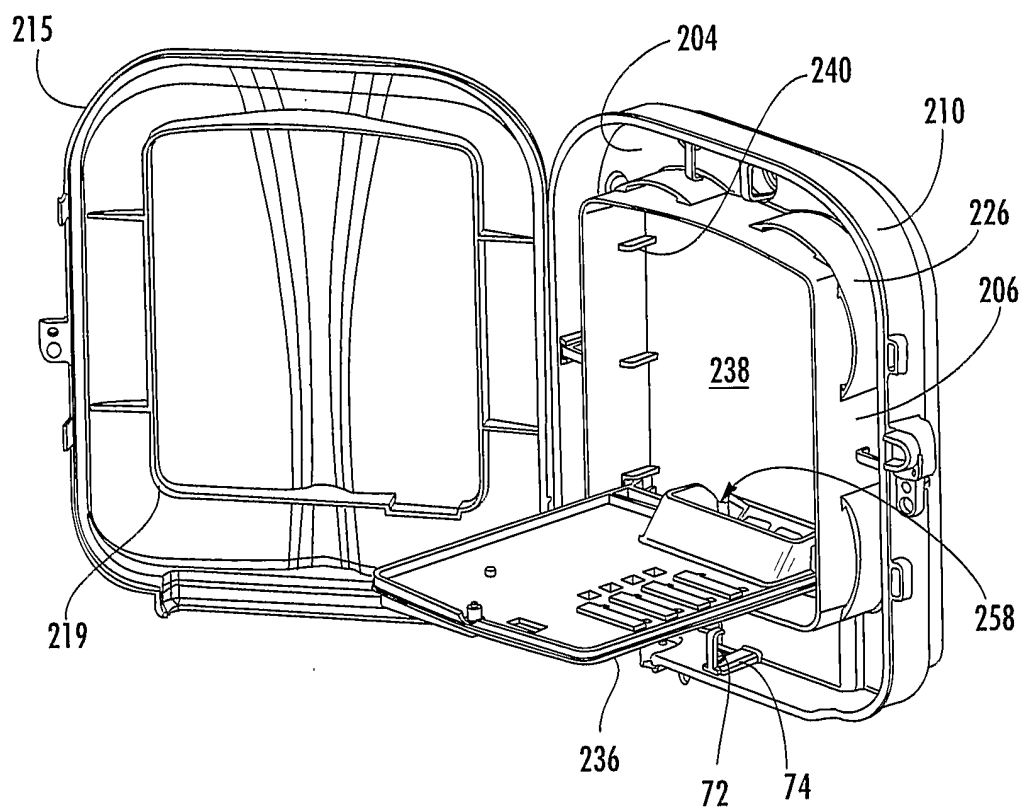


FIG. 9

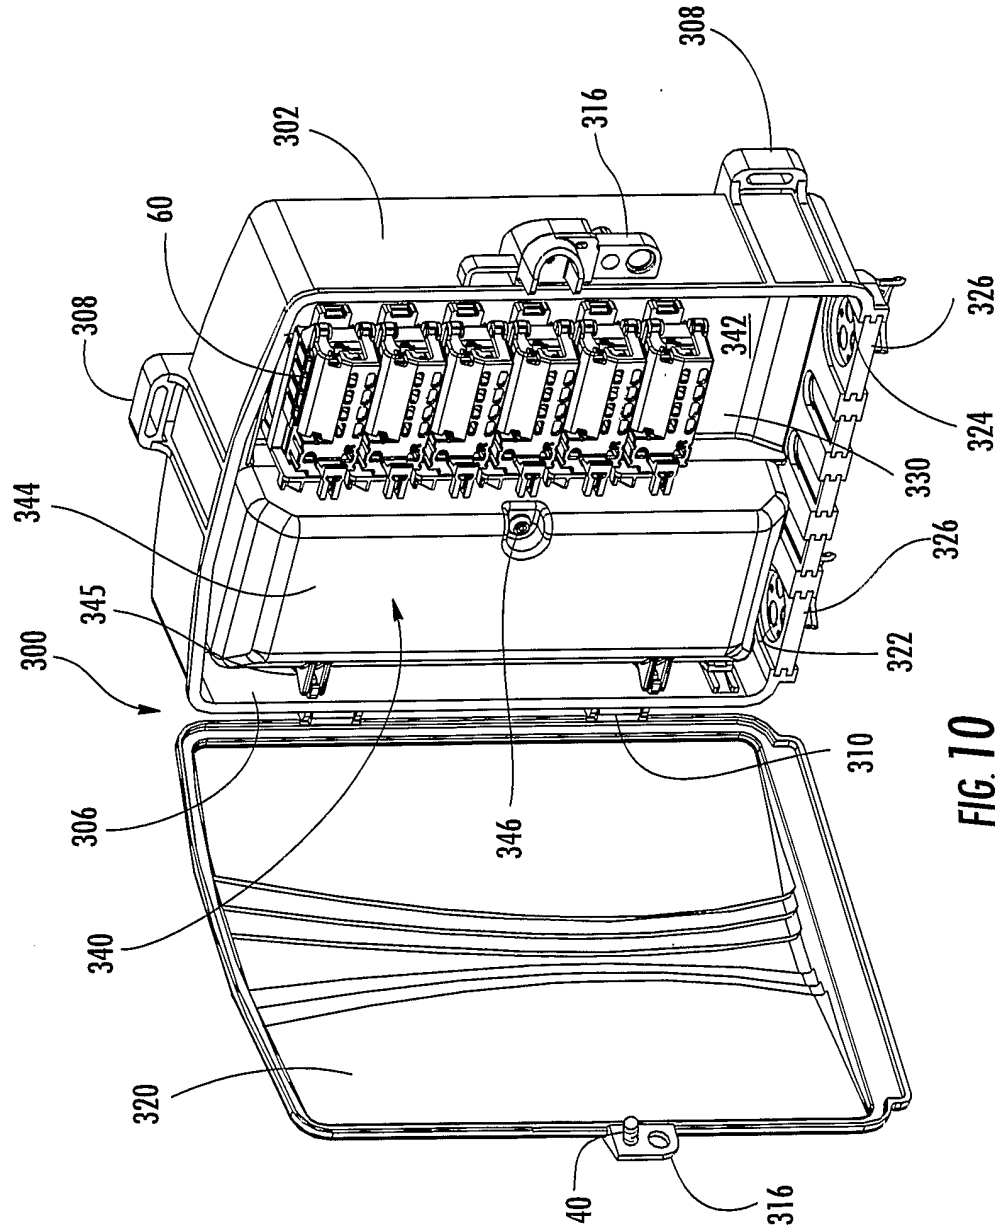


FIG. 10

9/13

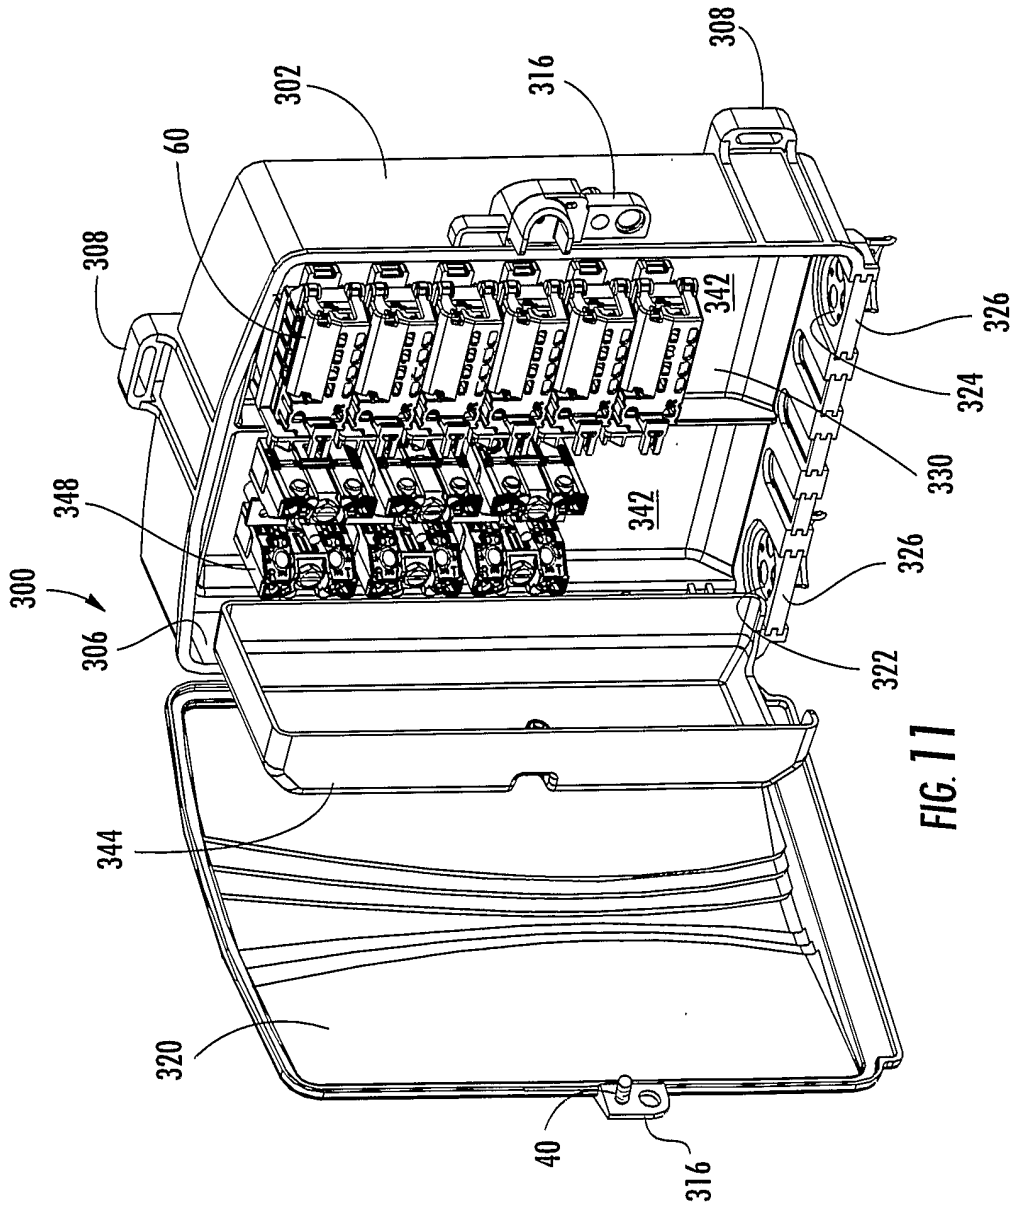


FIG. 11

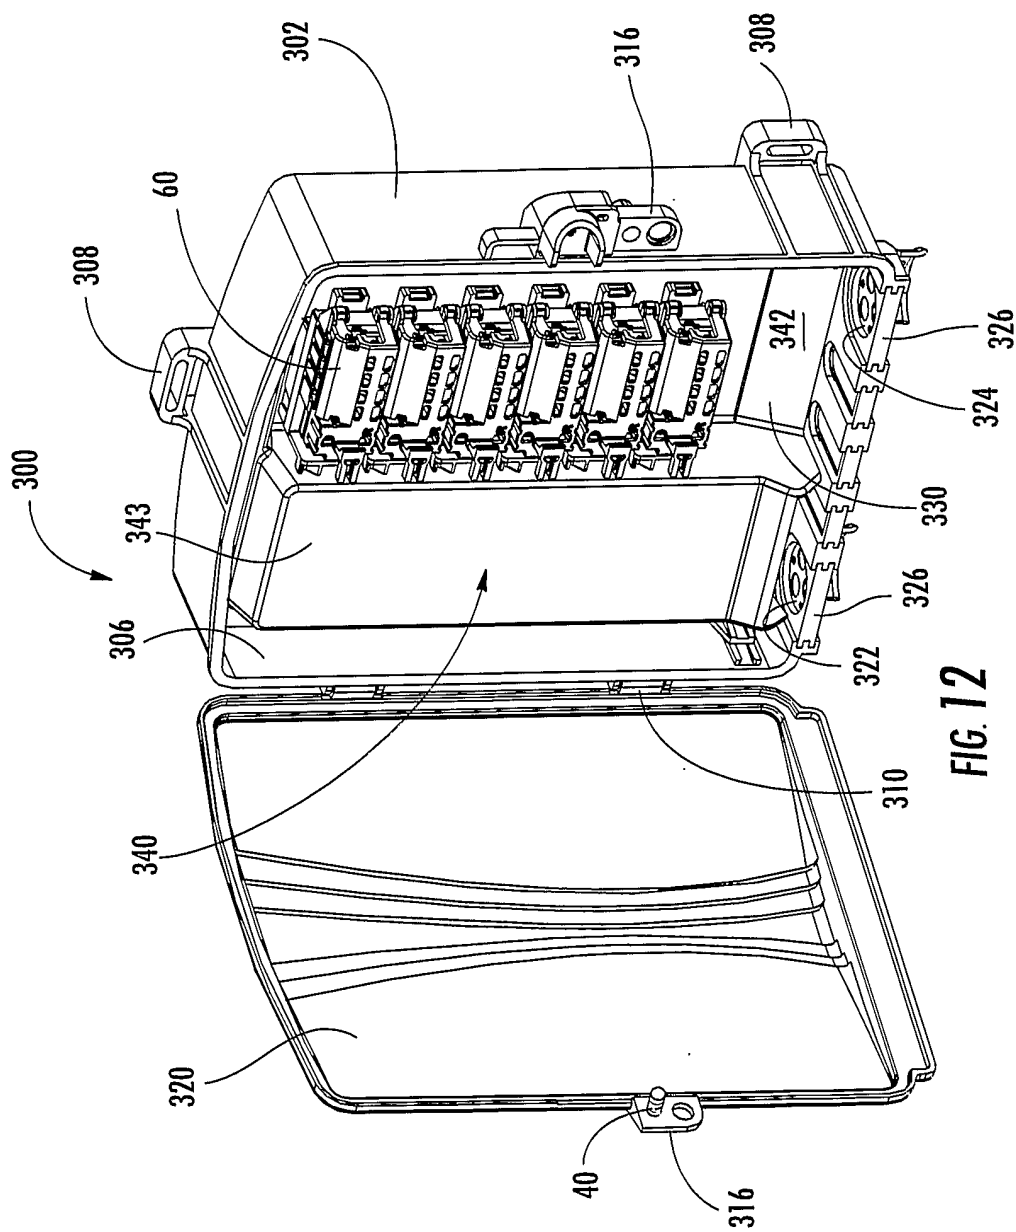
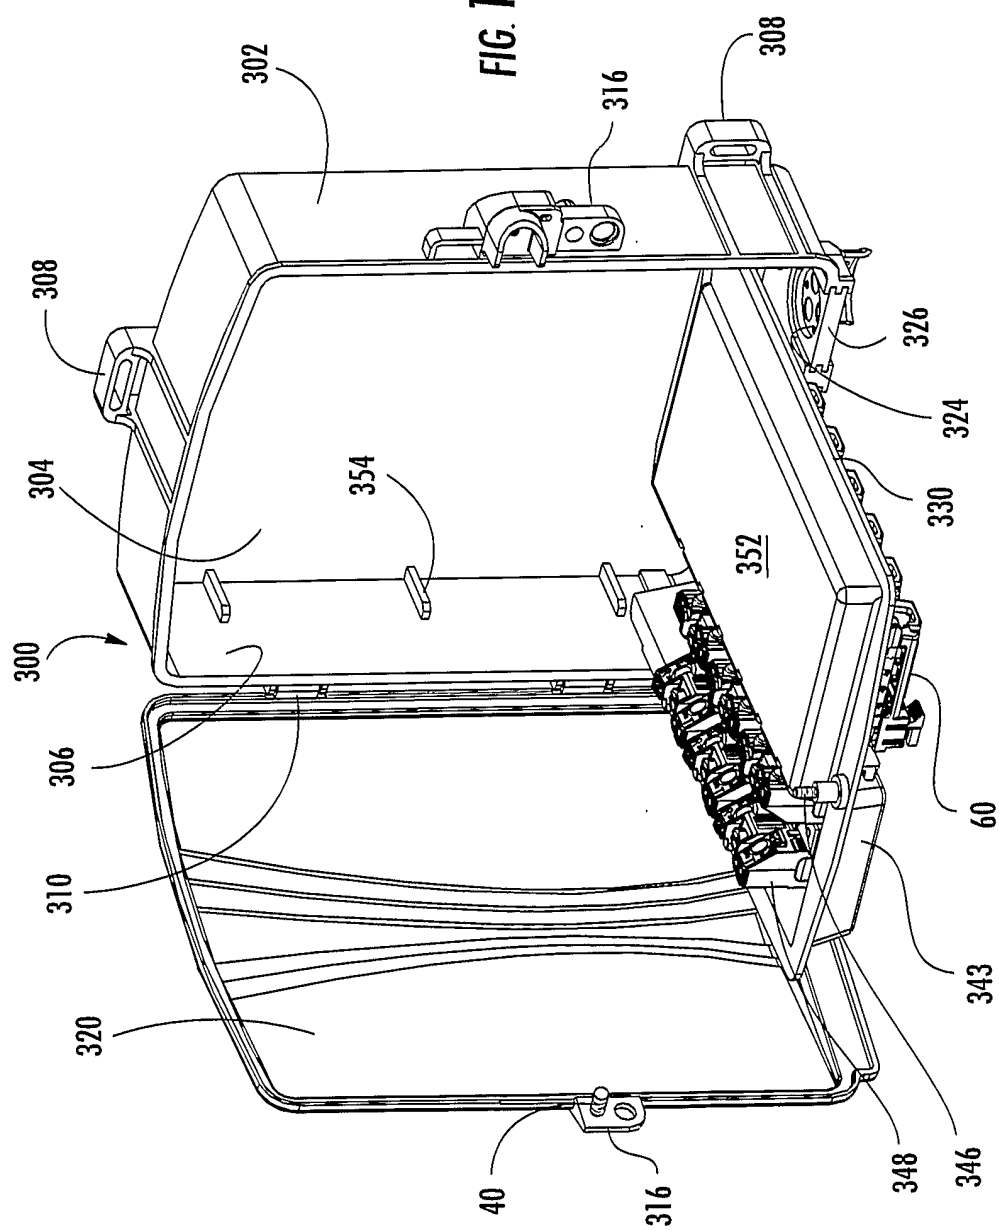
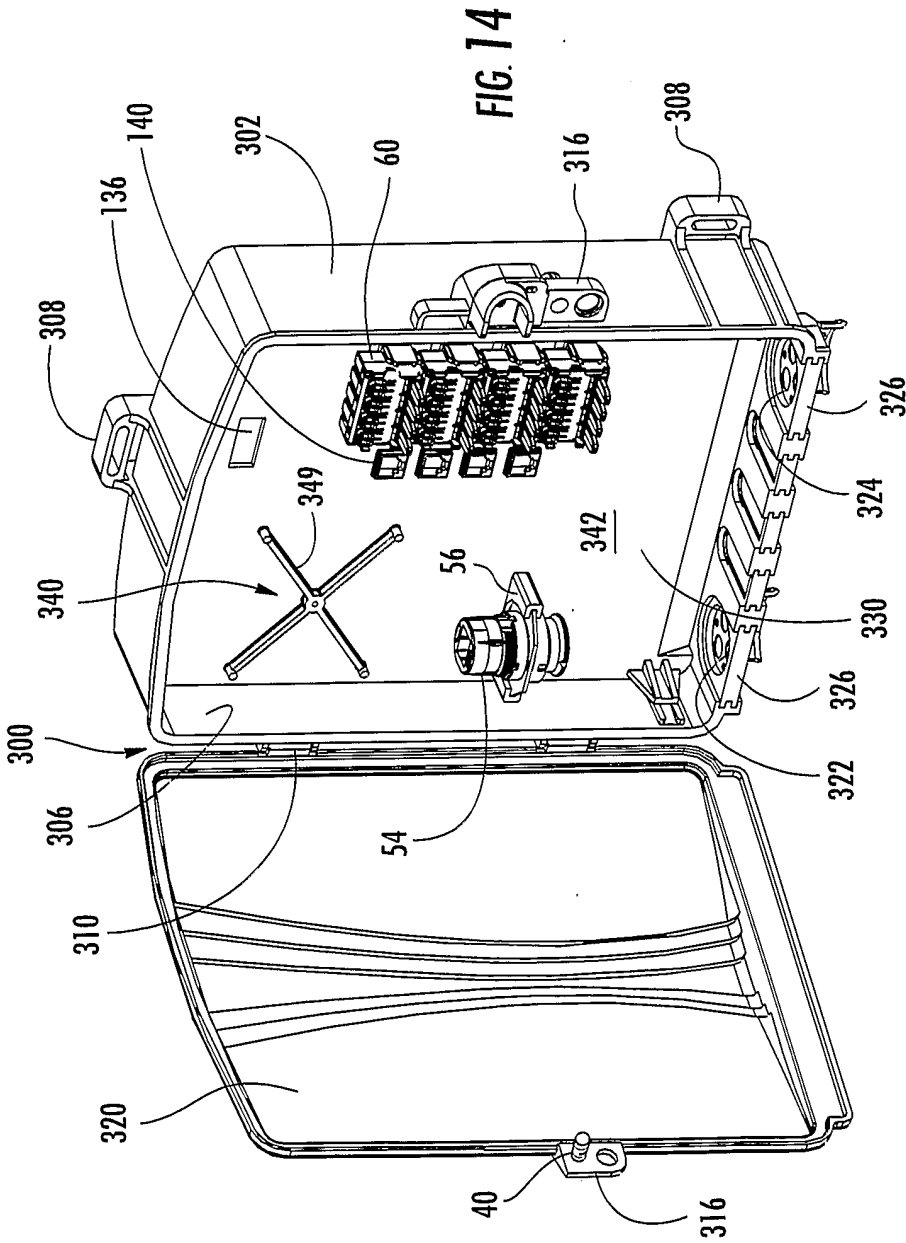


FIG. 12

11/13

FIG. 13





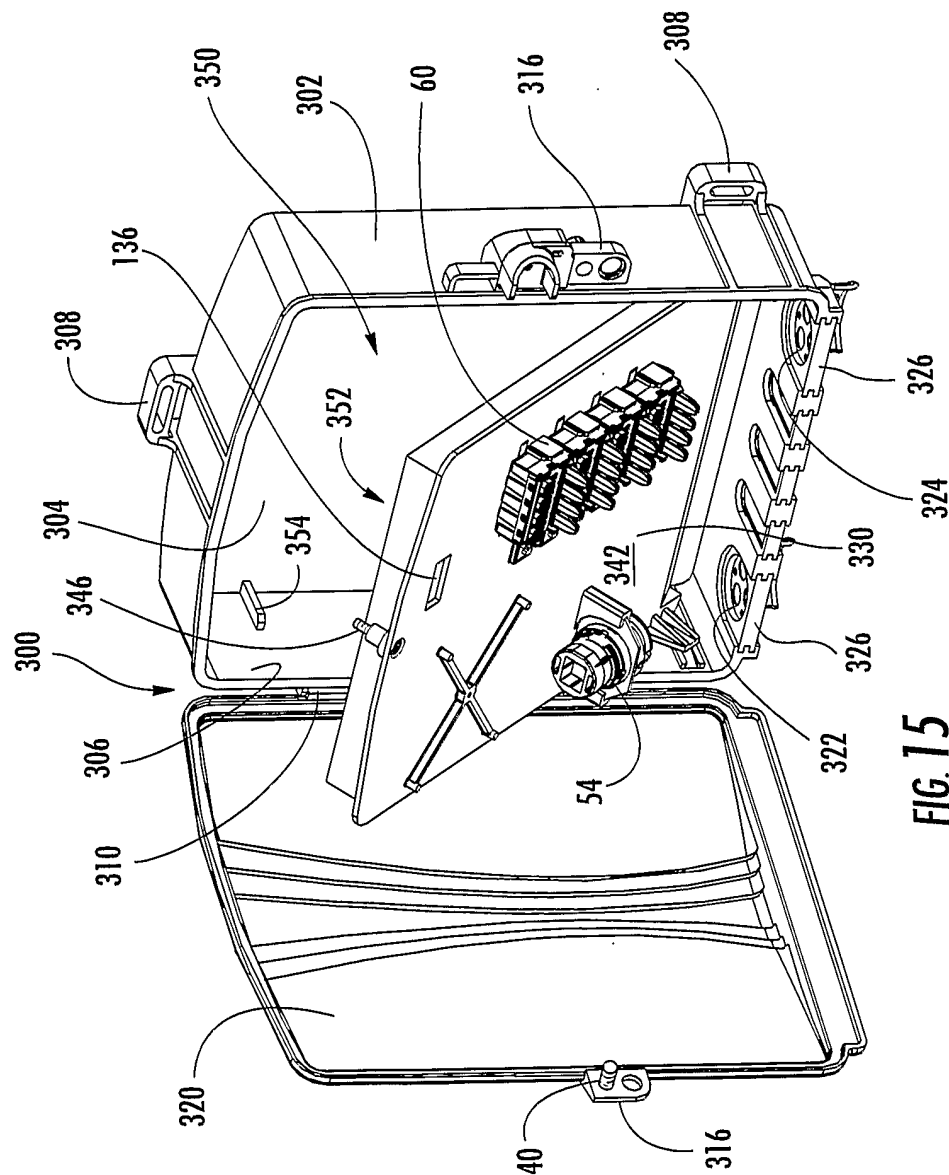


FIG. 15

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2005/045243

## A. CLASSIFICATION OF SUBJECT MATTER

INV. G02B6/44  
ADD. H04Q1/02 H04M1/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02B H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                                                 | Relevant to claim No. |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | US 6 385 381 B1 (JANUS NEAL ANTHONY ET AL)<br>7 May 2002 (2002-05-07)                                                                                                                              | 1,10,11               |
| Y         | column 5, line 6 - column 6, line 21;<br>figures 9A,9B                                                                                                                                             | 2-9,<br>12-16         |
| Y         | US 6 157 714 A (DAOUD ET AL)<br>5 December 2000 (2000-12-05)<br>column 1, line 58 - line 66<br>column 2, line 33 - line 43<br>column 2, line 49 - line 51<br>column 3, line 21 - line 30; figure 5 | 2-9,<br>12-16         |
| X         | DE 197 40 246 C1 (FELTEN & GUILLEAUME AG,<br>51063 KOELN, DE)<br>4 February 1999 (1999-02-04)<br>abstract<br>column 3, line 25 - line 68                                                           | 1,10,11               |
|           | -----<br>-/--                                                                                                                                                                                      |                       |

☒ Further documents are listed in the continuation of Box C

☒ See patent family annex.

\* Special categories of cited documents .

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

14 June 2006

Date of mailing of the international search report

23/06/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Cohen, A

# INTERNATIONAL SEARCH REPORT

itional application No  
PCT/US2005/045243

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                         | Relevant to claim No |
|-----------|----------------------------------------------------------------------------------------------------------------------------|----------------------|
| X         | EP 1 203 974 A (TYCO ELECTRONICS CORPORATION) 8 May 2002 (2002-05-08)<br>paragraphs [0015] - [0025]<br>-----               | 1,10,11              |
| X         | US 4 949 376 A (NIEVES ET AL)<br>14 August 1990 (1990-08-14)<br>abstract<br>column 2, line 55 - column 3, line 20<br>----- | 1,10,11              |

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2005/045243

| Patent document<br>cited in search report |    | Publication<br>date | Patent family<br>member(s)                                     | Publication<br>date                                  |
|-------------------------------------------|----|---------------------|----------------------------------------------------------------|------------------------------------------------------|
| US 6385381                                | B1 | 07-05-2002          | NONE                                                           |                                                      |
| US 6157714                                | A  | 05-12-2000          | NONE                                                           |                                                      |
| DE 19740246                               | C1 | 04-02-1999          | NONE                                                           |                                                      |
| EP 1203974                                | A  | 08-05-2002          | AT 317132 T<br>CA 2360705 A1<br>DK 1203974 T3<br>US 6661961 B1 | 15-02-2006<br>01-05-2002<br>15-05-2006<br>09-12-2003 |
| US 4949376                                | A  | 14-08-1990          | NONE                                                           |                                                      |