

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

01 October 2020 (01.10.2020)



(10) International Publication Number

WO 2020/198343 A1

(51) International Patent Classification:

C08F 265/06 (2006.01)

C04B 26/06 (2006.01)

C08F 2/22 (2006.01)

C08F 265/02 (2006.01)

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/US2020/024683

Published:

— with international search report (Art. 21(3))

(22) International Filing Date:

25 March 2020 (25.03.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/823,983

26 March 2019 (26.03.2019)

US

(71) Applicants: DOW GLOBAL TECHNOLOGIES LLC

[US/US]; 2040 Dow Center, Midland, MI 48674 (US).

ROHM AND HAAS COMPANY [US/US]; 400 Arcola Road, Collegeville, Pennsylvania 19426 (US).

DOW PRODUKTIONS UND VERTRIEBS GMBH & CO

OHG [DE/DE]; Rheingastr. 34, 65201 Wiesbaden (DE).

(72) Inventors: PERELLO, Margarita; Bachtobelstr. 3,

ZH-8810 Horgen (CH). YIN, Ligeng; 400 Arcola Road,

Collegeville, PA 19426 (US). MENZ, Sonja; August-Wolff-Str. 13, 29699 Bomlitz (DE).

NEUBAUER, Joerg; August-Wolff-Str. 13, 29699 Bomlitz (DE).

JING, Meng; 400 Arcola Road, Collegeville, PA 19426 (US).

(74) Agent: ROCCIA, Vincent, J. et al.; Condo Roccia Koptiw

LLP, 1800 JFK Blvd., Suite 1700, Philadelphia, PA 19103

(US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,

HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,

TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: CEMENT MODIFIER COMPOSITIONS

(57) Abstract: Described herein are emulsion polymers, spray dried powders made with said emulsion polymers, and cementitious compositions made with said emulsion polymers or said spray dried powders. Emulsion polymers described herein comprise a shell portion comprising an alkali soluble resin (ASR), a core portion formed from polymerized units of at least one hydrophobic ethylenically unsaturated monomer, wherein no crosslinker is present when the shell portion and core portion are combined, and a nonionic water-soluble polymer.



WO 2020/198343 A1

CEMENT MODIFIER COMPOSITIONS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/823,983, filed March 26, 2019, the contents of which are hereby incorporated herein by reference in its entirety.

BACKGROUND

[0002] Water redispersible polymers (RDP), whether in the form of a wet latexes or spray dried powder, are often added in hydraulic binders (such as, for example, mortars and concrete) to improve the performance of a cementitious product. One example of a commercial cement modifier that offers performance benefits is DRYCRYL™ acrylic, redispersible powder (available from The Dow Chemical Company, Midland, MI).

[0003] It is an important goal in the industry to continue to identify compositions that improve performance of a cementitious product. Improved performance of a cementitious product may include improving one or more of: properties of the wet mortar, for example, water demand, density, and/or workability; and/or properties of the cured products, for example, adhesion, mechanical strength, tensile and elongation, crack bridging, and/or water uptake/resistance.

SUMMARY

[0004] Described herein are emulsion polymers, spray dried powders made with said emulsion polymers, and cementitious compositions made with said emulsion polymers or said spray dried powders. Emulsion polymers described herein comprise a shell portion comprising an alkali soluble resin (ASR), a core portion formed from polymerized units of at least one hydrophobic ethylenically unsaturated monomer, wherein no crosslinker is present when the shell portion and core portion are combined, and a nonionic water-soluble polymer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] A diagram characterizing the degree of grafting in water redispersible polymer (RDP) powders.

DETAILED DESCRIPTION

[0006] A water redispersible polymer (RDP) powder may be produced from a core-shell polymer. For example, a latex may be made via emulsion polymerization. The latex may be converted to the dry grade by spray drying. The latex precursor may be core-shell structured. The core may be soft and hydrophobic, and

may serve as the film-forming component of the polymer for performance enhancement. The shell may be hard and hydrophilic, and may serve to protect the core from irreversible coagulation during spray drying and storage.

[0007] In an embodiment, an emulsion polymer is described. The emulsion polymer comprises a shell portion comprising an alkali soluble resin (ASR), a core portion formed from polymerized units of at least one hydrophobic ethylenically unsaturated monomer, wherein no crosslinker is present when the shell portion and core portion are combined, and a nonionic water-soluble polymer. Examples of crosslinkers include polyfunctional monomers, which includes allyl methacrylate (ALMA).

[0008] It is understood that the emulsion polymer is a core-shell polymer (e.g., as opposed to physical blends of monomers that may be found in ASRs and/or hydrophobic ethylenically unsaturated monomers (or resins therefrom), or single stage polymers containing a mix of monomers described herein with respect to the shell portion and core portion). In an embodiment, the emulsion polymer may be formed in a two-stage polymerization. For example, the shell portion and the core portion may be prepared as separate monomer emulsions. The nonionic water-soluble polymer may be added to the shell monomer emulsion, the core monomer emulsion, or after combination of the shell monomer emulsion and the core monomer emulsion (e.g., cold blended). In a preferred embodiment, the nonionic water-soluble polymer is added to the shell monomer emulsion before the shell monomer emulsion and the core monomer emulsion are combined.

[0009] As regarding order of addition, the emulsion polymer may be formed in a two-stage polymerization comprising a first stage polymerization of the shell portion (in which no crosslinker is used in first stage) and a second stage polymerization of the core portion. In this embodiment, after the first stage polymerization is complete, no unreacted functional groups are left to react with the subsequent core stage to form covalent linkages between the core and ASR containing shell (e.g., ASR grafting).

[0010] Alternatively, the emulsion polymer may be formed in a two-stage polymerization comprising a first stage polymerization of the core portion (in which no crosslinker is used in first stage) and a second stage polymerization of the ASR shell portion. Again, after the first stage polymerization is complete, no unreacted functional groups are left to react with the subsequent core stage to form covalent linkages between the core and ASR containing shell (e.g., ASR grafting).

[0011] As will be described, although relatively high levels of ASR grafting lead to colloidal stability, and hence crosslinkers were previously thought to be crucial. As illustrated in the Examples, Applicants have surprisingly found that low levels of ASR grafting are desirable. For example, Applicants found that when no crosslinker is included, the polymer stability (e.g., during emulsion polymerization or spray drying) was

acceptable. Moreover, the flexibility of the resulting cementitious compositions (e.g., mortar membranes) was improved. In an embodiment, the emulsion polymer exhibits a low level of ASR grafting.

[0012] In an embodiment, the ASR is formed from polymerized units of at least one acid-functional monomer, anhydride-functional monomer, salts thereof, or a combination thereof. The ASR may be anionic and/or may become water-soluble in alkaline conditions. In an embodiment, the ASR may be free of, or substantially free (e.g., at a lower concentration than would be considered to impart functionality (such as, for example, less than 0.5 weight percent)) of, polymerized units of hydroxyl-containing monomers. Preferably, the ASR is formed from polymerized units of at least one (e.g., one or more) acid-functional monomer comprising Methyl methacrylate (MMA) and Methacrylic acid (MAA). More preferably, the ASR is formed from polymerized units of MMA and MAA.

[0013] The ASR may be formed from polymerized units of at least one acid-functional monomer at a level of from about 5 percent to about 50 percent, preferably from about 10 percent to about 30 percent, by mass of the total mass of ASR. For example, the preceding ranges refer to the mass percentage of the acid-functional monomer with respect to the total monomer for the ASR stage. In an embodiment, the ASR comprises about 15 percent to about 30 percent of MAA, by solids content, of the ASR.

[0014] In an embodiment, the glass transition temperature (T_g) of the ASR in the acid form is about 70 °C to about 140 °C.

[0015] In an embodiment, the ASR has a weight average molecular weight of 50,000 or less, for example, as measured by gel permeation chromatography. For clarity, in embodiments where a nonionic water-soluble polymer is combined with the monomer emulsion for the shell portion, this molecular weight of the ASR refers to the ASR before incorporation of the nonionic water-soluble polymer.

[0016] In an embodiment, the at least one hydrophobic ethylenically unsaturated monomer in the core portion comprises alkyl (meth)acrylate, styrene, and/or a vinyl ether. In a preferred embodiment, the at least one hydrophobic ethylenically unsaturated monomer comprises a mixture of butyl acrylate and styrene.

[0017] The core portion may further comprise one or more hydrophilic ethylenically unsaturated monomers including carboxylic acid, anhydride, sulfonic acid, phosphic acid, amide group containing monomers, hydroxyalkyl, or methylolated monomers. In an embodiment, the mass percent of hydrophilic monomers in the core portion is about 0% to about 5%.

[0018] The T_g of the core portion polymer is about -50 °C to about 60 °C.

[0019] In an embodiment, if the total of ASR and core is considered 100 parts, the mass ratio of ASR:core is in a range of about 2:98 to about 50:50. Preferably, the mass ratio of ASR:core is in a range of about 5:95 to about 20:80.

[0020] In an embodiment, if the total of ASR and core is considered 100 parts ("ASR plus core"), the mass ratio of nonionic water-soluble polymer to ASR plus core is in a range of about 0.5 parts to about 20 parts nonionic water-soluble polymer to about 100 parts ASR plus core. Preferably, the mass ratio of nonionic water-soluble polymer to ASR plus core is in a range of about 1 part to about 10 parts.

[0021] In an embodiment, the nonionic water-soluble polymer is polyvinyl alcohol (PVOH).

[0022] Preferably, the emulsion polymer exhibits a high level of PVOH grafting. This may be achieved by adding at least part of the PVOH in the process of polymerization, *e.g.*, rather than making physical blends of PVOH with the post-polymerization core-shell latex.

[0023] The emulsion polymer may be made by forming a monomer emulsion for the shell portion, forming a monomer emulsion for the core portion, and combining the monomer emulsions in the absence of crosslinker. In an embodiment, the nonionic water-soluble polymer is combined with the monomer emulsion for the shell portion before the monomer emulsions are combined. In another embodiment, the nonionic water-soluble polymer is combined with the monomer emulsion for the core portion before the monomer emulsions are combined.

[0024] In an embodiment, the emulsion polymer as described above (*e.g.*, comprising a shell portion comprising an alkali soluble resin (ASR), a core portion formed from polymerized units of at least one hydrophobic ethylenically unsaturated monomer, wherein no crosslinker is present when the shell portion and core portion are combined, and a nonionic water-soluble polymer) may be converted to a spray dried powder. In an embodiment, the spray dried powder is a water redispersible polymer (RDP). The spray dried powder may comprise the above-described emulsion polymer and a flow aid present in a range of about 1% to about 30%, preferably about 4% to about 20%, by weight of the spray dried powder. For example, the flow aid may be Kaolin clay. As will be described with respect to the drawing, preferred spray dried powders exhibit a low level of ASR grafting. In an embodiment, particularly preferred spray dried powders exhibit a high level of PVOH grafting.

[0025] Presently described emulsion polymers and/or spray dried powders may find use as part of cementitious compositions, improving, for example, one or more of: properties of the wet mortar, for example, water demand, density, and/or workability; and/or properties of the cured products, for example, adhesion, mechanical strength, tensile and elongation, crack bridging, and/or water uptake/resistance. In an embodiment, the cementitious composition comprises an emulsion polymer and/or spray dried powder as described herein and Portland cement. In an embodiment, the cementitious composition comprises an emulsion polymer and/or spray dried powder as described herein and a ternary hydraulic binder. In an embodiment, the cementitious composition comprises a spray dried powder formed from an emulsion polymer

comprising a shell portion comprising an alkali soluble resin (ASR), wherein the ASR is formed from polymerized units of at least one acid-functional monomer comprising Methyl methacrylate (MMA) and Methacrylic acid (MAA), a core portion formed from polymerized units of at least one hydrophobic ethylenically unsaturated monomer, wherein the at least one hydrophobic ethylenically unsaturated monomer comprises a mixture of butyl acrylate and styrene, wherein no crosslinker is present when the shell portion and core portion are combined, and a nonionic water-soluble polymer, wherein the nonionic water-soluble polymer is added to the shell portion before the shell portion and core portion are combined, and Portland cement (e.g., alone or as part of a ternary hydraulic binder). In an embodiment, the cementitious composition is characterized by one or more of superior mechanical properties for the tensile and elongation of membranes after 7 days at normal condition, after additional 7 days in water immersion, or crack bridging at room temperature (RT).

EXAMPLES

Example 1

[0026] A number of monomer emulsions (ME#1) were built in 2L containers, the compositions as listed in TABLE 1:

TABLE 1

Ingredients (g)	Example 1A	Example 1B	Example 1C (comparative)	Example 1D (comparative)	Example 1E (comparative)
Methyl methacrylate (MMA)	155.5	155.5	152.6	152.6	152.6
Allyl methacrylate (ALMA)	0	0	2.96	2.96	2.96
Methacrylic acid (MAA)	39.4	39.4	39.4	39.4	39.4
SIPONATE™ DS-4 (22.5%) emulsifier	0.74	0.74	0.74	0.74	0.74
TEXANOL™ ester alcohol coalescent	19.4	19.4	19.4	19.4	19.4
Methyl 3-mercaptopropionate (3-MMP)	6.80	6.80	6.80	6.80	6.80
DI water	246.5	246.5	246.5	246.5	246.5
Total	468.4	468.4	468.4	468.4	468.4

[0027] The monomer emulsions of TABLE 1 are examples of compositions that may be used to form the shell component of a core-shell polymer. In Examples 1A and 1B, the mass% of MAA (as compared to MAA + MMA) is about 20.2%.

Example 2

[0028] A number of monomer emulsions (ME#2) were built in 4L containers, the compositions as listed in TABLE 2:

TABLE 2

Ingredients (g)	Example 2A	Example 2B	Example 2C (comparative)	Example 2D (comparative)	Example 2E (comparative)
Butyl acrylate (BA)	1336.8	1336.8	1336.8	1336.8	1336.8
Styrene (STY)	279.5	279.5	279.5	279.5	279.5
Methacrylamide (MAM)	31.9	31.9	31.9	31.9	31.9
Sodium lauryl sulfate (SLS) surfactant (28%)	11.9	11.9	11.9	11.9	11.9
Polyvinyl alcohol (PVOH) 4-88 (15%)	0	0	0	314.0	0
n-dodecyl mercaptan (nDDM)	1.48	1.48	1.48	1.48	1.48
DI water	476.2	476.2	476.2	476.2	476.2
Total	2137.9	2137.9	2137.9	2451.8	2137.9

[0029] The monomer emulsions of TABLE 1 are examples of compositions that may be used to form the core component of a core-shell polymer.

Example 3

[0030] Polymer A was formed as follows. 500 g of DI water was charged in a reactor (5-L round-bottom flask equipped/connected with a mechanical stirrer, a thermocouple, a condenser, and pumps for feeding monomer emulsions and additive solutions) and heated to 58°C. For Stage 1 polymerization, Example 1A of ME#1 (from Example 1) was transferred to the reactor along with 34 g of DI water as a rinse.

[0031] The reaction was initiated by charging the reactor with a solution of 0.022 g of $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ and 0.030 g of the tetrasodium salt of EDTA in 4.9 g of water, a solution of 3.83 g of t-butyl hydroperoxide (tBHP) (70% active) in 29.1 g of water, and a solution of 3.03 g of BRUGGOLITE™ E-28 reducing agent (available from Bruggemann Chemical U.S., Inc., Newtown Square, PA) in 100 g of water, each separately as a shot addition. An exotherm of 20–25°C was observed over the next 10-15 min.

[0032] A solution of 0.61 g of tBHP (70% active) in 14.6 g of water and a solution of 0.75 g of BRUGGOLITE™ E-28 in 30 g of water was charged into the reactor and the reaction was held for 15 min. After the hold, a slurry of 9.3 g of $\text{Ca}(\text{OH})_2$ and 20.2 g of NaOH solution (50% active) in 97.0 g of water was added into the reactor and the reaction was held for another 10 min.

[0033] For Stage 2 polymerization, 240 g of Example 2A of ME#2 (from Example 2) was transferred to the reactor followed by shot additions of a solution of 3.04 g of sodium persulfate in 24.3 g of water and a solution of 2.10 g of sodium bisulfite in 24.3 g of water. An exotherm of 10–15°C was observed over the next 6–12 min. The rest of Example 2A of ME#2 (from Example 2) was then metered into the reactor along with a solution of 4.75 g sodium persulfate and 0.137 g of tert-amyl hydroperoxide (85% active) in 127.1 g of water and a solution of 6.83 g of sodium bisulfite in 127.1 g of water as separate feeds. The feeding time for Stage 2 was 150 min. The temperature was controlled at $75 \pm 1^\circ\text{C}$.

[0034] When the feeds were completed, the reaction was cooled to 65°C. A solution of 0.011 g of $\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$ and 0.015 g of the tetrasodium salt of EDTA in 4.9 g of water was charged into the reactor as a shot addition. A solution of 2.51 g of tBHP (70% active) in 70.0 g of water and a solution of 2.18 g of BRUGGOLITE™ FF6 reducing agent (available from Bruggemann Chemical U.S., Inc., Newtown Square, PA) in 70.0 g of water was metered into the reactor over 60 min.

[0035] 314 g of polyvinyl alcohol (PVOH 4-88) (15 wt %) solution was metered in over 15 min. The reactor was finally charged with a solution of 1.94 g of KORDEK™ LX5000 biocide (available from DuPont, Wilmington, DE) in 4.9 g of water. The latex was filtered to remove any large coagulum. Basic characteristics: solid content: 44.1%, pH: 7.5.

Example 4

[0036] Polymer B was formed by a procedure similar to that of Example 3, except Example 1B (from Example 1) was used for Stage 1 polymerization, and that the PVOH solution was added after the hold following neutralizer slurry addition and before the charge of Example 2B of ME#2 (from Example 2) seed. Basic characteristics: solid: 44.4%, pH: 7.8.

Example 5 (Comparative)

[0037] Polymer C was formed by a procedure similar to that of Example 3. However, the composition of ME#1 was different (comparative Example 1C (from Example 1) was used) and it contained a crosslinker, ALMA. Basic characteristics: solid: 43.1%, pH: 7.88.

Example 6 (Comparative)

[0038] Polymer D was formed by a procedure similar to that of Example 3. However, the composition of ME#1 was different (comparative Example 1D (from Example 1) was used) and contained a crosslinker, ALMA. Also, the PVOH solution was relocated to be blended into the Stage 2 monomer emulsion (ME#2 (comparative

Example 2D (from Example 2))) and gradually metered into the reactor during the Stage 2 polymerization. Basic characteristics: solid: 44.0%, pH: 7.39.

Example 7 (Comparative)

[0039] Polymer E was formed by a procedure similar to that of Example 4. However, the composition of ME#1 was different (comparative Example 1E (from Example 1) was used) and contained a crosslinker, ALMA. Basic characteristics: solid: 43.6%, pH: 7.35.

Example 8

[0040] Latexes produced in Examples 3-7 were converted to water redispersible polymer powders via spray drying. The procedure was as follows. 1050 g of latex (44 wt %) (e.g., Examples 3-7) was blended with a slurry of 4.6 g of $\text{Ca}(\text{OH})_2$ dispersed in 50 g of water along with an additional 600 g water. The pH was raised to 12-13 and the solid content was ca. 27.5 wt %. The neutralized emulsion was then spray dried in a Niro Atomizer laboratory spray dryer (GEA Process Engineering Inc., Columbia, MD) equipped with a nozzle (SU4 from Spray Systems Company, Wheaton, IL). The inlet temperature was 175–185°C, and the outlet temperature was 62–66°C. The feed rate was 60–80 g/min. Kaolin clay (KAMIN™ HG-90 available from KaMin LLC, Macon, GA) was the flow aid and targeted to be 12–14 wt % in the spray dried powders. Basic characteristics of the resultant RDPs are below in TABLE 3:

TABLE 3

Characteristics	Powder A	Powder B	Powder C (comparative)	Powder D (comparative)	Powder E (comparative)
Moisture content (%)	1.97	1.97	1.50	1.64	1.71
Ash content (%)	10.98	11.51	11.75	12.74	11.58
Flow aid (%)	12.90	13.52	13.81	14.97	13.61
Sedimentation (mm) 1h	5	5	4	4	3
Sedimentation (mm) 24h	15	15	12	10	9

[0041] The degree of grafting was studied by capillary zonal electrophoresis (CZE). TABLE 4 illustrates particle size and intrinsic mobility of the small mode of the latex precursors, which may be affected by the degree of grafting:

TABLE 4

	Powder A	Powder B	Powder C (comparative)	Powder D (comparative)	Powder E (comparative)
$\mu_{\text{small,ep, cm/min}}^*$	-8.6 ± 0.1	-7.7 ± 0.1	-8.7 ± 0.1	-7.8 ± 0.1	-7.6 ± 0.1

[0042] Reported values in TABLE 4 are the average of three measurements. Errors represent 95% confidence intervals.

[0043] The drawing is a diagram characterizing the degree of grafting in RDPs substantially similar to those of TABLE 3. For alkali-soluble resins (ASR) grafting, “high” is exhibited by 78.3 MMA/1.5 ALMA/20.2 MAA as the shell composition (e.g., ME#1), in which allyl methacrylate (ALMA) is the crosslinker. For example, Powders C-E exhibit high ASR grafting. “Low” ASR grafting is exhibited by 79.8 MMA/20.2 MAA as the shell composition (e.g., ME#1), which contains no chemical crosslinker. For example, Powders A&B exhibit low ASR grafting.

[0044] A low level of PVOH grafting is exhibited when PVOH is blended after the Stage 2 polymerization (e.g., cold blends) (e.g., Powder A and Powder C (comparative)).

[0045] An intermediate level of PVOH grafting is exhibited when PVOH is blended in the Stage 2 monomer emulsion (ME#2) and gradually fed during the Stage 2 polymerization (e.g., Powder D (comparative)).

[0046] A high level of PVOH grafting is exhibited when all the PVOH is added in the kettle before the Stage 2 polymerization (e.g., Powder B and Powder E (comparative)).

Example 9

[0047] RDPs produced in Example 8 were subjected to drymix formulation and application testing. The RDPs were blended in a ternary hydraulic binder (ordinary Portland cement (OPC) + calcium aluminate cement + gypsum, for fast setting) drymix formulation and the performance was evaluated for both the wet mortars (water demand, density, workability) and cured membranes (tensile and elongation, crack bridging, water uptake). Results are given in TABLE 5:

TABLE 5

Performance	Powder A	Powder B	Powder C (comparative)	Powder D (comparative)	Powder E (comparative)
Mortar Prep Water Demand	0.310	0.310	0.310	0.265	0.310
Mortar Prep Mortar ρ (g/mL)	1.28	N.M.	1.32	1.20	1.24
7 days NC Tensile strength (MPa)	1.10	1.50	1.43	1.20	1.87
7 days NC Elongation at break (%)	8.8 ± 0.8	15.7 ± 2.3	7.1 ± 1.0	4.8 ± 1.4	4.3 ± 1.7
7 days NC/7 days water Tensile strength (MPa)	0.20	0.20	0.15	0.17	0.18
7 days NC/7 days water Elongation at break (%)	32.0 ± 2.8	12.0 ± 1.4	5.7 ± 0.5	5.9 ± 1.9	4.6 ± 0.7
Crack bridging at RT Max force (N)	154	252	144	103	N.M.
Crack bridging at RT Deformation at max force (mm)	0.30 ± 0.2	0.94 ± 0.05	0.31 ± 0.02	0.32 ± 0.14	N.M.

[0048] Cementitious compositions comprising Powder A and Powder B exhibited superior results for elongation at break after 7 days of curing at NC and an additional 7 days of water immersion. Cementitious compositions comprising Powder B also exhibited superior results for elongation at break after 7 days of curing at NC and deformation at max force in crack bridging.


[0049] Referring to Examples 8 and 9, Powder E showed the best redispersibility. Without being bound by theory, the grafting degree of both ASR and PVOH was high, and thus the colloidal stability was expected to be favorable. However, Powder B showed the best overall mechanical properties for the tensile and elongation of membranes after 7 days at normal condition, after additional 7 days in water immersion, and crack bridging at RT when used in cementitious compositions.

[0050] Without being bound by theory, minimizing polymer particle adsorption onto cement grains early in the cure may lead to better polymer film formation late in cure when free water content is low, this better film formation may lead to better mechanical properties. Grafted PVOH may act as a stabilizer helping to minimize the polymer particle adsorption onto cement. Covalently-grafted ASR would promote the interaction of cement grains and latex particles, while ASR that is only physically adsorbed on the polymer particle may desorb from the polymer particles and adsorb onto cement. ASR adsorbed on cement would then decrease the interaction between polymer particles and cement. Thus, high PVOH grafting and low ASR grafting may deliver superior results (e.g., Powder B).

Claims

1. An emulsion polymer, comprising:
a shell portion comprising an alkali soluble resin (ASR);
a core portion formed from polymerized units of at least one hydrophobic ethylenically unsaturated monomer, wherein no crosslinker is present when the shell portion and core portion are combined; and
a nonionic water-soluble polymer.
2. The emulsion polymer of claim 1, wherein the ASR is formed from polymerized units of at least one acid-functional monomer, anhydride-functional monomer, salts thereof or a combination thereof.
3. The emulsion polymer of claim 1, wherein the ASR is formed from polymerized units of at least one acid-functional monomer comprising Methyl methacrylate (MMA) and Methacrylic acid (MAA).
4. The emulsion polymer of claim 1, wherein the ASR is formed from polymerized units of at least one acid-functional monomer at a level of from about 5 percent to about 50 percent, by mass of the total mass of ASR.
5. The emulsion polymer of claim 1, wherein the ASR is formed from polymerized units of at least one acid-functional monomer at a level of from about 10 percent to about 30 percent, by mass of the total mass of ASR.
6. The emulsion polymer of claim 1, wherein the glass transition temperature (T_g) of the ASR in the acid form is about 70 °C to about 140 °C.
7. The emulsion polymer of claim 1, wherein the shell portion has a weight average molecular weight of 50,000 or less.
8. The emulsion polymer of claim 1, wherein the at least one hydrophobic ethylenically unsaturated monomer comprises alkyl (meth)acrylate, styrene, and/or a vinyl ether.
9. The emulsion polymer of claim 1, wherein the T_g of a polymer produced from the core portion is about -50 °C to about 60 °C.

10. The emulsion polymer of claim 1, wherein the mass ratio of ASR:core is in a range of about 2:98 to about 50:50.
11. The emulsion polymer of claim 1, wherein the mass ratio of nonionic water-soluble polymer to the ASR plus core is in a range of about 0.5 parts to about 20 parts nonionic water-soluble polymer to about 100 parts ASR plus core.
12. The emulsion polymer of claim 1, wherein the mass ratio of nonionic water-soluble polymer to ASR plus core is in a range of about 1 parts to about 10 parts.
13. The emulsion polymer of claim 1, wherein the nonionic water-soluble polymer is polyvinyl alcohol (PVOH).
14. The emulsion polymer of claim 1, wherein the emulsion polymer exhibits a low level of ASR grafting and a high level of PVOH grafting.
15. A cementitious composition, comprising:
 - (i) the emulsion polymer of any of the preceding claims or (ii) a spray dried powder comprising the emulsion polymer of any of the preceding claims and a flow aid present in a range of about 1% to about 30% by weight of the spray dried powder; and
 - a ternary hydraulic binder.

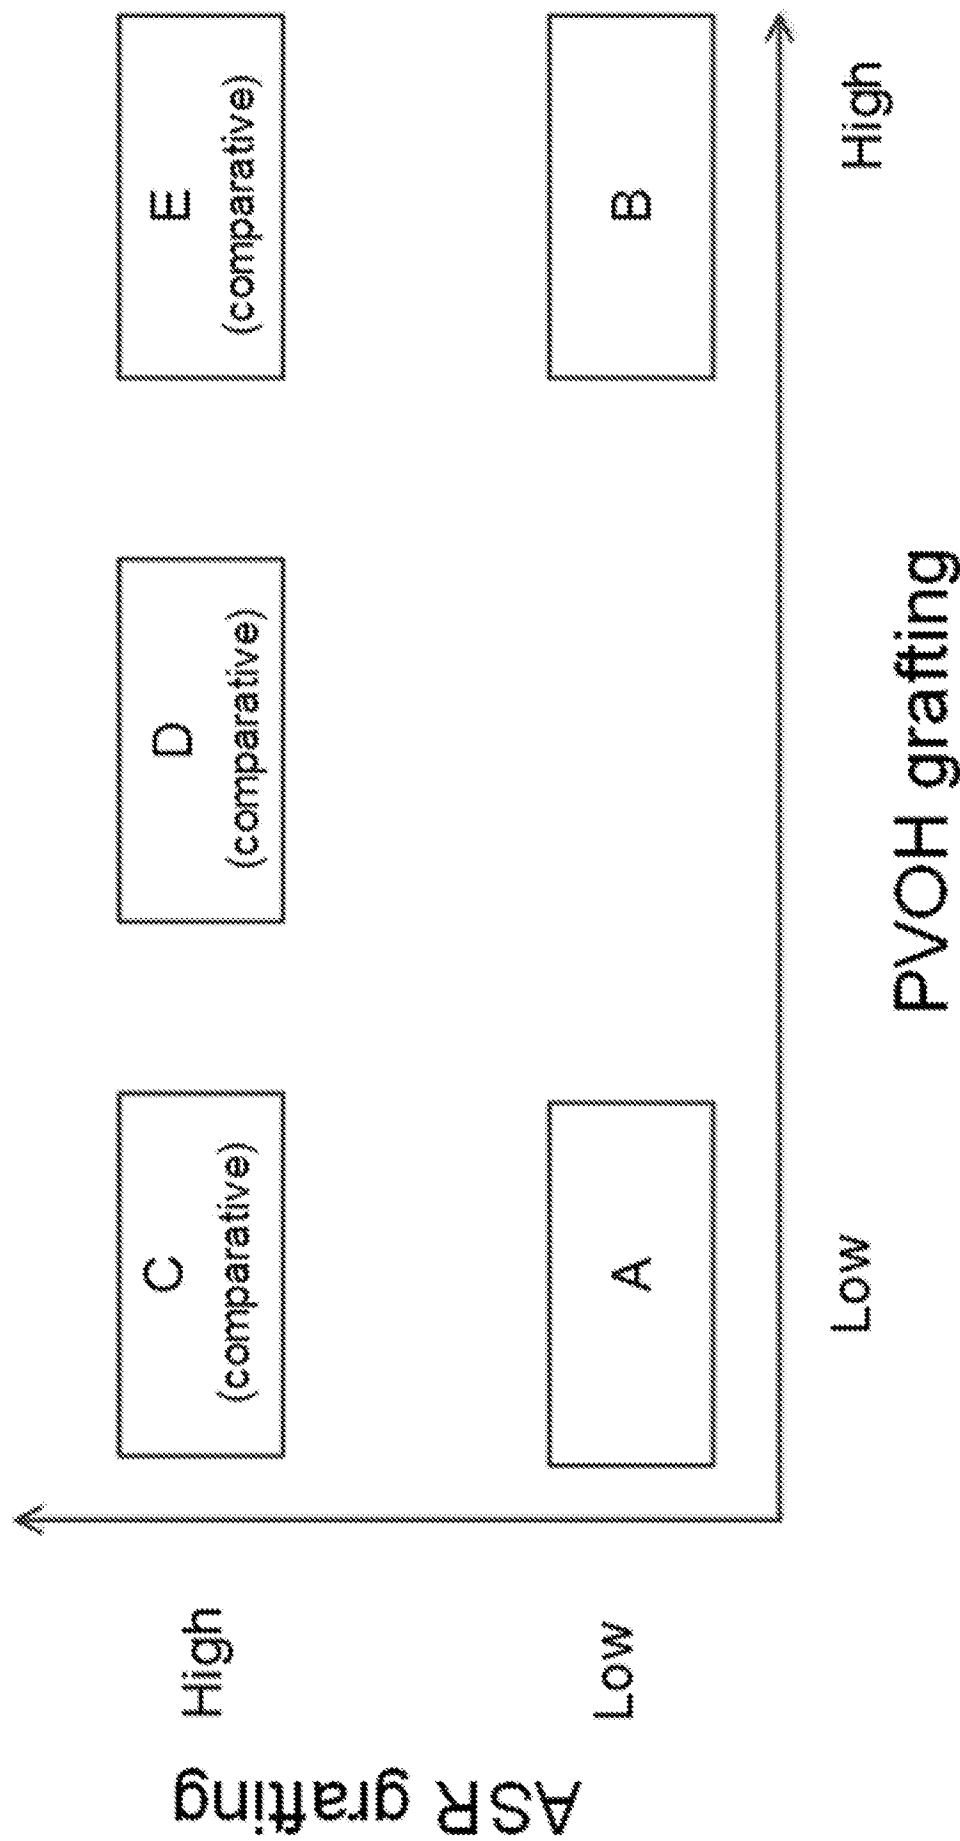

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2020/024683

A. CLASSIFICATION OF SUBJECT MATTER
INV. C08F265/06 C08F2/22 C04B26/06 C08F265/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 597 567 A2 (ROHM & HAAS [US]) 18 May 1994 (1994-05-18) claim 15; example 165; table 12 -----	1-15
X	EP 0 555 959 A1 (ROHM & HAAS [US]) 18 August 1993 (1993-08-18) examples 1-4 -----	1-12,15
A	WO 2013/134208 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]; ROHM & HAAS [US]) 12 September 2013 (2013-09-12) emulsions 13, 14; claims; examples -----	1-15
A	WO 2014/099574 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]; ROHM & HAAS [US]) 26 June 2014 (2014-06-26) claims; examples ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 June 2020

Date of mailing of the international search report

24/06/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Degrendel, Magali

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2020/024683

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 654 454 A1 (ROHM & HAAS [US]) 24 May 1995 (1995-05-24) claims; examples -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2020/024683

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0597567	A2	18-05-1994	AT 183518 T 15-09-1999
		AU 670944 B2 08-08-1996	
		BR 9302021 A 17-05-1994	
		CA 2093483 A1 14-05-1994	
		CN 1089621 A 20-07-1994	
		CN 1270176 A 18-10-2000	
		DE 69326046 D1 23-09-1999	
		DE 69326046 T2 13-04-2000	
		EP 0597567 A2 18-05-1994	
		ES 2137971 T3 01-01-2000	
		FI 933196 A 14-05-1994	
		HR P931067 A2 30-06-1996	
		IL 106312 A 30-09-1997	
		JP 3248599 B2 21-01-2002	
		JP H06199914 A 19-07-1994	
		KR 940011485 A 21-06-1994	
		NZ 248140 A 26-07-1995	
		PL 299753 A1 16-05-1994	
		RU 2133756 C1 27-07-1999	
		SG 73370 A1 20-06-2000	
		SI 9300384 A 30-06-1994	
		SK 75193 A3 08-06-1994	
		TW 230211 B 11-09-1994	
		US 5369163 A 29-11-1994	
		ZA 9305265 B 13-05-1994	
EP 0555959	A1	18-08-1993	AU 659266 B2 11-05-1995
		BR 9300473 A 17-08-1993	
		CA 2088956 A1 15-08-1993	
		CN 1075323 A 18-08-1993	
		EP 0555959 A1 18-08-1993	
		FI 930636 A 15-08-1993	
		JP H061811 A 11-01-1994	
		KR 930017922 A 20-09-1993	
		PL 297714 A1 02-11-1993	
		SK 7493 A3 09-09-1993	
		TW 216433 B 21-11-1993	
		US 5328952 A 12-07-1994	
		ZA 9300982 B 29-09-1993	
WO 2013134208	A1	12-09-2013	CN 104136472 A 05-11-2014
		EP 2804881 A1 26-11-2014	
		JP 6089048 B2 01-03-2017	
		JP 2015516993 A 18-06-2015	
		US 2015111995 A1 23-04-2015	
		WO 2013134208 A1 12-09-2013	
WO 2014099574	A1	26-06-2014	BR 112015013008 A2 22-08-2017
		CN 104854170 A 19-08-2015	
		EP 2909255 A1 26-08-2015	
		JP 6291507 B2 14-03-2018	
		JP 2016507603 A 10-03-2016	
		TR 201809644 T4 23-07-2018	
		US 2015337158 A1 26-11-2015	
		WO 2014099574 A1 26-06-2014	
EP 0654454	A1	24-05-1995	AU 7881494 A 01-06-1995
		BR 9404480 A 11-07-1995	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2020/024683

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CA 2135976 A1	23-05-1995
		CN 1109033 A	27-09-1995
		EP 0654454 A1	24-05-1995
		JP H07187741 A	25-07-1995
		KR 950014022 A	15-06-1995
		ZA 9409088 B	21-07-1995
