


A. GOLICK.
COMBINATION GARMENT.
APPLICATION FILED NOV. 1, 1910.

1,011,339.


Patented Dec. 12, 1911.
3 SHEETS-SHEET 1.

Fig. 1.

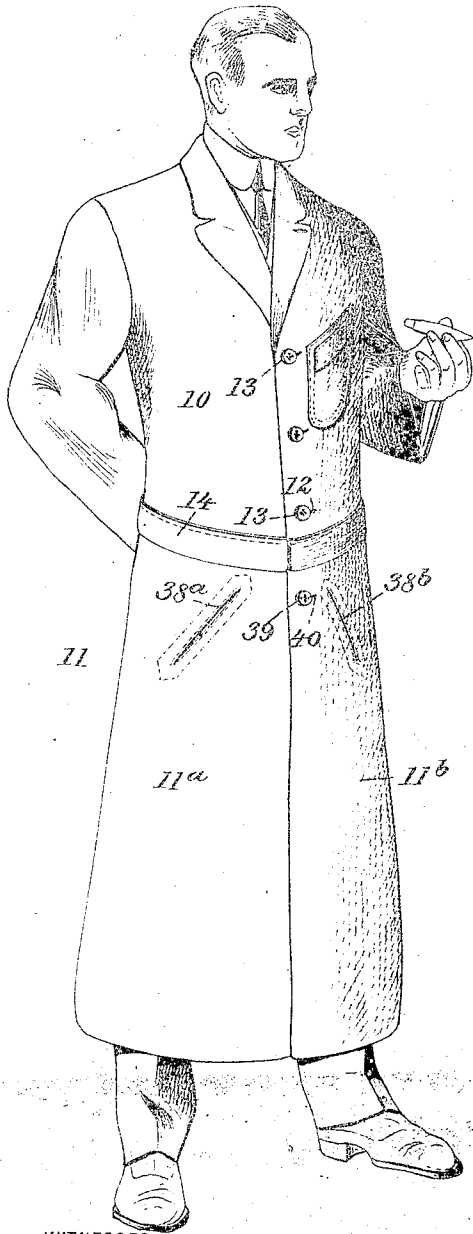

WITNESSES
Julius H. [Signature]
Adwin V. Dietrich

Fig. 2.

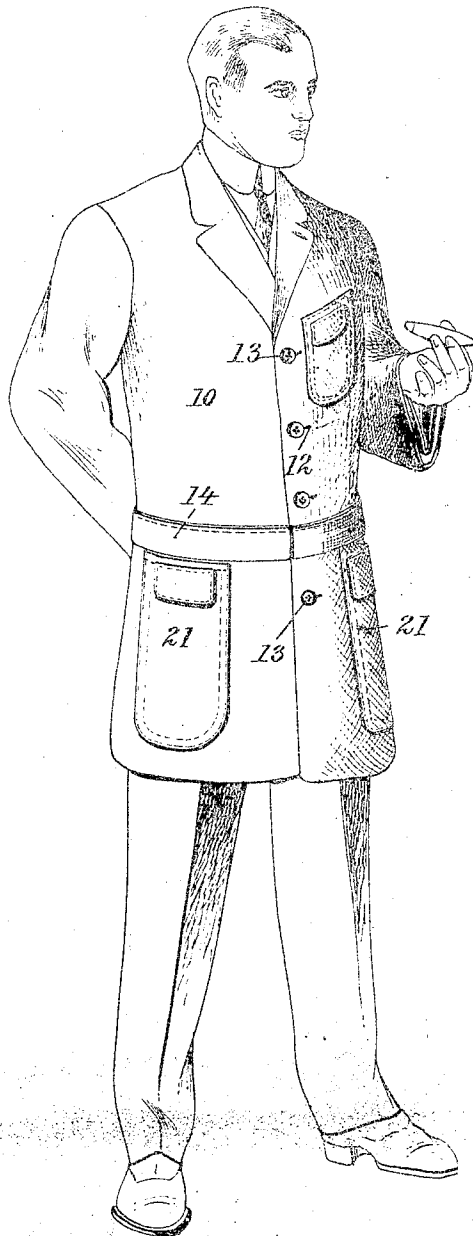

INVENTOR
Anthony Golick
BY
Comad A. Dietrich
his ATTORNEY

1,011,339.

Patented Dec. 12, 1911.

3 SHEETS—SHEET 2.

Fig. 3.

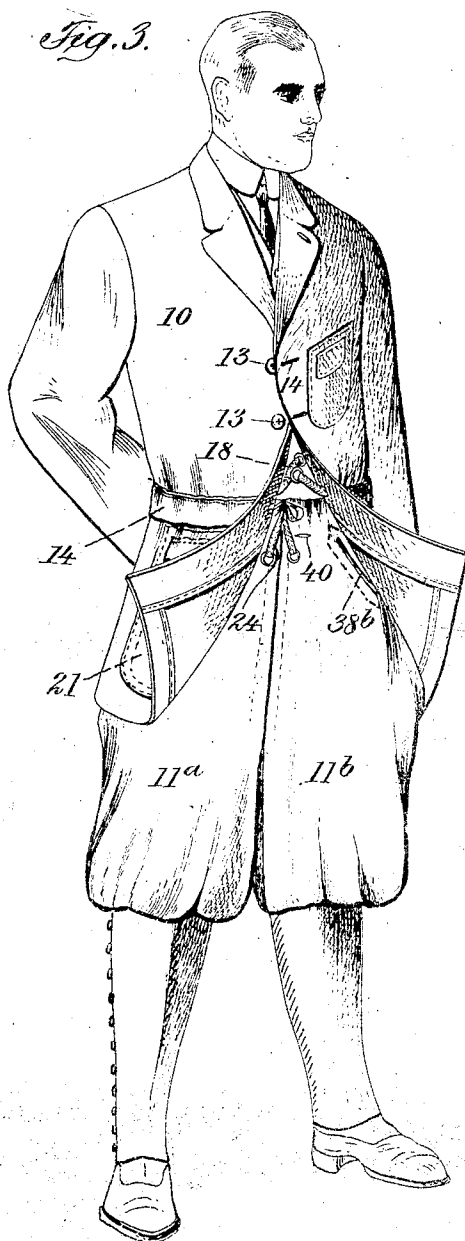


Fig. 9.




Fig. 8.





Fig. 11.

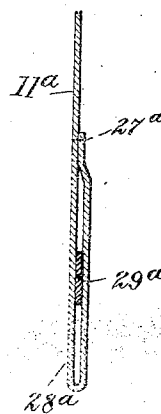

WITNESSES
Julius H. Hutz
Edwin H. Bietrich






INVENTOR
Antony Golick
BY
Conrad A. Schell
his ATTORNEY

A. GOLICK.
COMBINATION GARMENT.
APPLICATION FILED NOV. 1, 1910.

1,011,339.

Patented Dec. 12, 1911.

3 SHEETS-SHEET 3.

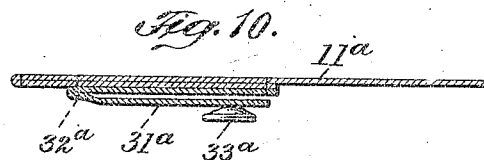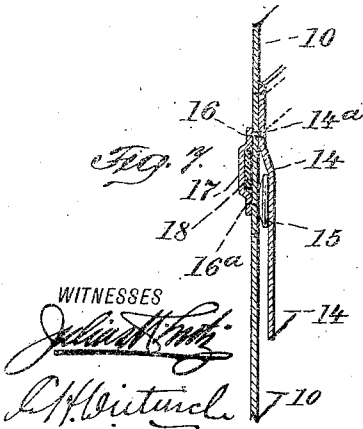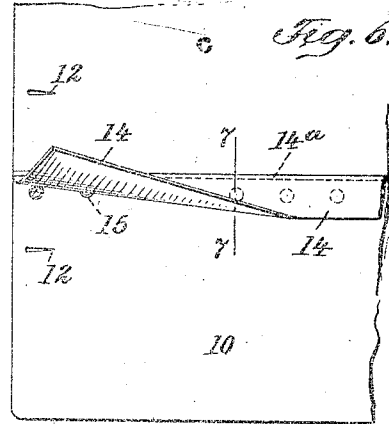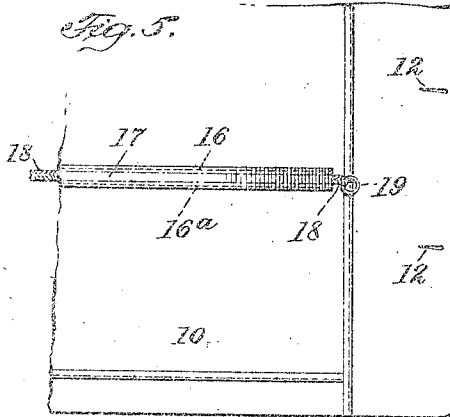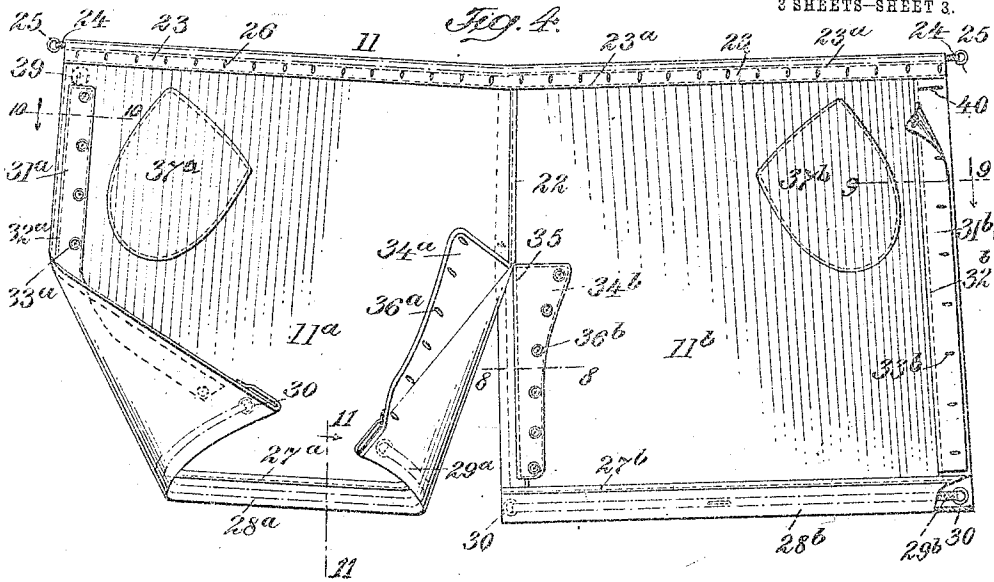

INVENTOR
Anthony Golick
BY
Conrad A. Dietrich
his ATTORNEY

UNITED STATES PATENT OFFICE.

ANTONY GOLICK, OF NEW YORK, N. Y.

COMBINATION-GARMENT.

1,011,339

Specification of Letters Patent.

Patented Dec. 12, 1911.

Application filed November 1, 1910. Serial No. 590,104.

To all whom it may concern:

Be it known that I, ANTONY GOLICK, a subject of the Emperor of Austria-Hungary, residing at the city of New York, borough of the Bronx, in the county and State of New York, have invented certain new and useful Improvements in Combination-Garments, of which the following is a full, clear, and exact specification.

My invention relates to improvements in wearing apparel, and the same has for its object more particularly to provide a garment comprising essentially two parts which may be so combined as to form jointly several forms of garment, or separated from each other and one part used independently of the other, and worn as a complete article of apparel.

Further, said invention has for its object to provide a garment comprising a body-portion and a skirt-portion which latter may be detached from said body-portion and readily converted into a pair of trousers.

Further, said invention has for its object to provide a garment in the form of a coat having a skirt-portion so arranged that the coat may be worn with the skirt-portion attached thereto to form a long-coat, or the coat-portion may be worn without the skirt-portion as a short coat or Norfolk jacket.

Further, said invention has for its object to provide a garment having a skirt-portion so arranged and constructed that the same may be detached from the upper or body-portion of the coat and the vertical edges of said skirt-portion secured together to form a pair of loose knee trousers.

To the attainment of the aforesaid objects and ends, my invention consists in the novel details of construction, and in the combination, connection and arrangement of parts hereinafter more fully described and then pointed out in the claims.

In the accompanying drawings forming part of this specification, wherein like numerals of reference indicate like parts, Figure 1 is a front view showing one form of garment constructed according to and embodying my said invention; the same being shown in position upon the wearer as a long coat; Fig. 2 is a similar view showing the skirt-portion of the coat removed and the coat worn as a short coat, or Norfolk jacket; Fig. 3 is a similar view showing the coat worn as a short coat and partly thrown aside and the skirt-portion of the garment con-

verted into a pair of loose trousers; Fig. 4 is an inside view of the skirt-portion detached from the coat-portion and spread out; Fig. 5 is an enlarged detail face view showing the inner side of the coat adjacent to its lower front edge and illustrating the manner of supporting the drawing string therein; Fig. 6 is a similar view showing the outside view of the coat shown at Fig. 5, and showing the covering flap thereon; Fig. 7 is an enlarged detail vertical section taken on the line 7-7 of Fig. 6; Fig. 8 is an enlarged detail horizontal section taken on the line 8-8 of Fig. 4; Fig. 9 is an enlarged detail horizontal section taken on the line 9-9 of Fig. 4; Fig. 10 is an enlarged detail horizontal section taken on the line 10-10 of Fig. 4, and Fig. 11 is a vertical section taken on line 11-11 of said Fig. 4.

In said drawings the garment is shown as comprising essentially a coat-portion 10, and a detachable skirt-portion 11. The coat-portion 10 has the general form and appearance of an ordinary coat, and is provided along one of its front edges with a series of button holes 12, and along its opposite front edge with a series of buttons 13 adapted to engage therewith. At the waist line of the coat-portion 10 is provided a flap 14 which extends entirely along said portion, and has its ends terminating at the opposite front edges of the garment. The said flap 14 is relatively narrow, and is secured along its upper edge by a row of stitching 14^a to the outer side of the coat, and upon the outer side of the coat-portion 10 below the flap 14 is secured a row of buttons 15. Upon the inner side of said coat-portion, and in line and behind the flap 14 is arranged a strip of fabric which is secured along its longitudinal edges by rows of stitching 16, 16^a and forms a casing 17 for a draw string 18, which latter has its ends projecting out of said casing and provided with eyes 19, 19. Below said flap 14, the coat is provided with the usual side pockets 21, 21. The detachable skirt-portion 11 is substantially rectangular in form and composed of two correspondingly shaped sections 11^a 11^b sewed together along the upper portion of their vertical overlapping edges at 22. Upon the inner side of said skirt-portion 11, along its upper edge, is arranged a narrow strip of fabric 23 which is secured thereto by a plurality of separated parallel rows of stitching 23^a,

thereby forming a casing for a draw string 24 having eyes 25, 25 at its projecting ends. Along the upper edge of the skirt-section 11, just below the casing 23, is provided a series of vertical button holes 26 which extend through the strip of fabric 23, and also the material of which said skirt sections 11^a 11^b is made. The lower edges of the skirt-sections 11^a 11^b are folded inward and upward and secured to said skirt-sections by horizontal rows of stitching 27^a, 27^b to form casings 28^a 28^b to receive draw strings 29^a 29^b respectively, which are provided at their opposite ends with eyes 30, 30.

Upon the inner sides of the skirt-sections 11^a 11^b adjacent to the outer vertical edges, are arranged flaps 31^a 31^b, the flap 31^a being secured along its outer edge to skirt-section 11^a adjacent to the outer edge thereof by a row of stitching 32^a, and provided with buttons 33^a, and the corresponding flap 31^b is secured along its inner vertical edge to the skirt-section 11^b by a row of stitching 32^b, and has its outer edge free and provided with button holes 33^b. The inner opposing edges of the skirt-sections 11^a 11^b which are free, are provided with flaps 34^a 34^b having their straight edges secured to the separated inner edges of said skirt-sections 11^a 11^b by rows of stitching 35, and their free edges provided with button holes 36^a adapted to engage with the correspondingly located buttons 33^a of the flap 31^a, and buttons 36^b adapted to engage with the correspondingly located button holes 33^b arranged in the flap 31^b. The flaps 34^a 34^b are made narrow at their lower portions and become gradually wider toward their upper horizontal edges which are free from said skirt-sections. The flap 34^a is arranged to lie normally within the outline of the skirt section to which it is permanently attached, and the flap 34^b is arranged to project normally beyond the outline of the skirt portion to which said flap 34^a is permanently attached. The skirt-sections 11^a 11^b are provided adjacent to their upper outer edges with incline pockets 37^a 37^b, having diagonal slits or mouths 38^a 38^b, respectively. The skirt-section 11^a is provided upon its outer side adjacent to its vertical edge and directly below the casing 23 with a button 39, and the skirt-section 11^b is provided at its corresponding place with a button hole 40 adapted to engage with the button 39 of the skirt-section 11^a.

When the garment is to be worn as a long coat, as illustrated at Fig. 1, it merely becomes necessary to attach the skirt-portion 11 by means of the button holes 26 to the buttons 15 arranged upon the outer surface of the coat-portion 10 below the flap 14.

When the coat is to be worn as a short coat, or Norfolk jacket, as illustrated at Fig. 2, it merely becomes necessary to de-

tach the skirt-portion 11 from the coat-portion 10 by releasing the button holes 26 of their engagement with the buttons 15, and then tightening the draw string 18 and fastening the ends thereof together.

When the garment is to be worn as a suit, comprising the short coat and a pair of loose trousers, the skirt-portion 11 must be detached from the coat-portion 10. Hereupon the flap 34^a is released by unbuttoning the same from the buttons 36^b on the flap 34^b, and said flap 34^a then brought forward and the six button holes 36^a thereof engaged with the corresponding number of buttons 33^a secured upon the lower portion of the flap 31^a arranged at the outer or free edge of the skirt-portion 11^a, and the buttons 36^b of the flap 34^b engaged with the correspondingly located button holes 33^b in the lower portion of the flap 31^b arranged along the outer edge of the skirt section 11^b. Hereupon the remaining buttons 33^a of the flap 31^a are caused to engage with the correspondingly located button holes 33^b arranged in the upper portion of the flap 31^b of the skirt-section 11^b, thus forming a pair of trousers. When the trousers have been adjusted in position upon the wearer, the draw string 24 is tightened along the waist and the ends thereof secured together, as illustrated at Fig. 3. The lower portion of each leg section is adapted to be secured in position upon the leg of the wearer by tightening up the draw strings 29^a 29^b, and securing the ends thereof together in order to produce the baggy effect seen at Fig. 3.

It will be noted that by means of my combined garment, I am enabled to produce a coat of two different forms, namely, a long coat and a short coat, or Norfolk jacket, and when the skirt-portion of the coat is detached from the body-portion thereof, the same may be converted into a pair of knee trousers by fastening the lower portions of each skirt-section together and then fastening the upper portion of the skirt portion together, as herein described.

Having thus described my invention, what I claim and desire to secure by Letters Patent is,

1. A garment of the character described comprising a coat-portion and a skirt-portion comprising two similarly-shaped sections partly separated at their lower inner edges, flaps arranged along the outer vertical edges of said skirt-sections and shorter flaps arranged along the inner separated edges of said skirt-sections, one of said flaps being adapted to lie normally within the outline of its skirt section and the other of said shorter flaps normally projecting beyond the outlines of its skirt section, means for securing the edges of said shorter flaps to the lower portions of the flaps arranged along the outer edges of said skirt sections,

and means for securing the upper portions of said outer flaps together, substantially as specified.

2. A garment of the character described
5 comprising a coat-portion, attaching devices arranged upon the outer side of said coat-portion and extending around the same, a covering flap secured along its upper edge
10 to said coat-portion and normally covering said attaching devices, a casing arranged upon the inner side of said coat-portion to the rear of said covering flap, a draw string arranged in said casing, and a skirt-portion
15 comprising two similarly-shaped sections partly separated at their inner adjoining edges, flaps arranged along the outer vertical edges of said skirt sections, shorter flaps arranged along the inner separated edges of

said skirt sections, means for securing the edges of said shorter flaps to the lower portions of the flaps arranged along the outer edges of said skirt sections, means for securing the upper portions of said outer flaps together to form a pair of trousers, and casings arranged in the lower edges of each of
20 said skirt sections and draw strings in said casings, substantially as specified.

Signed at the city of New York, in the county and State of New York, this seventeenth day of October, one thousand nine
25 hundred and ten.

ANTONY GOLICK.

Witnesses:

CONRAD A. DIETERICH,
JOSEPH G. QUINN, JR.