



US 20120143113A1

(19) **United States**(12) **Patent Application Publication**
Robinson et al.(10) **Pub. No.: US 2012/0143113 A1**(43) **Pub. Date: Jun. 7, 2012**(54) **WOUND HEALING APPARATUS FOR
PROMOTING GRANULATION AND
EPITHELIALISATION AT A TISSUE SITE****Publication Classification**(51) **Int. Cl.***A61F 13/00* (2006.01)*A61M 1/00* (2006.01)(52) **U.S. Cl.** 602/43; 604/319


(57)


ABSTRACT

An apparatus for promoting granulation and epithelialisation at a tissue site having a substantially gas impermeable, flexible mat. A plurality of projections extend from a surface of the substantially gas impermeable, flexible mat, and each projection has a first end connected to the surface and a second end opposing the first end. A flexible membrane is positioned adjacent the second end of at least a portion of the plurality of projections and the flexible membrane is sufficiently flexible to allow deformation of the flexible membrane by the at least the portion of the plurality of projections when a biasing force exerted on the substantially gas impermeable, flexible mat or the plurality of projections is greater than or equal to a threshold force.

(76) **Inventors:** **Timothy Mark Robinson,**
Basingstoke (GB); **Christopher**
Brian Locke, Bournemouth (GB);
Richard Daniel John Coulthard,
Verwood (GB)(21) **Appl. No.: 13/311,873**(22) **Filed: Dec. 6, 2011****Related U.S. Application Data**

(60) Provisional application No. 61/420,678, filed on Dec. 7, 2010.

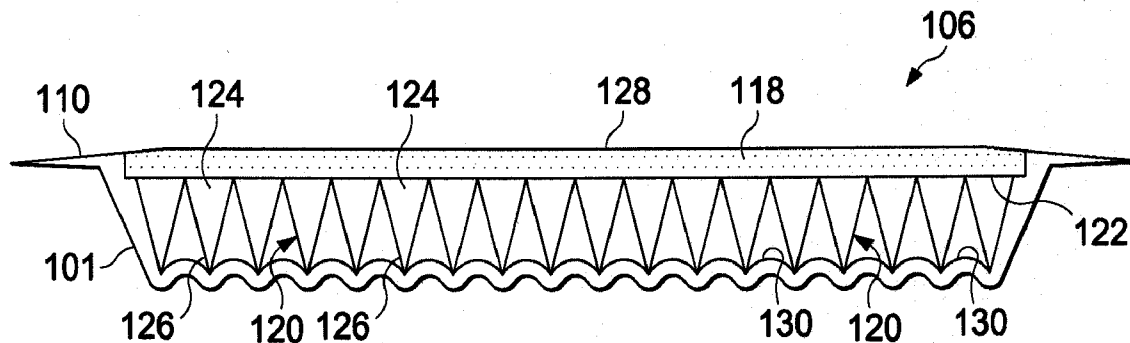

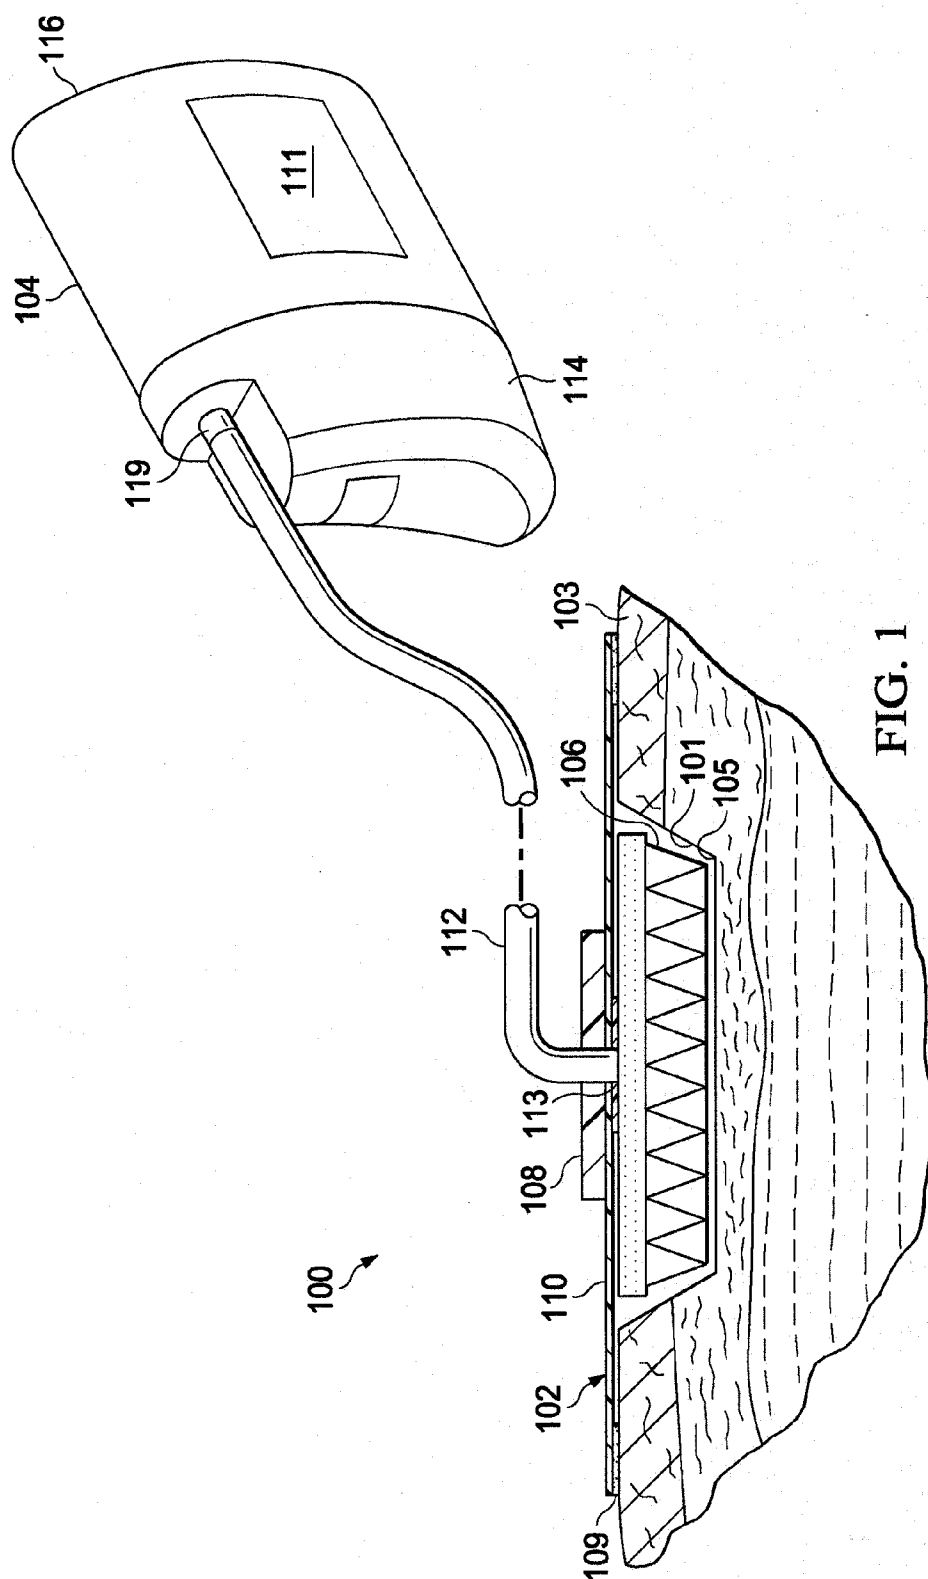

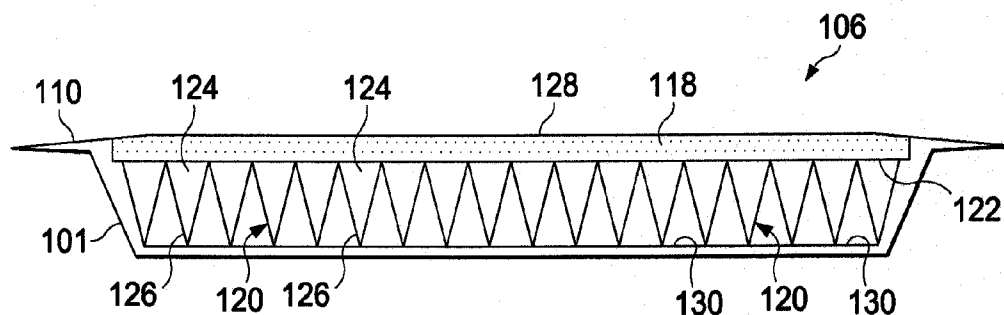


FIG. 2A

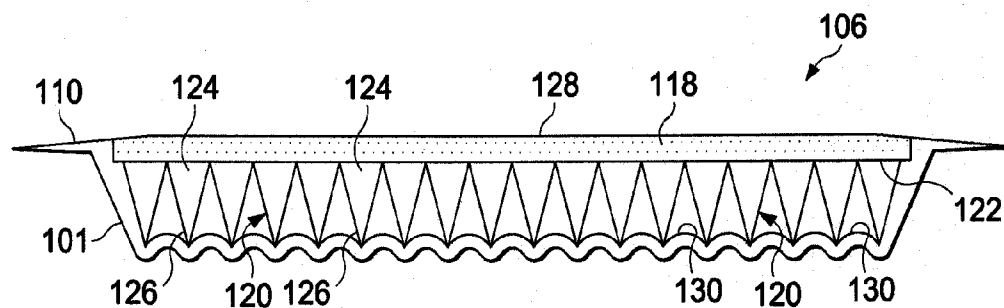


FIG. 2B

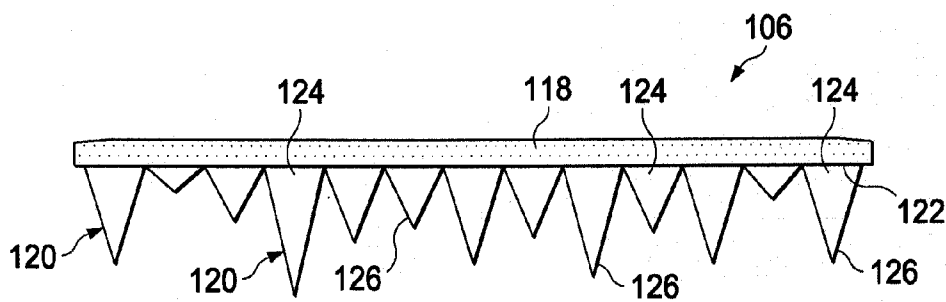


FIG. 3

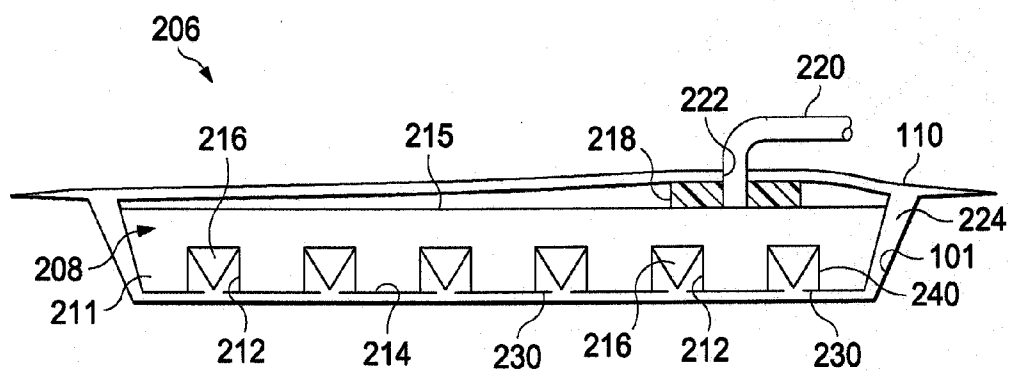


FIG. 4A

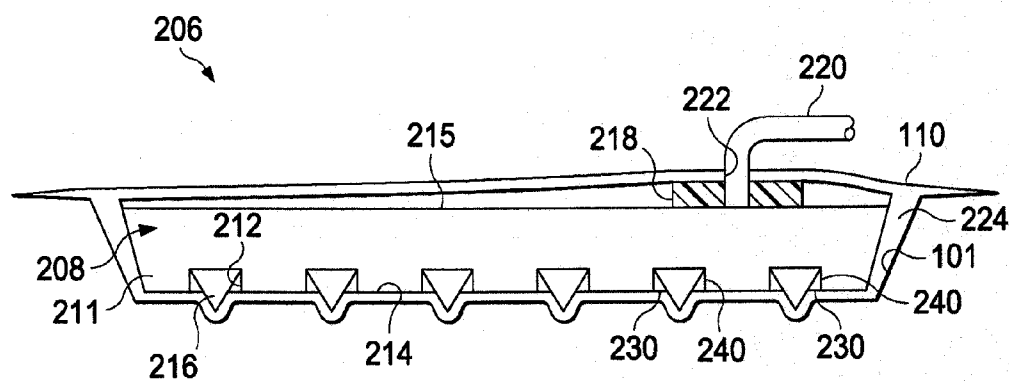


FIG. 4B

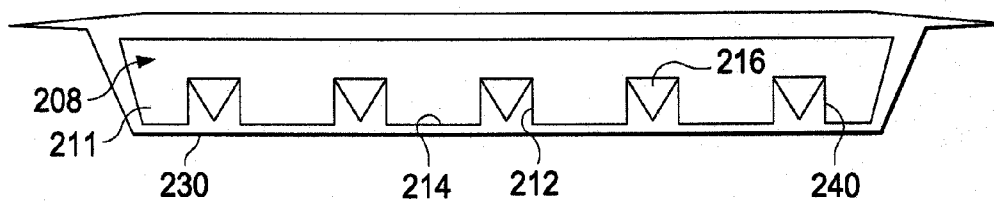


FIG. 4C

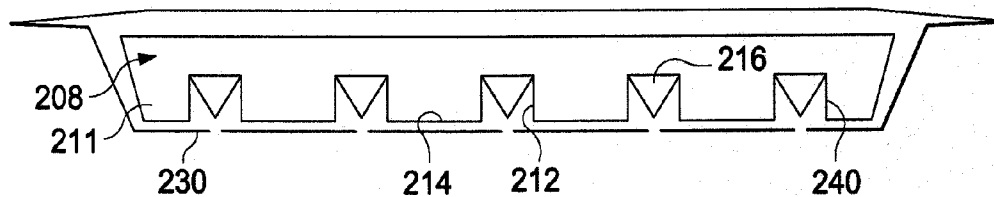


FIG. 4D

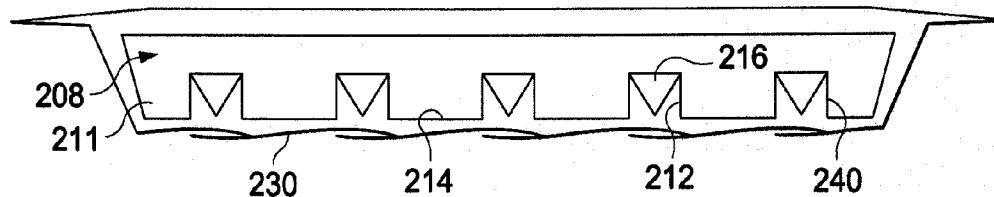


FIG. 4E

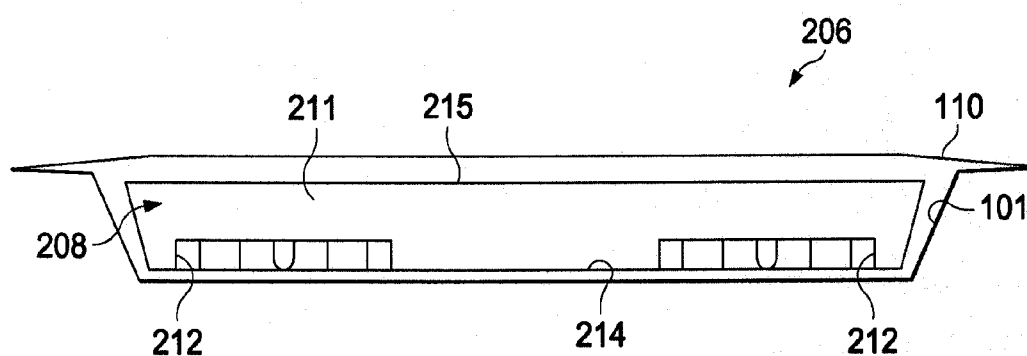


FIG. 5A

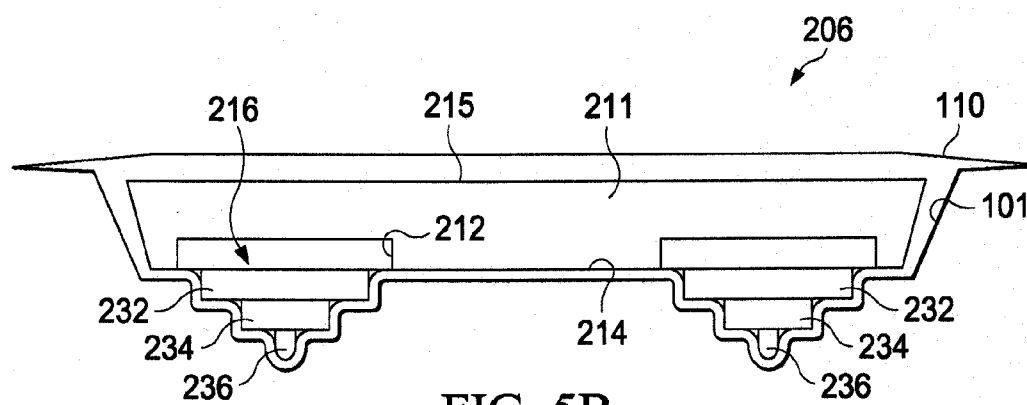


FIG. 5B

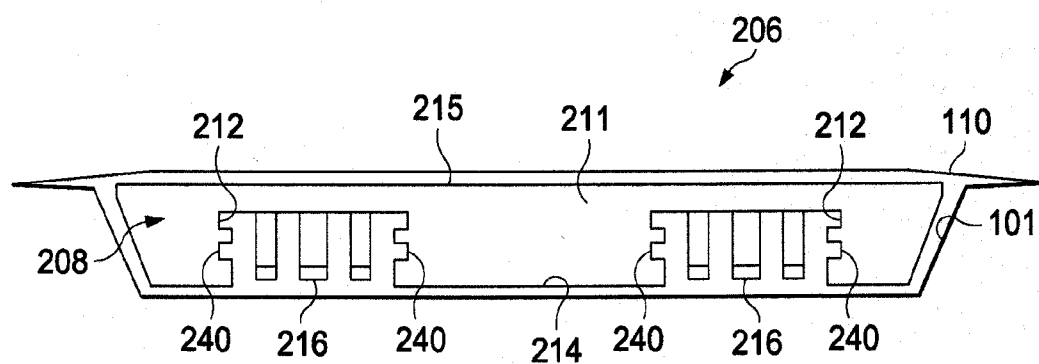


FIG. 6A

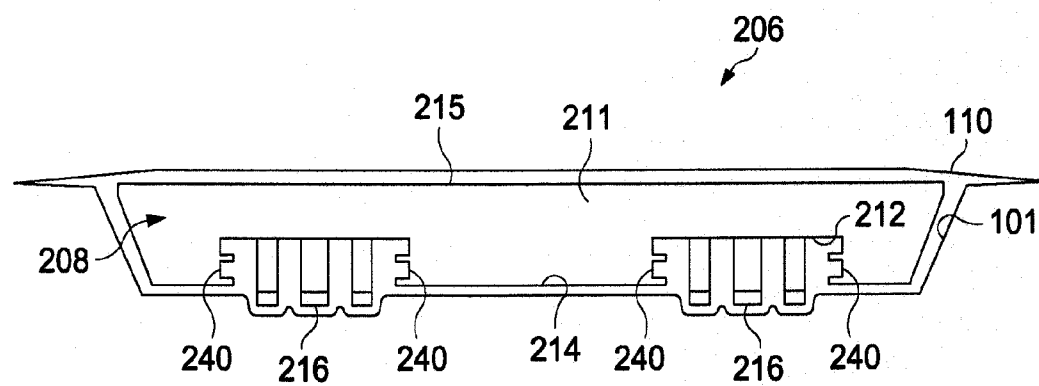


FIG. 6B

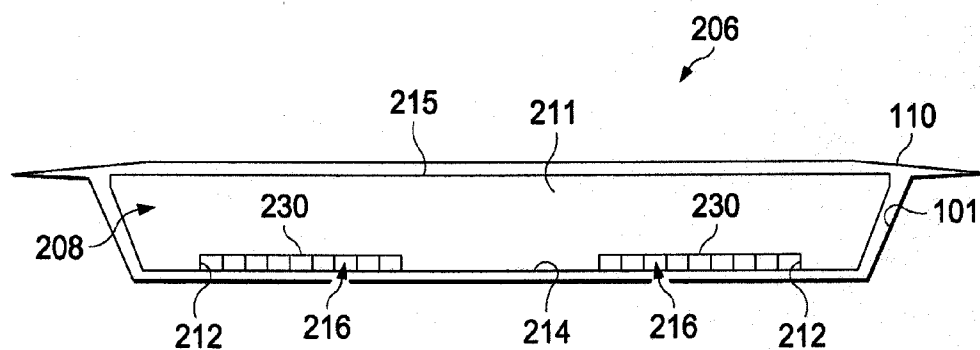


FIG. 7A

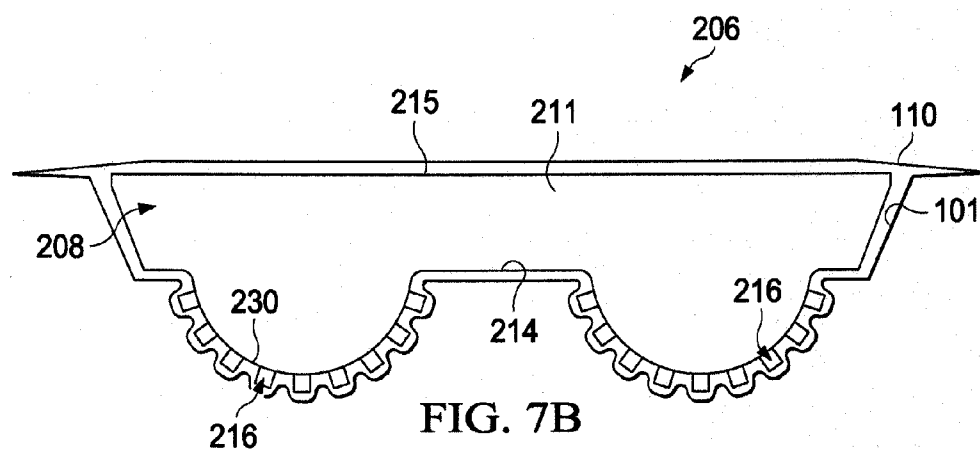


FIG. 7B

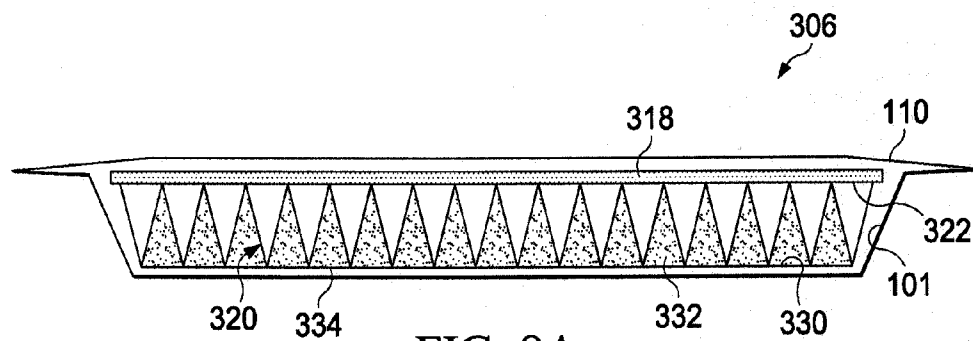


FIG. 8A

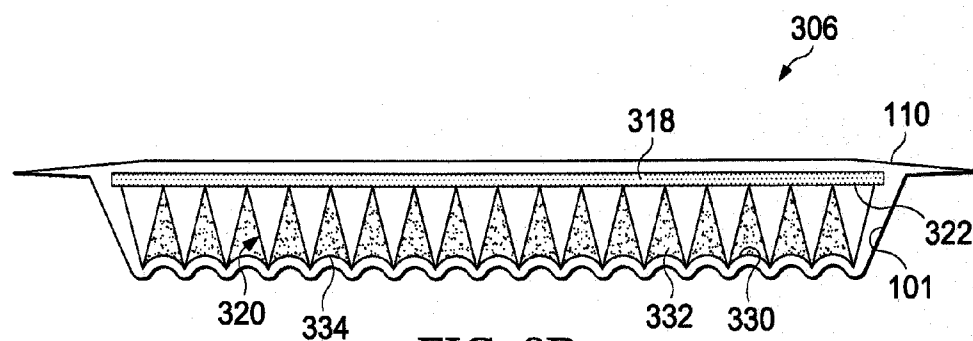


FIG. 8B

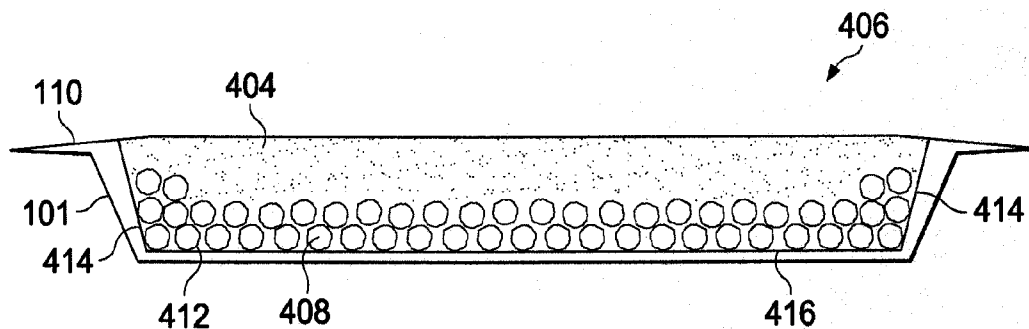


FIG. 9A

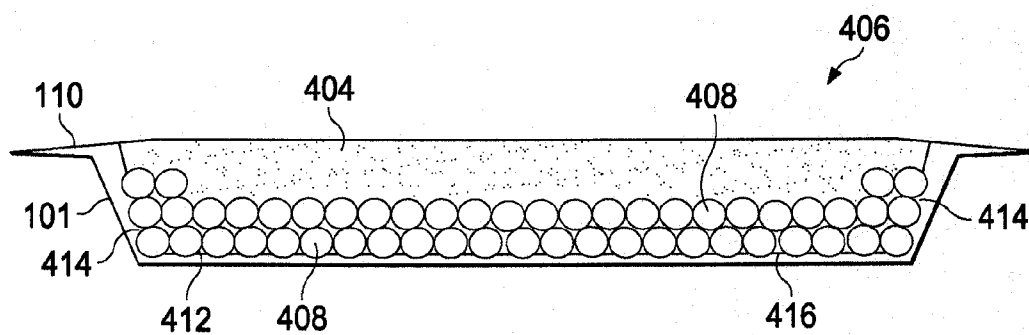


FIG. 9B

WOUND HEALING APPARATUS FOR PROMOTING GRANULATION AND EPITHELIALISATION AT A TISSUE SITE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 61/420,678, filed Dec. 7, 2010, which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates generally to reduced pressure treatment systems and more particularly to a wound healing apparatus for promoting granulation and epithelialisation at a tissue site.

[0004] 2. Description of Related Art

[0005] Clinical studies and practice have shown that providing a reduced pressure in proximity to a tissue site augments and accelerates the growth of new tissue at the tissue site. The applications of this phenomenon are numerous, but one particular application of reduced pressure involves treating wounds. This treatment (frequently referred to in the medical community as “negative pressure wound therapy,” “reduced pressure therapy,” or “vacuum therapy”) provides a number of benefits, including migration of epithelial and subcutaneous tissues, improved blood flow, and micro-deformation of tissue at the wound site. Together these benefits result in increased development of granulation tissue and faster healing times. Typically, reduced pressure is applied by a reduced pressure source to tissue through a porous pad or other manifold device. The porous pad contains cells or pores that are capable of distributing reduced pressure to the tissue and channeling fluids that are drawn from the tissue. The porous pad often is incorporated into a dressing having other components that facilitate treatment.

SUMMARY

[0006] The problems presented by existing reduced pressure systems and wound healing pads are solved by the systems and methods of the illustrative embodiments described herein. An apparatus for promoting granulation and epithelialisation at a tissue site includes a substantially gas impermeable, flexible mat. A plurality of projections extend from a surface of the substantially gas impermeable, flexible mat, and each projection has a first end connected to the surface and a second end opposing the first end. A flexible membrane is positioned adjacent the second end of at least a portion of the plurality of projections and the flexible membrane is sufficiently flexible to allow deformation of the flexible membrane by the at least a portion of the plurality of projections when a biasing force exerted on the substantially gas impermeable, flexible mat or the plurality of projections is greater than or equal to a threshold force.

[0007] In another embodiment, an apparatus for promoting granulation and epithelialisation at a tissue site includes a hollow mat having an inner chamber and a plurality of recesses disposed in proximity to a first surface of the hollow mat. An extendable projection is positioned within each recess and configured to extend from the recess when a pressure (p_1) within the inner chamber is greater than a pressure (p_2) in the recess.

[0008] In still another embodiment, an apparatus for promoting granulation and epithelialisation at a wound includes a porous pad having a first compressibility. A plurality of granulation promoters are embedded within the porous pad and have a second compressibility less than the first compressibility of the porous pad. The granulation promoters are positioned near a surface of the porous pad. A biasing force applied to the porous pad or granulation promoters that is greater than or equal to a threshold amount causes the granulation promoters to extend from the porous pad or alters the surface of the porous pad to promote granulation.

[0009] In yet still another embodiment, an apparatus for promoting granulation and epithelialisation of a tissue site includes a porous, reticulated foam having a tissue-contacting surface that is sufficiently rough to promote granulation. A hydrogel-forming material is disposed in at least a portion of the porous, reticulated foam such that the introduction of a liquid into the porous pad causes the hydrogel-forming material to moisten and expand, thereby altering the tissue-contacting surface to be sufficiently smooth to promote epithelialisation.

[0010] In another embodiment, a reduced pressure treatment system for administering reduced pressure treatment to a tissue site includes a reduced pressure source and a manifold in fluid communication with the reduced pressure source to provide a reduced pressure to the tissue site. The manifold has a tissue-contacting surface in contact with the tissue site, and the tissue-contacting surface has a granulation configuration and an epithelialisation configuration such that at least one of the granulation configurations and the epithelialisation configurations is activated by an activation stimulus.

[0011] In still another embodiment, a reduced pressure treatment system for administering reduced pressure treatment to a tissue site includes a reduced pressure source and an apparatus fluidly coupled to the reduced pressure source and positioned at the tissue site. The apparatus includes a substantially gas impermeable, flexible mat. A plurality of projections extend from a surface of the substantially gas impermeable, flexible mat, and each projection has a first end connected to the surface and a second end opposing the first end. A flexible membrane is positioned adjacent the second end of at least a portion of the plurality of projections and the flexible membrane is sufficiently flexible to allow deformation of the flexible membrane by the at least a portion of the plurality of projections when a biasing force exerted on the substantially gas impermeable, flexible mat or the plurality of projections is greater than or equal to a threshold force. A drape formed of substantially impermeable material covers the apparatus and the tissue site to substantially maintain the reduced pressure at the tissue site.

[0012] In another embodiment, a reduced pressure treatment system for administering reduced pressure treatment to a tissue site includes a reduced pressure source and an apparatus fluidly coupled to the reduced pressure source and positioned at the tissue site. The apparatus includes a hollow mat having an inner chamber and a plurality of recesses disposed in proximity to a first surface of the hollow mat. An extendable projection is positioned within each recess and configured to extend from the recess when a pressure (p_1) within the inner chamber is greater than a pressure (p_2) in the recess. A drape formed of substantially impermeable material covers the apparatus and the tissue site to substantially maintain the reduced pressure at the tissue site.

[0013] In yet still another embodiment, a reduced pressure treatment system for administering reduced pressure treatment to a tissue site includes a reduced pressure source and an apparatus fluidly coupled to the reduced pressure source and positioned at the tissue site. The apparatus includes a porous pad having a first compressibility. A plurality of granulation promoters are embedded within the porous pad and have a second compressibility less than the first compressibility of the porous pad. The granulation promoters are positioned near a surface of the porous pad. A biasing force applied to the porous pad or granulation promoters that is greater than or equal to a threshold amount causes the granulation promoters to extend from the porous pad or alters the surface of the porous pad to promote granulation. A drape formed of substantially impermeable material covers the apparatus and the tissue site to substantially maintain the reduced pressure at the tissue site.

[0014] In another embodiment, a reduced pressure treatment system for administering reduced pressure treatment to a tissue site includes a reduced pressure source and an apparatus fluidly coupled to the reduced pressure source and positioned at the tissue site. The apparatus includes a porous, reticulated foam having a tissue-contacting surface that is sufficiently rough to promote granulation. A hydrogel-forming material is disposed in at least a portion of the porous, reticulated foam such that the introduction of a liquid into the porous pad causes the hydrogel-forming material to moisten and expand, thereby altering the tissue-contacting surface to be sufficiently smooth to promote epithelialisation. A drape formed of substantially impermeable material covers the apparatus and the tissue site to substantially maintain the reduced pressure at the tissue site.

[0015] In still another embodiment, a reduced pressure treatment system having a reduced pressure source and a manifold may be paired with any of the apparatuses described herein.

[0016] In another embodiment, a method for selectively promoting granulation and epithelialisation of a tissue site includes positioning a pad having a tissue-contacting surface at the tissue site. Reduced pressure is applied to the tissue site when the tissue-contacting surface is in a first configuration to promote granulation. The first configuration of the tissue-contacting surface is changed to a second configuration. A reduced pressure is applied to the tissue site when the tissue-contacting surface is in the second configuration to promote epithelialisation.

[0017] Other objects, features, and advantages of the illustrative embodiments will become apparent with reference to the drawings and detailed description that follow.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 illustrates a perspective view with a portion shown in cross-section of a reduced pressure treatment system for administering reduced pressure treatment to a tissue site according to an illustrative embodiment;

[0019] FIG. 2A illustrates a cross-sectional view of an illustrative, non-limiting embodiment of a wound healing apparatus of the reduced pressure treatment system of FIG. 1 in a state for promoting epithelialisation;

[0020] FIG. 2B illustrates a cross-sectional view of the wound healing apparatus of FIG. 2A in a state for promoting granulation;

[0021] FIG. 3 illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus;

[0022] FIG. 4A illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus in a state for promoting epithelialisation;

[0023] FIG. 4B illustrates a cross-sectional view of the wound healing apparatus of FIG. 4A in a state for promoting granulation;

[0024] FIG. 4C illustrates a cross-sectional view of another illustrative, non-limiting embodiment of the wound healing apparatus of FIG. 4A;

[0025] FIG. 4D illustrates a cross-sectional view of another illustrative, non-limiting embodiment of the wound healing apparatus of FIG. 4A;

[0026] FIG. 4E illustrates a cross-sectional view of another illustrative, non-limiting embodiment of the wound healing apparatus of FIG. 4A;

[0027] FIG. 5A illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus in a state for promoting epithelialisation;

[0028] FIG. 5B illustrates a cross-sectional view of the wound healing apparatus of FIG. 5A in a state for promoting granulation;

[0029] FIG. 6A illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus in a state for promoting epithelialisation;

[0030] FIG. 6B illustrates a cross-sectional view of the wound healing apparatus of FIG. 6A in a state for promoting granulation;

[0031] FIG. 7A illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus in a state for promoting epithelialisation;

[0032] FIG. 7B illustrates a cross-sectional view of the wound healing apparatus of FIG. 7A in a state for promoting granulation;

[0033] FIG. 8A illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus in a state for promoting epithelialisation;

[0034] FIG. 8B illustrates a cross-sectional view of the wound healing apparatus of FIG. 8A in a state for promoting granulation;

[0035] FIG. 9A illustrates a cross-sectional view of another illustrative, non-limiting embodiment of a wound healing apparatus with a hydrogel in an unexpanded state; and

[0036] FIG. 9B illustrates a cross-sectional view of the wound healing apparatus of FIG. 9A with the hydrogel in an expanded state.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0037] In the following detailed description of several illustrative embodiments, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is understood that other embodiments may be utilized and that logical structural, mechanical, electrical, and chemical changes may be made without departing from the spirit or scope of the invention. To avoid detail not necessary to enable those skilled in the art to practice the embodiments described herein, the description may omit certain information known to those skilled in the

art. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the illustrative embodiments are defined only by the appended claims. Unless otherwise indicated, as used herein, “or” does not require mutual exclusivity.

[0038] The term “reduced pressure” as used herein generally refers to a pressure less than the ambient pressure at a tissue site that is being subjected to treatment. In most cases, this reduced pressure will be less than the atmospheric pressure at which the patient is located. Alternatively, the reduced pressure may be less than a hydrostatic pressure associated with tissue at the tissue site. Although the terms “vacuum” and “negative pressure” may be used to describe the pressure applied to the tissue site, the actual pressure reduction applied to the tissue site may be significantly less than the pressure reduction normally associated with a complete vacuum. Reduced pressure may initially generate fluid flow in the area of the tissue site. As the hydrostatic pressure around the tissue site approaches the desired reduced pressure, the flow may subside, and the reduced pressure is then maintained. Unless otherwise indicated, values of pressure stated herein are gauge pressures. Similarly, references to increases in reduced pressure typically refer to a decrease in absolute pressure, while decreases in reduced pressure typically refer to an increase in absolute pressure.

[0039] Referring to FIG. 1, an illustrative embodiment of a reduced pressure treatment system **100** for treating a tissue site **101** on a patient with reduced pressure includes a dressing **102** placed proximate to the tissue site **101** and a reduced pressure treatment device **104** fluidly coupled to the dressing **102**. The dressing **102** includes a wound healing apparatus **106** for promoting both granulation and epithelialisation of the tissue site **101**. As used herein, the term “tissue site” may refer to a wound, such as a wound **105**, or defect located on or within any tissue, including but not limited to, bone tissue, adipose tissue, muscle tissue, neural tissue, dermal tissue, vascular tissue, connective tissue, cartilage, tendons, or ligaments. The term “tissue site” may further refer to areas of any tissue that are not necessarily wounded or defective, but are instead areas in which it is desired to add or promote the growth of additional tissue. For example, reduced pressure tissue treatment may be used in certain tissue areas to grow additional tissue that may be harvested and transplanted to another tissue location.

[0040] The wound healing apparatus **106** may be a manifold or fluidly connected to a manifold. The term “manifold” as used herein generally refers to a substance or structure that is provided to assist in applying reduced pressure to, delivering fluids to, or removing fluids from the tissue site **101**. The manifold typically includes a plurality of flow channels or pathways that distribute fluids provided to and removed from the tissue site around the manifold. In one illustrative embodiment, the flow channels or pathways are interconnected to improve distribution of fluids provided or removed from the tissue site **101**. Examples of manifolds may include, for example, without limitation, devices that have structural elements arranged to form flow channels, such as, for example, cellular foam, open-cell foam, porous tissue collections, liquids, gels, and foams that include, or cure to include, flow channels. In one embodiment, the wound healing apparatus **106** includes a porous foam and having a plurality of interconnected cells or pores that act as flow channels. The porous foam may be a polyurethane, open-cell, reticulated foam such

as GranuFoam® material manufactured by Kinetic Concepts, Incorporated of San Antonio, Tex. Other embodiments may include “closed cells.”

[0041] The dressing **102** further includes a reduced pressure interface **108** fluidly coupled to the wound healing apparatus **106** and a drape **110**. In one embodiment, a manifold (not shown) is positioned between the reduced pressure interface **108** and the wound healing apparatus **106** for distributing pressure or facilitating fluid communication between the reduced pressure interface **108** and the wound healing apparatus **106**. The drape **110**, or cover, may be placed over the wound healing apparatus **106** and a portion of a patient’s epidermis **103** to create a fluid seal between the drape **110** and the epidermis **103**. The drape **110** may include an adhesive **109** or bonding agent to secure the drape **110** to the epidermis **103**. In one embodiment, the adhesive **109** may be used to create a seal between the drape **110** and the epidermis **103** to prevent leakage of reduced pressure from the tissue site **101**. In another embodiment, a seal layer (not shown) such as, for example, a hydrogel or other material may be disposed between the drape **110** and the epidermis **103** to augment or substitute for the sealing properties of the adhesive **109**. As used herein, “fluid seal” means a seal adequate to maintain reduced pressure at a desired site given the particular reduced pressure source involved.

[0042] The reduced pressure interface **108** may be positioned adjacent to or coupled to the drape **110** to provide fluid access to the wound healing apparatus **106**. The drape **110** has an aperture **113** for providing fluid access to the reduced pressure interface **108**. In one embodiment, the drape **110** is placed over the reduced pressure interface **108** and a portion of the patient’s epidermis **103** to create a fluid seal between the drape **110** and the epidermis **103**. A reduced pressure delivery conduit **112** fluidly couples the reduced pressure treatment device **104** and the reduced pressure interface **108**. The reduced pressure interface **108** allows the reduced pressure to be delivered to the tissue site **101**. While the amount and nature of reduced pressure applied to the tissue site **101** will typically vary according to the application, in one embodiment, the reduced pressure treatment device **104** may provide reduced pressures between about 0 mm Hg and about –500 mm Hg and more specifically between about –125 mm Hg and about –300 mm Hg for promoting granulation, and between about 0 mm Hg and about –125 mm Hg for promoting epithelialisation.

[0043] The reduced pressure treatment device **104** may include a collection canister **114** in fluid communication with a reduced pressure source **116**. The reduced pressure delivery conduit **112** may be a multi-lumen tube that provides a continuous conduit between the reduced pressure interface **108** and an inlet **119** positioned on the collection canister **114**. Liquids or exudates communicated from the wound healing apparatus **106** through the reduced pressure delivery conduit **112** are removed from the reduced pressure delivery conduit **112** and retained within the collection canister **114**.

[0044] In the embodiment illustrated in FIG. 1, the reduced pressure source **116** is an electrically-driven vacuum pump. In another implementation, the reduced pressure source **116** may instead be a manually-actuated or manually-charged pump that does not require electrical power. The reduced pressure source **116** instead may be any other type of reduced pressure pump, or alternatively a wall suction port such as those available in hospitals and other medical facilities. The reduced pressure source **116** may be housed within or used in

conjunction with the reduced pressure treatment device **104**, which may also contain sensors, processing units, alarm indicators, memory, databases, software, display units, and user interfaces **111** that further facilitate the application of reduced pressure treatment to the tissue site **101**. In one example, pressure-detection sensors (not shown) may be disposed at or near the reduced pressure source **116**. The pressure-detection sensors may receive pressure data from the reduced pressure interface **108** via lumens in the reduced pressure delivery conduit **112** that are dedicated to delivering reduced pressure data to the pressure-detection sensors. The pressure-detection sensors may communicate with a processing unit that monitors and controls the reduced pressure that is delivered by the reduced pressure source **116**.

[0045] Referring now to FIGS. **2A** and **2B**, an illustrative embodiment of the wound healing apparatus **106** positioned proximate the tissue site **101** and covered with the drape **110** is presented in more detail. The wound healing apparatus **106** includes a plurality of projections **120** extending from a mat **118**. In one embodiment, the mat **118** may be substantially gas impermeable and flexible. The wound healing apparatus **106** has a first configuration for promoting epithelialisation as shown in FIG. **2A** and a second configuration for promoting granulation as shown in FIG. **2B**. In the first configuration shown in FIG. **2A**, a flexible membrane **130** covers the projections **120** and presents a substantially smooth surface to the tissue site **101**. When the tissue site **101** is exposed to a substantially smooth surface in the presence of reduced pressure, epithelialisation is encouraged. When reduced pressure and a more rough surface such as that shown in FIG. **2B** is presented to the tissue site **101**, granulation is encouraged. As illustrated in FIG. **2B**, the projections **120** are capable of deforming the flexible membrane **130** to present a rougher surface to the tissue site **101**. The rough surface presented by the projections **120** causes microstrains and microstresses to be applied to the tissue site **101**, which increases granulation.

[0046] The substantially gas impermeable, flexible mat **118** includes a plurality of channels **128** for allowing the passage of fluids through the mat **118** to or from the tissue site **101**. The substantially gas impermeable, flexible mat **118** may, for example, be a polyurethane (PU), thermoplastic elastomer (TPE), or silicone elastomer material. The plurality of projections **120** extend from a surface **122** of the substantially gas impermeable, flexible mat **118** and may be in fluid communication with the substantially gas impermeable, flexible mat **118**. Each projection **120** has a first end **124** connected to the surface **122** of the substantially gas impermeable, flexible mat **118** and a second end **126** opposing the first end **124**. The first end **124** of each projection **120** may be bonded or similarly fixed to the surface **122**. The plurality of projections **120** may be any shape or size; for example the plurality of projections **120** may be spikes, rods, pins, tubes, or other protrusions, etc. The plurality of projections **120** may be made from a range of polymers such as a polyurethane (PU), thermoplastic elastomer (TPE), or silicone elastomer material and may have a range of compressibility or hardness such as 10⁰-100⁰ Shore A. Structurally, the plurality of projections **120** may be solid, perforated, hollow, etc., or any combination thereof. The configuration of the plurality of projections **120** (the shape and structure) may enable the transmission of pressure and fluid through the plurality of projections **120** as well as modify the compressibility of the plurality of projections **120** depending on the material used.

[0047] The second end **126** of at least a portion of the plurality of projections **120** may be covered by the flexible membrane **130**. In one embodiment, the flexible membrane **130** may be bonded to at least a portion of the plurality of projections **120** or similarly fixed. The flexible membrane **130** is sufficiently flexible to be deformed by at least a portion of the plurality of projections **120** and may be an elastomeric material. "Elastomeric" means having the properties of an elastomer, and generally refers to a polymeric material that has rubber-like properties. More specifically, most elastomers have elongation rates greater than 100% and a significant amount of resilience. The resilience of a material refers to the material's ability to recover from an elastic deformation. Examples of elastomers may include, but are not limited to, natural rubbers, polyisoprene, styrene butadiene rubber, chloroprene rubber, polybutadiene, nitrile rubber, butyl rubber, ethylene propylene rubber, ethylene propylene diene monomer, chlorosulfonated polyethylene, polysulfide rubber, polyurethane, EVA film, co-polyester, thermoplastic elastomers, synthetic latexes, and silicones. The flexible membrane **130** may be hydrophilic or hydrophobic.

[0048] The flexible membrane **130** may be deformed by the plurality of projections **120** when a biasing force, or other activation stimulus, is exerted on the substantially gas impermeable, flexible mat **118** and the biasing force is greater than or equal to a threshold force. In one embodiment, the flexible membrane **130** may be deformed by the plurality of projections **120** when the biasing force exerted on the plurality of projections **120** is greater than or equal to the threshold force. The deformation of the flexible membrane **130** may be in response to a combination of the biasing force exerted on the mat **118** or projections **120** and the force exerted by the tissue site on portions of the flexible membrane **130** between the projections **120**. While the deformation of the flexible membrane **130** may occur as described above when the biasing force equals or exceeds a threshold force, the deformation may occur more gradually over a range of forces.

[0049] The biasing force may be in the form of reduced pressure supplied from the reduced pressure source **116**. As the reduced pressure beneath the drape **110** increases (i.e. the gauge pressure decreases), the drape **110** is pulled toward the tissue site, which exerts a biasing force on the flexible mat **118** by the drape **110**. In a specific, non-limiting embodiment, the amount of reduced pressure required for the biasing force to equal the threshold force may be about -125 mmHg. In other embodiments, the biasing force may be applied to the flexible mat **118** by a weight or any other force that is not generated by a reduction in pressure beneath the drape **110** but that promotes either rough or smooth surfaces to encourage granulation or epithelialisation.

[0050] Microperforations (not shown) or valves that expand or open under the influence of the biasing force may be present on the flexible membrane **130**. In one embodiment, the microperforations are small apertures that extend through the flexible membrane **130**. The size of the microperforations is such that when the flexible membrane **130** is not expanded, the microperforations are essentially closed thereby not allowing the transmission of pressure and fluids through the flexible membrane **130**. As the flexible membrane **130** expands under the influence of the biasing force, the deformation of the flexible membrane **130** by the plurality of projections **120** expands the microperforations, which allows for the transmission of pressure and fluids. Small valves may be either operably associated with the microperforations or

otherwise associated with the flexible membrane **130** to further control the passage of pressure and fluids through the flexible membrane **130**. In one embodiment, the microperforations may be positioned directly beneath each of the projections **120**. In another embodiment, the microperforations may be positioned in the flexible membrane **130** between projections **120**. A sufficiently smooth surface for encouraging epithelialization is presented when the microperforations are closed or the flexible membrane **130** is in an unexpanded state. In one embodiment, using the Verein Deutscher Ingenieure (VDI) (3400) standard scale, a sufficiently smooth surface for promoting epithelialization may have a surface finish of VDI (3400)<30. In a specific, non-limiting embodiment, the microperforations may be closed when the biasing force is at reduced pressure levels less than about -50 mmHg (i.e. at gauge pressures greater than about -50 mmHg). Pressures in a range between about -50 mmHg and about -125 mmHg may be sufficient to cause the microperforations to open and expand without causing the flexible membrane **130** to deform. When the flexible membrane **130** is deformed by the plurality of projections **120**, the microperforations may also expand to allow for the transmission of pressure and fluids. The deformation of the flexible membrane **130** presents a rough, porous surface to the tissue site **101** for encouraging granulation. In one embodiment, a rough, porous surface may have a surface finish of VDI (3400)>30.

[0051] In operation, a health care provider may place the wound healing apparatus **106** proximate the tissue site **101** and cover the wound healing apparatus **106** with the drape **110** to create a fluid seal beneath the drape. In one embodiment, a manifold may be placed between the drape **110** and the wound healing apparatus **106**. The wound healing apparatus **106** is then fluidly connected to the reduced pressure treatment device **104**. Reduced pressure is supplied to the tissue site **101** via the wound healing apparatus **106**. The health care provider may adjust the levels of reduced pressure supplied depending on the type of treatment sought. In one embodiment, to promote granulation the health care provider may increase the reduced pressure to levels equal to or greater than about -125 mmHg thereby causing the flexible membrane **130** to deform and present a rough, porous surface to the tissue site **101**. In the presence of this reduced pressure, the rough surface presented by the projections **120** of the wound healing apparatus **106** exert a force on the tissue site **101**. This force creates microstrains and microstresses at the tissue site **101**, which promotes development of new granulation tissue. To promote epithelialization, the health care provider may decrease the reduced pressure to levels less than about -125 mmHg. These reduced pressure levels allow the projections to essentially retract such that the projections **120** no longer deform the flexible membrane **130**. The flexible membrane **130** is therefore capable of presenting a smooth surface to the tissue site **101** which is more conducive to promoting epithelialization. In one embodiment, at reduced pressure levels between about -50 mm Hg and about -125 mm Hg, the flexible membrane **130** is relatively smooth, and yet the microperforations or valves associated with the flexible membrane **130** are open, thereby allowing improved fluid removal. At reduced pressure levels less than about -50 mm Hg, the flexible membrane **130** remains smooth, and the microperforations or valves are substantially closed. Again, the smooth surface encourages epithelialization, and the reduced pressure aids in fluid removal, although not as much fluid as if the microperforations or valves were open. While specific pres-

sure values have been presented as an example, it should be recognized that the wound healing apparatus **106** could be configured to allow deformation of the flexible membrane **130** at higher or lower pressures, thereby altering the reduced pressures required to promote either granulation or epithelialization.

[0052] Referring now primarily to FIG. 3, but also to FIGS. 1, 2A, and 2B, another illustrative embodiment of the wound healing apparatus **106** of FIGS. 1, 2A, and 2B is presented. In this embodiment, the wound healing apparatus **106** includes the substantially gas impermeable, flexible mat **118** and the plurality of projections **120** but not the flexible membrane **130**. The plurality of projections **120** may be constructed from bioabsorbable materials that do not have to be removed from a patient's body following use of the wound healing apparatus **106**. Suitable bioabsorbable materials may include, without limitation, a polymeric blend of polylactic acid (PLA) and polyglycolic acid (PGA). The polymeric blend may also include without limitation polycarbonates, polyfumarates, and caprolactones. Additionally, each of the plurality of projections **120** may vary in shape, size, and structure relative to each other.

[0053] The presence of fluid may cause the plurality of projections **120** to dissolve. The fluid may be exudate or other fluids from the tissue site **101**, or the fluid may be instilled into the tissue site **101** by a health care provider or a device associated with the reduced pressure treatment device **104** to accelerate dissolution of the plurality of projections **120**. The fluid may be instilled into the tissue site **101** via the substantially gas impermeable, flexible mat **118** or the plurality of projections **120**. In one embodiment, hollow or perforated projections (not shown) may communicate fluid into the tissue site **101**. The plurality of projections **120** may include treatment agents such as growth factors, anti-bacterials, debriding agents, pro or anti-clogging agents, pain reducing agents, etc. that are released into the tissue site **101** as the plurality of projections **120** dissolve.

[0054] In operation, the wound healing apparatus **106** having the plurality of bioabsorbable projections **120** may be placed proximate the tissue site **101**, covered with the drape **110**, and fluidly connected to the reduced pressure source **116** (FIG. 1) so as to receive reduced pressure. The placement of the plurality of projections **120** into the tissue site **101** presents a sufficiently rough surface to promote granulation. When the plurality of projections **120** dissolve in the presence of fluid, the substantially gas impermeable, flexible mat **118** presents a sufficiently smooth surface to the tissue site **101** to promote epithelialization. As previously stated, differing levels of reduced pressure may be used depending on the type of treatment desired.

[0055] Referring now to FIGS. 4A and 4B, another illustrative embodiment of a wound healing apparatus **206** for use in a reduced pressure treatment system (e.g., the reduced pressure treatment system **100** of FIG. 1) is presented. As shown, the wound healing apparatus **206** is positioned proximate the tissue site **101** and covered with the drape **110**. The wound healing apparatus **206** includes a hollow mat **208** having an inner chamber **211** and a plurality of recesses **212** disposed in proximity to a first surface **214** of the hollow mat **208**. An extendable projection **216** is positioned within each of the plurality of recesses **212** and is configured to extend from the recesses **212** when a pressure (p_1) within the inner chamber **211** is greater than a pressure (p_2) outside of the inner chamber **211** (e.g. in the recesses **212**). The wound

healing apparatus **206** has a first configuration for promoting epithelialisation as shown in FIG. 4A in which a relatively smooth surface is presented to the tissue site **101**. In a second configuration shown in FIG. 4B, the wound healing apparatus **206** has a second configuration for promoting granulation in which a relatively rough surface is presented to the tissue site **101**. As previously described, the relatively rough surface presented by the extension of projections **216** induces microstrains and microstresses at the tissue site **101** which are conducive to new granulation tissue growth.

[0056] The hollow mat **208** may be formed from a polymeric material and may be pre-sealed so that the fluid volume within the inner chamber **211** remains static during treatment. The hollow mat **208** may be formed with a plurality of sealed channels (not shown) disposed therethrough that extend from a second surface **215** to the first surface **214** to facilitate the transmission of fluid and pressure. The hollow mat **208** includes the plurality of recesses **212** for housing the extendable projections **216**. The extendable projections **216** remain sheathed within the recesses **212** when the pressure (p_2) in the recesses **212** is greater than the pressure (p_1) within the inner chamber **211**. When the extendable projections **216** are sheathed as shown in FIG. 4A, the wound healing apparatus **206** presents a sufficiently smooth surface to the tissue site **101** to promote epithelialisation. In one embodiment, a sufficiently smooth surface may have a surface finish of VDI (3400)<30. In the event the pressure (p_1) within the inner chamber **211** becomes greater than the pressure (p_2) in the recesses **212**, the recesses **212** have one or more side walls **240** configured to collapse or compress, thereby allowing the extendable projections **216** to extend from the plurality of recesses **212** and contact the tissue site **101**. When the extendable projections **216** extend into the tissue site **101**, a sufficiently rough and uneven surface is presented to the tissue site for promoting granulation. In one embodiment, a sufficiently rough and uneven surface may have a surface finish of VDI (3400)>30. It should be understood that the extendable projections **216** may be any shape or size; for example the extendable projections **216** may be spikes, rods, pins, tubes, or other protrusions, etc. Additionally, the extendable projections **216** may be made from a range of low density polymers such as a thermoplastic elastomer (TPE) and may have a range of compressibility or hardness such as 10⁰-100⁰ Shore A. Low density polymers may be used so that the weight of the extendable projections **216** does not force the extendable projections **216** from the recesses **212** (i.e., due to gravity).

[0057] The wound healing apparatus **206** may further include a pressurization unit **218** for changing the pressure (p_1) within the inner chamber **211**. In one embodiment, the pressure (p_1) within the inner chamber **211** may be changed using the pressurization unit **218** through pneumatic or hydraulic means. The pressurization unit **218** is fluidly connected to the hollow mat **208** and may be placed adjacent the second surface **215**. The pressurization unit **218** may be sealed beneath the drape **110** with a connecting tube **220** extending through an aperture **222** in the drape **110**. In one embodiment (not shown), the pressurization unit **218** may be placed outside the drape **110** and fluidly connected to the hollow mat **208** through an aperture in the drape **110**. In another embodiment, atmospheric air could be supplied to the inner chamber **211** when the reduced pressure is applied to the wound healing apparatus **206** thereby allowing the pressure (p_1) within the inner chamber **211** to be greater than the pressure (p_2) in the recesses **212**. Alternatively, if the inner

chamber **211** is sealed as previously described, and the pressure of air within the inner chamber **211** is at approximately atmospheric pressure, the application of reduced pressure beneath the drape **110** will result in an extension of the projections **216**.

[0058] In operation, a health care provider may place the wound healing apparatus **206** proximate the tissue site **101** and cover the wound healing apparatus **206** with the drape **110** to create a sealed space **224** beneath the drape. In one embodiment, a manifold may be placed between the drape **110** and the wound healing apparatus **206**. The sealed space **224** is then fluidly connected to a reduced pressure treatment device. Reduced pressure is supplied to the tissue site **101** at desired treatment levels. In one embodiment, the wound healing apparatus **206**, or the hollow mat **208**, is pre-sealed so that the level of reduced pressure supplied to the sealed space **224** determines whether the wound healing apparatus **206** is configured to promote granulation or epithelialisation, i.e., whether the pressure (p_2) in the recesses **212** is less than or greater than the pressure (p_1) within the inner chamber **211** of the hollow mat **208**. In another embodiment, the pressure (p_1) within the inner chamber **211** may be changed by the pressurization unit **218**. In this instance, both the pressurization unit **218** and the level of reduced pressure supplied to the sealed space determines whether the wound healing apparatus **206** is configured to promote either granulation or epithelialisation, or combinations thereof. In some embodiments, it may be desired to configure the wound healing apparatus **206** such that granulation is promoted in one area of the tissue site while epithelialisation simultaneously is promoted at another area of the tissue site. This may be accomplished by only presenting projections or a rough surface to the tissue site in areas where granulation is desired. In those areas where epithelialisation is desired, a smoother surface would be presented to the tissue site.

[0059] Referring now primarily to FIGS. 4C-4E, but still with reference to FIGS. 4A and 4B, the wound healing apparatus **206** is further shown in alternative embodiments that include a flexible membrane **230** placed over the plurality of recesses **212** covering the extendable projections **216**. The flexible membrane **230** may be bonded or similarly fixed to the hollow mat **208** and may be an elastomeric material that is hydrophilic or hydrophobic. A hydrogel-material may be included with the flexible membrane **230** for helping the flexible membrane **230** present a smooth surface to the tissue site **101** when activated by fluids. Microperforations (not shown) or valves may be present on the flexible membrane **230** for aiding in the transmission of pressure and fluids. In FIG. 4C, the flexible membrane **230** is continuous and may be deformed by the extendable projections **216** when the pressure (p_1) within the inner chamber **211** becomes greater than the pressure (p_2) in the recesses **212**. The deformation of the flexible membrane **230** by the extendable projections **216** presents a sufficiently rough and uneven surface to the tissue site **101** for promoting granulation. In FIG. 4D, the flexible membrane **230** has slits coinciding with each extendable projection **216** so that when the pressure (p_1) within the inner chamber **211** is greater than the pressure (p_2) in the recesses **212**, the extendable projection **216** deforms the slits on the flexible membrane **230** allowing a portion of the extendable projection **216** to be in direct contact with the tissue site **101**. In FIG. 4E, the flexible membrane **230** has flaps coinciding with each extendable projection **216**. The flaps completely covers the plurality of recesses **212** when the pressure (p_1)

within the inner chamber 211 is less than the pressure (p_2) in the recesses 212. When the pressure (p_1) within the inner chamber 211 is greater than the pressure (p_2) in the recesses 212, the extendable projection 216 deforms the flaps on the flexible membrane 230 allowing a portion of the extendable projection 216 to be in direct contact with the tissue site 101. The use of the flexible membrane 230 may aid the wound healing apparatus 206 in the epithelialisation configuration by helping to present a sufficiently smooth surface to the tissue site. The flexible membrane 230 may be used with any of the disclosed embodiments for the wound healing apparatus 206.

[0060] Referring now to FIGS. 4A-5B and specifically to FIGS. 5A and 5B, another illustrative embodiment of the wound healing apparatus 206 of FIGS. 4A, and 4B is presented. As presented, the wound healing apparatus 206 has a first configuration for promoting epithelialisation shown in FIG. 5A and a second configuration for promoting granulation shown in FIG. 5B. In this embodiment, the extendable projections 216 have a telescoping configuration. The extendable projections 216 include a first section 236, a second section 234, and a third section 232. When the pressure (p_1) within the inner chamber 211 is less than the pressure (p_2) in the recesses 212, the first section 236, the second section 234, and the third section 232 remain tucked within the recesses 212 presenting a smooth surface to the tissue site 101 for promoting epithelialisation. When the pressure (p_1) within the inner chamber 211 is greater than a pressure (p_2) in the recesses 212, the extendable projections 216 extend from the recesses 212 in a telescoping configuration for promoting granulation. In the telescoping configuration, the third section 232 extends beyond the first surface 214 of the hollow mat 208, the second section 234 extends beyond the third section 232, and the first section 236 extends beyond the second section 234.

[0061] Referring now to FIGS. 4A, 4B, 6A, and 6B and specifically to FIGS. 6A and 6B, another illustrative embodiment of the wound healing apparatus 206 of FIGS. 4A, and 4B is presented. As shown, the wound healing apparatus 206 has a first configuration for promoting epithelialisation as shown in FIG. 6A and a second configuration for promoting granulation as shown in FIG. 6B. In this embodiment, the plurality of recesses 212 have a bellows configuration. In the bellows configuration, the plurality of recesses 212 have one or more side walls 240 that may be either corrugated, comprised of a plurality of interleaved bends, or comprised of a plurality of furrows. The one or more side walls 240 are configured to collapse when the pressure (p_1) within the inner chamber 211 is greater than a pressure (p_2) in the recesses 212 so that the extendable projections 216 may extend from the recesses 212 and into the tissue site 101.

[0062] Referring now to FIGS. 4A, 4B, 7A, and 7B and specifically to FIGS. 7A and 7B, another illustrative embodiment of the wound healing apparatus 206 of FIGS. 4A, and 4B is presented. As shown, the wound healing apparatus 206 has a first configuration for promoting epithelialisation as shown in FIG. 7A and a second configuration for promoting granulation as shown in FIG. 7B. In this embodiment, the extendable projections 216 are connected to the flexible membrane 230 that may be an elastomeric material. When the pressure (p_1) within the inner chamber 211 is less than the pressure (p_2) in the recesses 212, the extendable projections 216 are tucked inside the recesses 212 and flush with the first surface 214, presenting a smooth surface to the tissue site 101

for promoting epithelialisation. When the pressure (p_1) within the inner chamber 211 is greater than a pressure (p_2) in the recesses 212, the flexible membrane extends beyond the first surface 214 pushing the extendable projections 216 into the tissue site 101 for promoting granulation.

[0063] The various configuration of wound healing apparatus 206 illustrated in FIGS. 4A, 4B, 4C, 4D, 4E, 5A, 5B, 6A, 6B, 7A, and 7B may, in operation, be subjected to reduced pressures similar to those described previously with reference to wound healing apparatus 106. Depending on the configuration of the wound healing apparatus 206, a particular pressure or range of pressures may be used to alter a surface of the wound healing apparatus 206 adjacent the tissue site, thereby encouraging granulation or epithelialisation.

[0064] Referring now to FIGS. 8A and 8B, an illustrative embodiment of a wound healing apparatus 306 positioned proximate the tissue site 101 and covered with the drape 110 is presented. The wound healing apparatus 306 may be used with a reduced pressure treatment system such as the reduced pressure treatment system 100 of FIG. 1. The wound healing apparatus 306 includes a porous pad 332 and a plurality of granulation promoters 320 embedded within the porous pad 332. The wound healing apparatus 306 has a first configuration for promoting epithelialisation as shown in FIG. 8A and a second configuration for promoting granulation as shown in FIG. 8B.

[0065] The porous pad 332 may be made of a polyurethane, open-cell, reticulated foam such as GranuFoam® material manufactured by Kinetic Concepts, Incorporated of San Antonio, Tex. The porous pad 332 has a first compressibility (C_1) less than, a second compressibility (C_2) of the plurality of granulation promoters 320; i.e., the porous pad 332 is softer than, and will compress before, the plurality of granulation promoters 320. The porous pad 332 may help distribute any forces (e.g., body weight) applied to the wound healing apparatus 306 when reduced pressure is not applied to minimize potential high pressure points at the tissue site 101 caused from the plurality of granulation promoters 320.

[0066] The plurality of granulation promoters 320 may be any shape or size; for example the plurality of granulation promoters 320 may be spikes, rods, pins, tubes, or other protrusions, etc. The plurality of granulation promoters 320 may be made from a range of, polymers such as a polyurethane (PU), thermoplastic elastomer (TPE), or silicone elastomer material and thus, the second compressibility (C_2) may have a range of compressibility or hardness such as 10^0 - 100^0 Shore A. In a complementary fashion, the first compressibility (C_1) of the porous pad 332 may have a compressibility or hardness of $<10^0$ - $<100^0$ Shore A, depending on the second compressibility (C_2) of the plurality of granulation promoters 320 and the degree of granulation desired. Structurally, the plurality of granulation promoters 320 may be solid, perforated, hollow, etc., or any combination thereof. Additionally, the plurality of granulation promoters 320 may be bioabsorbable and may contain a hydrogel-forming material. In one embodiment, the porous pad 332 may contain a hydrogel-forming material to promote epithelialisation as a liquid is introduced to the porous pad. The configuration of the plurality of granulation promoters 320 (the shape and structure) may enable the transmission of pressure and fluid through the plurality of granulation promoters 320 as well as modify the compressibility of the plurality of granulation promoters 320 depending on the material used.

[0067] The plurality of granulation promoters 320 may be near a tissue-facing side 334 of the porous pad 332, and in one embodiment, the plurality of granulation promoters 320 may extend from a surface 322 of a substantially gas impermeable, flexible mat 318 in a similar manner as described with reference to the wound healing apparatus 106 of FIGS. 2A and 2B.

[0068] The wound healing apparatus 306 may include a flexible membrane 330 positioned adjacent the tissue-facing side 334 of the porous pad 332. The flexible membrane 330 is sufficiently flexible to be deformed by at least a portion of the plurality of granulation promoters 320. The flexible membrane 330 may be an elastomeric material.

[0069] The flexible membrane 330 may be deformed by the plurality of granulation promoters 320 when a biasing force, or other activation stimulus, is exerted on the porous pad 332 or the substantially gas impermeable, flexible mat 318 and the biasing force is greater than or equal to a threshold force. When the biasing force is greater than or equal to a threshold force, the plurality of granulation promoters 320 extend from the porous pad 332 or alter the tissue facing side 334 of the porous pad 332. In one embodiment, the flexible membrane 330 may be deformed by the plurality of granulation promoters 320 when the biasing force exerted on the plurality of granulation promoters 320 is greater than or equal to the threshold force. The biasing force may be in the form of reduced pressure supplied from the reduced pressure source 116 of FIG. 1. In a specific, non-limiting embodiment, the threshold force may be a pressure greater than or equal to about -125 mmHg.

[0070] The flexible membrane 330 may include microperforations (not shown) or valves that may expand under the influence of the biasing force. In one embodiment, the microperforations expand when the flexible membrane 330 is deformed by the plurality of granulation promoters 320 to allow for the transmission of pressure and fluids. The microperforations may be positioned so as to coincide with each of the granulation promoters 320. A sufficiently smooth surface for encouraging epithelialisation is presented when the microperforations are closed or the flexible membrane 330 is in an unexpanded state. In one embodiment, using the Verein Deutscher Ingenieure (VDI) (3400) standard scale, a sufficiently smooth surface for promoting epithelialisation may have a surface finish of VDI (3400) < 30. In a specific, non-limiting embodiment, the microperforations may be closed when the biasing force is at pressures less than about -50 mmHg. Pressures in a range between about -50 mmHg and about -125 mmHg may be sufficient to cause the microperforations to open and expand without causing the flexible membrane 330 to deform and the porous pad 332 to compress. When the flexible membrane 330 is deformed by the plurality of projections 120 and the porous pad 332 compresses, the microperforations may also expand to allow for the transmission of pressure and fluids. The deformation of the flexible membrane 330 and the compression of the porous pad 332 presents a rough, porous surface to the tissue site 101 for encouraging granulation. In one embodiment, a rough, porous surface may have a surface finish of VDI (3400) > 30.

[0071] The wound healing apparatus 306 illustrated in FIGS. 8A and 8B may, in operation, be subjected to reduced pressures similar to those described previously with reference to wound healing apparatus 106. Depending on the configuration of the wound healing apparatus 306, a particular pressure or range of pressures may be used to alter a surface of the

wound healing apparatus 306 adjacent the tissue site, thereby encouraging granulation or epithelialisation.

[0072] Referring now to FIGS. 9A and 9B, an illustrative embodiment of a wound healing apparatus 406 positioned proximate the tissue site 101 and covered with the drape 110 is presented. The wound healing apparatus 406 includes a granulation-promoting material having a hydrogel-forming material 408 in at least a portion of the granulation-promoting material. In one embodiment, the granulation-promoting material is a porous, reticulated foam 404. The wound healing apparatus 406 has a first configuration for promoting epithelialisation as shown in FIG. 9B and a second configuration for promoting granulation as shown in FIG. 9A.

[0073] The porous, reticulated foam 404 may be a polyurethane, open-cell, reticulated foam such as GranuFoam® material manufactured by Kinetic Concepts, Incorporated of San Antonio, Tex. The porous, reticulated foam 404 has a tissue-contacting surface 412 that is sufficiently rough to promote granulation. When moisture in an amount greater than the moisture content of the gel is presented to the porous, reticulated foam 404, the porous, reticulated foam 404 causes the hydrogel-forming material to moisten and expand, thereby altering the tissue-contacting surface 412 to be sufficiently smooth to promote epithelialisation. The altered tissue-contacting surface 412 presents a moist, smooth surface to the tissue site 101. The tissue-contacting surface 412 may include a base surface 416 and one or more side surfaces 414. In one embodiment, the hydrogel-forming material 408 releases moisture in the presence of a reduced pressure greater than a threshold amount causing the hydrogel-forming material 408 to shrink and the porous, reticulated foam 404 to present a sufficiently rough surface to promote granulation. In another embodiment, the hydrogel-forming material 408 absorbs moisture in the presence of reduced pressure less than the threshold amount causing the hydrogel-forming material to expand and present the tissue-contacting surface 412 that is sufficiently smooth to promote epithelialisation.

[0074] In an embodiment where the threshold amount is a pressure of about -25 mm Hg, gauge pressures between about -25 mm Hg and about -125 mm Hg (and extending beyond about -125 mm Hg) may be applied to the space beneath drape 110 to promote granulation tissue growth. At these reduced pressures, a sufficient amount of moisture from the hydrogel-forming material 408 is removed, causing the hydrogel-forming material 408 to contract, thereby exposing the rough surface of the reticulated foam 404 to the tissue site 101. The rough surface promotes granulation by exposing the tissue site 101 to microstrains and microstresses. As the gauge pressure beneath the drape 110 is changed to be between about 0 mm Hg and about -25 mm Hg, moisture is absorbed by the hydrogel-forming material 408, thereby causing the hydrogel-forming material 408 to expand such that a smooth surface is presented to the tissue site 101. The hydrogel-forming material 408 retains the moisture even in the presence of the reduced pressure, which allows continued removal of excess exudate from the tissue site 101.

[0075] While a number of discrete embodiments have been described, aspects of each embodiment may not be specific to only that embodiment and it is specifically contemplated that features of embodiments may be combined with features of other embodiments. It also should be apparent from the foregoing that an invention having significant advantages has been provided. While the invention is shown in only a few of

its forms, it is susceptible to various changes and modifications without departing from the spirit thereof.

1. A wound dressing comprising:
 - a substantially gas impermeable, flexible mat;
 - a plurality of projections extending from a surface of the substantially gas impermeable, flexible mat, each projection having a first end connected to the surface and a second end opposing the first end; and
 - a flexible membrane positioned adjacent the second end of at least a portion of the plurality of projections, the flexible membrane being deformable by the at least a portion of the plurality of projections when a biasing force exerted on the substantially gas impermeable, flexible mat or the plurality of projections is greater than or equal to a threshold force.
2. The apparatus of claim 1, wherein the substantially gas impermeable, flexible mat includes a plurality of channels to allow passage of fluids through the substantially gas impermeable, flexible mat.
3. The apparatus of claim 1, wherein the plurality of projections are hollow.
4. The apparatus of claim 1, wherein the plurality of projections are bioabsorbable.
5. The apparatus of claim 1, wherein the flexible membrane is hydrophilic.
6. The apparatus of claim 1, wherein the flexible membrane includes a valve associated with at least one of the plurality of projections to present a smooth surface when the biasing force is less than the threshold force.
7. The apparatus of claim 1, wherein the flexible membrane includes microperforations configured to expand as the flexible membrane is deformed to allow for the transmission of pressure and fluid.
8. The apparatus of claim 1, wherein the deformation of the flexible membrane presents a rough, porous surface to the tissue site.
9. The apparatus of claim 1, wherein:
 - the flexible membrane presents a smooth surface to the tissue site when the biasing force is less than the threshold force.
10. An apparatus for promoting granulation and epithelialization at a tissue site, the apparatus comprising:
 - a mat having an inner chamber and a plurality of recesses disposed on a first surface of the hollow mat; and

an extendable projection positioned within each recess and configured to extend from the recess when a pressure (p_1) within the inner chamber is greater than a pressure (p_2) in the recess.

11. The apparatus of claim 10, wherein the extendable projection includes a telescoping configuration.

12. The apparatus of claim 11, wherein the telescoping configuration includes a first section, a second section, and a third section, and wherein the third section extends beyond the first surface of the mat, the second section extends beyond the third section, and the first section extends beyond the second section when the pressure (p_1) within the inner chamber is greater than the pressure (p_2) in the recess.

13. The apparatus of claim 10, wherein the plurality of recesses includes a bellows configuration.

14. The apparatus of claim 13, wherein the bellows configuration includes at least one sidewall with a plurality of interleaved bends.

15. The apparatus of claim 13, wherein the bellows configuration includes at least one corrugated sidewall.

16. The apparatus of claim 13, wherein the bellows configuration includes at least one sidewall with a plurality of furrows.

17. The apparatus of claim 10 further comprising a flexible membrane positioned to cover at least a portion of the plurality of recesses.

18. The apparatus of claim 17, wherein the flexible membrane includes a plurality of microperforations.

19. The apparatus of claim 10, wherein the apparatus is configured to present a rough surface to the tissue site when the pressure (p_1) within the inner chamber is greater than the pressure (p_2) in the recess, and wherein the apparatus is configured to present a smooth surface to the tissue site when the pressure (p_1) within the inner chamber is less than the pressure (p_2) in the recess.

20. The apparatus of claim 10 further comprising a pressurization unit for changing the pressure (p_1) within the inner chamber.

21. The apparatus of claim 10, further comprising:

- wherein the mat is adapted to be positioned at the tissue site and sealed beneath a drape; and
- wherein application of reduced pressure to a sealed space beneath the drape results in extending the extendable projection from the recess.

22.-69. (canceled)

* * * * *