




(86) Date de dépôt PCT/PCT Filing Date: 2005/06/07
 (87) Date publication PCT/PCT Publication Date: 2005/12/22
 (45) Date de délivrance/Issue Date: 2012/04/17
 (85) Entrée phase nationale/National Entry: 2006/11/30
 (86) N° demande PCT/PCT Application No.: AU 2005/000812
 (87) N° publication PCT/PCT Publication No.: 2005/120897
 (30) Priorités/Priorities: 2004/06/07 (AU2004903071);
 2004/08/12 (AU2004904545)

(51) Cl.Int./Int.Cl. *B60P 3/075* (2006.01),
B60P 7/08 (2006.01), *B62H 3/00* (2006.01)
 (72) Inventeur/Inventor:
 VAN KEEKEN, RENEE, AU
 (73) Propriétaire/Owner:
 KYA RACING PTY LTD, AU
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : DISPOSITIF D'ATTACHE DEUX-ROUES D'UNE MOTO DEBOUT SUR UNE REMORQUE
 (54) Title: DEVICE FOR SECURING A WHEEL OF AN UPRIGHT MOTORCYCLE TO A TRAILER

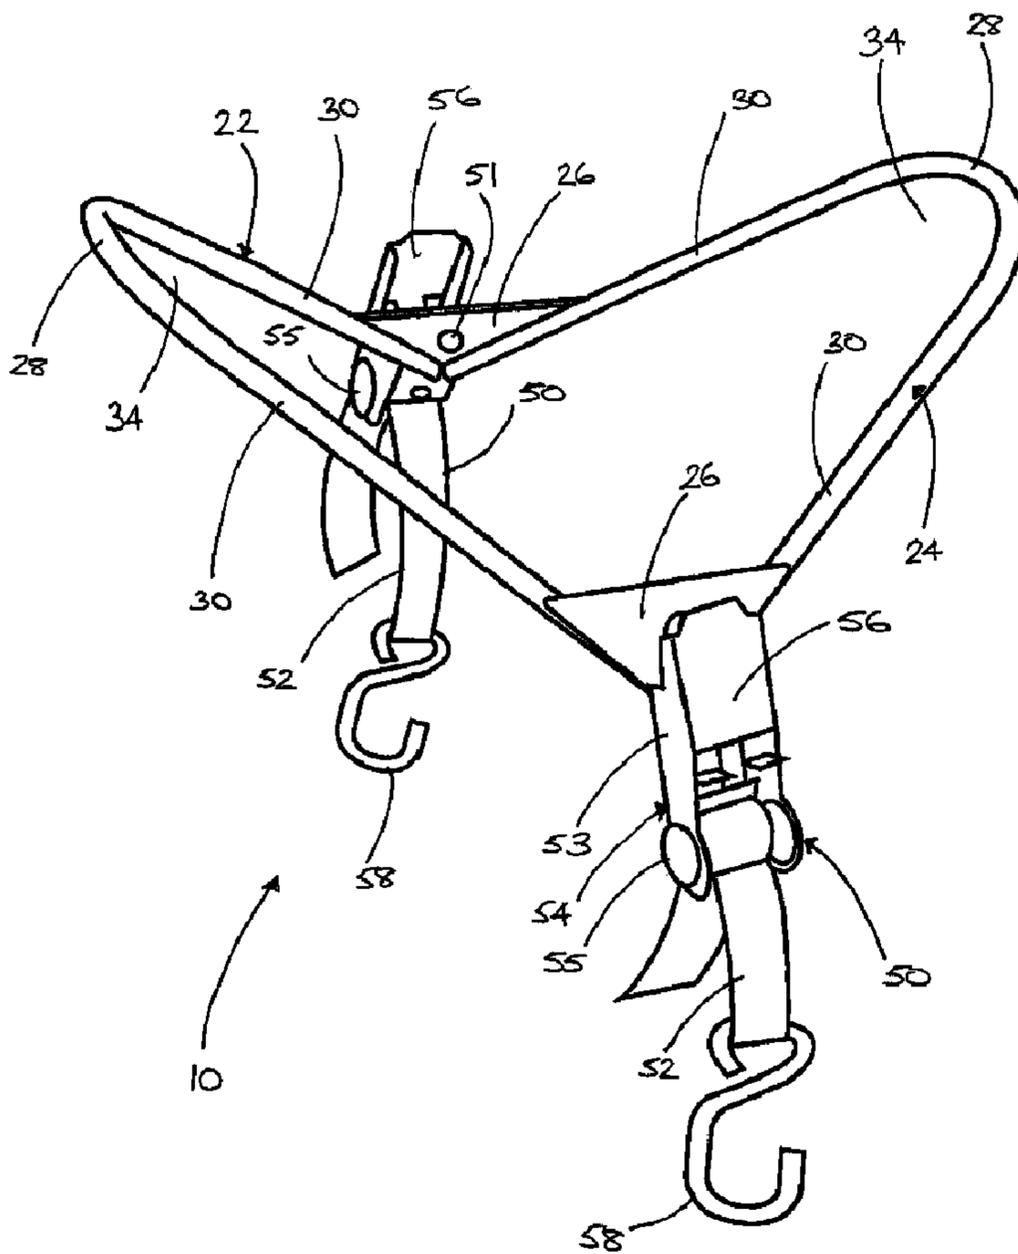

(57) Abrégé/Abstract:

A device (10) for securing a vehicle such as an upright motorcycle to a trailer for transport. The device includes a metal or plastic member (20) locatable over the upper portion of a tyre of a wheel of a vehicle and a respective tie down (50) attachable to each of

(57) **Abrégé(suite)/Abstract(continued):**

opposite sides of the frame member. Each tie down includes a strap (52) with an attachment hook (58) at the strap end remote from the frame member to a hook onto an anchoring point, and a ratchet adjustment device (54) at the frame member to tension the strap. The frame member (20) has a first portion (22) and second portion (22) each in U-shaped configuration wherein each portion has a pair of legs (30) joined by an arcuate web (28) from which the legs (30) diverge. Each portion of the frame member can also have a wheel shaped load distributing member (172).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 December 2005 (22.12.2005)


PCT

(10) International Publication Number
WO 2005/120897 A1

- (51) International Patent Classification⁷: **B60P 3/075**, 7/08, B62H 3/00
- (74) Agents: MCEWAN, Jennifer et al.; Ellis King McEwan, Technology and Intellectual Property Lawyers, Level 1, 38-40 Garden Street, South Yarra, VIC 3141 (AU).
- (21) International Application Number: PCT/AU2005/000812
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 7 June 2005 (07.06.2005)
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2004903071 7 June 2004 (07.06.2004) AU
2004904545 12 August 2004 (12.08.2004) AU
- (71) Applicant (for all designated States except US): KYA RACING PTY LTD [AU/AU]; 2 Golden Ridge Drive, Croydon Hills, VIC 3136 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): VAN KEEKEN, Renee [AU/AU]; 13 Shakespeare Avenue, Mooroolbark, VIC 3138 (AU).
- Published:
— with international search report

[Continued on next page]

(54) Title: DEVICE FOR SECURING A WHEEL OF AN UPRIGHT MOTORCYCLE TO A TRAILER

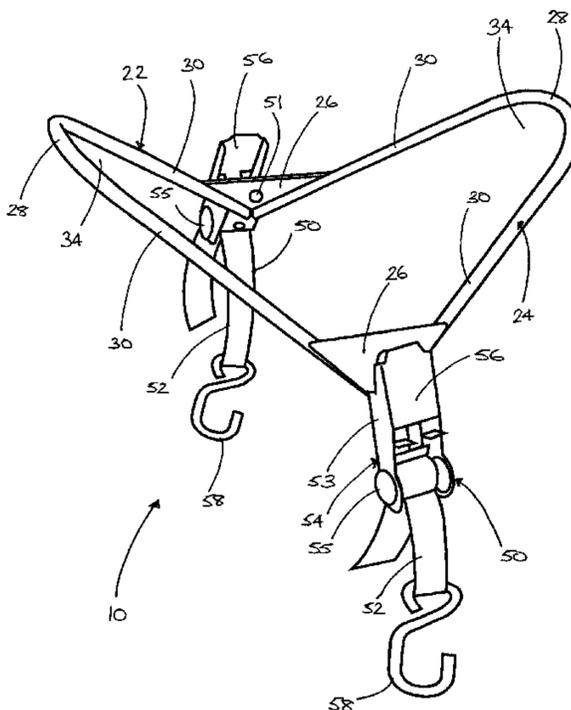

(57) Abstract: A device (10) for securing a vehicle such as an upright motorcycle to a trailer for transport. The device includes a metal or plastic member (20) locatable over the upper portion of a tyre of a wheel of a vehicle and a respective tie down (50) attachable to each of opposite sides of the frame member. Each tie down includes a strap (52) with an attachment hook (58) at the strap end remote from the frame member to a hook onto an anchoring point, and a ratchet adjustment device (54) at the frame member to tension the strap. The frame member (20) has a first portion (22) and second portion (22) each or U-shaped configuration wherein each portion has a pair of legs (30) joined by an arcuate web (28) from which the legs (30) diverge. Each portion of the frame member can also have a wheel shaped load distributing member (172).

WO 2005/120897 A1

WO 2005/120897 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DEVICE FOR SECURING A WHEEL OF AN UPRIGHT MOTORCYCLE TO A TRAILER**FIELD OF THE INVENTION**

This invention provides a device for securing a vehicle in an upright position, for example, during transportation, storage or display.

5 BACKGROUND OF THE INVENTION

A means of anchoring a motorcycle to a base, for example, of a trailer, display stand or truck, is by using a pair of tie-downs, each in the form of a strap and having a hook provided at each end. Each of the straps may be made of a nylon material of suitable strength and is provided with adjustment means in the form of
10 a buckle or ratchet.

In use, the motorcycle is manoeuvred to locate the tyre of its front wheel on the in a cradle or stand. In some instances, the motorcycle is simply placed onto the base or trailer without use of the stand or cradle. One end of each tie down is hooked at either side of the handlebar or fork. The other end of each tie down is
15 then hooked to an anchor point in the ground or other base for the cradle or stand. The straps are tensioned by adjusting the buckle or ratchet to pull down on the handlebar or fork of the motorcycle, such as to compress the fork about halfway and secure the motorcycle in position. A disadvantage with using such tie downs is that considerable stress is placed on the motorcycle's suspension, resulting in
20 wheel or fork alignment problems, uneven tyre wear or early fork seal failure.

Another arrangement consists of a metal stand or cradle for receiving the front wheel of a motorcycle. The stand or cradle has adjustable side plates between which the tyre of that wheel can be clamped to secure the vehicle. However, such stands need to be fixed or bolted to a floor if used in the transportation of a
25 motorcycle, and require the use of additional safety straps to maintain stability of the motorcycle in transit.

The present invention seeks to provide an alternative form of device.

SUMMARY OF INVENTION

The invention provides a device for securing at least one wheel of a motorcycle to a surface, the device including a frame member locatable over the upper portion of a tyre of the at least one wheel of the motorcycle, and a
5 respective tie down attachable to each of opposite sides of the frame member, each tie down including an attachment member at its end remote from the frame member, whereby when the frame member is located over the tyre, the at least one wheel is able to be secured to the surface by engaging each attachment member with an anchor point situated below the
10 frame member; the device, when securing the wheel, is arranged in such a way that a straight line connecting the attachment members is substantially parallel to the wheel axis thereby maintaining the motorcycle in a substantially upright position relative to the surface when the at least one wheel is secured to the surface.

15 The frame member may have a first portion and a second portion which are disposed relative to each other such that the frame member is substantially symmetrical. Each of those portions may be of U-shape and have an arcuate web which conforms to the curvature of the tyre. Preferably, each U-shaped portion has legs which diverge from its web, with the webs of the first
20 and second portions spaced apart to engage the tyre at circumferentially spaced locations. A connecting member or bracket may be provided between these first and second portions.

The frame member may have at least one elongate load distributing member which is arcuately shaped to conform to the curvature of the tyre. A single
25 load distributing member may extend between the first and second portions of the frame member. Alternatively, each of the first and second portions of the frame member may be provided with a respective load distributing member. The or each load distributing member may be accommodated within the U-shaped portion of each of the first and second portions and

2a

preferably is itself U-shaped in cross-section.

Preferably, the tie downs are in the form of adjustable straps.

The connector or attachment member may be in the form of a hook or other anchoring element. Preferably, the anchor point is located on a base
5 structure or adjacent wall.

DESCRIPTION OF DRAWINGS

The invention can be more fully understood by reference to the following description with reference with the accompanying drawings, in which:

5 FIGURE 1 is a perspective view of a first embodiment of the securing device of the invention;

FIGURE 2 is a perspective view of a component of the device of Figure 1;

FIGURE 3 is a front view of the device of Figure 1, in an in use orientation;

FIGURE 4 is a top view of the component of Figure 2 in the in use orientation;

10 FIGURE 5 is a schematic perspective view of a motorcycle secured on a trailer by use of two of the securing devices of Figures 1 and 3;

FIGURE 6 is a schematic side elevational view of the rear wheel of a motorcycle shown in Figure 5;

FIGURE 7 is a perspective view of a second embodiment of the securing device of the invention;

15 FIGURE 8 is a perspective view of a component of the device of Figure 7;

FIGURE 9 is a front view of the device of Figure 7, in an in use orientation;

FIGURE 10 is a top view of the component of Figure 8 in the in use orientation;

FIGURE 11 is a schematic side elevational view of the rear wheel of a motorcycle secured on a trailer by use of the securing device of Figures 7 and 9

20 FIGURE 12 is a perspective view of a third embodiment of the securing device of the invention;

FIGURE 13 is a top view of the device of Figure 12 in an in use orientation;

FIGURE 14 is a bottom view of the component of Figure 12 in the in use orientation;

FIGURE 15 is a side view of the component of Figure 12 in the in use orientation;

FIGURE 16 is a front view of the component of Figure 12 in the in use orientation;

FIGURE 17 is a perspective view of a fourth embodiment of the securing device of the invention;

5 FIGURE 18 is a perspective view of a fifth embodiment of the securing device of the invention;

FIGURE 19 is a perspective view of a sixth embodiment of the securing device of the invention;

FIGURE 20 is a schematic side elevational view of the rear wheel of a motorcycle
10 secured on a trailer by the securing device of Figure 12; and

FIGURE 21 is an enlarged schematic rear view of the rear wheel of Figure 20.

DETAILED DESCRIPTION OF THE DRAWINGS

Figures 1 and 3 depict a device 10 according to the invention for securing a vehicle. The securing device 10 has a frame member 20 and tie-downs 50. The
15 tie downs 50 may be attached to the frame member prior to use or may be attached once the frame member is located over the tyre of a wheel. Views of the frame member 20 alone are provided by Figures 2 and 4. The frame member 20 is made of a material of suitable strength, such as a metal or a plastics material such as polyvinylchloride.

20 The frame member 20 has a first portion 22 and a second portion 24 each having a substantially U-shaped configuration. Each of portions 22 and 24 has a pair of legs 30 joined by an arcuate web 28 from which the legs 30 diverge.

The free end of each leg 30 of one of portions 22 and 24 is joined to the free end of a respective leg 30 of the other one of portions 22 and 24 by means of a
25 respective bracket 26. In the arrangement shown, each bracket 26 is of triangular form, and a leg 30 of each portion 22 and 24 extends along a respective side of

the bracket 26. Thus, each of portions 22 and 24 is in a respective one of mutually inclined planes. The arrangement is such that, relative to the in-use orientation shown in Figure 1, frame member 20 is of inverted U-shape as viewed from either end, as shown in Figure 3, and of V-shape as viewed from either side parallel to the plane of Figure 3, as is evident from Figures 1 and 2.

Each tie down 50 includes an adjustment device 54 at one end, an attachment member 58 at its other end, and a flexible, substantially inextensible strap 52 which interconnects device 54 and member 58. The member 58 is secured to one end of strap 52, while strap 52 is adjustable engaged by device 54. Also, device 54 is adjustable or operable to adjust strap 52 longitudinally for varying the spacing between device 54 and member 58.

Each device 54 is secured to a respective bracket 26 of frame member 20. In each case, this is by means of a bolt 51 which projects from device 54 and engages in an aperture 36 of the respective bracket 26. In the arrangement illustrated, each device 54 is in the form of a ratchet assembly which has a housing 53 from which bolt 51 projects, and a ratchet handle 56 pivotably movable on housing 53 by pin 55. The handle is pivotable to draw the strap 52 longitudinally for reducing the spacing between member 58 and housing 53, while a release mechanism (not visible) enables strap 52 to be pulled in the other direction. The member 58, in the arrangement shown, is in the form of a hook.

Figures 5 and 6 depict the securing device 10 in use to secure a motorcycle 60 on a trailer 62 during transit. The front wheel 64 of the motorcycle 60 is located in a wheel guard or brace 68. A first securing device 10 is then located to position its frame member 20 over the upper portion of the back wheel 66 of the motorcycle 60 so that the portions 22 and 24 are substantially symmetrically disposed with respect to the wheel 66. Thus the upper portion of the tyre 61 is received in the space 34 within each arcuate web 28. The hook 58 of each tie down 50 is then hooked to a respective anchoring point in the base 63 of the trailer 62, and the straps 52 are tightened by working the ratchet handle 56 to tension the straps 52 for maintaining the motorcycle 60 securely in place.

The tyres shown in Figures 5 and 6 are slicks and have little, if any, tread patterning. Where the tyres are treaded with a cross-groove arrangement, the webs 28 are able to be located within the grooves of the tread pattern for more secure fit.

- 5 The base 63 of the trailer 62 shown is in the form of a grating, and each hook 58 is hooked under the grating lattice 65. Where the base is a solid surface, anchoring points, for example each in the form of an eye or hook, can be affixed to the base for receiving hooks 58. The anchoring points may also be located in side walls of a narrow enclosure (not shown) provided the anchoring point is at a height below
10 the frame member 20 when in position on a wheel.

For additional security, a second securing device 10 may be similarly fitted over to the front wheel 64 of the motorcycle 60 as shown in Figure 5. No other securing means is necessary to secure the motorcycle.

- 15 Although the embodiment of Figures 1 to 6 has been described with application to motorcycles, the securing device 10 may be used to secure other wheeled vehicles to a base. The same applies to the further embodiments of Figures 7 to 21. In each case, the device has a number of applications in transportation, storage or display.

- 20 The brackets 26 may be secured to the portions 22 and 24, such as by welding, particularly when the frame member 20 is of metal. Alternatively, particularly where the frame member is of a plastics material, the portions 22 and 24 may be formed integrally with the brackets 26. In either case, the portions need not be joined by brackets 26, but rather they may comprise respective portions of a continuous loop.

- 25 In other embodiments, the adjustment device can be of different forms. In one arrangement, it may comprise an adjustment device operable in the manner of the buckle part such as is provided on the fixed loop of a vehicle seat belt. Thus, the strap is able to be manually pulled through that device when securing a vehicle. Also, it will be appreciated, other forms of attachment member can be used,
30 whether this be another form of hook or an alternative releasable attaching means.

In other embodiments, the frame member may comprise a single U shaped portion for location over the upper portion of a tyre so that the U shaped portion is disposed at approximately the 12 o'clock position.

Figures 7 to 11 depict a second embodiment of the securing device of the invention. The structure and working of the embodiment generally will be understood by the description directed to the first embodiment. The description of the second embodiment will therefore be limited to principle differences, and to assist with this, the corresponding reference numerals of the second embodiment will be the same as the first embodiment plus 100.

The first portion 122 and second portion 124 of the frame member 120 are each provided with an elongate load distributing member 172 which is arcuately shaped to conform to the curvature of a tyre. Each load distributing member 172 is accommodated within the arcuate web 128 of each of the portions 122 and 124, and is U-shaped in cross-section to correspond to the configuration of the arcuate web 128. The load distributing member 172 may be secured to the frame member 120 by welding or other suitable means. The load distributing member 172 also assists in maintaining the securing device 110 on the wheel of the vehicle to be secured. Member 172 bears against part of the circumference of the wheel and distributes the load applied for securing the vehicle.

Figure 11 shows the securing device 110 in use to secure the rear wheel of a motorcycle 160 on a trailer 162 during transit. The upper portion of the tyre 161 is received in the space 134 between the arcuate webs 128 and is accommodated within the load distributing members 172.

In another embodiment (not shown), the frame member may be provided with a single load distributing member which extends between the first and second portions of the frame member. That is, relative to the embodiment of Figures 7 to 11, the arrangement may be such that the members 172 are end portions of a single elongate member.

Figures 12 to 16 depict a third embodiment of the securing device of the invention. The securing device 210 has a frame member 220 and tie-downs 250. The frame member 220 has a first portion 222 and a second portion 224 each comprising an elongate strip having a substantially U-shaped configuration. Each of portions 222 and 224 has a pair of legs 230 joined by an arcuate web 228 from which the legs 230 diverge. The portions 222 and 224 are made of a suitable flexible plastics material, for example of a hard plastics material such as polyvinylchloride or a hard rubber material, such that each pair of legs 230 is able to be flexed apart.

The inner surface of each of the legs 230 of portions 222 and 224 is provided with an abutment means in the form of a series of fins 240 which, in this instance, are of a substantially triangular configuration. The fins 240 may be made of a hard plastics or hard rubber material and they may be formed integrally with the portions 222 and 224. On each portion 222 and 224, a series of fins 240 on one leg 230 is positioned opposite to a series of fins 240 on the other leg 230. In the embodiment shown, a series of three fins 240 is provided on each leg 230 such that the faces of the fins 240 on each leg 230 are located in parallel arrangement. A slot 242 is provided in the end of each leg 230 adjacent each series of fins 240.

The portions 222 and 224 are connected by way of a pair of straps 243, the ends of which are received in the slots 242. The ends of the each strap 243 are secured to the portions 222 and 224 by means of stitching (not shown) or by any suitable fastener. A pair of tie-downs 250, as described above in relation to the first embodiment, is attached to each side of the frame member 220. Each tie-down 250 is attached to the centre portion of each strap 243 and is affixed thereto by stitching (not shown) or by any suitable fastener, for example, a clip. In the embodiment shown, the strap 243 is made of a fabric or nylon material of suitable strength.

In alternative embodiments, strap 243 may be replaced by a rigid or semi-rigid frame which is of substantially V-shaped configuration which is the configuration strap 243 adopts when in use.

Figures 20 and 21 depict the securing device 210 in use to secure the rear wheel 266 of motorcycle 260 on a trailer 262 during transit. The legs 230 of each portion 222 and 224 are flexed apart and located to position frame member 220 over the upper portion of the back wheel 266 of the motorcycle 260 so that the portions 222 and 224 are substantially symmetrically disposed with respect to wheel 266, at approximately the 1 o'clock and 11 o'clock positions. Thus the upper portion of the tyre 261 is received in the space 234 between the arcuate webs 28. The resilience of portions 222 and 224 is such that they are able to firmly grip tyre 261.

The hook 258 of each tie downs 250 is then hooked to a respective anchoring point in the base 263 of the trailer 262, and the straps are tightened by working the ratchet handle 256 to tension the straps 252 for maintaining the motorcycle 260 securely in place. When tensioned, strap 243 adopts a V-shaped configuration. Each opposing series of fins 240 engage the grooves of the tyre tread to enable the securing device to be fitted securely.

In an alternative embodiment, portions 222 and 224 is provided with spring along web 228 to enable each portion to be prised or levered open against the bias of the spring acting to force it to a closed position.

In an alternative embodiment, each of portions 222 and 224 is in the form of an elongate strip which is substantially C-shaped to fit closely over the width and rim of the tyre. The tie downs are attached as described in the third embodiment. The C-shaped portions may be hinged so that they form the same shape as the tyre when fitted.

Figure 17 depicts a fourth embodiment 310 of the securing device of the invention which is substantially the same in structure and working as the third embodiment with the principle difference being the abutment means on the inner surface of legs 330 in the fourth embodiment is in the form of a substantially triangular shaped member 340 instead of a series of fins 240. The cross-section of member 340 is substantially the same as the faces of each of the fins 240. The member 340 may be formed integrally with portions 222 and 224.

Figure 18 depicts a fifth embodiment 410 of the securing device of the invention which is substantially the same in structure and working as the third embodiment with the principle differences being the pair of straps 243 in the third embodiment 210 is replaced by a single continuous strap 343. The continuous strap 343, along
5 both its edges, is stitched onto the elongate strips forming portions 222 and 224. As such, there is no need for any slots to be located at the ends of strips 344 as in the third embodiment.

Figure 19 depicts a sixth embodiment 510 of the securing device of the invention which is substantially the same in structure and working as the third embodiment
10 with the principle difference being the absence of an abutment member on the inner surface of legs 530. This embodiment is suitable for use on slick or treadless tyres.

Various other modifications or variations may be made to the embodiments described without departing from the spirit and scope of the invention.

CLAIMS

1. A device for securing at least one wheel (64, 66, 266) of a motorcycle (60, 260) to a surface, the device including a frame member (20, 120, 220) locatable over the upper portion of a tyre (61, 161, 261) of the at least one wheel (64, 66, 266) of the motorcycle (60, 260), and a respective tie down (50, 150, 250) attachable to each of opposite sides of the frame member (20, 120, 220), each tie down (50, 150, 250) including an attachment member (58, 158, 258) at its end remote from the frame member (20, 120, 220), whereby when the frame member (20, 120, 220) is located over the tyre (61, 161, 261), the at least one wheel (64, 66, 266) is able to be secured to the surface by engaging each attachment member (58, 158, 258) with an anchor point situated below the frame member (20, 120, 220); the device, when securing the wheel (64, 66, 266), is arranged in such a way that a straight line connecting the attachment members (58, 158, 258) is substantially parallel to the wheel axis thereby maintaining the motorcycle (60, 260) in a substantially upright position relative to the surface when the at least one wheel (64, 66, 266) is secured to the surface.
2. The device as claimed in claim 1, wherein the frame member (20, 120, 220) has a first portion (22, 122, 222) and a second portion (24, 124, 224) which are disposed relative to each other such that the frame member (20, 120, 220) is substantially symmetrical with respect to the positioning of the first (22, 122, 222) and second (24, 124, 224) portions on the tyre (61, 161, 261) when the device is located over or secured to the at least one wheel (64, 66, 266).
3. The device as claimed in claim 2, wherein each of the first (22, 122, 222) and second (24, 124, 224) portions is of U-shape configuration.
4. The device as claimed in claim 3, wherein each of the first (22, 122, 222) and second (24, 124, 224) portions includes an arcuate web (28, 128, 228) which conforms to the curvature of the tyre (61, 161, 261), and legs (30, 130, 230, 330, 530) which diverge from the arcuate webs (28, 128, 228) of the first (22, 122,

222) and second (24, 124, 224) portions are spaced apart to engage the tyre (61, 161, 261) at circumferentially spaced locations.

5. The device as claimed in any one of claims 2 to 4, wherein a connecting member (26, 126) is provided between the first and second portions.

6. The device as claimed in claim 5, wherein the connecting member (26, 126) is a bracket.

7. The device as claimed in any of claim 1 to 6 wherein the frame member (20, 120, 220) includes at least one elongate load distributing member (172) which is arcuately shaped to conform to the curvature of the tyre (61, 161, 261).

8. The device as claimed in claim 7, when appended to any one of claims 2 to 6, wherein a single load distributing member (172) extends between the first (22, 122, 222) and second (24, 124, 224) portions of the frame member (20, 120, 220).

9. The device as claimed in claim 7, when appended to any one of claims 2 to 6, wherein each of the first (22, 122, 222) and second (24, 124, 224) portions of the frame member (20, 120, 220) includes a respective load distributing member (172).

10. The device as claimed in claim 7, when appended to claim 3 or claim 4, wherein the at least one load distributing member (172) is accommodated within the U-shaped portion of each of the first (22, 122, 222) and second (24, 124, 224) portions, and is U-shaped in cross-section.

11. The device as claimed in any one of claims 1 to 10, wherein the tie downs (50, 150, 250) are adjustable straps (52, 152, 252).

12. The device as claimed in any one of claims 1 to 10, wherein the attachment members (58, 158, 258) are hooks.

FIGURE 1

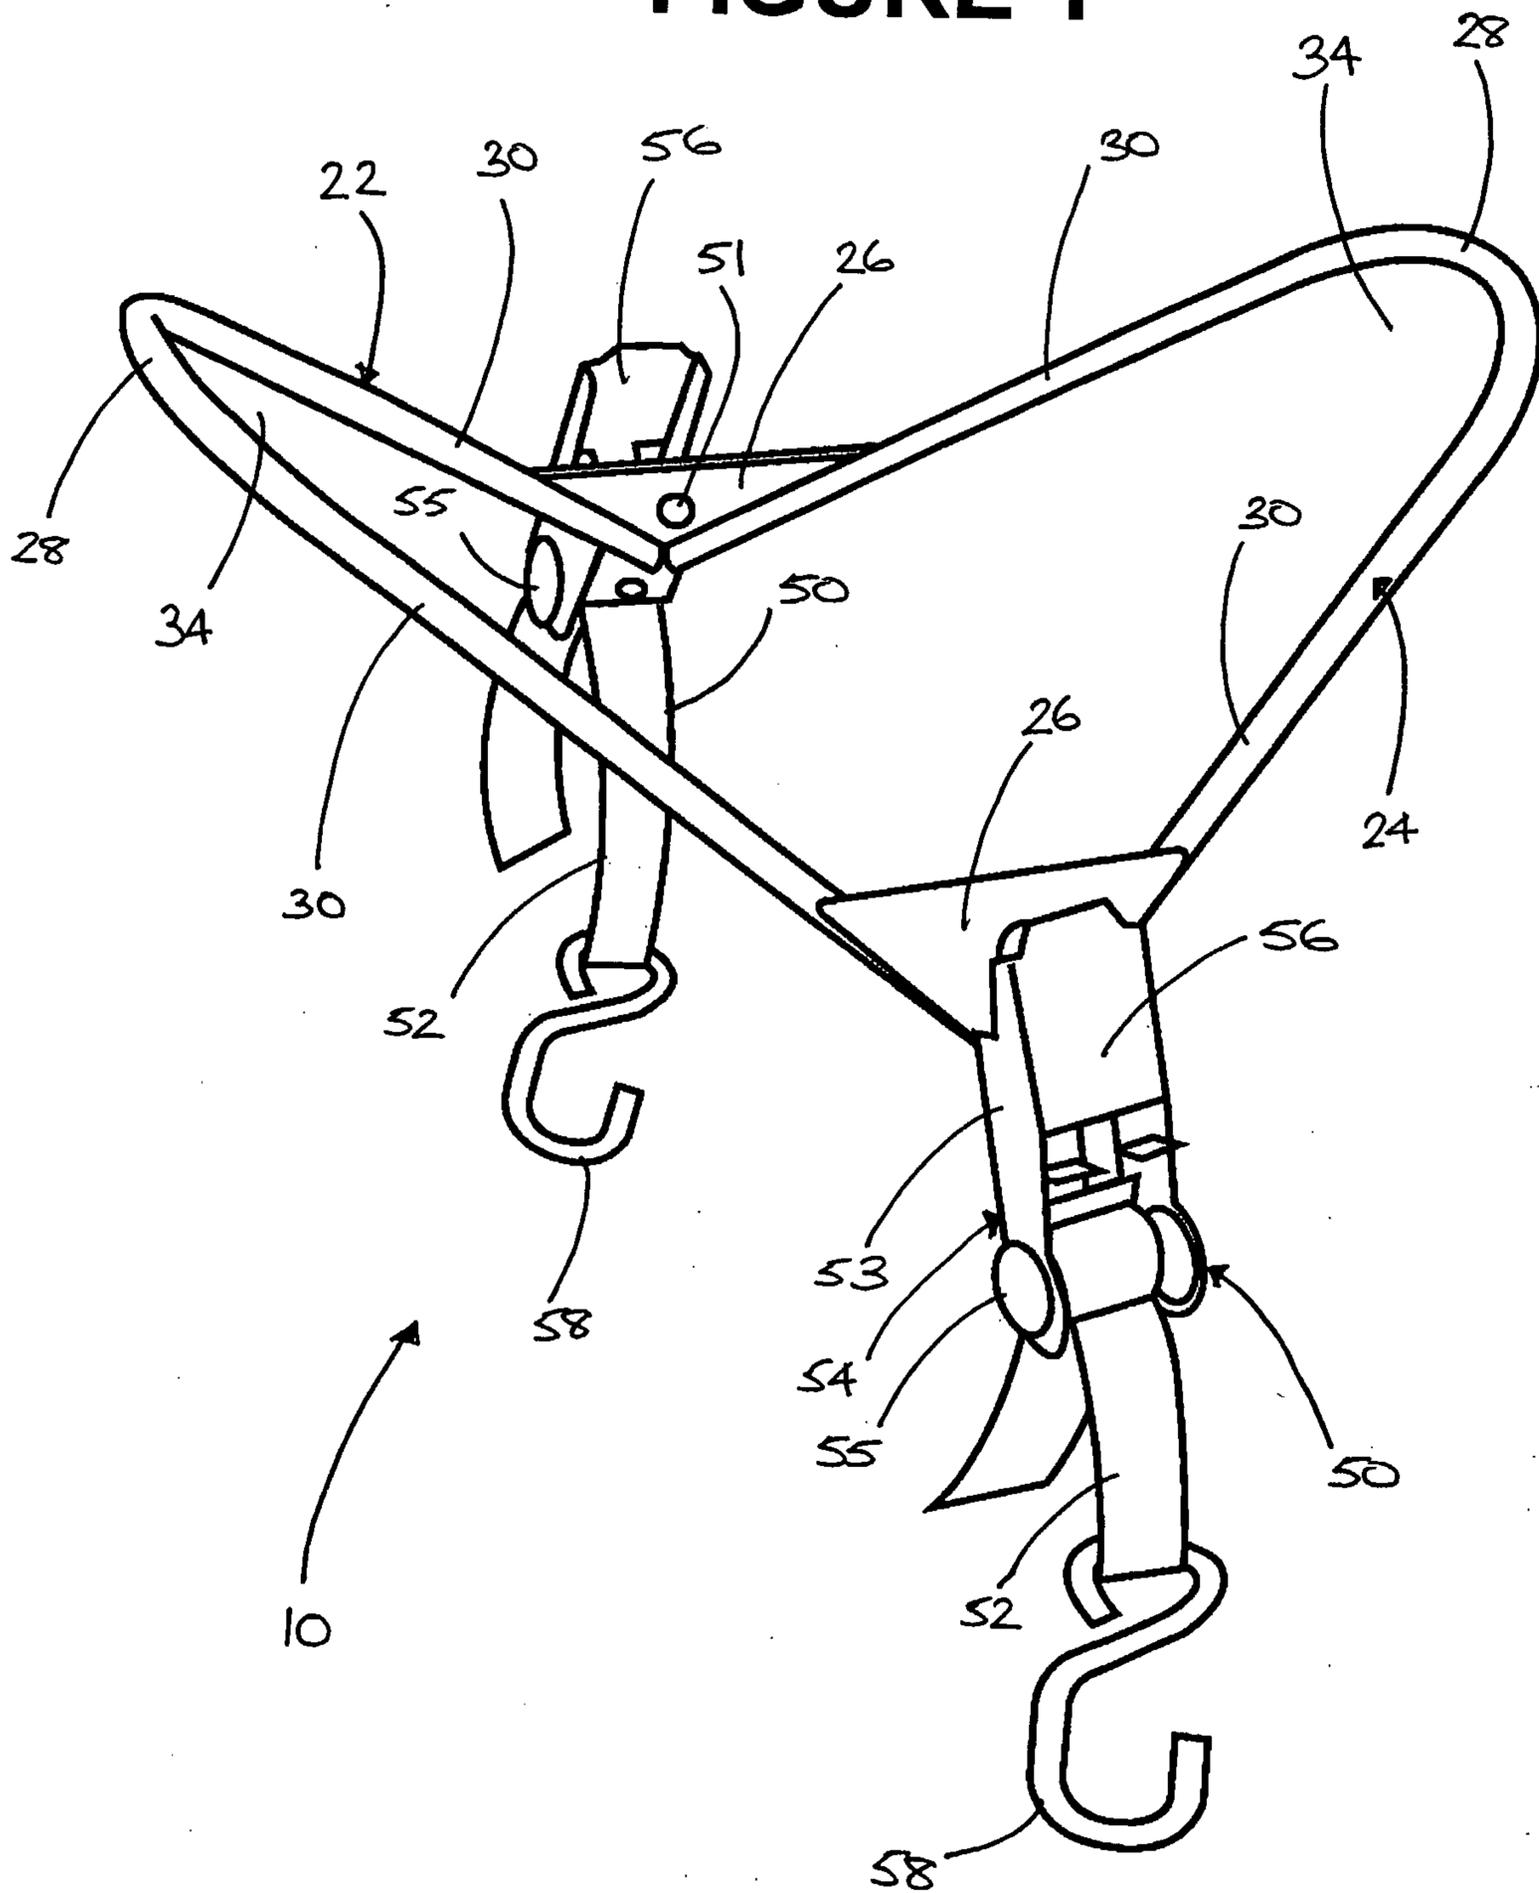


FIGURE 2

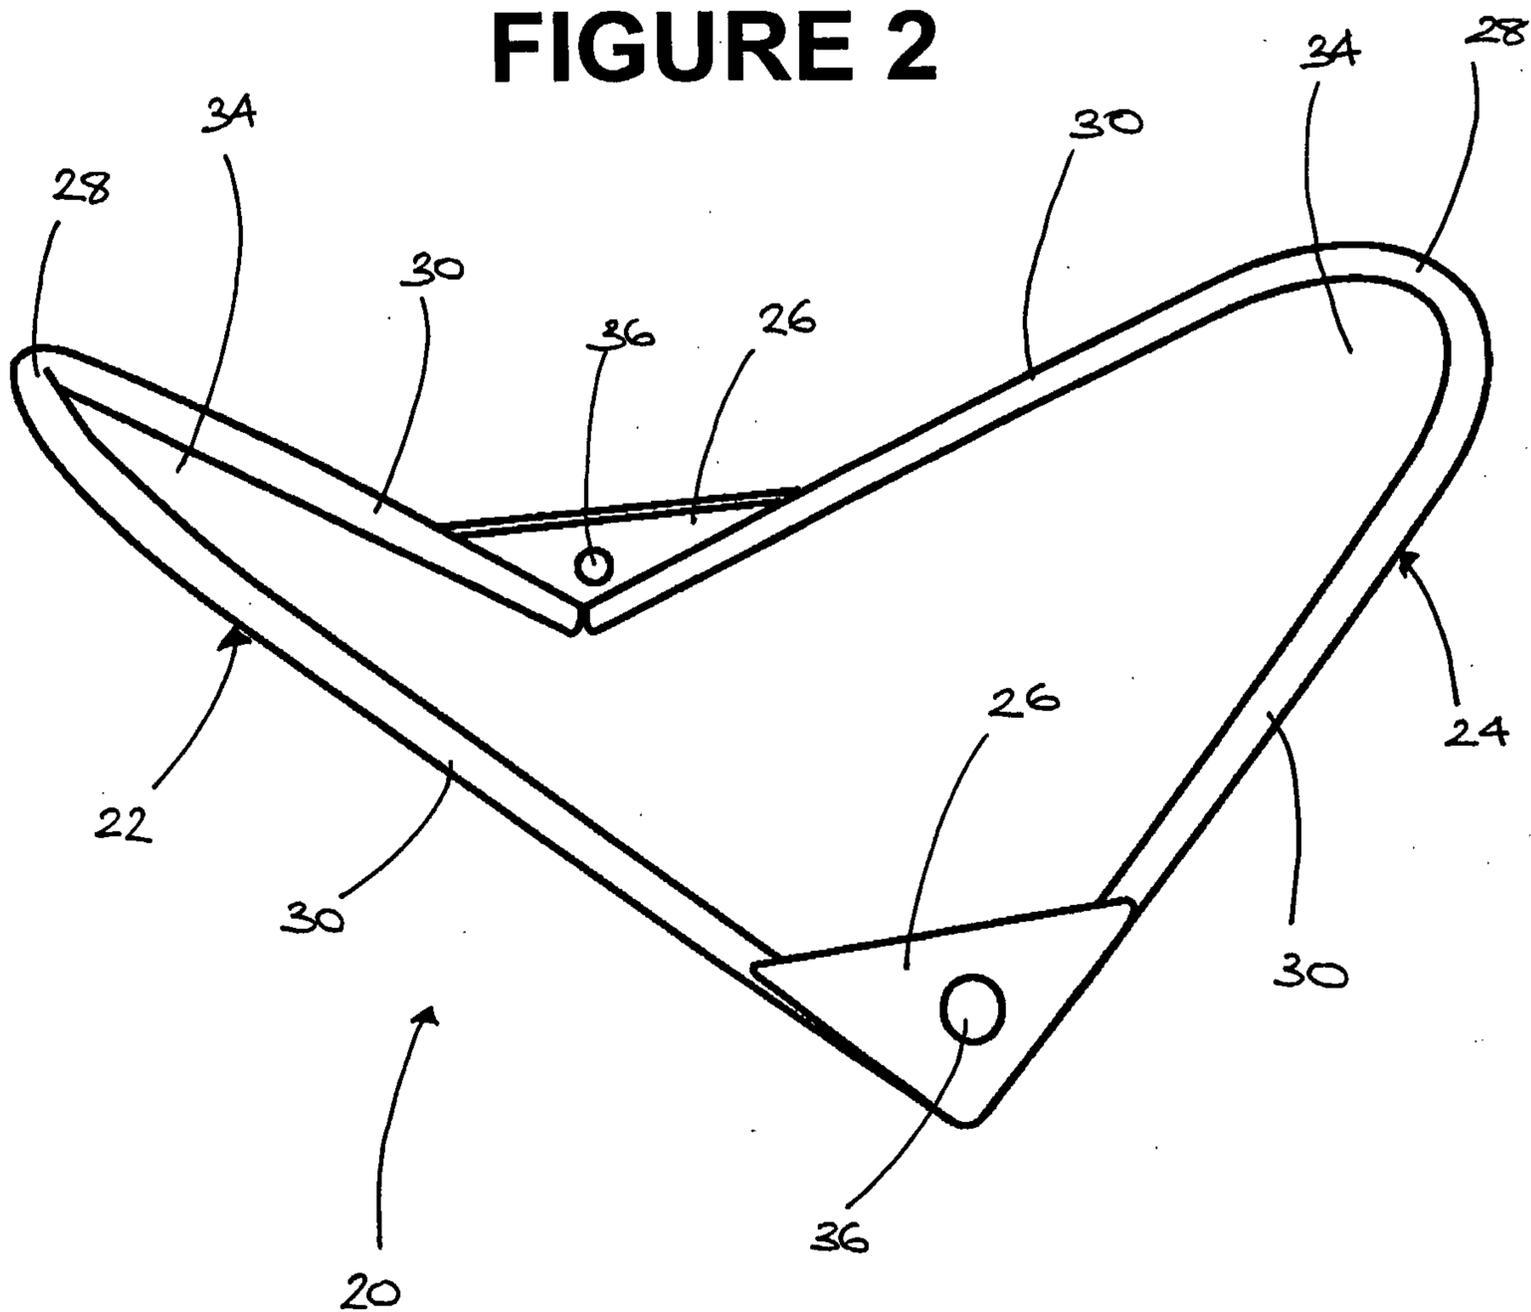


FIGURE 3

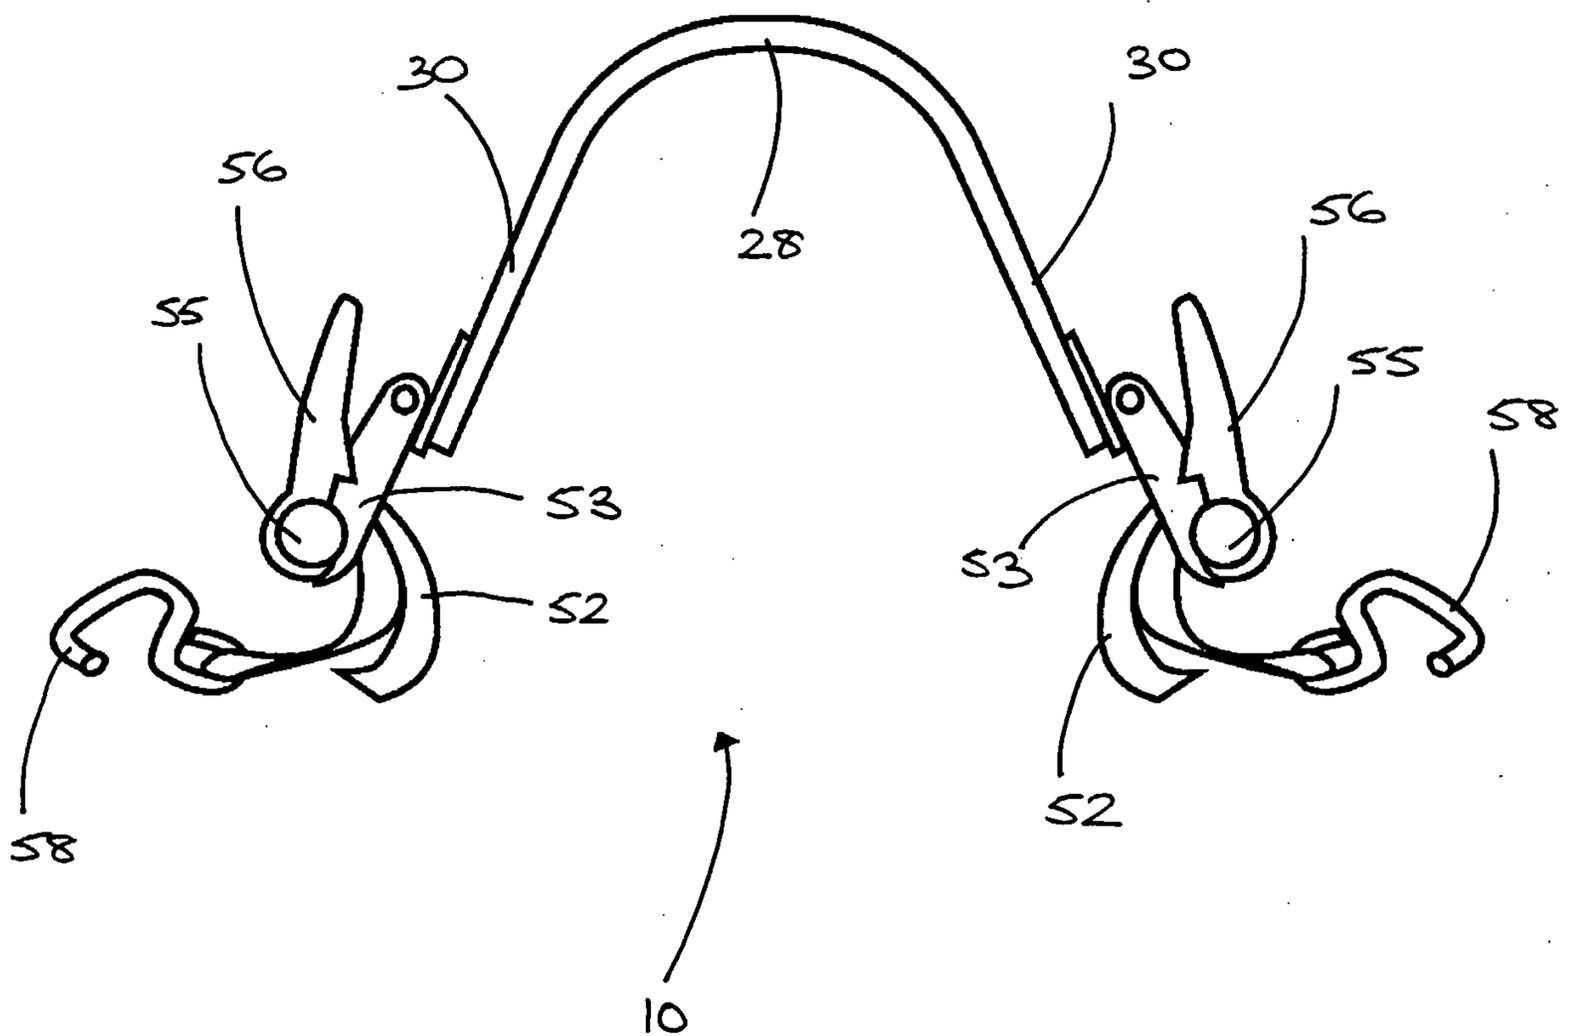


FIGURE 4

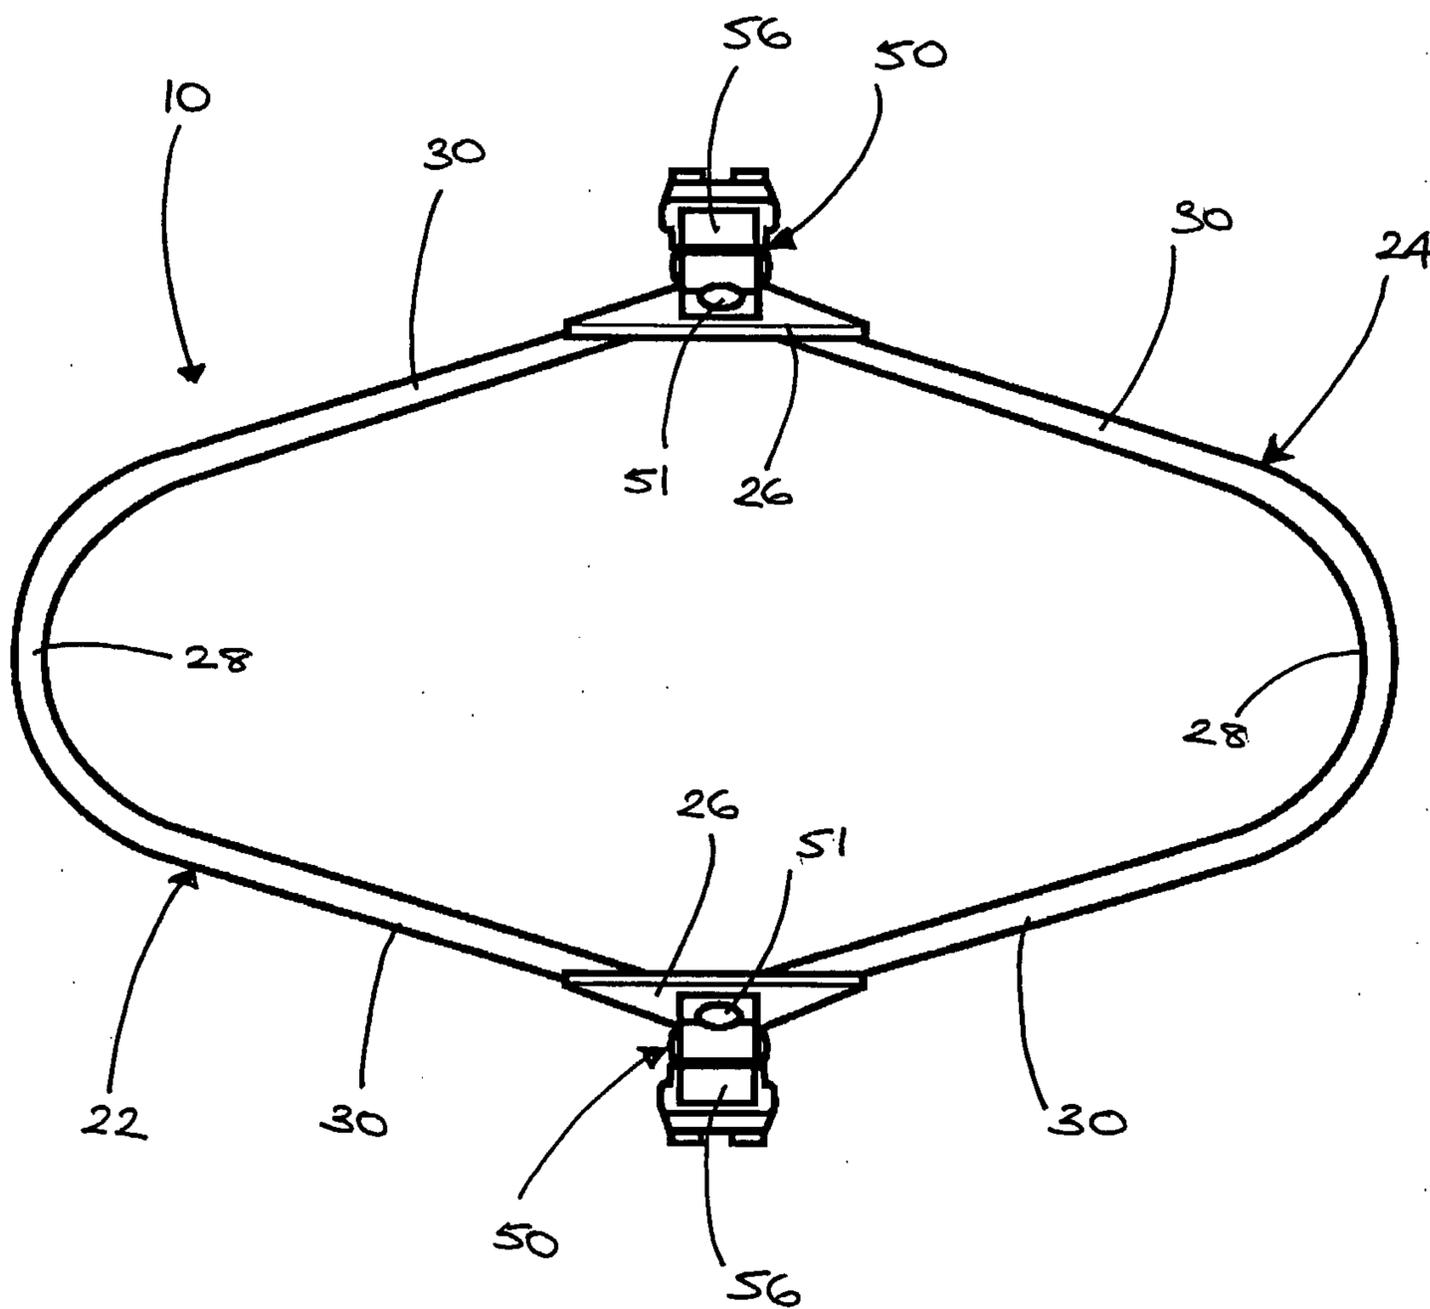


FIGURE 5

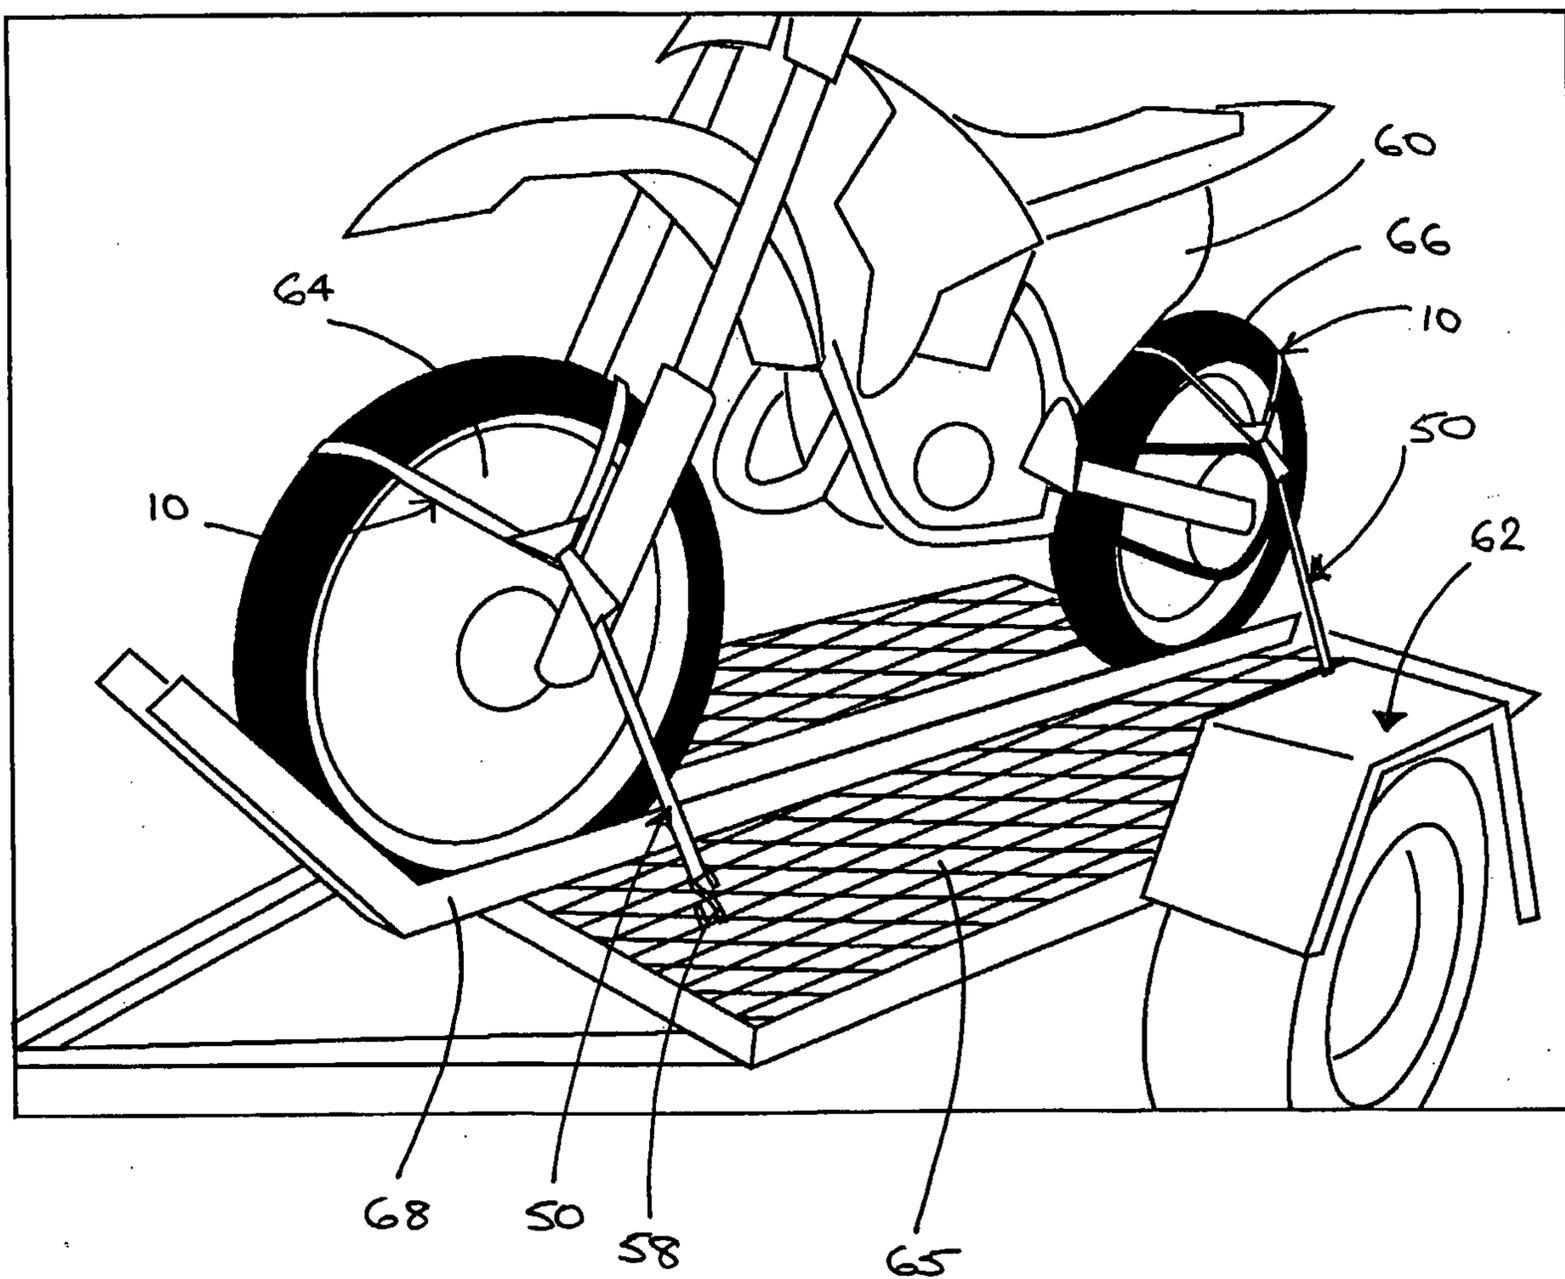


FIGURE 6

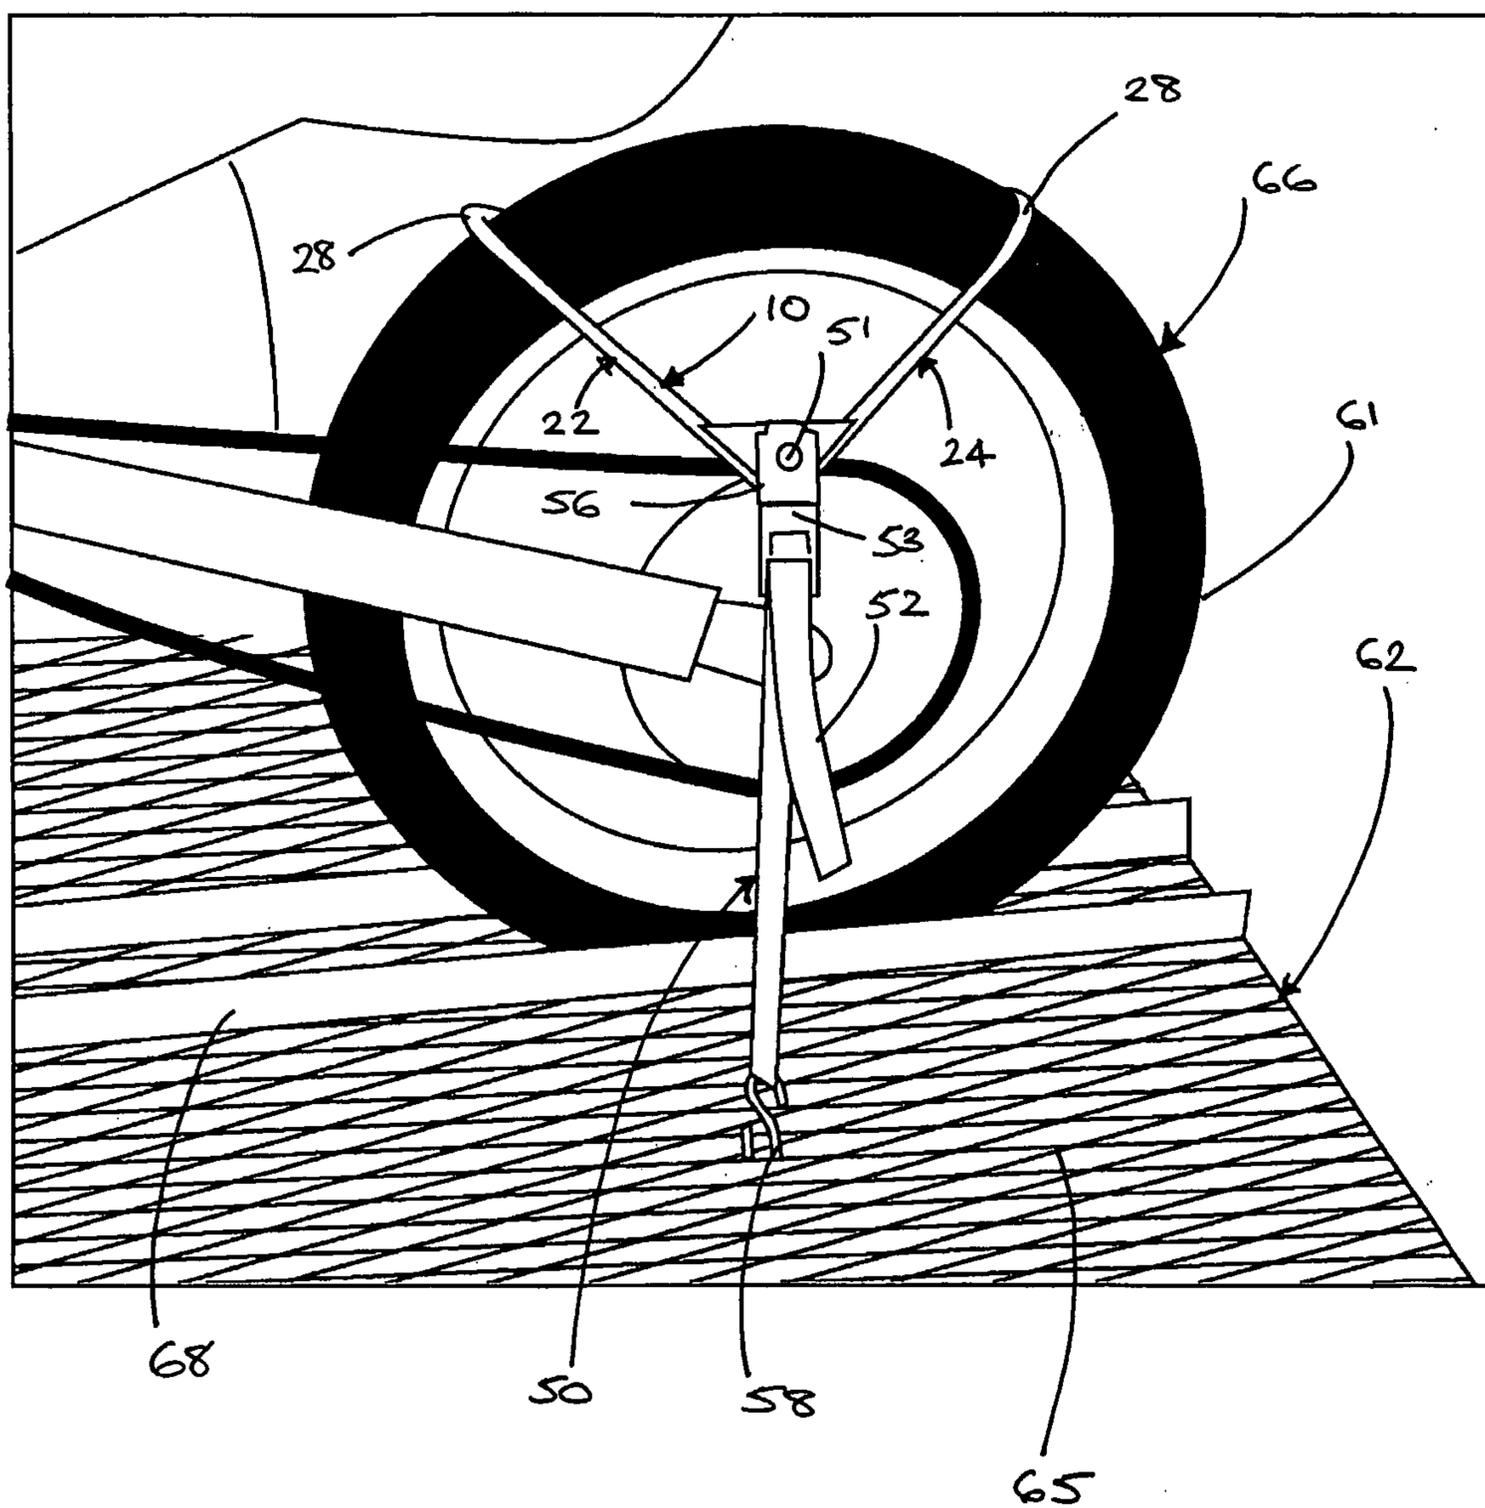


FIGURE 7

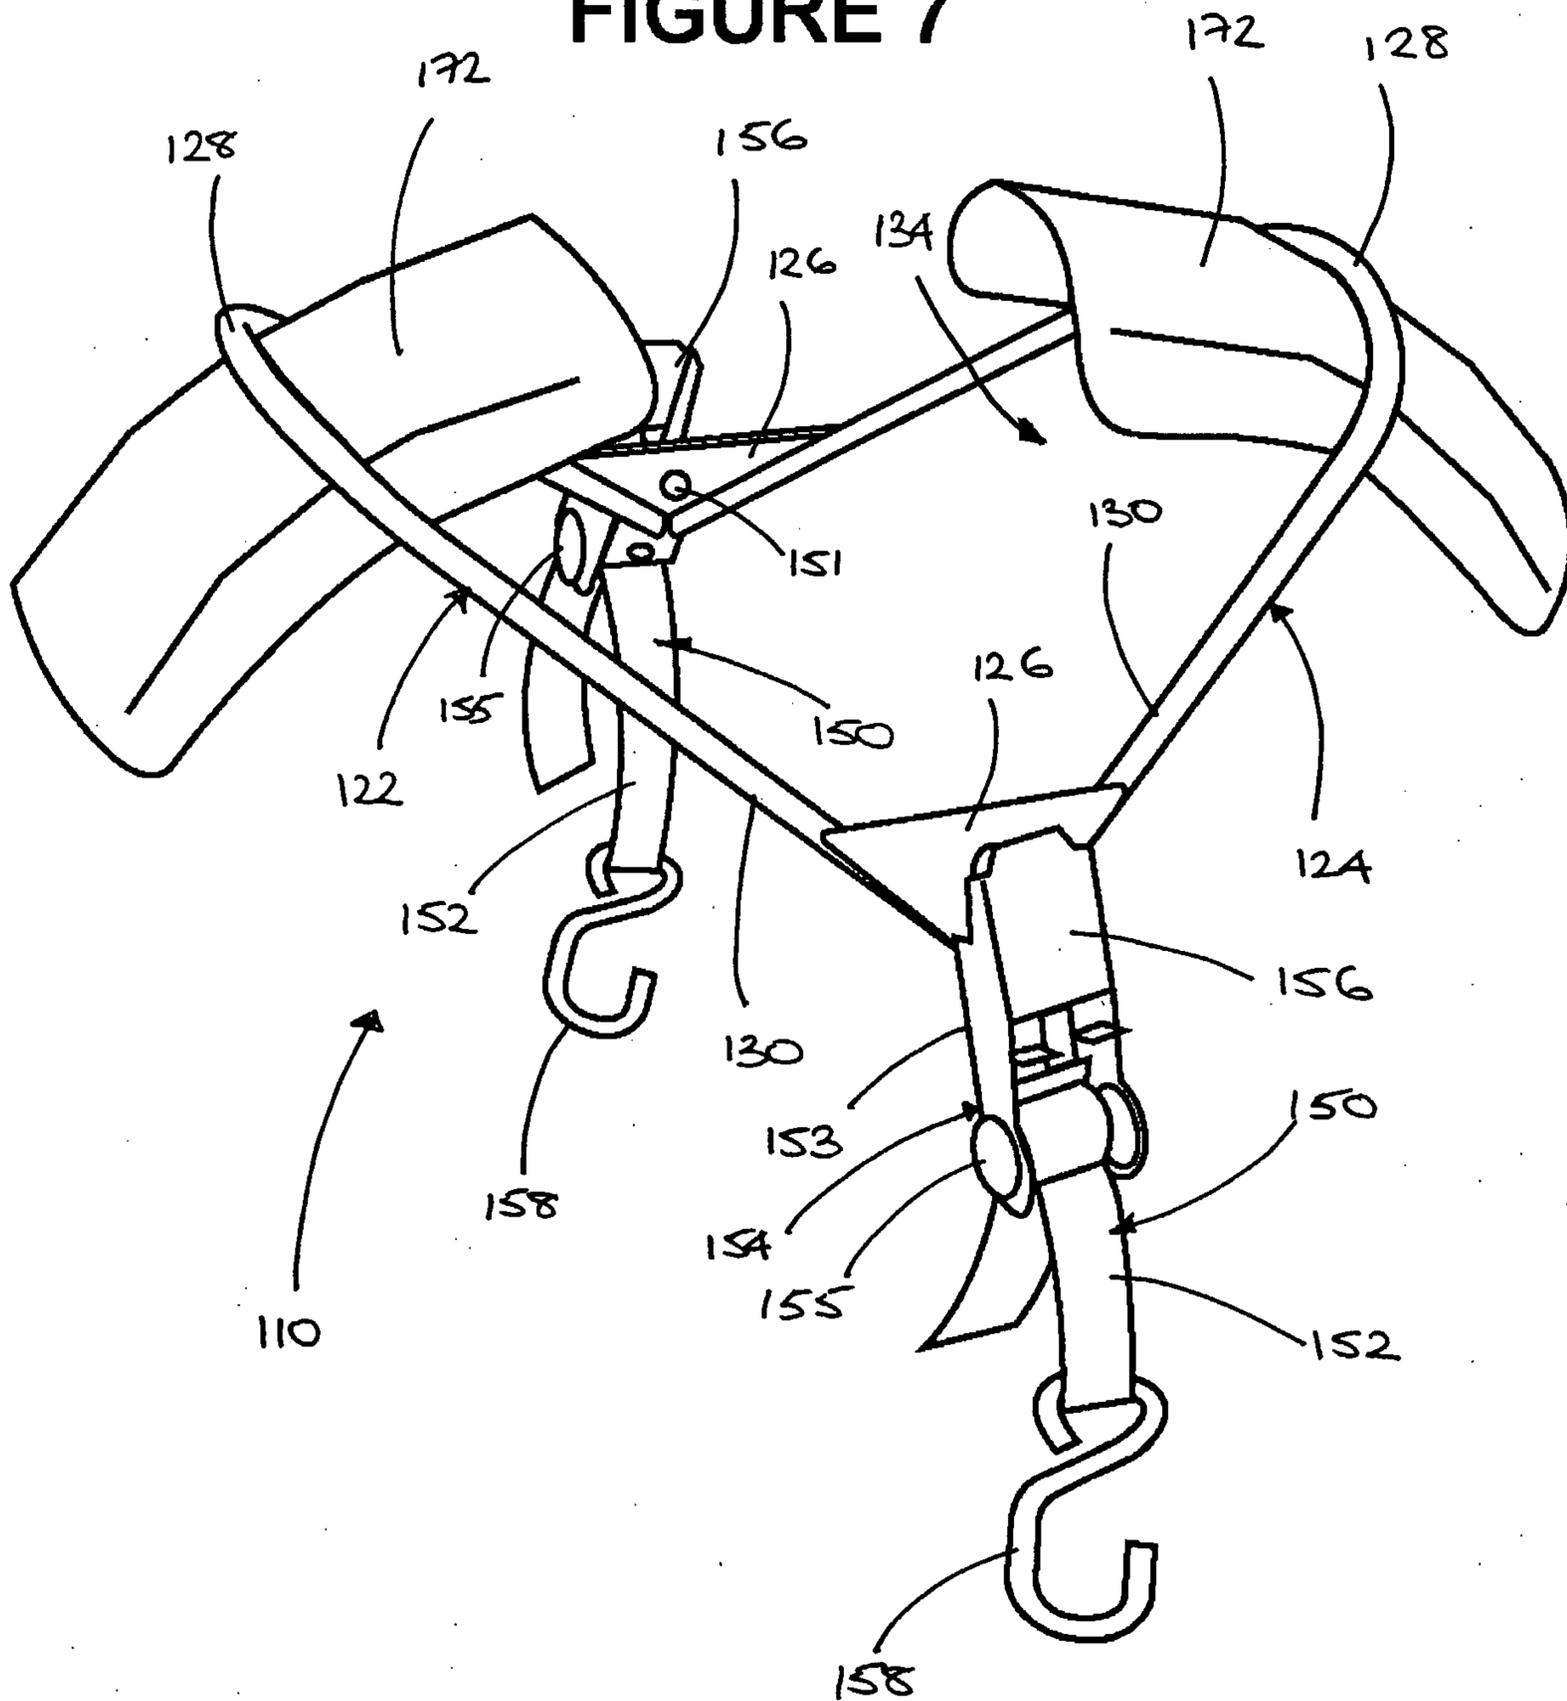
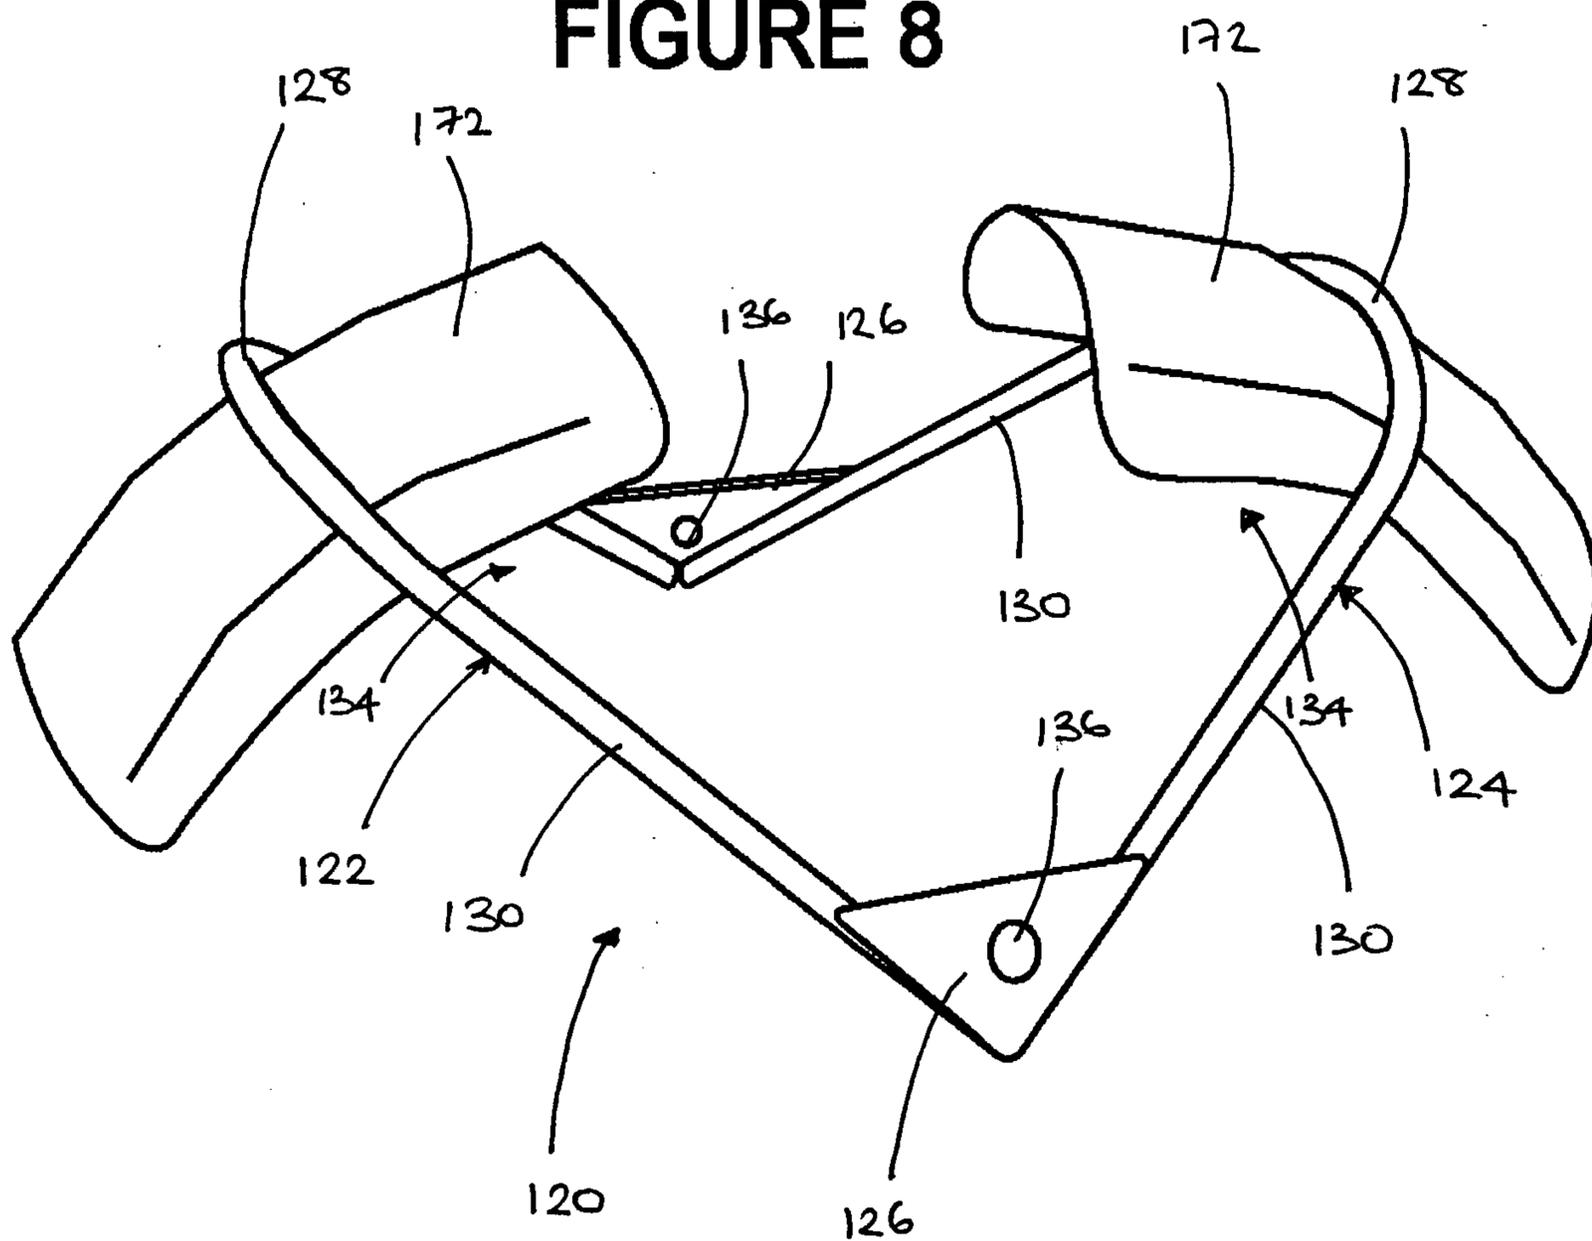


FIGURE 8



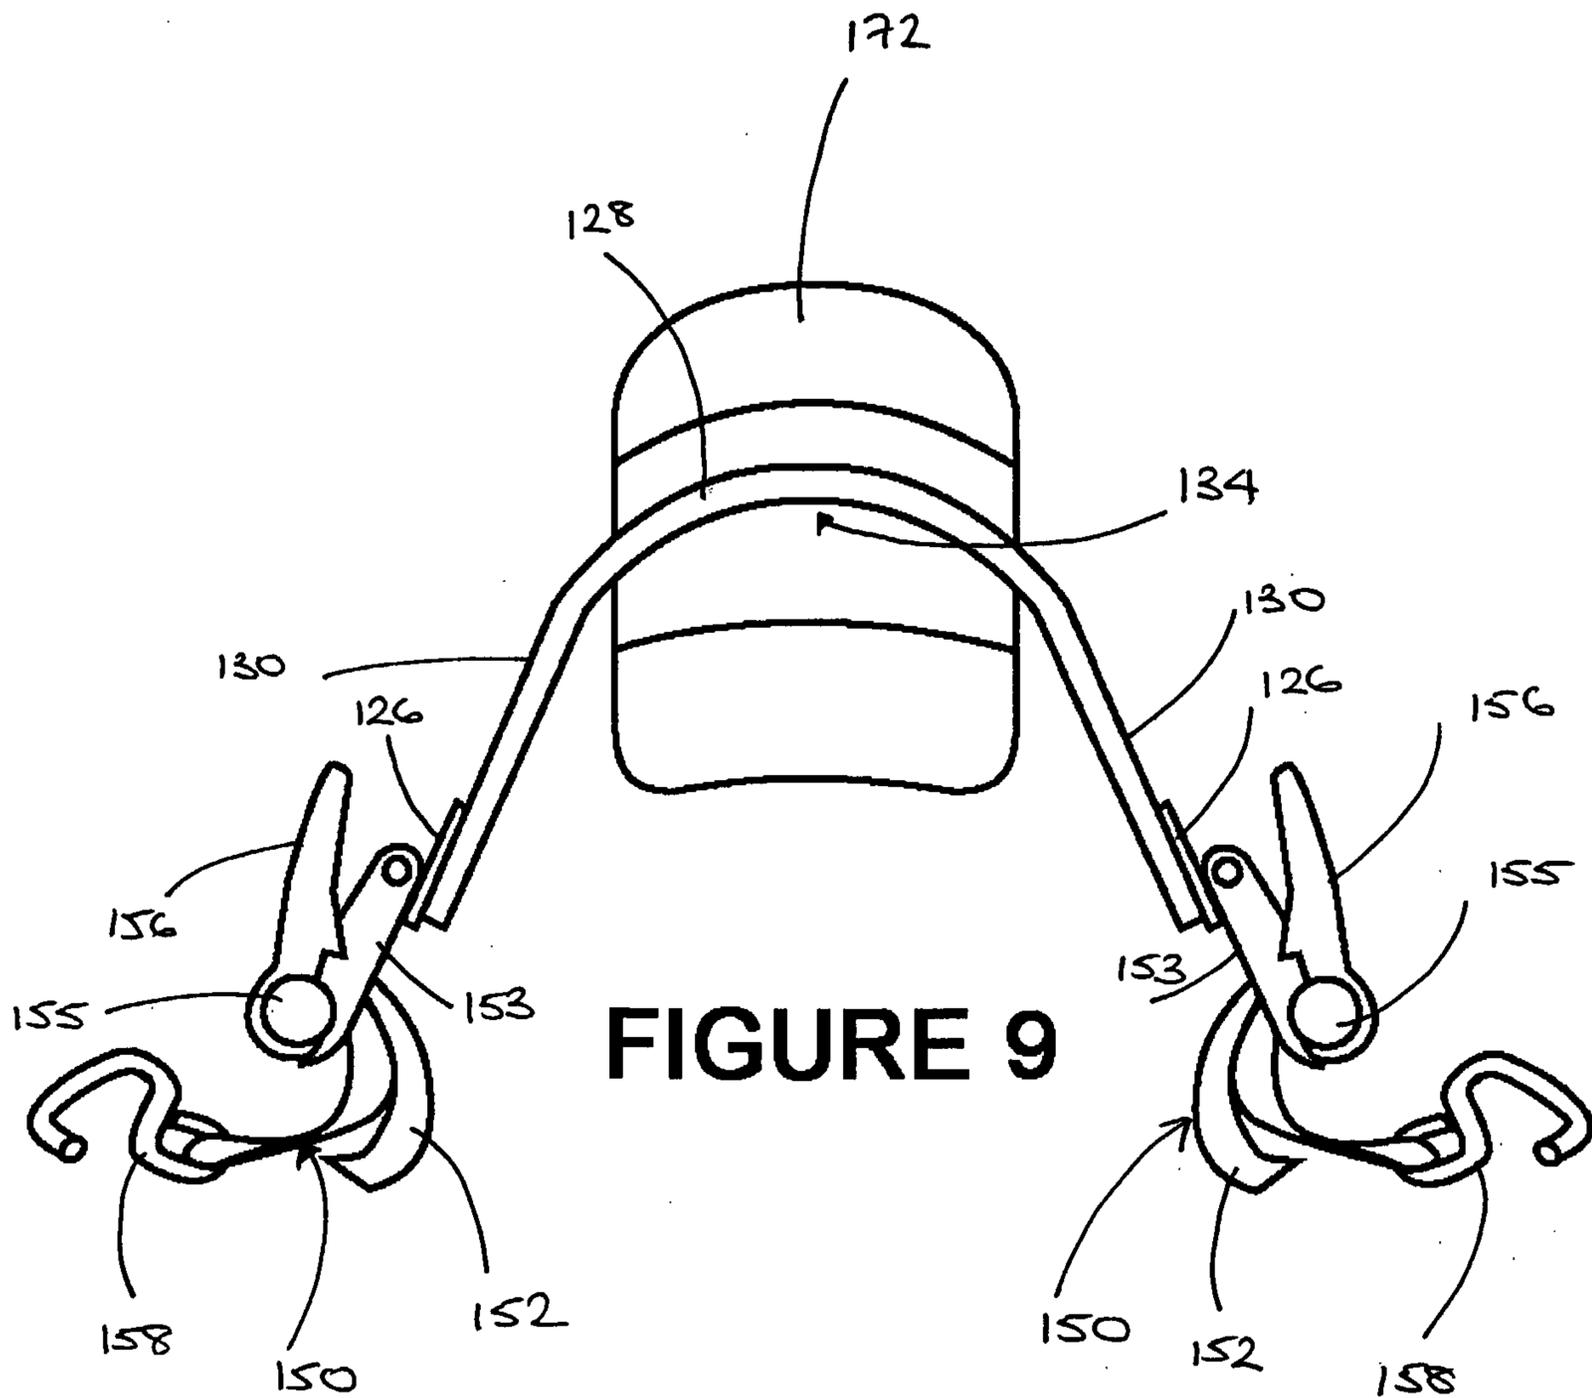


FIGURE 9

FIGURE 11

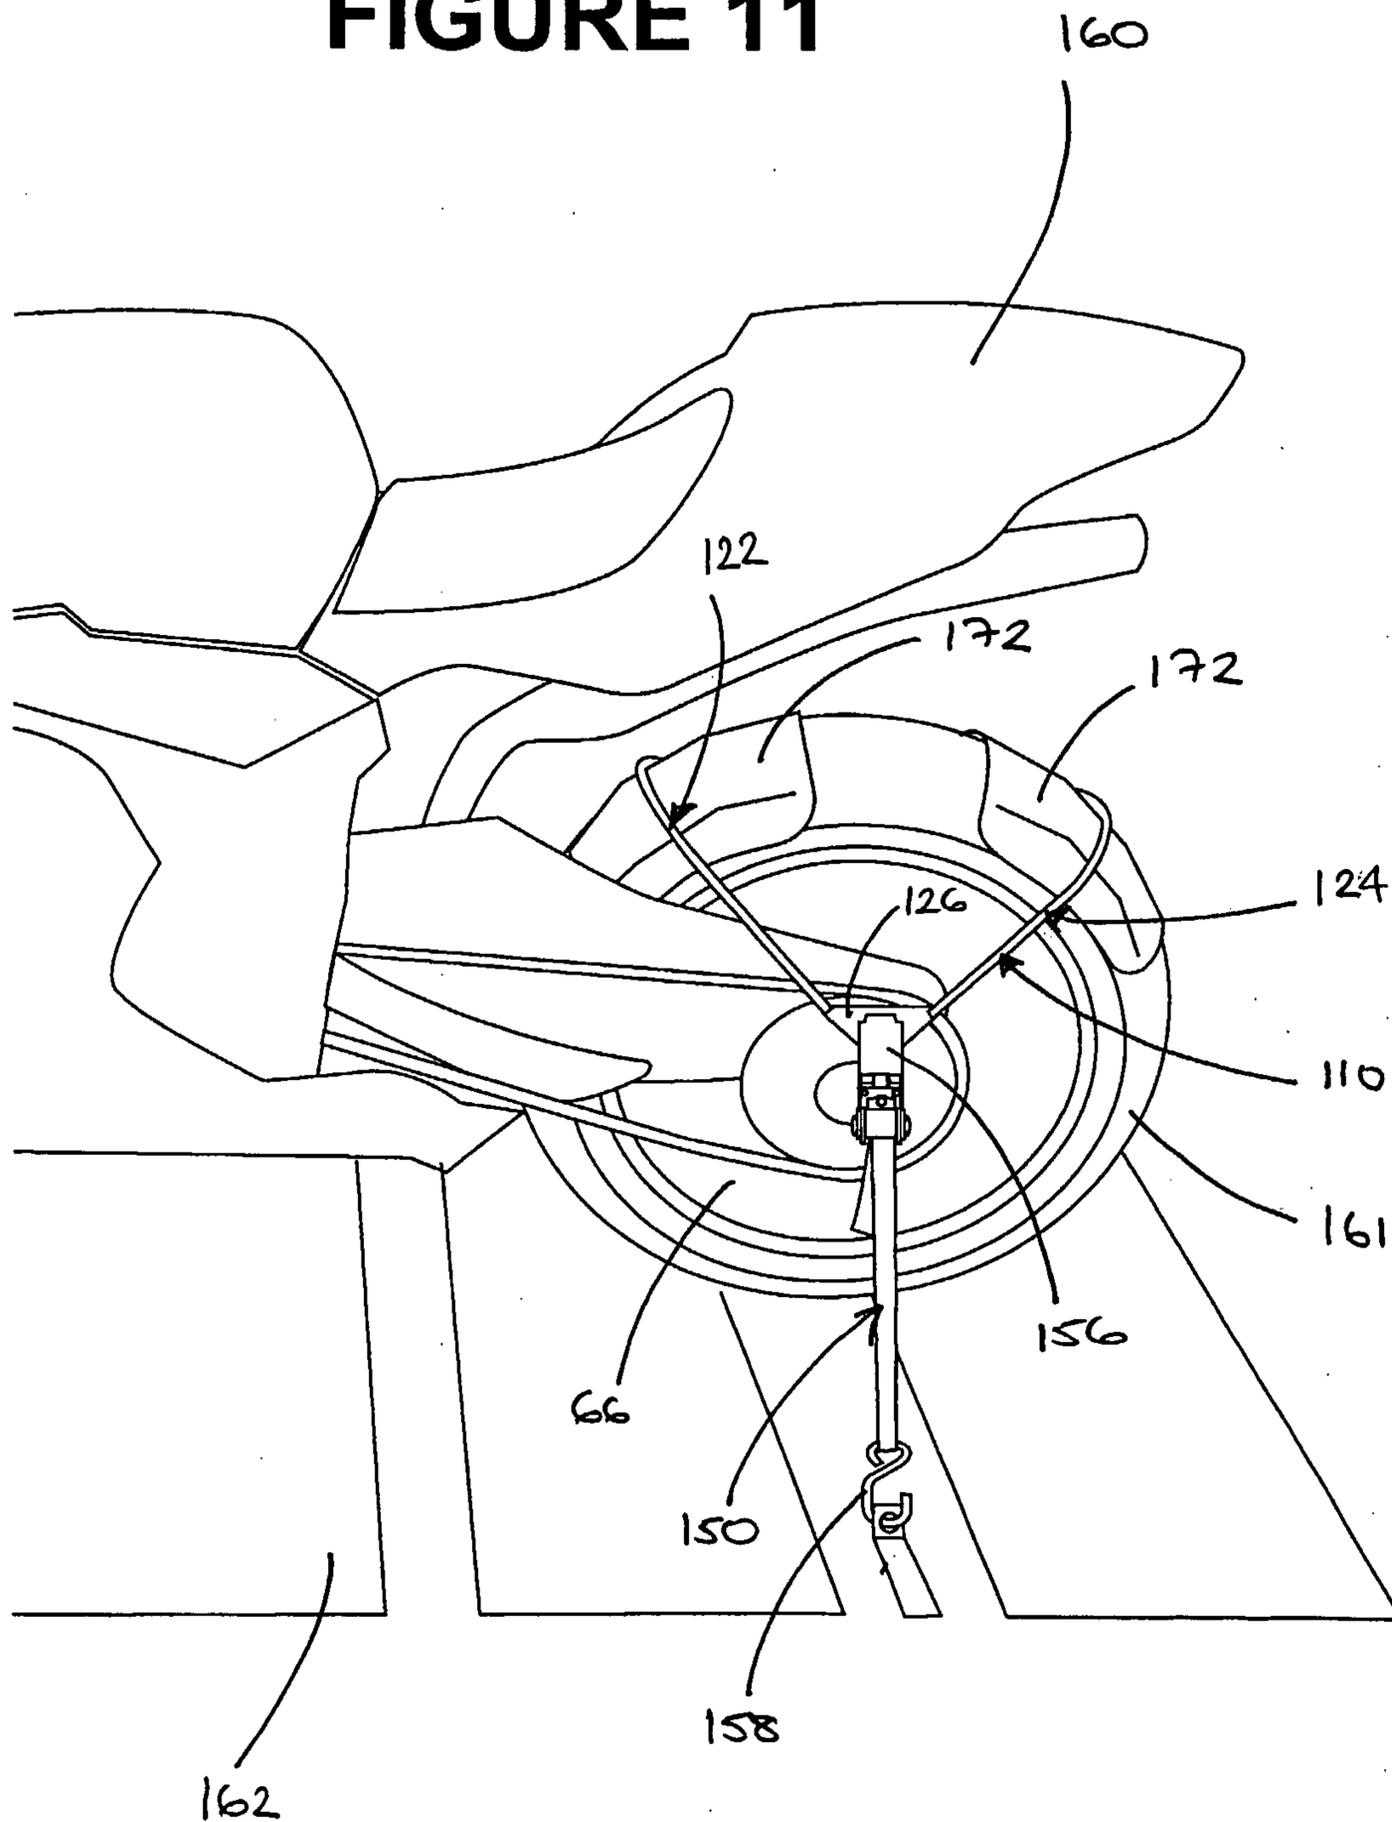


FIGURE 13

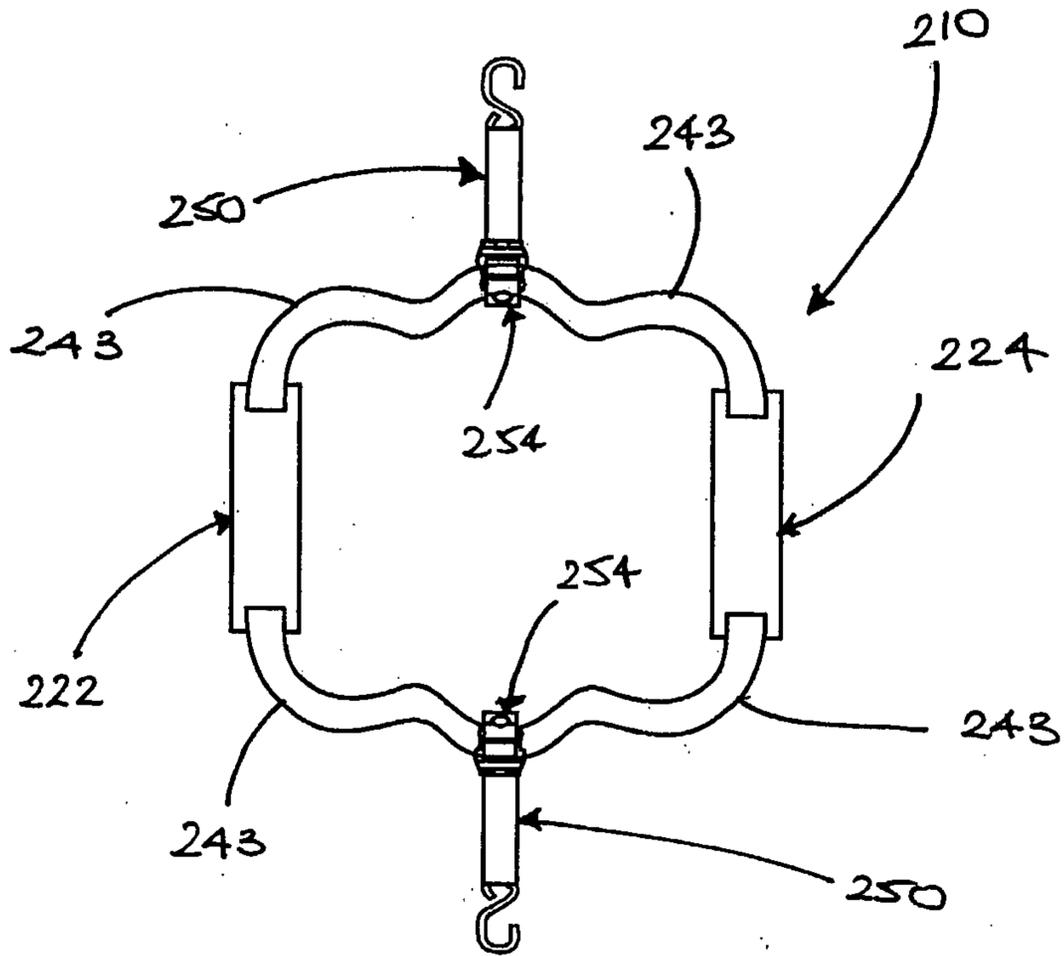


FIGURE 14

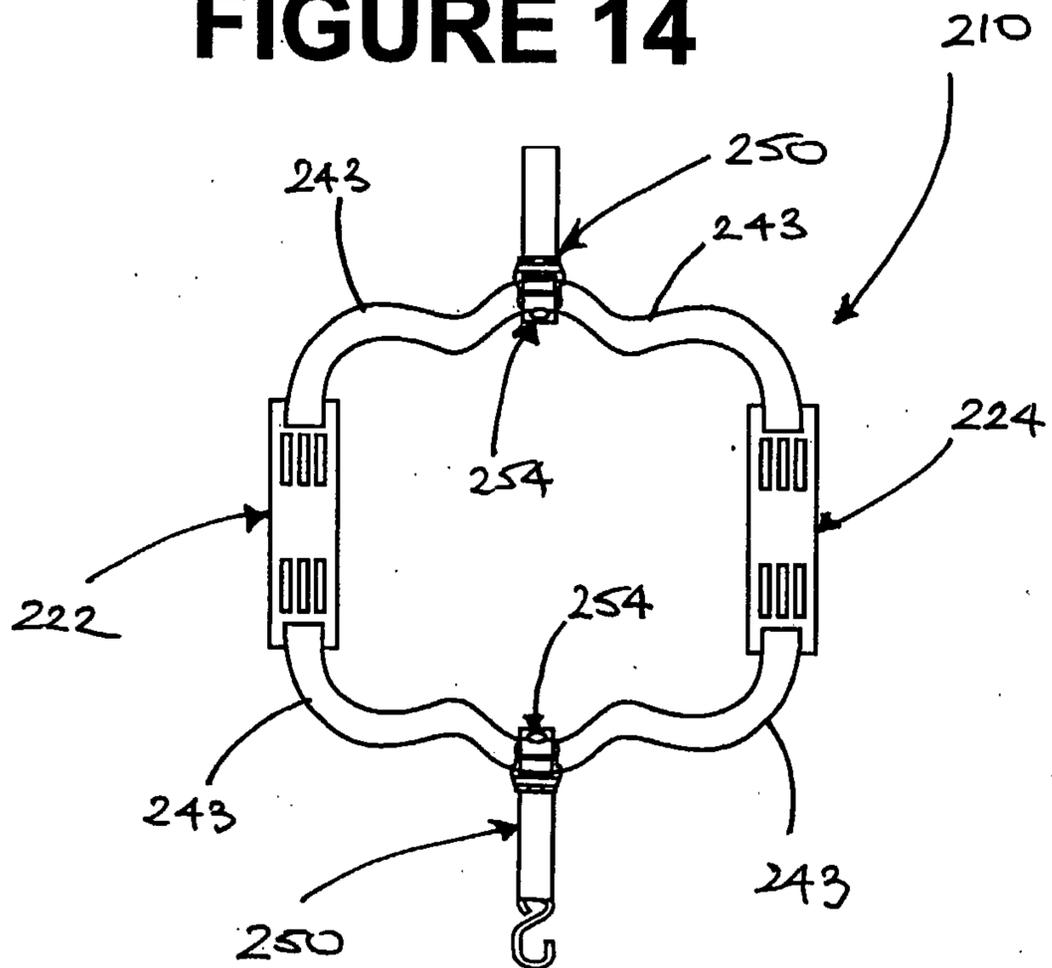


FIGURE 15

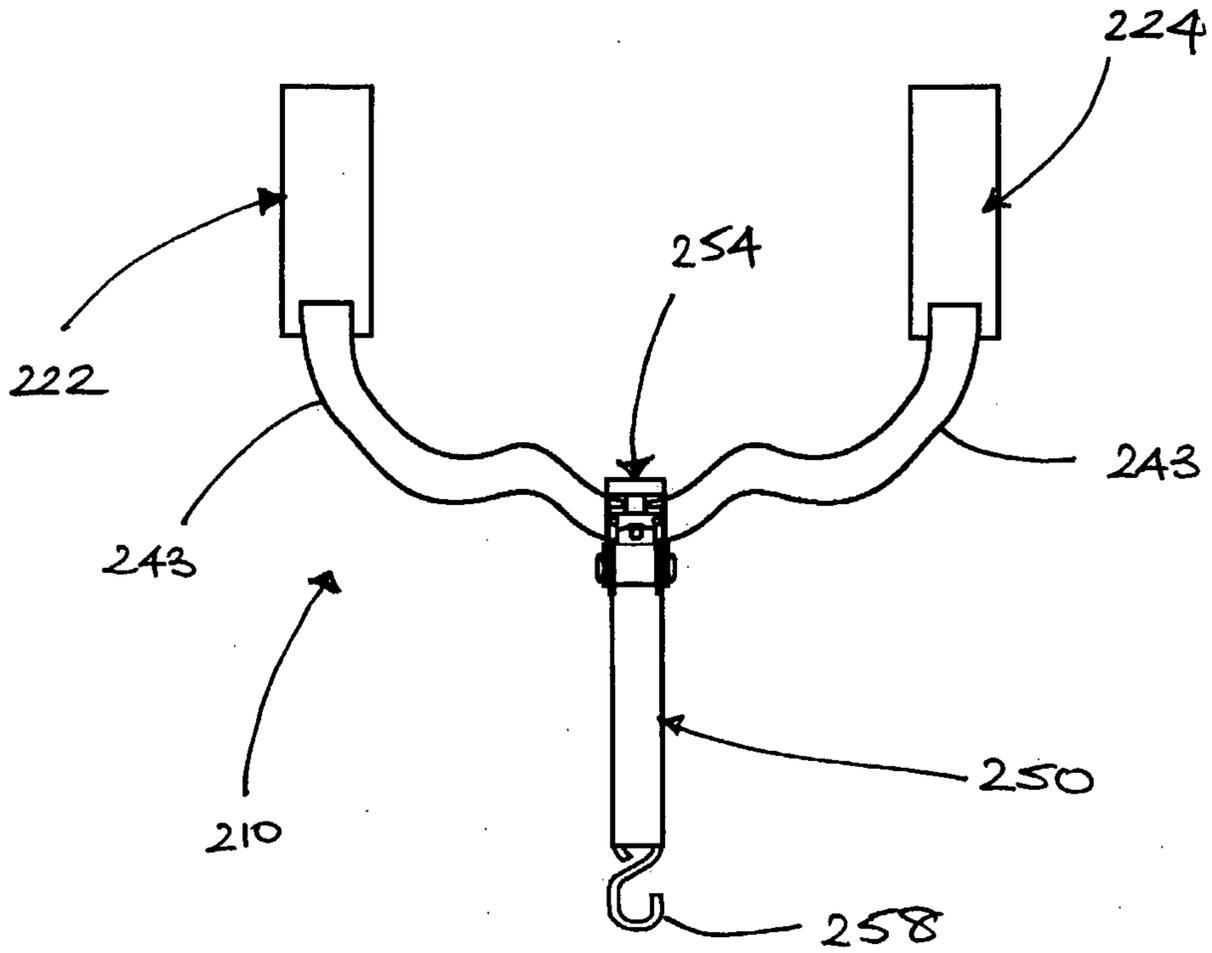


FIGURE 16

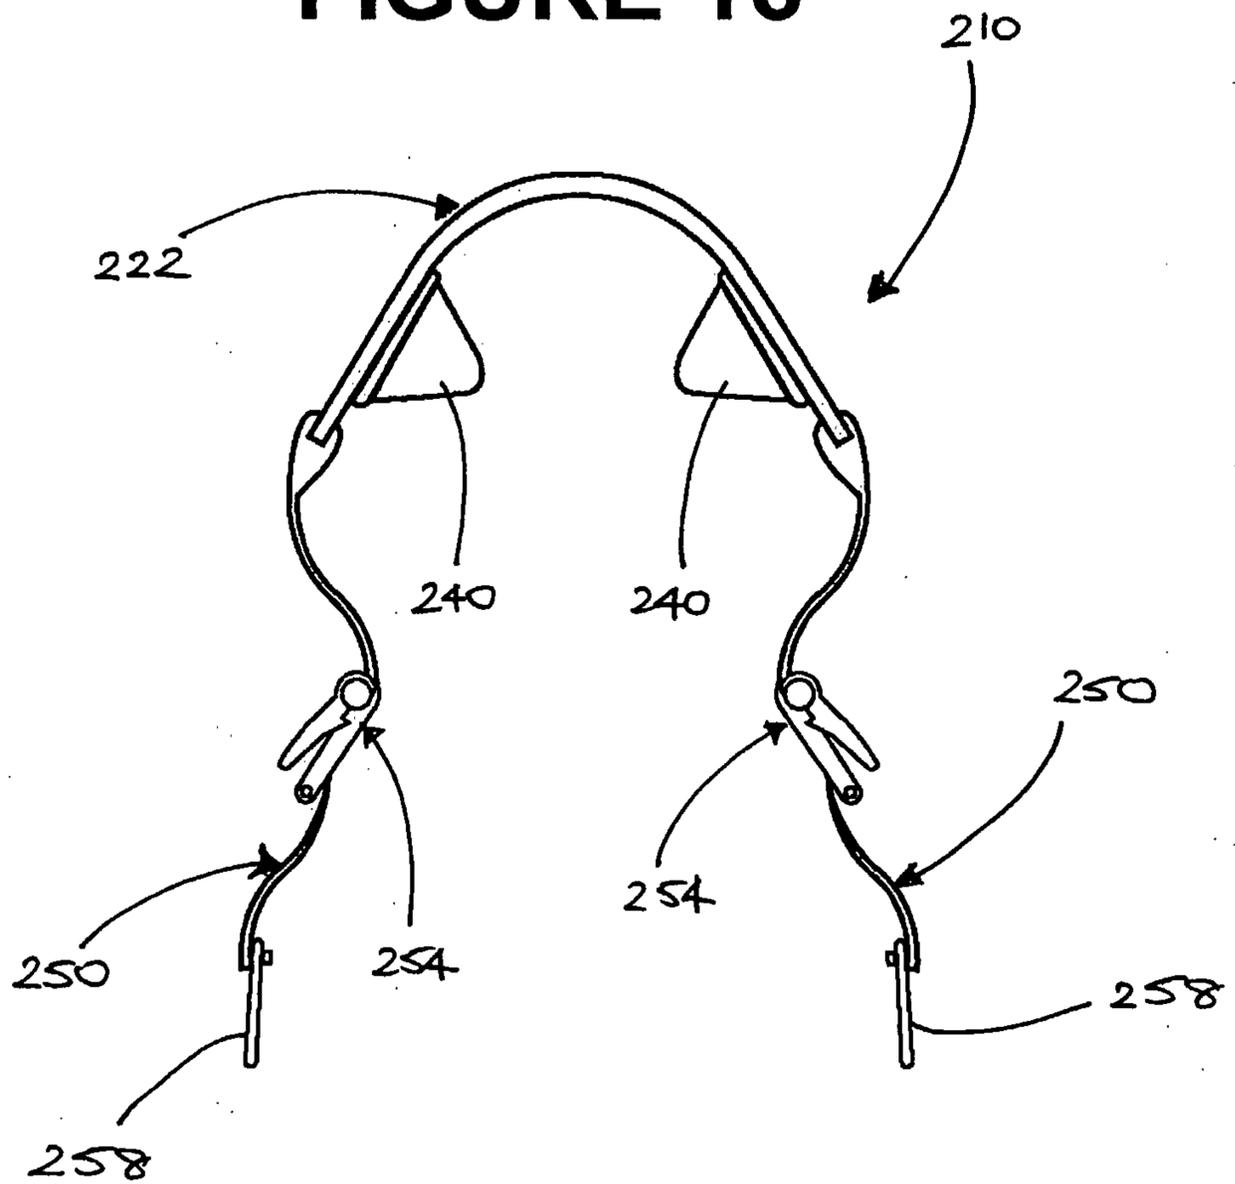


FIGURE 17

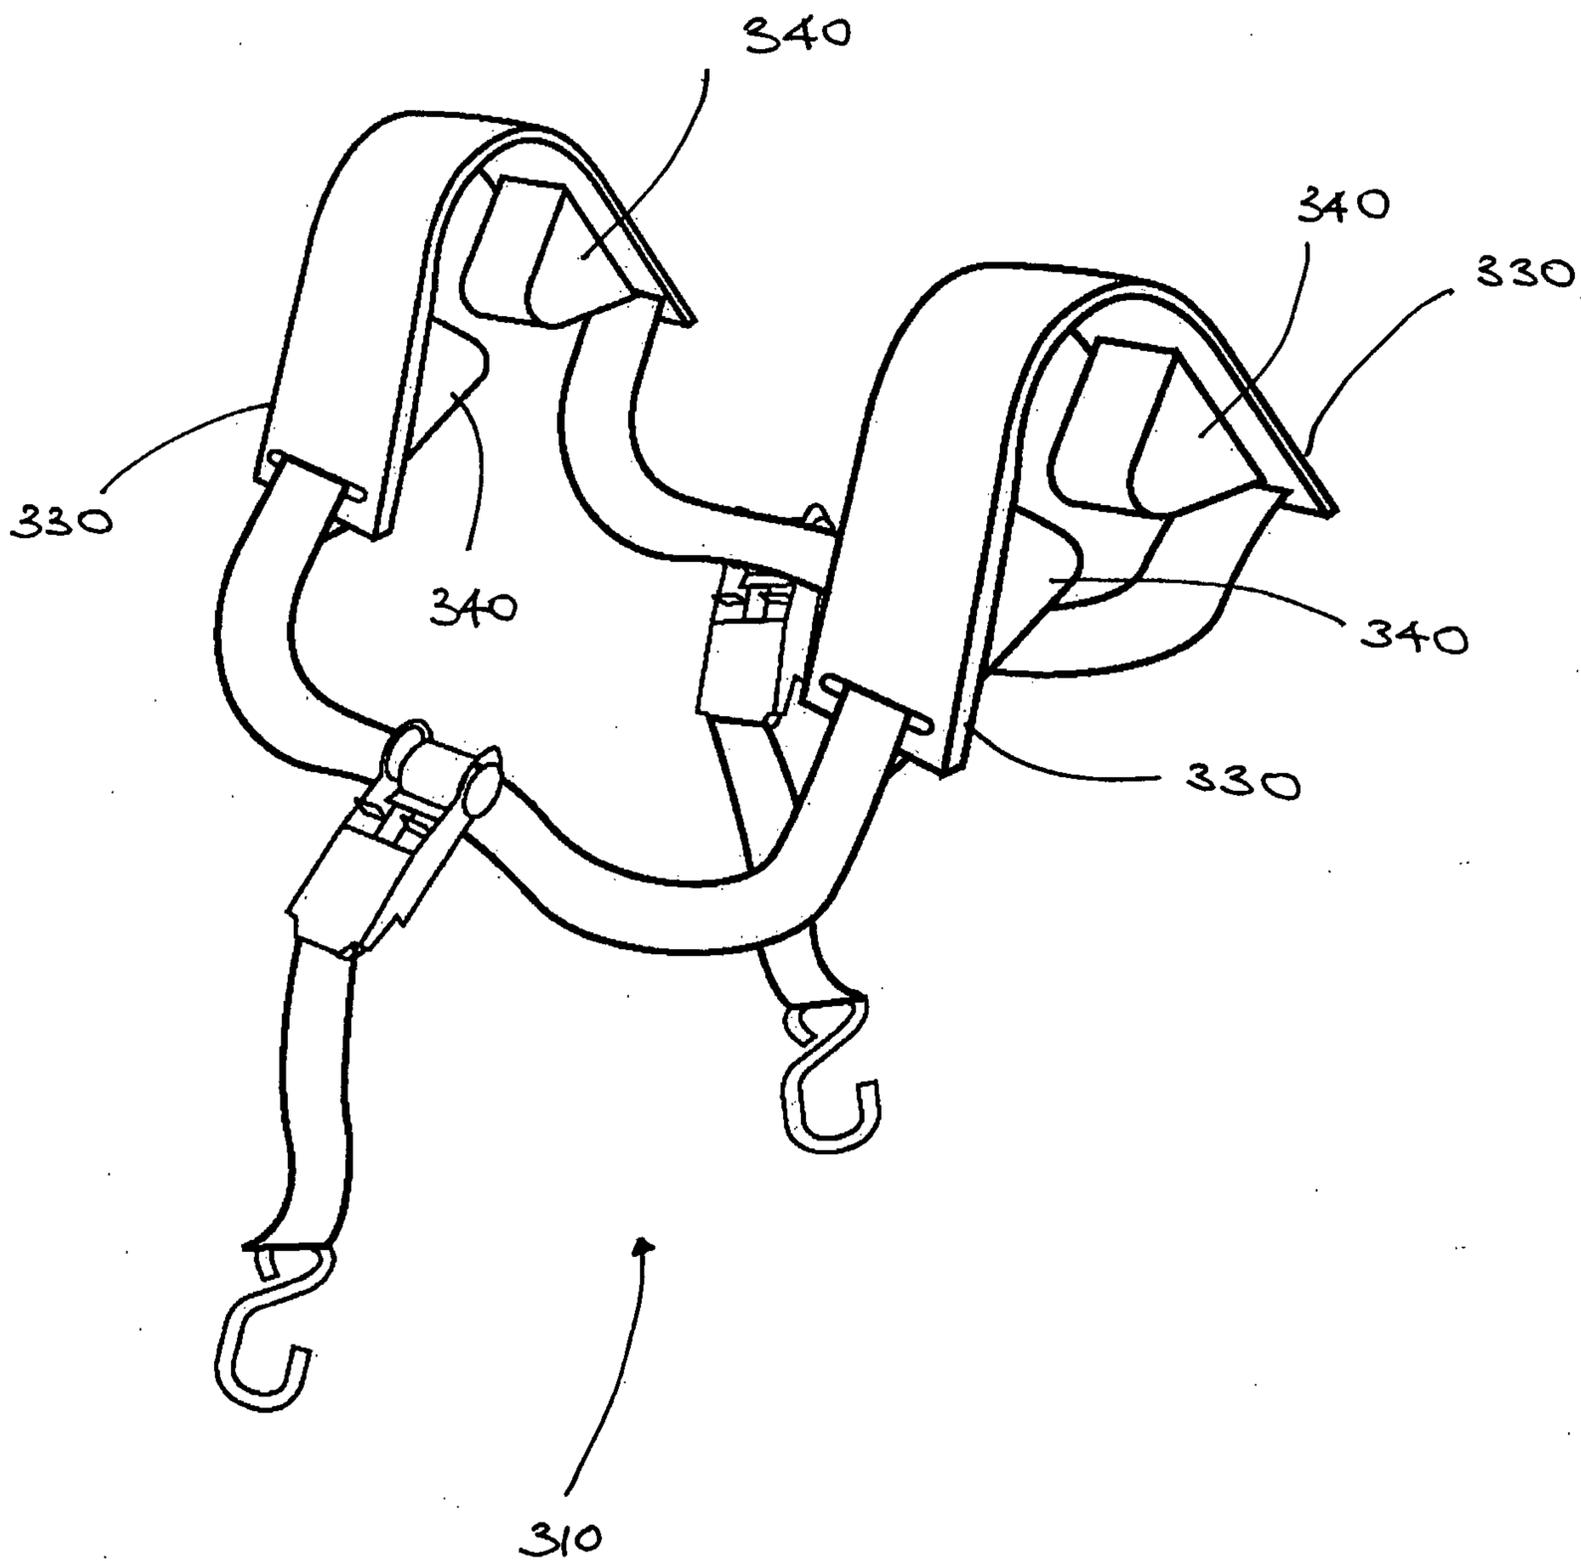


FIGURE 18

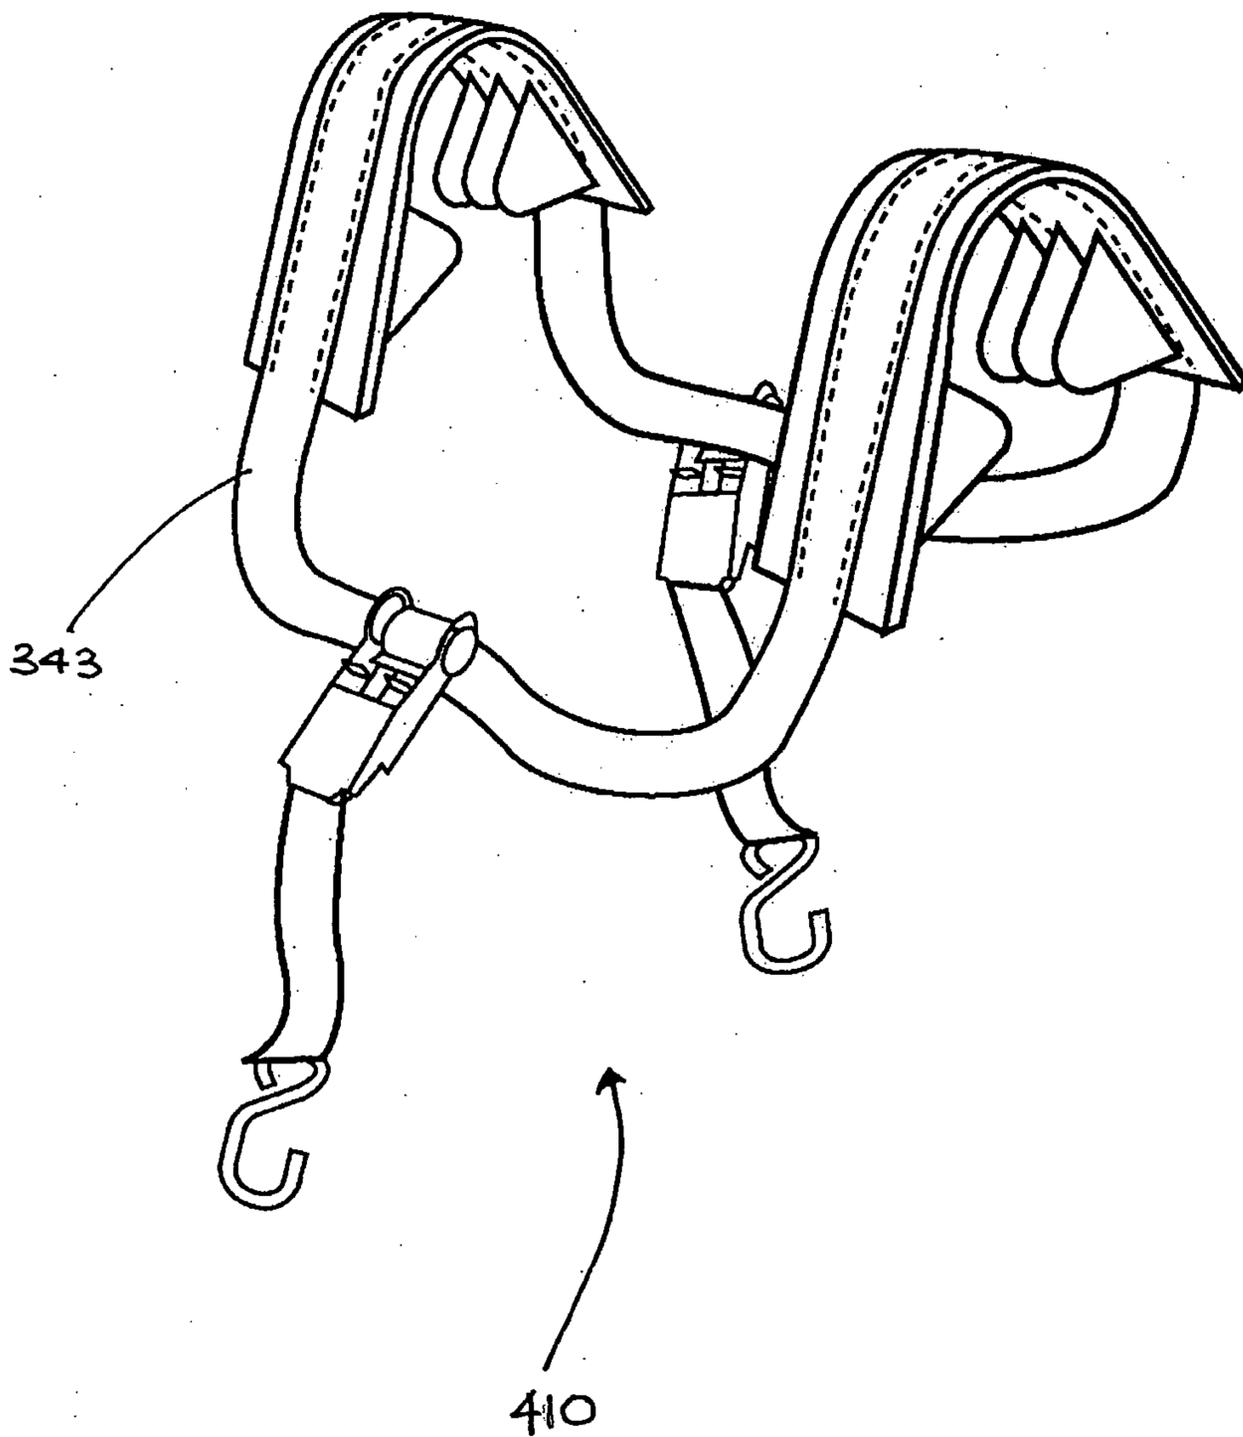


FIGURE 19

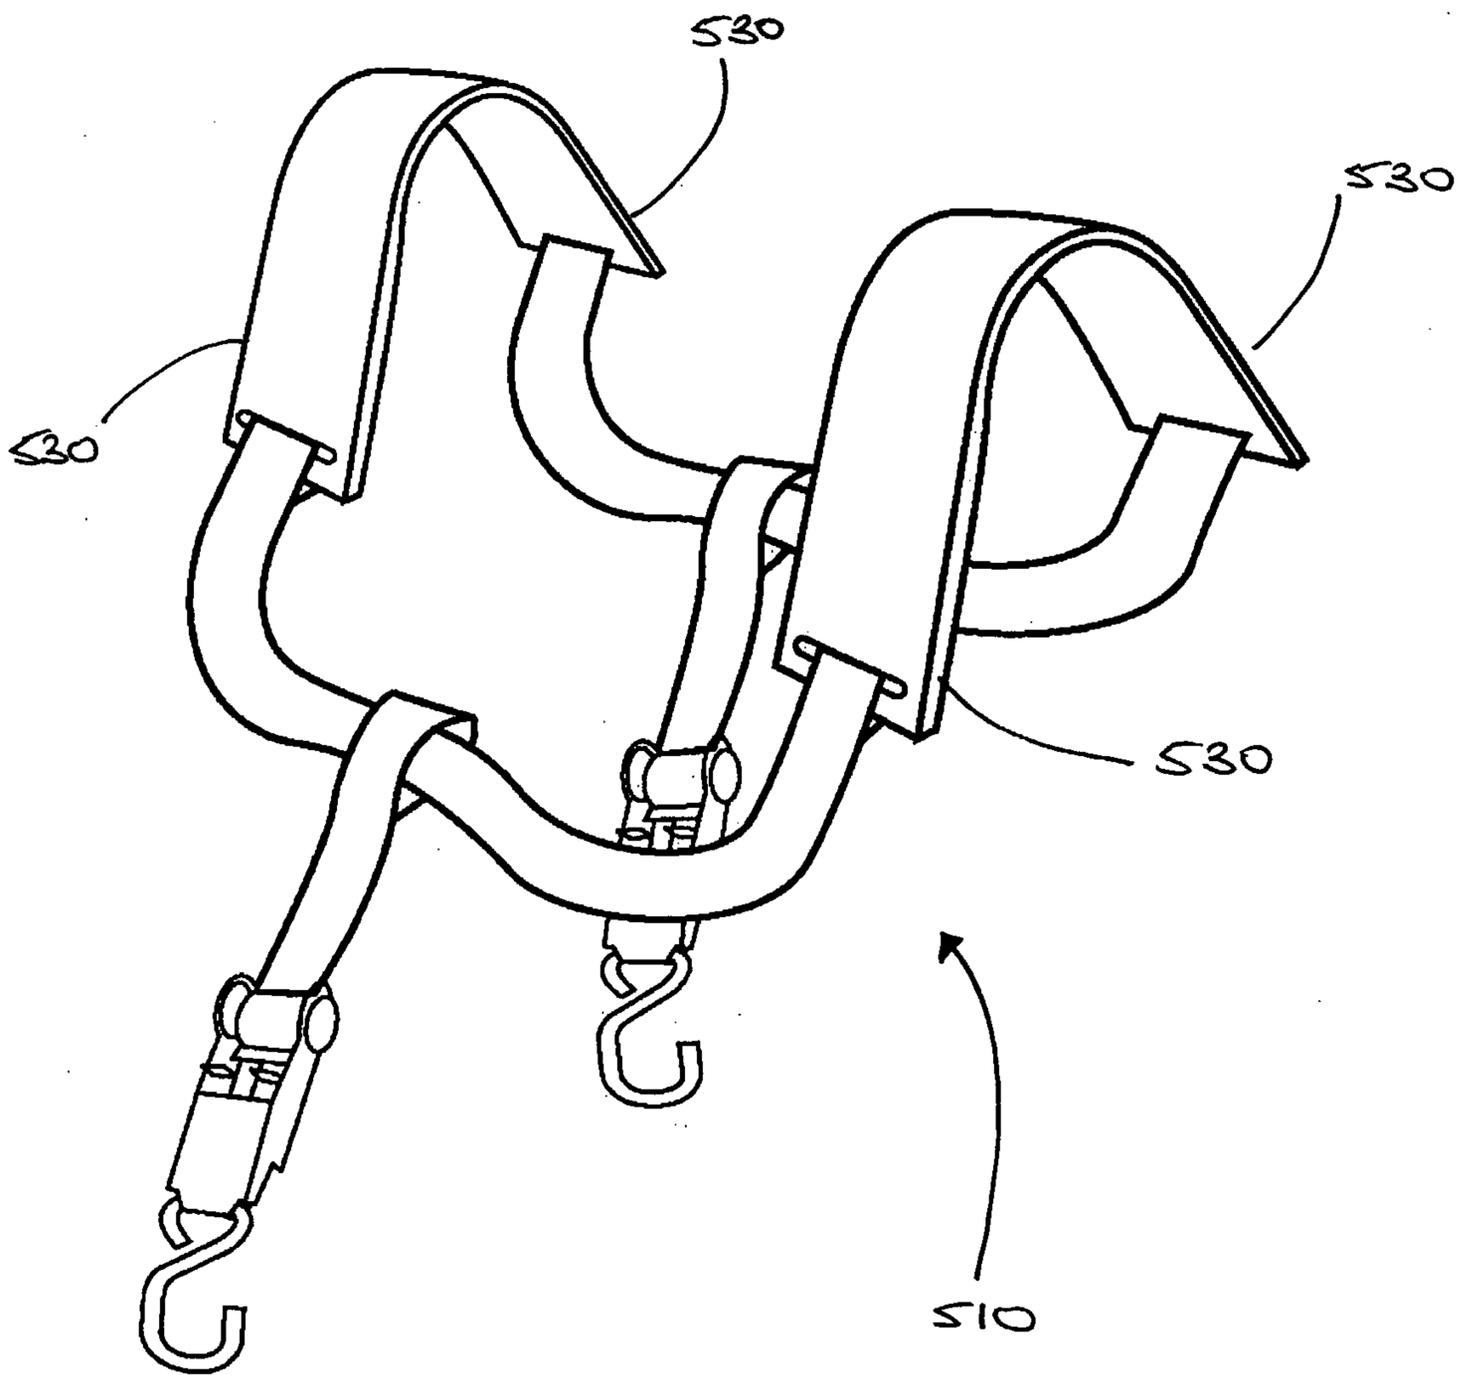


FIGURE 21

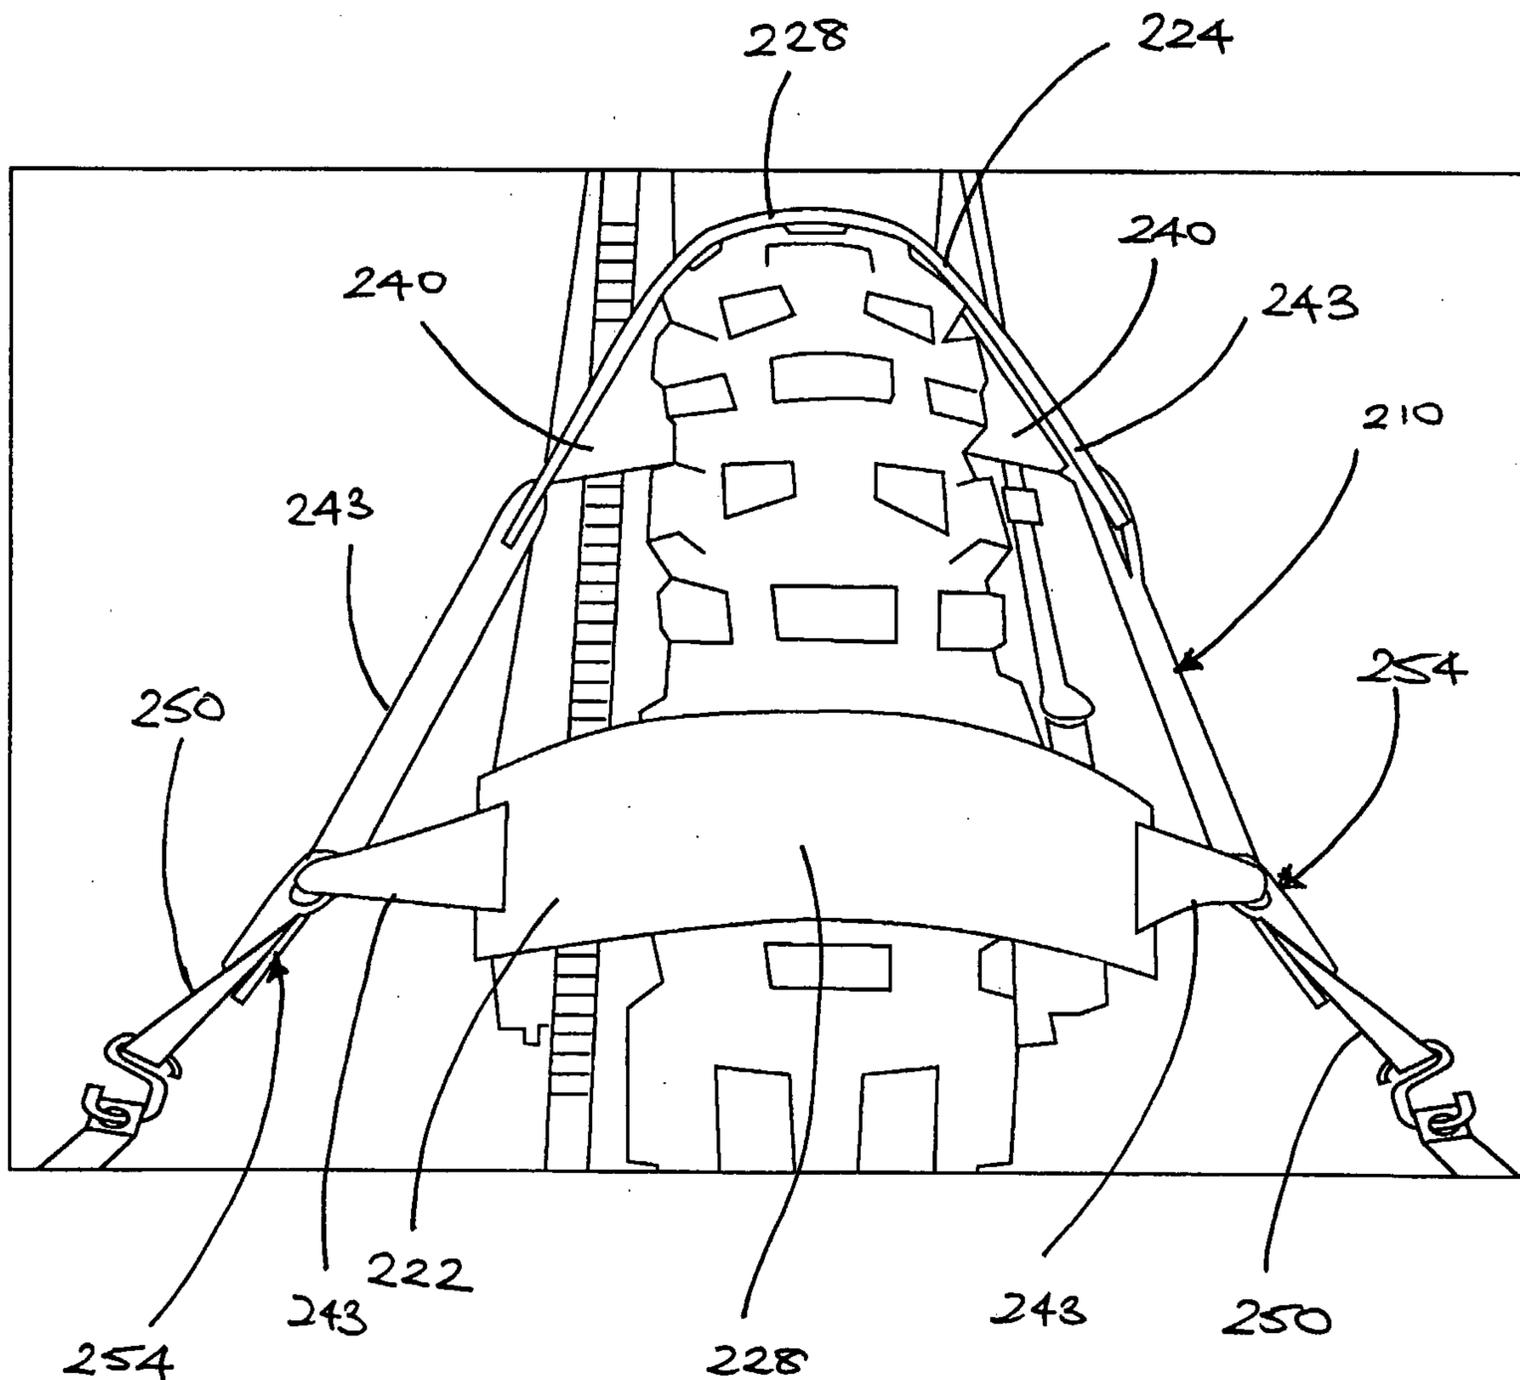


FIGURE 20

