



AU9471612

(12) PATENT ABRIDGMENT (11) Document No. AU-B-71612/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 680523

- (54) Title
INK FILLING METHOD AND APPARATUS FOR INK CARTRIDGE
- International Patent Classification(s)
(51)⁵ B41J 002/195
- (21) Application No. : 71612/94 (22) Application Date : 31.08.94
- (30) Priority Data
- | (31) Number | (32) Date | (33) Country |
|-------------|-----------|--------------|
| 5-216551 | 31.08.93 | JP JAPAN |
| 5-218636 | 02.09.93 | JP JAPAN |
| 5-223488 | 08.09.93 | JP JAPAN |
| 5-244662 | 30.09.93 | JP JAPAN |
- (43) Publication Date : 30.03.95
- (44) Publication Date of Accepted Application : 31.07.97
- (71) Applicant(s)
CANON KABUSHIKI KAISHA
- (72) Inventor(s)
MASAHIKO HIGUMA; MASAMI IKEDA; SADAYUKI SUGAMA; TSUTOMU ABE; HIROYUKI
ISHINAGA; TOSHIO KASHINO; TAKESHI OKAZAKI; HIROKI TAJIMA
- (74) Attorney or Agent
SPRUSON & FERGUSON , GPO Box 3898, SYDNEY NSW 2001
- (56) Prior Art Documents
WO 94/11194
EP 567308
EP 408241
- (57) Claim

1. An ink filling method for filling an ink cartridge with ink to be supplied to a recording head for ejecting ink, comprising:

providing the ink cartridge having a negative pressure producing material accommodating portion and an ink accommodating portion, said negative pressure producing material accommodating portion accommodating a negative pressure producing material and being provided with an air vent and ink supply port, and said ink accommodating portion being provided ^{with an} ink injection opening, and accommodating directly the ink to be supplied to the recording head, said ink cartridge further includes a partition wall between said negative pressure producing material accommodating portion and said ink accommodating portion, said partition wall

being provided with a gap for supplying ink from said ink accommodating portion to said negative pressure producing material accommodating portion, said gap being formed between said partition wall and a bottom wall of said cartridge;

inserting an ink injector through said ink injection opening;

directly injecting the ink through said injector into said ink accommodating portion, while said ink supply port ~~is~~ is open;

disposing said ink cartridge such that the gap takes a topmost position of said ink accommodating portion.

5. A method according to Claim 1, wherein the ink is injected by an ink injecting means in fluid communication with an ink container for containing the ink to be injected, wherein said ink injection means is inserted through an ink supply port for supplying the ink out of said ink container, into the ink cartridge, and an opening of said ink injection means is projected into said ink accommodating portion.

6. A method according to Claim 5, wherein said ink injection means penetrates said negative pressure producing material.

INK FILLING METHOD AND APPARATUS FOR INK CARTRIDGE

FIELD OF THE INVENTION AND RELATED ART

The present invention relates to an ink
5 filling method and apparatus for an ink cartridge
usable with an ink jet apparatus.

A recording apparatus such as a printer,
copying machine, facsimile machine or the like and a
recording apparatus used as an output apparatus of a
10 combined electronic apparatuses or work station
including computer, word processor or the like, is
constituted such that image is recorded on a recording
material such as a sheet of paper or plastic material
in accordance with image information. The recording
15 apparatuses can be classified into an ink jet type, a
wire dot type, a thermal type, a laser beam type and
so on on the basis of recording system.

In an ink jet type recording apparatus, ink
is ejected onto a recording material through recording
20 means (recording head). It comprises the following
advantages. The recording means can be significantly
downsized, and fine images can be recorded at a high
speed. The recording is possible without particular
treatment on plain paper. The running cost is low,
25 and the noise is low because it is a non-impact type
apparatus. In addition, it is easy to effect color
image recording use different color inks.

Among ink jet recording means, an ink jet recording means (recording head) using thermal energy to eject the ink is advantageous in that high density liquid paths (ejection outlets) can be easily provided
5 by the use of electrothermal transducers, electrodes, liquid passage walls and top plate produced through semiconductor manufacturing process including etching, evaporation, sputtering and so on. Therefore, further downsizing is possible.

10 An ink container used with the ink jet recording apparatus is required to supply in good order an amount of the ink corresponding to the ejections of the ink through the recording head by the recording operation and is required not to leak the
15 ink through the ejection outlets when the recording operation is not carried out.

Additionally, in the case that the ink container is a replaceable or exchangeable type, it is also required that the mounting and demounting of the
20 ink container is smooth without ink leakage, thus assuring the ink supply to the recording head.

As an example of an ink container usable with an ink jet recording apparatus, Japanese Laid-Open Patent Application No. 87242/1988 (first prior art)
25 discloses an ink jet recording cartridge comprising an ink container, a foamed material therein and a plurality of ink ejection orifices.

With such a container, a negative pressure production and ink retention by the capillary force of the foamed porous material such as polyurethane foamed material in which ink is contained, are possible, so
5 that the ink leakage from the container can be prevented.

However, in the first prior art, the foamed material is required to occupy substantially the entirety of an ink containing portion, so that the
10 amount of the ink contained therein is limited, and the amount of the ink remaining in the foamed material as non-usable ink is relatively large, and therefore, the ink utilization factor is not high. Additionally, detection of the amount of the remaining ink is
15 difficult, and the maintenance of constant negative pressure is difficult during the consumption of the ink.

In the case of the ink cartridge having an ink containing portion into which the foamed material
20 is inserted, a corner or corners may be twisted upon the insertion thereof, as the case may be. If this occurs, the compression distribution of the foamed material is not uniform with the possible result of non-uniform distribution in the ink in the ink
25 containing portion.

In this case, even if a sufficient amount of the ink is still contained, the ink path may be

blocked due to the non-uniformity of the negative pressure producing performance. If this occurs, the ink may be ejected improperly and/or, the ink can be easily leaked out upon impact thereto, due to the
5 concentration of the ink adjacent the air vent. Accordingly, high accuracy is required upon the insertion of the foamed material into the ink cartridge, thus imposing difficulty on the manufacturing.

10 Recently, for the purpose of reducing the running cost, a used-up ink cartridge is refilled with the ink. As for the method of refilling the ink, U.S. Patents Nos. 4,967,207 and 4,968,998 propose that the pressure in the container is reduced through the air
15 vent, and then the ink is injected using a special ink refilling tube.

However, when the ink is injected in this manner, the ink refilling port is disposed away from the recording head, and the pressure reduction tends
20 to be insufficient when the pump in the apparatus is used to reduce the pressure, and therefore, the ink is not uniformly distributed in the porous foamed material with the result of difficulty in formation of the ink path communicating with the recording head,
25 after the refilling. Additionally, when the ink is refilled to the limit of the containing capacity, the ink may be leaked through the air vent.

Even if an attempt is made to inject the ink through the air vent, the ink flow upon the injection can not be controlled with the result that the pressure of the foamed material reaches to the normal
5 operational state before the completion of the ink injection. When the ink continues to be injected to the limit of the capacity, the ink injection through the air vent becomes not possible because of the balance of the internal pressure of the ink container,
10 or the ink may be discharged with the air through the air vent.

Therefore, the refillable amount of the ink is smaller than the initial ink capacity. Because the ink is not uniformly distributed in the foamed
15 material, there is a possibility that the ink path to the ejection outlets is not easily formed upon the start of the recording operation immediately after the refilling, with the result of longer time required for the initial operations.

20 If an attempt is made to increase the internal capacity of the ink with the injection variation permitted for the purpose of preventing the above-described ink leakage, results in bulky container, and therefore, the bulky apparatus, against
25 the user's needs. Additionally, the necessity for the sucking device for reducing the pressure in the ink cartridge leads to the large size of the recording

apparatus and the refilling apparatus.

Accordingly, with the structure in which the porous material occupies the entirety of the inside of the ink containing portion of an ink cartridge, the ink containing efficiency, that is, the amount of the
5 ink containing efficiency, is low.

As an ink cartridge having a high ink containing efficiency, Japanese Laid-Open Patent Application No. 522/1990 (second prior art) discloses
10 an ink jet recording cartridge in which the porous materials are disposed between a first ink container and a second ink container, and between a second ink container and an ink jet recording head.

This ink jet recording cartridge, the porous
15 material is not contained in the ink containing portion, but it is disposed only in the ink passage, by which the ink capacity is larger than that of the first prior art. Additionally, by the provision of the second ink container, the ink distribution and the
20 air flow are adjusted during the recording operation or upon temperature rise, thus stabilizing the vacuum in the recording head.

However, in the second prior art, the porous material contains a large amount of the ink since it
25 is disposed in the ink passage, and therefore, the negative pressure or vacuum by the capillary force of the porous material is not sufficient, when the

recording operation is not carried out, with the result that the ink tends to leak through the ejection outlets of the ink jet recording head upon significant impact.

5 When the ink is refilled in such an ink cartridge as not provided with an air vent, the pressure of the ink cartridge is reduced, and the ink is injected through a port other than the air vent.

10 In this case, the ink container is required to be hermetically closed to maintain the negative pressure of the ink cartridge, and therefore, the ink is supplied through the ejection outlets of the recording head with the result of long ink supplying period.

15 Japanese Patent Applications Nos. 198474/1992 and 198681/1994 propose an ink container particularly suitable for ink jet printing from the standpoint of stability of the vacuum which is peculiar to the ink jet recording. With this ink container, the ink can
20 be properly supplied corresponding to the amount of the ink ejected from the recording head during the printing operation, and simultaneously, the ink leakage through the ejection outlets can be properly prevented when the printing operation is not carried
25 out.

 The container fundamentally comprises a first chamber (negative pressure generating material

container) accommodating a negative pressure
generating material and provided with an air vent and
an ink supply port for supplying the ink out, and a
second chamber (ink container) substantially
5 hermetically sealed except for fluid communication
with the first chamber and directly containing the ink
to be supplied to the first chamber. This is
particularly effective for an ink jet recording
apparatus (this structure will be called "starting
10 structure").

With this structure, the vacuum can be
maintained substantially constant almost all of the
period from the start of use to the end of the head
cartridge, and therefore, it can be used for high
15 speed printing.

In addition, the ink jet recording is used in
wide range, for example, facsimile machine or another
communication field, a large size sheet copying
machines, textile printing, as well as usual printer.
20 Because of this, a large ink container and ink
refilling are desired.

SUMMARY OF THE INVENTION

~~Accordingly, it is a principal object of the~~
25 present invention to provide an ink filling method for
an ink cartridge having the above-described starting
~~structure.~~



In accordance with one aspect of the present invention, there is provided an ink filling method for filling an ink cartridge with ink to be supplied to a recording head for ejecting ink, comprising:

5 providing the ink cartridge having a negative pressure producing material accommodating portion and an ink accommodating portion, said negative pressure producing material accommodating portion accommodating a negative pressure producing material and being provided with an air
10 vent and ink supply port, and said ink accommodating portion being provided with an ink injection opening, and accommodating directly the ink to be supplied to the recording head, said ink cartridge further includes a partition wall between said negative pressure producing
15 material accommodating portion and said ink accommodating portion, said partition wall being provided with a gap for supplying ink from said ink accommodating portion to said negative pressure producing material accommodating portion, said gap being formed between said partition wall and a
20 bottom wall of said cartridge;

inserting an ink injector through said ink injection opening;

directly injecting the ink through said injector into said ink accommodating portion, while said ink supply port
25 is open;

disposing said ink cartridge such that the gap takes a topmost position of said ink accommodating portion.

In accordance with another aspect of the present invention, there is provided an ink filling apparatus for filling an ink cartridge with ink to be supplied to a recording head for ejecting ink, wherein said ink cartridge
5 has a negative pressure producing material accommodating portion and an ink accommodating portion, said negative pressure producing material accommodating portion accommodating a negative pressure producing material and being provided with an air vent and ink supply port, and
10 said ink accommodating portion being provided with an ink injection opening, and accommodating directly the ink to be supplied to the recording head, said ink cartridge further includes a partition wall between said negative pressure producing material accommodating portion and said ink
15 accommodating portion, said partition wall being provided with a gap for supplying ink from said ink accommodating portion to said negative pressure producing material accommodating portion, said gap being formed between said partition wall and a bottom wall of said cartridge, said
20 apparatus comprising:

an injection member for directly injecting the ink into said ink accommodating portion; and

means for supplying the ink to said injection member;

wherein said injection member is injectable into the
25 negative pressure producing material accommodating portion, and said injection member is long enough so that an end opening thereof is in said ink accommodating portion through

In accordance with another aspect of the present invention, there is provided a method of filling ink into a replaceable ink cartridge, said replaceable ink cartridge comprising an ink absorbing material; a first container for
5 containing said ink absorbing material, said first container having an air vent and a supply port for supplying the ink out; a second container for containing ink; a partition wall between said first container and said second container; a communication part, at an end portion of said partition
10 wall, for communication between said first and second containers; and ambient air introducing means along said partition wall for introducing air into said communication part;

15 said ink cartridge further comprising an ink injection port;

said method comprising:

preparing an ink cartridge having said ink supply outlet opened or having both of said air vent and said ink supply outlet opened;

20 filling first chamber with the ink by an ink injector through said ink injection port;

permitting the ink in said first chamber to seep into said sponge-like material in said second chamber through said opening, wherein said groove functions to enable said
25 sponge-like material to absorb the ink adjacent said ink supply outlet earlier than adjacent said air vent;

terminating ink injection before the ink reaches such a portion of said sponge-like material as is adjacent said air vent.

01
02
03
04
05

06
07
08
09

10
11
12



~~present invention, the ink cartridge can be reused~~
without ink leakage when the ink is refilled.

According to an ink filling apparatus of the
present invention, an air-liquid interface can be
5 formed at a proper position, so that the ink cartridge
can be reused a plurality of times without
deterioration of the performance of the ink cartridge.

These and other objects, features and
advantages of the present invention will become more
10 apparent upon a consideration of the following
description of the preferred embodiments of the
present invention taken in conjunction with the
~~accompanying drawings.~~

15 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a partly broken perspective view
of an ink cartridge usable with ^{an embodiment} a present invention.

Figure 2A is a sectional view thereof.

Figure 2B is a sectional view of an ink
20 cartridge of Figure 1 mounted to a recording head.

Figures 3A, 3B and 3C illustrate a
distribution of ink when the ink cartridge shown in
Figures 1 and 2 is mounted to a recording head, and
the recording operation is carried out. Figures 3A
25 and 3B represent normal recording, and Figure 3C
represents the case of shortage of the ink.

Figure 4 is a longitudinal sectional view of



another ink cartridge to which the present invention is applicable.

Figure 5 is a cross-sectional view of the same ink cartridge.

5 Figure 6 is a longitudinal view in another direction of the ink cartridge shown in Figure 4.

Figure 7 is a sectional view of an ink cartridge illustrating manufacturing steps of an ink cartridge with which the present invention is usable.

10 Figure 8 is similar to Figure 7, but shows another step of manufacturing.

Figure 9 is a sectional view of an ink cartridge, illustrating ink ejection port sealing step after the ink is filled.

15 Figure 10 is a sectional view, illustrating a sealing step for an ink cartridge.

Figure 11 illustrates a package containing an ink cartridge to which the present invention is applicable.

20 Figure 12 is a sectional view of an example of an ink cartridge to which the present invention is applicable.

Figures 13A and 13B are sectional views, illustrating an example of an ink filling method to
25 the ink cartridge of Figure 12.

Figure 14 is a sectional view of an ink cartridge of Figure 12, in which an ink injection port

is provided.

Figure 15 is a sectional view, illustrating ink refilling.

Figure 16 is a sectional view of an ink cartridge, illustrating sealing after the ink refilling.

Figure 17 is a perspective view of the ink cartridge shown in Figure 16.

Figures 18A and 18B are sectional views, illustrating sealing after the ink refilling.

Figures 19A and 19B are sectional views, illustrating sealing after the ink refilling operation.

Figure 20 is a sectional view, illustrating a refilling method according to an embodiment of the present invention.

Figure 21 is a sectional view, illustrating an opening for ink refilling.

Figures 22A and 22B are sectional views, illustrating an ink refilling opening according to an embodiment of the present invention.

Figure 23A illustrates an initial stage of an ink injection, according to a further embodiment of the present invention.

Figure 23B is a similar view but after completion of ink container filling.

Figure 23C is a similar view but when the ink

filling is completed.

Figure 24A and 24B illustrate positions of an ink cartridge during ink injection, according to a further embodiment of the present invention.

5 Figures 25A and 25B illustrate an ink filling apparatus, according to a further embodiment of the present invention.

Figure 26 illustrates production of bubbles in ink injection step.

10 Figure 27 illustrates an ink filling apparatus, according to a further embodiment of the present invention.

15 Figure 28 illustrates an ink filling apparatus, according to a further embodiment of the present invention.

Figure 29 illustrates an ink filling apparatus according to a further embodiment of the present invention.

20 Figures 30A, 30B and 30C illustrate an example of an ink filling apparatus according to a further embodiment of the present invention. Figure 30A shows an ink injection means, and Figures 30B and 30C illustrate positions during ink cartridge filling operation.

25 Figures 31A and 31B illustrate an ink filling apparatus according to a further embodiment of the present invention.

Figures 32A and 32B illustrate an ink filling apparatus according to a further embodiment of the present invention.

Figures 33A, 33B and 33C illustrate an ink
5 filling apparatus according to a further embodiment of the present invention.

Figure 34 illustrates an ink filling method and apparatus usable with an ink cartridge having a further structure, to which the present invention is
10 applicable.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figures 1A and 1B are a perspective view and a sectional view of an example of an ink cartridge to
15 which the present invention is applicable.

As shown in these Figures, a main body 1 of the ink cartridge comprises a negative pressure producing material accommodating portion 4 and an ink accommodating portion 6. The former is provided with
20 an opening (ink supply port) 2 for connection with an ink jet recording head and an air vent 10 for introduction of ambient air, disposed at a level higher than that of the opening 2, and accommodates a negative pressure producing material 3 of a porous
25 material for absorbing and retaining recording ink. The ink accommodating portion 6 is disposed adjacent to the material accommodating chamber 4 through a

partition wall (partition member) 5, and functions to contain the ink. The ink accommodating portion 6 and the material accommodating portion 4 are in fluid communication with each other through a clearance or gap 8 formed between a rib 5 and a bottom surface of the container. The ink accommodating portion 6 is provided with a partition plate (reinforcing plate) 16, which bridges between opposite side walls with a clearance remaining at the bottom, the clearance being larger than the clearance 8.

The ink cartridge is provided with an ink injection inlet 7 for permitting supply of ink into the ink accommodating portion 6. The ink injection inlet 7 is formed in a bottom surface adjacent to the clearance 8.

After the ink is injected through the ink injection port 7, it is sealed by proper means. The method of injection will be described in detail hereinafter.

It is possible to refill the ink in the ink accommodating portion through the ink injection port 7.

Figure 2 illustrates the ink cartridge of Figure 1 mounted to a recording head. In Figure 2, the same reference numerals as in Figure 1 are assigned to the elements having the corresponding functions. The ink injection inlet 7 is sealed by a

sealing member 17. The recording head is provided with ejection outlets 25, heat generating elements 26 and liquid passages 27 as the elements for ink ejection. In this embodiment, thermal energy is
5 produced by the heat generating elements 26 in the liquid passage 27, and a change of state is caused in the ink by the thermal energy, thus ejecting the ink through an ejection outlet 25 of the recording head HD.

10 The recording head usable with the ink cartridge to which the present invention is applicable may be another type, for example, piezoelectric element type.

In this embodiment, the ink supply from the
15 ink cartridge to the recording head is permitted by press-contacting to the negative pressure producing material an ink supply tube 9 having a filter 18 at the end thereof in the recording head.

In consideration of this, it is desirable
20 that the ink is distributed to the neighborhood of the opening 2 of the ink cartridge.

Referring to Figures 3A, 3B and 3C, the description will be made as to an ink supply when the ink cartridge is connected with the recording head.

25 In Figure 3A, the ink supply tube 9 is shown as having been press-contacted to the negative pressure producing material 3 through an opening 2 of

the cartridge 1. Therefore, the ink jet recording apparatus is in an operative state. In this embodiment, the ink supply tube 9 is provided with the filter to remove foreign matters in the ink cartridge.

5 [Operation]

When the ink jet recording apparatus is operated, ink is ejected through orifices of the ink jet recording head, and as a result, ink absorbing force is produced in the ink container. The absorbing
10 force supplies the ink 21 to the ink jet recording head through the gap 8 between the partition wall 5 and the bottom of the ink cartridge 13, the material accommodating portion 4, the negative pressure producing material 3 and the ink supply tube 9. By
15 this, the internal pressure of the ink accommodating portion 6 which is hermetically sealed except for the gap 8 decreased with the result of pressure difference between the ink accommodating portion 6 and the negative pressure producing material accommodating
20 portion 4. With the continuing ejections, the pressure difference continues to increase, but since the material accommodating portion 4 is open to the ambience through the air vent 10, the ambient air is introduced into the ink accommodating portion 6
25 through the negative pressure producing material 3 and through the gap 8, as shown in Figure 3B, so that an air-liquid exchange occurs. Thus, the pressure

difference between the ink accommodating portion 6 and the material accommodating portion 4 is removed.

During the ink jet recording operation, this is repeated so that a predetermined negative pressure is maintained in the ink cartridge. Substantially of the ink in the ink accommodating portion 6 can be consumed except for the ink deposited on the wall surface of the ink accommodating portion 6, and therefore, the ink utilization factor is improved (Figure 3C).

10 When the recording operation is not carried out, the capillary force of the negative pressure producing material 3 (or the meniscus force at the interface between the ink and the negative pressure producing material) is effective to prevent leakage of the ink from the ink jet recording head.

As described above, the air-liquid exchange is repeated through the gap during the ink supply process. Before the introduction of the air into the ink accommodating portion through the gap, a small quantity of the ink is supplied toward the recording head from the material accommodating portion.

With the decrease of the quantity of the ink in the material accommodating portion, the interface between the air and the liquid changes. When a part of the air-liquid interface reaches to the gap, the air is introduced into the ink accommodating portion.

The change of the quantity of the ink

retained in the material accommodating portion is influential to the negative pressure applied to the recording head, and therefore, it is desirable that the air is introduced into the ink accommodating
5 portion without lowering of the air-liquid interface during the air-liquid exchange step through the gap.

In the following embodiment, the introduction of the air into the ink accommodating portion, that is, the air-liquid exchange can be performed with
10 suppressed positional change of the air-liquid interface.

Figures 4, 5 and 6, illustrate this embodiment, Figure 4 is a longitudinal sectional view of the ink cartridge body, Figure 5 is a cross-
15 sectional view thereof, and Figure 6 illustrates air-liquid interface variation suppressing mechanism, as seen from the material accommodating portion.

The main body 1 is provided with air introducing grooves 19 and negative pressure producing
20 material adjusting portions 20.

The air introducing grooves 19 are formed at the material accommodating portion 4 side and are extended from a middle portion of the partition wall 5 to an end of the partition wall 5, that is, to the gap
25 8. Negative pressure producing material adjusting chambers 20 are provided by the partition wall 5 and the material 3 itself, adjacent the air introducing

grooves 19. The material 3 is contacted to an inner surface of the material accommodating portion 4.

Therefore, even if the material 3 is inserted non-uniformly, the contact (compression) pressure to the material 3 is partially eased, as shown in Figures 4 and 5. For this reason, when the ink is used by the recording head, the ink contained in the material 3 is consumed and is reached to the adjusting portion 20.

With the continued consumption of the ink, the ink meniscus being easily broken by the air at the portion where the contact pressure is eased by the adjusting portions 20, so that the air is introduced smoothly into the grooves 19, thus making the negative pressure control easier.

15 [Manufacturing method]

Referring to Figures 7 and 8, the manufacturing method of an ink cartridge of the above structure will be described.

An ink cartridge 12 is molded of polypropylene material and is provided with the negative pressure producing material accommodating portion 4, a sponge of polyurethane foamed material or the like as the negative pressure producing material 3 for retaining the ink and for producing the negative pressure, is inserted. The material may be a sponge like or porous material of fibers or knit. In this embodiment, the polyurethane foamed material is used

because the negative pressure level can be relatively easily adjusted.

A cover 13 constituting a bottom of the cartridge, from which the sponge is inserted, is fixed
5 by ultrasonic wave or high frequency wave by fusing both of the materials, as shown in Figure 8. To facilitate this, the materials of the cover and the main body are the same.

A predetermined quantity of the ink is
10 injected through the ink injection inlet 7 formed in the ink accommodating portion 6 of a vacant ink cartridge thus manufactured.

Referring to Figures 9 and 10, an ink cartridge sealing step will be described.

15 After the completion of the ink ejection, the opening 2 and the air vent 10 are sealed by proper means soon, as shown in Figure 9. Thereafter, an ink supply outlet of an ink supply apparatus is removed from the ink injection inlet 7, and then, a spherical
20 plug 17 of plastic material or metal is press-fitted into the ink injection inlet 7.

Subsequently, as shown in Figure 10, the opening 2 and the air vent 10 are heat-sealed with a plastic resin film 14 having a multi-layer structure
25 including an intermediate layer of evaporated aluminum, by a heat fusing machine 22. This is effective to prevent ink leakage and ink evaporation

during transportation of the ink cartridge. As shown
in Figure 11, the ink cartridge is packed, by heat
sealing, with a multi-layer packing film 15 of plastic
material having printed information at the outside
5 thereof.

The material of the ink cartridge 1 may be
transparent or semi-transparent plastic material such
as nylon, polyethylene or polypropylene. then, the
remaining quantity of the ink can be externally
10 confirmed, and therefore, the ink cartridge exchanging
timing can be discriminated.

The position of the opening for the ink
ejection and the timing of the formation of the
opening, are determined depending on the method of ink
15 injection. Under the condition that proper injection
method is usable, the position of the injection
opening can be any, and it may be formed upon the
injection, or it may be formed beforehand, and sealed,
in which case, the sealing is removed upon the ink
20 injection.

In this embodiment, the opening is formed in
a wall of the ink accommodating portion adjacent the
gap. The position is determined so that an ink
ejection method is usable. The reasons will be
25 described.

When the ink is injected through a
conventional method into an ink cartridge to which the

embodiments of the present invention are applicable, the ink will be injected through the air vent formed in the material accommodating portion or an ink supply port for supplying the ink to the recording head.

5 However, the ink injection through the air vent will result in the existence of the ink adjacent the air vent. Then, an ink path leading to the air vent is easily formed upon pressure increase in the cartridge due to the ambient temperature change or the
10 like, and therefore, the ink leakage may easily occur.

 For this reason, the ink injection through the air vent is not preferable for the ink cartridge having the starting structure described in the introductory part of this specification.

15 On the other hand, the ink injection through an ink supply port involves the following problems. Figure 12 illustrates an ink cartridge to which the present invention is applicable. As described
 hereinbefore, in order to stabilize the negative
20 pressure in the ink cartridge, a gap for permitting ink meniscus formation is provided.

 The gap shown in Figure 12 takes a bottom position, when the ink cartridge is mounted on an ink jet apparatus.

25 When the ink is injected through the ink supply port with this position, the ink is first absorbed by the negative pressure producing material,

and only then, the injected ink reaches the gap. At this time, the ink forms a meniscus in the negative pressure producing material of porous material adjacent the gap, and therefore, not all of the
5 injected ink is contained in the ink accommodating portion, but the ink is not supplied into the ink accommodating portion any more after the ink is accommodated to such an extent that the gap is filled with the ink. This is because there occurs no air-
10 liquid exchange corresponding to the ink injection into the ink accommodating portion, with the result that the ink accommodating portion is completely sealed with the air remaining therein.

Therefore, even if the ink is injected
15 through an ink supply port with the gap taking the bottom position as shown in Figure 12, the quantity of the ink supplied into the ink accommodating portion is small, and therefore, the method is not practical.

In the case that the ink is injected after
20 the pressure in the ink cartridge is reduced with the state of Figure 12, the ink is distributed uniformly also in the material accommodating portion, and therefore, the ink reaches the neighborhood of the air vent.

25 When the negative pressure producing material is completely filled with the ink, the meniscus formation in the porous material is not sufficient so

that the negative pressure is not sufficient with the result that the ink is leaked when the ink cartridge is connected to the recording head.

In the foregoing, the ink is injected when
5 the gap takes the bottommost position. However, the inventors have conceived that the ink is injected while the gap takes the topmost position. In this case, the air-liquid exchange is permitted through the gap.

10 Referring to Figure 13, ink refilling using the above-described method is illustrated. The ink cartridge body 1 is placed up side down. An in supply joint 31 is pressed to the opening, and the bellows of an ink refilling container 30 are compressed so that
15 the ink is injected into the cartridge. At the first stage, as shown in Figure 13A, the ink 21 expands in the negative pressure producing material. When the ink is further injected, the ink expands the entirety of the negative pressure producing material 4, until
20 the ink meniscus is formed in the negative pressure producing material at the gap 8, so that the gap 8 is closed. In order to supply the ink in the ink accommodating portion 6, the air is required to be discharged through the air vent 10 with the entering
25 of the ink into the ink accommodating portion. However, since the gap 8 is closed by the ink, the ink does not enter the ink accommodating portion 6, and

the ink is injected into the negative pressure producing material only. As shown in Figure 13B, the ink finally leaks through the air vent 10, and is discharged therethrough. Thus, the ink enters the ink
5 accommodating portion only when the ink meniscus at the gap 8 is broken, and therefore, the ink filling efficiency is not good. This is not preferable from the standpoint of the ink capacity and the ink leakage.

10 As described in the foregoing, it is not impossible to inject the ink from the negative pressure producing material accommodating portion (first chamber) without opening an ink refilling port in an ink accommodating portion (second chamber).

15 However, the ink cartridge to which the present invention is related is provided with a fine communicating part, and in the case that the meniscus of the ink is formed in the communicating part, the second chamber is hermetically sealed, and therefore,
20 even if a space remains in the second chamber, the ink injection is no longer possible, with the result that the ink leaks out through the air vent of the first chamber.

As will be understood, it is quite difficult
25 to fill the ink accommodating chamber with the ink by ink injection through the above-described opening.

According to an embodiment of the present

invention, the ink is supplied first into the ink accommodating portion.

The timing of the ink refilling may be any, but in consideration of the function of the ink cartridge after the refilling of the ink, the ink is preferably injected while the ink still remains in the second chamber. The reason is as follows. Once the ink path in the porous negative pressure generating material, is once broken, the reformation of the ink path is difficult. In addition, during the recovery process, a substantial amount of ink is consumed wastefully. Additionally, in consideration of the leakage of the ink remaining in the second chamber and the ink refilling efficiency, the refilling is preferably carried out immediately before the ink in the second chamber is used up.

Figure 14 shows a sectional view in which an ink refilling port is opened. The position of the refilling port may be any, if it is in a wall of the second chamber. However, in consideration of the easiness of the ink ejection or the ink leakage through the ink refilling port during reuse in an ink jet recording apparatus, it is preferably formed in a top portion of the ink cartridge, as indicated by reference numeral 31a or 31b in Figure 14. The number or configuration thereof are not limited.

Figure 15 shows a state in which the ink 21

has been refilled through one ink refilling port 31a.

The ink refilling can be performed using any proper means. For example, the ink may be sucked by an injector, and the ink is injected through the

5 refilling port. Thereafter, the ink refilling port in the second chamber is sealed by a sealing member 41 as shown in Figures 16 and 17, so that the second chamber is sealed. Thus, the ink refilling is completed.

Another advantage of this embodiment appears while the
10 ink cartridge is being reused. The ink cartridge used in this embodiment maintains the vacuum (negative pressure) in the second chamber, so that the sealing member 41 for the ink refilling port is strongly attracted to the ink cartridge, thus prohibiting the
15 opening of the port.

The sealing member for the ink refilling port may be of a known material such as metal, plastic resin material or elastic rubber material.

Referring to Figures 18 and 19, there are
20 shown other sealing methods for the refilling port. In an example of Figure 18, the plug is integral with the ink cartridge. This eliminates the necessity of the user to drill the injection port and the necessity for preparing a sealing member, and therefore
25 preferable. The material thereof is preferably adhesive high polymer such as adhesive material, sticky material or sealing material.

To permit repeated use of the ink cartridge, the sealing member is preferably a sheet with adhesive material such as an adhesive tape or sealing tape, as shown in Figure 19A.

5 In order to permit the repeated reuse and in order to enhance the sealing of the second chamber, the sealing member preferably extends onto a side other than the side having the ink refilling port, as shown in Figure 19B. Another sealing is usable.

10 As described above, the ink refilling port may be formed through known means.

Referring to Figure 20, there is shown an example of means doing this. In Figure 20, there are shown an ink cartridge having a second chamber from
15 which the ink is used up, an ink refilling container 30 containing refilling ink 21 and comprising an ink injection nozzle and bellows, and a tool 32 for forming an ink refilling port 33. The ink refilling port is formed in the second chamber, as shown in
20 Figure 21. The refilling port is formed using the tool 32 in the form of a pin, a drill or the like, as shown in Figures 22A and 22B. In Figure 22A, the opening 33 is larger than an outer diameter of the ink injection nozzle. In Figure 22, two openings 33 each
25 having a diameter equivalent to or slightly smaller than the outer diameter of the ink injection nozzle, the one being for injection and the other as an air

vent. In either example, the ink can be filled in the second chamber in good order, in the ink refilling operation.

By the use of the ink filling method
5 described above, the ink accommodating portion can be filled with the ink. In this method, it is preferable that after the gap is filled with the ink, the air in the ink accommodating portion is discharged through the ink refilling port. In addition, it is also
10 preferable that the ink filling is not limited in the ink containing portion, but extends into the negative pressure producing material accommodating portion, while forming an air-liquid interface, so as to connect the gap and the ink supply port.

15 Then, the ink is injected both into the ink accommodating portion and the material accommodating portion. In order to permit expansion of the ink in the negative pressure producing material, a certain period is required as contrasted to the ink injection
20 into the ink containing portion.

If the ink injection speed is too high, the ink may overflow through the ink refilling port, and therefore, the ink injection speed is determined in consideration of the ink diffusion in the negative
25 pressure producing material. Therefore, the ink filling speed can not be so high.

In the case that the ink overflows through

the ink refilling port, the ink is not sufficiently loaded between the ink supply port and the gap, frequently. If this occurs, an ink path is possibly not continues between the ink accommodating portion
5 and the recording head in the material accommodating chamber when the ink cartridge is coupled with the recording head.

A further embodiment will be described, in which the above problem is solved. This embodiment is
10 applicable to an ink cartridge having an ink injection port 7 shown in Figure 1 or the like. This method can be used for an initial ink filling in a fresh ink cartridge. In the case of refilling, the sealing member for sealing the ink injection port is removed,
15 by which the refilling is enabled.

As shown in Figure 23A, in the ink injection in this embodiment, when the ink is injected, the ink containing portion 6 takes the bottom position in the manner that the communication gap 8 with the material
20 accommodating portion 4 takes the top position in the ink containing portion 6.

Figure 23A shows an initial stage after the start of the ink 21 injection, which is started after an ink supply member 51 of an unshown ink injector
25 (not shown) is inserted through an ink injection port 7 of the ink cartridge.

An outer peripheral portion of an end of the

ink supply member 51 is of elastic material, and is contacted to the ink injection port 26 to seal it. Because the ink cartridge is inclined such that the gap 8 takes the topmost position, the air in the ink containing portion 6 is easily moved into the material accommodating portion 4 along the partition wall 5 and the partition plate 16, when the ink is injected.

When the inside air can be easily moved, the ink cartridge is not necessarily inclined, but may be placed with the topmost surface of the ink accommodating portion at the same level as the gap, while the ink is injected.

By injecting the ink in the above-described manner, the ink injection can be performed without the air in the form of bubbles remaining in the ink accommodating portion, at the point of time when the ink is injected into the ink accommodating portion 6 is completed, as shown in Figure 23B. By continuing the ink injection, the ink can be supplied into the material accommodating portion 4, as shown in Figure 23C. By this injection, the presence of the air bubbles in the ink accommodating portion can be prevented, and in addition, the presence of the ink in the communication path between the gap 8 and the opening 2 in the negative pressure producing material accommodating portion 4. Therefore, the stability of the ink supply to the recording head is assured.

When the partition wall 5 is provided with the air introducing groove, an ink meniscus is formed in the groove, so that the flow of the ink from the gap along the air introducing groove can be suppressed by a certain degree. The suppressing effect promoted by the adjusting chamber which is effective to ease the compression of the porous material. By this, the ink dispersion to the neighborhood of the air vent is prevented so that the ink leakage after the ink filling can be prevented.

The description will be made as to the configuration around the ink injection port 7.

In this embodiment, a relationship between a diameter of an ink injection tube and an ink injecting speed is taken into account. The investigations have been made to increase the productivity in the ink injection. The results are as follows. If the inside diameter of the ink supply tube 51 is less than 1 mm, foaming occurs as shown in Figure 26 when the ink supply rate is increased in an attempt to increase the throughput. Particularly when the inside diameter is approx. 0.5 mm, the foaming is so significant that the bubbles are not extinguished even if the communicating gap takes the topmost position during the ink injection. Therefore, a significant amount of air bubbles remains in the ink accommodating portion. If the inside diameter is not less than 1 mm, the foaming

does not occur so that the ink can be injected stably at a rate of approx. 2 cc/sec.

As regards the diameter of the ink injection port 7, it is preferable that it is equivalent to that of the ink supply port 51 or larger. In consideration of a safe factor against the foaming, the inside diameter of the ink supply tube 51 is 1.5 mm, and the diameter of the ink injection port 7 is 2.5 mm taking into account the positional accuracy of the ink supply tube 21 and the manufacturing accuracy. By doing so, the preferable results are provided.

In another ink cartridge having the structure, the ink injection is carried out through the same injection method, and it has been confirmed that the ink injection is possible without air bubbles in the ink containing portion, when the communication gap takes the topmost position.

However, in the case of an ink cartridge having a large capacity, the productivity is not enough with the injection speed of 2 cc/sec. In order to increase the injection speed, a high speed injection nozzle shown in Figures 25A and 25B is usable. As shown in Figure 25B, the ink supply tube end has a particular configuration.

As shown in Figure 25A, the nozzle is so long that it can reach to the bottom of the ink accommodating portion 6 taking the injection position

or pose. Figure 25B shows a modified nozzle in which the tip end of the nozzle is not open, but the flow path is branched to the opposite sides. In either case, the inside diameter of the ink supply tube 51 is
5 not less than 1 mm, preferably not less than 1.5 mm. The end portion is inserted through the ink injection port 7 into the ink accommodating portion 6, and during the ink injection, the ink flows along the surrounding walls, so that the foaming is prevented,
10 while permitting high speed injection.

When the nozzle shown in Figure 25 is used, the ink can be injected at the maximum speed of 4 cc/sec, without the foaming.

The description will be made as to after the
15 initial stage of the ink injection.

Figure 23B illustrates the state in which the ink accommodating portion 6 is filled with the ink. In Figure 23C, the further ink injection has been continued, and the ink 9 is supplied into the negative
20 pressure producing material 3, and therefore, the ink injection is completed. The ink in the material 3 flows through the communication gap 8, and a part of the ink flows through the gap between the wall 5 and the material 3. However, most of the ink flows toward
25 the opening 2 in communication with the ink jet recording head, because the air in the material 3 moves in this direction. In order to promote this ink

flow, the ink cartridge may be preferably provided with an air introducing groove and an adjusting portion.

According to the above-described method, the
5 ink can be easily supplied out when the ink cartridge is coupled with an ink jet recording head, and therefore, the ink supply efficiency is high. In addition, the ink is not supplied to the neighborhood of the air vent 10, and therefore, the leakage of the
10 ink through the air vent 10 can be prevented.

The ink is supplied with a predetermined pressure from a supplying apparatus, and is stopped after a predetermined amount of the ink is supplied.

After the completion of the injection, the
15 opening 2 and the air vent 10 are closed without delay, as described hereinbefore. Thereafter, the ink supply tube 15 is removed from the ink injection port 7, and the ink injection port 7 is plugged with a plastic or metal spherical plug 17.

20 In the foregoing embodiment, the use is made with an ink injection apparatus capable of adjusting the ink injection speed. In the next embodiment, the ink is filled into the ink cartridge with simpler structure.

25 Similarly to the foregoing embodiment, the ink cartridge used up or partly used from the ink accommodating portion 6 is placed so that the gap 8

takes the topmost position. Then, an ink supply tube 15 is inserted through the opening 2 and through the negative pressure producing material 3 and through the gap into the ink accommodating position, in this
5 embodiment as shown in Figure 27. Using an ink refilling container 30, the ink is directly injected into the ink accommodating portion 6. The ink refilling container 30 is provided with a pumping function to force the ink into the ink accommodating
10 portion 6. In Figure 27 example, the container has bellows to permit pressure injection.

The air in the ink accommodating portion 6 is discharged to the outside corresponding to the injection of the ink. Normally, the air is discharged
15 through the air vent 10 through the negative pressure producing material 4 through the gap 8 along the path of the ink flow when the ink is used for the recording, but in the opposite direction. If the material 4 contains a great amount of the ink, the
20 discharge of the air from the ink accommodating portion 6 is not smooth. Therefore, as shown in Figure 28, an air discharging tube 26 is also inserted into the negative pressure generating material 4 together with the ink supply tube 45, to permit the
25 smooth air discharge. An arrow A in Figure 28 indicates the ink injection direction, and an arrow B is an air discharging direction.

On the contrary, when most of the ink in the material 4 is used up, the air is filled between the opening 2 and the gap 8, even if the ink is sufficiently supplied into the ink accommodating portion 6. Then, even if the ink is sucked from the opening 2, the ink is not sucked from the ink accommodating portion 6. In such a case, the ink is preferably filled between the opening 2 and the gap 8. For this purpose, at least one fine holes 48 are formed at the middle portion of the ink supply tube 45, as shown in Figure 29, by which the ink can be filled between the opening 2 and the gap 8 in the negative pressure producing material 4, during the ink filling process. In addition, to prevent ink leakage adjacent the opening 2, the opening 2 is plugged with a gap 49, during the ink refilling operation.

By a combination of the exhausting tube 46, fine holes 48 or the cap 49, is possible in any way to permit simple and easy ink filling operation.

As shown in Figure 27, the ink supply tube is in the form of a needle, and therefore, when the quantity of the ink is small in the material 4, the ink may be injected into the material after the ink accommodating portion is filled with the ink, by which the formation of the ink flow path between the gap 8 and the opening 2 is easily assured. When the ink is injected beyond the capacity of the ink accommodating

portion, the ink flows between the internal wall surface of the ink cartridge and the material 4, as described hereinbefore. Similarly to this, because of the wettability of the needle, the ink is easily
5 expanded between the needle and the material 4.

Referring to Figure 30A, a further embodiment will be described in which the ink injection needle 53 has a flat cross-section. The ink injection needle, as shown in Figure 30B, is inserted between the
10 internal wall surface of the material accommodating portion 4 and the material 3 to project the flat end into the ink accommodating portion 6, and the ink is injected into the accommodating portion 6 from the ink injection port 53.

15 Figures 30B and 30C show the position of the ink cartridge and the ink injection needle 53 during the ink injection. As a result, similarly to the foregoing embodiments, the ink can be supplied into the ink accommodating portion 6 and to between the gap
20 8 and the opening 2.

With the following structure, the injection needle 53 can be smoothly and easily inserted. It is preferable that the structures of Figures 28 and 29 are used in this embodiment to improve the ink filling
25 speed and to assure the formation of the ink path in the negative pressure producing material accommodating portion.

In the foregoing embodiments, the ink injection needle 45 and 53 have a straight configuration. In the following embodiment, the ink injection needle 54 is curved as shown in Figures 31A and 31B.

The curved ink injection needle 54 can be inserted in the manner that the end thereof is positioned about the center of the ink accommodating portion 6. The curvature and the length of the needle 54 may be determined in consideration of the configuration and the size of the ink cartridge 1, so that the end of the ink injection needle 54 can be easily placed at a desired position. For example, the end of the injection needle 54 may be placed below the ink level, thus reducing the foaming of the ink, during the pressurized ink injection.

Figures 32A and 32B illustrate a further embodiment, wherein a plurality of ink injection needles can be inserted to supply the ink at a plurality of positions. In this embodiment, the ink injection speed can be decreased, thus avoiding the foaming of the ink. In addition, the ink can be more uniformly injected, so that the ink can be injected more effectively.

According to the embodiments of Figures 32A and 32B, the ink injection needles 55a and 55b have different radius of curvature. The ink injection

needles 55a and 55b are separately inserted into the same ink cartridge, and after the end of the ink injection needle is reached in the ink accommodating portion, the ink injection needles 55a and 55b are
5 mounted to joints 55a and 55b of the common ink injection device. Then, the ink is injected through both of the injection needles.

Figure 33 shows a further embodiment, in which one 57a of the ink injection needles is
10 straight, and the other 57b has a bent portion.

The ink injection needle 57b is elastically deformable into a straight configuration. There is provided an adapter 57c having an obliquely cut end. Through the adapter 57c, the ink injection needles 57b
15 and 57a can be inserted. The two needles 57a and 57b are slidable in the adapter 57c.

First, the adapter 57c is inserted into the negative pressure producing material 3 without the ink injection needles 57a and 57b projected out, as shown
20 in Figure 33C. Then, after the end of the adapter 57c reaches the bottom communication gap 8, the ends of the injection needles 57a and 57b are projected out. Then, the ink injection needle 57b restores the bent configuration, so that the ink outlet ends of the
25 needles are separated from each other.

By the separation, the ink can be distributed uniformly in the ink accommodating portion 6, and the

foaming can be prevented. Therefore, upon the reinjection, the ink can be smoothly supplied.

Referring to Figure 34A and 34B, a further embodiment will be described. In these Figures, the
5 ink is being injected.

According to this embodiment, the ink can be injected in the similar manner as in the foregoing embodiments, for an ink cartridge 1a having a projection plate 23 on a bottom of the ink
10 accommodating portion 6.

The projection 23 has an ink leakage preventing function. For example, the ink cartridge having the ink accommodating portion 6 containing one half ink, is kept under 60 °C condition for example
15 with the position shown in Figure 34A, the ink evaporates with the result that the ink moves from the ink accommodating portion 6 into the material accommodating portion 4 if the projection plate 23 is not provided. If the material accommodating portion 4
20 is filled with the ink, the ink starts to leak through the air vent 10. By the provision of the plate 23, the evaporated ink is deposited on the surface of the projection plate 23 in the form of dew droplets. The droplets deposited adjacent the gap are gradually
25 sucked through the gap 8 by the material 4 by the capillary force. However, because the ink is in the form of droplets, the movement of the ink can be

prevented.

In this case, the ink injection needle having the configuration described hereinbefore, is not easily inserted into the ink accommodating portion 6.

5 In this embodiment, the material of the ink injection needle 58, particularly the end portion thereof, has high elasticity, so that it can be inserted around the projection plate 23, as shown in Figure 34A and 34B, so that the ink can be properly supplied.

10 As described hereinbefore, according to an aspect of the present invention, the ink can be easily supplied into the ink cartridge, and therefore, the ink cartridge can be reused. This reduces the running cost and extend the service life of the ink cartridge
15 body. There is no need of dispose of the used ink container body to avoid the environmental problems.

According to another aspect of the present invention, the ink is injected while the communicating gap takes the topmost position in the ink
20 accommodating portion. Therefore, the ink can be injected while pushing the air out, so that the ink can be properly supplied to a desired position without foaming of the ink. Thus, the use efficiency is high. In addition, the ink leakage through the air vent can
25 be prevented.

According to a further aspect of the present invention, the ink refilling is effected from an ink

containing portion, and the ink refilling port is sealed by a separate member. By doing so, the ink cartridge can be reused while maintaining the function of a fresh ink cartridge, by which the running cost
5 can be reduced, and the resources can be saved.

According to a further aspect of the present invention, easy and simple ink refilling means can be provided.

According to a further aspect of the present
10 invention, the negative pressure is provided with stability, and the ink can be filled into a cartridge having a large ink accommodating capacity per unit volume. A high quality printing is possible with high performance of the ink cartridge even if it is
15 repeatedly reused.

The inventors have investigated the property of the ink suitably usable with the ink containers of the foregoing embodiments. The preferable ink shows the stability of the air-liquid exchange portion
20 against the vibration of the ink, and it is stabilized against the ambient condition change.

The description will be made such inks suitably usable with the ink containers of the foregoing embodiments.

25 The fundamental structure of the ink includes at least water, coloring material and water-soluble organic solvent. The organic solvent is low volatile

and low viscosity material having high compatibility with water. The following is examples: amides such as dimethylformamide and dimethyl-acetoamide, ketones such as acetone, ethers such as

5 tetrahydrofuran and dioxane, polyalkylene glycols such as polyethylene glycol and polypropylene glycol, alkylene glycols such as ethylene glycol, propylene glycol, butylene glycol, triethylene glycol, thiodiglycol, hexylene glycol and diethylene glycol,

10 lower alkyl ethers of polyhydric alcohols such as ethylene glycol methyl ether, diethylene glycol monomethyl ether and triethylene glycol monomethyl ether, monohydric alcohols such as ethanol and isopropyl alcohol, and besides, glycerol, 1,2,6-

15 hexanetriol, N-methyl-2-pyrrolidone, 1,3-dimethyl-2-imidazolidinone, triethanolamine, sulfolane and dimethyl sulfoxide. No particular limitation is imposed on the content of the water-soluble organic solvent. However, it may preferably be within a range

20 of from 1 to 80 % by weight. The coloring material usable with this invention may be a dye or a pigment. The dye may preferably be water-soluble acid dye, direct color, basic dye, reactive dye or the like. The content of the dye is not particularly limited,

25 but 0.1 - 20 % by weight on the basis of the ink total weight is preferable.

Use of surfactant is desirable to adjust the

surface tension. Examples of such a surfactant used include anionic surfactants such as fatty acid salts, higher alcohol sulfuric ester salts, alkylbenzene-sulfonates and higher alcohol phosphoric ester salts, 5 cationic surfactants such as aliphatic amine salts and quaternary ammonium salts, nonionic surfactants such as ethylene oxide adducts of higher alcohols, ethylene oxide adducts of alkylphenols, aliphatic ethylene oxide adducts, ethylene oxide adducts of higher 10 alcohol fatty acid esters, ethylene oxide adducts of higher alkyl amines, ethylene oxide adducts of fatty acid amides, ethylene oxide adducts of polypropylene glycol, higher alcohol fatty acid esters of polyhydric alcohols and alkanolamine fatty acid amides, and amino 15 acid- and betaine-type amphoteric surfactants. No particular limitation is imposed on such a surfactant. However, nonionic surfactants such as ethylene oxide adducts of higher alcohols, ethylene oxide adducts of alkylphenols, ethylene oxide-propylene oxide 20 copolymers, ethylene oxide adducts of acetylene glycol are preferably used. Further, it is particularly preferred that the number of moles of added ethylene oxide in the ethylene oxide adducts should be within a range of from 4 to 20. No particular limitation is 25 imposed on the amount of the surfactant to be added. However, it may preferably be within a range of from 0.01 to 10 % by weight. The surface tension may be

controlled by the above-described water-soluble organic solvent.

In addition to the above components, the first liquid may contain additives such as viscosity
5 modifiers, pH adjusters, mildewproofing agents or antioxidants, as needed.

The viscosity of the ink is 1 - 20 cp. The surface tension should be 20 dyne/cm - 55 dyne/cm. Further preferably, it is 25 - 50 dyne/cm. If the
10 surface tension of the ink is within this range, it does not occur that the meniscus of the recording head orifice is broken and but the ink is leaked out from the head orifice when the printing operation is not carried out.

15 The quantity of the ink contained in the ink cartridge may be properly determined up to the limit of its inside volume. In order to maintain the vacuum immediately after the ink cartridge is unpacked, the ink may be filled to its limits. However, the
20 quantity of the ink in the vacuum producing material may be lower than the ink retaining capacity of the vacuum producing material. Here, the ink retaining capacity is the amount of the ink capable of being retained in the individual material.

25 The inks according to the embodiments of the present invention and the comparison example will be described.

A mixture of water and water-soluble organic solvent is stirred with a dye for four hours, and thereafter, a surfactant is added thereto. Then, it is passed through a filter to remove foreign matters.

5 The following is composition, nature of the ink and the result of record.

	Ex.1	Ex.2	Ex.3	Ex.4
10 diethylene glycol	15 %	10 %	10 %	10 %
cyclohexanol				2 %
glycerol		5 %		
thiodiglycol			5 %	5 %
15 SURFRON S-145 (fluorinated surfactant)		0.1 %		
ACETYLENOL EH (acethylene glycol-ethylene oxide adducts)	2 %			
dyestuff	2.5 %	2.5 %	0.2 %	2.5 %
water	rest	rest	rest	rest
20 [surface tension]	[31 dyne/cm]	[25 dyne/cm]	[40 dyne/cm]	[40 dyne/cm]

Clear color images have been recorded, and the ink in the cartridge has been used up without trouble, for all of Examples 1 - 4.

	Comp. Ex. 1	Comp. Ex. 2
diethylene glycol	15 %	
glycerol		5 %
thiodiglycol		5 %
5 SURFLON S-145 (fluorinated surfactant)	0.1 %	
ACETYLENOL EH (acethylene glycol-ethylene oxide adducts)		
10 dyestuff	2.5	2.5 %
water	rest	rest
[surface tension]	17.6 dyne/cm	57.4 dyne/cm
	Clear color images has been formed. The ink has dropped out from the head by small input.	Bleeding has occurred between colors. The ink has dropped out from the head by small impact.
15		

The yellow dye was Acid Yellow 23, the cyan dye was Acid Blue 9, the magenta dye was Acid Red 289, and the black dye was Direct Black 168.

The surface tension was measured at 25 °C through Wilhelmy method.

The following is the surface potential at 20 - 25 °C of typical water-soluble organic solvents:

25 Ethanol (22 dyne/cm), isopropanol (22 dyne/cm), cyclohexanol (34 dyne/cm), glycerin (63 dyne/cm), diethyleneglycol (49 dyne/cm),

diethyleneglycol monomethylether (35 dyne/cm),
triethyleneglycol (35 dyne/cm), 2-pyrrolidone (47
dyne/cm), N-methylpyrrolidone (41 dyne/cm).

The desirable surface tension can be provided
5 by mixture with water.

The method of controlling the ink surface
tension using surfactant will be described.

For example, 28 dyne/cm of the surface
tension can be provided by addition of 1 % of sorbitan
10 monolaurate ester on the basis of water; 35 dyne/cm
can be provided by addition of 1 % of polyoxyethylene-
sorbitan monolaurate ester; 28 dyne/cm can be provided
by addition of not less than 1 % of ACETYLENOL EH
(acetylene glycol-ethylene oxide adducts). If a lower
15 surface tension is desired, 17 dyne/cm is provided by
addition of 0.1 % of SURFLONS-145 (perfluoroalkyl-
ethylene oxide adducts) (available from Asahi Glass
Kabushiki Kaisha, Japan). The surface tension
slightly varies by another additives, and therefore,
20 proper adjustment can be done by skilled in the art.

As described in the foregoing, the ink buffer
is designed in consideration of the maximum leaking
ink quantity. It has been found that the ink
buffering effect is significantly influenced by the
25 composition of the ink.

The ink for the ink jet recording containing
surfactant has been proposed. The ink is advantageous

in that the fixing property is very good for a copy sheet, bond sheet or another plain paper, that in proper color mixing (bleed or the like) does not occur even when different color ink recording regions are
5 close in the color recording, and therefore, uniform coloring is possible. The following is an example of the composition:

Ex. 5

10	dye	4 parts
	glycerol	7.5 parts
	thiodiglycol	7.5 parts
	acetylene glycol-ethyl oxide	
	adducts ($m+n = 10$)	5 parts
15	urea	7.5 parts
	pure water	68.5 parts

When such an ink used, the ink does not leak out of the ink cartridge because the ink is absorbed by the absorbing material 3 in the ink chamber 4 when
20 the ink is pushed out of the ink chamber 6 into the ink chamber 4 due to the expansion of the air in the ink chamber 6 due to the temperature rise or the pressure reduction in the atmosphere. In an example of this embodiment, the total height in the ink
25 chamber is 3 cm, the ink chamber 4 and the ink chamber 6 have the volume of 6 cc, respectively. At the time of the initial stage, the ink chamber 6 is completely

filled (6 cc), and the ink chamber 4 containing the compressed absorbing material 3 (polyurethane foamed material) contains 4 cc ink (ink total: 10 cc). The porosity of the absorbing material is not less than 95 %
5 %, and if it is assumed that the ink is completely contained in the all of the pores of the absorbing material, the ink chamber 4 is capable of containing approx. 6 cc.

In the case of Example 5 ink, the surface
10 tension is small (30 dyne/cm^2) because of the addition of the surfactant, but the wettability between the absorbing material and the ink is improved. By doing so, it is more effective to improve the wettability of the ink latter than increasing the surface tension in
15 order to improve the permeability.

The preferable penetrating agents include anion surfactant such as OT type aerosol, sodium dodecylbenzenesulfonate, sodium laurylsulfate, higher alcohol-ethylene oxide adducts represented by general
20 Formula [1], alkylphenol-ethylene oxide adducts represented by general Formula [2], ethylene oxide-propylene oxide copolymer represented by general Formula [3] and acetylene glycol-ethylene oxide adducts represented by general Formula [4].

25 The anion surfactant has stronger foam producing tendency, and is poorer in the bleeding, color uniformity and feathering or the like than the

nonionic surfactant, the following nonionic surfactant represented by the following formula is used.


Here, n is preferably 6 - 14, and R preferably has 5 - 26 carbon atoms, in Formula [1] and [2]; m+n is preferably 6 - 14 in Formulas [3] and [4].




where R is alkyl,



10 where R is alkyl,



where R is hydrogen or alkyl,

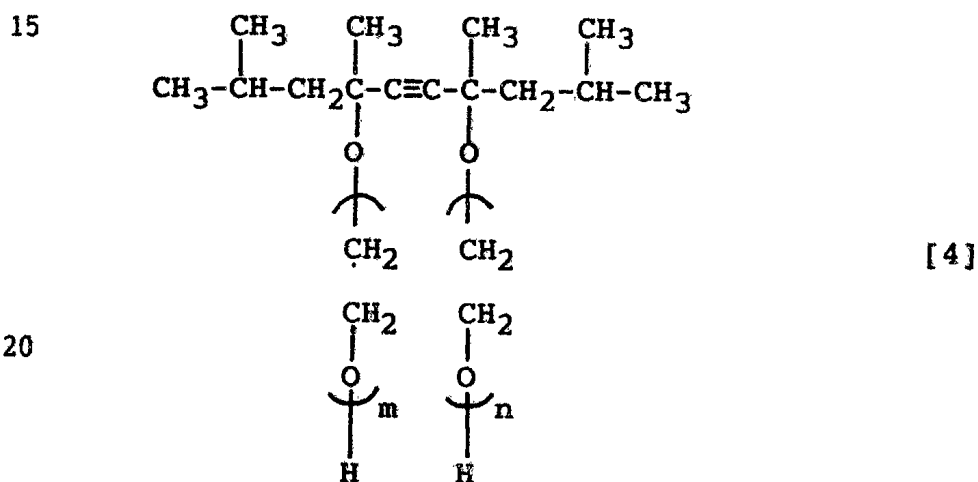

where m and n are respectively an integer.

Among the ethylene oxide nonionic surfactants, acetylene glycol-ethylene oxide adducts are preferable from the standpoint of absorption in the ink absorbing material, image quality on the

recording material and ejection performance in total. The hydrophilic property and penetrating property can be controlled by changing number $m+n$ of ethylene oxides to be added. If it is smaller than 6, the
5 penetrating property is good, water solution nature is not good, and therefore, the solubility in water is not good. If it is too large, the hydrophilic property is too strong, and the penetrating property is too small. If it is larger than 14, the
10 penetrating property is insufficient, and the ejection property is deteriorated. Therefore it is preferably 6 - 14.

The amount of the nonionic surfactant is preferably 0.1 - 20 % by weight. If it is lower than
15 0.1 %, the image quality and the penetrating property is not sufficient. If it is larger than 20 %, no improvement is expected, and the cost increases, and the reliability decreases.

One or more of the above described surfactant
20 are usable in combination.

The ink may contain dye, low volatile organic solvent such as polyhydric alcohols to prevent clogging, or organic solvent such as alcohols to improve bubble creation stability and fixing property
25 on the recording material.

The water-soluble organic solvents constituting the ink of the embodiment may include

polyalkylene glycols such as polyethylene glycol, and polypropylene glycol; alkylene glycols having 2 to 6 carbon atoms such as ethylene glycol, propylene glycol, butylene glycol, triethylene glycol, 1,2,6-
5 hexanetriol, hexylene glycol, and diethylene glycol; glycerin; lower alkyl ether of polyhydric alcohols such as ethylene glycol methyl ether, diethylene glycol methyl (or ethyl) ether, and triethylene glycol monomethyl (or ethyl) ether; alcohols such as methyl
10 alcohol, ethyl alcohol, n-propyl alcohol, isopropyl alcohol, n-butyl alcohol, sec-butyl alcohol, t-butyl alcohol, isobutyl alcohol, benzyl alcohol, and cyclohexanol; amides such as dimethylformamide, and dimethylacetamide; ketones and ketone alcohols such as
15 acetone, and diacetone alcohol; ethers such as tetrahydrofuran, and dioxane; and nitrogen-containing cyclics such as N-methyl-2-pyrrolidone, 2-pyrrolidone, 1,3-dimethyl-2-imidazolidinone.

The water soluble organic solvent can be
20 added without deteriorating the image quality or the ejection reliability. Preferably, it is polyhydric alcohols or alkyl ether of polyhydric alcohols. The content thereof is preferably 1 - 3 % by weight. And, the pure water content is 50 - 90 % by weight.

25 The dyes usable with the present invention include direct dyes, acid dyes, reactive dyes, dispersive dyes, vat dyes or the like. The content of

the dye is determined depending on the kinds of the liquid components and the required properties of the ink, the ejection volume of the recording head or the like. Generally, however, it is 0.5 - 15 % by weight, preferably 1 - 7 % by weight.


By addition of the thioglycol or urea (or derivatives thereof) in the ink, the ejection property and the clog (solidification) preventing property is remarkably improved. This is considered to be because the solubility of the dye in the ink is improved. The content of the thioglycol or urea (or the derivatives thereof) is preferably 1 - 30 %, and may be added as desired.

The main constituents of the ink of the present first invention are described above. Other additives may be incorporated provided that the objects of the invention are achievable. The additive includes viscosity-adjusting agents such as polyvinyl alcohol, celluloses, and water-soluble resins; pH-controlling agents such as diethanolamine, triethanolamine, and buffer solutions; fungicides and so forth. To the ink of electrically chargeable type used for ink-jet recording in which the ink droplets are charged, a resistivity-adjusting agent is added such as lithium chloride, ammonium chloride, and sodium chloride.

While the invention has been described with

reference to the structures disclosed herein, it is
not confined to the details set forth and this
application is intended to cover such modifications or
changes as may come within the purposes of the
5 improvements or the scope of the following claims.

10



15



20



25

The claims defining the invention are as follows:

1. An ink filling method for filling an ink cartridge with ink to be supplied to a recording head for
5 ejecting ink, comprising:

providing the ink cartridge having a negative pressure
producing material accommodating portion and an ink
accommodating portion, said negative pressure producing
material accommodating portion accommodating a negative
10 pressure producing material and being provided with an air
vent and ink supply port, and said ink accommodating portion
being provided ^{with an} ink injection opening, and accommodating
directly the ink to be supplied to the recording head, said
ink cartridge further includes a partition wall between said
15 negative pressure producing material accommodating portion
and said ink accommodating portion, said partition wall
being provided with a gap for supplying ink from said ink
accommodating portion to said negative pressure producing
material accommodating portion, said gap being formed
20 between said partition wall and a bottom wall of said
cartridge;

inserting an ink injector through said ink injection
opening;

directly injecting the ink through said injector into
25 said ink accommodating portion, while said ink supply
port ~~is~~ is open;

disposing said ink cartridge such that the gap takes a
topmost position of said ink accommodating portion.



2. A method according to Claim 1, wherein said ink
is
injection opening^{is} formed in the bottom wall.

3. A method according to Claim 2, wherein after
5 injection of the ink, the ink injection opening is sealed by
a sealing member.

4. A method according to Claim 3, wherein after
injection of the ink, the ink injection opening is sealed by
10 a sealing member integral with said ink cartridge.

5. A method according to Claim 1, wherein the ink
is injected by an ink injecting means in fluid communication
with an ink container for containing the ink to be injected,
15 whereinsaid ink injection means is inserted through an ink
supply port for supplying the ink out of said ink container,
into the ink cartridge, and an opening of said ink injection
means is projected into said ink accommodating portion.

20 6. A method according to Claim 5, wherein said ink
injection means penetrates said negative pressure producing
material.

7. A method according to Claim 5, wherein said ink
25 injection means is provided with air discharging means for
discharging air out of said ink accommodating portion.



8. A method according to Claim 5, wherein said ink injection means has an opening for supplying the ink into said negative pressure producing material accommodating portion.

5

9. An ink filling apparatus for filling an ink cartridge with ink to be supplied to a recording head for ejecting ink, wherein said ink cartridge has a negative pressure producing material accommodating portion and an ink accommodating portion, said negative pressure producing material accommodating portion accommodating a negative pressure producing material and being provided with an air vent and ink supply port, and said ink accommodating portion being provided ^{with an} ink injection opening, and accommodating directly the ink to be supplied to the recording head, said ink cartridge further includes a partition wall between said negative pressure producing material accommodating portion and said ink accommodating portion, said partition wall being provided with a gap for supplying ink from said ink accommodating portion to said negative pressure producing material accommodating portion, said gap being formed between said partition wall and a bottom wall of said cartridge, said apparatus comprising:

10

15

20

an injection member for directly injecting the ink into said ink accommodating portion; and

25

means for supplying the ink to said injection member;

wherein said injection member is injectable into the negative pressure producing material accommodating portion,

and said injection member is long enough ^{so that} ~~to~~ an end opening thereof is in said ink accommodating portion through the gap, when said injection member is inserted into said ink cartridge through the ink supply port.

5

10. An apparatus according to Claim 9, wherein said ink injecting member is provided with a plurality of openings which open to said negative pressure producing material accommodating portion.

10

11. A method according to Claim 1, wherein after said ink accommodating portion is filled with the ink, the ink supplied through said gap fills said negative pressure producing material in said negative pressure producing material accommodating portion.

15

12. A method according to Claim 11, wherein said ink injecting step is terminated after the ink reaches such a portion of said negative pressure producing material as is adjacent said ink supply portion and before the ink reaches such a portion of said negative pressure producing material as is adjacent said air vent.

20

13. A method according to Claim 1, wherein said ink injector has an opening for injecting the ink at an end thereof.

25



14. A method according to Claim 1, wherein said injector has an opening formed before end thereof

15. A method according to Claim 13, wherein the ink
5 is injected at a speed not higher than 2 cc/sec.

16. A method according to Claim 14, wherein the ink is injected at a speed not higher than 4 cc/sec.

10 17. An apparatus according to Claim 9, wherein said ink injection means is provided with air discharging means for discharging air out of said ink accommodating portion.

18. A method of filling ink into a replaceable ink
15 cartridge, said replaceable ink cartridge comprising an ink absorbing material; a first container for containing said ink absorbing material, said first container having an air vent and a supply port for supplying the ink out; a second container for containing ink; a partition wall between said
20 first container and said second container; a communication part, at an end portion of said partition wall, for communication between said first and second containers; and ambient air introducing means along said partition wall for introducing air into said communication part;

25 said ink cartridge further comprising an ink injection port;

said method comprising:



preparing an ink cartridge having said ink supply outlet opened or having both of said air vent and said ink supply outlet opened;

filling first chamber with the ink by an ink injector
5 through said ink injection port;

permitting the ink in said first chamber to seep into said sponge-like material in said second chamber through said opening, wherein said groove functions to enable said sponge-like material to absorb the ink adjacent said ink
10 supply outlet earlier than adjacent said air vent;

terminating ink injection before the ink reaches such a portion of said sponge-like material as is adjacent said air vent.

15 19. A method according to Claim 18, wherein said ink injection port is formed in the bottom wall of said first chamber, and is sealed after said termination step.

20 20. A method according to Claim 18, wherein said ink injection port is formed in the top wall of said first chamber, and is sealed after said termination step.

21. An ink filling method substantially as herein described with reference to Figs. 23A, 23B, 23C, 24A and
25 24B.

22. An ink filling method substantially as herein described with reference to Fig. 23B.

23. An ink filling method substantially as herein described with reference to Fig. 23C.

5 24. An ink filling method substantially as herein described with reference to Fig. 25B.



DATED this Fifteenth Day of April 1997

Canon Kabushiki Kaisha

Patent Attorneys for the Applicant

SPRUSON & FERGUSON

10



Ink Filling Method and Apparatus for Ink Cartridge

Abstract

An ink filling method for filling an ink cartridge with ink to be supplied to a recording head for ejecting ink includes providing an ink cartridge having a negative pressure producing material accommodating portion (4) and an ink accommodating portion (6), the negative pressure producing material accommodating portion (4) accommodating a negative pressure producing material and being provided with an air vent (10), and the ink accommodating portion (6) being substantially hermetically sealed except for fluid communication with the negative pressure producing material accommodating portion (4), and accommodating directly the ink to be supplied to the recording head, the ink cartridge further includes a partition wall (5) between the negative pressure producing material accommodating portion (4) and the ink accommodating portion (6), the partition wall (5) being provided with a gap (8) for permitting formation of meniscus of the ink; and directly injecting the ink into the ink accommodating portion (6).




Figure 1A

71612/94

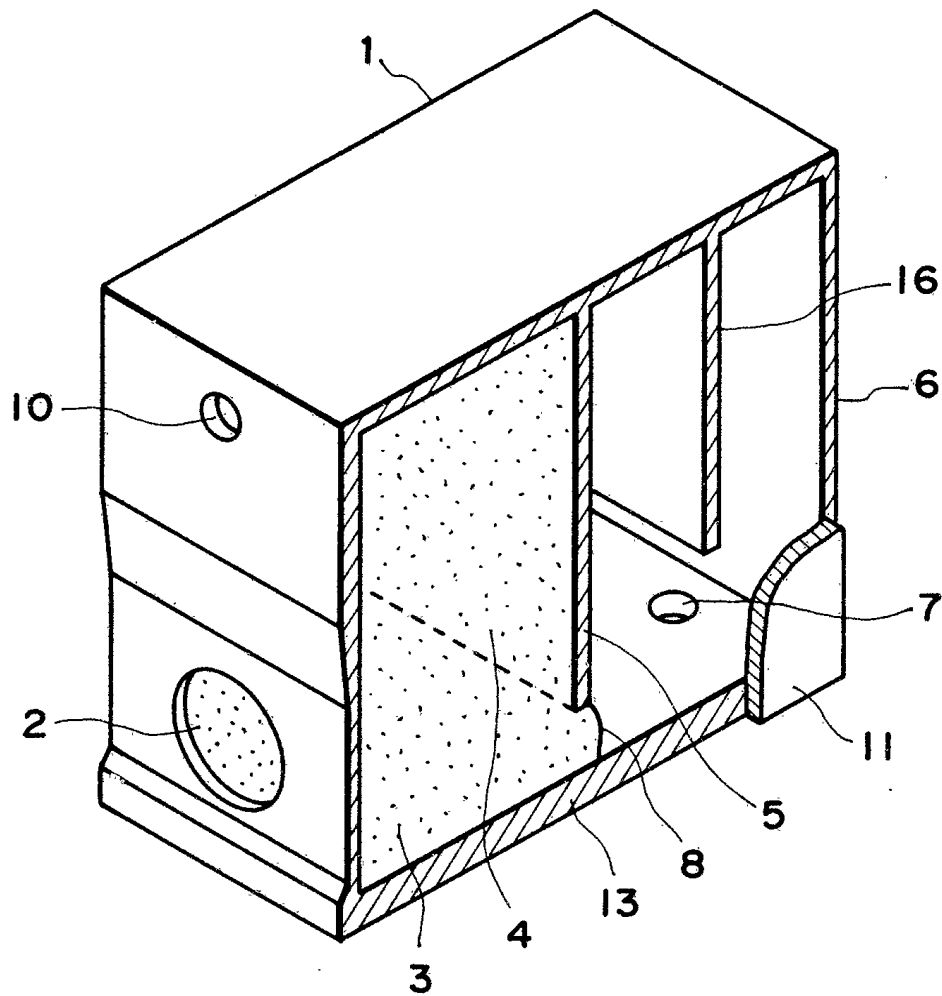


FIG. 1A

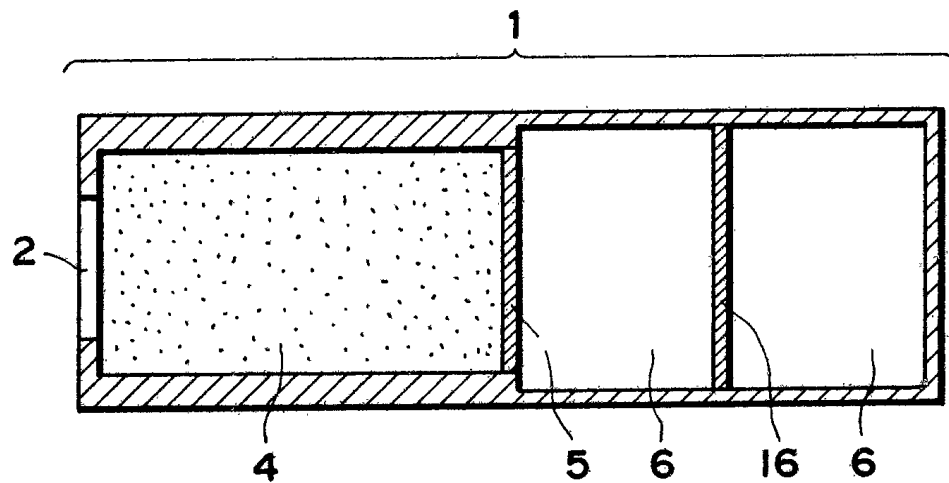


FIG. 1B

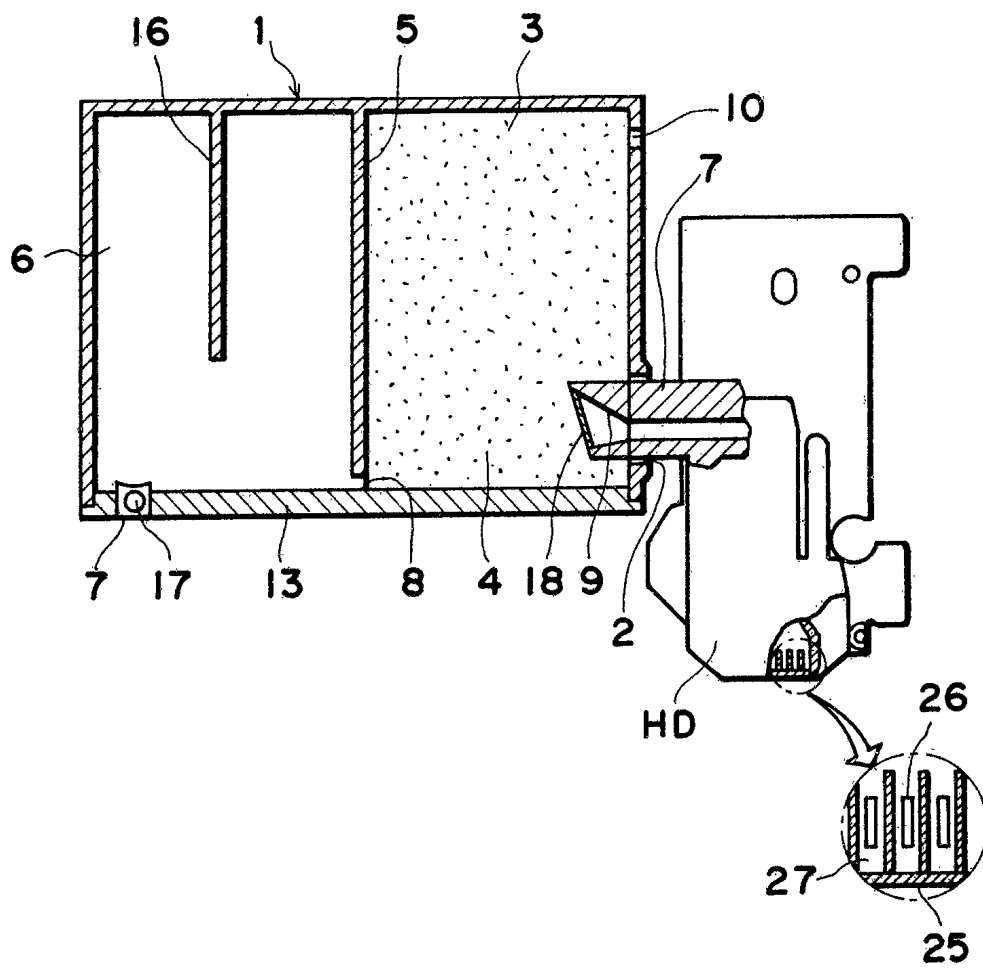


FIG. 2

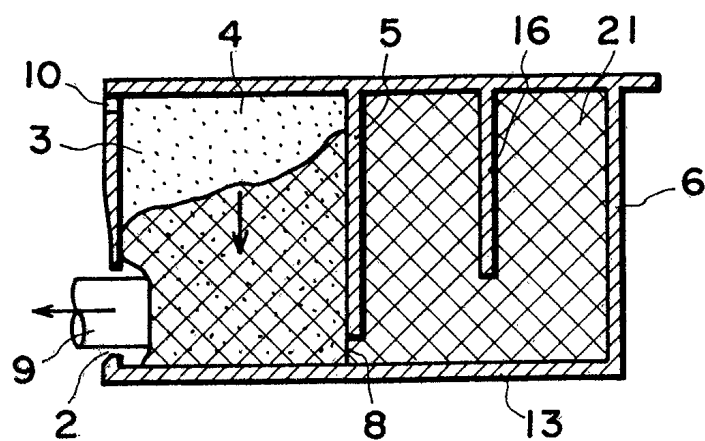


FIG. 3A

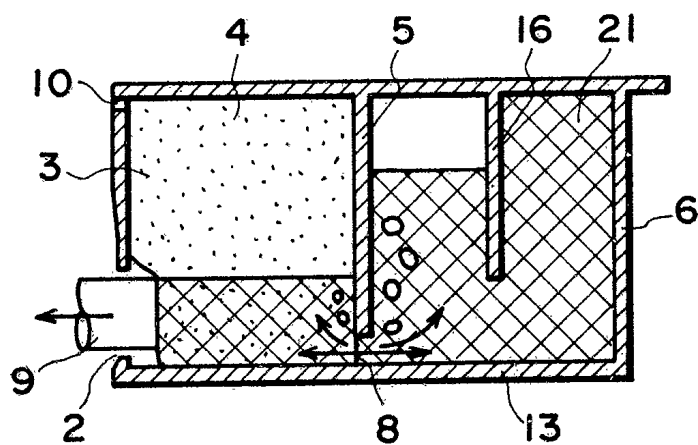


FIG. 3B

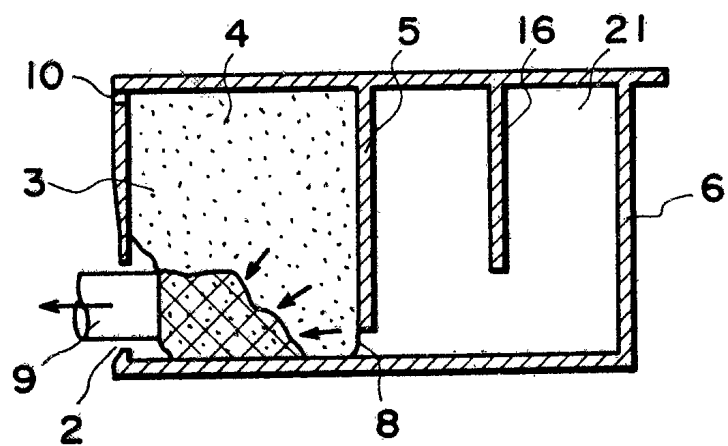


FIG. 3C

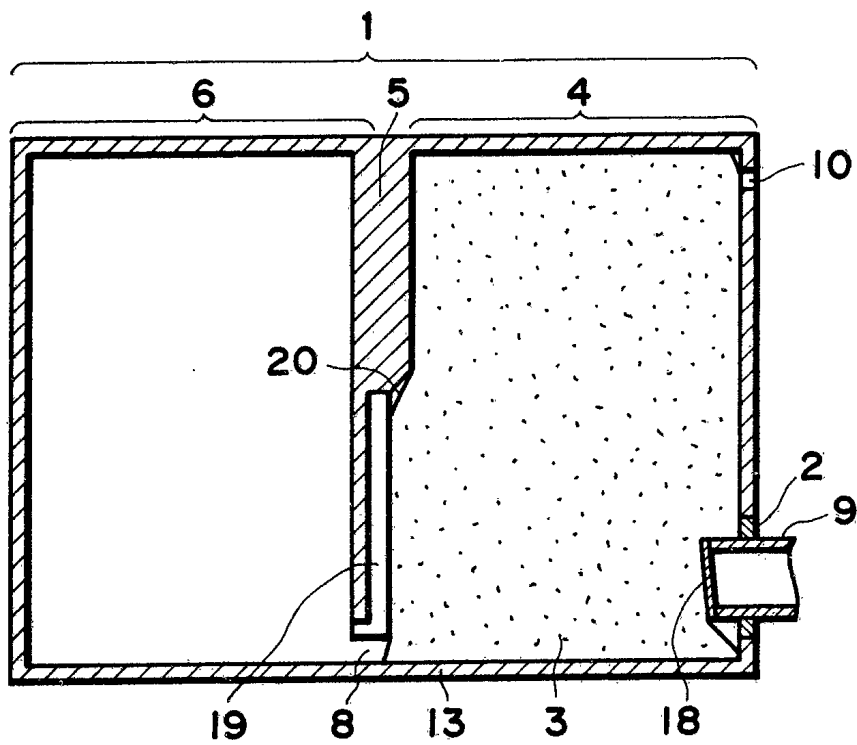


FIG. 4

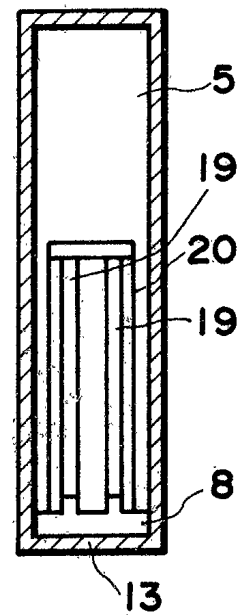


FIG. 6

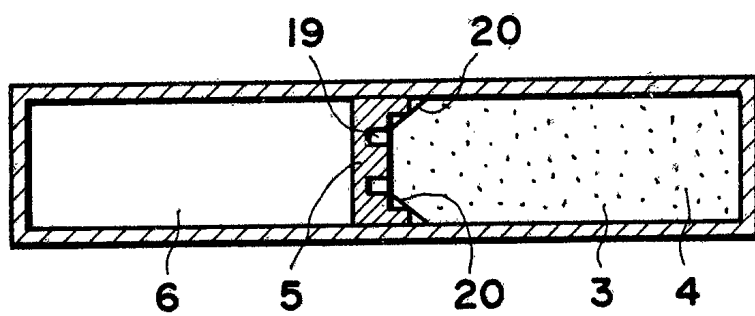


FIG. 5

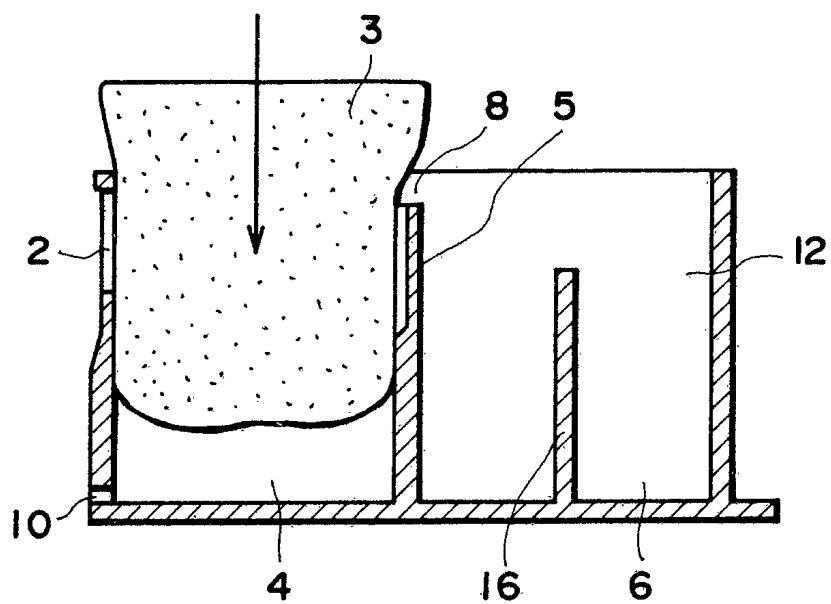


FIG. 7

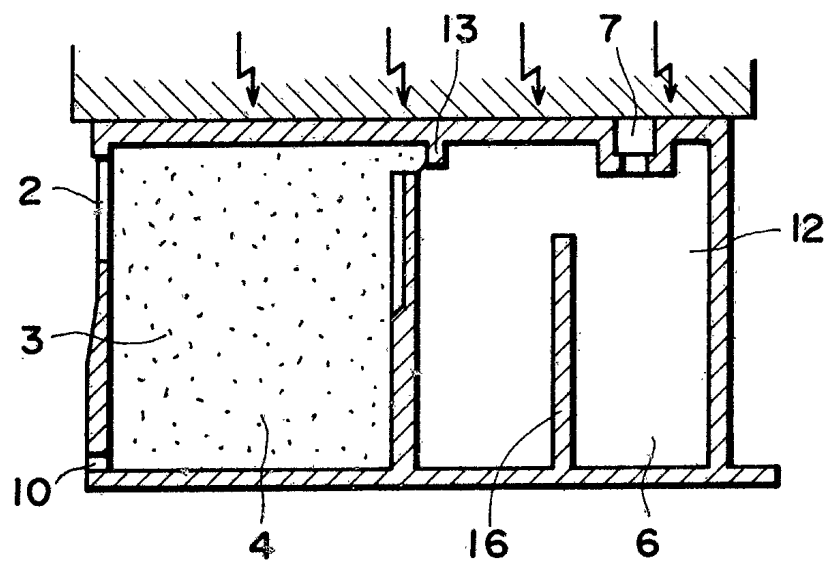


FIG. 8

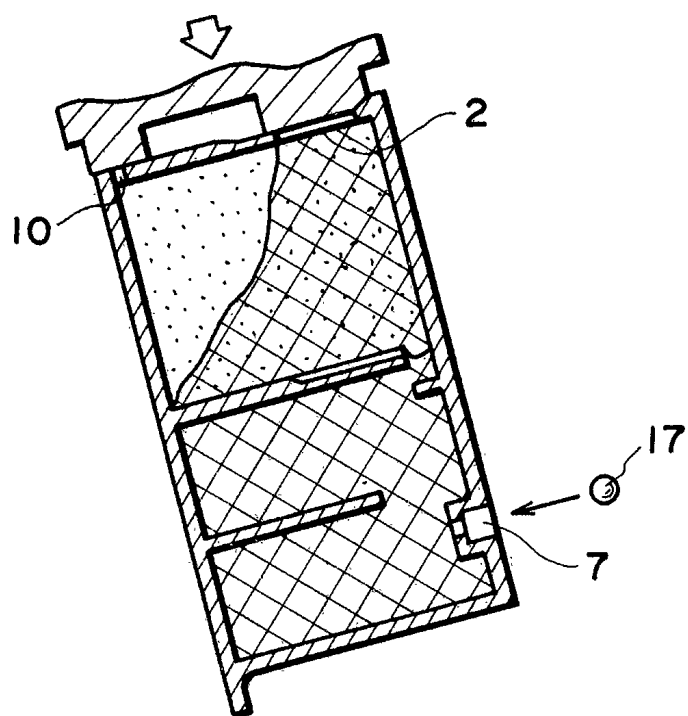


FIG. 9

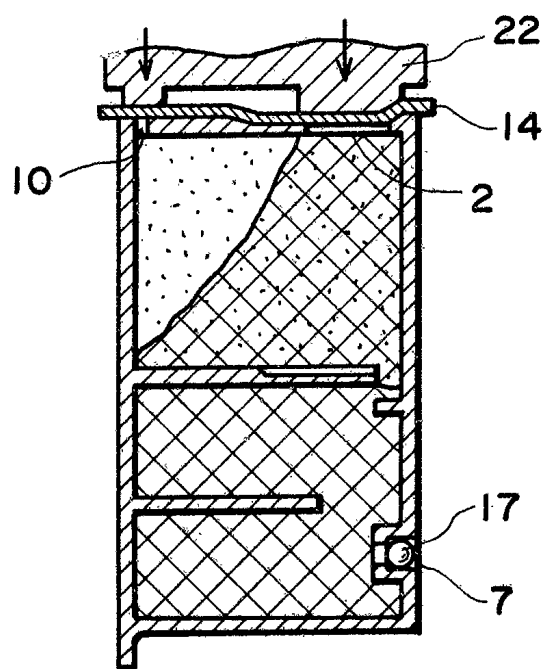


FIG. 10

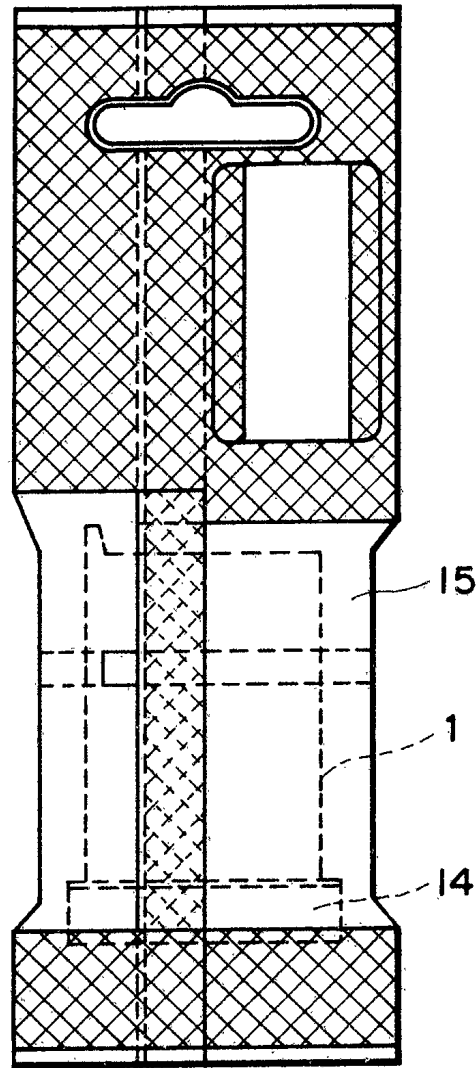


FIG. 11

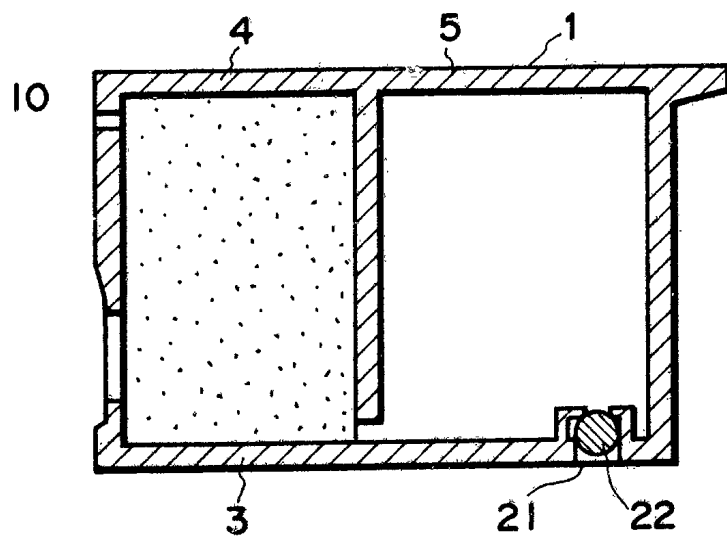


FIG. 12

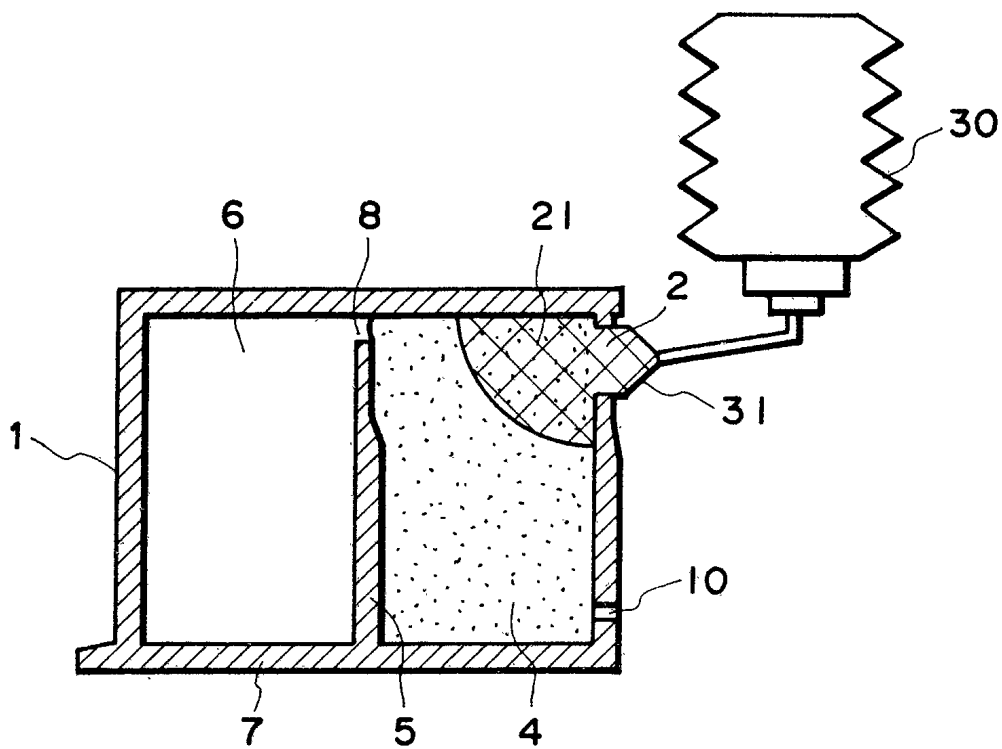


FIG. 13A

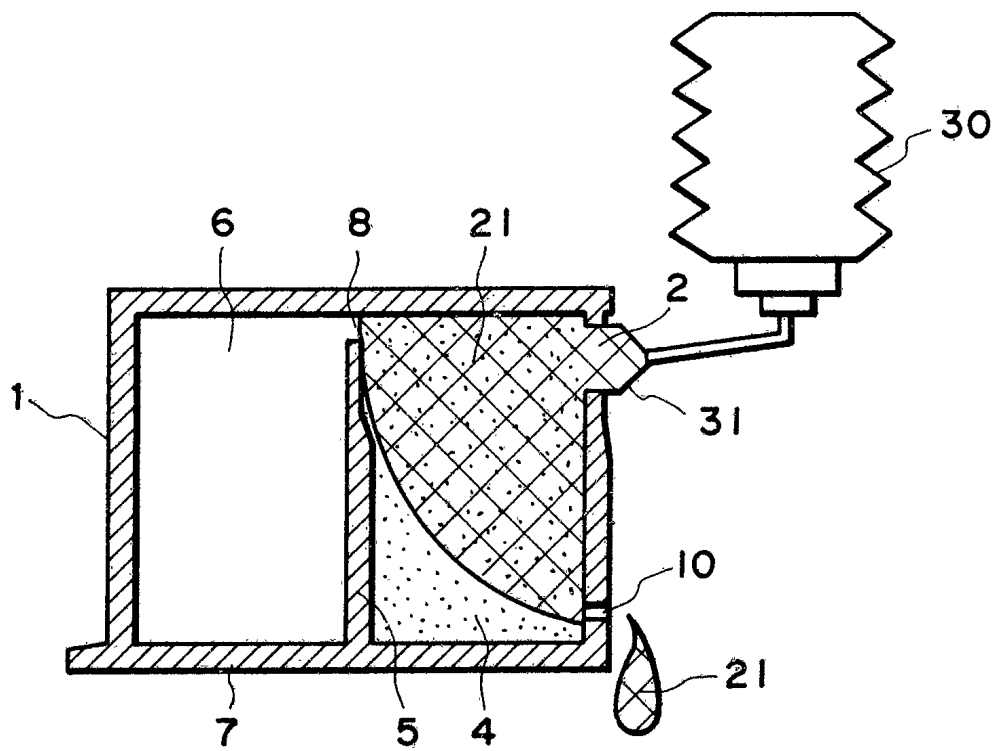


FIG. 13B

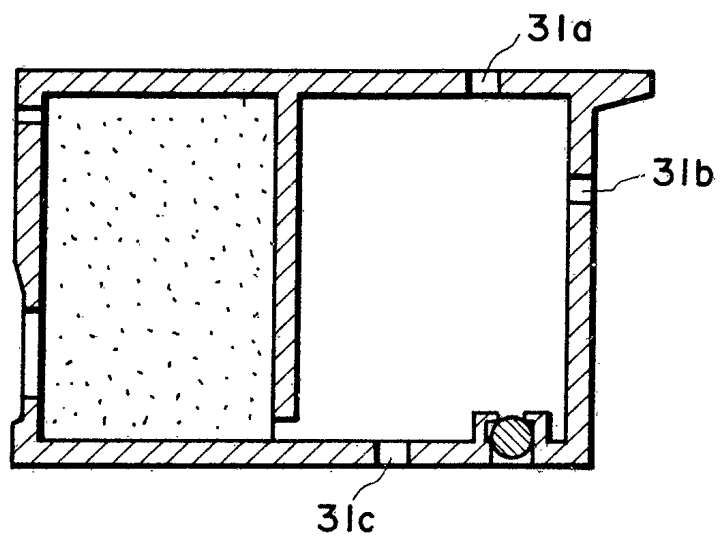


FIG. 14

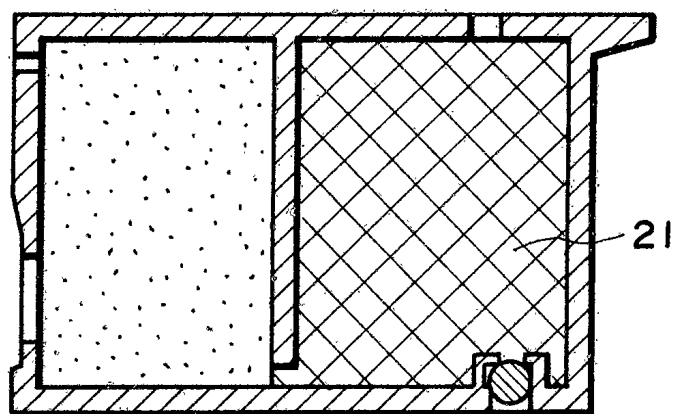


FIG. 15

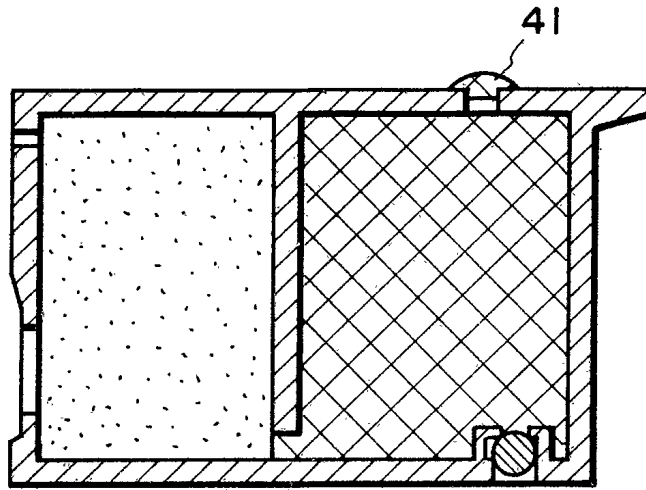


FIG. 16

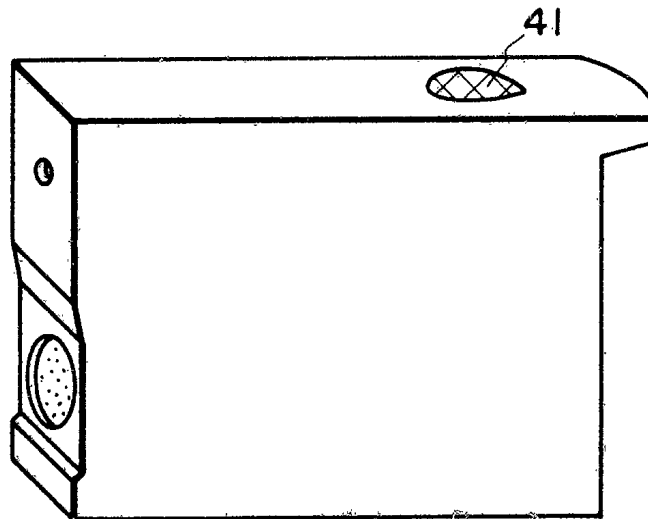


FIG. 17

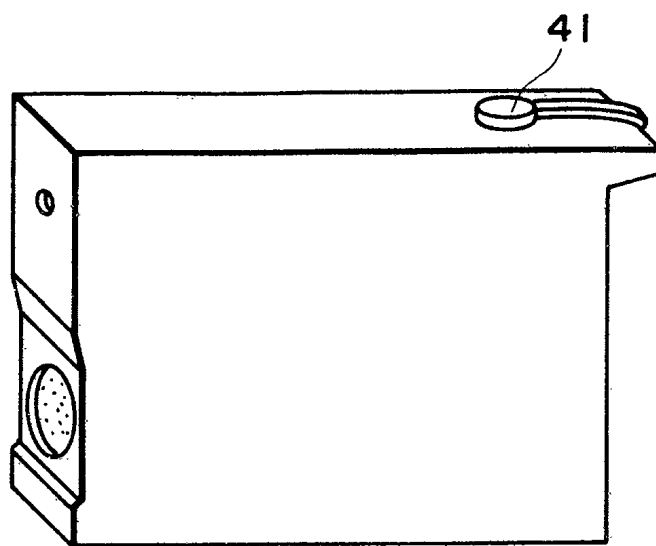


FIG. 18A

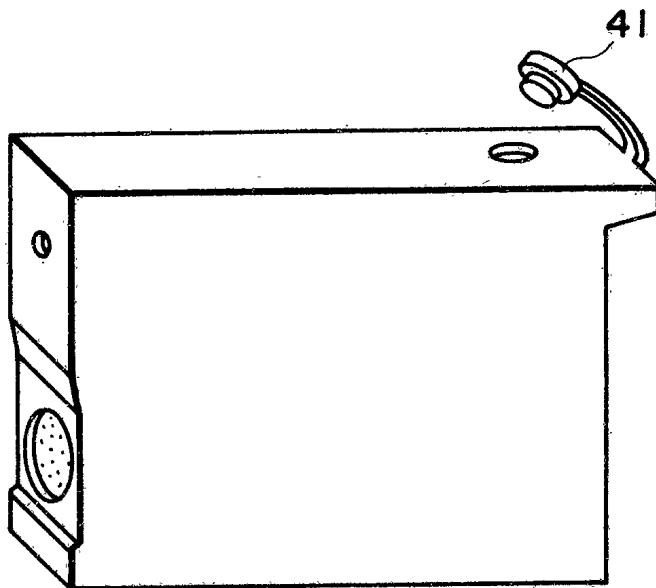


FIG. 18B

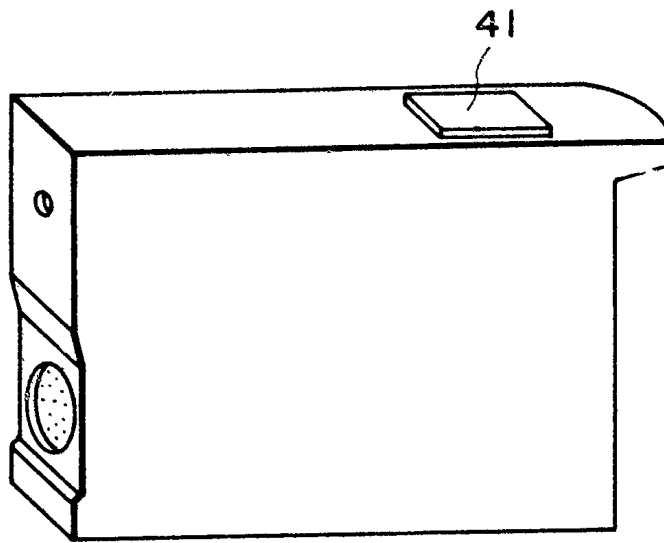


FIG. 19A

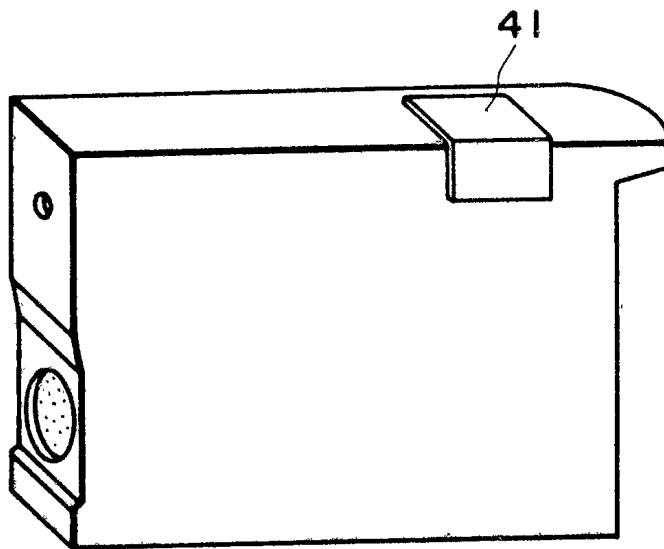


FIG. 19B



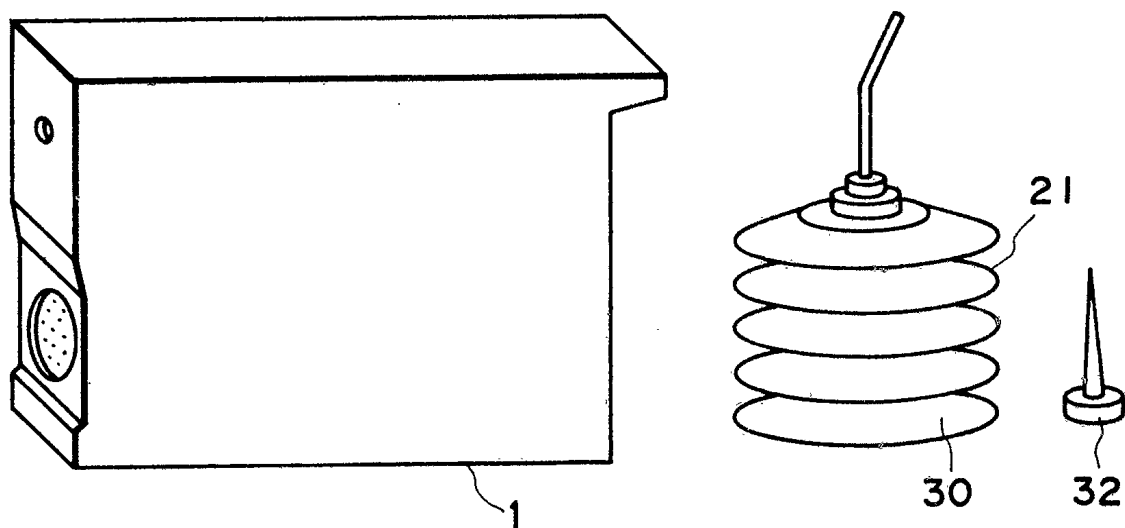


FIG. 20

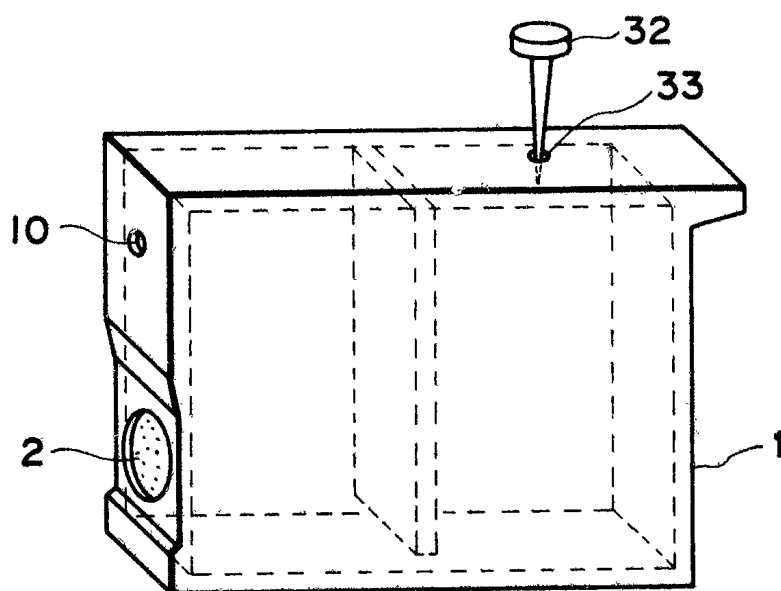


FIG. 21

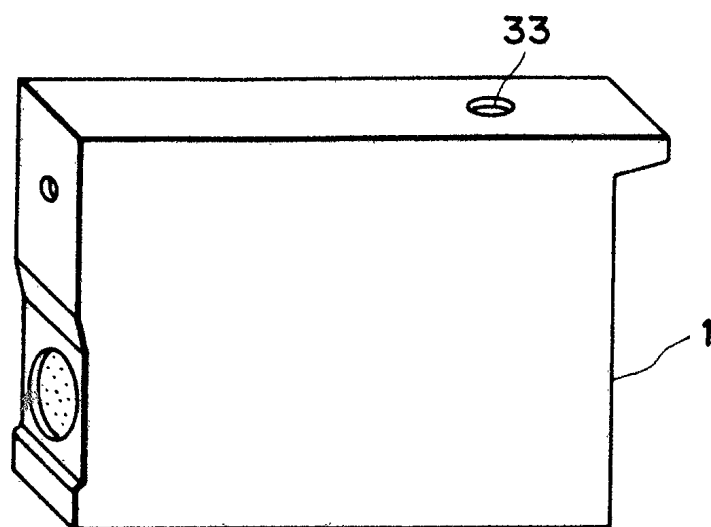


FIG. 22A

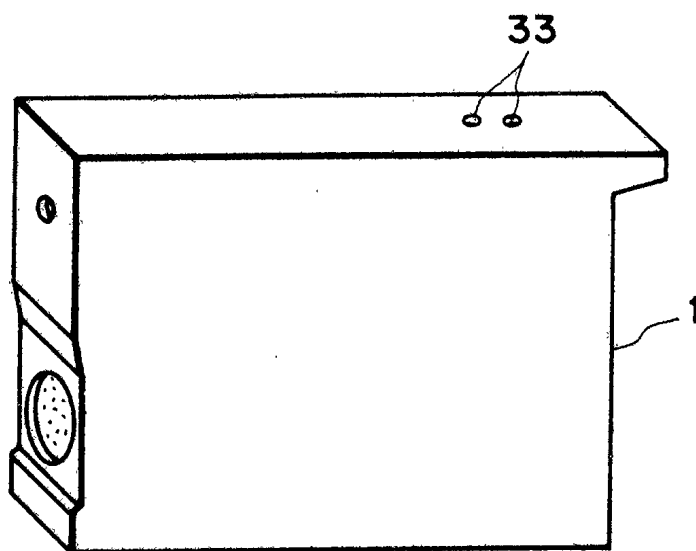


FIG. 22B



FIG. 23A

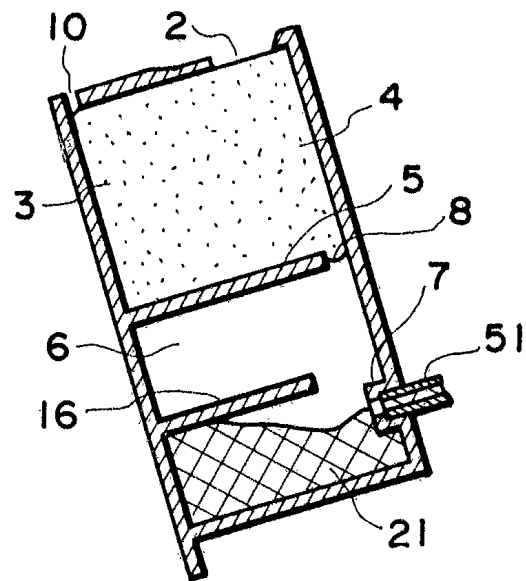


FIG. 23B

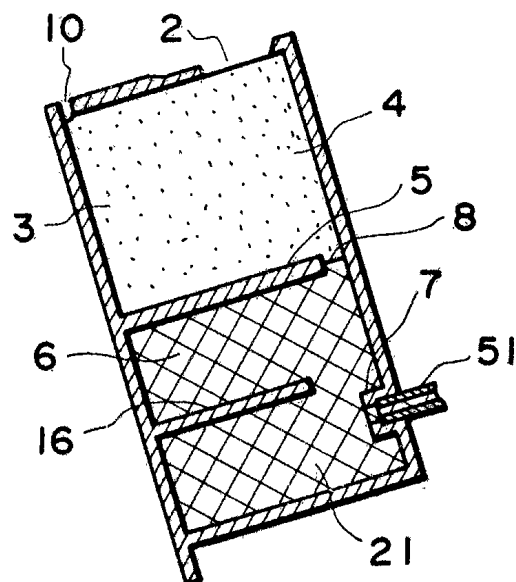
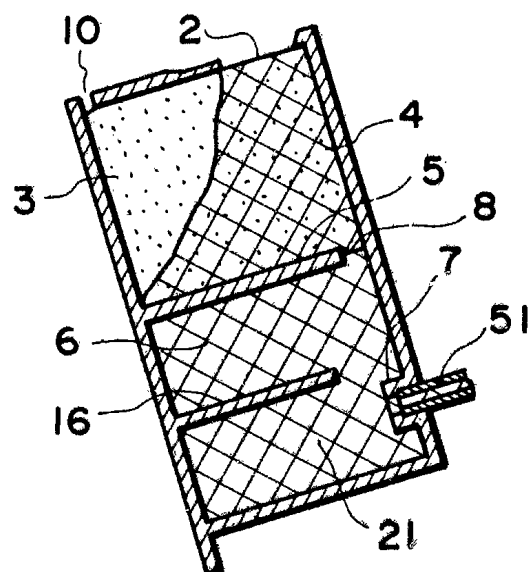


FIG. 23C



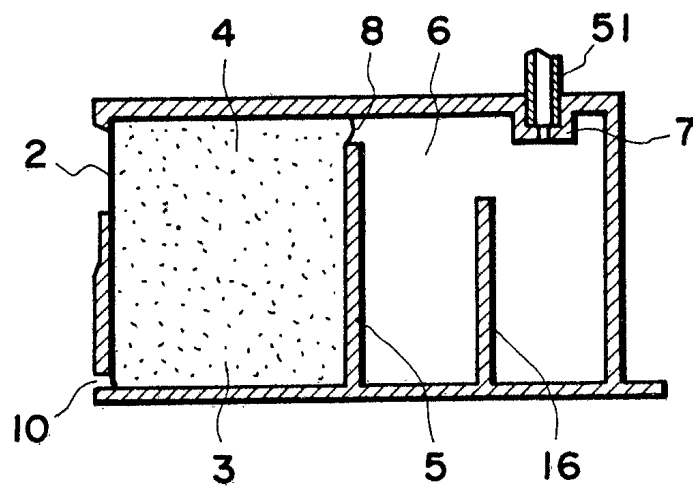


FIG. 24A

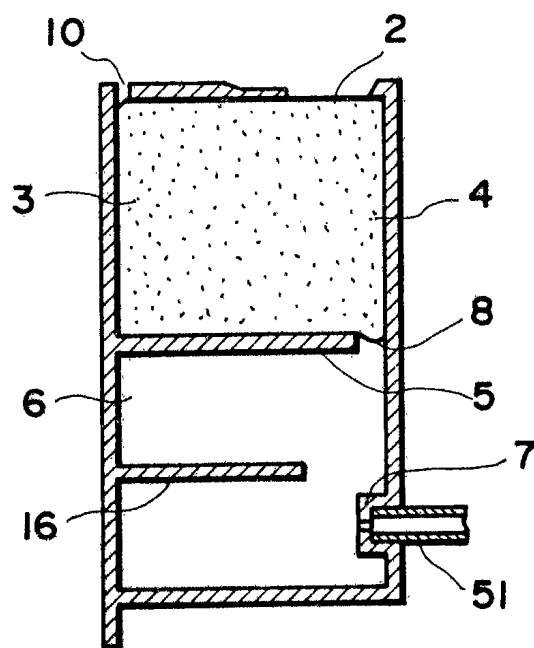


FIG. 24B

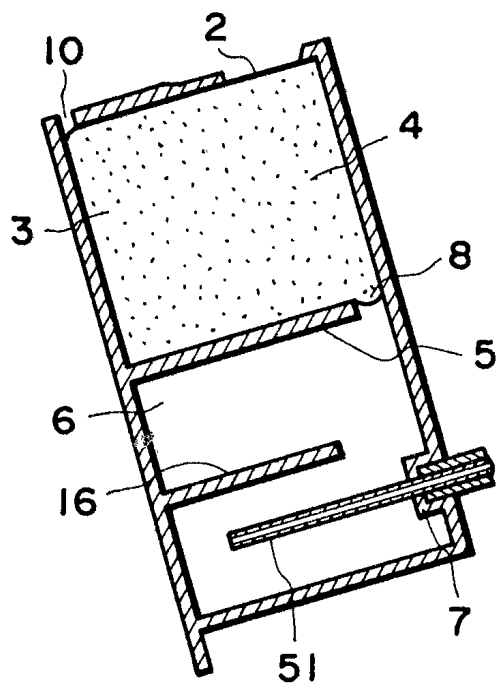


FIG. 25A

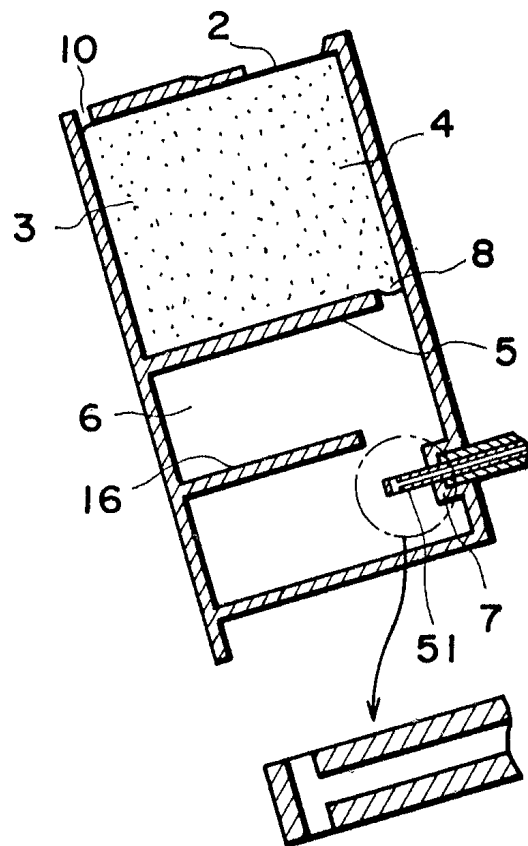


FIG. 25B

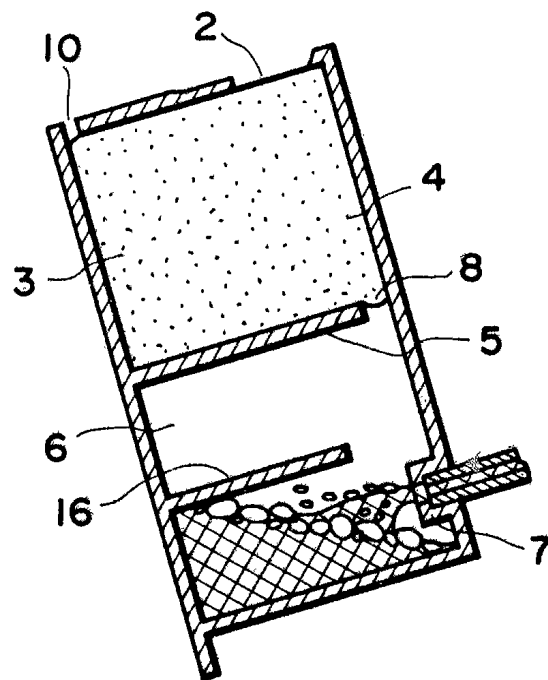


FIG. 26

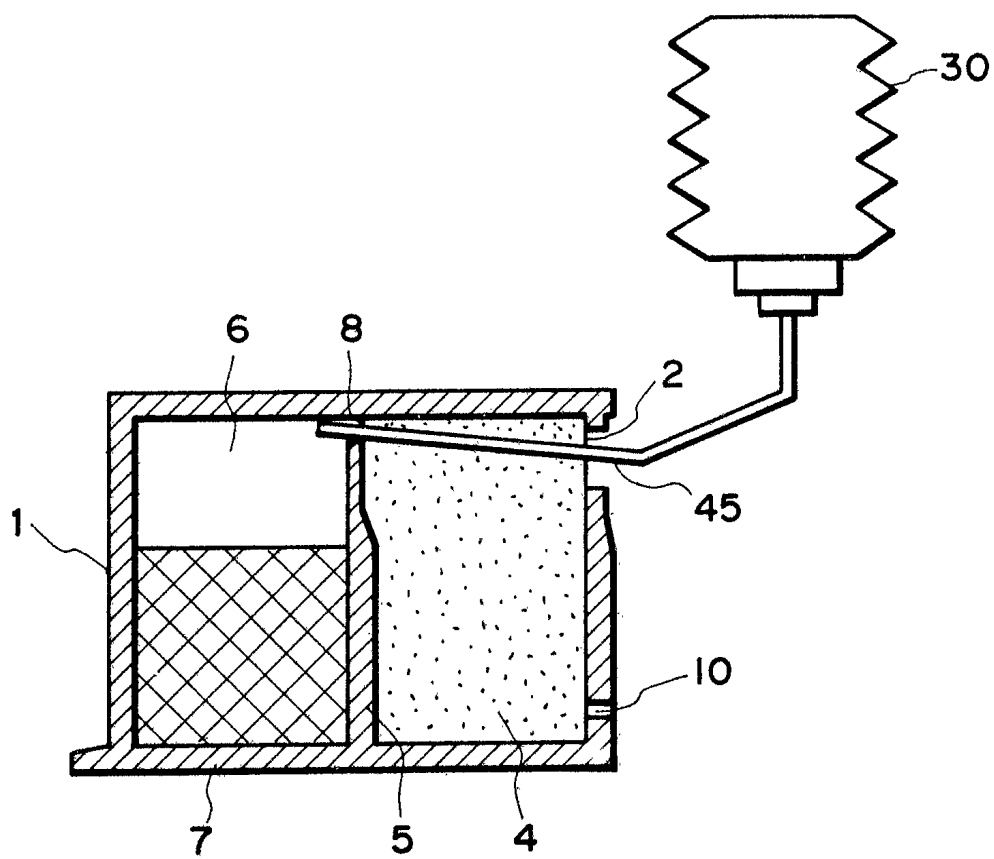


FIG. 27

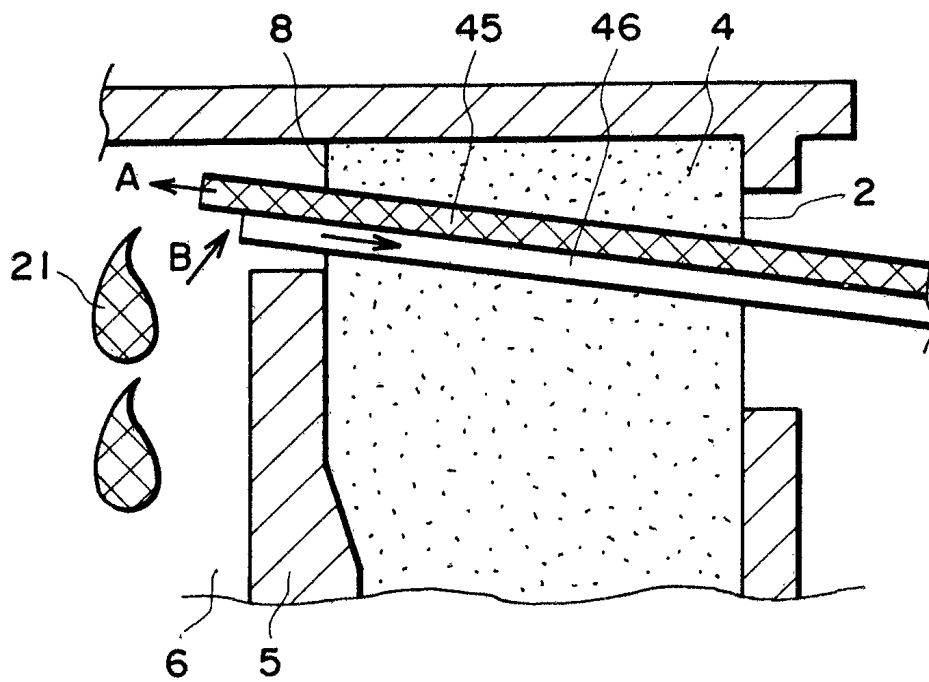


FIG. 28

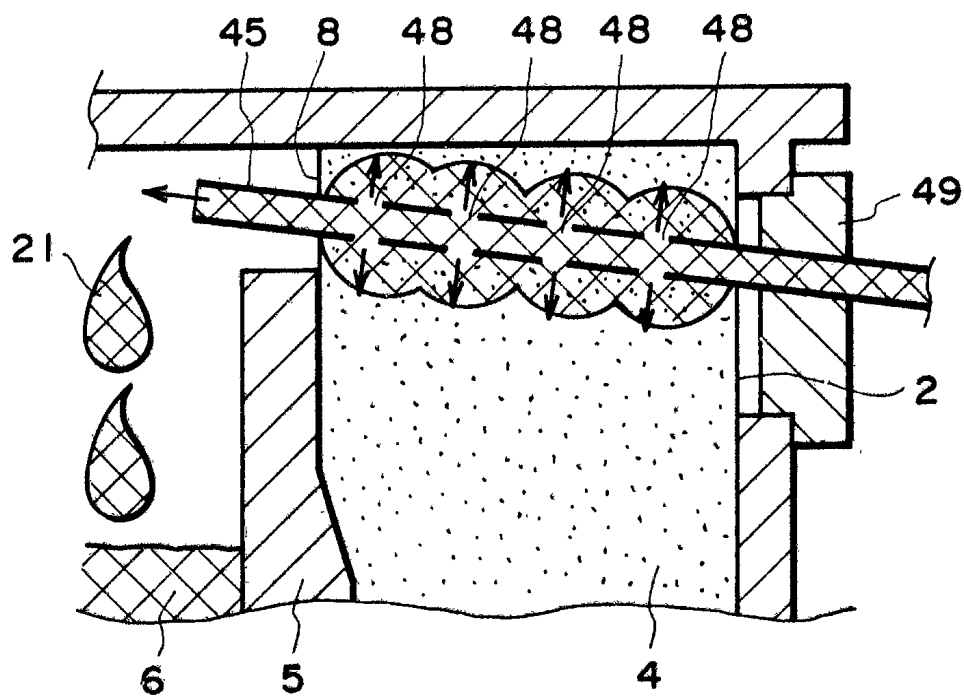


FIG. 29

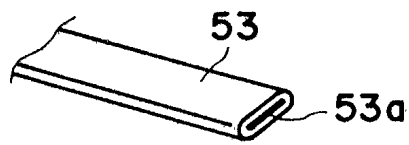


FIG. 30A

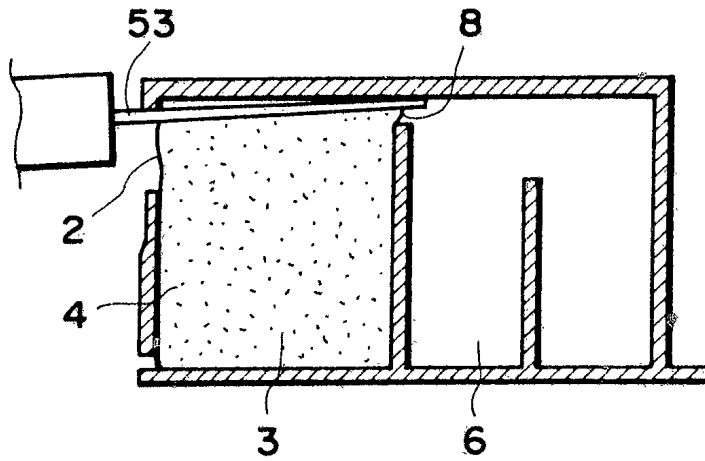


FIG. 30B

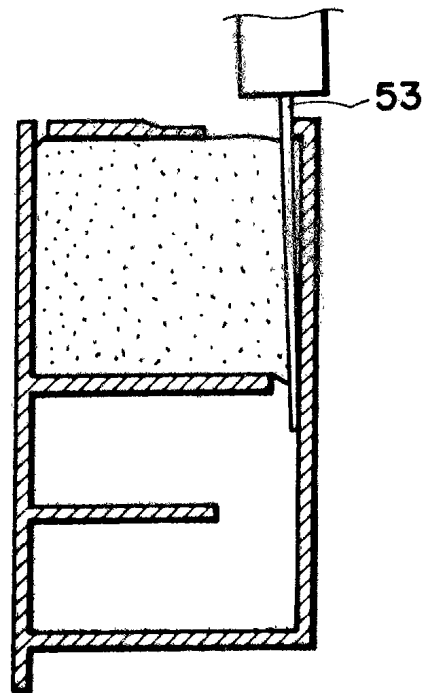


FIG. 30C

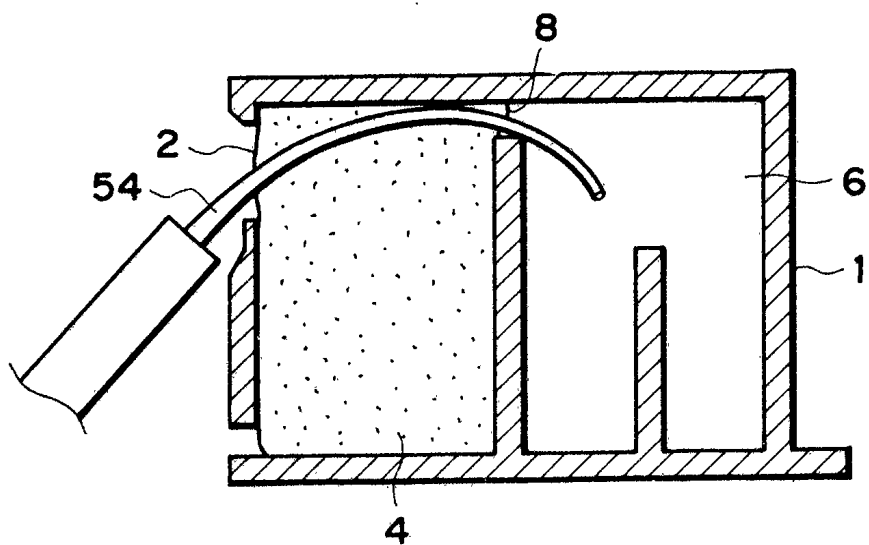


FIG. 31A

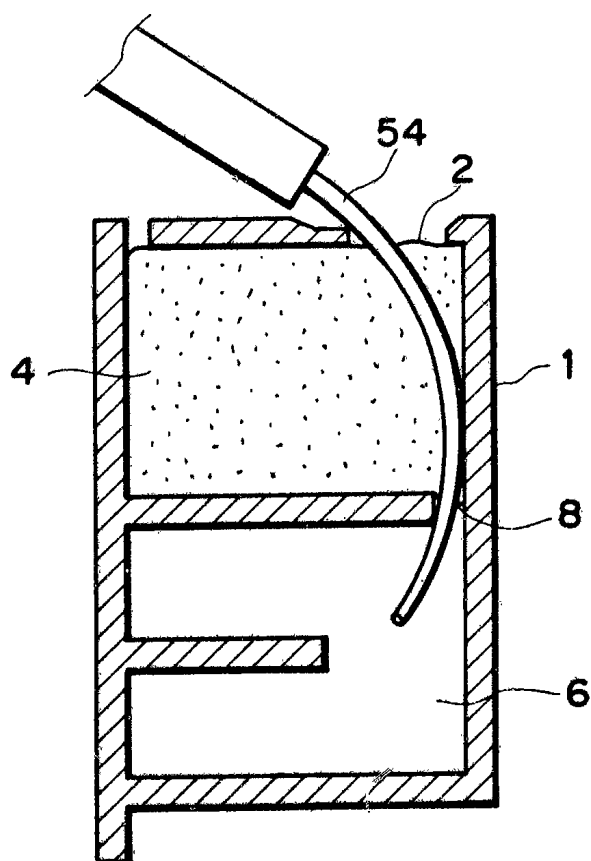


FIG. 31B

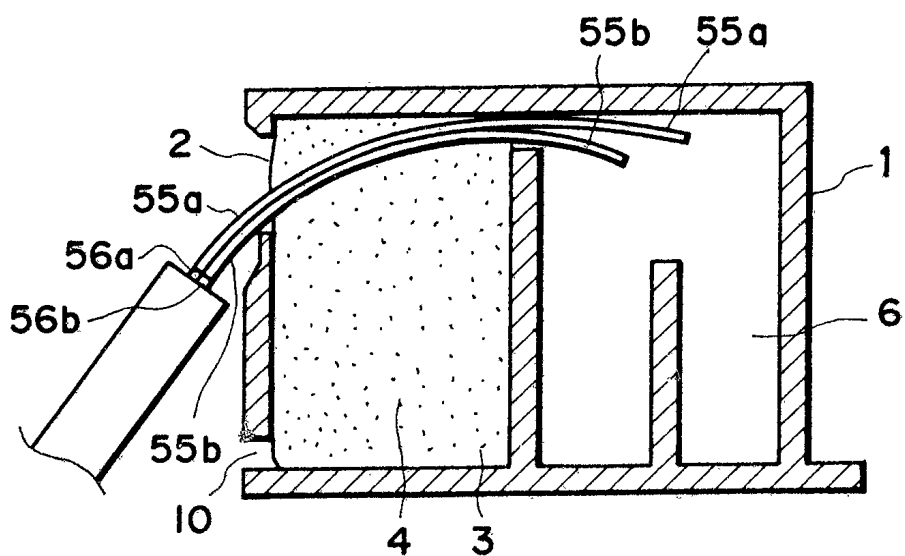


FIG. 32A

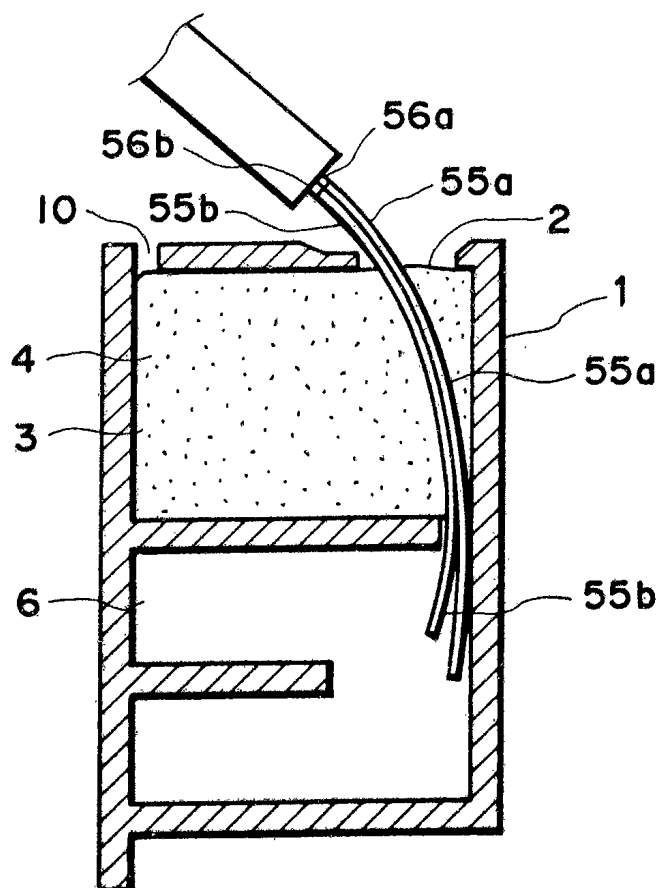


FIG. 32B

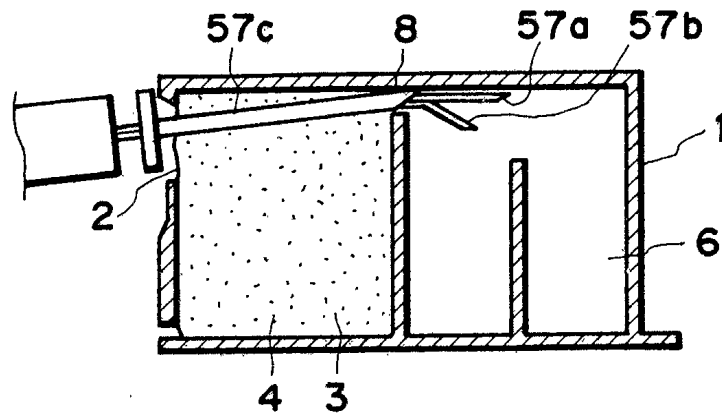


FIG. 33A

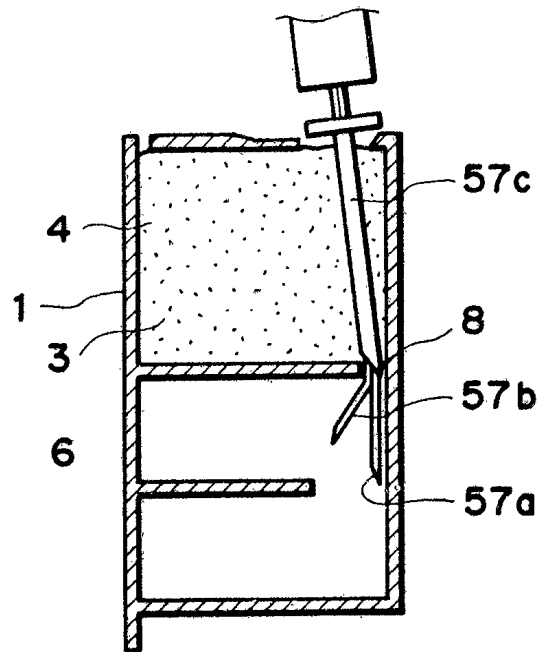


FIG. 33B

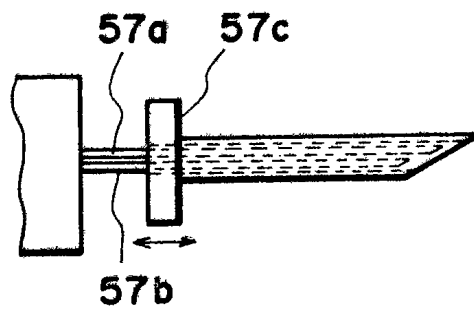


FIG. 33C

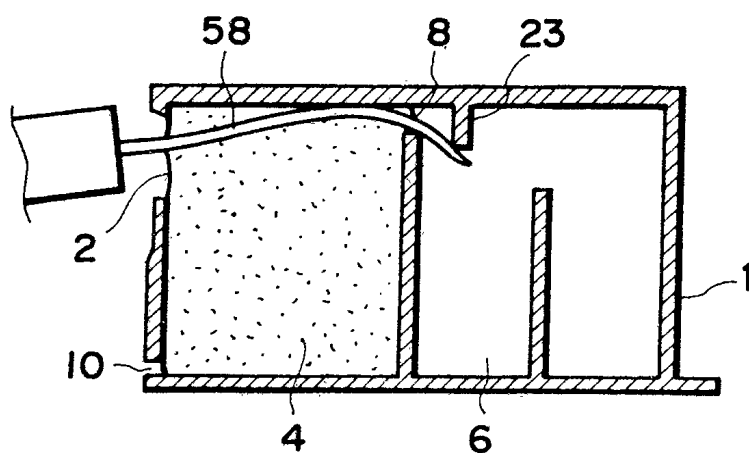


FIG. 34A

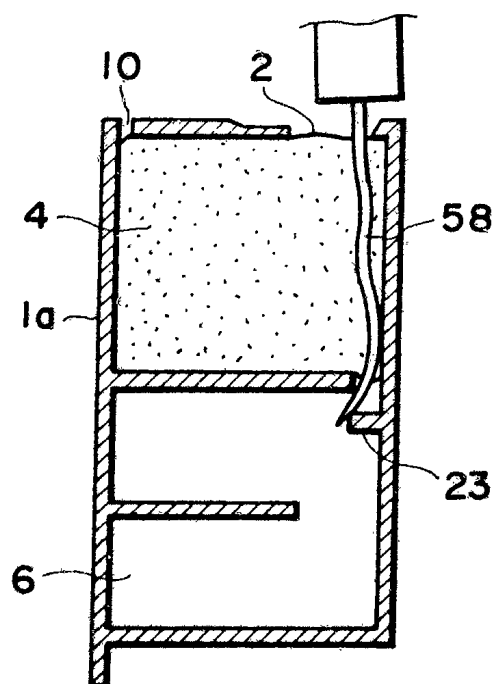


FIG. 34B