

42790/01

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2001年10月11日 (11.10.2001)

PCT

(10) 国際公開番号
WO 01/75307 A1

(51) 国際特許分類⁷:

F04B 39/00

(21) 国際出願番号:

PCT/JP01/02390

(22) 国際出願日: 2001年3月26日 (26.03.2001)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:

特願2000-97399 2000年3月31日 (31.03.2000) JP

(71) 出願人(米国を除く全ての指定国について): ダイキン
工業株式会社 (DAIKIN INDUSTRIES, LTD.) [JP/JP];
〒530-8323 大阪府大阪市北区中崎西2丁目4番12号 梅
田センタービル Osaka (JP).

(72) 発明者; および

(75) 発明者/出願人(米国についてのみ): 梶原幹央 (KAJIWARA, Mikio) [JP/JP]. 出口良平 (DEGUCHI, Ryohei) [JP/JP]. 野島伸広 (NOJIMA, Nobuhiro) [JP/JP]. 小森啓治 (KOMORI, Keiji) [JP/JP]; 〒592-8331 大阪府堺市築港新町3丁12番地 ダイキン工業株式会社 塚製作所臨海工場内 Osaka (JP). 井田一男 (IDA, Kazuo) [JP/JP]. 平野雅敏 (HIRANO, Masatoshi) [JP/JP]; 〒525-0044 滋賀県草津市岡本町字大谷1000番地の2 ダイキン工業株式会社 滋賀製作所内 Shiga (JP).

(74) 代理人: 青山 葶, 外 (AOYAMA, Tamotsu et al.); 〒540-0001 大阪府大阪市中央区城見1丁目3番7号 IMPビル 青山特許事務所 Osaka (JP).


(81) 指定国(国内): AU, CN, KR, SG, US.

(84) 指定国(広域): ヨーロッパ特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

/統葉有]

(54) Title: HIGH-PRESSURE DOME TYPE COMPRESSOR

(54) 発明の名称: 高圧ドーム型圧縮機

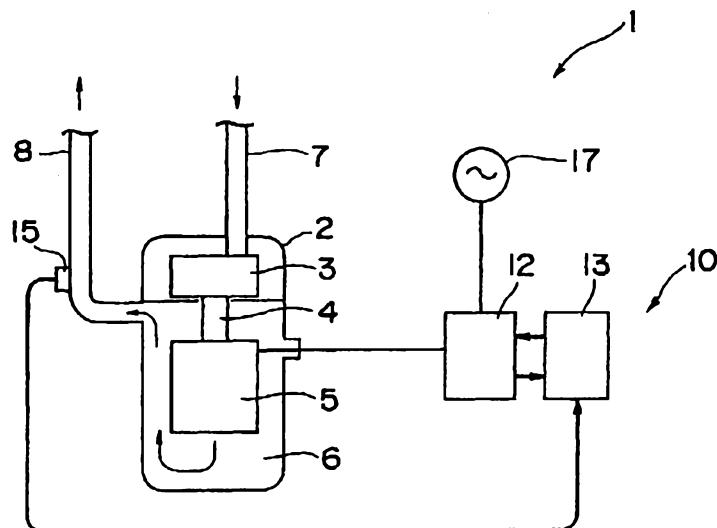

(57) Abstract: A high-pressure dome type compressor (1) capable of providing a stable performance, comprising a compressive element (3) and a DC motor with rare-earth magnet (5) driving the compressive element (3) stored in a casing (2), the motor (5) being disposed in a high-pressure part (6) heated and pressurized by exhaust gases, having a permanent magnet of rare-earth, iron, and boron base with a natural coercive force of $1.7 \text{ MA} \cdot \text{m}^{-1}$ or more on a rotor thereof, and providing a rated output of 1.9 kW or more, wherein an inverter (10) controls a current to the motor (5) so that the temperature of the motor (5) becomes a specified temperature or below and that an opposing magnetic field produced in the stator of the motor (5) becomes a specified intensity or below, whereby, because the rare-earth magnet of the motor is not heated to a high temperature and not exposed to an intense opposing magnetic field, the magnet is difficult to be demagnetized, and thus the performance of the motor (5) as well as that of the high-pressure dome type compressor (1) are stabilized.

/統葉有]

WO 01/75307 A1

HIGH-PRESSURE DOME TYPE COMPRESSOR

TECHNICAL FIELD

5 [0001] The present invention relates to a high-pressure dome type compressor comprising a motor using a rare earth magnet.

BACKGROUND ART

10 [0002] Conventional compressors for a refrigerant unit include a high-pressure dome type compressor comprising a compression element and a motor for driving the compression element in a casing. The motor of this high-pressure dome type compressor is disposed in a high pressure area filled with gas discharged from the compression element in the 15 casing. The motor is a dc (direct current) motor driven under control of an inverter. A permanent magnet of a rotor of the motor is composed of a ferrite magnet having a great intrinsic coercive force.

20 [0003] However, since the ferrite magnet has a relatively little magnetic force, a large permanent magnet is required in order to increase output of the motor. Therefore, the rotor is upsized and thus the motor is upsized. Consequently, a problem arises that the compressor is upsized since the motor is upsized to 25 increase output of the compressor.

[0004] Then, a high-pressure dome type compressor which could be downsized even with high output by using a rare earth magnet having a great magnetic force as a permanent magnet for a rotor of a motor was proposed recently.

5 [0005] In the high-pressure dome type compressor, however, the rare earth magnet is demagnetized due to heat generated by the motor or compression heat from a refrigerant, thereby degrading performance of the motor since the rare earth magnet used for the rotor of the motor
10 is demagnetized with a temperature rise. Also, after a certain limit is exceeded, irreversible demagnetization occurs and the magnetic force is lost and thereby functions of the motor are lost. Furthermore, the rare earth magnet is demagnetized even when an opposing magnetic field is
15 received. Therefore, when a current flowing in the motor increases, the rare earth magnet for the rotor is demagnetized by an opposing magnetic field generated in a stator of the motor, thereby degrading performance of the motor. Thus, a problem arises that a rare earth magnet
20 cannot be used in a large-sized high-pressure dome type compressor with high output. More specifically, a motor having a rare earth magnet cannot be used in a high-pressure dome type compressor which uses R32 as a refrigerant and has a motor with a rated output of 1.9 kW
25 or higher.

DISCLOSURE OF THE INVENTION

[0006] Accordingly, an object of the present invention is to provide a small-sized high-pressure dome type compressor with high output which has stable performance 5 without causing irreversible demagnetization in a rare earth magnet even when the rare earth magnet is used for a motor.

[0007] Another object of the present invention is to provide a small-sized high-pressure dome type compressor 10 with high output which has stable performance without causing irreversible demagnetization in a rare earth magnet even when used in a refrigerant unit using R32, as a refrigerant, which obtains a high temperature when compressed.

[0008] In order to achieve the aforementioned objects, there is provided a high-pressure dome type compressor comprising a compression element and a motor for driving the compression element in a casing, the motor being disposed in a high pressure area filled with a gas 20 discharged from the compression element in the casing, characterized in that:

the motor has a rated output of 1.9 kW or higher;
and

a rotor of the motor includes a rare earth/iron/boron permanent magnet having an intrinsic coercive force of 1.7 MA/m^{-1} or greater.

[0009] In the above high-pressure dome type compressor, 5 since the rare earth/iron/boron permanent magnet provided to the rotor of the motor has an intrinsic coercive force of 1.7 MA/m^{-1} or greater, the permanent magnet is hardly demagnetized and no irreversible demagnetization occurs even in the high-pressure dome type compressor, which 10 obtains a relatively high temperature. Furthermore, the permanent magnet is hardly demagnetized and no irreversible demagnetization occurs in the motor having a rated output of 1.9 kW or higher and a relatively strong opposing magnetic field generated in a stator of the motor as well. 15 Therefore, the motor using the rare earth/iron/boron permanent magnet has higher output and a smaller size as well as more stable performance than a conventional motor using a ferrite permanent magnet. Thus, the high-pressure dome type compressor provided with the motor has high 20 output and a small size and that performance of the high-pressure dome type compressor becomes stable.

[0010] In one embodiment, the high-pressure dome type compressor further comprises:

25 a temperature sensor for detecting a temperature of the motor; and

first control means for, upon receipt of a signal from the temperature sensor, controlling a current to be supplied to the motor such that the temperature of the motor becomes equal to a predetermined temperature or 5 lower.

[0011] In the above high-pressure dome type compressor, the sensor detects the temperature of the motor having the rare earth/iron/boron permanent magnet and notifies the temperature to the first control means. This first control 10 means reduces the current to be supplied to the motor and reduces the number of revolutions of the motor when the temperature of the motor is higher than the predetermined temperature. Consequently, heat generated by the motor is reduced and the temperature of the motor lowers. As a 15 result, demagnetization of the rare earth/iron/boron permanent magnet provided to the motor is prevented.

[0012] In one embodiment, the high-pressure dome type compressor further comprises:

20 current detecting means for detecting a current flowing in the motor;

second control means for receiving a signal from the current detecting means and controlling a current to be supplied to the motor such that an opposing magnetic field generated in the motor becomes equal to a predetermined strength or less.



[0013] In the above high-pressure dome type compressor, the current detecting means detects a value of the current supplied to the motor having the rare earth/iron/boron permanent magnet and notifies the value to the second control means. This second control means calculates strength of an opposing magnetic field generated in the motor based on the value of the current to be supplied to the motor. When the strength of this opposing magnetic field is greater than the predetermined value, the second control means reduces the current to be supplied to the motor and weakens the strength of the opposing magnetic field in the motor. Therefore, demagnetization of the rare earth/iron/boron permanent magnet provided to the motor is prevented.

[0014] In one embodiment, a discharge pipe for discharging the discharged gas from the casing is disposed on a side of the motor opposite from the compression element.

[0015] In the above high-pressure dome type compressor, since the compression element is disposed on one side of the motor and the discharge pipe is disposed on the other side, the discharged gas compressed by the compression element passes through the motor disposed in the high pressure area filled with this discharged gas and then discharged from the discharge pipe to the outside of the

casing. Therefore, the motor is cooled by the discharged gas and thereby demagnetization of the rare earth/iron/boron permanent magnet provided to the motor is prevented.

5 [0016] In one embodiment, a discharge pipe is communicated with the high pressure area between the compression element and the motor, while the gas discharged from the compression element passes through a path in a crank shaft and is discharged to the high pressure area on 10 a side of the motor opposite from the compression element.

[0017] In the above high-pressure dome type compressor, after the discharged gas from the compression element passes through the path in the crank shaft and is discharged to the high pressure area on the side of the 15 motor opposite from the compression element, the discharged gas passes through the motor and is discharged from the discharge pipe to the outside of the casing. Therefore, the motor is cooled by the discharged gas and thereby demagnetization of the rare earth/iron/boron permanent 20 magnet provided to the motor is prevented.

[0018] In one embodiment, the permanent magnet for the rotor of the motor is coated with aluminium.

[0019] In the above high-pressure dome type compressor, since the permanent magnet for the rotor of the motor is coated with aluminium, the permanent magnet does not become



rusty even in the high pressure area of the high-pressure dome type compressor having a relatively high temperature. Since the refrigerant gas does not flow into the permanent magnet, deterioration by the refrigerant is also prevented.

5 Further, when the high-pressure dome type compressor is used for a refrigerant unit using R32 as a refrigerant, the permanent magnet is not attacked by the R32 due to the aluminium coating. Therefore, performance of the motor is maintained and performance of the high-pressure dome type 10 compressor becomes stable.

[0020] In one embodiment, a refrigerant unit comprises the high-pressure dome type compressor of the present invention and uses R32 as a refrigerant.

[0021] In the above refrigerant unit, even though R32, 15 which is compressed in the high-pressure dome type compressor and obtains a high temperature, is used as the refrigerant, the rare earth/iron/boron permanent magnet of the motor provided to this high-pressure dome type compressor is hardly demagnetized since this high-pressure dome type compressor is provided. Therefore, the motor has 20 a small size and high output as well as stable performance. As a result, the high-pressure dome type compressor provided with the motor has a small size and high output as well as stable performance. Thus, performance of the



refrigerant unit provided with the high-pressure dome type compressor becomes stable.

BRIEF DESCRIPTION OF THE DRAWINGS

5 [0022] Fig. 1 is a schematic view showing a high-pressure dome type compressor according to an embodiment of the invention;

10 [0023] Fig. 2 is a detailed cross sectional view showing the inside of a casing of the high-pressure dome type compressor shown in Fig. 1;

[0024] Fig. 3 is a perspective view showing a rotor of a motor provided to the high-pressure dome type compressor shown in Fig. 2;

15 [0025] Fig. 4 is a cross sectional view showing a high-pressure dome type compressor according to another embodiment of the invention; and

[0026] Fig. 5 shows a refrigerant unit comprising the high-pressure dome type compressor shown in Fig. 1.

20 BEST MODE FOR CARRYING OUT THE INVENTION


[0027] The present invention will be described below in detail with reference to embodiments shown in the drawings.

[0028] Fig. 1 is a schematic view showing a high-pressure dome type compressor according to the present invention. This high-pressure dome type compressor 1 is

provided with a compression element 3 and a DC motor 5 driving the compression element 3 via a crank shaft 4 in a casing 2. This motor 5 is disposed in a high pressure area 6 filled with a discharged gas compressed by the 5 compression element 3 in the casing 2.

[0029] The high-pressure dome type compressor 1 is also provided with a suction pipe 7 communicated with the compression element 3 and a discharge pipe 8 communicated with the high pressure area. As shown in Fig. 5, this 10 high-pressure dome type compressor 1 is successively connected to a four-way switching valve 31, outdoor heat exchanger 32, expansion mechanism 33 and indoor heat exchanger 34 to constitute a refrigerant unit 36 according to the present invention. This refrigerant unit 36 uses 15 R32 as a refrigerant.

[0030] Furthermore, the high-pressure dome type compressor 1 has an inverter 10 as first and second control means for controlling a current to be supplied to the motor 5. This inverter 10 is composed of an inverter unit 12 and 20 a control unit 13. The inverter unit 12 converts input power from an ac power supply 17 to dc power in response to a command from the control unit 13 and then converts to a signal having a predetermined duty factor in a predetermined frequency and outputs the signal. The control unit 13 receives output from a temperature sensor



15 for detecting a temperature of the discharge pipe 8 and controls output current from the inverter unit 12.

[0031] Fig. 2 is a detailed cross sectional view showing the inside of the casing 2 of the high-pressure dome type 5 compressor 1. Portions having the same functions as those shown in Fig. 1 are designated by the same reference numerals. The high-pressure dome type compressor is provided a scroll unit 3 as a compression element and a motor 5 driving the scroll unit 3 via a crank shaft 4 in 10 the casing 2. This motor 5 is disposed in a high pressure area 6 filled with a discharged gas compressed in the scroll unit 3.

[0032] The scroll unit 3 is composed of a fixed scroll 3a and a turning scroll 3b. The turning scroll 3b is 15 connected to the crank shaft 4 without being co-axial with the center of the crank shaft 4. A path 21 for guiding a discharged gas compressed in the scroll unit 3 from the scroll unit 3 to below the motor 5 is provided in this crank shaft 4.

[0033] The motor 5 is composed of a cylindrical rotor 5a 20 fixed to the crank shaft 4 and a stator 5b disposed in the vicinity of a peripheral surface of this rotor 5b. In the rotor 5a, as shown in Fig. 3, four plate-like rare earth/iron/boron permanent magnets 25, 25, 25, 25 are provided at an angle of 90° to each other surrounding a



shaft hole 24 to which the crank shaft is inserted. The rare earth/iron/boron permanent magnet 25 has an intrinsic coercive force of 1.7 MA/m^{-1} or greater. The motor having the rare earth/iron/boron permanent magnet 25 has a smaller 5 size and higher output than a conventional motor having a ferrite magnet and has a rated output of 1.9 kW or higher. It is noted that the surface of the rare earth/iron/boron permanent magnet 25 is coated with aluminium.

[0034] As shown in Fig. 2, a suction pipe 7 which is 10 communicated with the scroll unit 3 and guides a refrigerant from a evaporator is provided on the top of casing 2. A discharge pipe 8 which is communicated with the high pressure area 6 and discharges the discharged gas to a condenser is provided on the left side of the casing 15 2. Furthermore, a terminal 26 for supplying drive current from the inverter 10 in Fig. 1 to the motor 5 is disposed on the right side of the casing 2.

[0035] In the high-pressure dome type compressor according to the above constitution, the inverter 10 shown 20 in Fig. 1 supplies predetermined current to the motor 5 and the motor 5 rotates the crank shaft 4. Then, the turning scroll 3b connected to the crank shaft 4 is rotated without being co-axial with the crank shaft 4 and the scroll unit 3 performs compression operation. That is, a refrigerant gas 25 which composed of R32 and guided from the evaporator to the

scroll unit 3 through the suction pipe 7 is compressed in the scroll unit 3 and discharged through the path 21 in the crank shaft 4 to below the motor 5. As shown in Fig. 2, this discharged gas discharged to below the motor 5 is 5 discharged from a discharge pipe 8 disposed on the left side of the casing 2 between the motor 5 and the scroll unit 3 to the condenser. At this time, as shown by arrow A, the discharged gas passes between the motor 5 and casing 2 and between rotor 5a and stator 5b of the motor 5. 10 Consequently, the motor 5 is cooled by the discharged gas. Therefore, since the rare earth/iron/boron permanent magnets 25, 25, 25, 25 provided to the rotor 5a of the motor 5 do not obtain an abnormally high temperature, the magnets are hardly demagnetized. As a result, performance 15 of the motor 5 is maintained and performance of the high-pressure dome type compressor 1 becomes stable.

[0036] When the high-pressure dome type compressor 1 is continuously operated for a long time, the motor 5 may be heated and the temperature may become equal to a 20 predetermined temperature or higher. In this case, the temperature sensor 15 provided to the discharge pipe 8 shown in Fig. 1 detects the temperature rise of the motor 5 by detecting the temperature rise of the discharged gas and sends a signal to the control unit 13 of the inverter 10. The control unit 13 receiving the signal from the



temperature sensor 15 performs drooping control to reduce output current of the inverter unit 12, thereby reducing the number of revolutions of the motor 5. Then, when heat generated by the motor 5 is reduced and the temperature 5 detected by the temperature sensor 15 lowers to the predetermined temperature, the control unit 13 recovers the output of the inverter unit 12 to a normal value. Thus, heat generated by the motor 5 is reduced by controlling a current to be supplied to the motor 5 such that a 10 temperature of the motor 5 does not exceed a predetermined temperature obtained from a demagnetizing characteristic with respect to a temperature of the rare earth/iron/boron permanent magnet 25. As a result, since the rare earth/iron/boron permanent magnet 25 is hardly demagnetized 15 and is not in a temperature range causing irreversible demagnetization, performance of the motor 5 becomes stable. Thus, performance of the high-pressure dome type compressor 1 provided with this motor 5 becomes stable.

[0037] Also, since this high-pressure dome type 20 compressor 1 is provided in a refrigerant unit 36 using R32 as a refrigerant, a discharged gas composed of R32 which is compressed in the scroll unit 3 and filled in the high pressure area 6 has a higher temperature than in a case where, for example, CFC (chlorofluorocarbon) or the like is used as a conventional refrigerant. However, since the



temperature of the motor 5 is controlled by the inverter unit 10 not to be higher than a predetermined temperature in this high-pressure dome type compressor 1, the rare earth/iron/boron permanent magnet 25 provided to this motor 5 is hardly demagnetized. Therefore, performance of the motor 5 becomes stable, thereby resulting in stable performance of the high-pressure dome type compressor 1.

[0038] In addition, the high pressure area 6 filled with the discharged gas composed of R32 as a refrigerant has the high temperature and further has a small amount of water content. However, since the surface of the rare earth/iron/boron permanent magnet 25 is coated with aluminium, the magnet is not attacked by the R32 and hardly becomes rusty. Therefore, performance of the motor 5 becomes stable.

[0039] Furthermore, due to control by the control unit 13 of the inverter 10, an opposing magnetic field equals to or greater than a predetermined strength obtained from a demagnetizing characteristic with respect to an opposing magnetic field in the rare earth/iron/boron permanent magnet 25 is not generated in the stator 5b of the motor 5. That is, the control unit 13 receives a value of current to be supplied from the inverter unit 12 to the motor 5 and calculates strength of the opposing magnetic field to be generated by this current in the stator 5b of the motor 5.



If the current to be supplied to the motor 5 exceeds the predetermined quantity and the opposing magnetic field of the stator 5b exceeds the predetermined strength, the control unit 13 controls output current from the inverter unit 12 and weakens the opposing magnetic field in the stator 5b of the motor to the predetermined strength. Thus, since the opposing magnetic field in the stator 5b of the motor does not exceed the predetermined strength by controlling the inverter 10 and thereby demagnetization of the permanent magnet of the motor 5 is prevented, performance of this motor 5 becomes stable and no irreversible demagnetization occurs. Thus, performance of the high-pressure dome type compressor 1 provided with this motor 5 becomes stable.

[0040] Thus, since the high-pressure dome type compressor 1 can obtain stable performance even when a refrigerant composed of R32 is compressed, a refrigerant unit 36 which comprises this high-pressure dome type compressor 1 and uses the refrigerant composed of R32 can obtain stable freezing performance.

[0041] Fig. 4 is a cross sectional view showing a high-pressure dome type compressor according to another embodiment. Portions having the same functions as those of the portions of the high-pressure dome type compressor shown in Fig. 2 are designated by the same reference



numerals. This high-pressure dome type compressor 1 is a long-sideways type scroll compressor, in which a major axis is disposed in a horizontal direction and is used as a compressor of a refrigerant unit using R32 as a
5 refrigerant. This high-pressure dome type compressor 1 houses a scroll unit 3, a crank shaft 4 for driving this scroll unit 3 and a motor 5 for rotating the crank shaft 4 in a casing 2. The motor 5 is disposed in a high pressure area 6 filled with a discharged gas compressed in the
10 scroll unit 3.

15 [0042] Furthermore, the high-pressure dome type compressor 1 comprises the same inverter (not shown) as shown in Fig. 1. This inverter is composed of an inverter unit and control unit. The control unit is connected to a temperature sensor (not shown) provided to a discharge pipe 8 and controls output current from the inverter unit. On the other hand, the inverter unit changes current from an ac power supply (not shown) based on a command from the control unit and supplies the current to the motor 5.

20 [0043] A stator 5a of the motor 5 is provided with a rare earth/iron/boron permanent magnet (not shown) and the intrinsic coercive force of the permanent magnet is 1.7 MA/m^1 or greater. This rare earth/iron/boron permanent magnet is coated with aluminium so as not to become rusty
25 in a relatively humid high pressure area 6 which is filled

with a discharged gas and has a high temperature and not to be attacked by R32. The rated output of the motor 5 is 1.9 kW or higher.

[0044] The R32 as a refrigerant guided from an evaporator via a suction pipe 7 provided on the left side of the casing 2 is guided to and compressed in the scroll unit 3 and then discharged to the high pressure area 6, in which the motor 5 is disposed. This discharged gas passes between the motor 5 and casing 2 and between the rotor 5a and stator 5b of the motor 5, as shown by arrow B, guided to the right side in the casing 2 and discharged to a condenser via a discharge pipe 8. At this time, since the motor 5 is cooled by the discharged gas, the rare earth/iron/boron permanent magnet provided to this motor 5 is hardly demagnetized.

[0045] Furthermore, the inverter (not shown) provided to this high-pressure dome type compressor 1 receives a signal from the temperature sensor, estimates a temperature of the motor 5 and controls current to be supplied to the motor 5 such that the temperature of the motor 5 does not become equal to a predetermined temperature or higher. Therefore, in this high-pressure dome type compressor 1, the rare earth/iron/boron permanent magnet provided to the motor 5 is hardly demagnetized and thereby performance of the motor



5 becomes stable even though R32, which obtains a high temperature as a discharged gas, is used as a refrigerant.

[0046] Furthermore, the inverter receives output from a current sensor (not shown) provided in the inverter unit 5 and calculates strength of an opposing magnetic field to be generated in the stator of the motor 5 based on this output value. Thus, the inverter controls current to be supplied to the motor 5 such that this strength of the opposing magnetic field does not become equal to a predetermined 10 value or greater. Therefore, although this motor has a relatively high rated output and the opposing magnetic field generated in the stator of the motor is relatively strong, the rare earth/iron/boron permanent magnet provided to this motor 5 is hardly demagnetized and performance of 15 the motor 5 becomes stable. As a result, the high-pressure dome type compressor 1 provided with this motor 5 has a small size and high output as well as stable performance.

[0047] Since performance of the high-pressure dome type compressor 1 is stable even when the R32 refrigerant is 20 compressed, a refrigerant unit using the high-pressure dome type compressor 1 as a compressor can obtain stable freezing performance.

[0048] In the high-pressure dome type compressor 1 of the above embodiment, the temperature sensor 15 provided to the discharge pipe 8 detects the temperature of the



discharged gas and estimates the temperature of the motor 5 from this temperature of the discharged gas, but the temperature sensor may be disposed in the casing 2 to directly detect the temperature of the motor 5.

5 [0049] The motor 5 provided to the high-pressure dome type compressor 1 of the above embodiment has the rated output of 1.9 kW, but the motor may have a rated output of 1.9 kW or higher.

10 [0050] The rare earth/iron/boron permanent magnet of the motor 5 provided to the high-pressure dome type compressor 1 has the intrinsic coercive force of 1.7 MA/m^{-1} , but the rare earth/iron/boron permanent magnet having an intrinsic coercive force of 1.7 MA/m^{-1} or greater may be used.

15 [0051] The high-pressure dome type compressor 1 of the above embodiment is a scroll type compressor having the scroll unit 3 as a compression element, but other types such as a swing type compressor provided with a swing unit as a compression element or the like may be used.

20 [0052] The high-pressure dome type compressor 1 of the above embodiment uses an inverter 10, but other control means such as a voltage drooping control device, over current relay or the like may be used.

CLAIMS:

1. A high-pressure dome type compressor comprising a compression element (3) and a motor (5) for driving the compression element (3) in a casing (2), the motor (5) being disposed in a high pressure area (6) filled with a gas discharged from the compression element (3) in the casing (2), characterized in that :

the motor (5) has a rated output of 1.9 kW or higher; and

10 a rotor (5a) of the motor (5) includes a rare earth/iron/boron permanent magnet (25) having an intrinsic coercive force of 1.7 MA/m^{-1} or greater.

2. The high-pressure dome type compressor according to Claim 1, further comprising:

15 a temperature sensor (15) for detecting a temperature of the motor (5); and

first control means for, upon receipt of a signal from the temperature sensor (15), controlling a current to be supplied to the motor (5) such that the temperature of 20 the motor (5) becomes equal to a predetermined temperature or lower.

3. The high-pressure dome type compressor according to Claim 1, further comprising:

25 current detecting means for detecting a current flowing in the motor (5);

second control means for receiving a signal from the current detecting means and controlling a current to be supplied to the motor (5) such that an opposing magnetic field generated in the motor (5) becomes equal to a 5 predetermined strength or less.

4. The high-pressure dome type compressor according to Claim 1, wherein

a discharge pipe (8) for discharging the discharged gas from the casing (2) is disposed on a side of 10 the motor (5) opposite from the compression element (3).

5. The high-pressure dome type compressor according to Claim 1, wherein

a discharge pipe (8) is communicated with the high pressure area (6) between the compression element (3) 15 and the motor (5), while the gas discharged from the compression element (3) passes through a path (21) in a crank shaft (4) and is discharged to the high pressure area (6) on a side of the motor (5) opposite from the compression element (3).

20 6. The high-pressure dome type compressor according to Claim 1, wherein

the permanent magnet (25) for the rotor (5a) of the motor (5) is coated with aluminium.

7. A refrigerant unit comprising the high-pressure dome type compressor according to Claim 1 and using R32 as a refrigerant.


ABSTRACT

There is provided a high-pressure dome type compressor which comprises a motor using a rare earth magnet and has stable performance. There are provided a 5 compression element 3 and a DC motor 5 for driving the compression element 3 in a casing 2. The motor 5 is disposed in a high pressure area 6, which obtains a high temperature and high pressure due to a discharged gas. The motor 5 includes a rare earth/iron/boron permanent magnet 10 having an intrinsic coercive force of 1.7 MA/m^{-1} or greater in a rotor and has a rated output of 1.9 kW or higher. An inverter 10 controls a current to be supplied to the motor 5 such that a temperature of the motor 5 becomes equal to a predetermined temperature or lower and that an opposing 15 magnetic field generated in a stator of the motor 5 has a predetermined strength or less. Therefore, since the rare earth magnet of the motor 5 does not obtain a high temperature and is not exposed to a strong opposing magnetic field, the magnet is hardly demagnetized. Thus, 20 performance of the motor 5 and further performance of the high-pressure dome type compressor 1 become stable.




1/5

Fig. 1

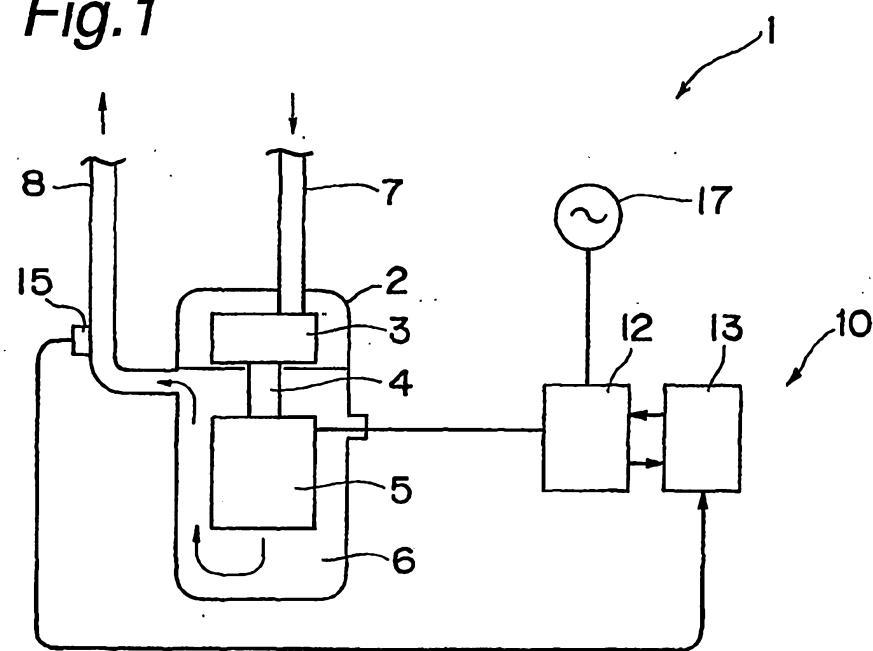


2/5

Fig.2

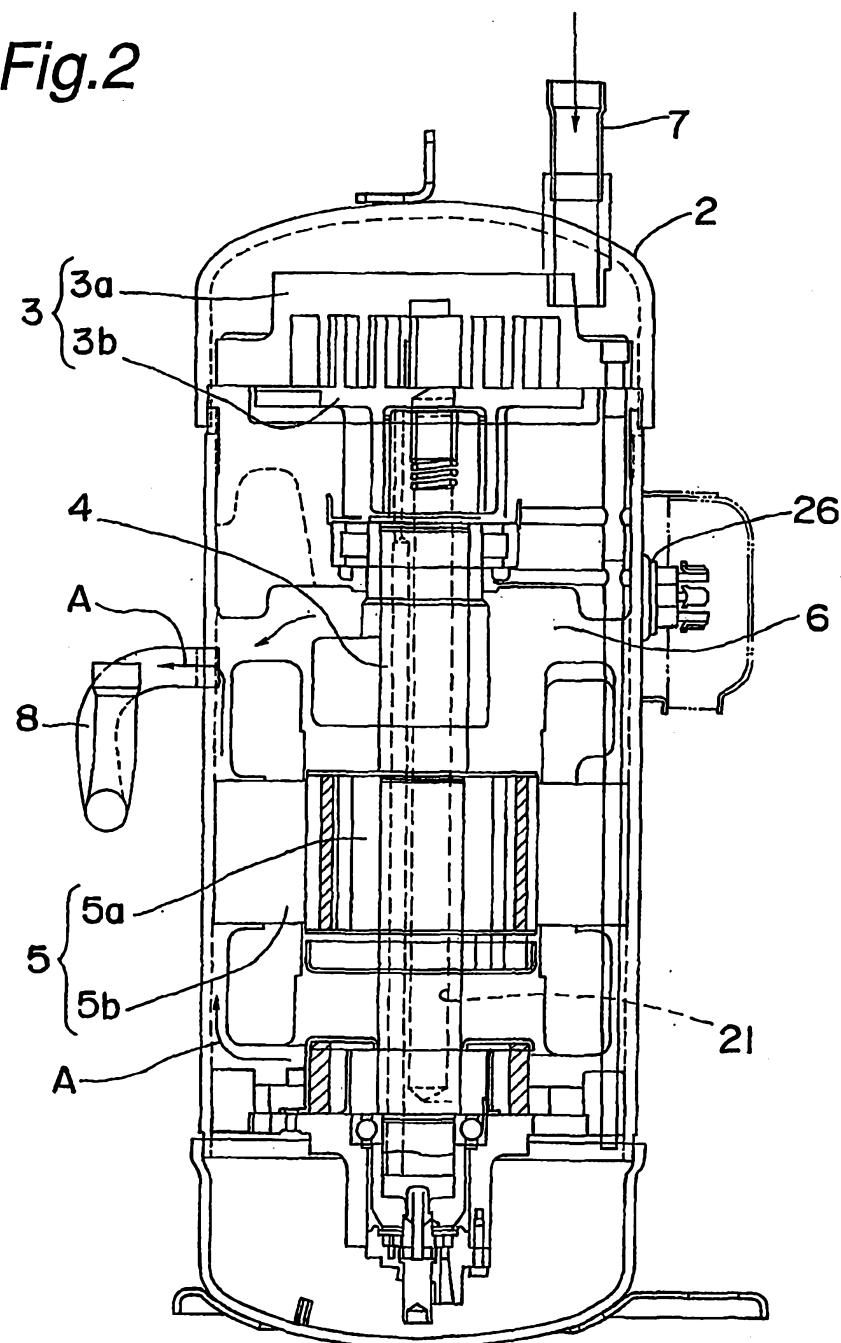


3/5

Fig.3

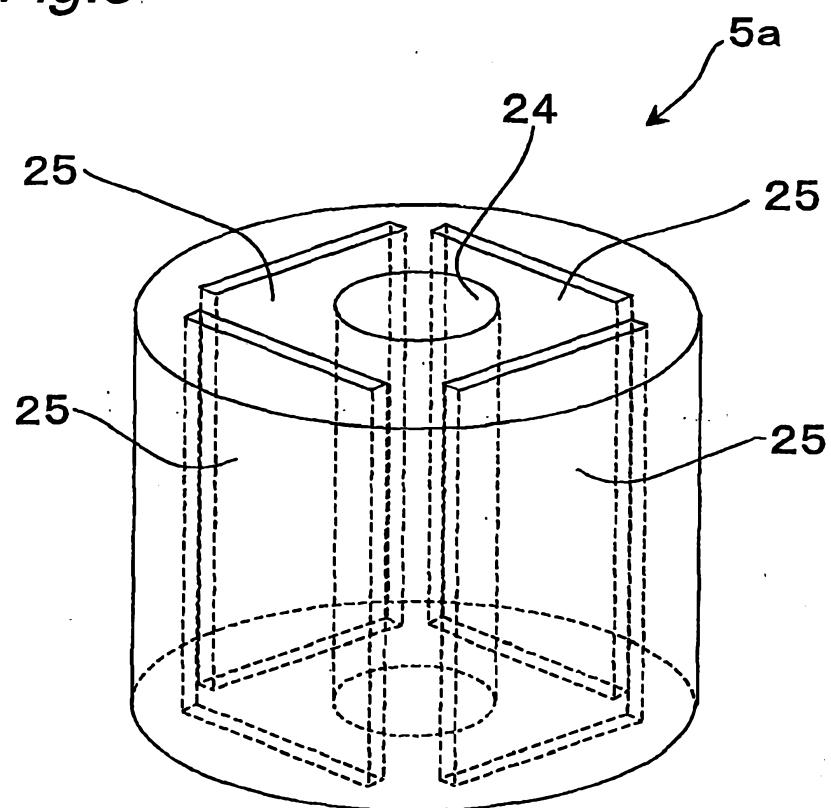

4/5

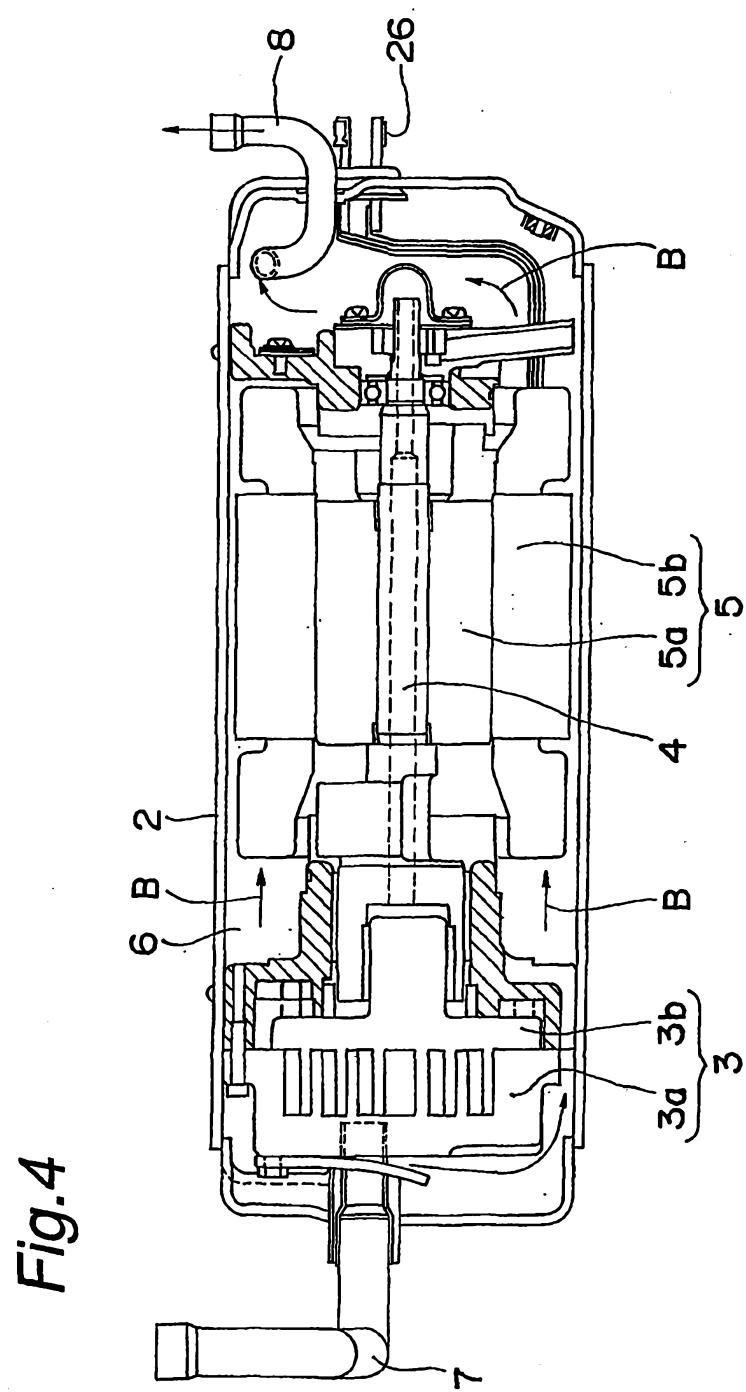

5/5

Fig.5

