




(86) Date de dépôt PCT/PCT Filing Date: 2011/06/01  
(87) Date publication PCT/PCT Publication Date: 2011/12/22  
(45) Date de délivrance/Issue Date: 2016/10/25  
(85) Entrée phase nationale/National Entry: 2012/12/18  
(86) N° demande PCT/PCT Application No.: GB 2011/051031  
(87) N° publication PCT/PCT Publication No.: 2011/158013  
(30) Priorité/Priority: 2010/06/18 (GB1010207.7)

(51) CI.Int./Int.Cl. **F41G 1/00** (2006.01),  
**F41G 11/00** (2006.01), **F41G 3/00** (2006.01),  
**F41J 5/00** (2006.01), **G03B 13/02** (2006.01)  
(72) Inventeurs/Inventors:  
CRAVEN, DAVID, GB;  
CRAVEN, PHILIP, GB  
(73) Propriétaire/Owner:  
NITESITE LIMITED, GB  
(74) Agent: BENOIT & COTE INC.

(54) Titre : APPAREIL DE VISEE  
(54) Title: A VIEWING APPARATUS

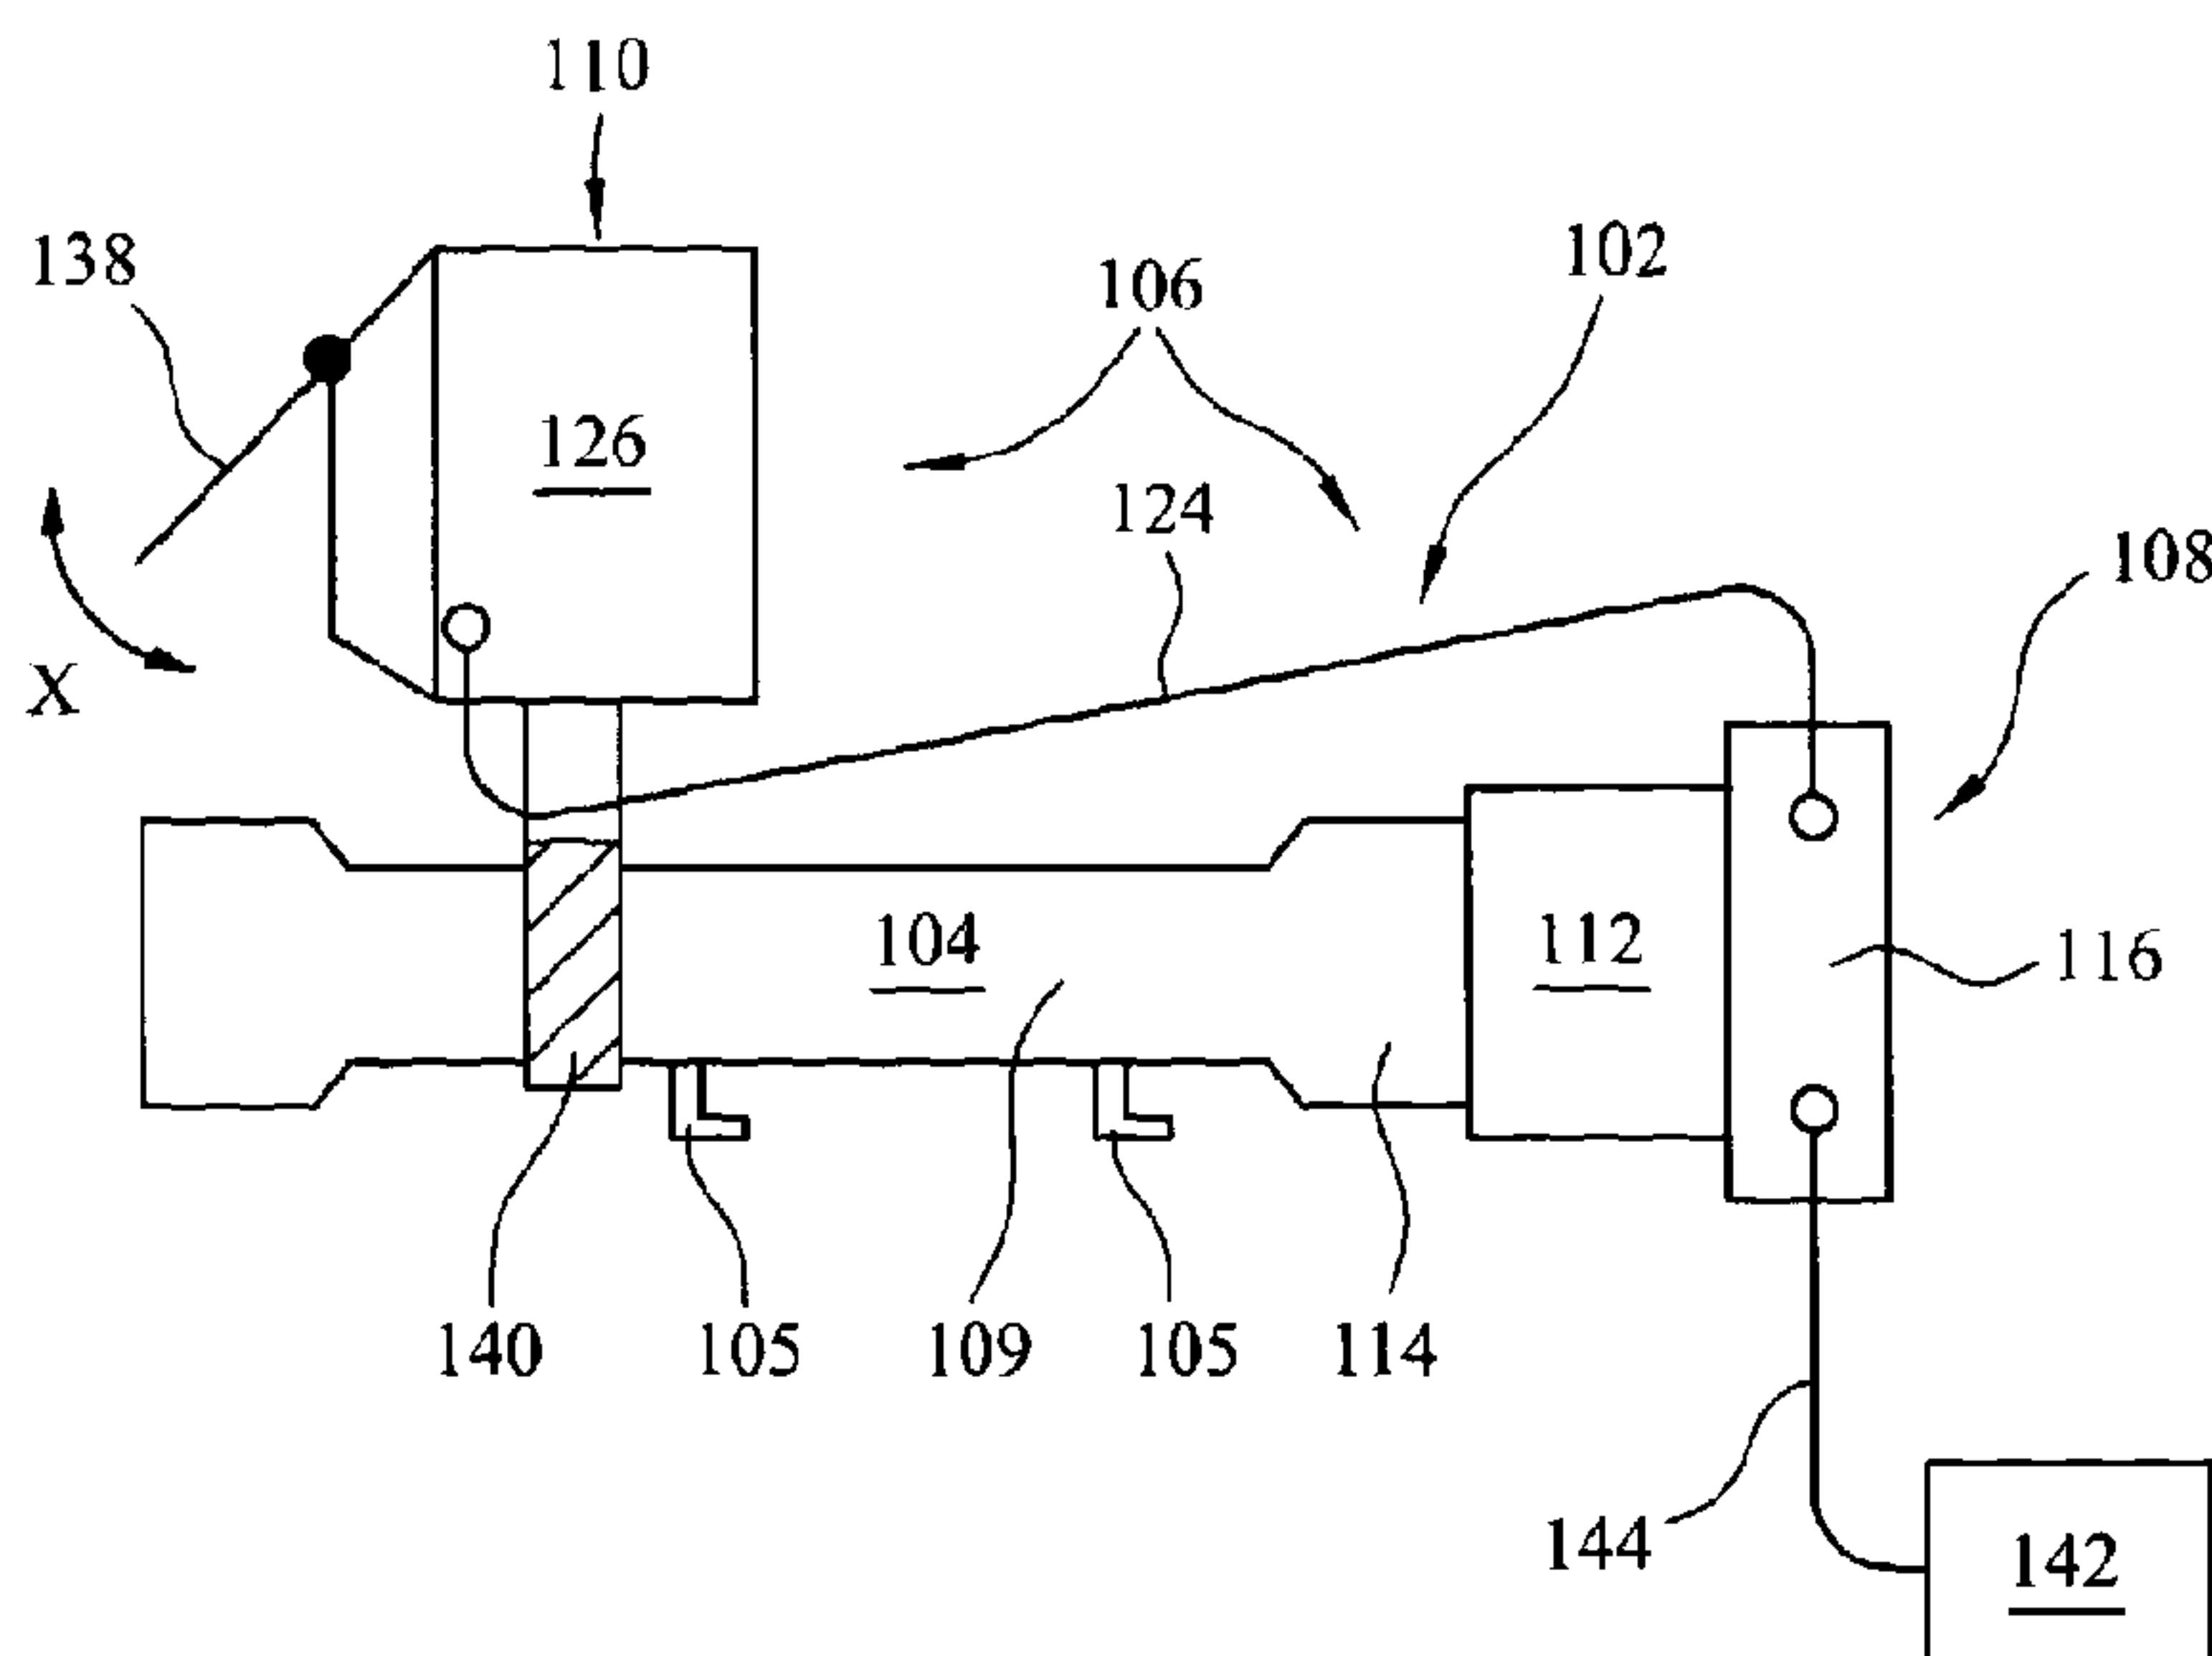

(57) Abrégé/Abstract:

A viewing apparatus (106) for a rifle scope (104), the viewing apparatus comprising a camera unit (108) having a camera and attachment means operable to attach the camera unit to a rifle scope such that the camera is exposed to an image visible at an eyepiece of a rifle scope, the camera being adapted to generate image data from the image to which it is exposed, the camera unit being arranged and operable to transfer the image data from the camera to a display unit (110), the display unit comprising display means being arranged and operable to display the image data received from the camera unit, the display unit further comprising attachment means (140) operable to attach the display unit to a rifle scope.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
22 December 2011 (22.12.2011)(10) International Publication Number  
WO 2011/158013 A1(51) International Patent Classification:  
*F41G 1/00* (2006.01)      *F41J 5/00* (2006.01)  
*F41G 3/00* (2006.01)      *G03B 13/02* (2006.01)  
*F41G 11/00* (2006.01)(21) International Application Number:  
PCT/GB2011/051031(22) International Filing Date:  
1 June 2011 (01.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
1010207.7      18 June 2010 (18.06.2010)      GB

(72) Inventors; and

(71) Applicants : CRAVEN, David [GB/GB]; 33 Intake Lane, Dunnington, York, Yorkshire YO19 5NX (GB). CRAVEN, Philip [GB/GB]; 58 Alness Drive, Woodthorpe, York, Yorkshire YO24 2XZ (GB).

(74) Agent: APPLEYARD LEES; 15 Clare Road, Halifax, Yorkshire HX1 2HY (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A VIEWING APPARATUS

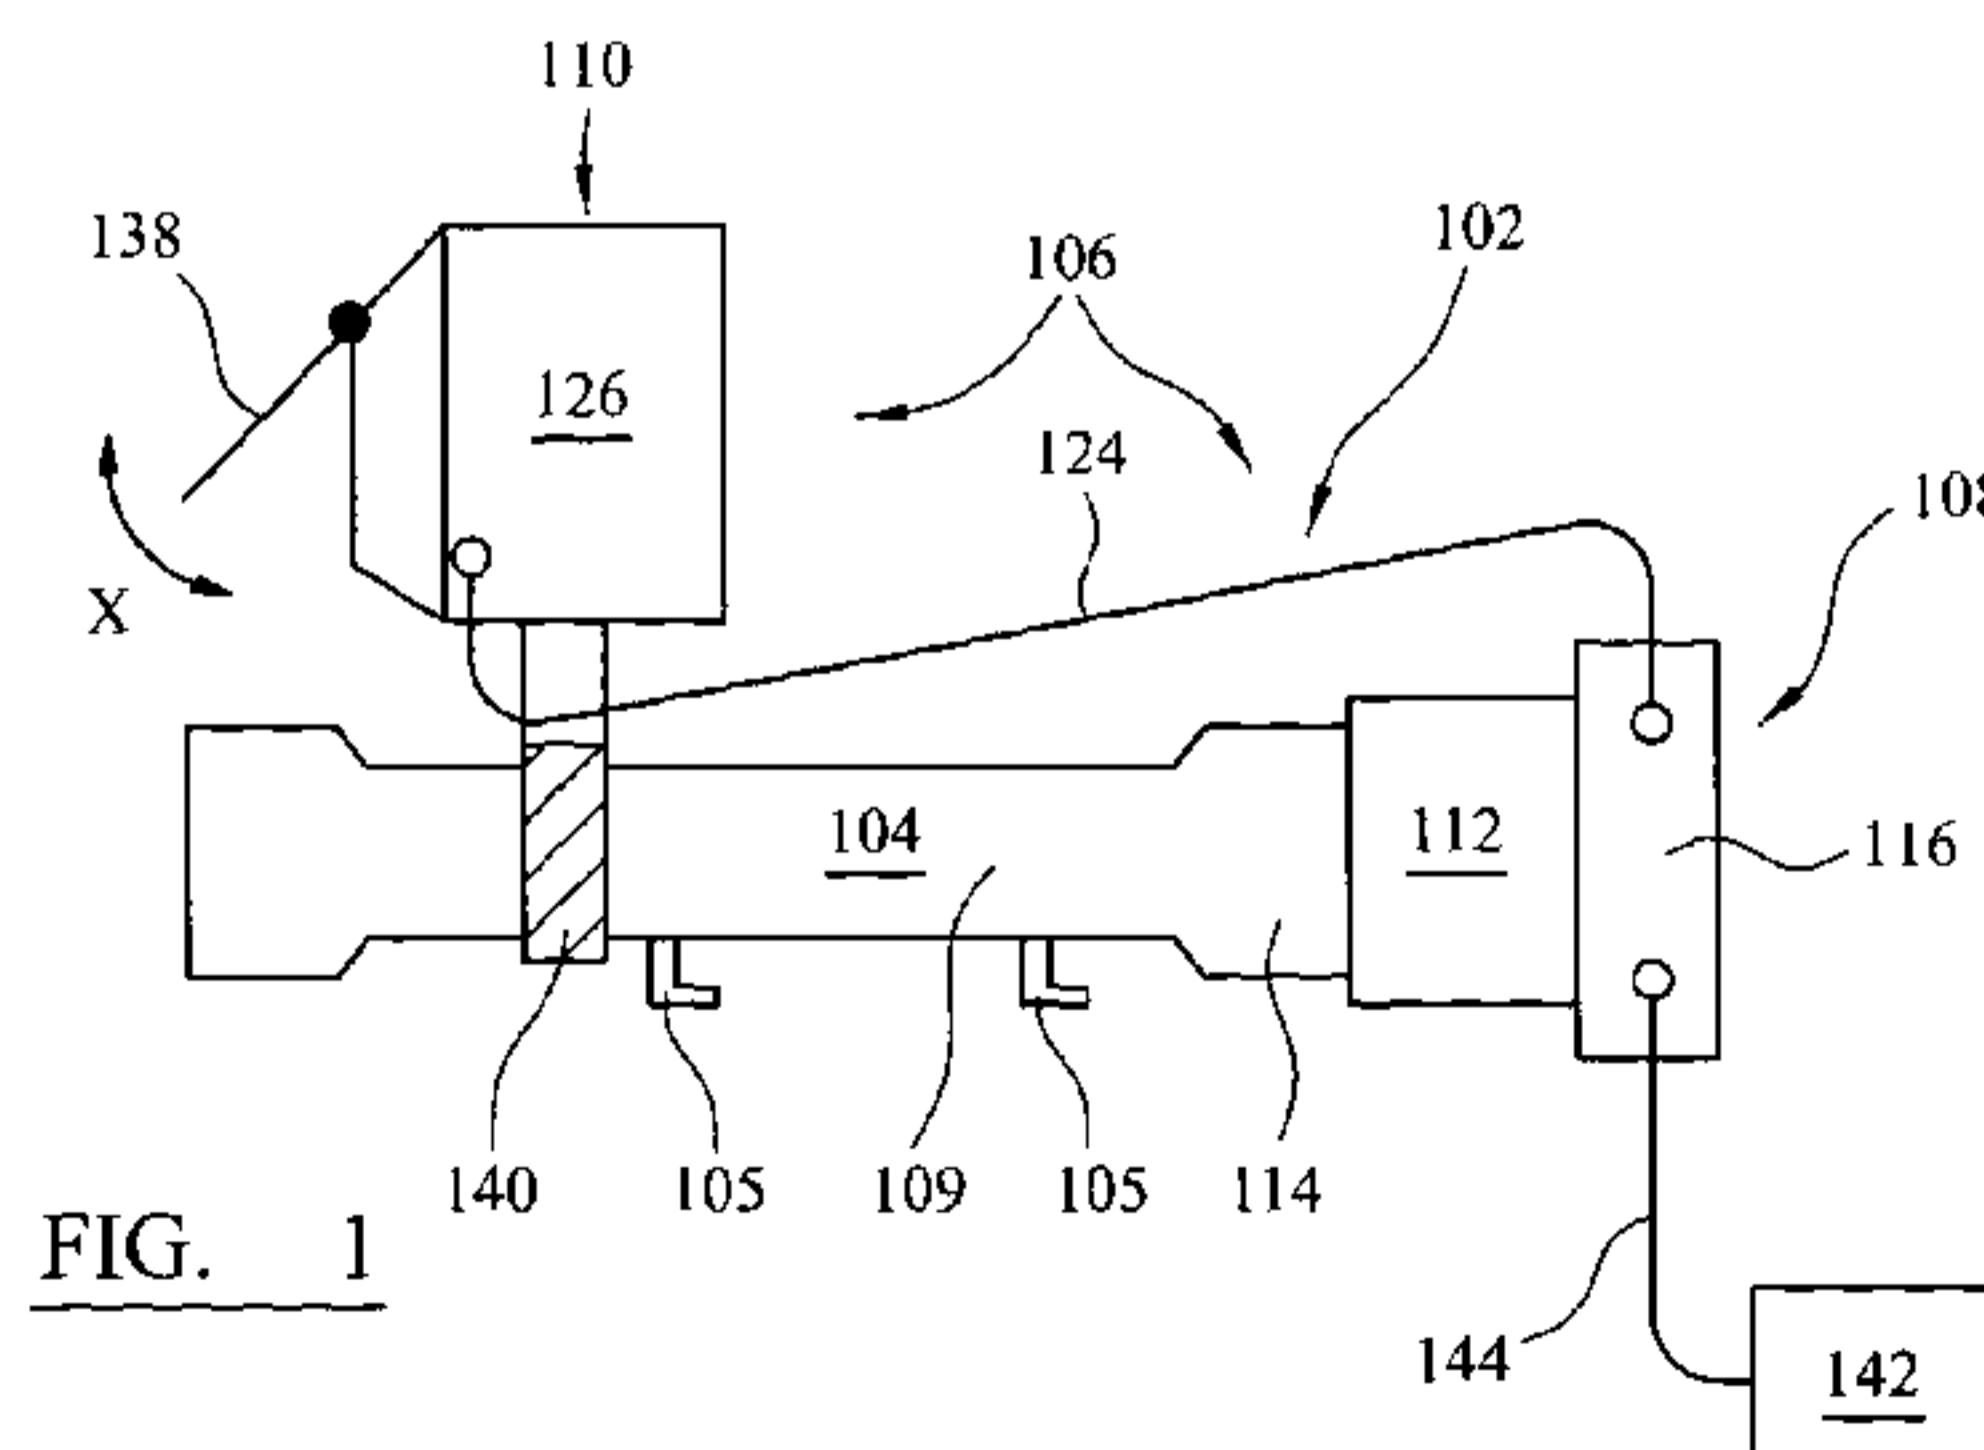

(57) Abstract: A viewing apparatus (106) for a rifle scope (104), the viewing apparatus comprising a camera unit (108) having a camera and attachment means operable to attach the camera unit to a rifle scope such that the camera is exposed to an image visible at an eyepiece of a rifle scope, the camera being adapted to generate image data from the image to which it is exposed, the camera unit being arranged and operable to transfer the image data from the camera to a display unit (110), the display unit comprising display means being arranged and operable to display the image data received from the camera unit, the display unit further comprising attachment means (140) operable to attach the display unit to a rifle scope.

WO 2011/158013 A1

## A Viewing Apparatus

The present invention relates to a viewing apparatus for a rifle scope and a rifle scope assembly comprising the viewing apparatus.

5

Rifle scopes are well known in the art and in their simplest form comprise a scope tube having a magnifying lens toward a first end and an eyepiece at a second end through which a user looks. In use, the tube of the rifle scope is aligned with a barrel of the rifle to allow a user to see, via the eyepiece and lens, a magnified view of where 10 the rifle is aimed, thereby allowing for increased accuracy in shooting the rifle. The scope often comprises a reticle or "crosshairs" to indicate to a user the exact point where the rifle is aimed.

Rifles are often required to be used in conditions of low ambient light. This is 15 particularly the case where the rifle is used for vermin control of predominantly nocturnal animals, such as rats. A more complicated scope assembly, particularly useful in low ambient light situations, may comprise infrared viewing technology, known as "night vision". In such technology, the scope is fitted with an infrared illuminator and an image intensifying tube to intensify the detected infrared light. This 20 allows a user to look down the scope and see an image intensified by the intensifying tube, which appears to a user as an illuminated view of an apparently dark scene.

However, while such a night vision system may be used in conditions of low ambient light, this system has several significant drawbacks. Firstly, such a system is very 25 difficult to install and calibrate on a rifle, not least of all because calibration is required to be undertaken in conditions of high ambient light, which can irreparably damage the intensifying tube. Also, since a user may wish to use the night vision scope alternatively with a conventional ambient light scope, it is necessary to switch rifle scopes, thereby requiring a user to undergo installation and recalibration every time 30 the alternative scope is fitted. A further drawback is that night vision systems are very costly.

It is an object of aspects of the present invention to provide a solution to the above mentioned or other problems.

According to a first aspect of the present invention there is provided a viewing apparatus for a rifle scope, the viewing apparatus comprising a camera unit having a camera and attachment means operable to attach the camera unit to a rifle scope such that the camera is exposed to an image visible at an eyepiece of a rifle scope,

5 the camera being adapted to generate image data from the image to which it is exposed, the camera unit being arranged and operable to transfer the image data from the camera to a display unit, the display unit comprising display means being arranged and operable to display the image data received from the camera unit, the display unit further comprising attachment means operable to attach the display unit to

10 a rifle scope.

Preferably, the attachment means of the camera unit is operable to attach the camera unit over an eyepiece of a rifle scope. Preferably, the attachment means of the camera unit comprises a gaiter operable to fit over an eyepiece of a rifle scope.

15 Preferably, the camera unit comprises a housing unit in which the camera is housed. Preferably, the camera unit is arranged and operable to fit over an eyepiece of a rifle scope such that the camera is aimed down a tube of a rifle scope.

Preferably, the camera is an infrared camera. By the term "infrared camera" it is

20 meant a camera that is sensitive to infrared light.

The camera is preferably arranged and operable to relay an image detected at an eyepiece of a rifle scope to the display unit. Preferably, the camera is operable to generate dynamic image data. In other words, preferably the image data is not static

25 imagery, but a live feed of moving imagery viewed by the camera.

Preferably, the viewing apparatus comprises means to allow the image data to be recorded by an image recording device. The means may comprise an interface which may be a wired or wireless interface. The interface may comprise a socket into which

30 a recording device may be plugged. The socket may be a 3.5mm jack socket, for example. Accordingly, in one embodiment, the viewing apparatus comprises a video output socket. The means to allow the image data to be recorded by an image recording device may be situated on the camera unit or the display unit. The means to allow the image data to be recorded by an image recording device is operable to

35 allow the output of dynamic image data.

Preferably, the display unit comprises a screen.

Preferably, the attachment means of the display unit is arranged to allow attachment

of the display unit above a rifle scope in use, preferably above a scope tube thereof,

5 preferably toward an end thereof distal to an eyepiece.

Preferably, the viewing apparatus further comprises illumination means. The

illumination means may comprise infrared illumination means. The illumination means

may comprise a plurality of infrared emitting bulbs.

10

By the term "infrared illumination means" it is meant a device operable to emit infrared light.

In one embodiment, the illumination means may be integral with the display unit.

15 Preferably, the illumination means is housed in the display unit, preferably in a face thereof, which face is preferably generally opposite a face in which the screen is housed.

The viewing apparatus may comprise illumination varying means, operable to vary the

20 intensity of the illumination means, in use. The illumination varying means may be continuously or discretely variable.

In one embodiment, the illumination varying means may be discretely variable

between a plurality of predetermined intensities. One of the predetermined intensities

25 may be zero, wherein the illumination means is in an "off" state.

The viewing apparatus may comprise means to switch the screen of the display unit between an "on" position and an "off" position.

30 In one embodiment, the means to switch the screen of the display unit between an "on" position and an "off" position may be combined with the illumination varying means. In such an embodiment, the means may comprise a plurality of discrete positions. The means may comprise a rotatable dial, for example. In such an embodiment, the means may comprise a number of discrete modes, as follows: i) screen off, illumination means off; ii) screen on, illumination means off; iii) screen on,

35

illumination means on at a first predetermined intensity; iv) screen on, illumination means on at a second predetermined intensity; etc.

The illumination means may be operable to illuminate to a predetermined distance,  
5 depending on the use of the viewing apparatus. For example, in one embodiment, for a rifle that is designed to shoot a target at about 50 yards, the illumination means may be operable to illuminate to a position about 50 yards away. However, in alternative embodiment, the rifle may be designed to shoot a target at about 200 yards, in which case, the illumination means may be operable to illuminate to a position about 200  
10 yards away

The viewing apparatus may further comprise a power supply, preferably operable to supply power to the camera unit and/or display unit. The power supply may comprise a 12V DC power supply.

15 According to a second aspect of the present invention there is provided a rifle scope assembly comprising a rifle scope having a scope tube comprising an eyepiece, the assembly further comprising a viewing apparatus having a camera unit comprising a camera, the camera unit being attached to the rifle scope via attachment means such  
20 that the camera is exposed to an image visible at the eyepiece of the rifle scope, the camera being adapted to generate image data from the image to which is exposed, the camera unit being arranged and operable to transfer the image data from the camera to the display unit, the assembly further comprising a display unit being attached to the rifle scope via attachment means, the display unit comprising display  
25 means being arranged and operable to display the image data received from the camera unit.

According to a further aspect of the present invention, there is provided a method of shooting a rifle, the method comprising using image data displayed on display means  
30 of a display unit, the display unit being attached to a rifle scope via attachment means, the image data being transferred to the display unit from a camera unit, the camera unit comprising a camera, the camera unit being attached to the rifle scope via attachment means such that the camera is exposed to an image visible at an eyepiece of the rifle scope, the image data being generated by the camera.

According to a further aspect of the present invention there is provided a viewing apparatus kit comprising a camera unit having a camera and attachment means, the attachment means being operable to attach the camera unit to a rifle scope such that the camera is exposed to an image visible at an eyepiece of a rifle scope; the kit 5 further comprising a display unit comprising display means and attachment means operable to attach the display unit to a rifle scope.

The present invention also extends to a rifle fitted with a viewing apparatus or a rifle scope assembly of the first or second aspect. The rifle is preferably an air rifle.

10

The present inventors have also invented a hand held viewing device, which can be used when accompanying a rifle holder for identifying targets, or in other arenas of security and covert viewing.

15

Therefore, according to a further aspect of the present invention there is provided a hand held viewing device comprising a housing, the housing comprising a camera unit, a display unit and infrared illumination means, the display unit being operable to display image data detected by the camera unit, the device further comprising a handle to thereby allow the device to be hand held, in use.

20

Preferably, the camera unit and the display unit are arranged on different faces of the housing, preferably substantially opposite faces of the housing.

25

Preferably, the infrared illumination means are arranged and operable to illuminate an area with infrared light.

Preferably, the camera unit comprises a camera that is preferably operable to detect infra red light.

30

Features of the viewing apparatus described above in relation to the first aspect may be combined with the viewing device of the present aspect.

All of the features contained herein may be combined with any of the above aspects and in any combination.

35

For a better understanding of the invention, and to show how embodiments of the same may be carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings in which:

5 Figure 1 shows a schematic view of a rifle scope assembly;

Figure 2 shows an exploded view of a display unit of a viewing apparatus;

Figure 3 shows a schematic exploded view of a camera unit of a viewing apparatus;

10

Figure 4 shows a schematic perspective view of a hand held viewing device according to the invention; and

15

Figure 5 shows a schematic front view of a hand held viewing device according to the invention..

20

Referring firstly to figure 1 there is shown a rifle scope assembly 102 comprising a rifle scope 104 known in the art, fitted with a viewing apparatus 106 of the invention. The viewing apparatus 106 comprises a camera unit 108 fitted to an end of the rifle scope 104 and a display unit 110 fitted above a tube 109 of the scope 104. The rifle scope 104 comprises securing means 105 operable to allow it to be secured to the barrel of a rifle (not shown).

25

In more detail and referring now also to figures 2 and 3, the camera unit 108 comprises a cylindrical attachment gaiter 112, which is fitted over an eyepiece 114 of the scope 104. At a rear side of the attachment gaiter 112, distal to the eyepiece 114, is a camera housing 116. The camera housing 116 is generally circular in cross section and houses a camera board 120 and a camera board lens inside an alignment tube 122 at a central point therof such that, in the arrangement shown in figure 1, the camera lens 118 is aligned coaxially with a longitudinal axis of the scope 104. In this manner, the camera lens 118 points down the length of the scope 104 and is arranged to detect the view that a user would see when looking down the eyepiece 114 of the scope 104.

30

35 The camera unit 108 communicates data received by the camera (the view from the eyepiece) to the display unit 110 via a cable 124. However, it will be appreciated that

such communication could be wireless. Also, power is transmitted from the camera unit 108 to the display unit 106 via the cable 124.

Referring now to figure 2, the display unit 110 comprises a housing 126 having a 5 circular aperture 128 on one face and a generally rectangular aperture 130 on an opposite face. Into the rectangular aperture 130 is fitted a display screen 132. In a preferred embodiment, the display screen 132 comprises an LCD screen, such as a 3.5 inch LCD colour screen. Into the circular aperture 128 is fitted an illuminator circuit board 134, an illuminator device 136 and a cover 138. The illuminator device 136 10 comprises a plurality of infrared emitting LEDs. The cover 138 is hingably attached to a rim of the circular aperture 128, and operable to move between an open and closed position as indicated by the arrow "X" in figure 1. The cover 138 has a small central aperture 139. The display unit 110 is attached above the rifle scope 104 by a clip 140.

15 The illuminator circuit board 134 comprises a photo cell thereon which is operable to detect the ambient light conditions and switch the illumination device 136 on (in low ambient light conditions) and off (in high ambient light conditions).

The scope assembly 102 also comprises a power source 142 in the form of a battery, 20 which in the present embodiment is a separate unit attached to the camera unit 108 via a power cable 144. In the present embodiment, the power supply 142 is a 12V DC battery having a belt clip to allow a user to attach the device to their belt.

In use, the viewing apparatus operates as follows. A user attaches the viewing 25 apparatus 106 to the scope 104 of their rifle (not shown) by fitting the gaiter 112 of the camera unit 108 over the eyepiece of the rifle scope 104 and attaching the display unit 110 onto the scope 104 at a position above a scope tube of the scope and toward an end thereof distal to the eyepiece. The power supply 142 is attached to the camera unit 108 via cable 144, and cable 124 is attached between the camera unit and the 30 display unit.

The camera 118 is exposed to and detects the view through the eyepiece, which it relays via cable 124 to the display unit 110 and the image produced by the camera 35 118 is reproduced on the screen 132. In this manner, the user is shown on the display screen 132 what is visible through the eyepiece 114 of the scope 104. However, the camera 118 is an infrared camera, and is therefore operable in low light

conditions to provide an improved picture to that visible to the naked eye. Furthermore, in very low light conditions, the illuminator 136 is activated via the photo cell discussed above thus causing infrared light to be emitted, which provides an improved image to the camera (because the camera is able to detect the emitted 5 infrared light). Depending on the ambient light conditions, the cover 138 may be raised or lowered thereby allowing light to exit only by the aperture 139 or entirely by removing the obstacle of the cover 138.

A viewing apparatus according to the present invention has the advantage that it 10 allows a user to view where the rifle is aimed without the need to look down the rifle scope. Furthermore, because the camera is infrared, the device can operate in low light conditions. The provision of an infrared illuminator provides for a yet further advantage in that the viewing device can be used in conditions of very low ambient light.

15

A further particular advantage of the viewing apparatus of the present invention is that it can be retrofitted to an existing rifle scope, thus a user can chose to add the viewing device to their existing scope when required, or shoot without the device in other scenarios. Also, because the camera is arranged to view what a user would see 20 through the eyepiece of the scope of display this view on a display unit, the system has the advantage that the user sees the reticule visible through the scope, which provides for improved accuracy in shooting. Also, the viewing apparatus has the advantage that it does not require a change to the day set-up of a user's rifle scope.

25 Referring now to figures 4 and 5 there is shown a hand held viewing device 202 according to a further aspect of the present invention. The device 202 comprises a housing 204 which comprises a screen 206 on a first face 207 thereof and a camera 208 on a second face 209 thereof, the second face 209 being substantially opposite the first face 207. The screen is operable to produce an image detected by the 30 camera.

As shown in figure 5, surrounding the camera 208 are a number of infrared bulbs 210. Extending downward from the housing 204 is a handle 212.

35 In use, a user holds the device 202 by gripping the handle 212. The user then points the camera 208 at an area to be viewed, thereby causing an image of the area to be

displayed on the screen 206. The infrared bulbs 210 may illuminate the area to be viewed infrared light, which is not perceptible to the human eye, but which can be detected by the camera 208 and shown on the screen 206. This allows an area to be viewed by a user without alerting the target. This is useful when spotting targets, for 5 example vermin, if accompanying a rifle holder. Alternatively, such a device is useful in the security industry where it can be used to allow a user to see into dark areas, without illuminating the areas in a way that is perceptible to the human eye.

Attention is directed to all papers and documents which are filed concurrently with or 10 previous to this specification in connection with this application and which are open to public inspection with this specification.

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, 15 may be combined in any combination, except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification (including any accompanying claims, abstract and drawings) may be replaced by alternative features serving the same, 20 equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of the foregoing embodiment(s). The 25 invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.

## Claims

1. A viewing apparatus for retrofit to a rifle scope, the viewing apparatus comprising a camera unit having a camera and attachment means operable to attach the camera unit to a rifle scope such that the camera is exposed to an image visible at an eyepiece of a rifle scope, the camera being adapted to generate image data from the image to which it is exposed, the camera unit being arranged and operable to transfer the image data from the camera to a display unit, the display unit comprising display means being arranged and operable to display the image data received from the camera unit, the display unit further comprising attachment means operable to attach the display unit to a rifle scope such that the display unit is above the rifle scope, wherein the attachment means of the camera unit is operable to attach the camera unit over an eyepiece of the rifle scope such that the camera is aligned coaxially with a longitudinal axis of the scope.
2. A viewing apparatus for a rifle scope according to claim 1, wherein the attachment means of the camera unit comprises a gaiter operable to fit over an eyepiece of a rifle scope.
3. A viewing apparatus for a rifle scope according to any of claims 1 or 2, wherein the camera unit comprises a housing unit in which the camera is housed.
4. A viewing apparatus for a rifle scope according to any of claims 1 to 3, wherein the camera is an infrared camera.
5. A viewing apparatus for a rifle scope according to any of claims 1 to 4, wherein the camera is preferably arranged and operable to relay an image detected at an eyepiece of a rifle scope to the display unit.
6. A viewing apparatus for a rifle scope according to any of claims 1 to 5, wherein the camera is operable to generate dynamic image data.
7. A viewing apparatus for a rifle scope according to any of claims 1 to 6, wherein the display unit comprises a screen.

8. A viewing apparatus for a rifle scope according to any of claims 1 to 7, wherein the attachment means of the display unit is arranged to allow attachment of the display unit above a scope tube thereof.
- 5 9. A viewing apparatus for a rifle scope according to any of claims 1 to 8, which further comprises illumination means.
- 10 10. A viewing apparatus for a rifle scope according to claim 9, wherein the illumination means comprises infrared illumination means.
- 10 11. A viewing apparatus for a rifle scope according to either of claim 9 or claim 10, wherein the illumination means is integral with the display unit.
- 15 12. A viewing apparatus for a rifle scope according to any of claims 1 to 11, which further comprises a power supply.
- 15 13. A rifle scope assembly comprising a rifle scope having a scope tube comprising an eyepiece, the assembly further comprising a viewing apparatus according to any of claims 1 to 12, wherein the display unit is above the rifle scope, and wherein the camera unit is attached over an eyepiece of the rifle scope such that the camera is aligned coaxially with a longitudinal axis of the scope.
- 20 14. A method of shooting a rifle, the method comprising using image data displayed on display means of a display unit, the display unit being attached to a rifle scope via attachment means, the image data being transferred to the display unit from a camera unit, the camera unit comprising a camera, the camera unit being attached to the rifle scope via attachment means such that the camera is exposed to an image visible at an eyepiece of the rifle scope, the image data being generated by the camera, wherein the display unit is above the rifle scope, and wherein the camera unit is attached over an eyepiece of the rifle scope such that the camera is aligned coaxially with a longitudinal axis of the scope.
- 25 15. A viewing apparatus kit comprising a camera unit having a camera and attachment means, the attachment means being operable to attach the camera unit to a rifle scope such that the camera is exposed to an image visible at an
- 30
- 35

eyepiece of a rifle scope; the kit further comprising a display unit comprising display means and attachment means operable to attach the display unit to a rifle scope, such that the display unit is above the rifle scope, wherein the attachment means of the camera unit is operable to attach the camera unit over an eyepiece of the rifle scope such that the camera is aligned coaxially with a longitudinal axis of the scope.

5

16. A rifle fitted with a viewing apparatus of any of claims 1 to 12 or a rifle scope assembly of claim 13.

10

17. A viewing apparatus for a rifle scope according to any of claims 1 to 12, wherein the attachment means of the display unit is arranged to allow attachment of the display unit above a scope tube toward an end thereof distal to an eyepiece.

15 18. A viewing apparatus for a rifle scope according to claim 12, wherein the power supply is operable to supply power to the camera unit and/or display unit.

-1/2-

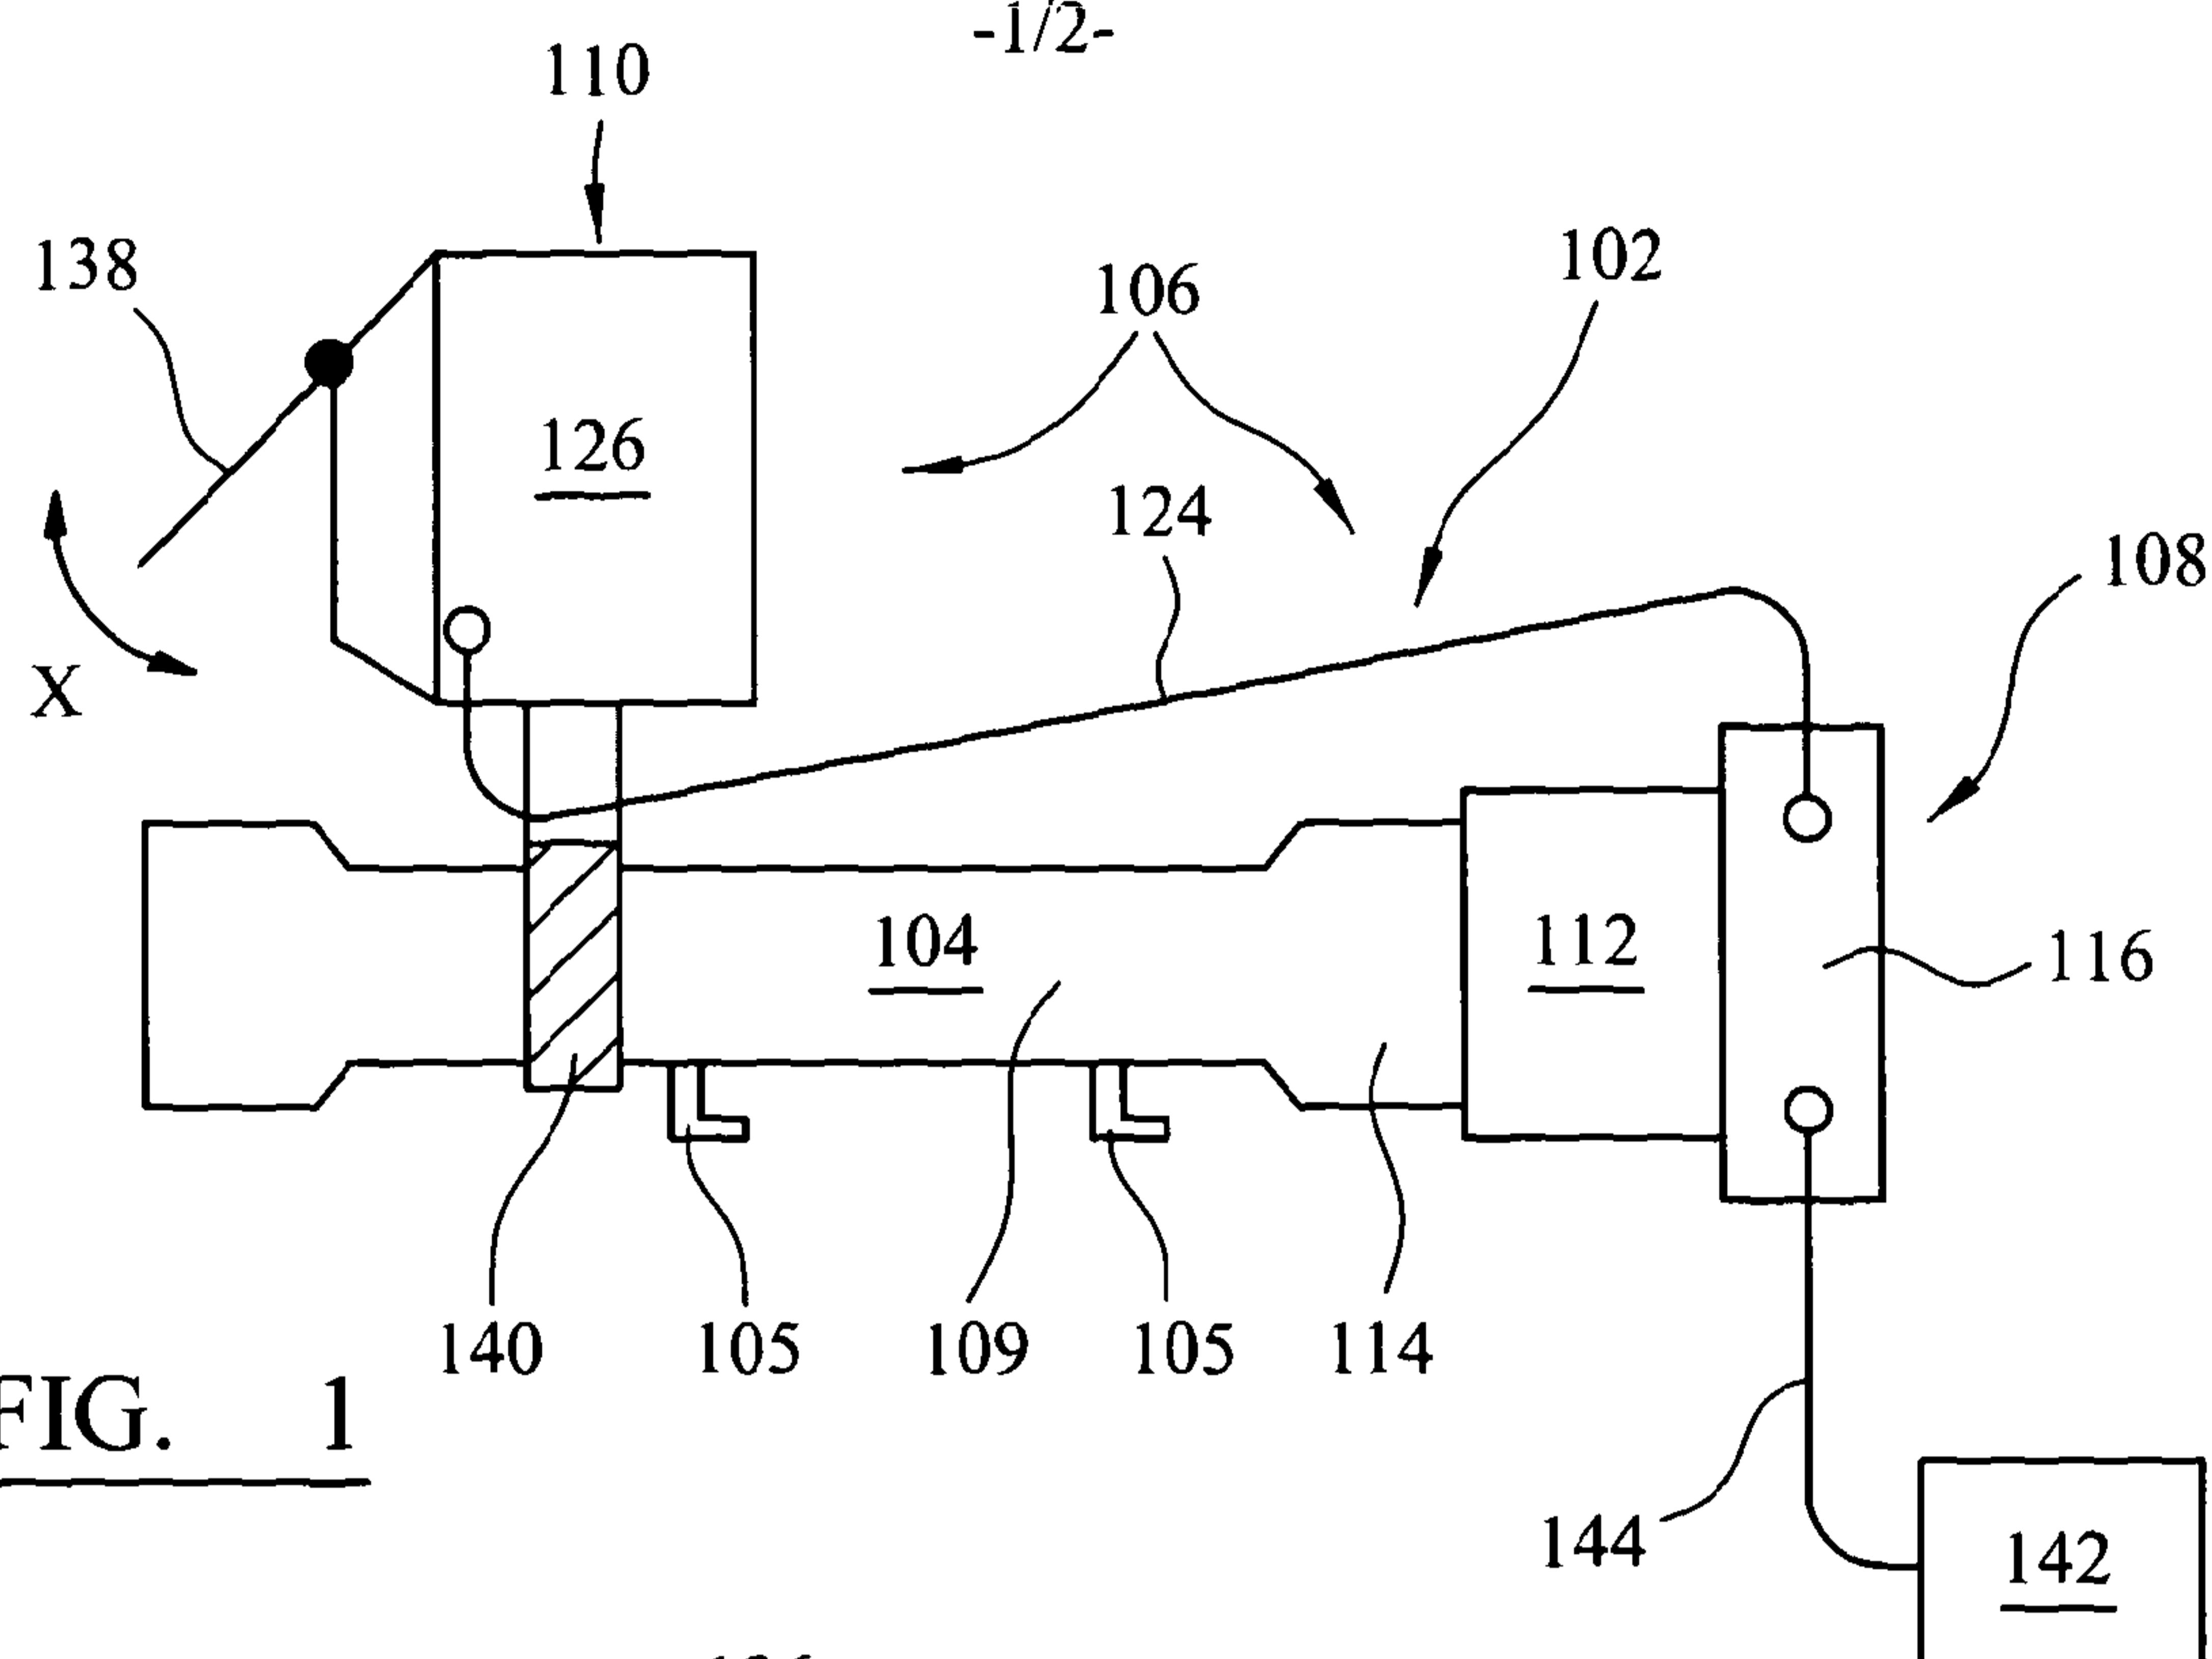


FIG. 1

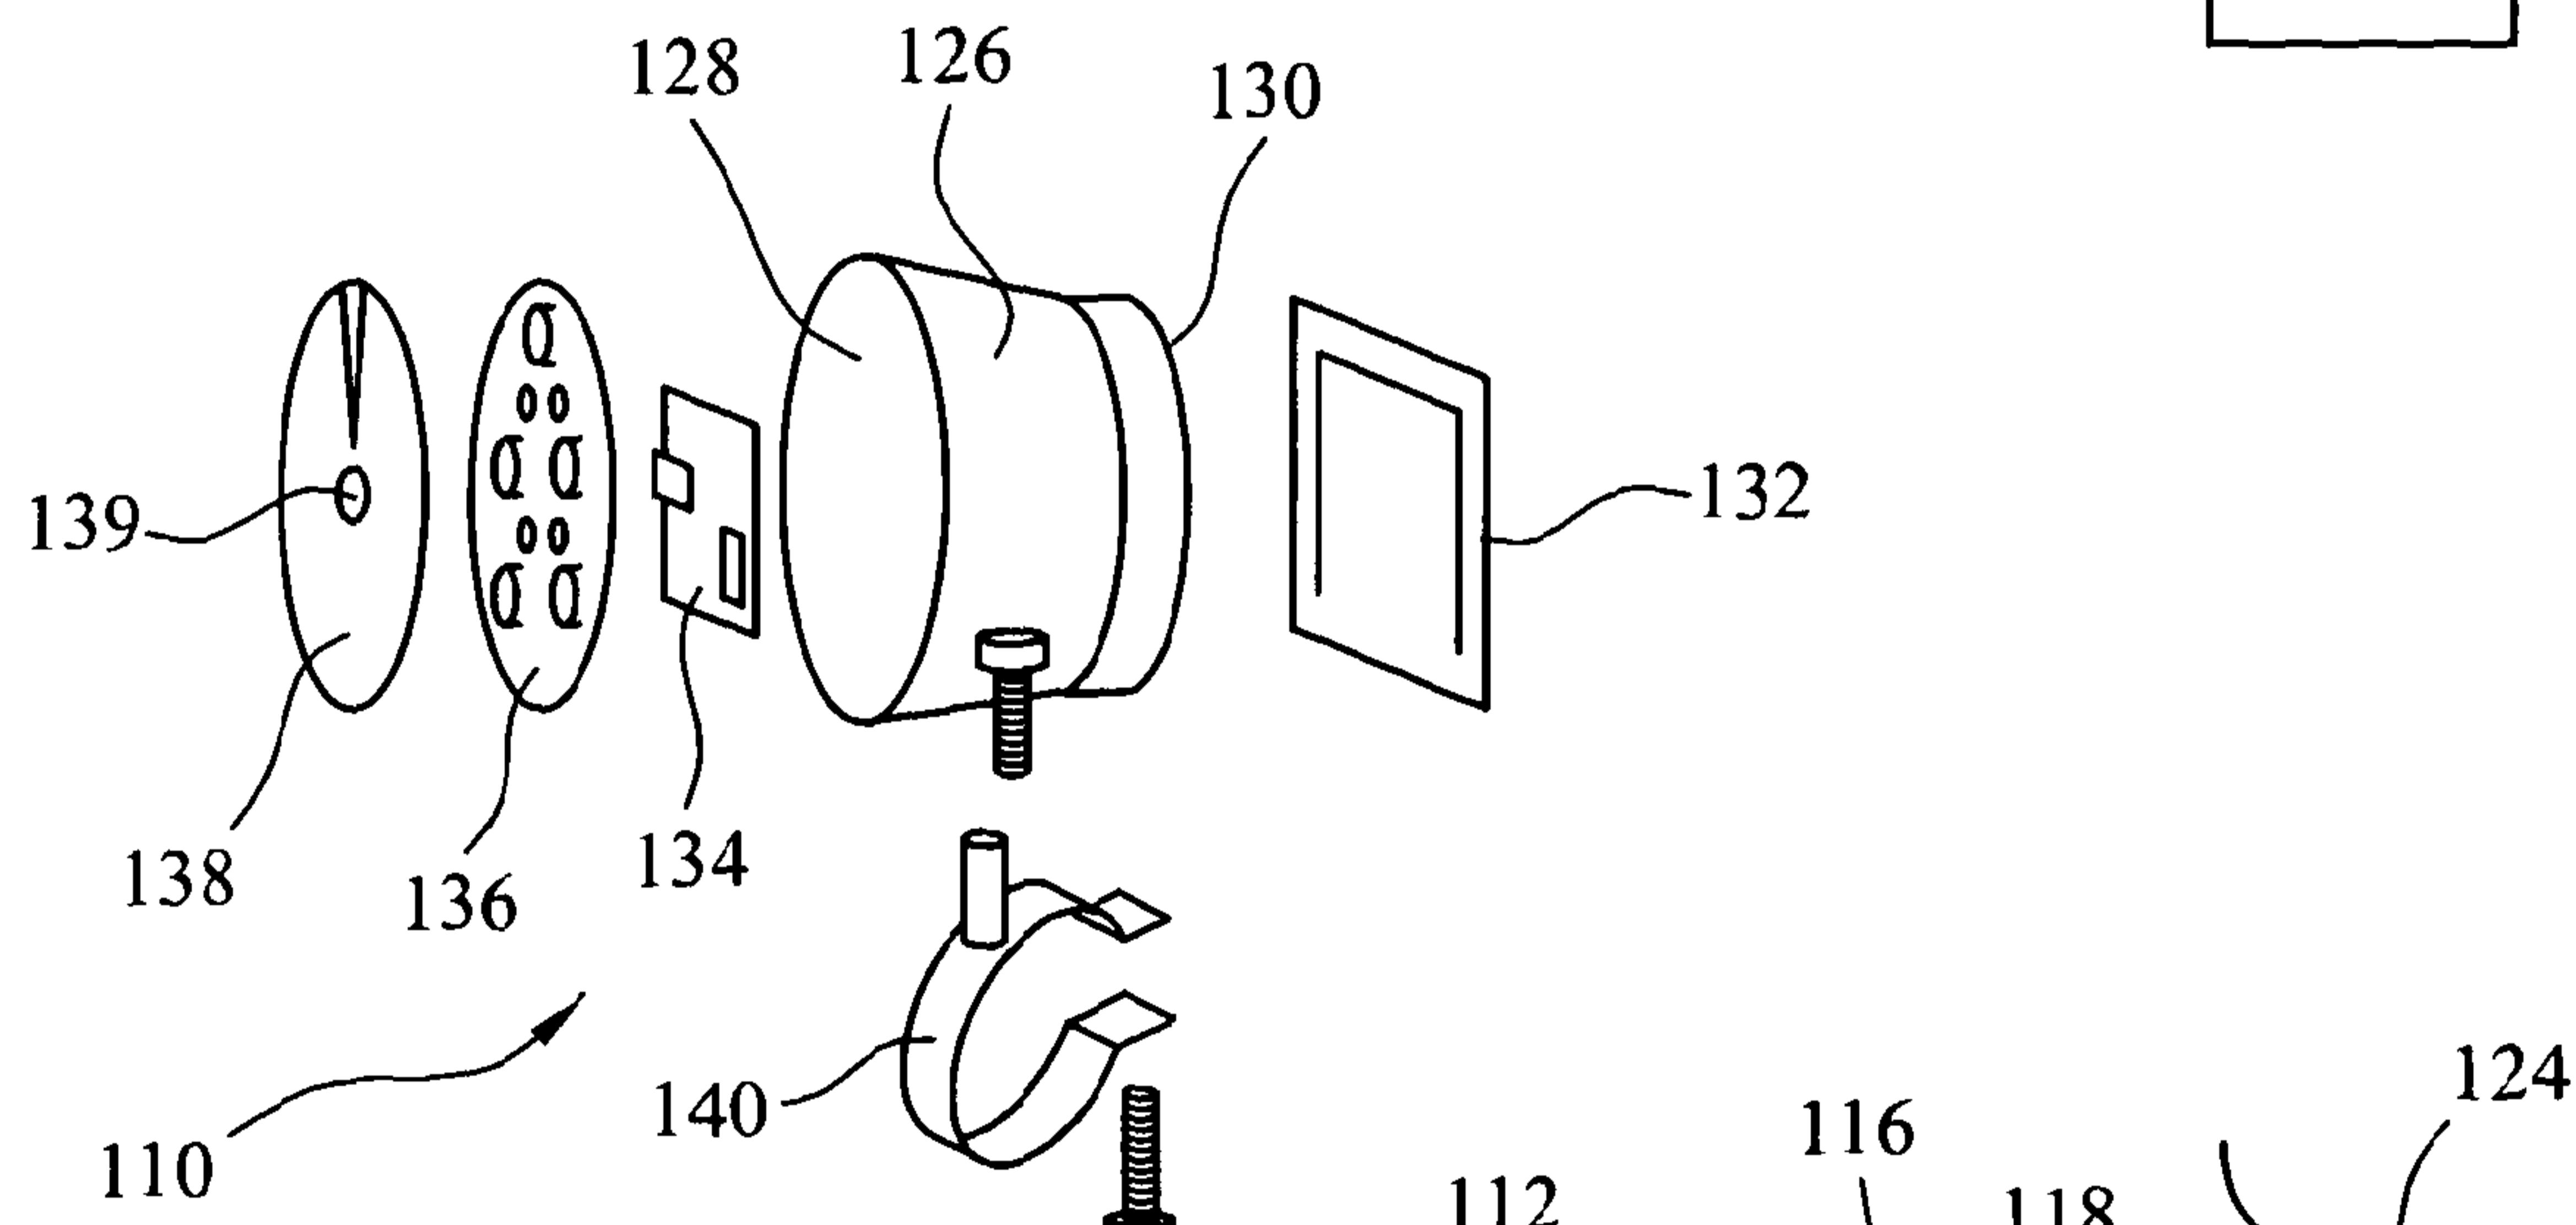


FIG. 2

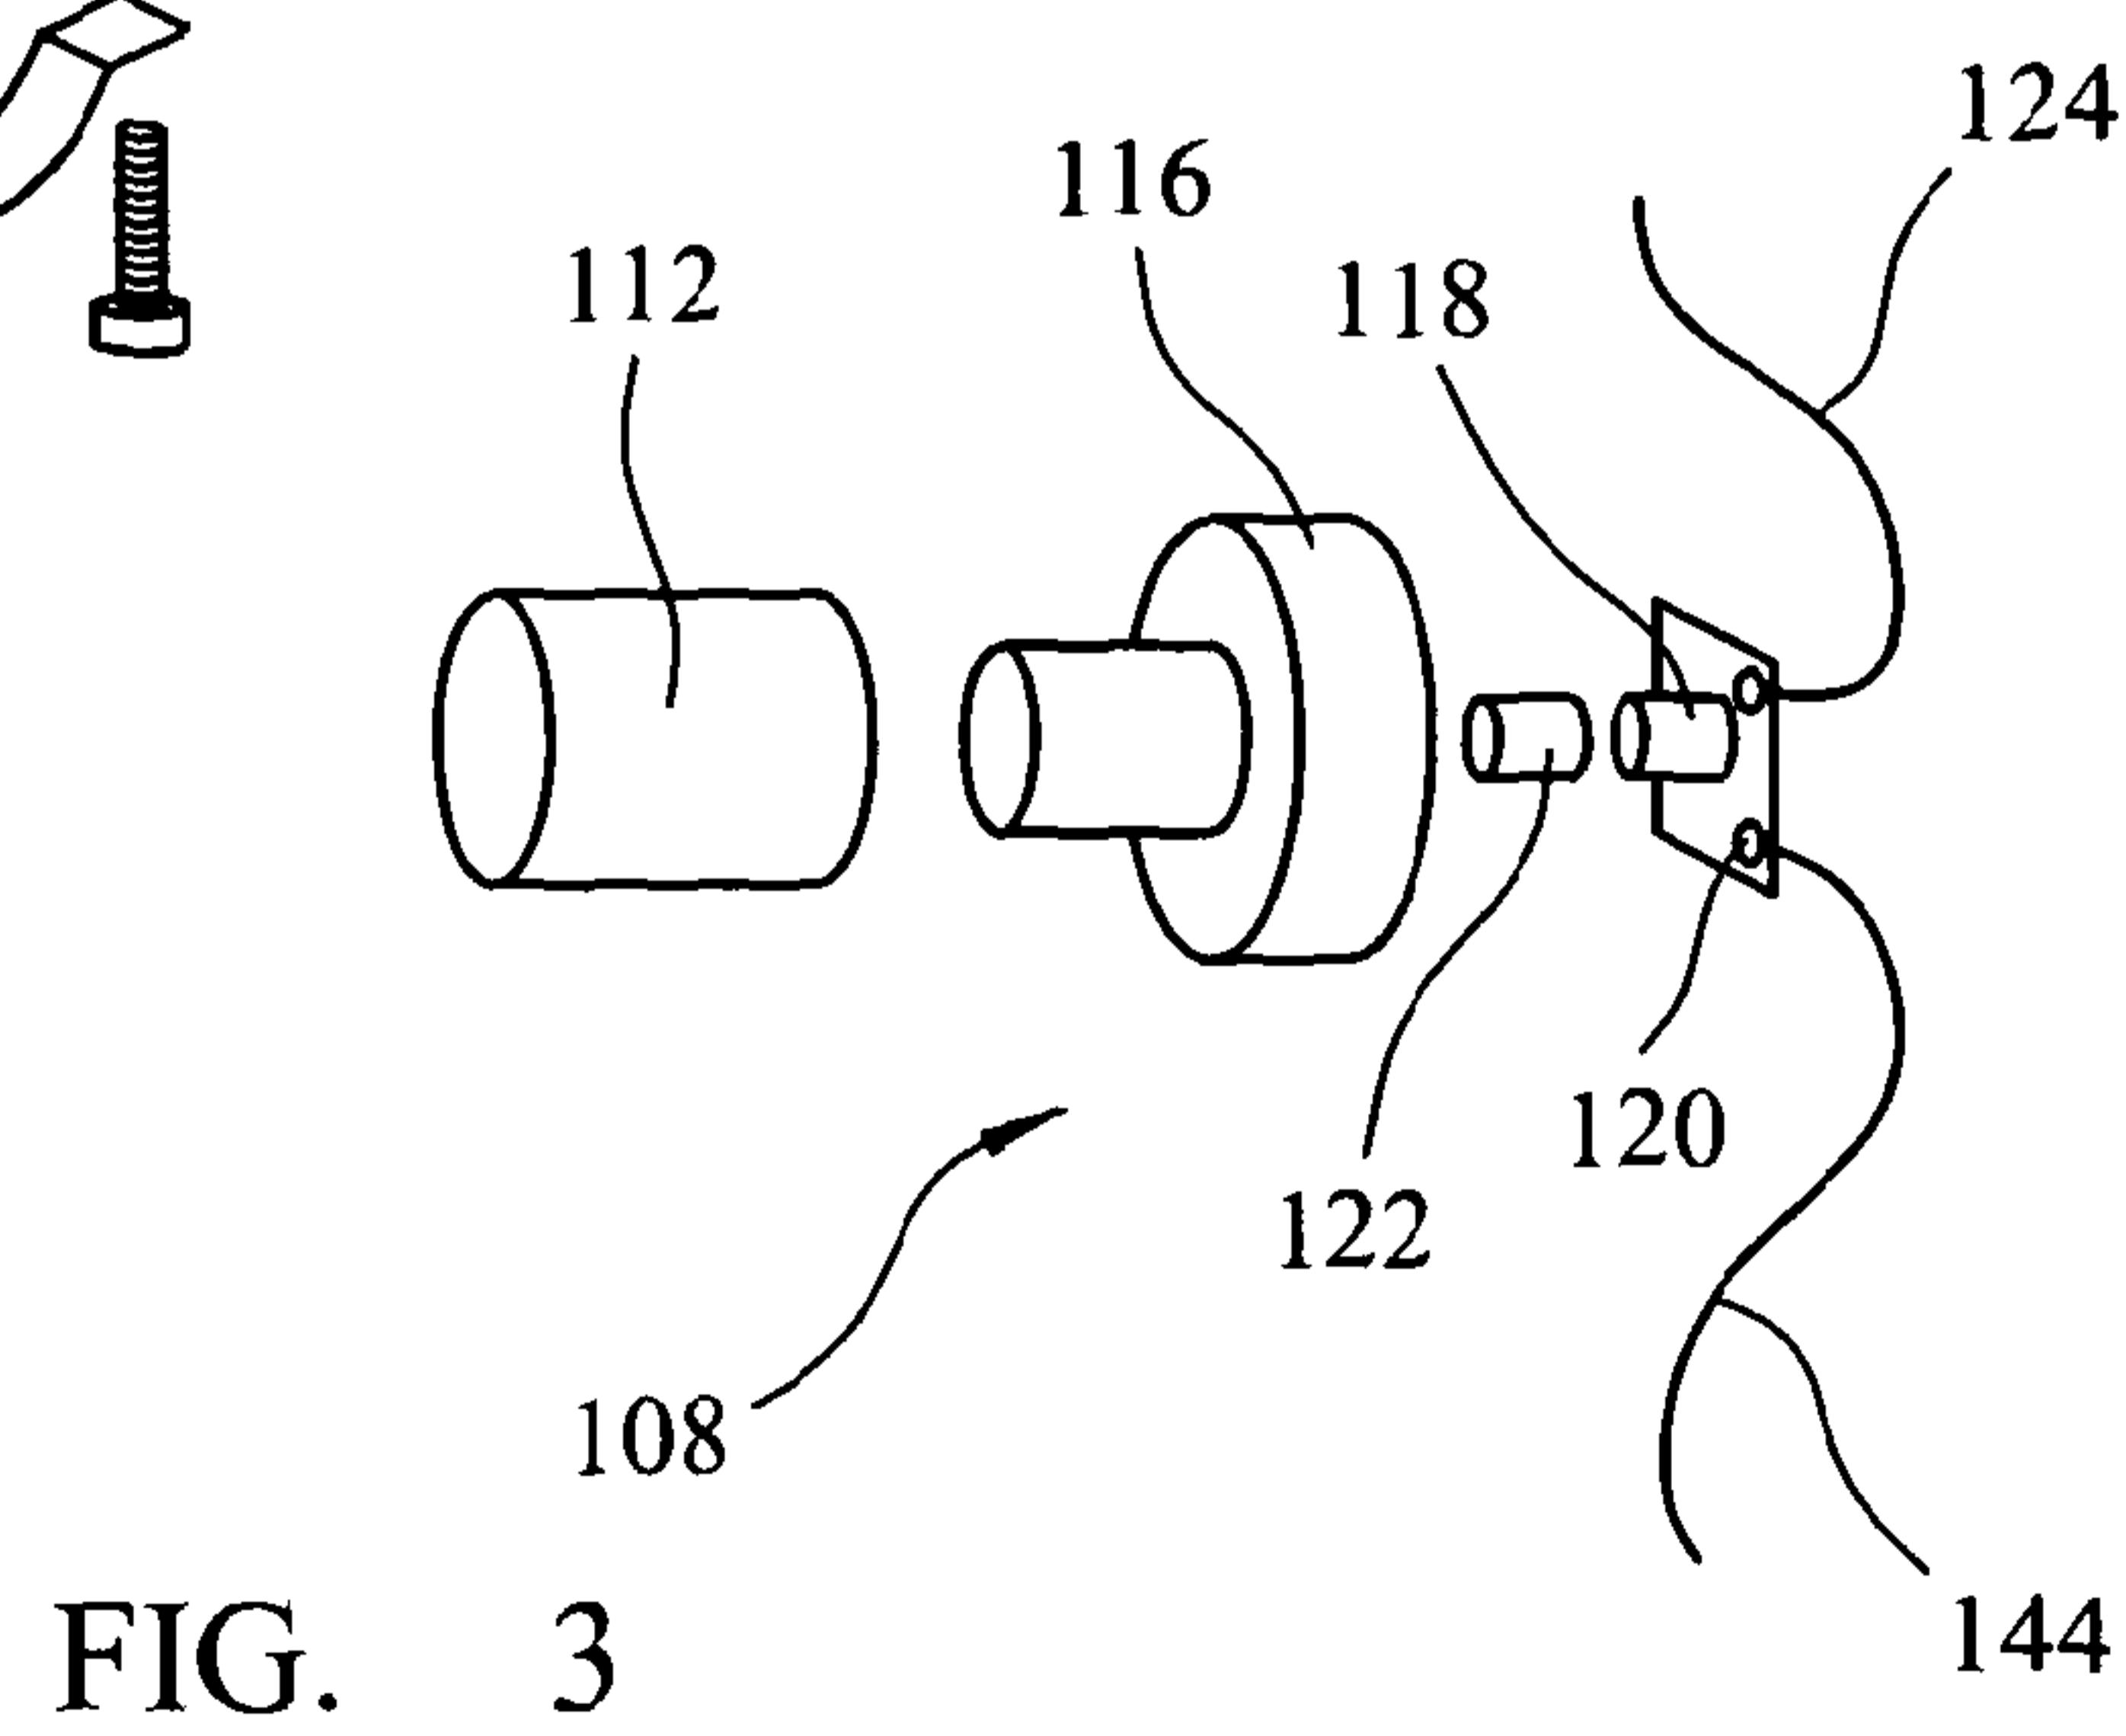


FIG. 3

-2/2-

