



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2020/02/28
(87) Date publication PCT/PCT Publication Date: 2020/09/03
(85) Entrée phase nationale/National Entry: 2021/08/24
(86) N° demande PCT/PCT Application No.: US 2020/020487
(87) N° publication PCT/PCT Publication No.: 2020/176883
(30) Priorité/Priority: 2019/02/28 (US62/811,743)

(51) Cl.Int./Int.Cl. *A47J 37/07* (2006.01),
A47J 37/06 (2006.01), *F23B 40/00* (2006.01),
F24B 13/00 (2006.01), *F24B 13/02* (2006.01),
F24B 13/04 (2006.01)
(71) Demandeur/Applicant:
W.C. BRADLEY CO., US
(72) Inventeurs/Inventors:
AHMED, MALLIK, US;
ROBERTS, BRUCE, US;
RAHMANI, RAMIN KHOSRAVI, US;
HAMILTON, ANTHONY, US;
ABDALLAH, SLEIMAN, US
(74) Agent: MACRAE & CO.

(54) Titre : CHAMBRE DE COMBUSTION POUR GRILS A GRANULES
(54) Title: COMBUSTION CHAMBER FOR PELLET GRILLS

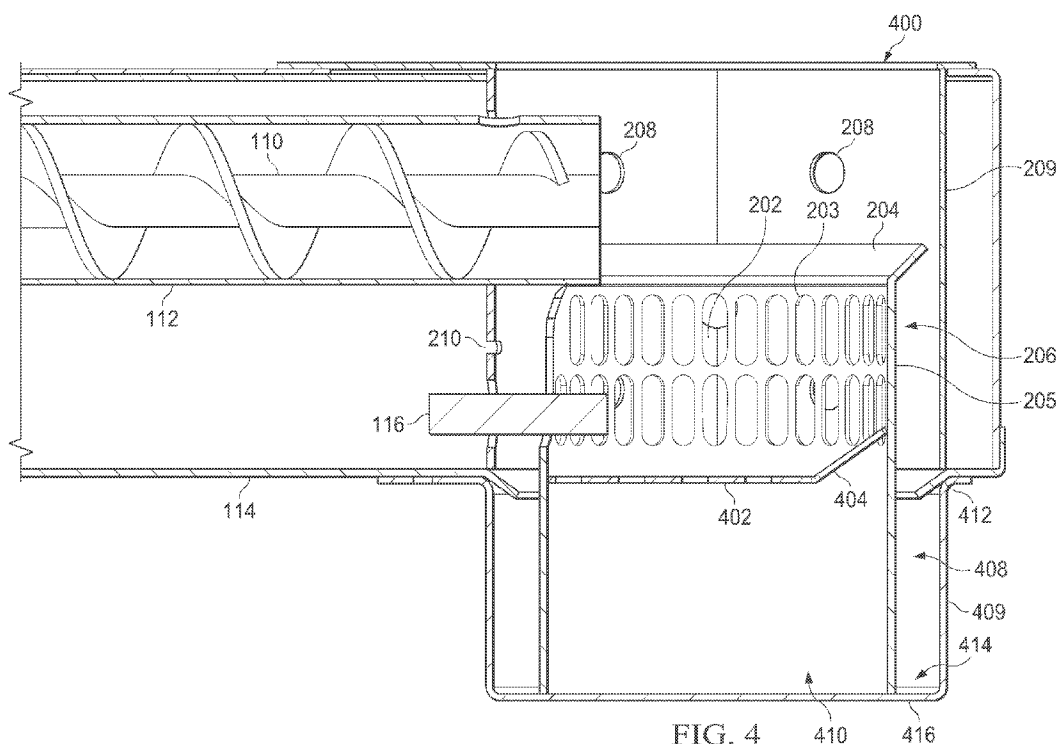


FIG. 4

(57) Abrégé/Abstract:

A combustion chamber has an inner wall defining an inner chamber. The inner wall is perforated to admit combustion air into the inner chamber. The combustion chamber has an outer wall defining an outer chamber. The outer wall is perforated to admit combustion air from a pressurized air plenum to the inner wall. The inner and outer wall are spaced apart such that air may flow between the inner and outer walls.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

03 September 2020 (03.09.2020)



(10) International Publication Number

WO 2020/176883 A1

(51) International Patent Classification:

A47J 37/07 (2006.01)

F24B 13/00 (2006.01)

A47J 37/06 (2006.01)

F24B 13/02 (2006.01)

F23B 40/00 (2006.01)

F24B 13/04 (2006.01)

(21) International Application Number:

PCT/US2020/020487

(22) International Filing Date:

28 February 2020 (28.02.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/811,743

28 February 2019 (28.02.2019)

US

(71) Applicant: **W.C. BRADLEY CO.** [US/US]; 1017 Front Avenue, Columbus, GA 31904 (US).

(72) Inventors: **AHMED, Mallik**; 1517 Ridge Creek Way, Columbus, GA 31904 (US). **ROBERTS, Bruce**; 7317 E. Wynfield Loop, Midland, GA 31820 (US). **RAHMANI, Ramin, Khosravi**; 109 Wailea Ct, Columbus, GA 31909 (US). **HAMILTON, Anthony**; 67 Pin Oak Way, Hamilton,

GA 31811 (US). **ABDALLAH, Sleiman**; 8748 Heiferhorn Way, Columbus, GA 31904 (US).

(74) Agent: **WOODRAL, David, G.**; Gable Gotwals, 100 West Fifth Street, Suite 1100, Tulsa, OK 74103-4217 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: COMBUSTION CHAMBER FOR PELLET GRILLS

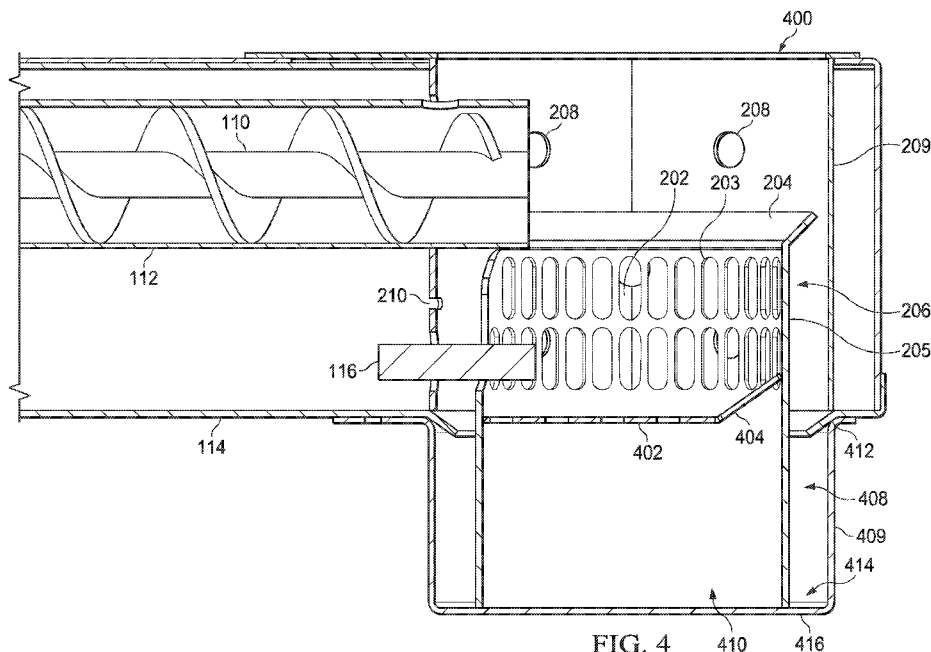


FIG. 4

(57) Abstract: A combustion chamber has an inner wall defining an inner chamber. The inner wall is perforated to admit combustion air into the inner chamber. The combustion chamber has an outer wall defining an outer chamber. The outer wall is perforated to admit combustion air from a pressurized air plenum to the inner wall. The inner and outer wall are spaced apart such that air may flow between the inner and outer walls.

[Continued on next page]



WO 2020/176883 A1

WO 2020/176883 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

COMBUSTION CHAMBER FOR PELLET GRILLS

CROSS-REFERENCE TO RELATED CASES

This application claims the benefit of U.S. provisional patent application Serial No. 62/811,743, filed on February 28, 2019, and incorporates such provisional application by
5 reference into this disclosure as if fully set out at this point.

FIELD OF THE INVENTION

This disclosure relates to pellet fueled grills in particular and, more specifically, to combustion chambers used in pellet fueled grills.

BACKGROUND OF THE INVENTION

10 Early examples of outdoor wood pellet fired cooking and smoking appliances are disclosed in US Patent Nos. 4,823,684 and 5,251,607 to Traeger, et al. Over the years there have been some improvements and variations of these products made but their essential principal of operation remains the same. Issues can arise internally with respect to handling and combustion of the wood fuel pellets. Combustion air must reach the fuel
15 pellets, but prior firepot design can result in blockage of air intake holes. Intake holes may be blocked owing to pellet arrangement in the firepot, ash or debris clogging the holes, or from other causes. This can result in unacceptably low heat output and even extinguishing of the firepot altogether. Additionally, in smoldering or other modes of operation, unburned hydrocarbons may escape the firepot in gaseous form and be subject to unwanted
20 ignition elsewhere. Further uneven air flow into a firepot may result in hot or cold spots and areas of fuel that are not burned. On the other hand, fuel maybe consumed where it is not intended, such as in the fuel feeding mechanism or other conveyance means.

What is needed is a system and method for addressing the above, and related, issues.

25 SUMMARY OF THE INVENTION

The invention of the present disclosure, in one aspect thereof a combustion chamber having an inner wall defining an inner chamber. The inner wall is perforated to admit combustion air into the inner chamber. The combustion chamber has an outer wall defining an outer chamber. The outer wall is perforated to admit combustion air from a

pressurized air plenum to the inner wall. The inner and outer wall are spaced apart such that air may flow between the inner and outer walls. The inner chamber has an open top to receive solid fuel for combustion in the inner chamber.

5 In some embodiments, the combustion chamber further comprises a funnel above the inner chamber configured to direct solid fuel into the inner chamber. The inner and outer chamber may be bounded by a common floor. The outer wall may have perforations at least above the inner wall and on a same vertical level as the inner wall. The outer wall may also have perforations vertically above the funnel.

10 In some embodiments the combustion chamber further comprises a perforated floor in the inner chamber. Such floor may have a ramped segment of the perforated floor on an opposite side of the inner chamber from a location where the solid fuel is introduced. An ash chamber may be below the perforated floor. In some cases, a lower outer chamber extension is defined by a lower outer wall extension and contains the ash chamber therein. Some embodiments include a spaced apart region between the ash chamber and the lower
15 outer chamber extension with a lip extending inwardly to trap debris in the spaced apart region. A removable cap may be placed at a bottom end of the ash chamber.

The invention of the present disclosure, in another aspect thereof, comprises a cooking grill having a cooking chamber with a cooking grate supported therein that is accessible by an openable lid. The grill may have a firepot within the cooking chamber
20 below the cooking grate, an air plenum providing pressurized combustion air to the firepot, and a fan that pressurizes the air in the plenum. The firepot further comprises an inner wall defining an inner chamber where fuel is combusted and an outer chamber wall defining an outer chamber containing the inner chamber. The outer chamber wall is affixed within the plenum and receives pressurized air from the plenum. The inner and
25 outer walls are spaced apart such that air may flow freely around the inner chamber within the outer chamber. The inner chamber is perforated to receive the combustion air from the outer chamber.

The grill may have a perforated floor below the inner chamber and may have an ash compartment below the perforated floor. A fuel feeding mechanism may traverse
30 through the plenum and pass through the outer chamber wall delivering fuel into a top of the inner chamber. A funnel may be provided on the inner chamber wall directing solid

fuel into the inner chamber from the fuel feeding mechanism. The perforated floor may comprise a ramped segment and a flat segment, the ramped segment being oriented to direct fuel pellets from the fuel feeding mechanism toward the flat segment.

5 The invention of the present disclosure, in another aspect thereof, comprises a cooking grill having a cooking chamber containing a cooking grate, and a firepot below the cooking grate that is situated at least partially within an air plenum providing pressurized air to the firepot. The firepot has an outer chamber defined by a perforated outer chamber wall in fluid contact with the pressurized air in the plenum. The firepot has an inner chamber within the outer chamber and defined by a perforated inner chamber
10 wall, the inner chamber wall perforations being sized to prevent passage of unburned fuel pellets therethrough but to admit air flow from the outer chamber therethrough.

The grill may include a perforated floor below the inner chamber allowing ash to fall from the inner chamber to an ash chamber at least partially below the plenum. It may also include a fuel feeding mechanism passing through part of the plenum and through the
15 outer chamber wall and situated to provide fuel into a top of the inner chamber.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective cutaway view of a pellet grill.

Figure 2 is a side cutaway view of a combustion chamber for a pellet grill or other device according to aspects of the present disclosure.

20 Figure 3 is a perspective cutaway phantom view of the combustion chamber of Figure 2.

Figure 4 is a side cutaway view of another embodiment of a combustion chamber for a pellet grill or other device according to aspects of the present disclosure.

Figure 5 is a perspective cutaway phantom view of the combustion chamber of
25 Figure 4.

Figure 6 is a perspective cutaway view of another embodiment of a combustion chamber according to aspects of the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Figure 1, a perspective cutaway view of a pellet grill **100** is
30 shown. The pellet grill **100** may be of the type that utilizes pelletized fuel comprising

wood, sawdust, or other components rendered into pelletized form for handling and combustion by the grill **100** for cooking or smoking operations. The pellet burning cooking grill **100** provides a firebox or cooking chamber **102** containing or supporting a cooking grate **103**. An openable or hinged lid **104** may be provided for selective access to the cooking grate **103**. A fuel feeding mechanism **110** (shown here as an auger but may also be, for example and without limitation, a belt conveyor, stick/slip conveyor, push feeder or other fuel feeding mechanism) may transport compressed wood pellets or other pelletized fuel from an exterior hopper **108** to a typically open top cylindrical firepot or combustion chamber **120**. The combustion chamber **120** may be supplied with combustion air pressurized and driven by a fan through ductwork or a plenum **114** to an area surrounding the firepot **120** and then through holes in the exterior of the firepot feeding air into an inner combustion space. In some configurations, the auger **110** operates in an auger tube **112** that is at least partially inside the plenum **114**.

An electric resistance igniter **116** may initiate combustion of the fuel inside the combustion chamber **120**. Hot gas from the combustion chamber **120** may be conveyed through a series of baffles **118** to the cooking grate **103** placed above the combustion chamber **120**.

Referring now to Figure 2, a side cutaway view of a combustion chamber **200** for the pellet grill **100** or other device according to aspects of the present disclosure is shown. In various embodiments, the combustion chamber **200** is a replacement for the combustion chamber **120**. In some embodiments, no further modifications to the grill **100** are made as the combustion chamber **200** is a “drop-in” replacement (though it is understood it may, nevertheless, be inserted, assembled, affixed in place, etc. during original production of the grill **100** or its relevant subcomponents). However, sizes of plenums **114**, cooking grates **103**, cooking chamber **102**, etc. may be implemented to take full advantage of the combustion chamber **200**. For further illustration, Figure 3 is a perspective cutaway phantom view of the combustion chamber **200** of Figure 2.

The combustion chamber **200** comprises an inner chamber **202** defined by an inner wall **205** or container for the burning fuel pellets. The inner wall **205** may be perforated as shown or may comprise other perforation configurations. The perforations **203** may be of such a variety of size and shape that they fully retain the fuel pellets while allowing

pressurized combustion airflow to pass freely to the burning pellets inside the inner chamber **202**. The perforations **203** may be very small in some cases, so as to define a screen. The inner chamber wall **205** may comprise a heat resistant material, such as a metal alloy, that can withstand extended high temperatures from the burning fuel pellets.

5 The inner chamber **202** may be cylindrical, toroidal, or prismatic in shape as is most advantageous to match with an outer chamber **206** that may be defined by an outer wall **209** or container. The inner chamber **202** and outer chamber **106** may be cylindrical and/or coaxial with respect to one another. A space **207** may be defined between the inner chamber **202** and outer chamber **206**. The space **207** may be substantially toroidal such
10 that the distance between the inner chamber **202** and outer chamber **206** is generally the same everywhere between them.

 The outer chamber wall **209** may define openings or holes **208** that receive air from the plenum **114** driven or pressurized by the fan **115**. The holes **208** defined by the outer chamber **206** may vary in size and spacing. In one embodiment, the holes **208** are defined
15 vertically superior to the inner chamber **202**. In some embodiments, a further set of holes **214** are defined through the outer chamber wall **209** to fully or partially vertically overlap with the inner chamber **202**. A further series of holes **210** may be provided near the ignitor **116** to ensure proper ignition operations. The holes **214** and **210**, like the holes **208**, may be supplied with pressurized air from the plenum **114** driven by the fan **115**.

20 The outer chamber **206** may be cylindrical in form, although other configurations are possible. The size of the inner chamber **202** (volumetrically or diametrically) may match the size of a single walled firepot seen in prior art. It may be of such a size to provide the thermal performance required by the grill **100** into which it is installed. In some embodiments, the outer chamber wall **209**, at least, is sized larger than prior art
25 firepots but aid in providing the benefits outlined herein as well as others.

 In some embodiments, the inner chamber **202** shares a common floor **212** with the outer chamber **206**. In some embodiments, the outer chamber **206** provides the floor **212** and the inner chamber **202** comprises a wall that sits on the floor **212** inside the outer chamber **206**. An ash opening (also closable, not shown) may be provided into the
30 combustion chamber **200** via the floor **212**. The inner chamber **202** and the outer chamber

206 may have open tops. In some embodiments, the inner chamber **202** is shorter than the outer chamber **206** so as to fit completely inside the outer chamber **206**.

The auger **110** and/or auger tube **112** may enter into the combustion chamber **200** via an opening through the outer chamber **206** and to an area above the inner chamber **202** such that pellets fall from the auger tube **112** into the inner chamber **202**. The inner chamber **202** may have a funnel **204** on or near a top thereof to help prevent pellets from bouncing or falling out of the inner chamber **202**.

Referring now to Figure 4, a side cutaway view of another embodiment of a combustion chamber **400** for a pellet grill **100** or other device according to aspects of the present disclosure is shown. Figure 5 is a perspective cutaway phantom view of the combustion chamber **400**. There are some commonalities between the combustion chamber **400** and the combustion chamber **200** discussed above and components may be understood to be in common where not specified otherwise. Both combustion chambers **200**, **400** (as well as combustion chamber **600**, described below) are designed to solve various issues associated with prior art firepots, and both are upgrade, replacement, or OEM parts for solid fuel (e.g., pellet) grills.

The combustion chamber **400** provides an extension **408** chamber of the outer chamber **206** that may extend below the floor **402** and/or even the plenum **114**. The extension chamber **408** may be defined by an outer wall extension **409**, which may be integral with, or separately affixed with respect to, the outer wall **209**. An inner chamber **202** may be taller or longer as well such that it extends all the way to or near to a floor **416** of the outer chamber extension **408** while maintaining its upper position relative to the outer chamber **206** and the auger tube **112**.

The inner chamber **202** may be bifurcated by the perforated floor **402**. The floor **402** may provide a surface for burning fuel pellets while allowing ash to drop into an ash chamber **410** below the floor **402**. The ash chamber **410** may be defined by the portion of the inner chamber wall below the floor **402** in the present embodiment. The floor **402** may be perforated or have openings or screened portions to allow ash and other byproducts to fall through. The floor **402** may support unburned or burning solid fuel while ash is allowed to fall away such that it does not impeded further ongoing combustion.

The floor **402** may provide a ramped segment **404** opposite a side where the auger tube **112** lies over the floor **402**. This may promote even distribution of the fuel pellets as they fall from the auger tube **112**. The ramped segment **404** may be provided with an angle of about 45 degrees. In other embodiments, the angle may vary (for example, from about 30 degrees to about 60 degrees). As can be seen in the side cutaway view of Figure 4 the ramped segment **404** may occupy less than half of the diameter of the inner **203** while the remainder of the floor **402** remains substantially flat. In some embodiments the ramped segment **404** comprises about 10-20% of the diameter of the inner chamber **202**. In one embodiment the ramped segment **404** comprises about 17.6% of the diameter of the inner chamber **202** (all figures when viewed inside profile as shown).

Between the inner chamber **202** and outer chamber extension **408** (and possibly below the floor **402**) is a trap **414**. A lip **412** allows ash and stray pellets to fall into the trap **414** and away from the sides of the inner chamber **202** near the upper portion where combustion takes place. Thus ash, stray pellets, and/or other debris is prevented from accumulating around the inner chamber **202** where unimpeded airflow into the inner chamber **202** is desirable to promote proper fuel pellet burning. The trap **414** and ash trap **410** may be accessible by one or more closable openings (not shown) in the floor **416** or elsewhere.

Referring now to Figure 6, a perspective cutaway view of another embodiment of a combustion chamber **600** according to aspects of the present disclosure is shown. The combustion chamber **600** shares common components with the combustion chambers **200**, **400** unless otherwise indicated. The combustion chamber **600** may include an inner chamber **202** defined by an inner wall **205** located within an outer chamber **206** defined by outer wall **209**. The inner chamber **202** may be coaxial with the outer chamber **206**. The outer chamber wall **209** may be fitted into the plenum **114** to receive positive combustion air via one or more series of openings **208**, **210**, **214** to the plenum **114**.

The inner wall **205** may be perforated or screened to allow air flow into the inner chamber **202** where the fuel pellets are burned after introduction via the auger tube **112**. In this embodiment also, the floor **402** is perforated to allow ash and debris to fall through. A ramped segment **404** of the floor **402** is also provided. In the present embodiment, the inner wall **205** does not extend below the floor **402**, rather the outer chamber extension

408 is an undivided compartment or ash chamber **410**. Extending from a lower portion of the outer wall extension **209** is a brace **606** supporting a captive nut **604** or other fastener receiving implement. Here a removable bottom cap or cover **602** may be retained against the outer wall extension **409** by a bolt **608** into the nut **604**. In some embodiments, the bolt **608** is captive to the bottom cover **608** such that the cover **608** may be screwed into the outer wall extension **409**.

A support member **610**, interposing the inner wall **205** and outer wall **209** to support the inner wall **205** in place relative to the outer wall **209** and/or extension **409**. This may be instead of, or in addition to a lip 412 (Figures 4-5). The support member **610** may be annular where the inner chamber **202** and outer chamber **206** are cylindrical and coaxial. The support member **610** may be perforated to allow any spilled fuel pellets, ash, or other debris falling between the inner wall **205** and outer wall **209** location to pass through to the ash chamber **410** (defined here by the outer all extension **409**). In other embodiments, the funnel **204** of the inner chamber wall **205** may extend to sufficient proximity with, or contact to, the outer wall **209** that it is not necessary to perforate the support area **610**.

* * * *

It is to be understood that the terms "including", "comprising", "consisting" and grammatical variants thereof do not preclude the addition of one or more components, features, steps, or integers or groups thereof and that the terms are to be construed as specifying components, features, steps or integers.

If the specification or claims refer to "an additional" element, that does not preclude there being more than one of the additional element.

It is to be understood that where the claims or specification refer to "a" or "an" element, such reference is not be construed that there is only one of that element.

It is to be understood that where the specification states that a component, feature, structure, or characteristic "may", "might", "can" or "could" be included, that particular component, feature, structure, or characteristic is not required to be included.

Where applicable, although state diagrams, flow diagrams or both may be used to describe embodiments, the invention is not limited to those diagrams or to the

corresponding descriptions. For example, flow need not move through each illustrated box or state, or in exactly the same order as illustrated and described.

Methods of the present invention may be implemented by performing or completing manually, automatically, or a combination thereof, selected steps or tasks.

5 The term "method" may refer to manners, means, techniques and procedures for accomplishing a given task including, but not limited to, those manners, means, techniques and procedures either known to, or readily developed from known manners, means, techniques and procedures by practitioners of the art to which the invention belongs.

10 The term "at least" followed by a number is used herein to denote the start of a range beginning with that number (which may be a range having an upper limit or no upper limit, depending on the variable being defined). For example, "at least 1" means 1 or more than 1. The term "at most" followed by a number is used herein to denote the end of a range ending with that number (which may be a range having 1 or 0 as its lower limit, or a range having no lower limit, depending upon the variable being defined). For
15 example, "at most 4" means 4 or less than 4, and "at most 40%" means 40% or less than 40%.

20 When, in this document, a range is given as "(a first number) to (a second number)" or "(a first number) – (a second number)", this means a range whose lower limit is the first number and whose upper limit is the second number. For example, 25 to 100 should be interpreted to mean a range whose lower limit is 25 and whose upper limit is 100. Additionally, it should be noted that where a range is given, every possible subrange or interval within that range is also specifically intended unless the context indicates to the contrary. For example, if the specification indicates a range of 25 to 100 such range is also intended to include subranges such as 26 -100, 27-100, etc., 25-99, 25-98, etc., as well as
25 any other possible combination of lower and upper values within the stated range, e.g., 33-47, 60-97, 41-45, 28-96, etc. Note that integer range values have been used in this paragraph for purposes of illustration only and decimal and fractional values (e.g., 46.7 – 91.3) should also be understood to be intended as possible subrange endpoints unless specifically excluded.

30 It should be noted that where reference is made herein to a method comprising two or more defined steps, the defined steps can be carried out in any order or simultaneously

(except where context excludes that possibility), and the method can also include one or more other steps which are carried out before any of the defined steps, between two of the defined steps, or after all of the defined steps (except where context excludes that possibility).

5 Further, it should be noted that terms of approximation (e.g., “about”, “substantially”, “approximately”, etc.) are to be interpreted according to their ordinary and customary meanings as used in the associated art unless indicated otherwise herein. Absent a specific definition within this disclosure, and absent ordinary and customary usage in the associated art, such terms should be interpreted to be plus or minus 10% of
10 the base value.

 The term “selective” or “selectively,” unless otherwise indicated, is taken to mean that the operation or function is capable of being performed by the structure or device in reference, but the operation or function may not occur continuously or without interruption. Furthermore, a selective or selectively performed operation may be one that
15 the user or operator of a device or method may choose whether or when to perform, but the function or operation is nevertheless fully operative on or within the relevant device, machine, or method.

* * * * *

 Thus, the present invention is well adapted to carry out the objects and attain the
20 ends and advantages mentioned above as well as those inherent therein. While the inventive device has been described and illustrated herein by reference to certain preferred embodiments in relation to the drawings attached thereto, various changes and further modifications, apart from those shown or suggested herein, may be made therein by those of ordinary skill in the art, without departing from the spirit of the inventive concept the
25 scope of which is to be determined by the following claims.

CLAIMS

What is claimed is:

1. A combustion chamber comprising:
an inner wall defining an inner chamber, the inner wall being perforated to admit combustion air into the inner chamber;
an outer wall defining an outer chamber, the outer wall being perforated to admit combustion air from a pressurized air plenum to the inner wall;
wherein the inner and outer wall are spaced apart such that air may flow between the inner and outer walls; and
wherein the inner chamber has an open top to receive solid fuel for combustion in the inner chamber.
2. The combustion chamber of claim 1, further comprising a funnel above the inner chamber configured to direct solid fuel into the inner chamber.
3. The combustion chamber of claim 2, wherein the inner and outer chamber are bounded by a common floor.
4. The combustion chamber of claim 3, wherein the outer wall has perforations at least above the inner wall and on a same vertical level as the inner wall.
5. The combustion chamber of claim 4, wherein the outer wall has perforations vertically above the funnel
6. The combustion chamber of claim 1, further comprising a perforated floor in the inner chamber.
7. The combustion chamber of claim 6, further comprising a ramped segment of the perforated floor on an opposite side of the inner chamber from a location where the solid fuel is introduced.
8. The combustion chamber of claim 7, further comprising an ash chamber below the perforated floor.

9. The combustion chamber of claim 8, further comprising a lower outer chamber extension defined by a lower outer wall extension and containing the ash chamber therein.

10. The combustion chamber of claim 9, further comprising a spaced apart region between the ash chamber and the lower outer chamber extension with a lip extending inwardly to trap debris in the spaced apart region.

11. The combustion chamber of claim 8, further comprising a removable cap at a bottom end of the ash chamber.

12. A cooking grill comprising:

a cooking chamber having a cooking grate supported therein that is accessible by an openable lid;

a firepot within the cooking chamber below the cooking grate;

an air plenum providing pressurized combustion air to the firepot; and

a fan that pressurizes the air in the plenum;

wherein the firepot further comprises:

an inner wall defining an inner chamber where fuel is combusted;

and an outer chamber wall defining an outer chamber containing the inner chamber;

wherein the outer chamber wall is affixed within the plenum and receives pressurized air from the plenum;

wherein the inner and outer walls are spaced apart such that air may flow freely around the inner chamber within the outer chamber; and

wherein the inner chamber is perforated to receive the combustion air from the outer chamber.

13. The cooking grill of claim 12, further comprising a perforated floor below the inner chamber.

14. The cooking grill of claim 13, further comprising an ash compartment below the perforated floor.

15. The cooking grill of claim 14, further comprising a fuel feeding mechanism traversing through the plenum and passing through the outer chamber wall delivering fuel into a top of the inner chamber.

16. The cooking grill of claim 15, further comprising a funnel on the inner chamber wall directing solid fuel into the inner chamber from the fuel feeding mechanism.

17. The cooking grill of claim 15, wherein the perforated floor comprises a ramped segment and a flat segment, the ramped segment being oriented to direct fuel pellets from the fuel feeding mechanism toward the flat segment.

18. The cooking grill comprising:
a cooking chamber having a cooking grate; and
a firepot below the cooking grate and situated at least partially within an air plenum providing pressurized air to the firepot;

wherein the firepot has an outer chamber defined by a perforated outer chamber wall in fluid contact with the pressurized air in the plenum; and

wherein the firepot has an inner chamber within the outer chamber and defined by a perforated inner chamber wall, the inner chamber wall perforations being sized to prevent passage of unburned fuel pellets therethrough but to admit air flow from the outer chamber therethrough.

19. The cooking grill of claim 18, further comprising a perforated floor below the inner chamber allowing ash to fall from the inner chamber to an ash chamber at least partially below the plenum.

20. The cooking grill of claim 19, further comprising a fuel feeding mechanism passing through part of the plenum and through the outer chamber wall and situated to provide fuel into a top of the inner chamber.

1/6

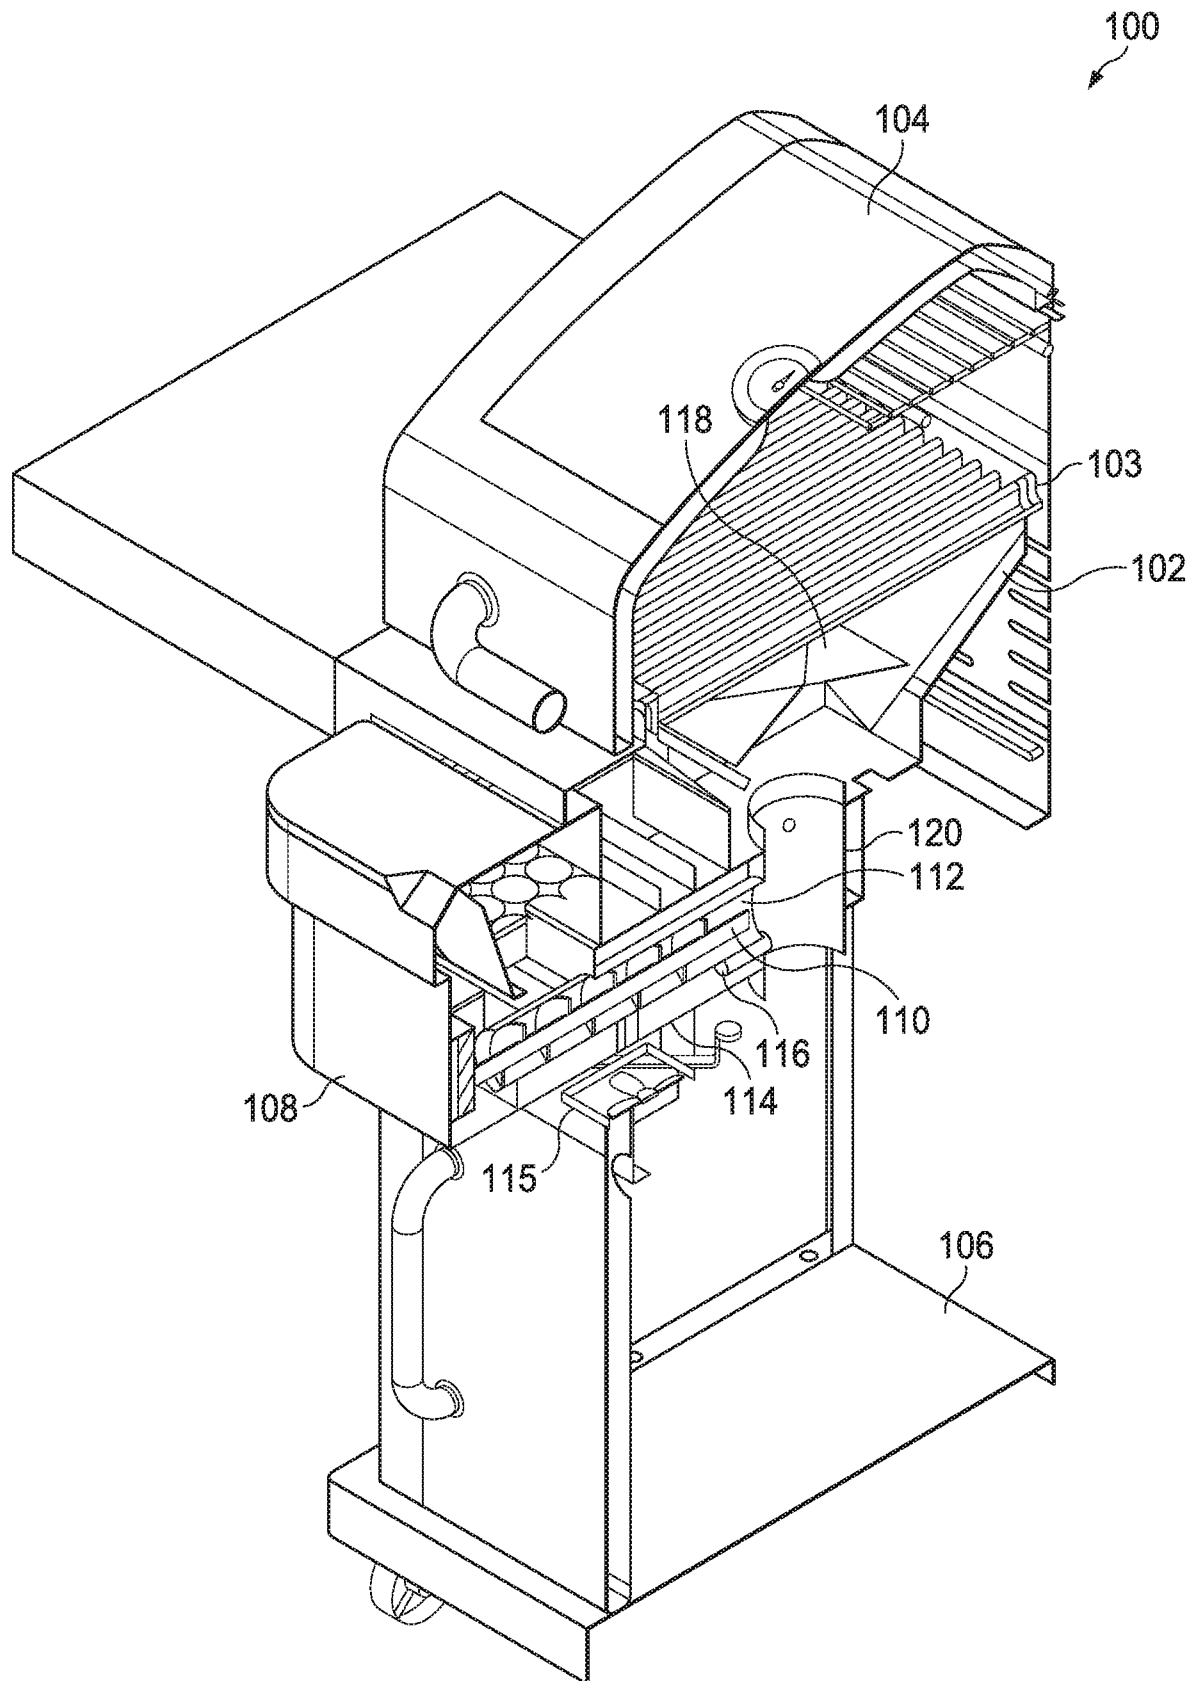


FIG. 1

2/6

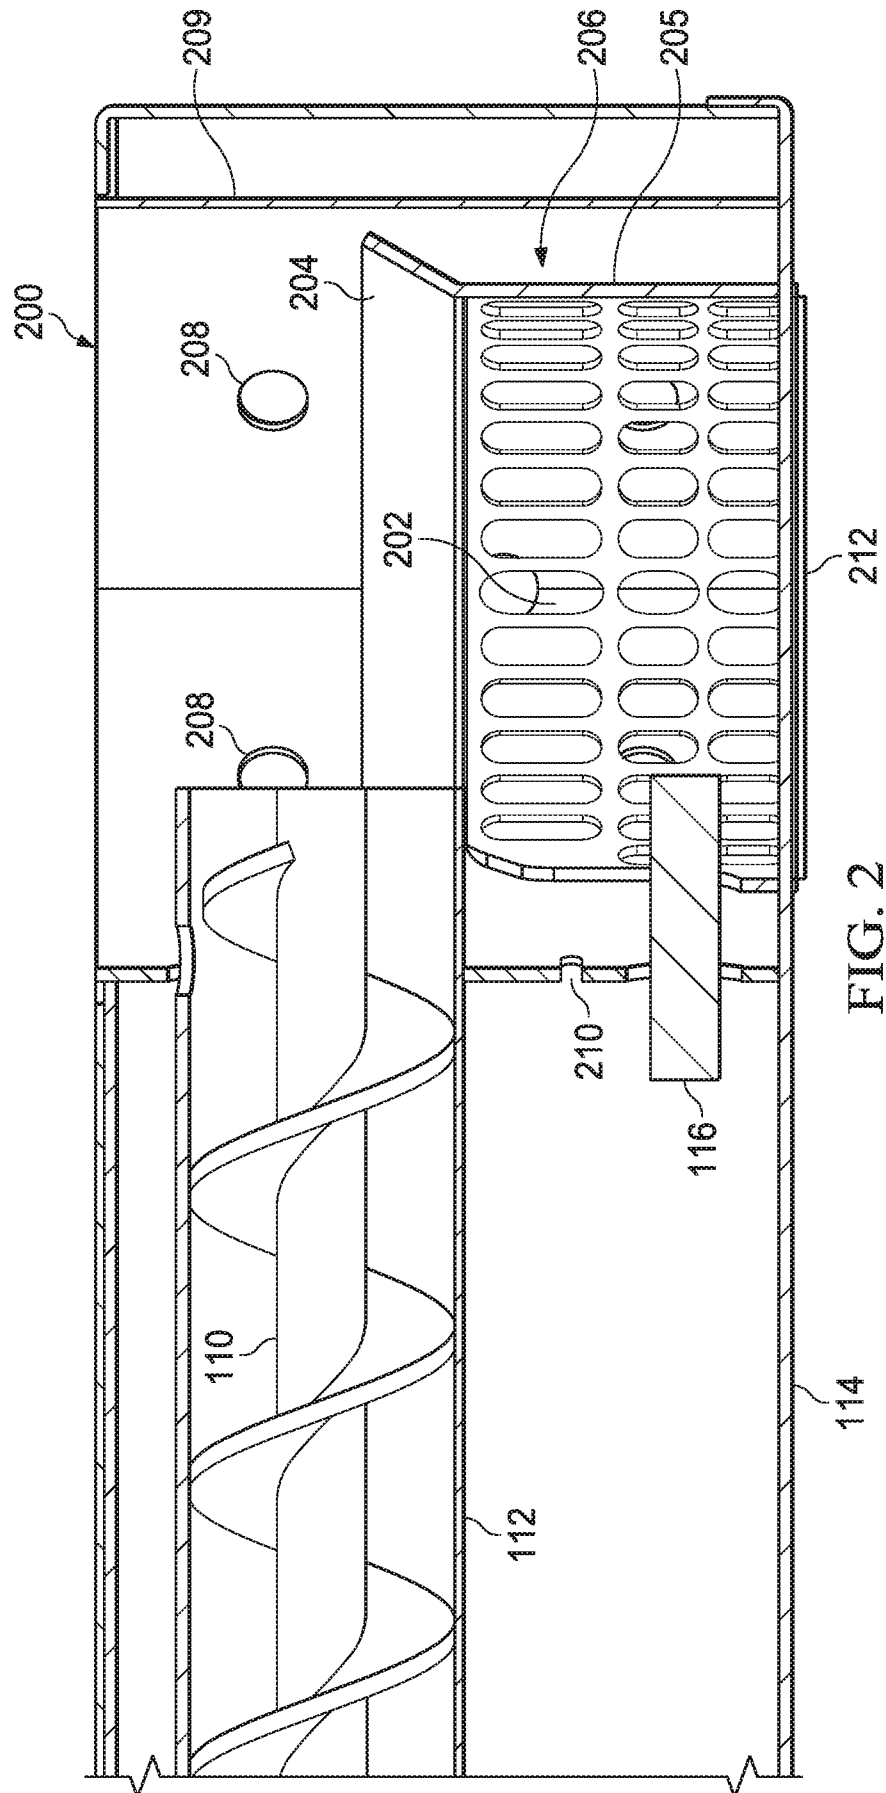


FIG. 2

3/6


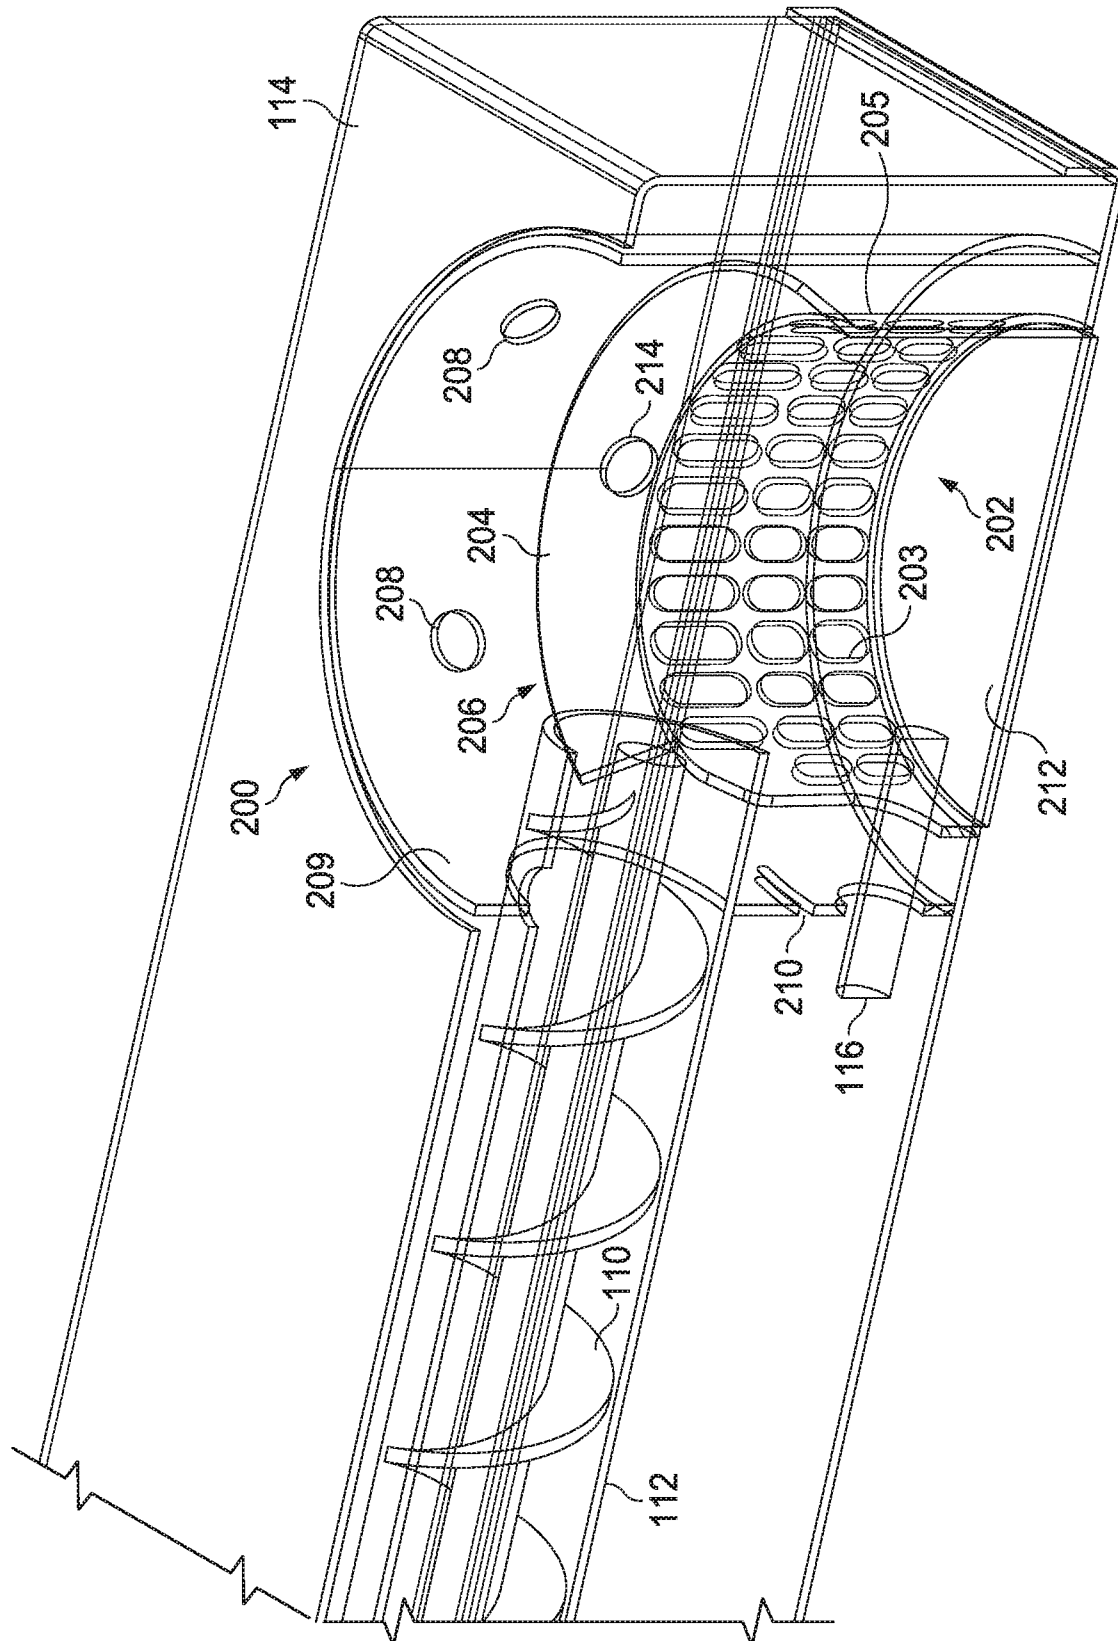


FIG. 3

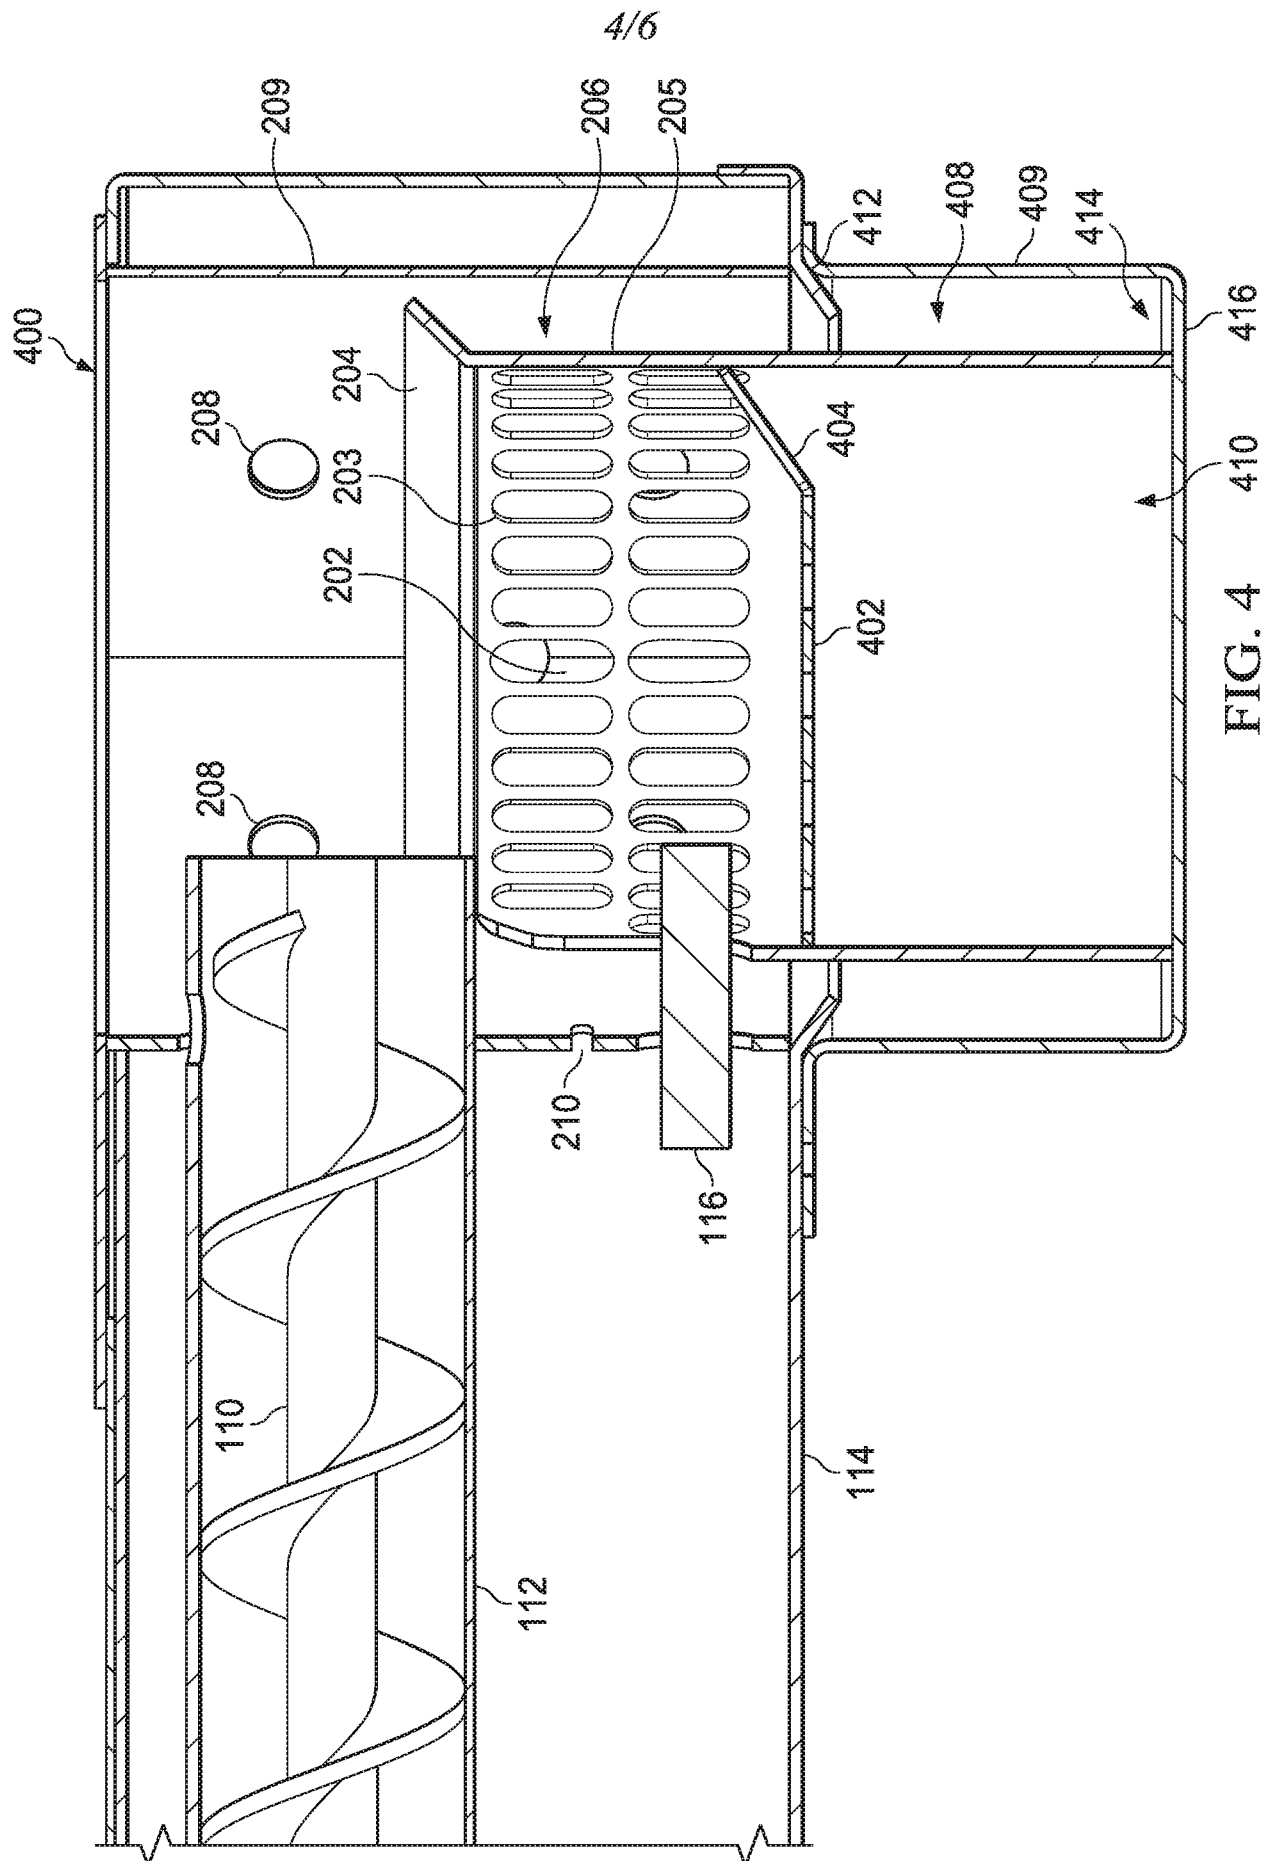

5/6

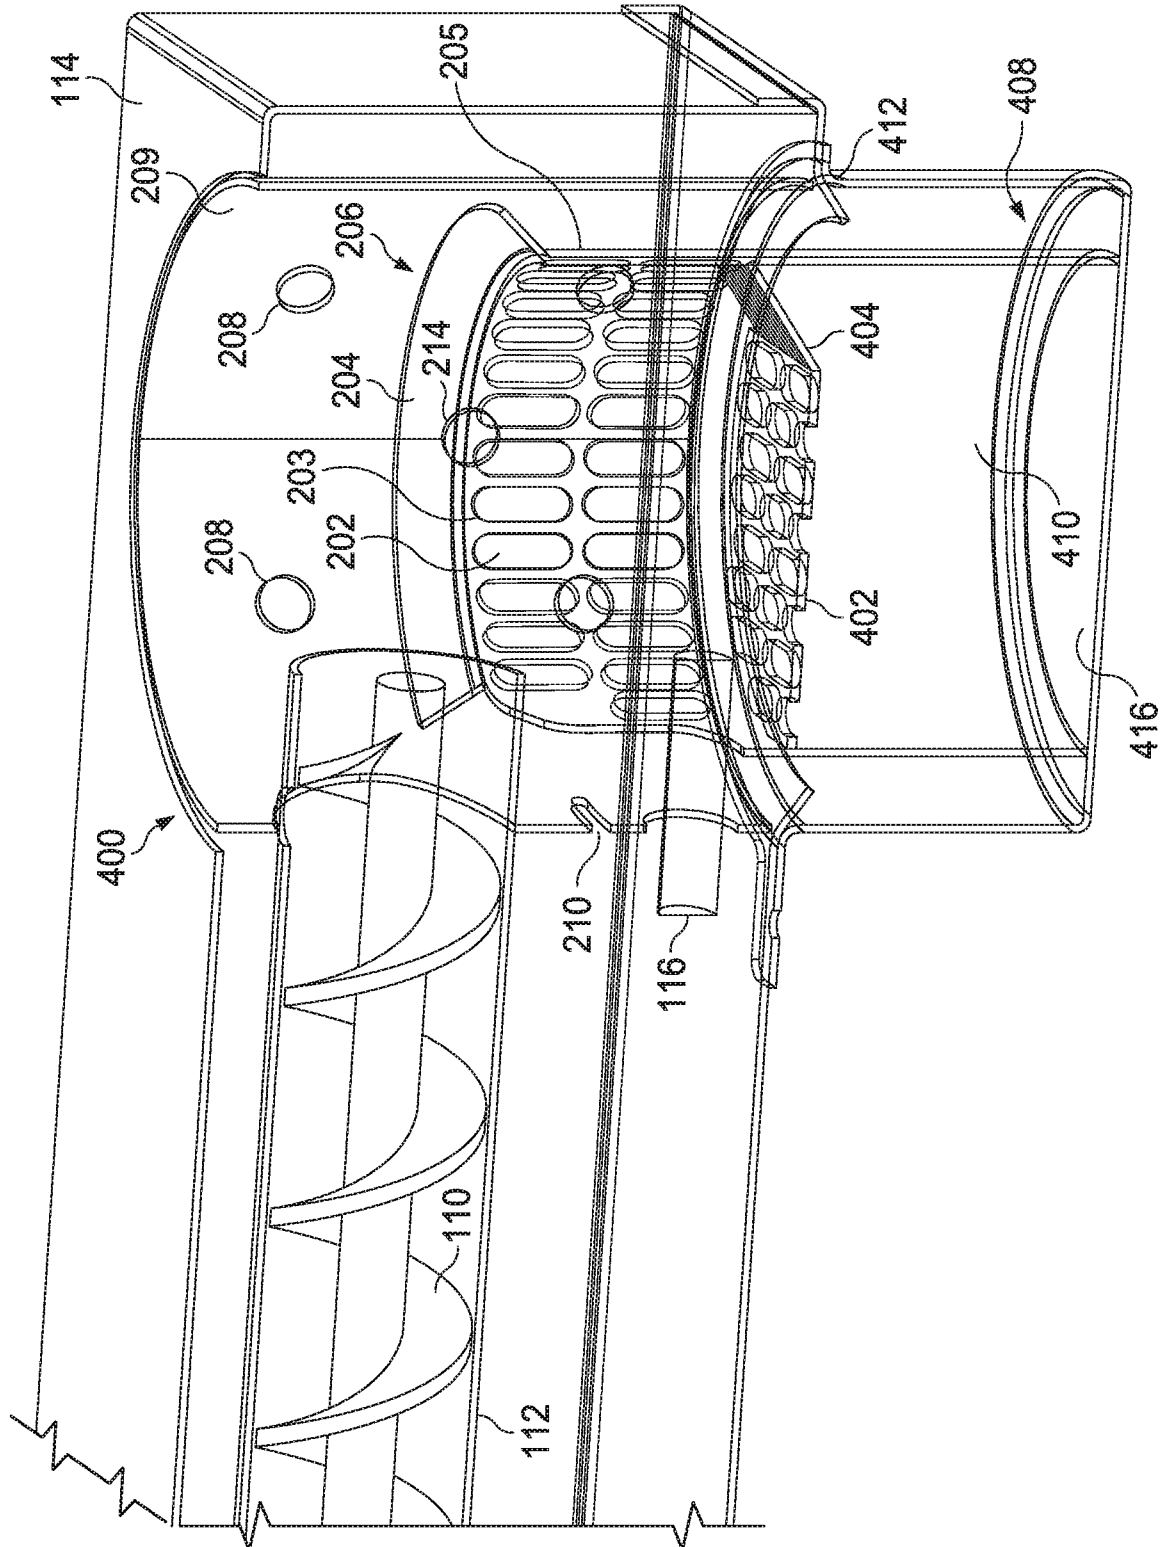


FIG. 5

6/6

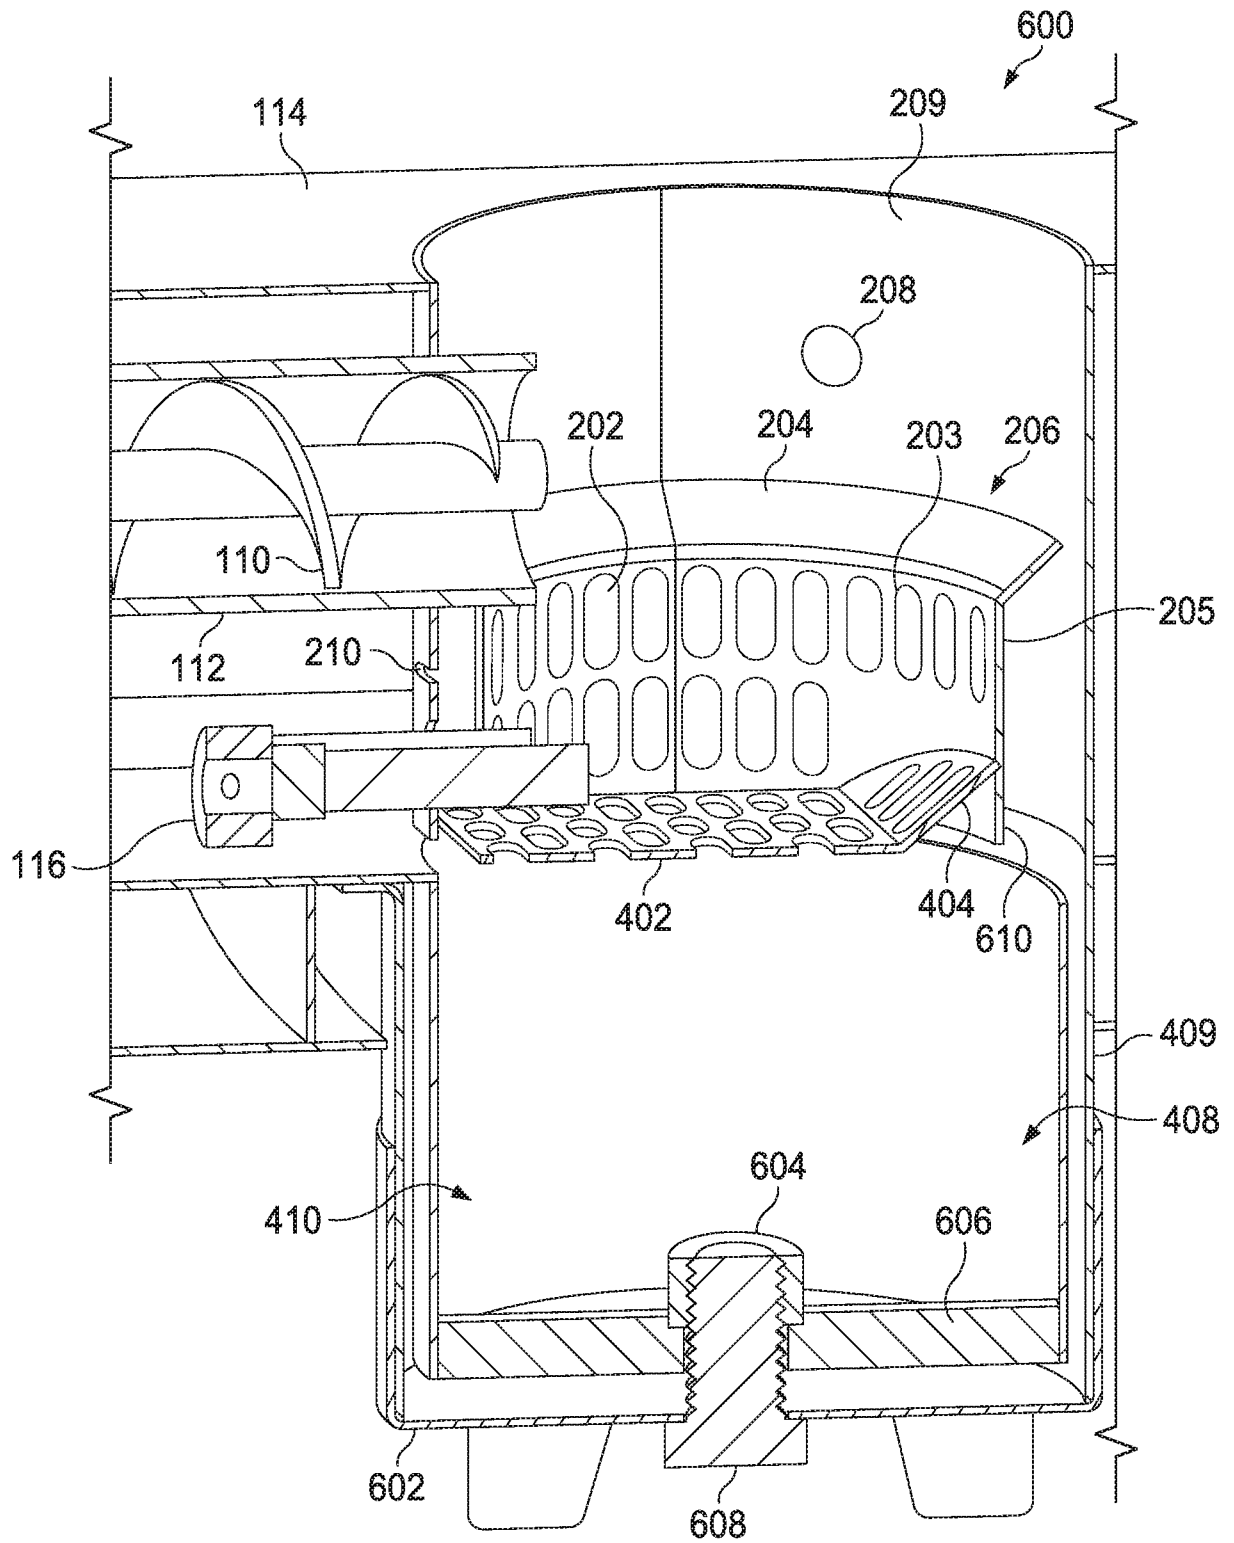


FIG. 6

