



- (51) International Patent Classification:
F28D 20/00 (2006.01) *F25B 23/00* (2006.01)
- (21) International Application Number:
PCT/US2012/021531
- (22) International Filing Date:
17 January 2012 (17.01.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/076,257 30 March 2011 (30.03.2011) US
- (71) Applicant (for all designated States except US): **BATTELLE MEMORIAL INSTITUTE** [US/US]; P.O. Box 999, K1-53, Richland, Washington 99352 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **CUI, Jun** [CN/US]; 3165 Willow Pointe Drive, Richland, Washington 99354 (US). **HOLLADAY, Jamelyn D.** [US/US]; 104116 Heather Drive, Kennewick, Washington 99338 (US).
- (74) Agent: **MATHESON, James D.**; Battelle Memorial Institute, P.O. Box 999 (MSIN K1-53), Richland, Washington 99352 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEM AND PROCESS FOR STORING COLD ENERGY

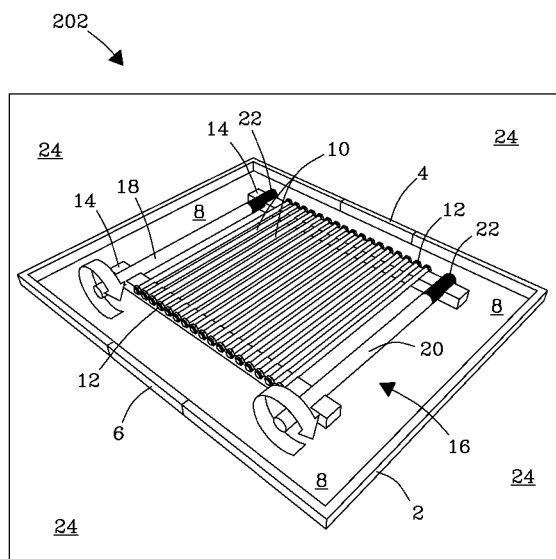


Fig. 3a

(57) Abstract: A system and method for storing cold energy are detailed. The system includes a solid refrigerant in a structured form that stores cold energy. Upon deformation, the solid refrigerant transforms into a high energy deformed state from a low energy non-deformed state. In the deformed state, the solid refrigerant stores cold energy that can be released to a desired location upon demand

SYSTEM AND PROCESS FOR STORING COLD ENERGY

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from U.S. Patent Application No. 13/076,257 filed 30 March 2011 entitled "System and Process for Storing Cold Energy".

FIELD OF THE INVENTION

[0002] The present invention relates generally to thermodynamically stable energy storing systems and methods. More particularly, the invention relates to a system and process for storing cold energy.

BACKGROUND OF THE INVENTION

[0003] In the United States (U.S.), more than 90% of building space cooling and refrigeration is provided by vapor compression (VC) based systems. Modern compressors are highly efficient, but are now approaching their theoretical and technological limits. In addition to the efficiency plateau, VC technology has environmental issues. For example, VC refrigerants such as hydrochlorofluorocarbons (HCFC) or halofluorocarbons (HFC) are a significant source of green house gas (GHG) emissions. Global warming potential (GWP) for VC refrigerants is as high as 1000 times that of CO₂. According to 2008 Buildings Energy Data, with VC as the dominate technology, building space cooling and refrigeration will consume 7.46 quads of primary electricity and

generate 447 million metric tons (MMT) of CO₂ emissions by the year 2030. This will be equivalent to ~5% of primary energy consumption and ~5% of CO₂ emissions in the U.S. alone. As such, there is an urgent need to develop new and affordable cooling technologies to enhance overall energy efficiencies and reduces GHG emissions. A number of alternative technologies are under development including electrocaloric, magnetocaloric, thermoacoustic, and thermoelectric. Magnetocaloric cooling (MC) is currently considered a front runner among these technologies due to its higher efficiency and elimination of HCFC/HFC refrigerants. However, MC is inherently expensive because of the requirement for large magnetic fields and rare earth materials. Recently, an entirely new type of solid-state cooling based on reversible martensitic transformation was disclosed by a group of researchers at the University of Maryland. The new cooling technology called "elastocaloric cooling" (EC) utilizes super-elastic transformation of austenite. EC has three advantages compared to other cooling technologies: 1) EC uses solid refrigerants that are environmentally friendly, completely eliminating need for HCFC/HFC refrigerants, 2) EC has a high efficiency. The Coefficient of Performance (COP) of a jugular refrigerant is 5.8 with a ΔT of about 12°C, and 3) EC is cost-effective because it does not require hydrostatic pressure, which means hermetic seals are not required. In addition, working materials are inexpensive. These advantages position EC to challenge VC as a dominate cooling technology. And, differences between EC and other cooling technologies enable different applications and different EC systems and designs to be envisioned. The present invention relates to a new application of the EC technology and corresponding systems.

SUMMARY OF THE INVENTION

[0004] The invention includes a system and a process for storing cold energy. The system includes: a chamber that defines an environment for storing energy, a regenerator system for storing and releasing energy, and a heat exchange system for moving the energy in and out of the system.

[0005] In one embodiment, the process includes: 1) deforming (stressing) a preselected solid state material (referred hereafter as "solid refrigerant") at a given temperature (T_0) from a first phase (referred as the high temperature phase) that is thermodynamically stable without the applied stress at (T_0) to a second phase (referred as the low temperature phase) that is thermodynamically stable without the applied stress at a temperature lower than (T_0) and is thermodynamically stable with the applied stress at (T_0). Transformation of the solid refrigerant from the first phase to the second phase results in the release of a preselected quantity of latent heat due to the difference between the total free energy (ΔG°) of the first phase and the second phase of the solid refrigerant, 2) keeping the temperature of the solid refrigerant at the given temperature by exchanging the just generated heat with the ambient, 3) retaining the solid refrigerant in the second phase for a preselected time to keep the solid refrigerant ready to absorb previously released latent heat. This step is analogous to storing cold energy that is equal to the previously released latent heat, 4) undeforming the solid refrigerant by unloading the stress previously applied to the solid refrigerant to transform the second phase to the first phase. Transformation of the solid refrigerant from the second phase to the first phase results in the absorption of latent heat that was previously released. This step is analogous to generating cold energy that is equal to the released latent heat, 5) cooling the heat exchange medium with the cold refrigerant, and 6) distributing

the cold medium to cool a preselected environment, volume, or space location to a desired or preselected temperature.

[0006] In another embodiment, the process includes: 1) inducing transformation of the solid refrigerant to transform it from the high temperature phase to the low temperature phase by exposing the solid refrigerant to an ambient environment when the ambient temperature is sufficiently low for the low temperature phase to exist without the bias of mechanical energy. For example, in a desert, the temperature difference between daytime and nighttime temperatures can exceed 70 °C. Similarly, in some embodiments, the high temperature phase of the solid refrigerant may be thermodynamically stable in the daytime but not thermodynamically stable in the nighttime. Likewise, in some embodiments, the low temperature phase may be thermodynamically stable at nighttime but not thermodynamically stable during the daytime, 2) retaining the solid refrigerant in the second phase for a preselected time. This step is analogous to storing the cold energy provided by a cold ambient environment. As the ambient temperature increases with time, the solid refrigerant becomes stressed by the retaining mechanism, 4) releasing the stress on the solid refrigerant by removing (e.g., unlocking) the retaining mechanism. The transformation of the solid refrigerant from the second phase to the first phase results in the absorption of latent heat. This step is analogous to generating cold energy equal to the released latent heat, 5) cooling the heat exchange medium with the cold refrigerant, and 6) distributing the cold medium to cool a preselected environment, volume, or space location to a desired or preselected temperature.

[0007] In another embodiment, the process includes: 1) energizing a preselected solid refrigerant in a structured form releasing a quantity of heat therefrom to heat an exchange medium in a first location, 2) equilibrating the

heated exchange medium between the first location at a higher temperature and a second location at a lower temperature to establish a temperature equilibrium between the first location and the second location, 3) storing cold energy in the solid refrigerant in the first location, 4) de-energizing the solid refrigerant absorbing a quantity of heat to cool the exchange medium in the first location, and 5) distributing the cold exchange medium to cool a preselected location, device, or environment.

[0008] In one embodiment, the solid refrigerant is an alloy composed of two metals. In one embodiment, the alloy includes two metals, nickel (Ni) and titanium (Ti), with an atomic ratio given by $(50 - X) : (50 + X)$, where (X) varies from 0 to 10. In another embodiment, the solid refrigerant is an alloy composed of at least 3 metals. In other embodiments, the solid refrigerant is a multi-component alloy. Multi-component alloys of the invention can include, e.g., Cu, Al, Ni, Zn, Ti, Hf, Zr, Fe, Co, Mn, Ga, Bi, Sr, C, including combinations of these various constituents.

[0009] In one embodiment, the first phase is cubic and the second phase is monoclinic. In another embodiment, the first phase is tetragonal, rhombohedral, or orthorhombic. In yet another embodiment, the second phase is tetragonal, rhombohedral, or orthorhombic.

[0010] In a preferred embodiment, the solid refrigerant has a structured form or shape selected from rods, bars, wires, wafers, discs, plates, buttons, pellets, spheres, beads, particles, ribbons, meshes, tubes, tapes, pencils, or other structured forms, including combinations of these forms. In various embodiments, the structured forms are fashioned by a method selected from: pressing, pelletizing, casting, extruding, stretching, bending, twisting, including combinations of these processes.

[0011] In one embodiment, the solid refrigerant has a tolerance for deformation between about 0% and about 10%. In another embodiment, the solid refrigerant has a tolerance for deformation between about 0% and about 25%. In some embodiments, the solid refrigerant has a tolerance for deformation up to about 21% in one dimension. In some embodiments, the solid refrigerant has a tolerance for deformation between about 0% and about 100%.

[0012] In some embodiments, the system stores cold energy at night when energy cost is low, and deploys the stored cold energy during the daytime when energy cost is high.

[0013] A more complete appreciation of the invention will be readily obtained by reference to the following description of the accompanying drawings in which like numerals in different figures represent the same structures or elements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] **FIG. 1** shows an exemplary cold storage system, according to one embodiment of the invention.

[0015] **FIG. 2** presents exemplary steps of a process for storing cold, according to an embodiment of the process of the invention.

[0016] **FIGs. 3a-3d** illustrate exemplary process steps for energizing, heat releasing, cold storing, and cold releasing in accordance with an embodiment of the process of the invention.

[0017] **FIG. 4** is a differential scanning calorimetry (DSC) plot showing the thermal cycling of a bi-metal alloy, according to one embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] The present invention includes a system and process for storing cold energy. The system and method of the invention differ from other energy storage methods known in the conventional art in that they do not involve storing electric energy, chemical energy, or mechanical energy. Storing cold energy in accordance with the invention involves release or absorption of latent heat (Q) associated with a reversible solid-to-solid phase transformation. The parent (or first) phase is referred to "austenite". The product (or second) phase is referred to as "martensite". Temperature at which austenite is thermodynamically stable is higher than that of martensite, and the crystallographic symmetry of austenite is higher than that of martensite. The phase transformation can be induced by a temperature change or a stress, meaning the phase transformation can be driven by both thermal energy and mechanical energy. While the present invention is described herein with reference to the preferred embodiments thereof, it should be understood that the invention is not limited thereto, and various alternatives in form and detail may be made therein without departing from the scope of the invention. No limitations are intended. **FIG. 1** shows an exemplary system **100** for storing cold energy, according to one embodiment of the invention. System **100** includes a containment chamber **2** or other suitable enclosure environment constructed of a thermally insulating material. An exemplary construction includes an exterior metal casing that is insulated with an inner insulated lining constructed, e.g., of a plastic material, glass insulating fibers, or another thermally insulating material. No limitations are intended. Chamber **2** includes at least one entrance **4** and at least one exit **6** that allows exchange of a heat exchange medium **8** into, or out of, chamber **2**. Number of entrances **4** and exits **6** installed in chamber **2** is not limited. In addition, entrance

4 and exit 6 may be opened or closed to control release of heat energy or cold energy from chamber 2. In the present embodiment, solid refrigerant in chamber 2 is in the form of structured rods 10. While rods 10 are described hereafter, shapes and forms of solid refrigerant are not intended to be limited thereto. In the present embodiment, rods 10 have exemplary dimensions that include, e.g., a preselected length (e.g., 2-meters) and a preselected diameter (e.g., 1-cm diameter), but dimensions are not intended to be limiting. Rods 10 are coupled horizontally to adjacent rods 10 via fasteners 12 positioned at preselected locations along, or at distal ends of, each rod 10 and mount horizontally to respective array supports 14 to form a deformation array 16 (e.g., a parallel array). Location of fasteners 12 is not limited as will be understood by those of ordinary skill in the manufacturing arts. Fasteners 12 include, but are not limited to, e.g., hangers, clamps, clips, pins, bolts, screws, staples, hooks, supports, or other suitable mounting means, including combinations of these various fasteners. While deformation array 16 includes horizontally oriented rods 10, orientation of rods 10 is not limited thereto. For example, in some other embodiments, rods 10 may be mounted vertically forming a vertical deformation array 16. Other suitable structures and configurations for the solid refrigerant can be envisioned. As such, all configurations or arrangements of the solid refrigerant as will be envisioned by those of ordinary skill in the art in view of this disclosure are within the scope of the invention. No limitations are intended. Deformation array 16 couples to an upper screw drive 18 and a lower screw drive 20 that (define a drive assembly 18). Screw drives 18 and 20 couple to deformation array 16 via array supports 14. Array supports 14 provide mounting support for rods 10 in array 16. Screw drives 18 and 20 include a tension member 22 (e.g., a spring) positioned to deliver a deformation stress to rods 10 (and the solid refrigerant therein). Deformation of rods 10 (and solid refrigerant

therein) is obtained in concert with rotation of screw drives **18** and **20**. For example, screw drives **18** and **20** rotate incrementally, e.g., in a clockwise direction to deliver a progressively increasing stress to rods **10** in concert with tension member **22** that deforms rods **10** and the solid refrigerant therein upon demand. Screw drives **18** and **20** rotate, e.g., in a counter-clockwise direction to remove stress delivered to rods **10** and the solid refrigerant contained in the refrigerant rods **10**. Rotation of screw drives **18** and **20** is provided, e.g., in concert with a drive motor (not shown), but mechanism for rotation is not limited thereto. Stress provided by upper (top) screw drive **18** and lower (bottom) screw drive **20** to refrigerant rods **10** physically deforms the solid refrigerant and transforms the solid refrigerant contained within rods **10** from a low-energy non-deformed (i.e., austenite) state to a high-energy deformed (martensite) state. Once the required deformation of the solid refrigerant in the rods **10** is obtained, screw drives **18** and **20** stop rotating and lock in position in concert with one or more locks (not shown) that maintain and retain the stress in, and corresponding deformation of, refrigerant rods **10**. Upper screw drive **18** and lower screw drive **20** may be configured to rotate synchronously or non-synchronously, which allows the array **16** of refrigerant rods **10** to be deformed simultaneously or non-simultaneously. Screw drives **18** and **20** retain the deformation of the solid refrigerant in rods **10** until the stress to refrigerant rods **10** is released, e.g., by unlocking or releasing the locking mechanism. Chamber **2** contains a heat exchange medium **8** that allows extraction of thermal energy from the refrigerant rods **10**. Examples of suitable heat exchange media **8** for use in conjunction with the invention include, but are not limited to, e.g., air, water, organic liquids including, e.g., ethanol, or other heat exchange media **8**, including combinations of these various media. No limitations are intended. Chamber **2** further includes at least one entrance **4** and at least one exit **6** that

provides a pathway for the heat exchange medium **8** to move in and out of chamber **2**.

[0019] **FIG. 2** shows exemplary steps of a process **200** for storing cold, energy, according to an embodiment of the invention. **{START}**. In a first step **{202}** illustrated in **FIG. 3a**, refrigerant rods **10** containing solid refrigerant is energized. The term "energized" or "energizing" as used herein means the solid refrigerant in its structured (e.g., rod) form is deformed in such a way as to force the solid refrigerant from the non-deformed, low-energy austenite state into the high-energy martensite state, or vice versa. In step **{202}**, entrances **4** and exits **6** to chamber **2** are closed. Rods **10** are mechanically deformed, e.g., in concert with one or more screw drives **18** and **20** (**FIG. 1**), which deforms the solid refrigerant in rods **10**. This process serves to release latent heat (Q_L) from the solid refrigerant into chamber **2**. Release of heat (Q_L) from rods **10** into chamber **2** energizes the solid refrigerant in rods **10**, preparing the solid refrigerant to absorb heat (Q_A) in a subsequent step. Total heat (Q_T) released by the rods **10** in deformation array **16** into chamber **2** is given by Equation **[1]**:

$$Q_T = (Q_L) \times (V \text{ or } m) \quad [1]$$

[0020] Here, (Q_L) is the quantity of latent heat (J/g or J/cc) released by rods **10**, (V) is the volume (e.g., cc) of solid refrigerant in rods **10**, and (m) is the mass (e.g., grams) of solid refrigerant in rods **10**. Rods **10** in the Martensite state have preferred temperatures from about 23 °C to about 91 °C, but are not intended to be limited thereto. Change in temperature of the heat exchange medium **8** by release of heat (Q_L) from rods **10** is given by Equation **[2]**:

$$\Delta T = Q_A / C_p \quad [2]$$

[0021] Here, (ΔT) is the change in temperature, (Q_A) is the quantity of latent heat absorbed by the heat exchange medium 8 in chamber 2, and (C_p) is the specific heat capacity of the heat exchange medium 8. (Q_A) is typically less than (Q_T) due to the lost heat exchange efficiency. Thus, temperature reached in chamber 2 is a function of the total heat (Q_A) absorbed by the heat exchange medium 8 (i.e., that is released from the refrigerant rods 10) and the heat capacity (C_p) of the heat exchange medium 8 in chamber 2. In some embodiments, the heat exchange medium 8 in chamber 2 experiences a temperature increase of at least about 2 °C above the ambient temperature. In other embodiments, the temperature increase of the heat exchange medium in chamber 2 is at least about 2 °C above the ambient temperature to about 70 °C above the ambient temperature in chamber 2. As will be understood by those of ordinary skill in the thermodynamic arts, the range of temperatures of the heat exchange medium 8 in chamber 2 can range from ambient temperature to the highest temperature reached by rods 10 as they absorb or release latent heat (Q_L) in chamber 2. Thus, no limitations are intended. In another step {204} illustrated in FIG. 3b, exit 6 to chamber 2 is opened, allowing latent heat (Q_L) accumulated in chamber 2 to be released from chamber 2 through exit 6 by thermal equilibration of the exchange medium 8 in a target area 22, location 22, or environment 22 external to chamber 2 that is at ambient temperature. Release of heat (Q_L) from chamber 2 cools chamber 2, allowing the temperature in chamber 2 to reach thermal equilibrium with the environment 22 (target location or area) external to chamber 2. In some embodiments, step {202} and step {204} are performed separately. In some embodiments, step {202} and step {204} are

performed simultaneously to save time. In another step {206} illustrated in FIG. 3c, once temperature equilibrium is reached in environment 22 external to chamber 2, exit 6 to chamber 2 is closed. Upper screw drive 18 and lower screw drive 20 are locked in position to maintain the stress on refrigerant rods 10. Locking of rods 10 in system 100 retains the solid refrigerant in the high-energy Martensite state, which is otherwise thermodynamically unstable. In this locked state, system 100 is ready to cool chamber 2 upon demand. Locking of screw drives 18 and 20 can be performed, e.g., in conjunction with a ratchet gear (not shown) or other similar locking device as will be understood by those of ordinary skill in the mechanical arts. In a heat absorbing step {208} illustrated in FIG. 3d, upper screw drive 18 and lower screw drive 20 are unlocked, releasing the stress exerted on refrigerant rods 10, which transforms the solid refrigerant in rods 10 back to the low-energy austenite state. Transformation of the solid refrigerant to the low-energy austenite state allows the solid refrigerant in rods 10 to absorb heat (Q_A) from the heat exchange medium 8 contained within chamber 2. The temperature of the heat exchange medium 8 within chamber 2 begins to decrease. In a final step {210} illustrated in FIG. 3d, the temperature of the exchange medium 8 in chamber 2 reaches a desired or selected temperature, exit 6 to chamber 2 is opened, which distributes the cold medium to target area 22. The hot exchange medium 8 in target area 22 external to chamber 2 enters chamber 2, which serves to cool target area 22. In some embodiments, step {208} and step {210} are performed separately. In some embodiments, step {208} and step {210} are performed simultaneously to save time. In some embodiments, system 100 stores cold energy in refrigerant rods 10 that are placed in a preselected location or environment at night when the temperature is low or the total amount of energy required for the system to store cold energy is

low (e.g., when energy costs are low) and deploys the cold energy stored in the solid refrigerant during the daytime when energy demands are higher. **{END}**.

Solid Refrigerant Materials

[0022] Solid refrigerants in accordance with the invention include, but are not limited to, e.g., alloys and metal-containing alloys that provide preselected changes in enthalpy for intended applications. In some embodiments, alloys include metals and materials including, but not limited to, e.g., nickel (Ni), aluminum (Al), titanium (Ti), copper (Cu), zinc (Zn), titanium (Ti), hafnium (Hf), zirconium (Zr), iron (Fe), cobalt (Co), manganese (Mn), gallium (Ga), bismuth (Bi), strontium (Sr), carbon (C), including combinations of these materials. In some embodiments, the alloy is a bi-metal alloy. In one embodiment, the bi-metal alloy comprises nickel (Ni) and titanium (Ti). In one embodiment, the bi-metal alloy includes an atomic ratio $[(50 + X) : (50 - X)]$ for each metal of the alloy, where $X = 0$ to 10 . In one embodiment, each metal is about 50% of the total metal content by mole in the alloy. In other embodiments, the alloy contains multiple metals or is a multi-component alloy. Other alloys are within the scope of the invention. Thus, no limitations are intended.

Structured Forms

[0023] Solid refrigerants of the invention may take any structured form or shape that allows the solid refrigerant material to be: 1) deformed in a Martensite state, 2) retained (i.e., locked) in the deformed state for a preselected period, and 3) subsequently released (i.e., unlocked) and returned to the non-deformed or austenite state. Structured forms and shapes include, but are not limited to,

e.g., rods, bars, wires, wafers, discs, plates, buttons, pellets, spheres, beads, particles, ribbons, meshes, tubes, tapes, pencils, or other structured forms and shapes, including combinations of these various forms and shapes. No limitations are intended. In various embodiments, the structured forms or shapes may be fashioned by processes including, but not limited to, e.g., pressing, casting, extruding, stretching, bending, twisting, pelletizing, or other manufacturing processes including combinations of these various processes. No limitations are intended.

Deformation Tolerances for Solid Refrigerants

[0024] Solid refrigerants have tolerances for deformation that range from 0% to about 10% by deformation strain (e.g., 1 cm to $\leq$ 1.1 cm; or 1 meter to $\leq$ 1.1 meters, and etc.). In other embodiments, deformation tolerances range from about 0% to about 25% by deformation strain (e.g., 1 cm to $\leq$ 1.25 cm; or 1 meter to $\leq$ 1.25 meters, and etc.). In yet other embodiments, deformation tolerances range from about 0% to about 100% by deformation strain (e.g., 1 cm to $\leq$ 2 cm; or 1 meter to $\leq$ 2 meters, and etc.). In still yet other embodiments, deformation tolerances range from about 0% to about 200% by deformation strain (e.g., 1 cm to $\leq$ 3 cm; or 1 meter to $\leq$ 3 meters, and etc.). The solid refrigerant can be shaped so as to have a structured form that provides preselected deformation tolerances for intended applications and devices.

Cooling Energy Density

[0025] The present invention completely eliminates need for halofluorocarbon (HCFC) refrigerants and other conventional refrigerants known

in the art that are environmentally unfriendly or otherwise problematic. Moreover, the present invention, for the first time, provides a way to store cold energy in a form other than ice or by gas liquefaction. Solid refrigerants described herein are more efficient than conventional HCFC refrigerants (e.g., SUVA® R410, E. I. du Pont de Nemours and Company (DuPont), Wilmington, DE, USA) known in the art. Systems of the invention described herein further provide at least a 50% better efficiency difference than conventional vapor-compression cooling systems known in the art. Embodiments of the invention also provide a smaller footprint for operation. For example, storing cold energy in accordance with the invention has the potential to provide volume/space savings due to cooling energy density differences of the solid refrigerant. For example, a bi-metal alloy containing, e.g., 50% nickel (Ni) and 50% titanium (Ti), has a power density of about 130 J/cm^3 . A conventional HCFC refrigerant has a power density of less than 3 J/cm^3 . **FIG. 4** presents a differential scanning calorimetry (DSC) plot that shows repeated thermal cycling of a (Ni)-(Ti) bi-metal alloy. Latent heat (Q_L) remains the same regardless of how phase transformation is induced. Phase transformation of the solid refrigerant may be caused by a mechanical stress, by temperature changes, in concert with magnetic fields (e.g., magnetic cooling), in concert with electrical fields (e.g., electrocaloric cooling), or by various combinations of these transformation stressors. Thus, the invention can be expected to find application in various industries. Applications include, but are not limited to, e.g., air conditioning, and air conditioning devices; large-scale devices for home, transportation applications and systems (e.g., delivery vehicles), and like devices and like applications; refrigeration devices; and like applications.

[0026] While exemplary embodiments of the present invention have been shown and described herein, it will be apparent to those skilled in the art that

many changes and modifications may be made without departing from the invention in its true scope and broader aspects. The appended claims are therefore intended to cover all such changes and modifications as fall within the scope of the invention.

CLAIMS

What is claimed is:

1. A process for storing cold energy, the process comprising:
deforming a preselected solid refrigerant to transform the solid refrigerant from a non-deformed state to a deformed state to release or absorb a preselected quantity of heat; and
retaining the solid refrigerant in the deformed state to store cold energy in the solid refrigerant.
2. The process of Claim 1, wherein the deformed state is a martensite state.
3. The process of Claim 1, wherein the non-deformed state is an austenite state.
4. The process of Claim 1, wherein the solid refrigerant in the non-deformed state includes a crystal structure that is cubic, tetragonal, orthorhombic, or rhombohedral.
5. The process of Claim 1, wherein the solid refrigerant in the deformed state includes a crystal structure that is tetragonal, orthorhombic, or rhombohedral, or monoclinic.
6. The process of Claim 1, wherein the retaining step includes exchanging heat released from the solid refrigerant in a first location to a second location to establish a temperature equilibrium between the first and the second locations.

7. The process of Claim 1, wherein the solid refrigerant includes a deformable structured shape or form.
8. The process of Claim 1, wherein the solid refrigerant is a bi-metal alloy comprising nickel (Ni) and titanium (Ti).
9. The process of Claim 9, wherein the solid refrigerant comprises nickel at a concentration between 0 atom % and 60 atom %.
10. The process of Claim 8, wherein the solid refrigerant is a tri-metal alloy.
11. The process of Claim 1, wherein the solid refrigerant has a strain tolerance for deformation that is at least about 10% in at least one dimension.
12. The process of Claim 1, wherein the solid refrigerant has a strain tolerance for deformation of up to about 21% in at least one dimension.
13. The process of Claim 1, wherein the deforming includes a process selected from the group consisting of: pressing, extruding, stretching, bending, pelletizing, casting, twisting, compressing, and combinations thereof.
14. The process of Claim 1, further including releasing cold energy stored in the solid refrigerant by releasing the solid refrigerant from the deformed state to the non-deformed state.


15. The process of Claim 14, wherein the releasing includes cooling a preselected heat exchange medium selected from air, water, or an organic fluid.
16. The process of Claim 15, wherein the organic fluid is ethanol.
17. The process of Claim 14, wherein the releasing includes deploying the cold energy released from the solid refrigerant to reduce temperature in a preselected location, volume, or device.
18. A system for storing cold energy, the system comprising:
a deformation source operatively coupled to a solid refrigerant in a structured form that can be mechanically deformed, the deformation source deforms the solid refrigerant transforming same from a non-deformed state to a deformed state which releases heat to a heat exchange medium, or releases the solid refrigerant from a deformed state to a non-deformed state which stores cold energy therein for distribution to a selected location, device, or environment.
19. The system of Claim 18, wherein the solid refrigerant includes a deformable structured shape or form.
20. The system of Claim 18, wherein the solid refrigerant is a bi-metal alloy comprising nickel (Ni) and titanium (Ti).
21. The system of Claim 18, wherein the solid refrigerant is an alloy that comprises nickel at a concentration between 0 atom % and 60 atom %.
22. The system of Claim 18, wherein the solid refrigerant is a tri-metal alloy.

23. The system of Claim 18, wherein the solid refrigerant has a deformation tolerance that is at least about 10% in at least one dimension.
24. The system of Claim 18, wherein the deformation source is a deformation array.
25. The system of Claim 18, further including a locking member that retains the solid refrigerant in the deformed state or the non-deformed state that allows storage and release of cold energy from the solid refrigerant.
26. The system of Claim 25, wherein the locking member includes a screw-drive.
27. The system of Claim 18, wherein deformation of the solid refrigerant retains cold energy therein without leakage or change of energy state.
28. The system of Claim 18, wherein the solid refrigerant is configured to cool a preselected thermal exchange medium selected from the group consisting of: air, water, ethanol, and combinations thereof.
29. The system of Claim 18, wherein the solid refrigerant is configured to cool a preselected device, location, or environment when cold energy is released therefrom.
30. The system of Claim 18, further including a containment chamber that releases latent heat and distributes cold energy stored and released by said solid refrigerant.


31. A process for storing cold energy, the process comprising:

- energizing a preselected solid refrigerant in a structured form releasing a quantity of heat therefrom to heat an exchange medium in a first location;
- equilibrating the heated exchange medium between the first location at a higher temperature and a second location at a lower temperature to establish a temperature equilibrium between the first location and the second location;
- storing cold energy in the solid refrigerant in the first location; and
- de-energizing the solid refrigerant absorbing a quantity of heat to cool the exchange medium in the first location; and
- distributing the cold exchange medium to cool a preselected location, device, or environment.

1/7

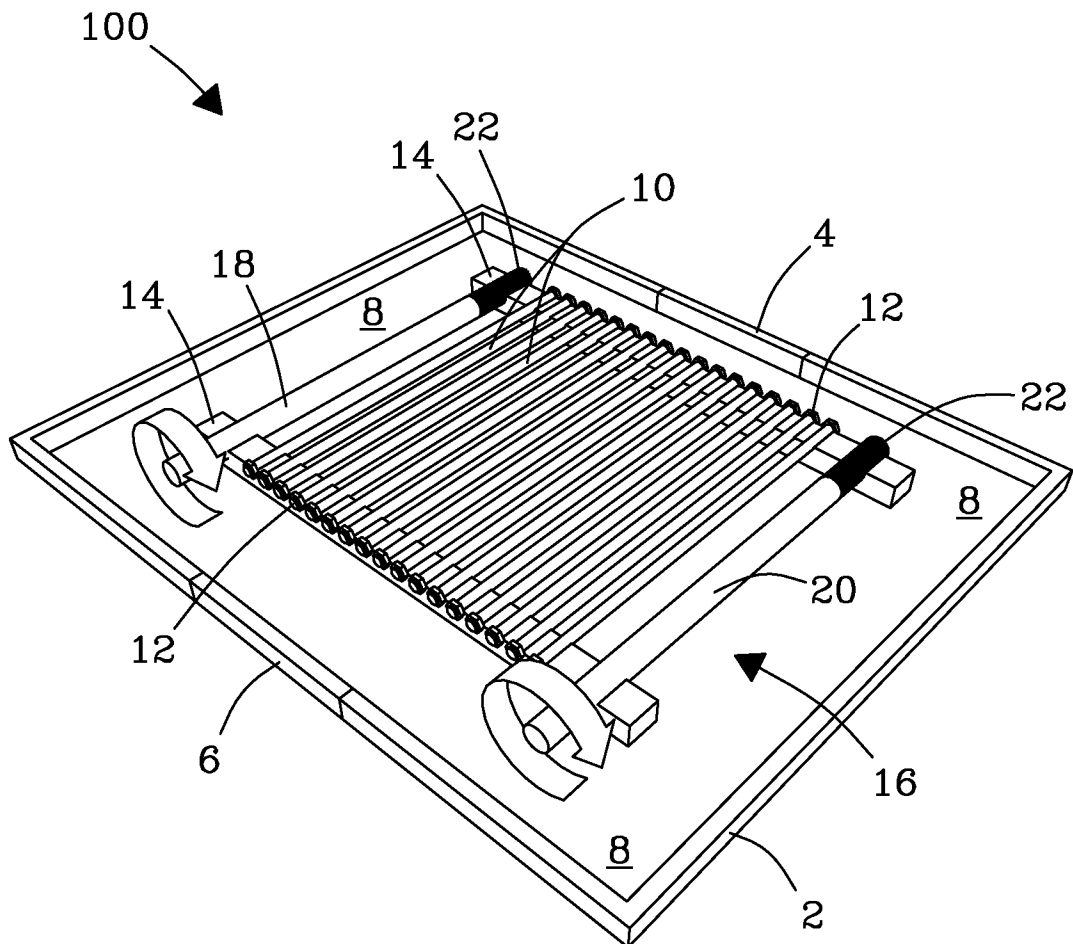*Fig. 1*

2/7

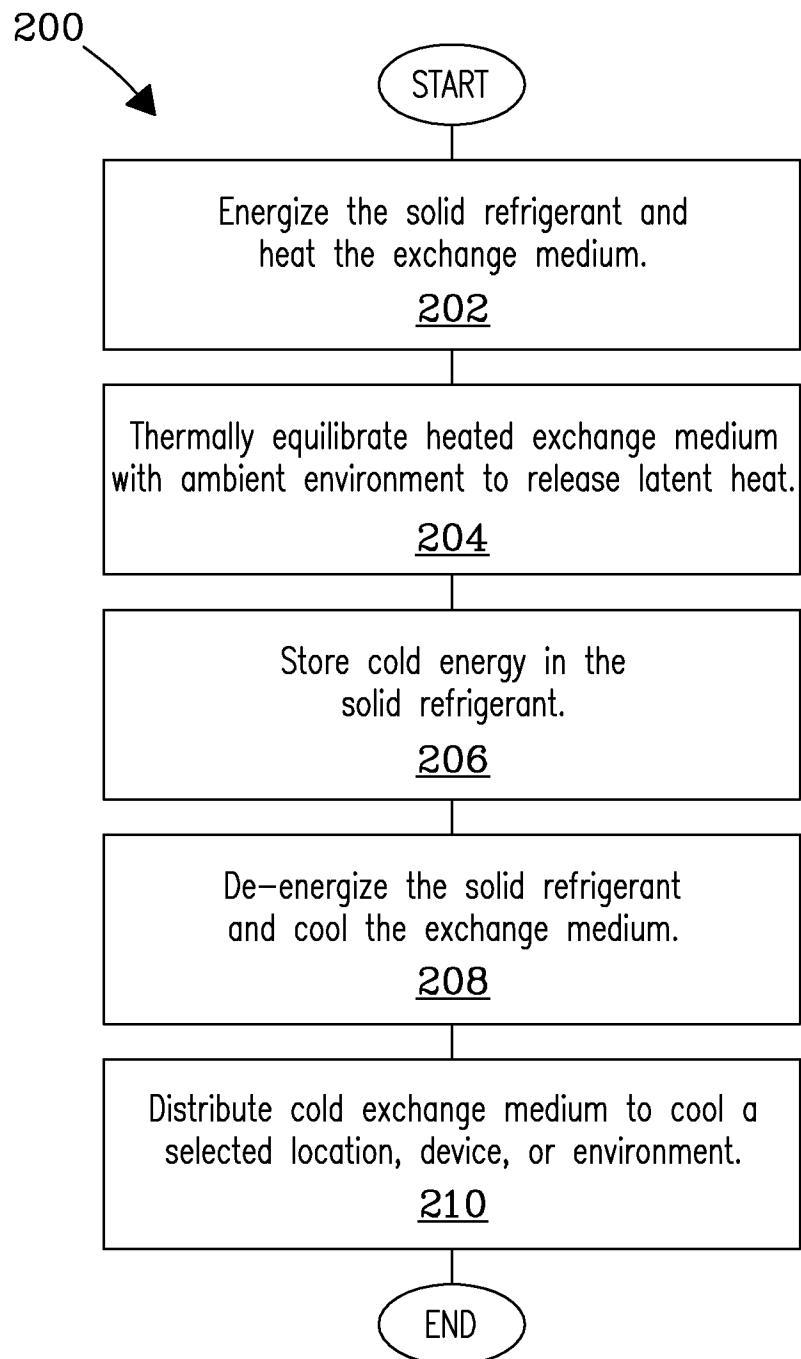*Fig. 2*

3/7


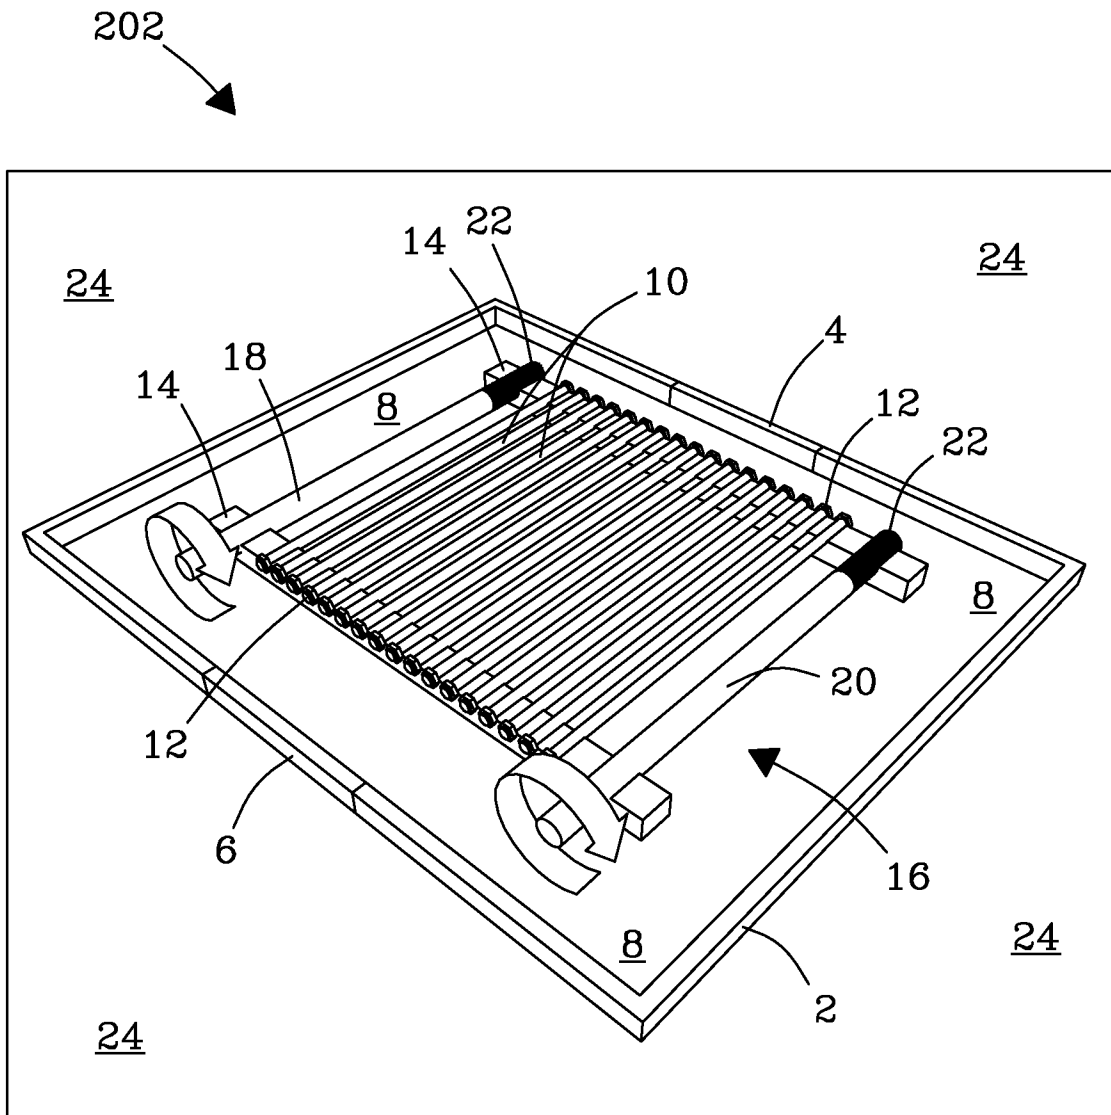


Fig. 3a

4/7

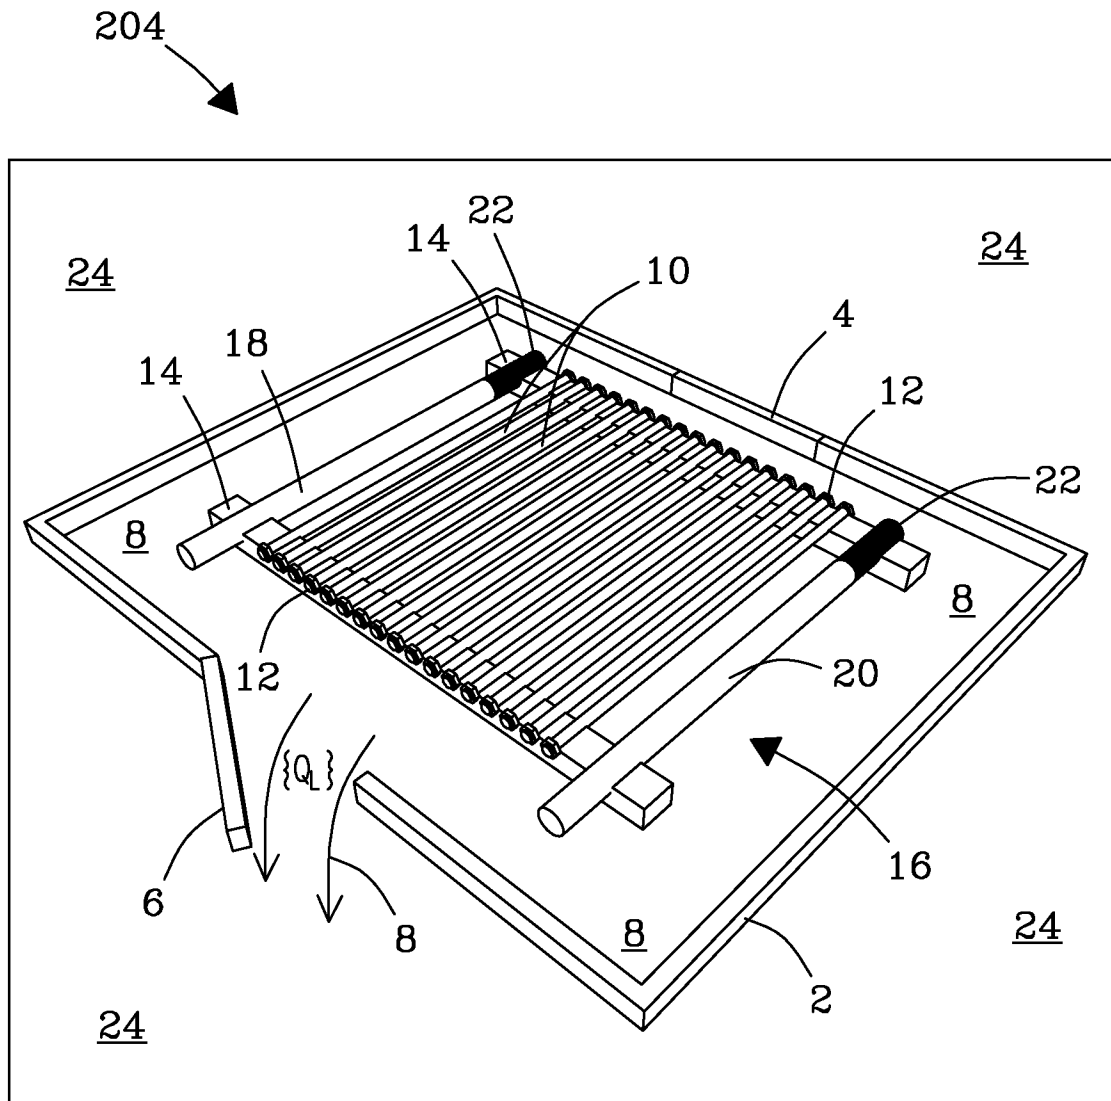

5/7

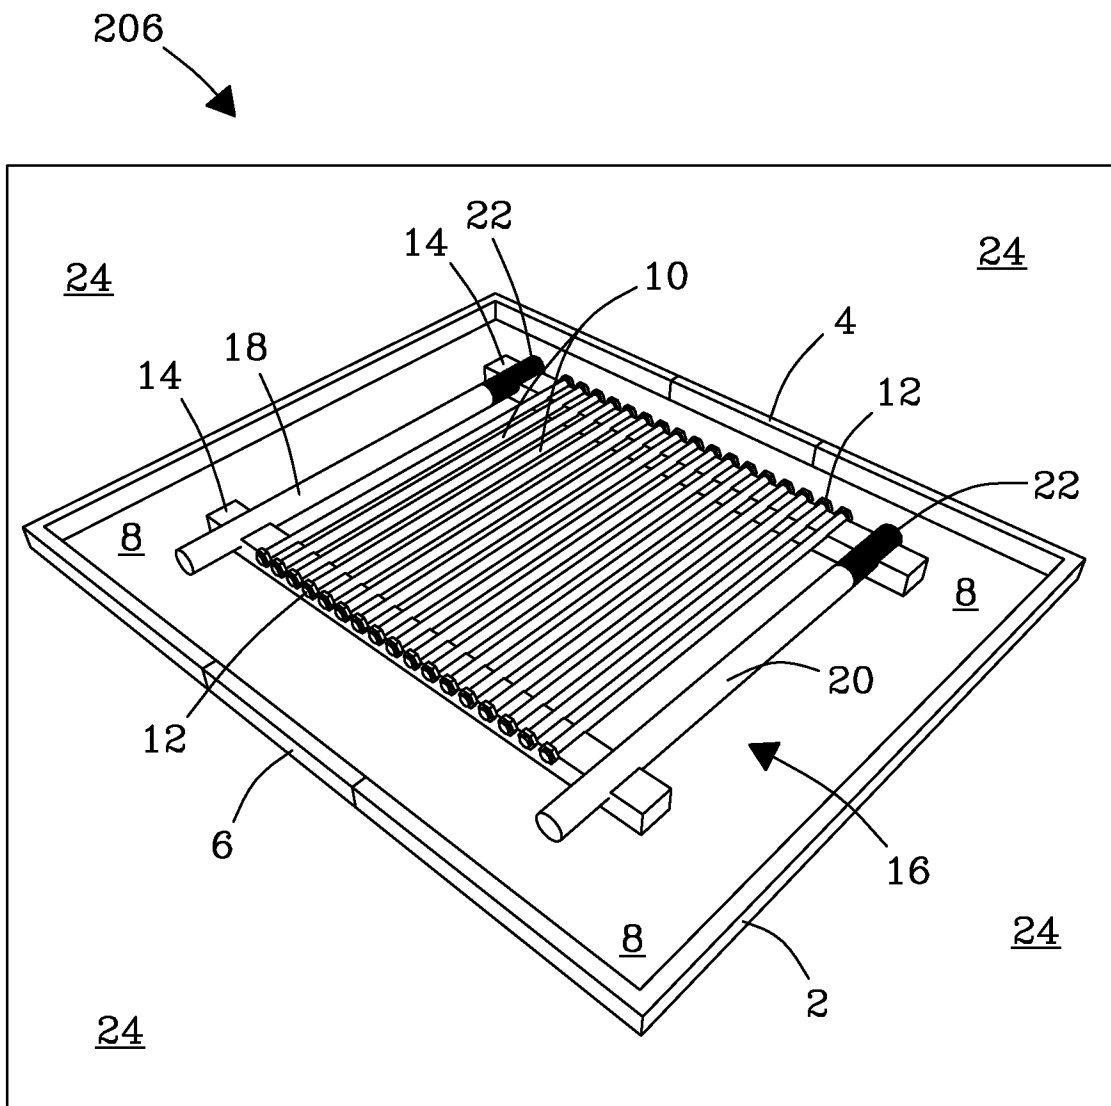
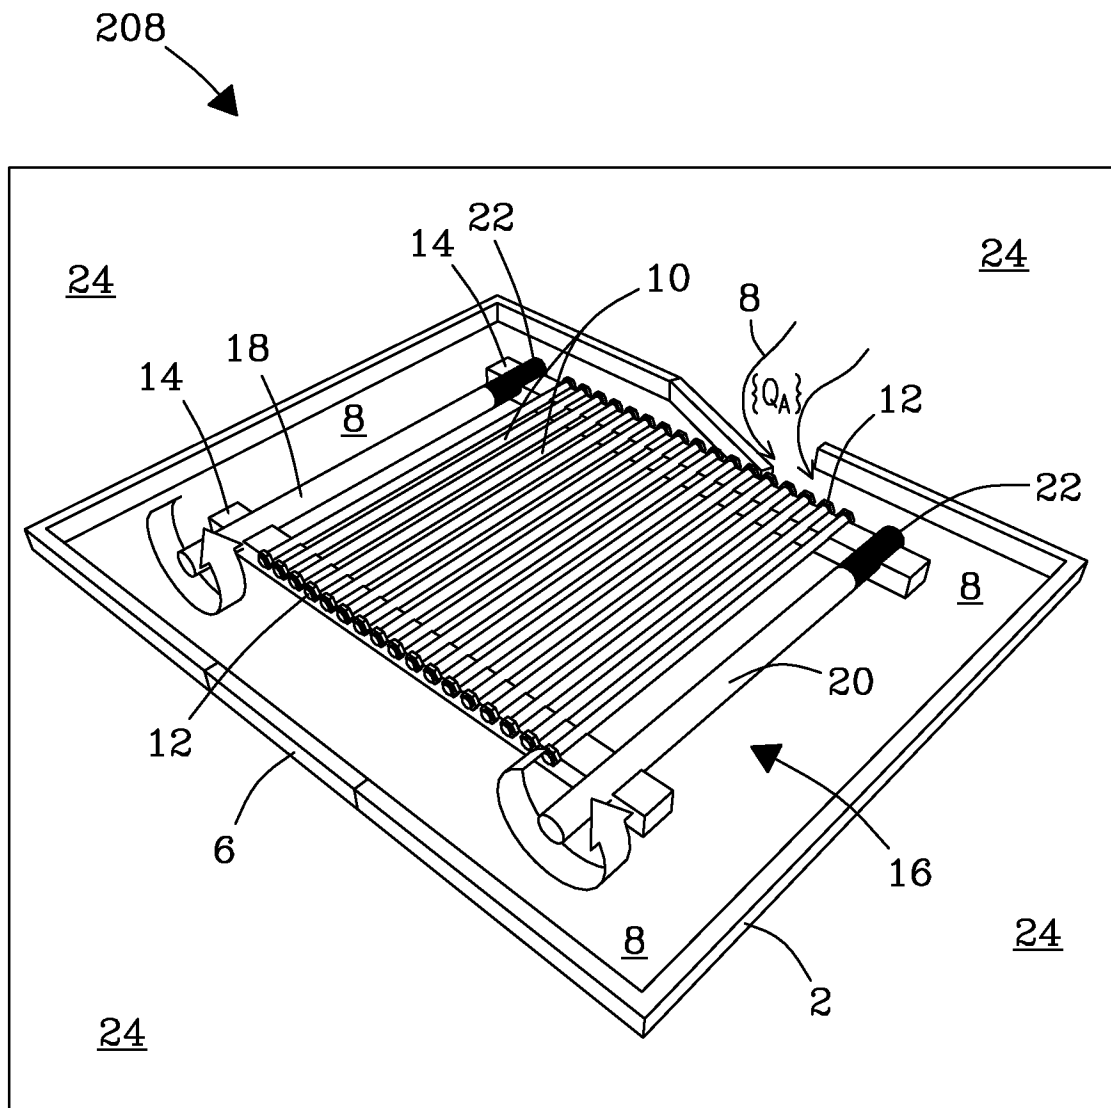
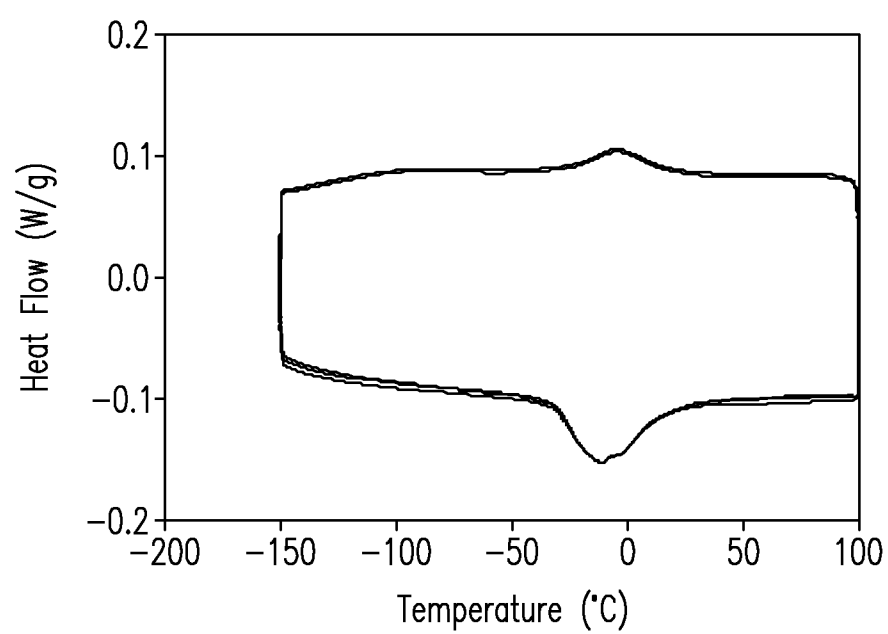


Fig. 3c

6/7

*Fig. 3d*

7/7

*Fig. 4*

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/021531

A. CLASSIFICATION OF SUBJECT MATTER
INV. F28D20/00 F25B23/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F28D F25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 367 281 B1 (HUGENROTH JASON JAMES [US]) 9 April 2002 (2002-04-09)	1-3,6-9, 11-21, 23-31
Y	column 1, line 25 - line 30; figures 1,2 -----	22
X	WO 02/084185 A1 (UNIV BRISTOL [GB]; QUARINI GUISEPPE LEONARDO [GB]) 24 October 2002 (2002-10-24) figures 1a, 2, 3 -----	1,6,7, 13-19, 25-31
X	WO 99/27313 A1 (FURRER ALBERT [CH]; MUELLER KARL ALEXANDER [CH]; MESOT JOEL [US]) 3 June 1999 (1999-06-03) figures 2,4 ----- -/-	1,4-6, 11-19, 27-31



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 May 2012

Date of mailing of the international search report

23/05/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Vassoille, Bruno

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/021531

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	Eduard Vives, Susan Burrows, Rachel S. Edwards, Steve Dixon, Lluís Mañosa, Antoni Planes, Ricardo Romero: "Temperature contour maps at the strain-induced martensitic transition of a Cu-Zn-Al shape memory single crystal.", 25 November 2010 (2010-11-25), XP002675521, Retrieved from the Internet: URL: http://wrap.warwick.ac.uk/39705/1/WRAP_Dixon_Thermalcamera-v5.pdf [retrieved on 2012-05-07]	1,2,4,10
Y	page 2 - page 3 -----	22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/021531

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6367281	B1	09-04-2002	NONE
WO 02084185	A1	24-10-2002	NONE
WO 9927313	A1	03-06-1999	CH 693284 A5 15-05-2003
		DE 69804497 D1 02-05-2002	
		DE 69804497 T2 19-12-2002	
		EP 1034408 A1 13-09-2000	
		ES 2175814 T3 16-11-2002	
		JP 2001524658 A 04-12-2001	
		US 6558434 B1 06-05-2003	
		WO 9927313 A1 03-06-1999	