



- (51) International Patent Classification:
C07C 7/20 (2006.01) *B01J 23/06* (2006.01)
- (21) International Application Number:
PCT/US2013/074854
- (22) International Filing Date:
13 December 2013 (13.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/737,312 14 December 2012 (14.12.2012) US
PCT/US2013/062784
1 October 2013 (01.10.2013) US
- (71) Applicants: **WASHINGTON STATE UNIVERSITY** [US/US]; 1610 N.E. Eastgate Boulevard, Suite 650, Pullman, WA 99163 (US). **ARCHER DANIELS MIDLAND COMPANY** [US/US]; 4666 Faries Parkway, Decatur, IL 62526 (US).

- (72) Inventors: **SUN, Junming**; 118 Dana Hall, Spokane Street, Pullman, WA 99164 (US). **LIU, Changjun**; 118 Dana Hall, Spokane Street, Pullman, WA 99164 (US). **WANG, Yong**; 118 Dana Hall, Spokane Street, Pullman, WA 99164 (US). **SMITH, Colin**; 118 Dana Hall, Spokane Street, Pullman, WA 99164 (US). **MARTIN, Kevin**; 130 Kensington Ct, Mt. Zion, IL 62549 (US). **VENKITASUBRAMANIAN, Padmesh**; 1267 Raptor Lane, Forsyth, IL 62535 (US). **TERRIAN, Joshua**; 2150 CR 500E, Lovington, IL 61937 (US).
- (74) Agent: **MILLER, William, B.**; Archer Daniels Midland Company, Legal Department, 4666 Faries Parkway, Decatur, IL 62526 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: RENEWABLE OLEFINS FROM A MIXTURE OF ACETIC ACID AND PROPIONIC ACID

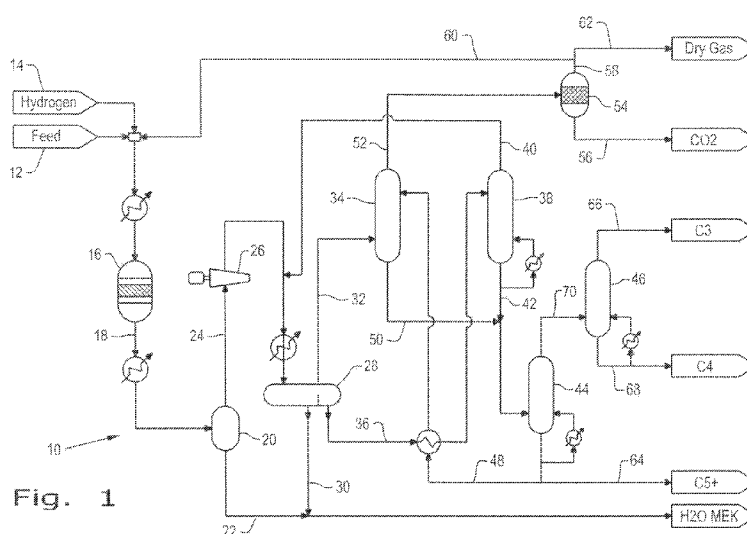


Fig. 1

(57) Abstract: A process is described for making a product mixture including isobutene, propylene, 1-butene, 2-butene, 2-methyl-1-butene and 2-methyl-2-butene from a mixture of acetic acid and propionic acid through reaction in the presence of a source of hydrogen and of a mixed oxide catalyst, for example, a $Zn_xZr_yO_z$ mixed oxide catalyst. A variety of commercially valuable products may be made in turn from the various C₃, C₄ and C₅ constituents of the product mixture



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

RENEWABLE OLEFINS FROM A MIXTURE OF ACETIC ACID AND
PROPIONIC ACID

[0001] This application builds upon work described in United States
5 Patent Application Ser. No. 61/737,312 (the " '312 application"), filed December
14, 2012 for "Process and Catalyst for Conversion of Acetic Acid to Isobutene",
which in turn builds upon work described in Patent Cooperation Treaty
Application No. PCT/US2013/062784 filed on October 1, 2013 (the "WO'784"
application) from United States Patent Application Ser. No. 61/720433, filed
10 October 31, 2012 for "Stable Mixed Oxide Catalysts for Direct Conversion of
Ethanol to Isobutene and Process for Making".

[0002] As related in the '312 application, isobutene is widely used for
the production of a variety of industrially important products, such as butyl
rubber for example. Isobutene has been produced commercially to date
15 through the catalytic or steam cracking of fossil feedstocks, and the
development of a commercially viable process for the manufacture of isobutene
from a renewable source-based feedstock has accordingly become of great
interest as fossil resources are increasingly depleted and/or have become more
costly to use – especially in consideration of increased demand for isobutene.

20 [0003] Previous to the earlier WO'784 application, a hard-template
method had been described for synthesizing $Zn_xZr_yO_z$ mixed oxides for the
direct and high yield conversion of ethanol (from the fermentation of
carbohydrates from renewable source materials, including biomass) to
isobutene, wherein ZnO was added to ZrO_2 to selectively passivate zirconia's
25 strong Lewis acidic sites and weaken Brønsted acidic sites while simultaneously
introducing basicity. The objectives of the hard template method were to
suppress ethanol dehydration and acetone polymerization, while enabling a
surface basic site-catalyzed ethanol dehydrogenation to acetaldehyde, an
acetaldehyde to acetone conversion via aldol-condensation/dehydrogenation,
30 and a Brønsted and Lewis acidic/basic site-catalyzed acetone-to-isobutene
reaction pathway.

[0004] High isobutene yields were in fact realized, but unfortunately, as later experienced by Mizuno et al. (Mizuno et al., "One -path and Selective Conversion of Ethanol to Propene on Scandium-modified Indium Oxide Catalysts", Chem. Lett., vol. 41, pp. 892-894 (2012)) in their efforts to produce propylene from ethanol, it was found that further improvements in the catalyst's stability were needed.

[0005] The WO/784 application concerned the discovery that these improvements could be realized without adding modifying metals and without a reduction in the initial high activity (100 percent ethanol conversion) that had been observed in these mixed oxide catalysts, while the '312 application concerned the further discovery that the mixed oxide catalysts we had been evaluating for converting ethanol to isobutene are also able to catalyze the conversion of acetic acid to isobutene. Since acetic acid can be made by a variety of methods from a number of different starting materials, the capability of these mixed oxide catalysts to catalyze the conversion of acetic acid to isobutene enabled a range of options for utilizing renewable resources more efficiently, all as described in greater detail in the '312 application.

[0006] Separately, while commercial production of propionic acid to date has been entirely by petrochemical routes, a variety of proposed fermentation methods have been evaluated from as early as about 1920 for the industrial production of propionic acid, see Playne, "Propionic and Butyric Acids", Comprehensive Biotechnology: The Principles, Applications and Regulations of Biotechnology in Industry, Agriculture and Medicine, Volume 3, Pergamon Press, New York, NY (1985) at pages 731-759, now incorporated by reference herein. One reason given by Playne for the absence of a commercial fermentation route to propionic acid is that acetic acid has been produced as a significant co-product. Bacteria listed by Playne as of "major importance" for the production of propionic acid from sugars, lactose or lactate through a dicarboxylic acid or acrylic acid metabolic pathway include *Propioibacterium*, especially *P. shermanii*; *Veillonella parvula*; *Veillonella alcalescens*; *Selenomonas*

ruminantium (pH 5); *Selenomonas sputigena* (pH 5); *Clostridium propionicum*; *Clostridium novyi*; *Megasphaera elsdenii* (pH 4-8); *Bacteriodes fragilis*; *Bacteriodes ruminicola*; and *Fusobacterium necrophorum*.

[0007] Efforts to produce propionic acid by fermentation methods have continued in recent years, with various approaches being described for producing propionic acid as well as some acetic acid in greater and lesser proportions from glucose, lactose, sucrose, xylose, fructose, maltose and lactate substrates. References describing these efforts include WO 2012/064883 to Yang et. al. (describing metabolically engineered organisms for producing propionic acid with increased yield and productivity, and increased tolerance to propionic acid and acidic pHs); Lewis and Yang, "Propionic acid fermentation by *Propionibacterium acidipropionici*: effect of growth substrate", Appl. Microbiol. Biotechnol., 37:437-442 (1992); Wang and Yang, "Propionic acid production in glycerol/glucose co-fermentation by *Propionibacterium freudenreichii* subsp. *Shermanii*", Bioresour. Technol., 137:116-123 (Jun 2013); and Zhang and Yang, "Engineering *Propionibacterium acidipropionici* for enhanced propionic acid tolerance and fermentation", Biotechnol. Bioeng., vol. 104, no. 4, pp. 766-773 (Nov. 1, 2009). Additional reduced biobased substrates, for example, glycerol, are taught as useful in some fermentations for improving the redox balance and the yield and selectivity to propionic acid.

SUMMARY OF THE PRESENT INVENTION

[0008] The present invention concerns the still further discovery (to those reported in our previous '312 and WO'784 applications) that the same $Zn_xZr_yO_z$ mixed oxide catalysts ~ whether made by the hard template method or by the method of the WO'784 application ~ are also able, in the presence of hydrogen, to be used to produce several other olefins in addition to isobutene that are either of immediate commercial interest (e.g., propylene) or that can be readily upgraded by known methods to produce other valuable products, starting from a mixture of acetic and propionic acids as may be produced by

known fermentation methods for the manufacture of propionic acid or in other ways accessible to those skilled in the art. Examples of the upgradable olefins include the four-carbon products 1-butene and 2-butene, which can be used to make 1,3-butadiene, and the five-carbon products 2-methyl-1-butene and 2-methyl-2-butene, which can be used to make isoprene. Still other commercially interesting permutations will be apparent to those skilled in the art on consideration of the following summary and detailed description, for making products with biobased organic content that have historically been made exclusively from non-renewable resources.

[0009] With this in mind, in a first aspect, the present invention thus broadly concerns a process for making a product mixture including isobutene, propylene, 1-butene, 2-butene, 2-methyl-1-butene and 2-methyl-2-butene from a mixture of acetic acid and propionic acid through reaction in the presence of a source of hydrogen and of a mixed oxide catalyst, for example, a $Zn_xZr_yO_z$ mixed oxide catalyst.

[0010] In a second aspect, the $Zn_xZr_yO_z$ mixed oxide catalyst can be an improved stability $Zn_xZr_yO_z$ mixed oxide catalyst prepared according to the WO/784 application.

[0011] In one embodiment, the 1-butene and 2-butene are separated from the product mixture and either or both are converted at least in part to 1,3-butadiene (CAS 106-99-0) by dehydrogenation or oxydehydrogenation using any of the known catalysts for performing this conversion, under conditions effective for carrying out the conversion.

[0012] In another embodiment, either or both of the 1-butene and 2-butene are converted by oxidation to products inclusive at least of maleic anhydride (CAS 108-31-6).

[0013] In another embodiment, either or both of the 1-butene and 2-butene are at least in part oligomerized to isooctene for use in a transportation fuel.

[0014] In another embodiment, at least a part of the 1-butene is hydroisomerized to provide additional 2-butene.

[0015] In another embodiment, at least some 2-butene (as present in the product mixture and/or from hydroisomerization of 1-butene) is combined
5 with ethylene to yield additional propylene by olefin metathesis.

[0016] In another embodiment, at least some of the ethylene used for combining with 2-butene is derived through metathesis of 1-butene in the product mixture with itself.

[0017] In another embodiment, 2-butene in the product mixture and/or
10 as formed by hydroisomerization of 1-butene in the product mixture is converted to additional isobutene (CAS 115-11-7) and propylene in the presence of a suitable catalyst, examples of which are given below.

[0018] In another embodiment, isobutene in the product mixture is at least in part reverse isomerized to provide additional n-butene product.

[0019] In another embodiment, butadiene from the dehydrogenation or
15 oxydehydrogenation of n-butene in the product mixture is at least in part polymerized by 1,2- and 1,4-addition with itself in the presence of a suitable catalyst to provide a polybutadiene polymer product.

[0020] In another embodiment, butadiene from the dehydrogenation or
20 oxydehydrogenation of n-butene in the product mixture is at least in part chlorinated, and the resultant 1,4-isomers are isomerized before an alkaline dehydrochlorination step on the whole to provide a chloroprene product (CAS 126-99-8).

[0021] In another embodiment, butadiene from the dehydrogenation or
25 oxydehydrogenation of n-butene in the product mixture is at least in part reacted with hydrogen cyanide sequentially in two steps to provide an adiponitrile product (CAS 111-69-3).

[0022] In another embodiment, adiponitrile so formed is at least in part catalytically hydrogenated to hexamethylenediamine (CAS 124-09-4).

[0023] In another embodiment, butadiene from the dehydrogenation or oxydehydrogenation of n-butene in the product mixture is at least in part converted to 1,4-butanediol (CAS 110-63-4) by any of several known methods for performing the conversion.

5 [0024] In another embodiment, butadiene from the dehydrogenation or oxydehydrogenation of n-butene in the product mixture is at least in part undergoes a 1,4-addition with itself to provide 4-vinylcyclohexene (CAS 100-40-3), which is subsequently dehydrogenated or oxidized to produce styrene (CAS 100-42-5).

10 [0025] In another embodiment, butadiene from the dehydrogenation or oxydehydrogenation of n-butene in the product mixture is at least in part used to provide improved impact resistance to polystyrene in the form of polybutadiene.

[0026] In another embodiment, butadiene from the dehydrogenation or oxydehydrogenation of n-butene in the product mixture is at least in part used
15 as a monomer in an acrylonitrile-butadiene-styrene copolymer.

[0027] In another embodiment, butadiene from the dehydrogenation or oxydehydrogenation of n-butene in the product mixture is at least in part used as a monomer with methyl methacrylate and styrene in a copolymer.

20 [0028] In another embodiment, the 2-methyl-1-butene and 2-methyl-2-butene are separated from the reaction product and dehydrogenated to isoprene (CAS 78-79-5) using any of the known catalysts for performing this conversion, under conditions effective for carrying out the conversion.

[0029] In another embodiment, propylene in the product mixture is at
25 least in part homopolymerized in the presence of a Ziegler-Natta catalyst or a metallocene catalyst to provide biobased polypropylene.

[0030] In another embodiment, propylene in the product mixture is at least in part converted to propylene oxide (CAS 75-56-9).

[0031] In another embodiment, propylene in the product mixture is at least in part converted to acrylonitrile (CAS 107-13-1) by catalytic oxidation in the presence of ammonia.

[0032] In another embodiment, propylene in the product mixture is at least in part converted through catalytic oxidation to acrylic acid (CAS 79-10-7).

[0033] In another embodiment, propylene in the product mixture is at least in part converted to cumene (CAS 98-82-8) by reaction with benzene in the presence of a catalyst.

[0034] In another embodiment, propylene in the product mixture is at least in part hydrated to provide isopropanol (CAS 67-63-0), indirectly through reaction with sulfuric acid and subsequent hydrolysis of the resultant sulfate esters and/or directly by reaction with water in a liquid or gas phase process in the presence of a suitable catalyst.

[0035] In still other embodiments, two or more of these various individual end uses or product scenarios are concurrently practiced.

BRIEF DESCRIPTION OF THE DRAWING

[0036] Figure 1 schematically illustrates a process of the present invention according to one embodiment, including one possible approach that may be taken for separating the product mixture produced by the process of the present invention according to a first aspect.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0037] Those skilled in the art will immediately appreciate from the foregoing summary that the capacity to produce, by means of the process of the present invention, a product mixture including isobutene, propylene, 1-butene, 2-butene, 2-methyl-1-butene and 2-methyl-2-butene from a mixture of acetic acid and propionic acid provides opportunity to impart renewable content to a variety of commercially valuable materials that have historically been made exclusively from non-renewable resources, as well as an additional method for

imparting renewable content to the making of other commercially valuable materials where other means have been previously suggested for this purpose, but these other known processes may not be fully satisfactory for one reason or another.

5 [0038] Some of these commercially valuable materials are expressly addressed by the various embodiments mentioned in the summary section above, but the realization of other products - for example, methyl methacrylate, tetrahydrofuran, N-vinylpyrrolidinone, laurylactam, adipic acid, caprolactam, ethylidene norbornene among others, along with associated renewable
10 polymers and copolymers - will be within the capabilities of those skilled in the art, as demonstrated by US 2010/0216958 A1 to Peters et al, published Aug. 26, 2010 for "Methods of Preparing Renewable Butadiene and Renewable Isoprene" (hereafter "Peters et al.").

 [0039] Those skilled in the art will concurrently also appreciate, in view
15 of the extensive body of literature descriptive of the means by which the upgradable olefins in the product mixture may be used individually, in combination with one or more other constituent materials of the product mixture, and/or in combination with still other materials not in the product mixture but which may be readily available nonetheless - for example,
20 ammonia for combining with the propylene to prepare acrylonitrile, benzene for combining with propylene to prepare cumene or hydrogen cyanide for combining with 1,3-butadiene (from the 1-butene and/or 2-butene) to prepare adiponitrile - to prepare these various commercially valuable materials, that a comprehensive review of all of the many commercially valuable materials that
25 can be made (at least in part) from the upgradable renewable source-derived olefins in the product mixture and of the ways in which the upgradable olefins in the product mixture can be utilized to make the commercially valuable materials is neither feasible nor truly necessary in light of what is known to those skilled in the art.

[0040] Accordingly, while certain applications of the upgradable olefins in the product mixture will be described herein (by reference to exemplary publications within that extensive body of literature), it will be appreciated that these are intended to be illustrative only.

5 [0041] Turning now to Figure 1, a process 10 is schematically illustrated wherein a mixed acid feedstock 12 comprising both acetic acid and propionic acid, but preferably having acetic acid and propionic acid as the two most prevalent acids therein, is combined with hydrogen 14 and converted in a reactor 16 containing a catalyst, particularly, a $Zn_xZr_yO_z$ mixed oxide catalyst, to
10 a product mixture 18 having an upgradable olefins component including isobutene, propylene, 1-butene, 2-butene, 2-methyl-1-butene and 2-methyl-2-butene as well as a remainder including water, acetone, methyl ethyl ketone (or 2-butanone, henceforth MEK), methane and carbon dioxide. Under certain conditions as shown by the examples below, six-carbon products may be
15 formed as well, but in preferred embodiments substantially no six-carbon and heavier products will be formed.

[0042] The mixed acid feedstock 12 in the illustrative embodiment of Figure 1 may be produced by those known fermentation methods to propionic acid from glucose, lactose, sucrose, xylose, fructose, maltose and lactate
20 substrates (as previously described) which also produce some acetic acid, by a combination of propionic acid from a known fermentation method with acetic acid from a separate, known method of making acetic acid (various such methods are described in the '312 application), or by a combination of propionic acid from a known fermentation method with acetic acid from a
25 separate, known method or source of acetic acid and with recycle acetic acid produced in certain upgrading options from the product mixture 18 – for example, in the oxidation of some part of the n-butenes in the product mixture 18 in the presence of steam, see, e.g., US 3,431,297.

[0043] While a single fermentation may thus be employed to provide a
30 mixed acid feedstock 12, both because of the well-appreciated difficulties

associated with mixed acid fermentations generally and because of the improved flexibility afforded to provide mixed acid feedstocks 12 of differing compositions, it is expected that preferably separate fermentations will be employed to preferentially generate propionic acid on the one hand (building
5 upon some of the above-referenced recent advancements in propionic acid fermentations, for example) and acetic acid on the other. The propionic acid and acetic acid can then be conventionally recovered from the individual fermentation broths and recombined to provide a mixed acid feedstock 12, or acetic acid or propionic acid can be recovered from its respective fermentation
10 broth for combining into the other fermentation broth to yield the mixed acid feedstock 12, or the individual broths from the two fermentations can be combined to provide the mixed acid feedstock 12.

[0044] The production of acetic acid by fermentation fits very well with an independent fermentation mode of generating the mixed acid feedstock 12,
15 in that various homoacetogenic microorganisms are known which are able through fermentation to produce acetic acid with 100% carbon yield; these microorganisms internally convert carbon dioxide to acetate, in contrast to a process for producing ethanol from sugars obtained from biomass, wherein carbon dioxide is produced as a byproduct.

[0045] Examples of homoacetogens given by US 8,252,567 are microorganisms of the genus *Moorella* and *Clostridium*, especially microorganisms of the species *Moorella thermoacetica* (described as formerly classified as *Clostridium thermoacetica*) or *Clostridium formicoaceticum*. US
20 8,252,567 represents that about one hundred known acetogens in twenty-two genera were known as of 2009, and cross-references Drake, et al., Ann. NY Acad. Sci. 1125: 100-128 (2008) for a review of acetogenic microorganisms.

[0046] Other references describing fermentation methods for producing acetic acid from five and six carbon sugars include US 4,935,360; US 8,236,534; US 4,513,084; US 4,371,619 and US 4,506,012; both one-step fermentation
30 processes from the sugars to acetic acid, acetates or both are disclosed, as well

as two-step processes involving a first fermentation to lactic acid (by lactobacillus or known methods of homolactic fermentation, preferably) followed by a second fermentation to convert lactic acid to acetic acid, for example, using *Clostridium formicoaceticum*.

5 [0047] Any of the known fermentation methods may, in short, be used to produce acetic acid for combining with propionic acid in the mixed acid feedstock 12, but homoacetogenic fermentation methods are considered preferable at least in that carbon dioxide is not produced as a byproduct – the carbon dioxide represents a yield loss from the overall process to make
10 isobutene and as a greenhouse gas is undesirable particularly in the context of a process to make a needed product more sustainably from renewable resources.

 [0048] The mixed acid feedstock 12 can in other embodiments be provided in whole or in part without the use of fermentation methods, for example, from the dehydration and oxidation of 1,2-propanediol (propylene
15 glycol) and ethylene glycol obtained by the hydrogenolysis of a feedstock selected from one or more of glycerol, the five and six carbon sugars and sugar alcohols, lactate and lactic acid in the presence of hydrogen and a suitable hydrogenolysis catalyst and under conditions which are effective for carrying out the hydrogenolysis. More particularly, ethylene glycol produced in such a
20 process can be dehydrated and then the product of that dehydration step can be oxidized to provide acetic acid for the mixed acid feedstock 12, while propylene glycol from the hydrogenolysis process can be dehydrated, and the product of the dehydration step then likewise oxidized to propionic acid for the mixed acid feed 12.

25 [0049] Propylene glycol and ethylene glycol have conventionally been produced from petrochemical sources. However, in recent years much research has taken place to develop suitable biobased propylene glycol and ethylene glycol products, which can be interchangeable with propylene glycol and ethylene glycol products deriving from petroleum refining and processing
30 methods but which are made from renewable versus nonrenewable materials.

[0050] As a result of these efforts, processes have been developed by several parties involving the hydrogenolysis of especially five and six carbon sugars and/or sugar alcohols, whereby the higher carbohydrates are broken into fragments of lower molecular weight to form compounds which belong to the glycol or polyol family. Sugars containing five carbon chains, such as ribose, arabinose, xylose and lyxose, and corresponding five carbon chain sugar alcohols such as xylitol and arabinitol, are among the materials contemplated in US 7,038,094 to Werpy et al., for example, as are lactic acid, lactate and six carbon sugars such as glucose, galactose, maltose, lactose, sucrose, allose, altrose, mannose, gulose, idose and talose and six carbon chain sugar alcohols such as sorbitol. Some of these carbohydrate-based feedstocks are commercially available as pure or purified materials. These materials may also be obtained as side-products or even waste products from other processes, such as corn processing. The sugar alcohols may also be intermediate products produced in the initial stage of hydrogenating a sugar.

[0051] For other known examples of such processes, US Patent 5,206,927 describes a homogeneous process for hydrocracking carbohydrates in the presence of a soluble transition metal catalyst to produce lower polyhydric alcohols. A carbohydrate is contacted with hydrogen in the presence of a soluble transition metal catalyst and a strong base at a temperature of from 25°C to 200°C and a pressure of from 15 to 3000 psi. However, as is evident from Tables II and III in the disclosure of US 5,206,927, 2-7% of other polyol compounds are produced in the hydrocracking process. US Patent 4,476,331 describes a two stage method of hydrocracking carbohydrates using a modified ruthenium catalyst. European Patent Applications EP-A-0523 014 and EP-A-0 415 202 describe a process for preparing lower polyhydric alcohols by catalytic hydrocracking of aqueous sucrose solutions at elevated temperature and pressure using a catalyst whose active material comprises the metals cobalt, copper and manganese. Still other examples of such carbohydrate-based processes may be found without difficulty by those skilled in the art.

[0052] Other efforts have been based on the use of another readily accessible biobased feedstock, namely, glycerol. The aforementioned US 7,038,094 to Werpy et al. describes the hydrogenolysis of glycerol as well over rhenium-containing catalysts, as an example, but a number of references may be found related to the hydrogenolysis of glycerol to produce biobased propylene glycol as well as ethylene glycol.

[0053] Glycerol is currently produced as a byproduct in making biodiesel from vegetable and plant oils, through the transesterification reaction of lower alkanols with higher fatty acid triglycerides to yield lower alkyl esters of higher fatty acids and a substantial glycerol byproduct. Glycerol is also available as a by-product of the hydrolysis reaction of water with higher fatty acid triglycerides to yield soap and glycerol. The higher fatty acid triglycerides may derive from animal or vegetable (plant) sources, or from a combination of animal and vegetable sources as well known, and a variety of processes have been described or are known. A biobased glycerol is also available as a product of the hydrogenolysis of sorbitol, as described in an exemplary process in U. S. Patent No. 4,366,332, issued December 28, 1982.

[0054] A biobased ethylene glycol and propylene glycol in any event may be converted to acetic acid and propionic acid, respectively, for the mixed acid feedstock 12 by first dehydrating the ethylene glycol and propylene glycol to their corresponding aldehydes acetaldehyde and propionaldehyde, then oxidizing the acetaldehyde and propionaldehyde to provide acetic acid and propionic acid. Various catalysts for the dehydration of propylene glycol (1,2-propanediol) have been evaluated and are available from the prior art, see, for example, Mori et al., "Catalytic dehydration of 1,2-propanediol into propanal", Applied Catalysis A: General, vol. 366, pp. 304-308 (2009) (finding acidic inorganic oxides and supported heteropolyacids useful for a vapor phase dehydration, especially, silica-supported heteropolyacids with an aqueous propylene glycol feed); Sugiyama et al., "The Catalytic Conversion of 1,2-Propanediol to Propanal on FSM-16 Molded by Wet-Treatment and

Pressurization", Journal of Chemical Engineering of Japan, vol. 46, no. 9, pp 620-624 (2013)(FSM-16 being described as a mesoporous silica); Cherysheva et al., "Nature of the Products from the Catalytic Dehydration of Propylene Glycol", Zhurnal Organicheskoi Khimii, vol. 7, no. 1, p. 212 (Jan. 1971)(cation-exchange resins, p-toluenesulfonic acid and sulfuric acid); and Zhang et al., "Dehydration of 1,2-propanediol to propionaldehyde over zeolite catalysts", Applied Catalysis A: General, vol. 400, pp 148-155 (2011) (discussing prior studies with electrophilic, nucleophilic and lanthanide oxide catalysts in evaluating (and finding effective) zeolites such as ZSM-5). A number of examples of the dehydration of ethylene glycol to acetaldehyde are similarly available in the prior art, as referenced and summarized by Smith, "Ethylene glycol to acetaldehyde - dehydration or a concerted mechanism", Tetrahedron, vol. 58, pp. 2091-2094 (2002). Parenthetically, it is contemplated that the dehydrations of propylene glycol and of ethylene glycol can be done on a mixture of the glycols, or on the propylene glycol and ethylene glycol separately and independently.

[0055] The subsequent oxidation of the acetaldehyde and propionaldehyde dehydration products to provide acetic and propionic acids can be done by any conventionally known oxidation method. In this regard, as described in Sano et al., "Acetic acid production by direct oxidation of ethylene", Chem. Eng. Technol., vol. 29, no. 11, pp. 1376-1380 (2006), the primary method for producing acetic acid commercially for many years was by oxidation of acetaldehyde in the presence of a manganese acetate catalyst, though this method has now been supplanted by carbonylation of methanol. Catalytic methods for the oxidation of propionaldehyde to yield propionic acid have likewise been described, which have principally involved vanadium oxide and vanadium phosphate catalysts, see Slavucha et al., Catal. Lett., No. 2, page 257 (1989) and Ai et al., Bull. Chem. Soc. Jpn., no. 67, pg. 551 (1994); the oxidation of a mixture of acetaldehyde and propionaldehyde has likewise been described on a titania-supported vanadium oxide catalyst in the presence of

water vapor, see Suprun et al., Chem. Eng. Technol., vol. 29, no. 11, pp 1376-1380 (2006). Consequently, it is contemplated that the oxidation step can likewise be conducted on a mixture of the acetaldehyde and propionaldehyde dehydration products or on the acetaldehyde and propionaldehyde

5 individually, but those skilled in the art will be well able in any event to determine how best to conduct the dehydration and oxidation steps on the ethylene glycol and propylene glycol from a preceding hydrogenolysis process in order to provide the acetic and propionic acids for mixed acid feedstock 12.

[0056] However obtained, the mixed acid feedstock 12 is combined
10 with hydrogen 14 and converted to the product mixture 18 including the upgradable olefins fraction. In a first embodiment, a $Zn_xZr_yO_z$ mixed oxide catalyst useful for the conversion of the acetic acid and propionic acid in the mixed acid feedstock 12 as described can be made by a "hard template" or "confined space synthesis" method generally of the character used by Jacobsen
15 et al., "Mesoporous Zeolite Single Crystals", Journal of the American Chemical Society, vol. 122, pp. 7116-7117 (2000), wherein nanozeolites were prepared.

[0057] More particularly, the same carbon black (BP 2000, Cabot Corp.) may be used as a hard template for the synthesis of nanosized $Zn_xZr_yO_z$ mixed oxides, rather than nanozeolites as in Jacobsen et al. Prior to use, the BP 2000
20 template is dried, for example, at 180 °C overnight. Calculated amounts of zirconyl nitrate hydrate (Sigma-Aldrich, greater than 99.8% purity) and $Zn(NO_3)_2 \cdot 6H_2O$ (Sigma-Aldrich, greater than 99.8% purity) are dissolved in a given amount of water, and sonicated for 15 minutes to produce a clear solution with desired concentrations of Zn and Zr. In one preparation, about 25 grams of
25 the obtained solution are then mixed with 6.0 grams of the preheated BP 2000 to achieve incipient wetness, and the mixture is transferred to a ceramic crucible and calcined at 400 degrees Celsius for 4 hours, followed by ramping the temperature to 550 degrees Celsius (at a ramp rate of 3 degrees Celsius/minute) and holding at 550 degrees Celsius for another 20 hours. Nanosized white
30 powders are obtained, having a mean particle size of less than 10 nanometers.

[0058] The nanosized $Zn_xZr_yO_z$ mixed oxide catalysts made by a hard template method are further described in Sun et al., "Direct Conversion of Bio-ethanol to Isobutene on Nanosized $Zn_xZr_yO_z$ Mixed Oxides with Balanced Acid-Base Sites", Journal of the American Chemical Society, vol. 133, pp. 11096-11099 (2011), along with findings related to the character of the mixed oxide catalysts formed thereby and the performance of the catalysts for the ethanol to isobutene conversion, given certain Zn/Zr ratios, residence times and reaction temperatures.

[0059] Alternatively, the $Zn_xZr_yO_z$ mixed oxide catalysts may be made as described in copending United States Patent Application Ser. No. 61/720433, filed October 31, 2012 for "Stable Mixed Oxide Catalysts for Direct Conversion of Ethanol to Isobutene and Process for Making" (the WO/784 application), by a process broadly comprising, in certain embodiments, forming a solution of one or more Zn compounds, combining one or more zirconium-containing solids with the solution of one or more Zn compounds so that the solution wets the zirconium-containing solids to a state of incipient wetness, drying the wetted solids, then calcining the dried solids. In other embodiments, a solution is formed of one or more Zr compounds, the solution is combined with one or more Zn-containing solids so that the solution wets the Zn-containing solids to a state of incipient wetness, the wetted solids are dried and then the dried solids are calcined.

[0060] In certain embodiments, the $Zn_xZr_yO_z$ mixed oxide catalysts (whether made by the hard template or incipient wetness methods) are characterized by a Zn/Zr ratio (x:y) of from 1:100 to 10:1, preferably from 1:30 to 1:1, especially 1:20 to 1:5, and still more preferably 1:12 to 1:10.

[0061] The catalysts made by the alternative, incipient wetness method are consistent in their particle size with the catalysts described in the incorporated journal article, namely, comprising aggregates of less than 10 nm-sized particles with a highly crystalline structure. The Zn oxide component is again highly dispersed on the Zr oxide component.

[0062] In certain embodiments, the $Zn_xZr_yO_z$ mixed oxide catalysts are characterized as low sulfur catalysts, containing less than 0.14 percent by weight of sulfur. In the WO'784 application, it was reported in the context of converting ethanol to isobutene that catalysts made by the incipient wetness method would desirably be substantially sulfur-free, preferably including less than 0.01 percent by weight of sulfur and more preferably including less than 0.001 weight percent of sulfur. In the WO'784 application, it was postulated that the reduced sulfur content enabled by the incipient wetness method as compared to the hard template method contributed significantly to the much improved stability observed for the incipient wetness method catalysts of the prior related application for the ethanol to isobutene process.

[0063] In the particular context of the '312 application (for converting acetic acid to isobutene), however, in at least some embodiments and under certain process conditions some sulfur did appear to be beneficial. Since the process of the present invention is concerned with the processing of a mixed acid feedstock 12 containing acetic acid, it is anticipated that again there may be benefit to not having the catalyst be substantially sulfur-free as preferred in the WO'784 application, though as just indicated, it is expected that the amount of sulfur will preferably be such that the catalysts are still characterized as low sulfur catalysts. Such low sulfur catalysts are most readily made by the incipient wetness method described briefly above and in greater detail in the WO'784 application.

[0064] In principle, provided the zinc and zirconium compounds and solids in these embodiments have a sufficiently low sulfur content in order to produce a low sulfur content when combined according to the incipient wetness method, any combination of zinc and zirconium materials and any solvent can be used that will permit the zinc and zirconium components to mix homogeneously whereby, through incipient wetness impregnation, one of the zinc or zirconium components are well dispersed on a solid of the other component for subsequent drying and conversion to the oxide forms through

calcining. Low sulfur catalysts can also be made by the incipient wetness method starting with zinc and zirconium compounds that are sulfur-free or substantially sulfur-free, then doping in a desired sulfur content into the $Zn_xZr_yO_z$ mixed oxide catalysts.

5 [0065] The conditions and times for the drying and calcining steps of an incipient wetness preparation will depend, of course, on the particular zinc and zirconium materials and solvent used, but in general terms, the drying step can be accomplished in a temperature range of from 60 degrees Celsius to 200 degrees Celsius over at least 3 hours, while the calcining can take place at a
10 temperature of from 300 degrees Celsius to 1500 degrees Celsius, but more preferably a temperature of from 400 to 600 degrees Celsius is used. The calcination time can be from 10 minutes to 48 hours, with from 2 to 10 hours being preferred.

 [0066] In still other embodiments, low sulfur catalysts could be
15 prepared by a hard template method, except that a suitably very low sulfur content carbon is used for the hard template to realize a low sulfur content in the finished catalyst.

 [0067] In certain embodiments, the conversion of the acetic acid and propionic acid in mixed acid feed 12 to the product mixture 18 can be
20 accomplished continuously in the gas phase, using a fixed bed reactor or flow bed reactor. The reaction temperature may be in a range from 200 to 700 degrees Celsius, preferably, in a range from 300 to 500 degrees Celsius, and the WHSV can be in a range from 0.01 hr^{-1} to 10 hr^{-1} , preferably from 0.05 hr^{-1} to 2 hr^{-1} . Acetic/propionic acid/water solutions with steam to carbon ratios from 0 to 20,
25 preferably from 2 to 5 can be used to provide the acetic and propionic acids to the catalyst.

 [0068] Hydrogen is supplied from a source 14, generally in combination with an inert carrier gas such as nitrogen. As demonstrated by the examples below, by adjusting the partial pressure of hydrogen in the reactor (all other
30 conditions remaining the same), different product distributions can be

produced of the various upgradable olefins in the product mixture 18 as desired, based on the manufacturer's requirements at any given time. Further, this effect can be made greater or lesser or even manifested in a different way, depending on the particular reaction conditions employed. The examples in particular show that the effects of the same partial pressure changes were quite different on an equimolar mixture of the acetic and propionic acids as compared to a high acetic:propionic mixture; notably, increased hydrogen partial pressures in converting the equimolar mixture resulted in increased selectivity to isobutene, 1-butene and 2-butene, while the same partial pressure changes in converting the high acetic:propionic mixture resulted in *decreasing* selectivity on the whole to these C₄ products. The magnitude of the selectivity effects for the propylene and C₅ products (2-methyl-2-butene, 2-methyl-1-butene, 2-pentene) in the product mixture also differed, particularly relating to the amount of propylene produced.

[0069] The product mixture 18 in the particular embodiment of Figure 1 is then cooled and passed to a knockout drum 20 to remove water and to remove acetone and MEK solubilized therein via stream 22 from the mixture 18. The remainder 24 is passed to a wet gas compressor 26, further cooled and sent to a high pressure receiver 28. Additional water, acetone and MEK is removed via stream 30 from the product mixture 18, and lighter components than the desired upgradable olefins - methane, unreacted hydrogen and carbon dioxide - are mostly conveyed in stream 32 to a sponge absorber 34. The heavier components of the product mixture, including the bulk of the desired upgradable olefins, are meanwhile sent in stream 36 to a stripper 38.

[0070] In the stripper 38, residual methane, hydrogen and carbon dioxide not separated into stream 32 from the high pressure receiver 28 are stripped away in stream 40 from the propylene, C₄ and C₅ (and C₆, if any) products which proceed in stream 42 to a debutanizer 44 and depropanizer 46 in sequence. Stream 40 is recycled to the high pressure receiver 28 to capture

any propylene into the stream 36, with capturing the residual gases into the stream 32 on recycle.

[0071] The 2-pentene, 2-methyl-1-pentene and 2-methyl-2-pentene from product mixture 18 are separated (together with any C₆ products, but preferably there will be substantially no C₆ products) in the debutanizer 44 from the propylene, isobutene, 1-butene and 2-butene upgradable olefins, with a portion 48 of the 2-pentene, 2-methyl-1-pentene and 2-methyl-2-pentene materials being recycled to the sponge absorber for efficiently separating any propylene (C₃), isobutene, 1-butene and 2-butene (C₄) content in stream 32 from the lighter gases contained in product mixture 18, though other absorbents could be used in place of a recycle portion 48. The C₃ and C₄ products recovered into the C₅ recycle portion 48 proceed from the absorber 34 (with the C₅ recycle absorbent) as stream 50, and stream 50 including the recycled C₅ products is then combined with primary C₃ - C₅ stream 42 from the stripper 38 for processing in the debutanizer/depropanizer section, while the methane, unreacted hydrogen and carbon dioxide are carried overhead from the sponge absorber 34 as stream 52 to a pressure swing absorption unit 54.

[0072] Pressure swing absorption unit 54 operates to separate carbon dioxide 56 from a dry gas 58 comprised of methane and unreacted hydrogen. If the hydrogen content of the dry gas 58 is substantial enough, the dry gas 58 may be recycled in whole or in part as recycle gas stream 60 to provide makeup hydrogen for use in the reactor 16, or may be used as a fuel gas 62 or for other suitable purposes.

[0073] The debutanizer 44 and depropanizer 46 operate in sequence to produce the 2-pentene, 2-methyl-1-butene and 2-methyl-2-butene in debutanizer bottoms (C₅) product 64, with a propylene (C₃) product 66 and an isobutene, 1-butene and 2-butene (C₄) product 68 from the overheads 70 from debutanizer 44.

[0074] The C₃, C₄ and C₅ products can be used, as already observed, to provide a significant number of commercially valuable products, following

such further conventional refining as may be indicated for the C₄ and C₅ products to upgrade individual materials within these products to certain commercially important products.

[0075] For example, in one embodiment, the isobutene can be separated
5 from the n-butenes in the C₄ product 68. Though the separation of isobutene from 1-butene and 2-butene is not facile, methods are known for performing the separation, see "Butenes", Ullmann's Encyclopedia of Industrial Chemistry, 11th ed., Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim (2012) at pages 445-455 and the references cited therein. See also, US 8,293,960 to Arnold et al.,
10 "Process for the Production of Butadiene" (describing isomerization of 1-butene to 2-butene with distillation, and an optional reverse isomerization to convert isobutene to additional n-butenes as desired, for additional 1,3-butadiene or other products derived from the n-butenes versus isobutene) and US 8,025,857 to Gartside et al. for "Apparatus for the Double Bond Hydroisomerization of
15 Butenes" (describing hydroisomerization of 1-butene to 2-butene in a mixed C₄ stream, followed by distillation to produce a butadiene process feed and additionally describing making propylene from 2-butene by combination with ethylene and through olefin metathesis); see also US 7,888,541 to Gartside et al., "Double Bond Hydroisomerization of Butenes". The isobutene is itself a
20 commercially valuable material, being widely used for the production of a variety of industrially important products, such as butyl rubber for example.

[0076] Alternatively, the isobutene can be converted to biobased fuel additives, in particular, ethyl and methyl tertiary butyl ethers (ETBE and MTBE, respectively). Conventionally, MTBE has been made in petroleum processing,
25 in integrated processes for the production from a mixed C₄ stream from petroleum crackers (after removal of multiply unsaturated hydrocarbons such as butadiene) of isobutene as used in making butyl rubber, polyisobutylene, isobutene oligomers and t-butyl aromatics, of tert-butanol (TBA) and MTBE in desired proportions. The art contains a number of examples of such integrated
30 processes for making non-biobased, conventional MTBE, see, for example, US

4,118,425 to Herbstman, US 4,329,516 to Al-Muddarris, US 4,423,251 to Pujado et al., US 4,981,491 to Harandi et al., and US 5,254,764 to Miracca et al., as well as Ullmann's Encyclopedia of Industrial Chemistry, 11th ed., "Methyl Tert-Butyl Ether", pp 119-130, Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim
5 (2012). ETBE for its part has been made in a like manner as MTBE, through using ethanol rather than methanol in the etherification step of such processes.

[0077] In another alternative embodiment, the isobutene can be used in whole or in part to make isoprene according to any of a number of known processes. Conventionally, isoprene has been recovered from pyrolysis gasoline
10 in naphtha cracking to produce ethylene, by a series of fairly capital intensive steps. Initially cyclopentadiene is removed from the pyrolysis gasoline by dimerization and distillation. Subsequently, pipirylenes are separated out by superfractionation, and the isoprene (at 10 to 20% of the pyrolysis gasoline) is then recovered by extractive distillation using a solvent. In recent years,
15 however, with the availability of abundant, inexpensive natural gas, ethylene has increasingly been produced using lighter feedstocks for the steam crackers so that pyrolysis gasoline production has declined.

[0078] As summarized in WO 2012/038247 A1 by Vermeiren et al., "Production of Isoprene from Iso-Butanol" ("WO '247"), isoprene can be
20 produced by a Prins condensation of a C₄ olefin feed with an aldehyde, typically formaldehyde, with the C₄ olefin feed commonly including isobutene or one or more isobutene precursors such as an alkyl-t-butyl ether under conditions which will provide isobutene. The isobutene reacts with formaldehyde to give 4,4-dimethyl-m-dioxane which decomposes to provide the desired isoprene
25 product.

[0079] WO '247 reports a number of other examples of processes of this general character. For example, US 4,511,751 describes a process wherein isobutene and/or tertiary butanol and a formaldehyde source are fed, together with water, into an acidic aqueous solution continuously or intermittently while
30 maintaining the reaction pressure in an adequate range and at the same time

distilling off the isoprene product and unreacted starting materials, together with water, from the reaction zone. US 4,593,145 is cited for describing a process for producing isoprene, characterized in that an alkyl-t-butyl ether (e.g., methyl-t-butyl ether (MTBE) or ethyl-t-butyl ether (ETBE) as are still

5 commercially manufactured and extensively used as antiknock fuel additives) and a formaldehyde source are fed, together with water, into an acidic aqueous solution continuously or intermittently while maintaining the reaction pressure in an adequate range and at the same time distilling off the product isoprene, unreacted starting materials, isobutene and tertiary butanol, together with
10 water, from the reaction zone. Other cited examples include EP 106323, EP 1614671, EP 2157072, GB 1370899 and US 3,972,955.

[0080] It is also known to directly produce isoprene from tertiary alkyl ethers (such as MTBE) and an oxygen source by a catalytic process. For example, in US 3,574,780, isoprene is produced by passing a mixture of MTBE
15 and air over a mixed oxide catalyst, cracking the MTBE to isobutene and methanol, oxidizing the methanol to formaldehyde and then reacting the isobutene and formaldehyde to produce isoprene. Other references supply isobutene and methanol separately. The methanol is oxidized to formaldehyde alongside methanol generated from the cracking of MTBE, and the
20 formaldehyde so formed reacts with the supplied isobutene plus that isobutene generated from the cracking of MTBE. Still other references supply isobutene and methanol directly rather than generating the same by cracking MTBE, oxidizing the methanol to formaldehyde with an oxygen source in the presence of an oxidation catalyst and then reacting the formaldehyde thus formed with
25 the isobutene feed.

[0081] Consequently, it will be appreciated from the summary of these various known methods that isoprene can in certain embodiments be produced from the isobutene in stream 68, as well as from the MTBE that can be made from the isobutene.

[0082] Isoprene can also be made by the 2-methyl-1-butene and 2-methyl-2-butene upgradable olefins in the debutanizer bottoms product 64. The WO/247 reference thus also describes that isoprene can be produced in a conventional petroleum refinery setting by the isolation of isoamylenes
5 (principally being the same 2-methyl-1-butene and 2-methyl-2-butene materials) from refinery and petroleum cuts and then converting the isoamylenes to isoprene over an iron oxide catalyst promoted with potassium compounds.

[0083] US 2010/0022816 to Merrill alternatively describes a process wherein 2-methyl-1-butene and 2-methyl-2-butene are combined with steam
10 and contacted with a dehydrogenation catalyst under conditions effective to produce isoprene, with preferred embodiments carried out under a vacuum at a pressure of 1,000 mbar or less.

[0084] Returning now to the 1-butene and 2-butene upgradable olefin products in stream 68, in one embodiment, these may be converted to 1,3-
15 butadiene by catalytic dehydrogenation or catalytic oxidative dehydrogenation according to known methods, see "Butadiene", Ullmann's Encyclopedia of Industrial Chemistry, 11th edition, Wiley-VCH Verlag GmbH & Co. KGaA, Wertheim (2012) at pages 381-396 and the references cited therein, especially page 387 and references 44-47; GB 602,499 (Phillips Petroleum Company) and
20 GB 649,444 (Standard Oil).

[0085] The 1,3-butadiene thus formed can in other embodiments be used to produce in whole or in part to produce other commercially valuable products, again according to known methods. Thus, as further described in the just-referenced "Butadiene" article, the 1,3-butadiene can be used as a monomer
25 or co-monomer in the manufacture of various synthetic rubbers, e.g., styrene-butadiene rubber and latex, polybutadiene rubber, acrylonitrile-butadiene rubber and latex, and chloroprene rubber. Important plastics containing butadiene as a monomer component are impact-resistant polystyrene, a two-phase system consisting of polystyrene and polybutadiene,

acrylonitrile/butadiene/styrene (ABS) polymers, and a copolymer of methyl methacrylate, butadiene and styrene.

[0086] The 1,3-butadiene can in other embodiments be used to make still other products. US 2010/0216958 to Peters et al. ("Peters et al.") is
5 descriptive of methods for preparing renewable butadiene and renewable isoprene, albeit starting from C₄ and C₅ alcohols through dehydration to C₄ and C₅ olefins which are then converted to isobutene, isoprene and butadiene by dehydrogenation. As described in Peters, 1,3-butadiene can be used to make 1,4-butanediol and/or tetrahydrofuran (page 7, paragraph 56), and these can
10 then be used in turn to make additional polymer products, as well as gamma-butyrolactone, N-methylpyrrolidinone and N-vinylpyrrolidinone.

[0087] The 1,3-butadiene can also be used to prepare nylon-6,6 and nylon-6 polymers (Peters, paragraphs 61 and 62), in the former instance by reacting butadiene with HCN in the presence of a zero valent nickel catalyst to
15 provide adiponitrile. The adiponitrile can be hydrogenated to form hexamethylenediamine, and hydrolyzed to form adipic acid. The hexamethylenediamine and adipic acid can be polymerized to form the nylon-6,6 polymer. Alternatively, the adiponitrile can be hydrocyanated and cyclized to caprolactam, referencing US 5,801,286 and US 5,693,793, which can then be
20 polymerized to a nylon-6 polymer.

[0088] Peters also describes, at paragraph 64, that the 1,3-butadiene can be used to prepare renewable styrene, polystyrene and styrenic polymers. For example, 1,3-butadiene can be dimerized to vinylcyclohexene, which can be dehydrogenated in stepwise fashion to form ethyl benzene and then styrene.
25 Alternatively, the vinylcyclohexene can be dehydrogenated directly to styrene.

[0089] The 1,3-butadiene in still another embodiment can undergo cyclotrimerization to form 1,5,9-cyclododecatriene (CDT), for example, as described in US 8,168,841 to Herwig et al. or any of a number of known processes referenced by Herwig et al. and elsewhere. As with non-renewable
30 CDT from conventional butadiene, the CDT may be brominated to make flame

retardants and used to prepare lactams, e.g., lauryllactam, for being polymerized to a renewable nylon-12 (or for being used as a monomer in other polymers), or for preparing 1,12-dodecanedioic acid which is a known commercially useful dicarboxylic acid.

5 [0090] Peters relates other uses that can be made of the isobutene, as well, including methylmethacrylate, methacrylic acid and methacrylic acid esters generally, see para. 68 of Peters.

 [0091] The 1-butene and 2-butene products can likewise be used in still other ways, as described, for example, in the "Butenes" article referenced above
10 and in the various publications cited in the "Butenes" article. Briefly, however, the butenes can be placed to the same uses as found for the non-renewable butenes: for alkylate gasoline, polymer gasoline, as a plant fuel or simple fuel blendstock, for 1-butene as a co-monomer in linear low density polyethylene and high density polyethylene.

15 [0092] The 1-butene and 2-butene products can in other embodiments be used to make maleic anhydride. While US 3,907,834 to Milberger et al. for a "Process for Making Maleic Anhydride" (using mixed oxides of antimony and molybdenum) and US 4,240,931 also to Milberger et al. for "Oxidation Catalyst" describe processes for converting n-butenes and 1,3-butadiene to maleic
20 anhydride and cite to other, previous descriptions of the same transformation, US 4,075,232 to Zagata et al. observes that two fixed-bed reactors containing two different catalysts had been considered advisable for best yields -- with the first reactor being employed to convert n-butenes to butadiene and the second reactor being optimized to convert the butadiene to maleic anhydride. Zagata
25 et al. purported to improve upon the earlier, single catalyst and two fixed bed reactor/two catalyst processes by employing the combination of two catalysts in one, substantially undivided reaction zone in a fluidized reactor. According to Zagata et al., surprisingly the two reactions are compatibly run in the same space and provide substantial yields of maleic anhydride.

[0093] Turning now to the propylene product 66, this material can be used in the conventional ways that propylene from fossil fuel processing may be used: polymerization in isotactic, syndiotactic and atactic forms, for oxidation in the presence of ammonia to produce acrylonitrile, to make propylene oxide and its derivatives (glycols, amines and polyether polyols), to make isopropanol, to alkylate benzene and produce cumene thereby, to make acrylic acid for production of acrylate esters, acrylamides and polyacrylates etc., see "Propene", Ullmann's Encyclopedia of Industrial Chemistry, 11th edition, Wiley-VCH Verlag GmbH & Co. KGaA, Weinheim (2012) at pages 1-18 and the references cited therein.

[0094] The present methods will be further illustrated by the following non-limiting examples:

EXAMPLES

[0095] Commercial zirconium hydroxide was dried at 120 degrees Celsius for more than 5 hours. A calculated amount of $\text{Zn}(\text{NO}_3)_2$ (from Sigma-Aldrich, more than 99.8 percent purity) was dissolved in water, forming a clear solution. The dried zirconium hydroxide (which was also from Sigma-Aldrich, more than 99.8 percent purity) was then mixed with the solution by incipient wetness, in order to form wet powders impregnated with Zn. The wetted powder was then dried at 80 degrees Celsius for 4 hours, followed by calcination at 550 degrees Celsius for 3 hours, to obtain a $\text{Zn}_1\text{Zr}_{10}\text{O}_x$ catalyst by the incipient wetness impregnation method of the '312 application.

[0096] The catalyst thus prepared was then placed in a fixed-bed stainless steel reactor having an inside diameter of 5 millimeters, with from 100-800 mg of the catalyst being packed between quartz wool beds. A thermocouple was placed in the middle of the catalyst bed to monitor the reaction temperature. Before beginning the reaction, the catalyst bed was pretreated by flowing 50 ml/minute of nitrogen at 450 degrees Celsius through the catalyst over a half hour. A mixed acetic/propionic aqueous acid feed at a selected molar ratio of acetic:propionic acids was then introduced into an

evaporator at 180 degrees Celsius by means of a syringe pump, and the vaporized steam/ acid feed was carried into the reactor by a hydrogen and nitrogen gas mixture at a selected hydrogen partial pressure and a particular WHSV on a grams of acetic acid per gram of catalyst per hour basis. The product line was heated to in excess of 150 degrees Celsius before a cold trap, to avoid condensing the liquid products in the product line. A reaction temperature of 415 degrees Celsius was employed for all examples.

[0097] A Shimadzu 2400 gas chromatograph equipped with an auto sampling valve, HP-Plot Q column (30 m, 0.53 mm, 40 μ m) and flame ionization detector was connected to the line between the reactor outlet and cold trap to collect and analyze the products in the effluent gas. After the cold trap, an online micro-GC (MicroGC 3000A equipped with molecular sieves 5A, plot U columns and thermal conductivity detectors) was used to analyze the product gases specifically, using nitrogen as a reference gas.

The results of the various examples at two different acetic:propionic acid molar ratios and the same set of hydrogen partial pressures are as shown in Table 1 following:

Table 1 Mixed propionic acid and acetic acid to C3-C6 reaction in the presence of hydrogen

Run #	Reaction temperature (°C)	Pressure (atm)	Acetic acid to propionic acid ratio (Molar)	WHSV (G _{acetic acid} /g _{catal} /hr)	Steam to carbon ratio	Acetone selectivity (mol %)	MEK selectivity (mol %)	3-pentanone selectivity (mol %)	C3 * Selectivity (mol %)	C4 * selectivity (mol %)	C5 * selectivity (mol %)	C6 selectivity (mol %)
1	415	0	1.0	0.07	5	5.4	16.5	2.4	0.0	14.1	19.6	4.6
2	415	10	1.0	0.07	5	3.0	8.3	1.3	10.8	22.2	13.2	3.0
3	415	40	1.0	0.07	5	0.5	1.5	0.7	11.6	31.9	12.0	2.5
4	415	80	1.0	0.07	5	0.3	0.6	0.3	11.7	32.9	12.2	2.6
5	415	0	23.4	0.28	5	17.8	5.7	0.0	0.0	37.9	5.4	0.0
6	415	5	23.4	0.28	5	16.8	5.3	0.0	9.2	31.5	3.6	0.0
7	415	10	23.4	0.28	5	15.7	4.6	0.0	11.0	31.1	3.2	0.0
8	415	20	23.4	0.28	5	15.5	5.3	0.0	15.8	27.4	3.2	0.0
9	415	40	23.4	0.28	5	11.9	4.7	0.0	24.3	23.3	2.5	0.0
10	415	80	23.4	0.28	5	8.0	3.2	0.0	35.2	17.8	3.9	0.0

* C3 refers to propylene; C4 include isobutene, 1-butene and 2-butene; C5 includes 2-methyl-2-butene, 2-methyl-1-butene, and 2-pentene

Whole composition of the reactions:

Run #	H2O	N2	H2	CH4	Ethylene	Acetone	MEK	3-pentanone	IB	Isopentenes	C6	propene	1&2-butene	2-pentene	CO2
1	7.1845 %	92.1053 %	0.0000 %	0.0689 %	0.0093 %	0.0258 %	0.0592 %	0.0069 %	0.0506 %	0.0563 %	0.0110 %	0.0000 %	0.0000 %	0.0000 %	0.4 %
2	7.1820 %	82.8658 %	9.2073 %	0.1091 %	0.0280 %	0.0144 %	0.0298 %	0.0037 %	0.0405 %	0.0362 %	0.0072 %	0.0517 %	0.0391 %	0.0020 %	0.3 %
3	7.1812 %	55.2374 %	36.8249 %	0.2038 %	0.0287 %	0.0024 %	0.0054 %	0.0020 %	0.0344 %	0.0253 %	0.0060 %	0.0555 %	0.0800 %	0.0089 %	0.3042 %
4	7.1817 %	18.4139 %	73.6555 %	0.2483 %	0.0244 %	0.0014 %	0.0022 %	0.0009 %	0.0316 %	0.0264 %	0.0060 %	0.0550 %	0.0850 %	0.0138 %	0.2540 %
5	6.7749 %	92.5338 %	0.0000 %	0.0407 %	0.0000 %	0.0804 %	0.0193 %	0.0000 %	0.1284 %	0.0146 %	0.0000 %	0.0000 %	0.0000 %	0.0000 %	0.4079 %
6	6.7739 %	87.8943 %	4.6260 %	0.0542 %	0.0027 %	0.0759 %	0.0180 %	0.0000 %	0.1067 %	0.0098 %	0.0000 %	0.0416 %	0.0000 %	0.0000 %	0.3970 %
7	6.7735 %	83.2632 %	9.2515 %	0.0664 %	0.0041 %	0.0709 %	0.0156 %	0.0000 %	0.1030 %	0.0087 %	0.0000 %	0.0497 %	0.0020 %	0.0000 %	0.3916 %
8	6.7742 %	74.0191 %	18.5048 %	0.0650 %	0.0034 %	0.0700 %	0.0180 %	0.0000 %	0.0891 %	0.0087 %	0.0000 %	0.0714 %	0.0037 %	0.0000 %	0.3726 %
9	6.7735 %	55.5084 %	37.0056 %	0.0664 %	0.0041 %	0.0537 %	0.0159 %	0.0000 %	0.0725 %	0.0065 %	0.0000 %	0.1097 %	0.0064 %	0.0005 %	0.3767 %
10	6.7751 %	18.5073 %	74.0291 %	0.0772 %	0.0197 %	0.0361 %	0.0108 %	0.0000 %	0.0491 %	0.0076 %	0.0000 %	0.1590 %	0.0115 %	0.0030 %	0.3144 %

CLAIMS

What is claimed is:

1. A process for making a product mixture including isobutene, propylene,
5 1-butene, 2-butene, 2-methyl-1-butene and 2-methyl-2-butene from a
mixture of acetic acid and propionic acid through reaction in the
presence of a source of hydrogen and of a catalyst.
2. A process according to claim 1, wherein the catalyst is a $Zn_xZr_yO_z$ mixed
10 oxide catalyst.
3. A process according to claim 2, wherein the $Zn_xZr_yO_z$ mixed oxide
catalyst contains less than 0.14 percent by weight of sulfur.
4. A process according to claim 2, wherein the $Zn_xZr_yO_z$ mixed oxide
15 catalyst contains less than 0.01 percent by weight of sulfur.
5. A process according to claim 2, wherein the $Zn_xZr_yO_z$ mixed oxide
catalyst contains less than 0.001 percent by weight of sulfur.
- 20 6. A process according to any of claims 2-5, wherein x:y is from 1:100 to
10:1.
7. A process according to claim 6, wherein x:y is from 1:30 to 1:1.
- 25 8. A process according to claim 7, wherein x:y is from 1:20 to 1:5.
9. A process according to claim 8, wherein x:y is from 1:12 to 1:10.
- 30 10. A process according to claim 1, wherein the mixture of acetic acid and
propionic acid is or is obtained from a mixed acid fermentation broth
from a fermentation of one or more of the five carbon sugars, six carbon

sugars, lactic acid and lactate substrates, wherein acetic acid and propionic acid are the two most prevalent acids.

5 11. A process according to claim 1, wherein the mixture of acetic acid and propionic acid is obtained by combining a fermentation broth from a fermentation preferentially producing acetic acid and a fermentation broth from a fermentation preferentially producing propionic acid.

10 12. A process according to claim 1, wherein the mixture of acetic acid and propionic acid is obtained from a process for producing 1,2-propanediol by the hydrogenolysis of a feedstock selected from one or more of glycerol, the five and six carbon sugars and sugar alcohols, lactate and lactic acid in the presence of hydrogen and a suitable hydrogenolysis catalyst and under conditions which are effective for carrying out the
15 hydrogenolysis and in which at least some ethylene glycol is also produced, by dehydrating and oxidizing at least part of the ethylene glycol to form acetic acid and dehydrating and oxidizing at least part of the 1,2-propanediol to form propionic acid, then combining at least some of the acetic acid thus formed with at least some of the propionic acid
20 thus formed.

25 13. A process according to claim 1, further comprising separating the product mixture to provide a propylene product, a C₄ product including isobutene, 1-butene and 2-butene, and a C₅ product including 2-methyl-1-butene and 2-methyl-2-butene.


14. A process according to claim 13, further comprising catalytically converting 2-methyl-1-butene and 2-methyl-2-butene to isoprene.

33

15. A process according to claim 13, further comprising a separations step performed on the C₄ product to separate isobutene in the C₄ product from 1-butene and 2-butene in the C₄ product.

5 16. A process according to claim 14, further comprising converting 1-butene, 2-butene or both to 1,3-butadiene through catalytic dehydrogenation or oxydehydrogenation.

10

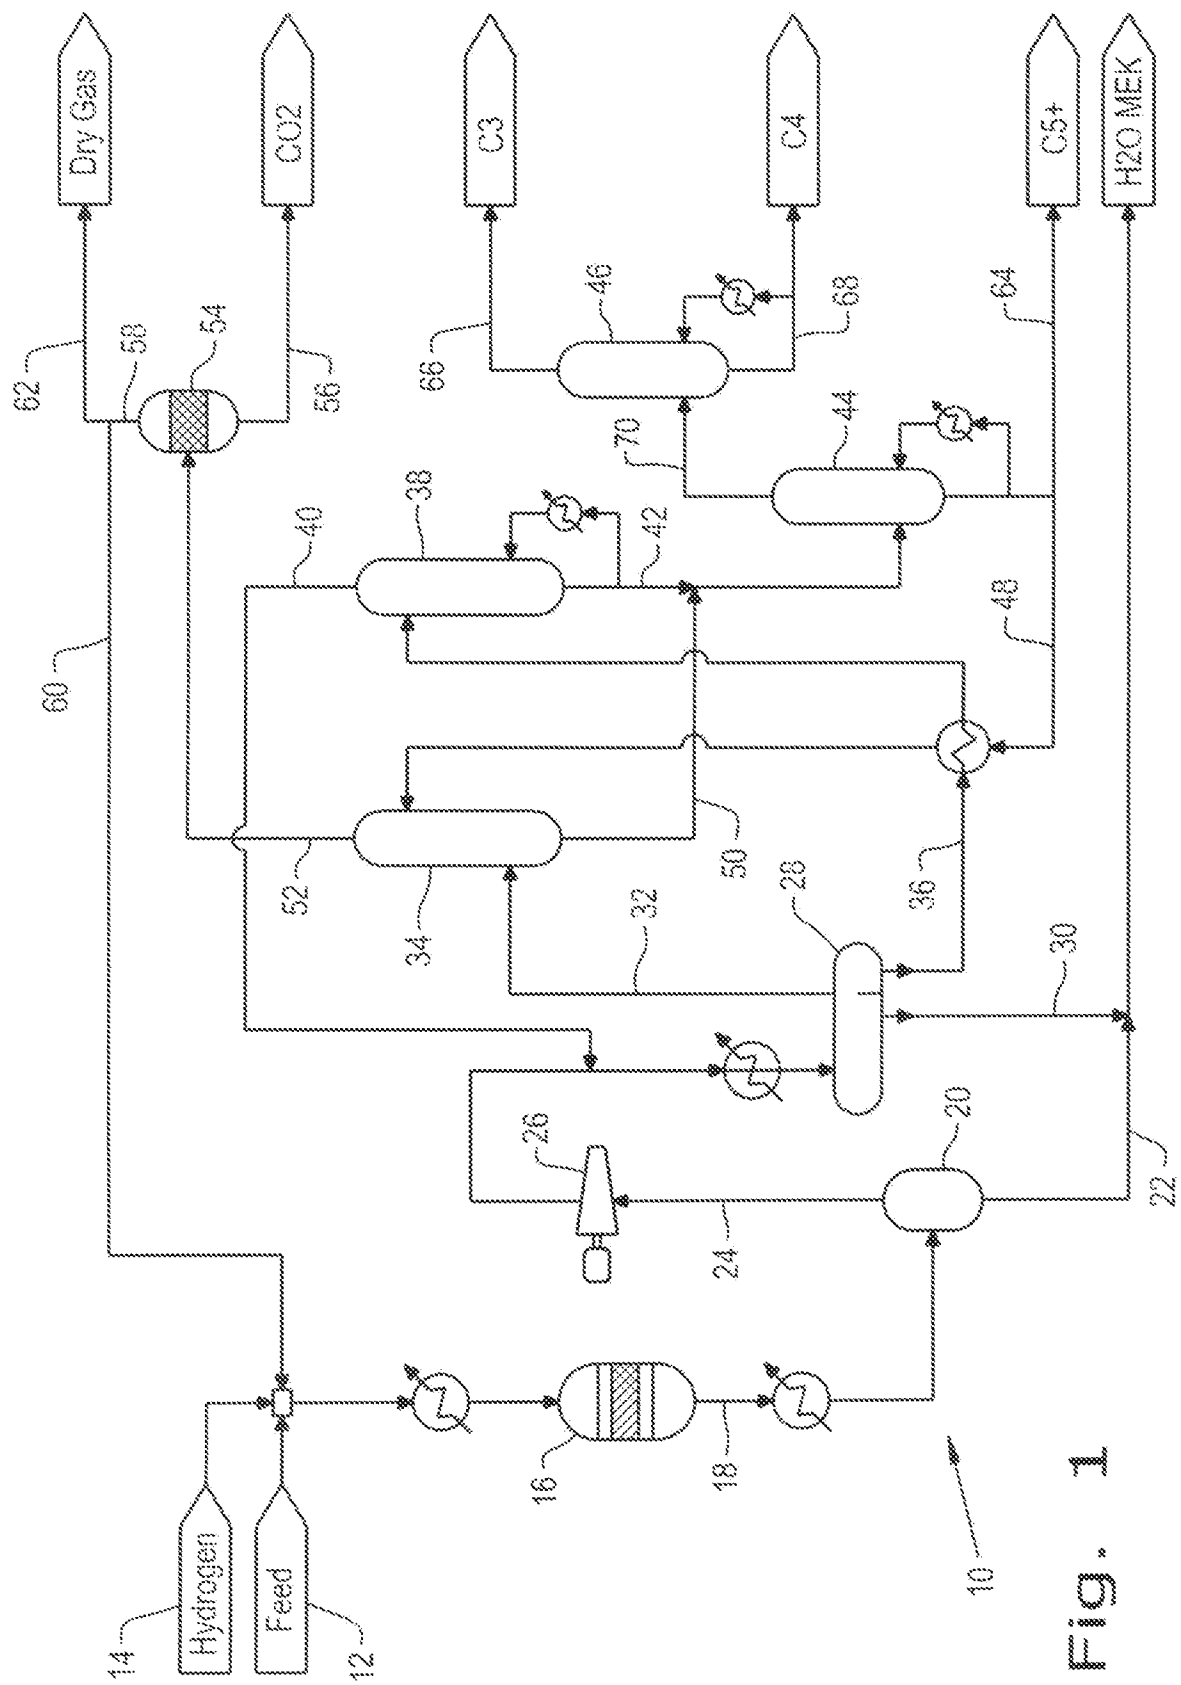

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/074854**A. CLASSIFICATION OF SUBJECT MATTER****C07C 7/20(2006.01)i, B01J 23/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C07C 7/20; C07C 31/125; C07C 29/00; C07D 307/20; B01J 23/06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: acetic acid, propionic acid, catalytic hydrogenation, isobutene, propylene, butene and 2-methyl butene.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SUN, J. et al., "Direct conversion of bio-ethanol to isobutene on nanosized Zn _x Zr _y O _z mixed oxides with balanced acid-base sites", Journal of the American Chemical Society, 2011, Vol. 133, pages 11096-11099. See abstract, fig. 1 and 2.	1-16
A	MIZUNO, S. et al., "One-path and selective conversion of ethanol to propene on scandium-modified indium oxide catalysts", Chem. Lett., 25 August 2012, Vol. 41, pages 892-894. See fig. 1, 2 and table 1.	1-16
A	US 4985572 A (KITSON, MELANIE et al.) 15 January 1991 See abstract and claims 1-18.	1-16
A	US 4104478 A (TRIVEDI, BHUPENDRA C.) 01 August 1978 See abstract and claims 1-10.	1-16
PA	LIU, C. et al., "A study of Zn _x Zr _y O _z mixed oxides for direct conversion of ethanol to isobutene", Applied Catalysis A: General, 15 July 2013, Vol. 467, pages 91-97. See abstract and fig. 1-15.	1-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 April 2014 (17.04.2014)

Date of mailing of the international search report

18 April 2014 (18.04.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KANG, Tai Hyun

Telephone No. +82-42-481-8408



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/074854

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4985572 A	15/01/1991	CN 1017703 B	05/08/1992
		CN 1030072 A	04/01/1989
		CN 1059296 A	11/03/1992
		EP 0285420 A1	05/10/1988
		EP 0417867 A1	20/03/1991
		EP 0662343 A1	12/07/1995
		JP 02-749090 B2	13/05/1998
		WO 88-07515 A1	06/10/1988
US 4104478 A	01/08/1978	None	