




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : E04H 15/32, E04G 21/28 // A44B 13/00, F16B 19/08	A1	(11) International Publication Number: WO 94/09232 (43) International Publication Date: 28 April 1994 (28.04.94)
(21) International Application Number: PCT/DK93/00314 (22) International Filing Date: 30 September 1993 (30.09.93) (30) Priority data: 1278/92 20 October 1992 (20.10.92) DK 1564/92 28 December 1992 (28.12.92) DK (71) Applicant (for all designated States except US): POLYSH-EET A/S [DK/DK]; Marielundvej 41-43, DK-2730 Herlev (DK). (72) Inventor; and (75) Inventor/Applicant (for US only) : SØLBECK, Peter [DK/DK]; Rungsted Strandvej 203, DK-2960 Rungsted Kyst (DK). (74) Agents: RAFFNSØE, Knud, Rosenstand et al.; International Patent-Bureau, Høje Taastrup Boulevard 23, DK-2630 Taastrup (DK).		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Danish).</i>

(54) Title: AN ANCHORING EYELET FOR TARPAULINS AND SIMILAR COVERINGS

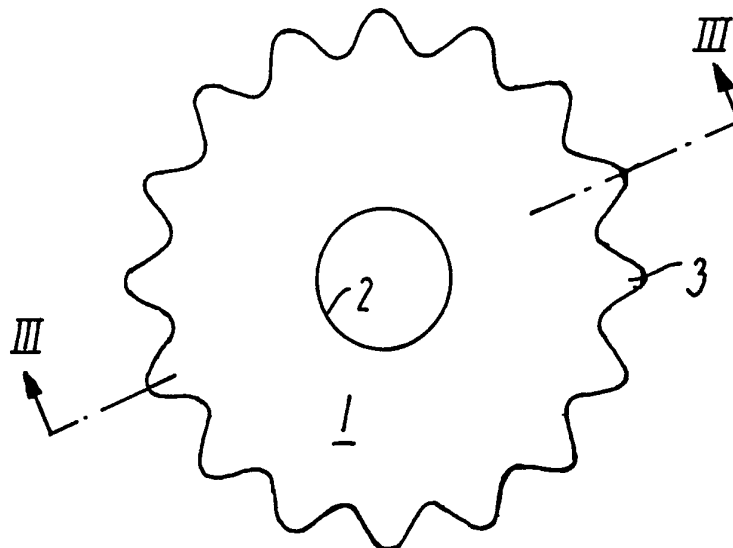

(57) Abstract

An anchoring eyelet for tarpaulins and similar coverings of a thermoplastic foil material is designed as a substantially annular disc (1) made of plastic. The eyelet has an eyelet opening (2) and is designed in its peripheral part with increased resiliency by means of indentations which may be formed by radially extending resilient tongues (3) or lobes. This avoids any tendency of the eyelets to become detached after being pressed in, while forming notches at heavy loads.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

An anchoring eyelet for tarpaulins and similar coverings

The invention relates to an anchoring eyelet for tarpaulins and similar coverings of a thermoplastic foil material, which eyelet is designed as a substantially annular disc of plastic material provided with an eyelet opening.

Tarpaulins of a thermoplastic foil material, possibly with a net reinforcement, is used extensively for covering scaffolding in connection with construction works and for numerous covering purposes, for example for protection of materials and equipment stored out in the open.

For the purpose of fastening to supporting structures or interconnection, the tarpaulins are provided with anchoring eyelets which are pressed into the foil material in direct connection with the extrusion such as is known from international patent application No. WO 91/00801.

The tarpaulin eyelets used so far are shaped as relatively thin and stiff annular discs having a circular, relatively sharp-edged outer periphery.

For tarpaulins with inserted eyelets of this type there may be a certain risk of notch formation at the eyelet edges, partly in connection with the pressing of the eyelets into the foil material, the consequence of which is that at later heavy loads, for example wind loads and tensile influences on the eyelets from the anchor straps, the eyelets risk becoming detached from the foil material.

This problem is remedied according to the invention through a design of anchoring eyelets which are characterized in that the peripheral part of the eyelet disc is designed with increased resiliency by means of indentations.

The design of the peripheral part of the eyelet disc with increased resiliency through the provision of indentations has proved in practice to eliminate or at least highly reduce the above tendency to notch formation, as transversely acting load forces seeking to detach the tarpaulin from the eyelets are substantially transformed into shear forces in the plane of the tarpaulin, because the peripheral edge zone of the disc acts as a supple joint between the relatively stiff middle part of the eyelet disc and the surrounding foil material of the tarpaulin.

The indentations may be designed in various ways. In a very simple embodiment, the increased suppleness may thus be obtained by designing a ring of holes of an arbitrary shape within the periphery of the disc.

However, a preferred embodiment is characterized in that indentations are formed by radially extending resilient tongues or lobes at the periphery of the eyelet disc.

This also entails the further advantage that the external peripheral length of the eyelet discs is increased in consequence of the radially extending tongues.

The desired resiliency of the peripheral part of the eyelet disc may further be increased by designing further openings in the form of holes in the resilient tongues or lobes.

In comparison with conventional eyelets, which are often exposed to considerable wear at the eyelet opening edge despite their implementation in a relatively stiff material, the increased resiliency of the peripheral part of the disc opens up a favourable possibility of reinforcement of the central part of the disc around the eyelet opening, for example by means of a reinforcing ring.

The anchoring eyelets according to the invention may be pressed into the foil material directly in connection with the extrusion, while the material is still soft, but may also be fastened by heat sealing or
5 adhesion. Independently of the fastening method it may be appropriate for the indentations between the tongues to have a rounded bottom, in order to ensure sturdy sealing to the foil material.

The invention will now be explained in further
10 detail with reference to the drawings, in which

Fig. 1 is a plane view of an embodiment of an anchoring eyelet according to the invention,

Fig. 2 is an enlarged partial view of the eyelet of Fig. 1,

15 Figs. 3 and 4 show sectional views along the lines III-III and IV-IV of Figs. 1 and 2, respectively, and Figs. 5 and 6 show a modified embodiment.

The anchoring eyelet shown in Fig. 1 is designed as a substantially annular disc 1 having an eyelet
20 opening 2 which is shown in a position in the centre of the disc 1, but which may also be in an off-centre position.

In accordance with the invention, the peripheral part of the eyelet disc 1 is designed with increased
25 resiliency by means of indentations which, in the embodiment shown, are formed by radially extending resilient tongues 3 at the periphery of the disc.

The disc 1 is made of a suitable thermoplastic material such as linear low-density polyethylene (LLDP),
30 and the resiliency of the tongues 3 is increased by the fact that the thickness of the disc 1 decreases from the inner edge at the eyelet opening 2 towards the periphery of the disc at the end of the tongues 3, such as it appears from Fig. 3. The tongues 3 are preferably evenly
35 distributed along the circumference of the disc 1, for

example at an angle of division v of 22.5° as shown in Fig. 2, corresponding to a total of 16 tongues.

The shape of the individual tongues 3 may suitably be so that the width a of the tongue is substantially equal to the distance b between the freely extending ends of neighbouring tongues, corresponding to an angle u of 45° between the two side edges of the tongue.

The radial length c of each tongue is adapted to the periphery of the disc and may be from 5 to 15 per cent, preferably about 10 per cent thereof, which has proved to give a suitable elastic deformability of the tongues.

To ensure sturdy sealing at the fastening of the eyelets in a thermoplastic foil material, which may be done either by pressing in connection with extrusion of the material as explained in said international patent application, or by subsequent heat sealing or adhesion, the indentation 4 between the tongues is preferably designed with a rounded bottom as shown in Fig. 2.

The tapering of the disc towards the periphery is also, as shown in Fig. 3, implemented at the bottoms of the tongues, and correspondingly, the individual tongues 3 have a lens-shaped convex cross section as shown in the enlarged sectional view in Fig. 4, so that all the way round along the circumference, the disc 1 exhibits a uniformly slight material thickness adapted to the foil in which the eyelets are to be placed.

In the modified embodiment shown in Figs. 5 and 6, the resiliency of the peripheral part of the eyelet disc 6 is further increased by circular holes 8 being formed in the radially extending tongues 7, of which there are eight in this embodiment.

At the same time, the strength of the disc 6 immediately around the eyelet opening 9 is increased by

5

means of a reinforcing ring 10, which may, for example,
be made of metal.

P A T E N T C L A I M S

1. An anchoring eyelet for tarpaulins and similar coverings of a thermoplastic foil material, which eyelet is designed as a substantially annular disc (1) of plastic material provided with an eyelet opening (2), characterized in that the peripheral part of the eyelet disc is designed with increased resiliency by means of indentations.

2. An anchoring eyelet according to claim 1, characterized in having radially extending resilient tongues (3) or lobes at the periphery of the eyelet disc (1).

3. An anchoring eyelet according to claim 2, characterized in that the tongues (3) are evenly distributed along the circumference of the disc (1) and have a distance (b) between their outer ends corresponding substantially to the width (a) of each tongue at its foot.

4. An anchoring eyelet according to claim 3, characterized in that the radial length (c) of each tongue (3) is 5-15 per cent, preferably 10 per cent, of the maximum diameter of the eyelet disc between diametrically opposite tongue tips.

5. An anchoring eyelet according to claim 3 or 4, characterized in that the indentations (4) between the tongues have rounded bottoms (5).

6. An anchoring eyelet according to any one of the preceding claims, characterized in that the thickness of the eyelet disc (1) is smaller at the periphery than at the internal edge around the eyelet opening (2).

7. An anchoring eyelet according to claim 6,

c h a r a c t e r i z e d in that the thickness of the eyelet disc (1) decreases substantially evenly towards the periphery of the disc.

8. An anchoring eyelet according to claims 2 and 5 7, c h a r a c t e r i z e d in that the individual tongues (3) or lobes (3) have a substantially lens-shaped convex cross-sectional profile at right angles to the corresponding radius of the eyelet disc.

9. An anchoring eyelet according to any one of the 10 claims 3-5 and 8, c h a r a c t e r i z e d in that further cuts in the form of holes (8) have been formed in the resilient tongues or lobes (7).

10. An anchoring eyelet according to any one of the preceding claims, c h a r a c t e r i z e d in that 15 the eyelet disc (6) is designed with a reinforcing ring (10) around the eyelet opening (9).

1/2

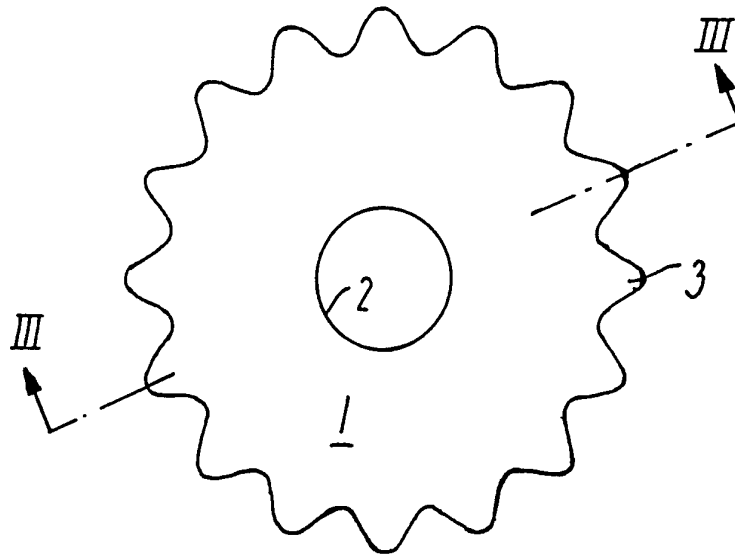


FIG. 1

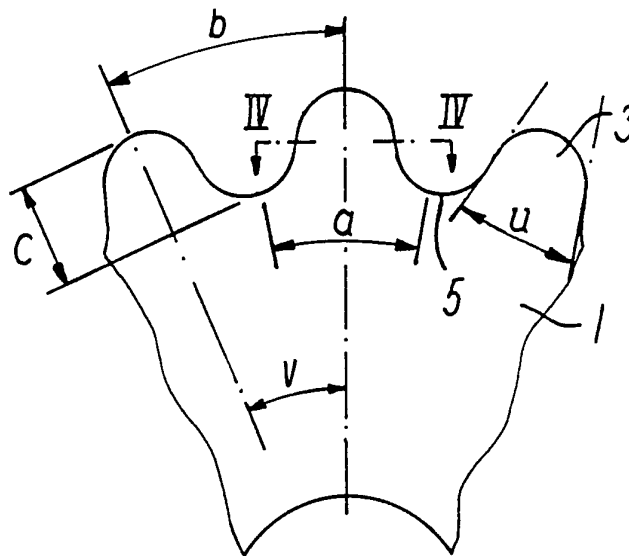


FIG. 2

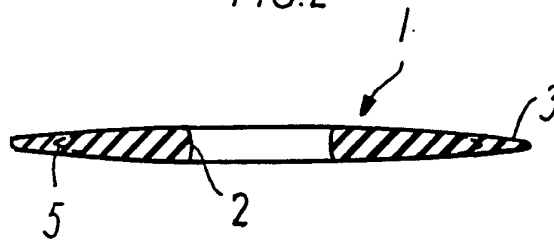


FIG. 3



FIG. 4

2/2

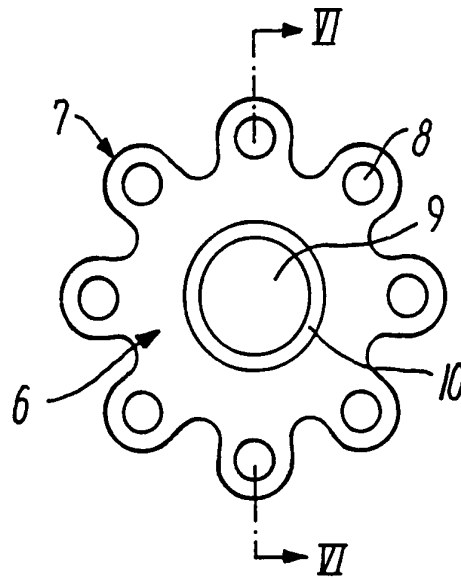


FIG. 5

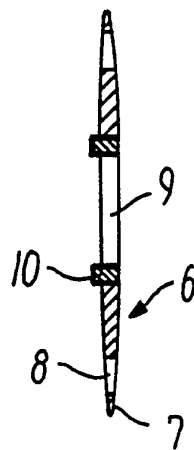


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 93/00314

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: E04H 15/32, E04G 21/28 // A44B 13/00, F16B 19/08
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: E04H, A43C, A44B, E04G, A41F, A41H, F16B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB, A, 1437700 (HANS MEYER K.G.), 3 June 1976 (03.06.76), page 1, line 9 - line 30; page 1, line 58 - line 61, figure 2	1-5,10
Y	---	6-9
Y	WO, A1, 9100801 (POLYSHEET A/S), 24 January 1991 (24.01.91), page 4, line 6 - line 13	6-9
A	US, A, 872237 (W. HUGHES), 26 November 1907 (26.11.07), page 1, column 1, line 7 - line 10, figures 1,3	1,2,3,4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 December 1993

Date of mailing of the international search report

24-01-1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Tommy Blomberg
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/11/93

International application No.

PCT/DK 93/00314

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 1437700	03/06/76	NONE	
WO-A1- 9100801	24/01/91	AU-B- 631002	12/11/92
		AU-A- 6150990	06/02/91
		CA-A- 2063733	08/01/91
		EP-A,B- 0481009	22/04/92
US-A- 872237	26/11/07	NONE	