

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Safety shield for medical needles

(51)⁶ International Patent Classification(s)
A61M 5/32 (2006.01) **08BMEP** **A61M**
A61M 5/31 (2006.01) 5/31
A61M 5/32 20060101ALN200510
20060101AFI2005100 08BMEP
PCT/US2003/038080

(21) Application No: 2003302605

(22) Application Date: 2003 .12 .01

(87) WIPO No: W004/050150

(30) Priority Data

(31) Number	(32) Date	(33) Country
10/307,812	2002 .12 .02	US

(43) Publication Date : 2004 .06 .23

(43) Publication Journal Date : 2004 .07 .29

(71) Applicant(s)
Tyco Healthcare Group LP

(72) Inventor(s)
Smith, Daniel K.; Ferguson, F. Mark

(74) Agent/Attorney
Spruson & Ferguson, Level 35 St Martins Tower 31 Market Street, Sydney, NSW, 2000

(56) Related Art
WO 2002/070056
US 2002/0156427
US 2001/0039401
US 5611782
US 6015397



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SAFETY SHIELD FOR MEDICAL NEEDLES

Background of the Invention

1. Technical Field

5 The present disclosure generally relates to safety shields for medical needles, and more particularly, to extensible safety shields that employ a manual actuator to configure the safety shield from a retracted position into an extended position.

2. Description of the Related Art

10 Problems associated with inadvertent needle sticks are well known in the art of blood sampling, percutaneous medication injection and other medical procedures involving use of medical needles. Significant attention has been focused on needle stick problems due to the contemporary sensitivity of exposure to AIDS, Hepatitis and other serious blood-borne pathogens.

Procedures for removing a needle from a patient commonly require a clinician to use one hand to place pressure at the wound site where a needle is being withdrawn, while
15 removing the needle device with the other hand. It is also common practice for a clinician to give higher priority to care for the wound than is given to disposal of the needle. In the case of typical needle devices without safety shields, such priority either requires the convenience of an available sharps container within reach or another means for safe disposal, without leaving the patient's side. Thus, the difficulty in providing adequate care
20 while following safety procedures is often compounded by the patient's physical condition and mental state, such as in burn units and psychiatric wards. Under such conditions, proper disposal of a used needle, while caring for a patient, is a technological challenge to the state of the art.

The widespread knowledge and history associated with needle care and disposal
25 problems have resulted in numerous devices for preventing accidental needle sticks. Some devices utilize a separate sheath or cap mounted over the needle after use. These devices, however, require two-handed manipulation from a practitioner.

Other known devices employ sheaths that are spring activated, telescoping, pivoting, etc. These devices, however, may disadvantageously misfire, be inadvertently
30 activated or cumbersome to activate. Further drawbacks of current devices include high manufacturing cost due to complexity and the number of parts. Thus, these type prior art devices may not adequately and reliably shield needle infusion and/or fluid collection apparatus to prevent hazardous exposure.

Consequently, there remains a need to provide a more satisfactory solution for needle safety devices by overcoming the disadvantages and drawbacks of the prior art. Therefore, it would be desirable to provide a more adequate and reliable medical needle shield apparatus which employs an extensible safety shield to prevent hazardous exposure to a needle. Such a needle shield apparatus should be easily and reliably extendable to shield a needle tip of a needle cannula. It would be desirable if the needle shield apparatus was actuated via one handed operation. It would be highly desirable if the medical needle shield apparatus facilitates efficient assembly and manufacture thereof.

Object of the Invention

It is an object of the present invention to substantially overcome or at least ameliorate one or more of the disadvantages of the prior art, or to at least provide a useful alternative.

Summary of the Invention

There is firstly disclosed herein a medical needle shield apparatus comprising:

a shield being extensible from a retracted position to an extended position for enclosing a distal end of a needle of a medical needle device, said shield including a collar that is to be mounted to said medical needle device, said shield further including a proximal portion articulating from said collar and a distal portion articulating from the proximal portion, said distal portion being configured to enclose the distal end of said needle, wherein said proximal portion includes an engagement surface being engageable by the user to urge said shield from said retracted position to said extended position and said collar having an inner surface that defines a cavity, said inner surface including at least one first interlock; and

a mounting ring configured for mounting with said medical needle device, said mounting ring having an outer surface that includes at least one second interlock,

wherein said collar is mounted for relative rotational movement with said mounting ring such that the outer surface of said mounting ring is disposed within said cavity of said collar, said at least one first interlock being disposed adjacent the outer surface of the mounting ring such that the at least one second interlock prevents movement in the proximal and axial direction relative to a longitudinal axis of the medical needle device, and said collar includes a guard extending therefrom and being disposed adjacent to said distal portion of said shield in said retracted position such that

inadvertent extension of said shield by the user via engagement of said distal portion is prevented.

Accordingly, the present disclosure addresses a need for a medical needle shield apparatus which effectively and inexpensively protects a tip of a medical needle after use.

- 5 The present disclosure resolves related disadvantages and drawbacks experienced in the art. More specifically, the apparatus and method of this invention constitute an important advance in the art of safety needle devices.

In one particular embodiment, a medical needle shield apparatus is provided in accordance with the principles of the present disclosure. The medical needle shield

2a

AH21(2361339 1):KEH

apparatus includes a first cylinder, such as, for example, a shield that is extensible from a retracted position to an extended position for enclosing a distal end of a needle of a medical needle device. The shield includes a collar that is mounted to the medical needle device. The shield further includes a proximal portion extending from the collar and a distal portion
5 extending from the proximal portion. The distal portion is configured to enclose the distal end of the needle in the extended position. The proximal portion includes an engagement surface that is engageable to urge the shield from the retracted position to the extended position. The collar includes a guard extending therefrom and is disposed adjacent to the distal portion of the shield in the retracted position such that inadvertent extension of the
10 shield, via engagement of the distal portion, is prevented.

The collar may include a guard support extending therefrom and supportingly associated with the guard. The distal portion may include a planar portion disposed on the proximal side of the distal portion and protectedly adjacent the guard. The guard prevents the planar portion from being used to extend the shield into the extended position. The
15 guard can be disposed protectedly adjacent the distal portion so as to prevent axial and perpendicular movement of the shield via the distal portion. The guard can be sized and shaped relative to the distal portion to prevent engagement with the distal portion.

Alternatively, the engagement surface includes a manual actuator for manipulating the shield to the extended position. The collar may include a latch that engages a catch on
20 the distal portion to releasably lock the shield in the retracted position. The distal portion may include a fulcrum configured to engage the needle to facilitate the extension of the shield from the retracted position to the extended position. The distal portion may include a planar surface and a nose portion. The nose portion includes at least a portion of the planar surface. The nose portion defines a cavity for disposal of the needle therein. The cavity is
25 defined by side walls and the planar surface. The distal portion can include a lock that engages the needle to fix the shield in the extended position. The proximal portion may include a lock and the distal portion may include a lock which cooperate to fix the shield in the extended position.

In an alternate embodiment, the medical needle shield apparatus includes a first
30 cylinder including a collar. The collar has an inner surface that defines a cavity. The inner surface includes at least one radially inward projecting collar stop. A second cylinder is configured for mounting with a medical needle device. The second cylinder has an outer surface that includes at least one radially outward projecting proximal stop and at least one

radially projecting distal stop. The collar is mounted for relative rotational movement with the second cylinder such that the outer surface of the second cylinder is disposed within the cavity of the collar. The at least one collar stop is disposed adjacent the outer surface of the second cylinder such that the at least one proximal stop prevents distal axial movement, relative to a longitudinal axis of the medical needle device, of the collar and the at least one distal stop prevents proximal axial movement of the collar.

The first cylinder may include a shield that is extensible from a retracted position to an extended position for enclosing a distal end of a needle of the medical needle device. The shield may further include a proximal portion extending from the collar and a distal portion extending from the proximal portion. The distal portion is configured to enclose the distal end of the needle.

The collar may include a plurality of collar stops and the second cylinder may include a plurality of proximal stops and a plurality of distal stops. The plurality of collar stops may be equidistantly spaced about the inner surface of the collar and the plurality of proximal stops may be equidistantly spaced about the outer surface of the second cylinder and the plurality of distal stops may be equidistantly spaced about the outer surface of the second cylinder.

Alternatively, the second cylinder may include a press ring that is mounted about the second cylinder in a press fit engagement to fixedly mount the second cylinder with the medical needle device. The second cylinder can be mounted to the medical needle device via an adhesive. Alternatively, the second cylinder includes a cover that has a first cover portion attached to a second cover portion that cooperate to support the medical needle device. The second cylinder further includes a cover base having a grip channel that engages a plunger. The first cover portion can lockingly engage the second cover portion. The grip channel may be disposed adjacent a proximal end of the medical needle device. The first cover portion may be pivotally associated with the second cover portion.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features and advantages of the present disclosure will be more fully understood from the following detailed description of the exemplary embodiments, taken in conjunction with the accompanying drawings in which:

FIGURE 1 is a cutaway perspective view of a medical needle shield apparatus in accordance with the principles of the present disclosure;

FIGURE 2 is an exploded perspective view of the medical needle shield apparatus shown in FIGURE 1;

FIGURE 3 is a partially exploded perspective view of the medical needle shield apparatus shown in FIGURE 1;

5 FIGURE 4 is a cutaway perspective view of an alternate embodiment of the medical needle shield apparatus shown in FIGURE 1;

FIGURE 5 is an exploded perspective view of the medical needle shield apparatus shown in FIGURE 4;

10 FIGURE 6 is a perspective view of another alternate embodiment of the medical needle safety shield apparatus shown in FIGURE 1;

FIGURE 7 is a partially exploded perspective view of the medical needle shield apparatus shown in FIGURE 6;

FIGURE 8 is an exploded perspective view of the medical needle shield apparatus shown in FIGURE 6;

15 FIGURE 9 is an exploded perspective view of alternate embodiment of the medical needle shield apparatus shown in FIGURE 6;

FIGURE 10 is an exploded perspective view of another alternate embodiment of the medical needle shield apparatus shown in FIGURE 6;

20 FIGURE 11 is a perspective view of another alternate embodiment of the medical needle shield apparatus shown in FIGURE 6;

FIGURE 12 is a partially exploded perspective view of the medical needle shield apparatus shown in FIGURE 11;

FIGURE 13 is an exploded perspective view of the medical needle shield apparatus shown in FIGURE 11; and

25 FIGURE 14 is a perspective view of another alternate embodiment of the medical needle shield apparatus shown in FIGURE 6.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

The exemplary embodiments of the medical needle shield apparatus and the methods of operation disclosed herein are discussed in terms of medical needles for infusion of intravenous fluids, medication infusion and fluid collection, and more particularly, in terms of a medical needle shield device employed with a needle shield apparatus associated with a needle cannula to prevent damage to the needle and possible hazardous exposure to the needle cannula, for example, through an inadvertent needle stick. It is contemplated that the needle cannula may be shielded during use including storage, transport, fluid infusion and/or collection, subsequent thereto, etc. It is envisioned that the present disclosure, however, finds application to a wide variety of cannula needles and devices for the infusion of preventive medications, medicaments, therapeutics, etc. to a subject. It is also envisioned that the present disclosure may be employed for collection of body fluids including those employed during procedures relating to phlebotomy, digestive, intestinal, urinary, veterinary, etc. It is also contemplated that the medical needle shield device may be utilized with other medical needle applications including feeding devices, phlebotomy devices, catheters, catheter introducers, guide wire introducers, spinal and epidural, biopsy, aphaeresis, dialysis, blood donor, Veress needles, Huber needles, etc.

In the discussion that follows, the term "proximal" refers to a portion of a structure that is closer to a clinician, and the term "distal" refers to a portion that is further from the clinician. As used herein, the term "subject" refers to a patient that receives infusions or has blood and/or fluid collected therefrom using the medical needle shield apparatus. According to the present disclosure, the term "clinician" refers to an individual administering an infusion, performing fluid collection, installing or removing a needle cannula from a medical needle shield apparatus and may include support personnel.

The following discussion includes a description of the medical needle shield apparatus, in accordance with the present disclosure. Reference will now be made in detail to the exemplary embodiments of the disclosure, which are illustrated in the accompanying figures.

Turning now to the figures, wherein like components are designated by like reference numerals throughout the several views. Referring initially to FIGURES 1-4, there is illustrated a medical needle shield apparatus 100 including a first cylinder, such as, for example, a shield 102 extensible from a retracted position to an extended position for

enclosing a distal end of a needle 104 of a medical needle device 106. Shield 102 includes a collar 108 mounted to medical needle device 106. A proximal portion, such as, for example, proximal segment 110 extends from collar 108. A distal portion such as, for example, distal segment 112 extends from proximal segment 110. Distal segment 112 is
5 configured to enclose the distal end of needle 104.

It is contemplated that shield 102 may include one or a plurality of segments. Proximal portion 110 includes an engagement surface 114, which is engageable to urge shield 102 from the retracted position to the extended position. Collar 108 includes a guard 116 which extends from collar 108 and is disposed adjacent to distal segment 112, when
10 shield 102 is in the retracted position. This configuration advantageously prevents the inadvertent extension of shield 102 via engagement of distal portion 112.

The components of the medical needle shield apparatus can be fabricated from a material suitable for medical applications, such as, for example, polymers or metals, such as stainless steel, depending on the particular medical application and/or preference of a
15 clinician. Semi-rigid and rigid polymers are contemplated for fabrication, as well as resilient materials, such as molded medical grade polypropylene. However, one skilled in the art will realize that other materials and fabrication methods suitable for assembly and manufacture, in accordance with the present disclosure, also would be appropriate.

Collar 108 is circumferentially disposed about medical needle device 106. It is
20 envisioned that collar 108 may have various cross-sectional configurations corresponding to the configuration of medical needle device 106. Guard 116 extends radially outward from collar 108 and has a configuration corresponding to nose portion 130. This adjacent configuration prevents axial engagement with distal segment 112 thereby preventing inadvertent activation of shield 102. It is envisioned that guard 116 may be variously
25 configured and dimensioned to prevent inadvertent activation of shield 102.

Guard 116 may include a guard support 136 that provides increased strength to guard 116 for withstanding inadvertent engagement. Guard support 136 has an angular support configuration and may be variously sized and geometrically configured according to the requirements of a particular needle application. Guard 116 may be monolithically
30 formed with collar 108 or integrally assembled therewith via snap fit, adhesive, etc.

Medical needle device 106 includes, for example, a syringe 118. Syringe 118 has a needle cannula 104 extending therefrom via a needle mount 120.

Distal segment 112 articulates from proximal segment 110 for extension of shield 102 to the extended position. Engagement surface 114 of proximal segment 110 may include a manual actuator 128. Manual actuator 128 is engageable by a clinician for urging shield 102 to the extended position from the retracted position. Manual actuator 128 is articulated from collar 108. As manual actuator 128 is engaged, proximal segment 110 forces distal segment 112 to move distally in a generally axial direction such that distal segment 112 engages needle cannula 104 to facilitate extension of shield 102. Distal segment 112 includes a nose portion 130 having a planar surface 132. In the extended position of shield 102, nose portion 130 substantially encloses the distal end of needle 104 in cooperation with planar surface 132.

Collar 108 has an inner surface 142 that defines a collar cavity 126. Inner surface 142 includes at least one first interlock, such as collar stops 146 that project radially inward. Collar stops 146 are uniformly raised within collar cavity 126 for engagement with a second cylinder, such as, for example, a mounting ring 148. This configuration facilitates mounting of shield 102 with syringe 118. It is envisioned that one or a plurality of collar stops 146 may be used. It is further envisioned that collar stops 146 may be raised or project in a non-uniform manner, such as, for example, staggered, offset, undulating, etc., to include an annular ring.

Mounting ring 148 is configured for mounting with syringe 118. This configuration advantageously facilitates mounting shield 102 with syringe 118. Mounting ring 148 has an outer surface 150 that includes at least one second interlock, such as a plurality of radially outward projecting proximal stops 162 and a plurality of radially outward projecting distal stops 160. Proximal stops 162 and distal stops 160 are equidistantly disposed, circumferentially, about outer surface 150. Proximal stops 162 and distal stops 160 are uniformly raised from outer surface 150 for disposal within collar cavity 126. It is contemplated that one or a plurality of stops 162, 160 may be employed. It is further contemplated that stops 162, 160 may be raised or project in a non-uniform manner, such as, for example, staggered offset, undulating, etc., to include an annular ring. The first and second interlocks prevent movement in both proximal and axial directions. A third interlock may be added to prevent rotational movement.

Mounting ring 148 may be mounted to syringe 118 via an adhesive, such as, for example, pressure-sensitive adhesive, ultraviolet light-activated adhesive, hot-glue adhesive, 1-part and/or 2-part adhesive, rubber cement, "super glue" type adhesives, glue stick type

adhesives, air-dry adhesives, press-fit, etc. It is envisioned that no mounting ring may be used. Collar 108 may be similarly mounted to syringe 118.

Collar 108 is mounted for relative rotational movement with mounting ring 148 such that outer surface 150 is disposed within collar cavity 126. Collar stops 146 are disposed adjacent to outer surface 150. Collar 108 is rotated relative to mounting ring 148 such that collar stops 146 are oriented in an interlocking arrangement with proximal stops 162 and distal stops 160. Thus, proximal stops 162 are aligned with collar stops 146 to prevent distal axial movement, relative to a longitudinal axis of syringe 118, of collar 108. Distal stops 160 are aligned with collar stops 146 to prevent proximal axial movement of collar 108.

This configuration advantageously prevents removal of shield 102 from syringe 118. Further, this configuration avoids impedance of administration of fluids via medical needle device 106, during, for example, low-angle subcutaneous injections, etc. Thus, collar 108 is rotatable relative to mounting ring 148, which is mounted to syringe 118, facilitating orientation of the needle bevel of needle cannula 104. This allows selective orientation of the needle bevel relative to shield 102 such that shield 102 does not interfere with positioning during an administration procedure employing syringe 118. It is contemplated that the first cylinder may include shield 102 or mounting ring 148, and that the second cylinder may include shield 102 or mounting ring 148.

Referring to FIGURES 4 and 5, an alternate embodiment of mounting ring 148 is shown, similar to that described. Outer surface 150 of mounting ring 148 has a collar portion 170 and a clampable portion 172 extending therefrom. Proximal stops 162 and distal stops 160 are formed with outer surface 150. Clampable portion 172 is configured for receiving engagement with a clamp ring 166. Correspondingly, clamp ring 166 defines a clamp cavity 168 for disposal of clampable portion 172 therein. Mounting ring 148 is disposed within collar cavity 126, similar to that described. Clamp ring 166 is configured as a two ear crimp clamp. It is contemplated that clamp ring 166 may be alternatively configured as a one ear crimp clamp, stepless ear clamp, spring clamp, push retainer, push cap, etc.

Clamp ring 166 is manipulated for orientation with syringe 118. Mounting ring 148 is mounted with syringe 118, similar to that described. Clamp ring 166 is fit over clampable portion 172 of mounting ring 148 such that mounting ring 148 is firmly affixed

to syringe 118. It is envisioned that clamp ring 166 may be mounted to an interior surface or to outer surface 150 of mounting ring 148. It is further envisioned that clamp ring 166 may be directly employed with collar 108 of shield 102 and may similarly be mounted to an interior surface or an outer surface of collar 108. Clamp ring 166 and collar 108 may be
5 configured so as to create a press fit in which clamp ring 166 and collar 108 are pressed onto syringe 118 as a unit.

Referring to FIGURES 6-8, another alternate embodiment of mounting ring 148 is shown, similar to those described. Mounting ring 148 includes a cover 174 that has a first cover portion 176 attachable with a second cover portion 178. Cover 174 defines a cover
10 cavity 182 and includes a cover base 180 at a proximal end thereof. Cover 174, and correspondingly cover cavity 182, are configured for attachment to syringe 118. Mounting ring 148 includes proximal stops 162 and distal stops 160, similar to those described, which cooperate with collar 108 to facilitate mounting of shield 102 with syringe 118, as discussed.

Cover base 180 includes a base opening 184 and a grip channel 186. Grip channel 186 includes grip channel lips 188 that define a grip channel opening 190 configured for receipt of a finger grip of syringe 118. Grip channel lips 188 support the finger grip to facilitate mounting of syringe 118 with mounting ring 148 and prevent rotation of syringe 118 relative to cover 174. It is envisioned that grip channel lips 188 may be configured and
20 dimensioned to support various finger grip configurations, for example, as show FIGURE 14. It is also contemplated that the finger grip configurations may be configured to retain a plunger within the syringe barrel as shown in FIGURE 14. It is further envisioned that grip channel 186 may include clips, clamps, etc. to facilitate mounting to syringe 118.

First cover portion 176 and second cover portion 178 are similarly configured and
25 dimensioned for mounting to syringe 118. Portions 176, 178 are elongated half cylinders that extend from a distal end to a proximal end. It is contemplated that cover 174 may have various cross-sectional configurations, such as, for example, polygonal, elliptical, etc. It is further contemplated that first cover portion 176 may be of a dissimilar configuration and dimension than second cover portion 178. A plurality of cover portions may be used or
30 alternatively, each cover portion may be assembled from a plurality of sections. In an alternate embodiment, as shown in FIGURE 9, mounting ring 148 includes a cover 174 having a monolithic tube-type sleeve configuration that slides onto syringe 118 for support thereof. In another alternate embodiment, as shown in FIGURE 10, mounting ring 148

includes a cover 174 having a first cover portion 176 and a second cover portion 178 that are hingedly connected along its longitudinal length. This one piece clam-shell type configuration is mounted about syringe 118 for support thereof in a locked engagement that employs male tabs 192 and female slots 194.

5 First cover portion 176 includes a first portion connection device, such as, for example, male tabs 192 and a second portion connection device, such as, for example, female slots 194, which are alternately disposed on either side and at the proximal and distal ends thereof. Second cover portion 178, reciprocal to first cover portion 176, includes male tabs 192 and female slots 194. Tabs 192 and slots 194 of first cover portion 176 are
10 disposed with corresponding slots 194 and tabs 192 of second cover portion 178, respectively, such that first cover portion 176 can be assembled and locked with second cover portion 178. Upon assembly of first cover portion 176 and second cover portion 178, male tabs 192 engage and latch with female slots 194. It is envisioned that one or a plurality of male tab 192/female slot 194 combinations may be employed. It is further
15 envisioned that the male tab 192/female slot 194 combinations may be variously disposed about cover 174. It is contemplated that the cover portions could be joined through adhesive or welding, e.g., sonic, RF, thermal, etc.

Syringe 118 is disposed within cover cavity 182 such that needle cannula 104 protrudes from the distal end of cover 174 and the finger grip of syringe 118 protrudes from
20 the proximal end cover 174. This configuration advantageously allows syringe 118 and syringe cover 174 to rotate relative to collar 108. A rubber sheath is mounted about needle cannula 104 and to needle mount 120 to prevent hazardous exposure to the distal end of needle cannula 104.

Referring to FIGURES 11-13, in an alternate embodiment, syringe 118 includes a
25 plunger 198 having a plunger rod 196 that extends to a plunger head 200. Plunger 198 is assembled with the barrel of syringe 118 so that upon manipulation of plunger 198, fluids are expelled from syringe 118.

Grip channel lips 188 extend transverse to a longitudinal axis of syringe 118 and radially inward. Grip channel lips 188 converge to define an opening that slidably receives
30 plunger rod 196. The opening, however, is sufficiently dimensioned to prevent proximal movement of plunger head 200 beyond grip channel 186. This configuration

advantageously prevents plunger head 200 from being withdrawn from the barrel of syringe 118 and avoids accidental removal of plunger 198 from syringe 118.

5 The invention of the present disclosure may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The present embodiments are therefore to be considered in all respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the foregoing description, and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

The claims defining the invention are as follows:-

1. A medical needle shield apparatus comprising:

a shield being extensible from a retracted position to an extended position for enclosing a distal end of a needle of a medical needle device, said shield including a collar that is to be mounted to said medical needle device, said shield further including a proximal portion articulating from said collar and a distal portion articulating from the proximal portion, said distal portion being configured to enclose the distal end of said needle, wherein said proximal portion includes an engagement surface being engageable by the user to urge said shield from said retracted position to said extended position and said collar having an inner surface that defines a cavity, said inner surface including at least one first interlock; and

a mounting ring configured for mounting with said medical needle device, said mounting ring having an outer surface that includes at least one second interlock,

wherein said collar is mounted for relative rotational movement with said mounting ring such that the outer surface of said mounting ring is disposed within said cavity of said collar, said at least one first interlock being disposed adjacent the outer surface of the mounting ring such that the at least one second interlock prevents movement in the proximal and axial direction relative to a longitudinal axis of the medical needle device, and said collar includes a guard extending therefrom and being disposed adjacent to said distal portion of said shield in said retracted position such that inadvertent extension of said shield by the user via engagement of said distal portion is prevented.

2. The medical needle shield apparatus of claim 1, wherein the shield is a first cylinder and the mounting ring is a second cylinder.

3. The medical needle shield apparatus as recited in claim 1, wherein said first interlock includes at least one radially inward projecting collar stop.

4. The medical needle shield apparatus as recited in claim 1, wherein said second interlock includes at least one radially outward projecting proximal stop and at least one radially projecting distal stop, such that the at least one proximal stop prevents distal axial movement, relative to a longitudinal axis of the medical needle device, of the collar and the at least one distal stop prevents proximal axial movement of the collar.

5. The medical needle shield apparatus as recited in claim 1, including a third interlock for preventing rotational movement.

6. The medical needle shield apparatus as recited in claim 1, wherein said collar further includes a latch that engages a catch on a distal portion of said shield to releasably lock said shield in a retracted position.

7. The medical needle shield apparatus as recited in claim 2, wherein said collar includes a plurality of collar stops and said second cylinder includes a plurality of proximal stops and a plurality of distal stops.

8. The medical needle shield apparatus as recited in claim 7, wherein said plurality of collar stops are equidistantly spaced about the inner surface of the collar and the plurality of proximal stops are equidistantly spaced about the outer surface of the second cylinder and the plurality of distal stops are equidistantly spaced about the outer surface of the second cylinder.

9. The medical needle shield apparatus as recited in claim 2, further including a clamp ring that is mounted about the second cylinder in a press fit engagement to fixedly mount the second cylinder with the medical needle device.

10. The medical needle shield apparatus as recited in claim 2, wherein the second cylinder is mounted to the medical needle device via an adhesive.

11. The medical needle shield apparatus as recited in claim 2, wherein the second cylinder is mounted to the medical needle device via press-fit.

12. The medical needle shield apparatus as recited in claim 2, wherein the second cylinder includes a cover that has a first cover portion attached to a second cover portion that cooperate to support the medical needle device, the second cylinder further including a cover base having a grip channel.

13. The medical needle shield apparatus as recited in claim 2, wherein the second cylinder includes a cover that has a first cover portion attached to a second cover portion that cooperate to support the medical needle device, the second cylinder further including a cover base having a grip channel that engages a plunger.

14. The medical needle shield apparatus as recited in claim 13, wherein said first cover portion lockingly engages the second cover portion.

15. The medical needle shield apparatus as recited in claim 13, wherein said first cover engages the second cover portion via an adhesive.

16. The medical needle shield apparatus as recited in claim 13, wherein said grip channel is disposed adjacent a proximal end of the medical needle device.

2003302605 29 Oct 2009

17. The medical needle shield apparatus as recited in claim 13, wherein said first cover portion is pivotally associated with said second cover portion.

18. The medical needle shield apparatus as recited in claim 13, wherein said first cover portion and said second cover portion are monolithically formed.

5 19. A medical needle shield apparatus, substantially as herein described with reference to Figures 1 to 14 of the accompanying drawings.

Dated 29 October, 2009


Tyco Healthcare Group LP

Patent Attorneys for the Applicant/Nominated Person


SPRUSON & FERGUSON

10

1/14

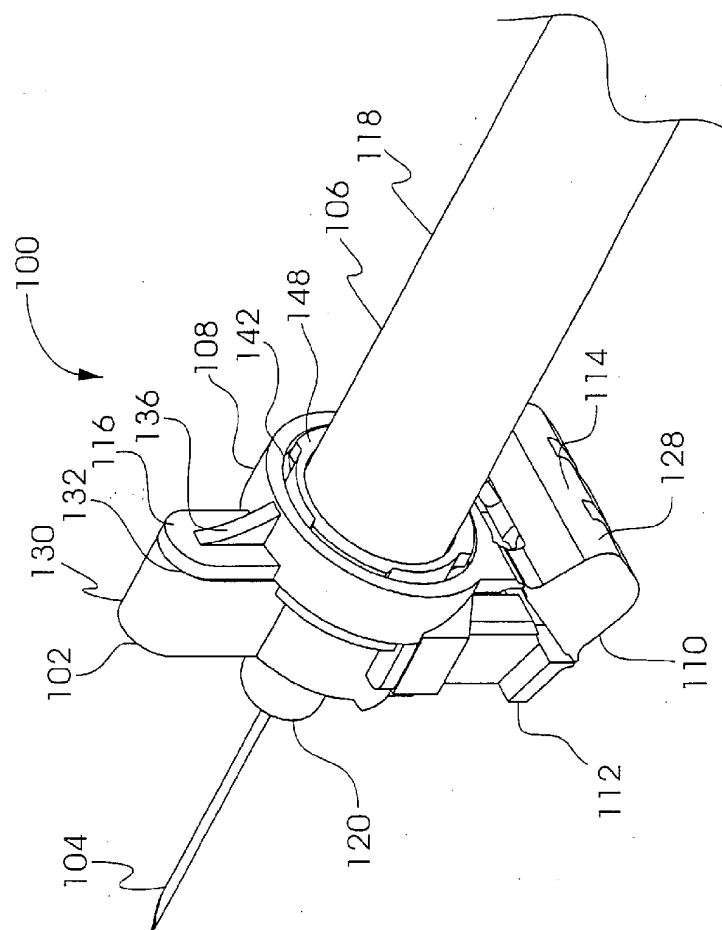

2/14

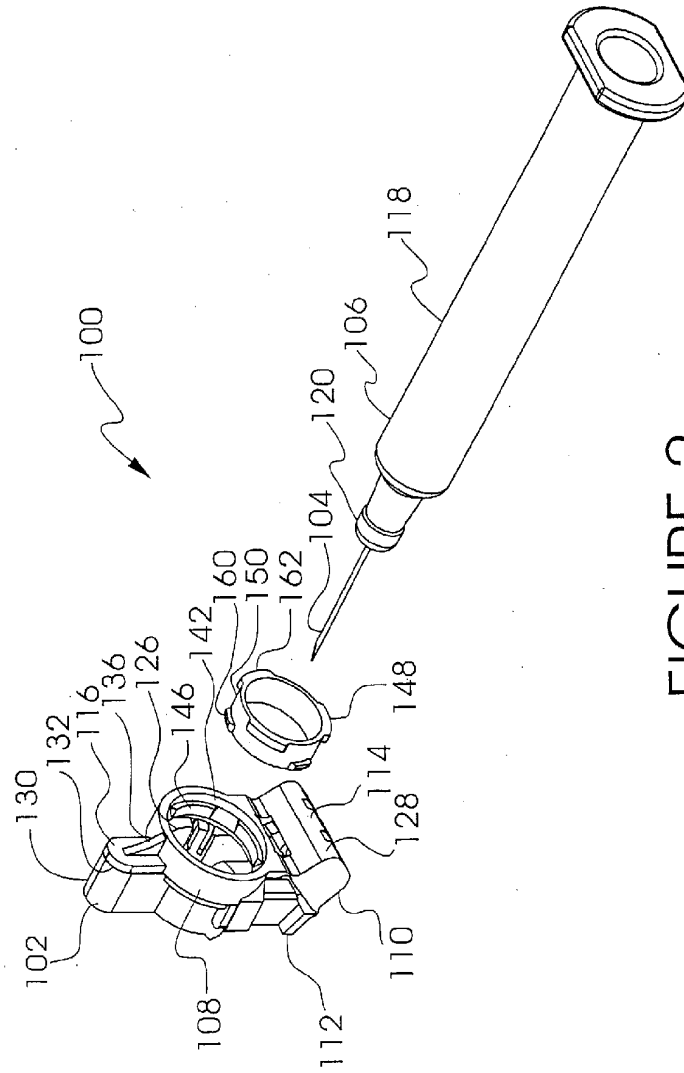

3/14

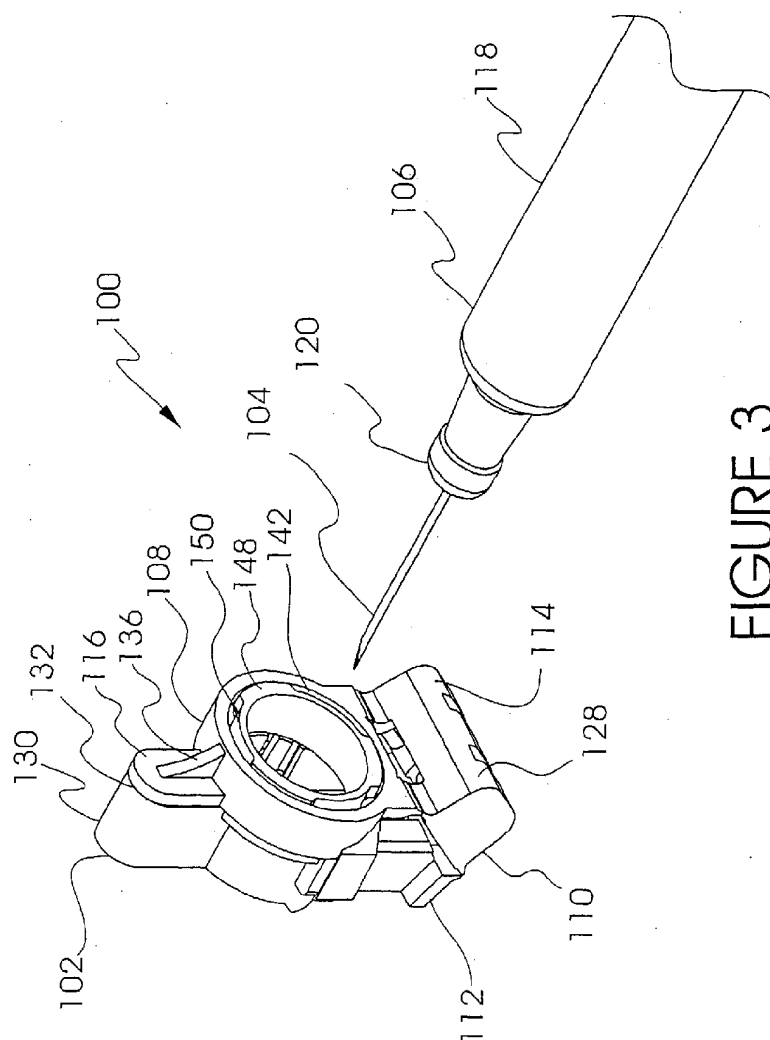


FIGURE 3

4/14

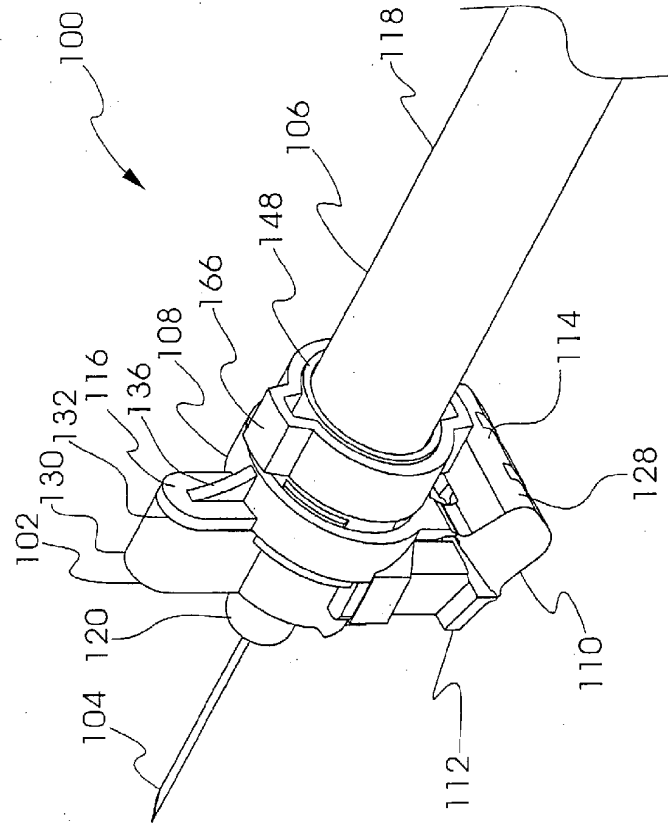


FIGURE 4

5/14

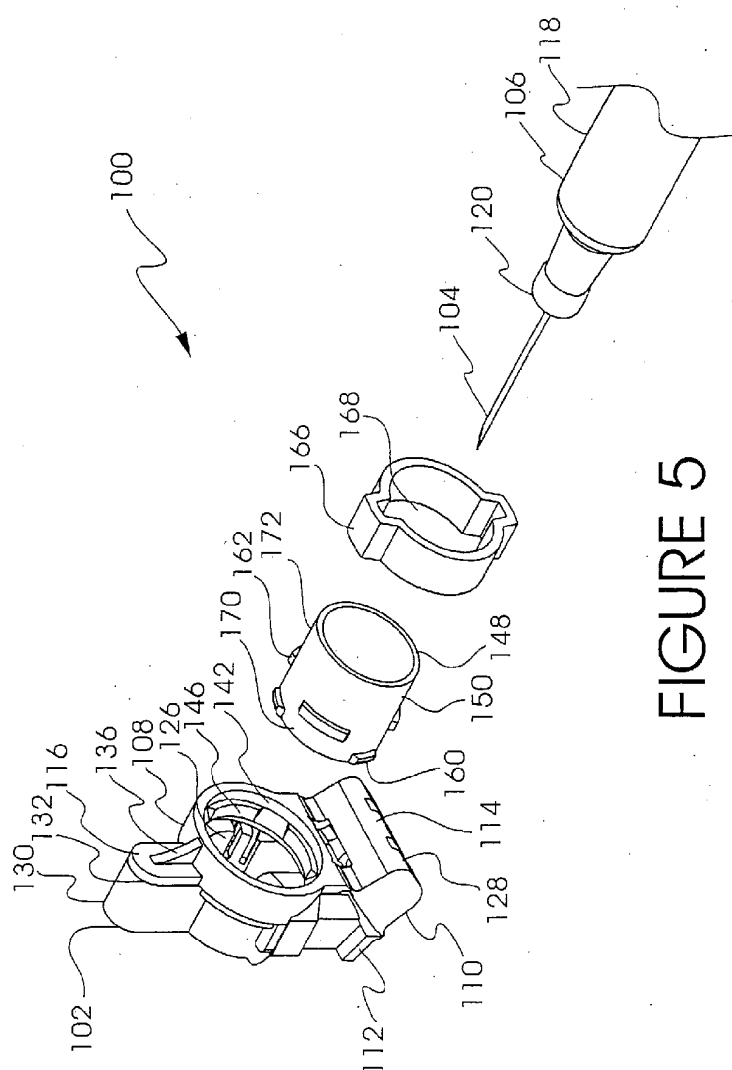


FIGURE 5

6/14

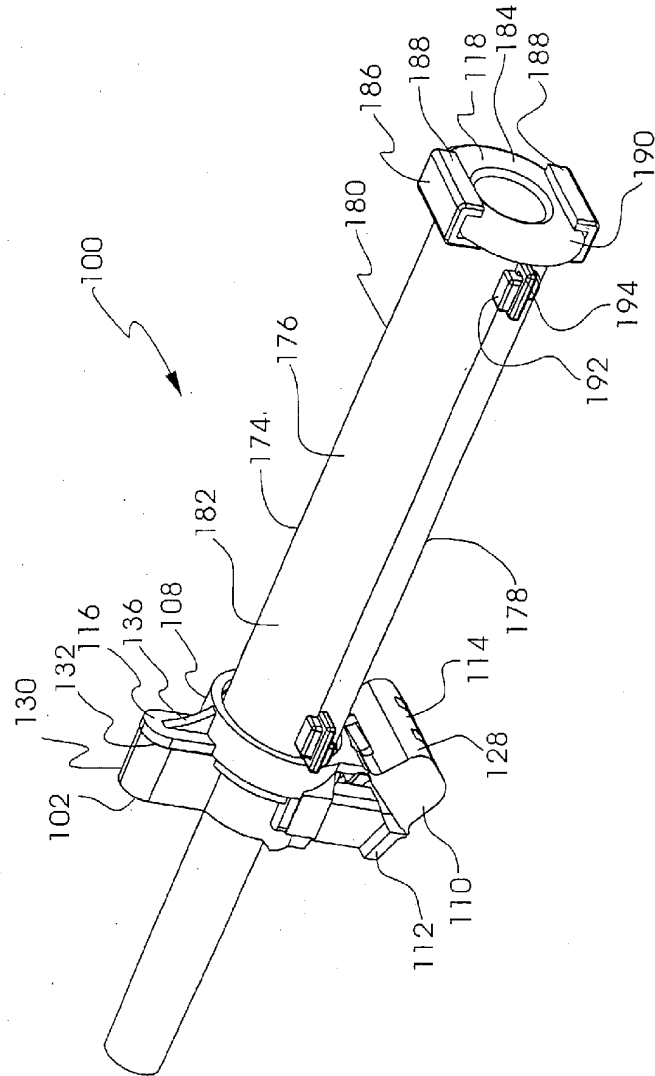


FIGURE 6

7/14

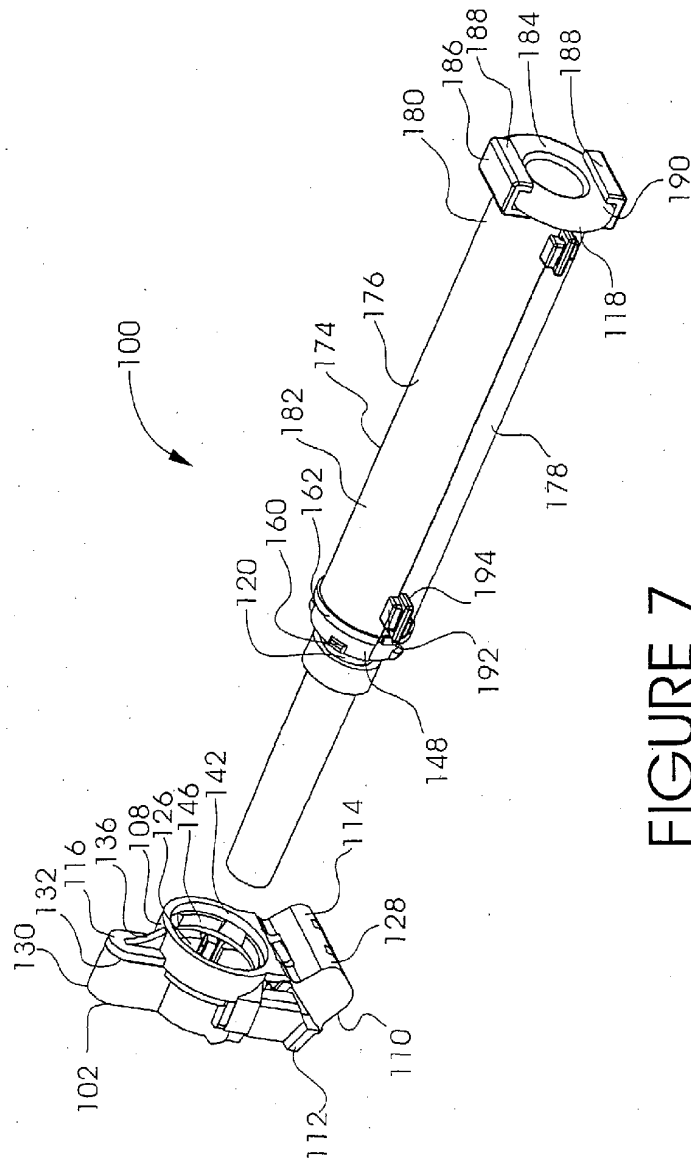


FIGURE 7

9/14

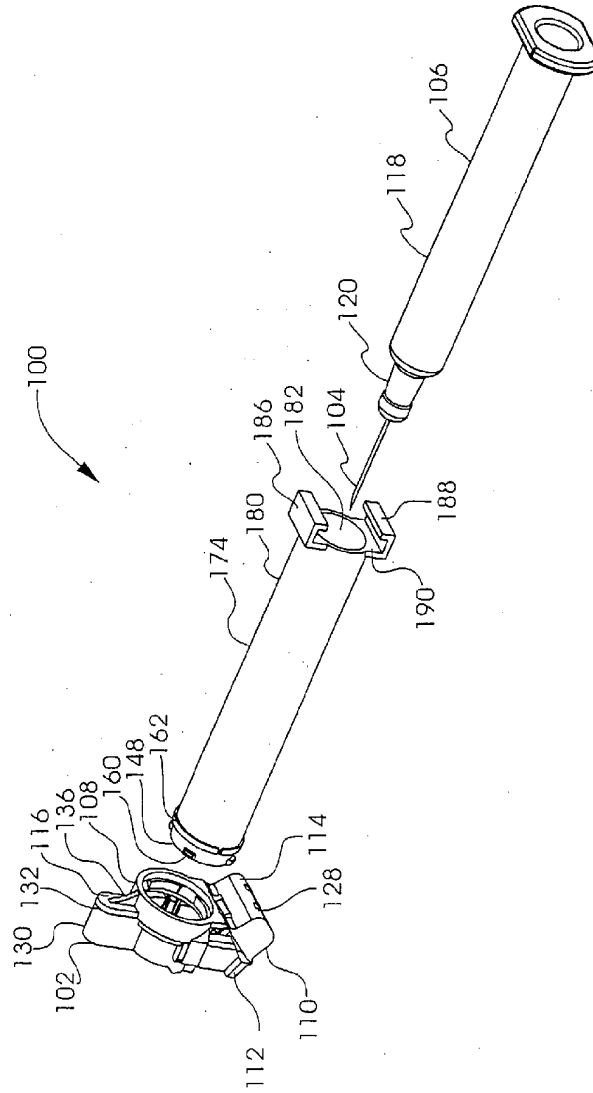


FIGURE 9

10/14

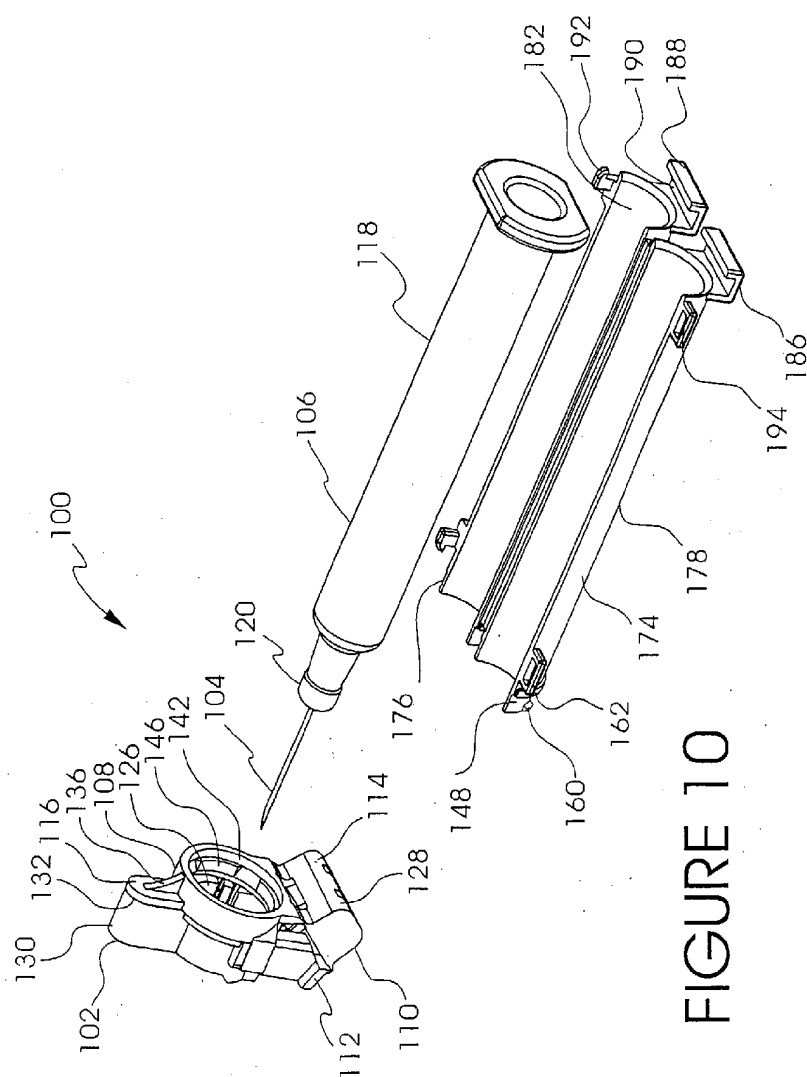


FIGURE 10

11/14

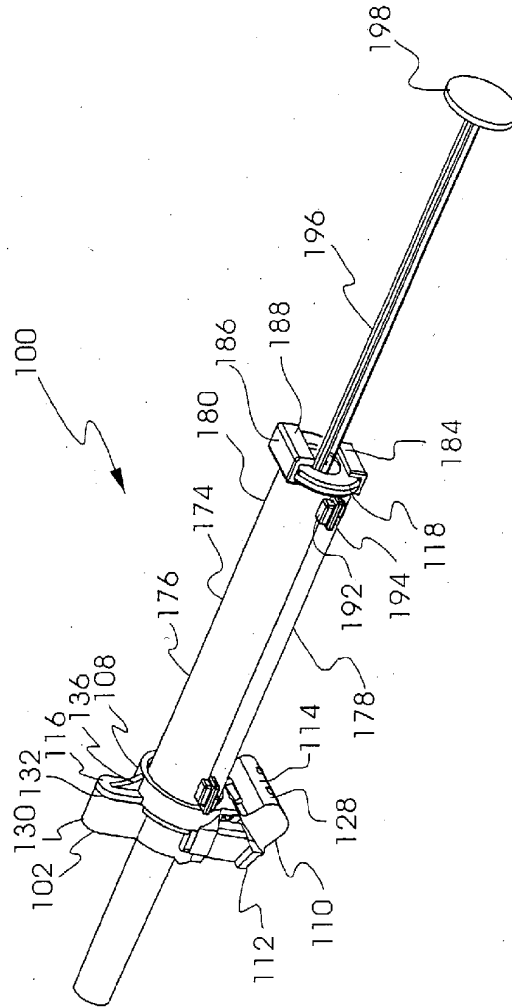


FIGURE 11

12/14

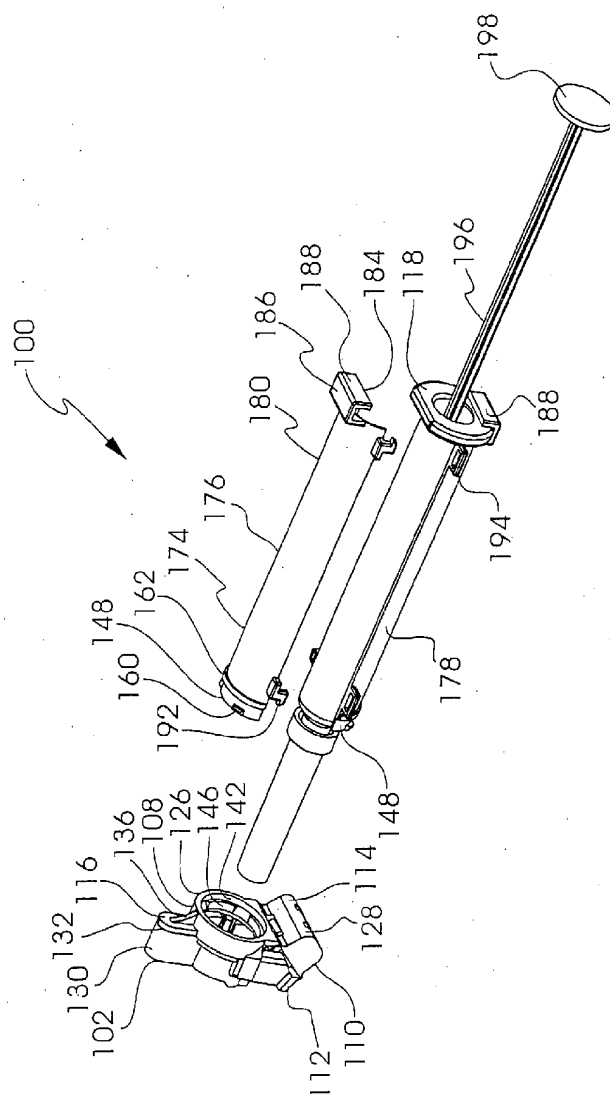


FIGURE 12

13/14

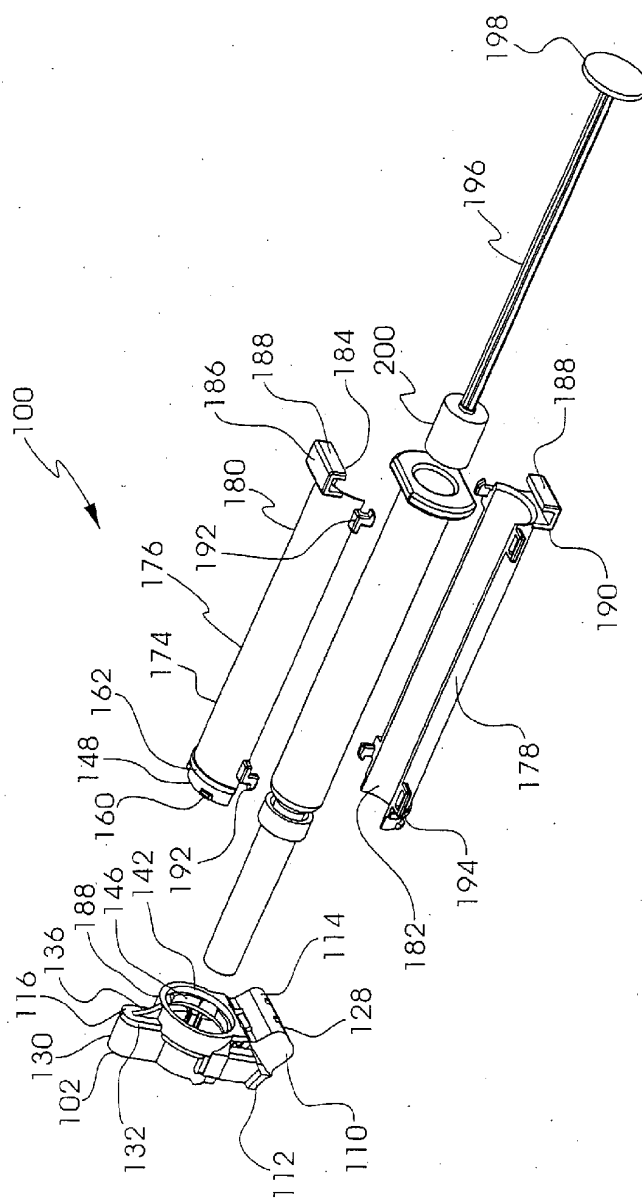


FIGURE 13

14/14

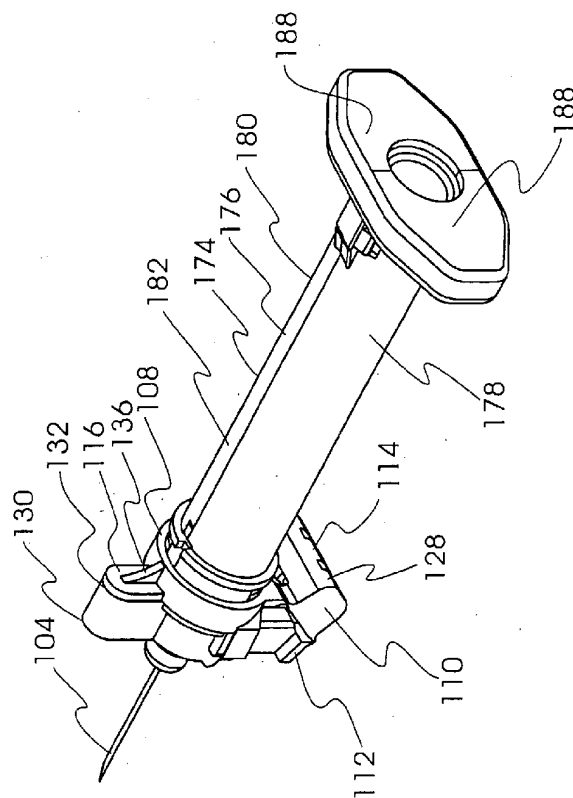


FIGURE 14