



US010864408B2

(12) **United States Patent**
Sajima et al.

(10) **Patent No.:** **US 10,864,408 B2**

(45) **Date of Patent:** ***Dec. 15, 2020**

(54) **GOLF BALL**

37/0096 (2013.01); *A63B 37/0074* (2013.01);
A63B 2102/32 (2015.10)

(71) Applicant: **SUMITOMO RUBBER INDUSTRIES, LTD.**, Kobe (JP)

(58) **Field of Classification Search**
CPC *A63B 37/0005*; *A63B 37/0004*
USPC *473/378*
See application file for complete search history.

(72) Inventors: **Takahiro Sajima**, Kobe (JP); **Hironori Takihara**, Kobe (JP); **Toshiyuki Takubo**, Kobe (JP)

(56) **References Cited**

(73) Assignee: **SUMITOMO RUBBER INDUSTRIES, LTD.**, Kobe (JP)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

2011/0077106	A1	3/2011	Fitchett	
2015/0182805	A1	7/2015	Sajima et al.	
2018/0056136	A1*	3/2018	Mimura <i>A63B 37/0005</i>
2018/0056138	A1*	3/2018	Sajima <i>A63B 37/0075</i>
2019/0269975	A1*	9/2019	Sajima <i>A63B 37/0005</i>
2019/0269979	A1*	9/2019	Sajima <i>A63B 37/0005</i>

(21) Appl. No.: **16/265,583**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Feb. 1, 2019**

JP	H02-68077	A	3/1990
JP	2011-72776	A	4/2011
JP	2015-142599	A	8/2015

(65) **Prior Publication Data**

US 2019/0269974 A1 Sep. 5, 2019

* cited by examiner

Primary Examiner — Raeann Gorden

(30) **Foreign Application Priority Data**

Mar. 1, 2018 (JP) 2018-036559

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch & Birch, LLP

(51) **Int. Cl.**

<i>A63B 37/06</i>	(2006.01)
<i>A63B 37/00</i>	(2006.01)
<i>A63B 102/32</i>	(2015.01)


(52) **U.S. Cl.**

CPC *A63B 37/0005* (2013.01); *A63B 37/002* (2013.01); *A63B 37/0004* (2013.01); *A63B 37/0012* (2013.01); *A63B 37/0015* (2013.01); *A63B 37/0019* (2013.01); *A63B 37/0021* (2013.01); *A63B 37/0022* (2013.01); *A63B*

(57) **ABSTRACT**

A golf ball has a plurality of dimples **12** and a land **14** on a surface thereof. The golf ball further has a large number of minute projections **18** formed on surfaces of the dimples **12** and the land **14**. The minute projections **18** are exposed on the surface of the golf ball. The surface of the golf ball has an arithmetic average height Sa of not less than 0.5 μm and not greater than 30 μm. The surface of the golf ball has a maximum height Sz of not less than 5 μm and not greater than 200 μm.

7 Claims, 7 Drawing Sheets

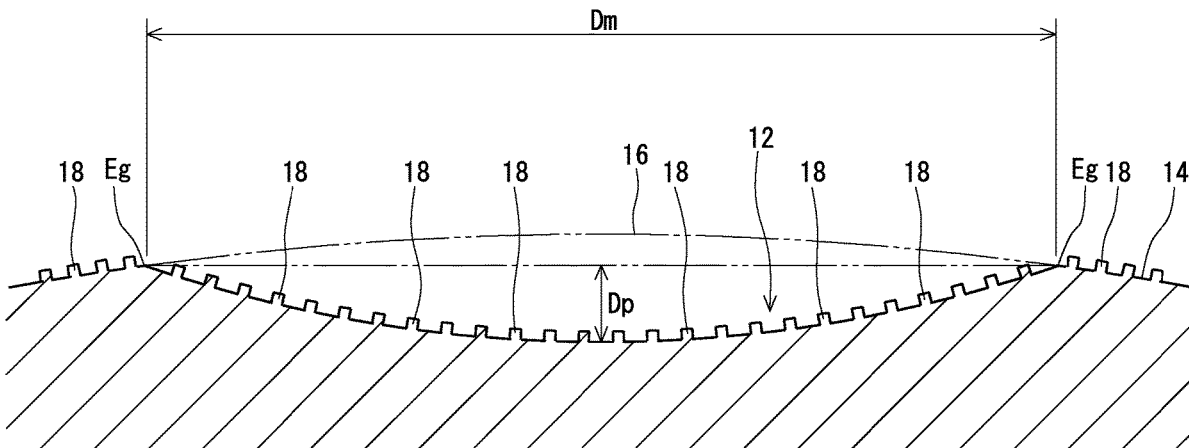

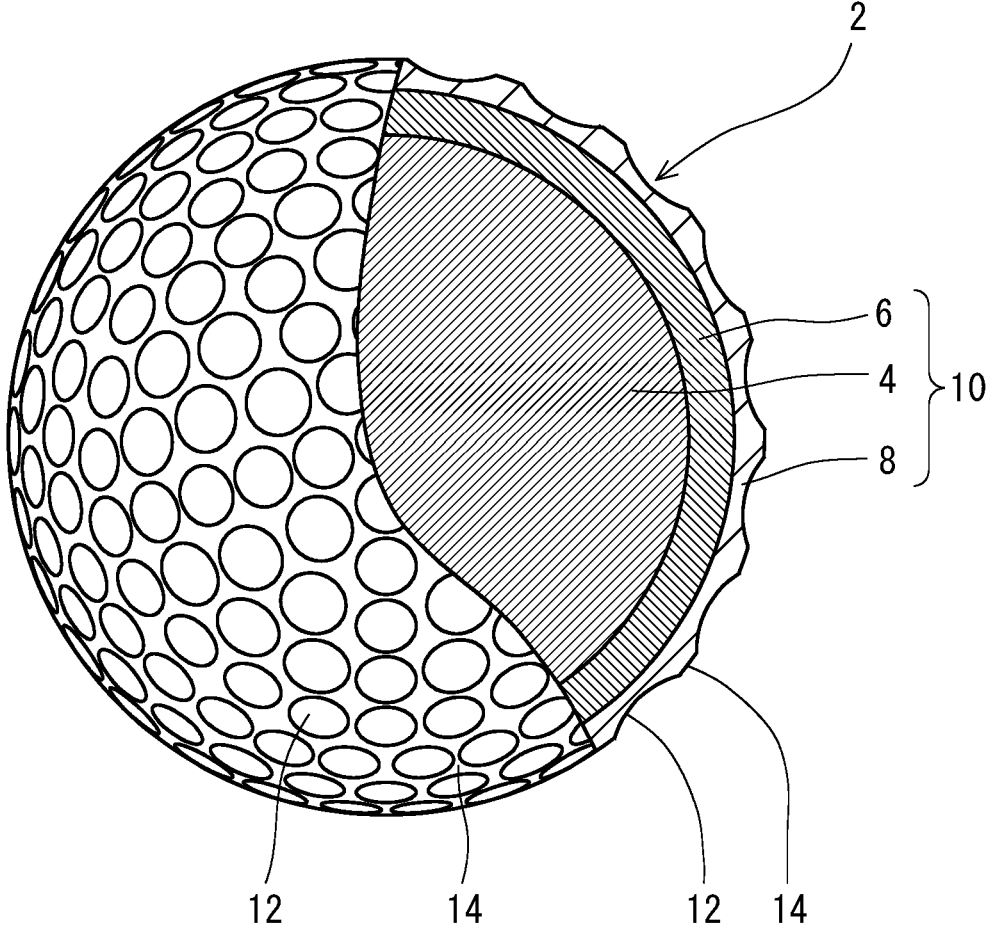


FIG. 1

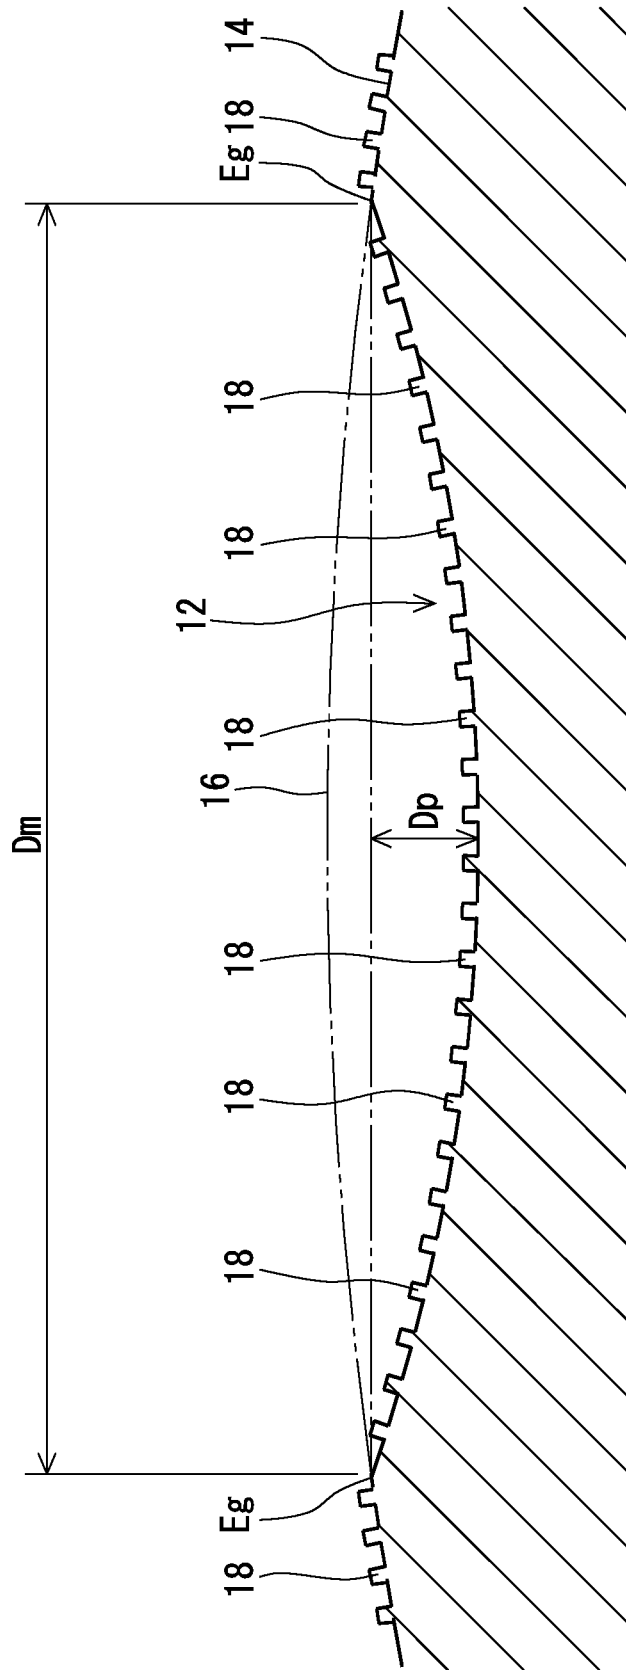


FIG. 2

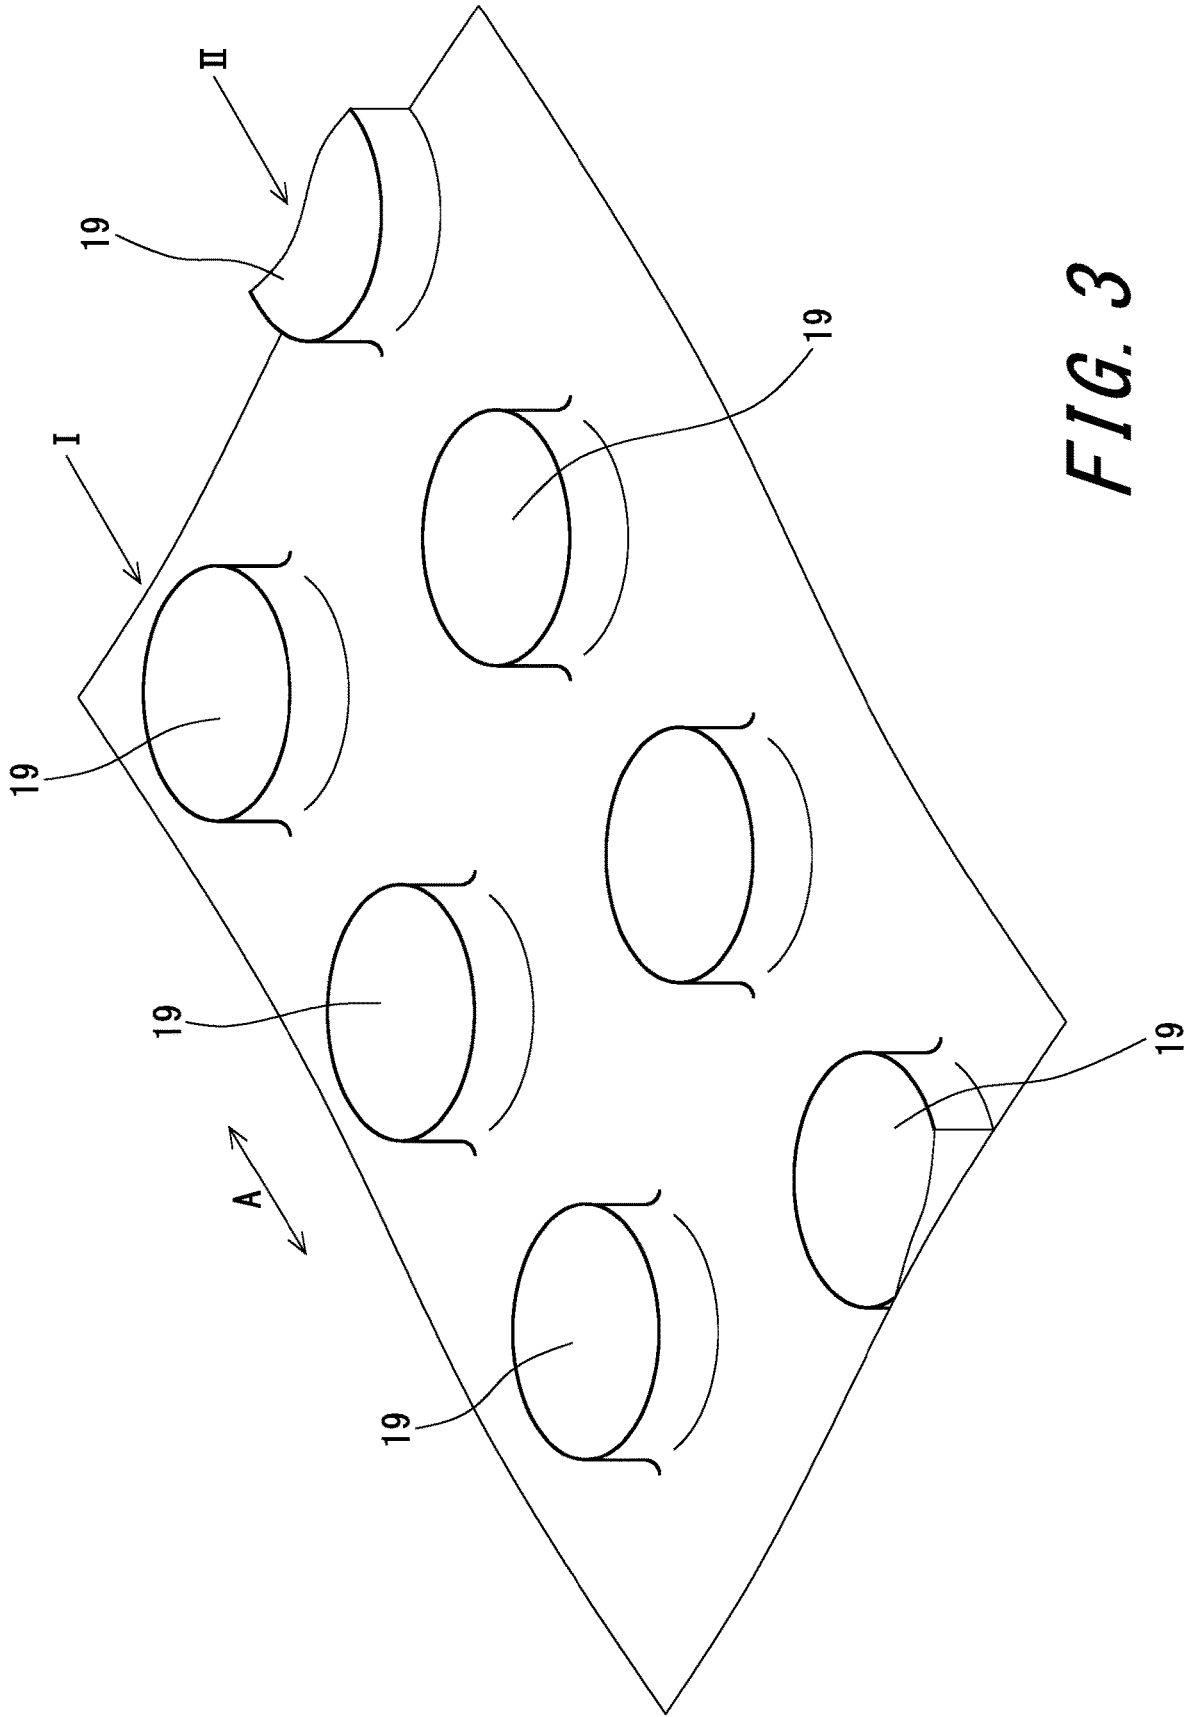


FIG. 3

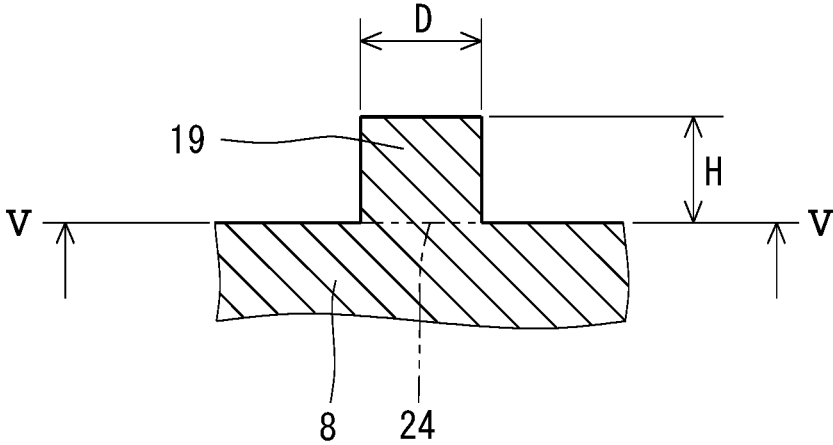


FIG. 4

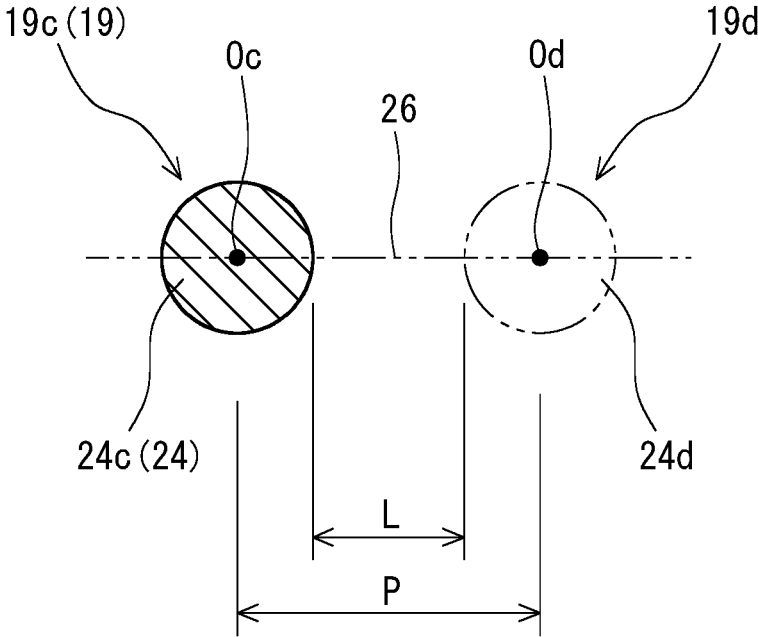


FIG. 5

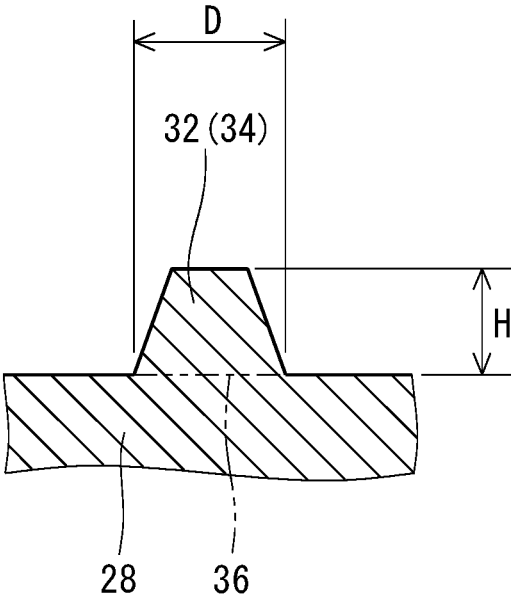


FIG. 6

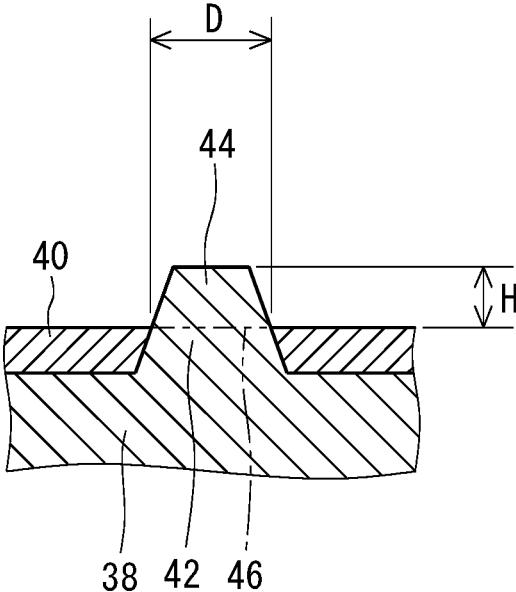


FIG. 7

1

GOLF BALL

This application claims priority on Patent Application No. 2018-036559 filed in JAPAN on Mar. 1, 2018. The entire contents of this Japanese Patent Application are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to golf balls. Specifically, the present invention relates to golf balls each having minute projections on the surface thereof.

Description of the Related Art

A golf ball that is hit with a golf club flies in the air. The golf ball falls and rolls on the ground. When the golf ball falls and when the golf ball rolls, the golf ball comes into contact with the ground. Due to the contact, mud may adhere to the surface of the golf ball and the surface of the golf ball may become stained. When a golf ball is on the fairway or rough, a golf player is not allowed to touch the golf ball. Therefore, the golf player cannot remove dirt from the golf ball. On the green, the golf player can remove dirt from the golf ball. However, work for the removal takes time and effort. Dirt cannot be sufficiently removed by work in some cases. Dirt cannot be removed by washing with water in some cases. The golf ball on which dirt remains is exchanged. The exchange puts an economic burden on the golf player.

Golf balls have a large number of dimples on the surfaces thereof. The dimples disturb the air flow around the golf ball during flight to cause turbulent flow separation. This phenomenon is referred to as "turbulization". Due to the turbulization, separation points of the air from the golf ball shift backward leading to a reduction of drag. The turbulization promotes the displacement between the separation point on the upper side and the separation point on the lower side of the golf ball, which results from the backspin, thereby enhancing the lift force that acts upon the golf ball. The reduction of drag and the enhancement of lift force are referred to as a "dimple effect". Excellent dimples efficiently disturb the air flow. The excellent dimples produce a long flight distance.

The rate of backspin correlates with a trajectory height. With a golf ball having a high backspin rate, a large trajectory height is obtained. Upon a shot with a long iron, the trajectory height tends to be low. Golf players desire golf balls having a high spin rate upon a shot with a long iron.

JP2015-142599 discloses a golf ball having a surface with large roughness. The roughness can be formed by blasting or the like. The roughness enhances the aerodynamic characteristic of the golf ball due to a synergetic effect with dimples.

JP2011-72776 discloses a golf ball having a coating formed from a paint that contains particles. The particles enhance the aerodynamic characteristic of the golf ball due to a synergetic effect with dimples.

JPH2-68077 discloses a golf ball having dimples each having one projection at a bottom thereof. The dimples each having the projection enhance the aerodynamic characteristic of the golf ball.

An object of the present invention is to provide a golf ball having a sufficiently high spin rate upon a shot with a long iron and having excellent stain resistance and washability.

2

SUMMARY OF THE INVENTION

A golf ball according to the present invention has a core and a cover positioned outside the core. The cover has a plurality of minute projections on a surface thereof. Each minute projection has an exposed portion that is exposed on a surface of the golf ball. The surface of the golf ball has an arithmetic average height S_a of not less than $0.5\ \mu\text{m}$ and not greater than $30\ \mu\text{m}$. An average value H_{av} of heights H of the exposed portions is not less than $0.5\ \mu\text{m}$ and not greater than $50\ \mu\text{m}$.

In the golf ball according to the present invention, the exposed portions reduce the lift force of the golf ball during flight. A trajectory of the golf ball is not excessively high. Therefore, with the golf ball, a large flight distance is achieved upon a shot with a long iron.

Preferably, a ratio P_p of a sum of areas of all the exposed portions to a surface area of a phantom sphere of the golf ball is not less than 7%.

Preferably, an average value D_{av} of diameters D of the exposed portions is not less than $5\ \mu\text{m}$ and not greater than $50\ \mu\text{m}$.

Preferably, an average value P_{av} of pitches P each between an exposed portion and another exposed portion adjacent to this exposed portion is not greater than $100\ \mu\text{m}$.

Preferably, the surface of the golf ball has a maximum height S_z of not less than $5\ \mu\text{m}$ and not greater than $200\ \mu\text{m}$.

The golf ball may further have a paint layer partially covering the cover. The exposed portions project from the paint layer.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view of a golf ball according to an embodiment of the present invention;

FIG. 2 is a partially enlarged cross-sectional view of the golf ball in FIG. 1;

FIG. 3 is a partially enlarged perspective view of the surface of the golf ball in FIG. 1;

FIG. 4 is a partially enlarged cross-sectional view of the golf ball in FIG. 1;

FIG. 5 is a cross-sectional view taken along the line V-V in FIG. 4;

FIG. 6 is a cross-sectional view of a part of a golf ball according to another embodiment of the present invention; and

FIG. 7 is a cross-sectional view of a part of a golf ball according to still another embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following will describe in detail the present invention based on preferred embodiments with appropriate reference to the drawings.

A golf ball 2 shown in FIG. 1 includes a spherical core 4, a mid layer 6 positioned outside the core 4, and a cover 8 positioned outside the mid layer 6. The core 4, the mid layer 6, and the cover 8 are included in a main body 10 of the golf ball 2. The golf ball 2 does not have a paint layer. The golf ball 2 has a large number of dimples 12 on the surface thereof. Of the surface of the golf ball 2, a part other than the dimples 12 is a land 14. The main body 10 may have a one-piece structure, a two-piece structure, a four-piece structure, a five-piece structure, or the like.

3

The golf ball **2** preferably has a diameter of not less than 40 mm and not greater than 45 mm. From the viewpoint of conformity to the rules established by the United States Golf Association (USGA), the diameter is particularly preferably not less than 42.67 mm. In light of suppression of air resistance, the diameter is more preferably not greater than 44 mm and particularly preferably not greater than 42.80 mm. The diameter of the golf ball **2** according to the present embodiment is 42.7 mm.

The golf ball **2** preferably has a weight of not less than 40 g and not greater than 50 g. In light of attainment of great inertia, the weight is more preferably not less than 44 g and particularly preferably not less than 45.00 g. From the viewpoint of conformity to the rules established by the USGA, the weight is particularly preferably not greater than 45.93 g.

Preferably, the core **4** is formed by crosslinking a rubber composition. Examples of the base rubber of the rubber composition include polybutadienes, polyisoprenes, styrene-butadiene copolymers, ethylene-propylene-diene copolymers, and natural rubbers. Two or more rubbers may be used in combination. In light of resilience performance, polybutadienes are preferable, and high-cis polybutadienes are particularly preferable.

The core **4** may be formed from a resin composition. The core **4** may be formed from a mixture of a rubber composition and a resin composition. A resin composition that will be described later for the mid layer **6** or the cover **8** can be used for the core **4**.

The rubber composition of the core **4** includes a co-crosslinking agent. Examples of preferable co-crosslinking agents in light of resilience performance include zinc acrylate, magnesium acrylate, zinc methacrylate, and magnesium methacrylate. The rubber composition preferably includes an organic peroxide together with a co-crosslinking agent. Examples of preferable organic peroxides include dicumyl peroxide, 1,1-bis(t-butylperoxy)-3,3,5-trimethylcyclohexane, 2,5-dimethyl-2,5-di(t-butylperoxy)hexane, and di-t-butyl peroxide.

The rubber composition of the core **4** may include additives such as a filler, sulfur, a vulcanization accelerator, a sulfur compound, an anti-aging agent, a coloring agent, a plasticizer, and a dispersant. The rubber composition may include a carboxylic acid or a carboxylate. The rubber composition may include synthetic resin powder or cross-linked rubber powder.

The core **4** has a diameter of preferably not less than 30.0 mm and particularly preferably not less than 38.0 mm. The diameter of the core **4** is preferably not greater than 42.0 mm and particularly preferably not greater than 41.5 mm. The core **4** may have two or more layers. The core **4** may have a rib on the surface thereof. The core **4** may be hollow.

The mid layer **6** is formed from a resin composition. A preferable base polymer of the resin composition is an ionomer resin. Examples of preferable ionomer resins include binary copolymers formed with an α -olefin and an α,β -unsaturated carboxylic acid having 3 to 8 carbon atoms. Examples of other preferable ionomer resins include ternary copolymers formed with: an α -olefin; an α,β -unsaturated carboxylic acid having 3 to 8 carbon atoms; and an α,β -unsaturated carboxylate ester having 2 to 22 carbon atoms. For the binary copolymer and the ternary copolymer, preferable α -olefins are ethylene and propylene, while preferable α,β -unsaturated carboxylic acids are acrylic acid and methacrylic acid. In the binary copolymer and the ternary copolymer, some of the carboxyl groups are neutralized with metal ions. Examples of metal ions for use in neutralization

4

include sodium ion, potassium ion, lithium ion, zinc ion, calcium ion, magnesium ion, aluminum ion, and neodymium ion.

Instead of an ionomer resin or together with an ionomer resin, the resin composition of the mid layer **6** may include another polymer. Examples of the other polymer include polystyrenes, polyamides, polyesters, polyolefins, and polyurethanes. The resin composition may include two or more polymers.

The resin composition of the mid layer **6** may include a coloring agent such as titanium dioxide, a filler such as barium sulfate, a dispersant, an antioxidant, an ultraviolet absorber, a light stabilizer, a fluorescent material, a fluorescent brightener, and the like. For the purpose of adjusting specific gravity, the resin composition may include powder of a metal with a high specific gravity such as tungsten, molybdenum, and the like.

The mid layer **6** has a thickness of preferably not less than 0.2 mm and particularly preferably not less than 0.3 mm. The thickness of the mid layer **6** is preferably not greater than 2.5 mm and particularly preferably not greater than 2.2 mm. The mid layer **6** has a specific gravity of preferably not less than 0.90 and particularly preferably not less than 0.95. The specific gravity of the mid layer **6** is preferably not greater than 1.10 and particularly preferably not greater than 1.05. The mid layer **6** may have two or more layers.

The cover **8** is formed from a thermoplastic resin composition, a thermosetting resin composition, or a mixture of both compositions. Preferably, the cover **8** is formed from a thermoplastic resin composition. Examples of the base polymer of the resin composition include ionomer resins, thermoplastic polyester elastomers, thermoplastic polyamide elastomers, thermoplastic polyurethane elastomers, thermoplastic polyolefin elastomers, and thermoplastic polystyrene elastomers. Ionomer resins are particularly preferable. Ionomer resins are highly elastic. The golf ball **2** having the cover **8** that includes an ionomer resin has excellent resilience performance. The golf ball **2** has excellent flight distance upon a shot with a driver. The ionomer resin described above for the mid layer **6** can be used for the cover **8**.

An ionomer resin and another resin may be used in combination. In this case, in light of resilience performance, the ionomer resin is included as the principal component of the base polymer. The proportion of the ionomer resin to the entire base polymer is preferably not less than 50% by weight, more preferably not less than 70% by weight, and particularly preferably not less than 80% by weight.

The resin composition of the cover **8** may include a pigment. The resin composition can include an inorganic pigment and an organic pigment. Examples of the inorganic pigment include: red pigments such as iron oxide red (Fe_2O_3), red lead (Pb_3O_4), molybdenum red, and cadmium red; yellow pigments such as titanium yellow ($\text{TiO}_2\text{—NiO—Sb}_2\text{O}_3$), litharge (PbO), chrome yellow (PbCrO_4), yellow iron oxide (FeO(OH)), and cadmium yellow; and blue pigments such as cobalt blue ($\text{CoO.Al}_2\text{O}_3$), Prussian blue, and ultramarine blue. Examples of the organic pigment include azo pigments, phthalocyanine pigments, and perylene pigments. Azo pigments are preferable. Examples of azo pigments include pigment yellow 1, pigment yellow 12, pigment red 3, pigment red 57, and pigment orange 13.

The resin composition of the cover **8** may include a filler, a dispersant, an antioxidant, an ultraviolet absorber, a light stabilizer, a fluorescent material, a fluorescent brightener, and the like in an adequate amount.

The cover **8** has a thickness of preferably not less than 0.2 mm and particularly preferably not less than 0.3 mm. The

5

thickness of the cover **8** is preferably not greater than 2.5 mm and particularly preferably not greater than 2.2 mm. The cover **8** has a specific gravity of preferably not less than 0.90 and particularly preferably not less than 0.95. The specific gravity of the cover **8** is preferably not greater than 1.10 and particularly preferably not greater than 1.05. The cover **8** may have two or more layers.

FIG. 2 shows a cross section of the golf ball **2** along a plane passing through the central point of a dimple **12** and the central point of the golf ball **2**. In FIG. 2, the top-to-bottom direction is the depth direction of the dimple **12**. In FIG. 2, an alternate long and two short dashes line **16** indicates a phantom sphere. The surface of the phantom sphere **16** is the surface of the golf ball **2** when it is postulated that no dimple **12** and no exposed portion (described in detail later) exist. The diameter of the phantom sphere **16** is equal to the diameter of the golf ball **2**. The dimple **12** is recessed from the surface of the phantom sphere **16**. The land **14** coincides with the surface of the phantom sphere **16**.

In FIG. 2, an arrow D_m indicates the diameter of the dimple **12**. The diameter D_m is the distance between two tangent points E_g appearing on a tangent line T_g that is drawn tangent to the far opposite ends of the dimple **12**. Each tangent point E_g is also the edge of the dimple **12**. The edge E_g defines the contour of the dimple **12**.

The diameter D_m of each dimple **12** is preferably not less than 2.0 mm and not greater than 6.0 mm. The dimple **12** having a diameter D_m of not less than 2.0 mm contributes to turbulization. From this viewpoint, the diameter D_m is more preferably not less than 2.5 mm and particularly preferably not less than 2.8 mm. The dimple **12** having a diameter D_m of not greater than 6.0 mm does not impair a fundamental feature of the golf ball **2** being substantially a sphere. From this viewpoint, the diameter D_m is more preferably not greater than 5.5 mm and particularly preferably not greater than 5.0 mm.

In the case of a non-circular dimple, a circular dimple **12** having the same area as that of the non-circular dimple is assumed. The diameter of the assumed dimple **12** can be regarded as the diameter of the non-circular dimple.

In FIG. 2, a double ended arrow D_p indicates the depth of the dimple **12**. The depth D_p is the distance between the deepest part of the dimple **12** and the tangent line T_g . An average depth D_{pav} is calculated by summing the depths D_p of all the dimples **12** and dividing the sum of the depths D_p by the total number of the dimples **12**. The average depth D_{pav} is preferably not less than 80 μm and not greater than 200 μm . With the golf ball **2** in which the average depth D_{pav} is not less than 80 μm , a large run can be achieved. From this viewpoint, the average depth D_{pav} is more preferably not less than 100 μm and particularly preferably not less than 110 μm . With the golf ball **2** in which the average depth D_{pav} is not greater than 200 μm , a large carry can be achieved. From this viewpoint, the average depth D_{pav} is more preferably not greater than 180 μm and particularly preferably not greater than 160 μm .

FIG. 3 is a partially enlarged perspective view of the surface of the golf ball **2** in FIG. 1. As described above, the golf ball **2** does not have a paint layer. Therefore, the surface of the cover **8** is the surface of the golf ball **2** shown in FIG. 3. As shown in FIG. 3, the cover **8** has a large number of minute projections **18** on the surface thereof. Each minute projection **18** generally has a cylindrical shape. As is obvious from FIG. 2, the minute projections **18** are formed on the surfaces of the dimples **12** and also on the surface of the land **14**. Each minute projection **18** stands outward in the radial

6

direction of the golf ball **2**. The minute projections **18** may be formed only on the surfaces of the dimples **12**. The minute projections **18** may be formed only on the surface of the land **14**. Since a paint layer is not included, each minute projection **18** is exposed on the surface of the golf ball **2** as a whole. In the golf ball **2** that does not have a paint layer, the minute projection **18** is also an exposed portion **19** as a whole.

When the golf ball **2** collides against the ground or rolls on the ground, mud may be brought into contact with the surface of the golf ball **2**. The mud flows between an exposed portion **19** and another exposed portion **19** adjacent to this exposed portion **19** as a flow passage. Thus, the mud is less likely to adhere to the golf ball **2**. The golf ball **2** is less likely to become stained. The golf ball **2** has excellent stain resistance.

Water easily flows between an exposed portion **19** and another exposed portion **19** adjacent to this exposed portion **19**. Therefore, even if mud adheres to the surface of the golf ball **2**, when the golf ball **2** is washed with water, the water flows while taking in the dirt. Dirt is easily removed from the golf ball **2**. The golf ball **2** has excellent washability. The exposed portions **19** can also contribute to protection of a mark layer.

As described above, the golf ball **2** does not have a paint layer. Therefore, improvement of a spin rate due to a paint layer cannot be expected. However, the coefficient of friction of the golf ball **2**, which has the exposed portions **19**, against a clubface is high, and thus a significant reduction in spin rate does not occur as compared to a conventional golf ball. The golf ball **2** has excellent flight performance upon a shot with a long iron.

FIG. 3 shows a plurality of exposed portions **19** belonging to a first row I, and a plurality of exposed portions **19** belonging to a second row II. The direction indicated by an arrow A in FIG. 3 is the direction in which the rows extend. In each row, the exposed portions **19** are aligned at equal pitches. In other words, the exposed portions **19** are regularly aligned. The exposed portions **19** belonging to the first row I and the exposed portions **19** belonging to the second row II are arranged in a zigzag manner. At a part of the surface of the golf ball **2**, the exposed portions **19** may be irregularly aligned.

FIG. 4 is a partially enlarged cross-sectional view of the golf ball **2** in FIG. 1. The cover **8** has the minute projections **18** (that is, the exposed portions **19**). The exposed portions **19** stand outward in the radial direction of the golf ball **2**. In FIG. 4, reference sign **24** indicates the bottom surface of the exposed portion **19**.

FIG. 5 is a cross-sectional view taken along the line V-V in FIG. 4. FIG. 5 shows the bottom surface **24** of the exposed portion **19**. As described above, each minute projection **18** has a cylindrical shape. Therefore, the shape of the bottom surface **24** of the exposed portion **19** is a circle.

In FIG. 4, an arrow D indicates the diameter of the bottom surface **24** and indicates the diameter of the exposed portion **19**. An average diameter D_{av} is calculated by summing the diameters D of all the exposed portions **19** and dividing the sum of the diameters D by the number of the exposed portions **19**. The average diameter D_{av} is preferably not less than 5 μm and not greater than 50 μm . The golf ball **2** in which the average diameter D_{av} is in the above range has excellent stain resistance and washability. The golf ball **2** in which the average diameter D_{av} is in the above range has excellent flight distance upon a shot with a long iron. From these viewpoints, the average diameter D_{av} is more preferably not less than 15 μm and particularly preferably not less

than 20 μm . From the same viewpoints, the average diameter Day is more preferably not greater than 40 μm and particularly preferably not greater than 35 μm .

The area of each exposed portion 19 is defined as the area of the bottom surface 24. The area Sp of the exposed portion 19 shown in FIGS. 4 and 5 can be calculated by the following mathematical formula.

$$Sp = (D/2)^2 * \pi$$

The ratio Pp of the sum of the areas Sp of all the exposed portions 19 to the surface area of the phantom sphere 16 of the golf ball 2 is preferably not less than 7%. The golf ball 2 in which the ratio Pp is not less than 7% has excellent stain resistance and washability. The golf ball 2 further has excellent flight distance upon a shot with a long iron. From these viewpoints, the ratio Pp is preferably not less than 15% and particularly preferably not less than 20%. In light of ease of production of a mold for the golf ball 2, the ratio Pp is preferably not greater than 50%, more preferably not greater than 40%, and particularly preferably not greater than 35%.

FIG. 5 shows a bottom surface 24c of a first exposed portion 19c and also shows a bottom surface 24d of a second exposed portion 19d by an alternate long and two short dashes line. The second exposed portion 19d is adjacent to the first exposed portion 19c. In FIG. 5, an alternate long and two short dashes line 26 represents a straight line passing through the center of gravity Oc of the bottom surface 24c of the first exposed portion 19c and the center of gravity Od of the bottom surface 24d of the second exposed portion 19d.

In FIG. 5, an arrow P indicates a pitch. The pitch P is the distance between the first exposed portion 19c and the second exposed portion 19d adjacent to the first exposed portion 19c. The pitch P is the distance between the center of gravity Oc of the bottom surface 24c of the first exposed portion 19c and the center of gravity Od of the bottom surface 24d of the second exposed portion 19d. The "second exposed portion 19d adjacent to the first exposed portion 19c" is the exposed portion 19d having a smallest distance L (described in detail later) to the first exposed portion 19c, among the exposed portions 19 present around the first exposed portion 19c.

For each exposed portion 19, one pitch P is determined. An average pitch Pav is calculated by summing the pitches P of all the exposed portions 19 and dividing the sum of the pitches P by the number of the exposed portions 19. The average pitch Pav is preferably not greater than 100 μm . The golf ball 2 in which the average pitch Pav is not greater than 100 μm has excellent stain resistance, washability, and flight performance upon a shot with a long iron. From these viewpoints, the average pitch Pav is more preferably not greater than 80 μm and particularly preferably not greater than 70 μm . From the same viewpoints, the average pitch Pav is preferably not less than 10 μm , more preferably not less than 20 μm , and particularly preferably not less than 25 μm .

In FIG. 5, an arrow L indicates the distance between the first exposed portion 19c and the second exposed portion 19d adjacent to the first exposed portion 19c. The distance L is a value obtained by subtracting the radius of the bottom surface 24c of the first exposed portion 19c and the radius of the bottom surface 24d of the second exposed portion 19d from the pitch P. For each exposed portion 19, one distance L is determined. An average distance Lav is calculated by summing the distances L of all the exposed portions 19 and dividing the sum of the distances L by the number of the exposed portions 19. The average distance Lav is preferably

not less than 5 μm and not greater than 50 μm . The golf ball 2 in which the average distance Lav is in this range has excellent stain resistance, washability, and flight performance upon a shot with a long iron. From these viewpoints, the average distance Lav is particularly preferably not less than 10 μm and not greater than 40 μm .

In FIG. 4, an arrow H indicates the height of the minute projection 18 and indicates the height of the exposed portion 19. The height H is measured along the radial direction of the golf ball 2. An average height Hav is calculated by summing the heights H of all the exposed portions 19 and dividing the sum of the heights H by the number of the exposed portions 19. The average height Hav is preferably not less than 0.5 μm and not greater than 50 μm . The golf ball 2 in which the average height Hav is in this range has excellent stain resistance, washability, and flight performance upon a shot with a long iron. From these viewpoints, the average height Hav is preferably not less than 2 μm and particularly preferably not less than 3 μm . From the same viewpoints, the average height Hav is more preferably not greater than 40 μm and particularly preferably not greater than 35 μm .

The total number of the exposed portions 19 is preferably not less than 10 thousand and not greater than 10 million. The golf ball 2 in which this total number is not less than 10 thousand has excellent stain resistance, washability, and flight performance upon a shot with a long iron. From these viewpoints, this total number is more preferably not less than 20 thousand and particularly preferably not less than 50 thousand. A mold for the golf ball 2 in which this total number is not greater than 10 million is easily produced. From this viewpoint, this total number is more preferably not greater than 7 million and particularly preferably not greater than 5 million.

The surface of the golf ball 2 preferably has an arithmetic average height Sa of not less than 0.5 μm and not greater than 30 μm . The golf ball 2 in which the arithmetic average height Sa is in this range has excellent stain resistance, washability, and flight performance upon a shot with a long iron. From these viewpoints, the arithmetic average height Sa is more preferably not less than 1.5 μm and particularly preferably not less than 2.0 μm . From the same viewpoints, the arithmetic average height Sa is more preferably not greater than 25 μm and particularly preferably not greater than 20 μm .

The surface of the golf ball 2 preferably has a maximum height Sz of not less than 5 μm and not greater than 200 μm . The golf ball 2 in which the maximum height Sz is in this range has excellent stain resistance, washability, and flight performance upon a shot with a long iron. From these viewpoints, the maximum height Sz is more preferably not less than 10 μm and particularly preferably not less than 15 μm . From the same viewpoints, the maximum height Sz is more preferably not greater than 180 μm and particularly preferably not greater than 160 μm .

The arithmetic average height Sa and the maximum height Sz are measured according to the standards of ISO-25178 with a laser microscope (for example, a non-contact type surface roughness/shape measuring instrument of Keyence Corporation). In the microscope, the surface of the golf ball 2 is scanned with a laser in an X direction and a Y direction. Through this scanning, unevenness data of the surface of the golf ball 2 is obtained. The arithmetic average height Sa and the maximum height Sz are calculated on the basis of a three-dimensional image obtained from the unevenness data. The measurement conditions are as follows.

Magnification: 1000
 Measurement range X: 250 μm
 Measurement range Y: 250 μm
 Cutoff value: $\lambda_c=0.25$
 Observation region: X=1024 pixels, Y=768 pixels
 Total number of pixels: 786432 pixels

The glossiness of the surface of the golf ball **2** is preferably not less than 0.1 and not greater than 20. The golf ball **2** in which the glossiness is in this range has excellent appearance. From this viewpoint, the glossiness is more preferably not less than 0.3 and not greater than 17, and particularly preferably not less than 0.5 and not greater than 15. The glossiness is measured according to the standards of "ASTM D523-60".

FIG. 6 is a cross-sectional view of a part of a golf ball according to another embodiment of the present invention. FIG. 6 shows a cover **28** that is a part of a main body. The cover **28** has minute projections **32**. This golf ball does not have a paint layer. Therefore, each minute projection **32** is an exposed portion **34** as a whole. In FIG. 6, reference sign **36** indicates the bottom surface of the exposed portion **34**.

Each minute projection **32** has a truncated cone shape. Therefore, each exposed portion **34** also has a truncated cone shape. The specifications of this golf ball excluding the shape of the minute projection **32** (that is, the shape of the exposed portion **34**) are the same as the specifications of the golf ball **2** shown in FIGS. 1 to 5.

In this golf ball as well, the exposed portions **34** contribute to stain resistance, washability, and flight performance upon a shot with a long iron.

FIG. 7 is a cross-sectional view of a part of a golf ball according to still another embodiment of the present invention. This golf ball has a cover **38** and a paint layer **40**. The cover **38** has minute projections **42**. The paint layer **40** is thin. Therefore, a part of each minute projection **42** is not covered with the paint layer **40**. In other words, a part of each minute projection **42** is exposed on the surface of the golf ball. This part is referred to as an exposed portion **44**. The exposed portion **44** projects from the paint layer **40**. In FIG. 7, reference sign **46** indicates the bottom surface of the exposed portion **44**.

In this golf ball as well, the exposed portions **44** have excellent stain resistance, washability, and flight performance upon a shot with a long iron.

The golf ball may have minute projections having a shape such as a cone shape, a prism shape, a truncated pyramid shape, a pyramid shape, a partial sphere shape, and the like.

EXAMPLES

Example 1

A rubber composition was obtained by kneading 100 parts by weight of a high-cis polybutadiene (trade name "BR-730", manufactured by JSR Corporation), 27.4 parts by weight of zinc diacrylate, 5 parts by weight of zinc oxide, an appropriate amount of barium sulfate, 0.5 parts by weight of diphenyl disulfide, and 0.9 parts by weight of dicumyl peroxide. This rubber composition was placed into a mold including upper and lower mold halves each having a hemispherical cavity, and heated at 160° C. for 20 minutes to obtain a core with a diameter of 38.20 mm. The amount of barium sulfate was adjusted such that a core having a predetermined weight was obtained.

A resin composition was obtained by kneading 26 parts by weight of an ionomer resin (trade name "Himilan AM7337", manufactured by Du Pont-MITSUI POLYCHEMICALS

Co., Ltd.), 26 parts by weight of another ionomer resin (trade name "Himilan AM7329", manufactured by Du Pont-MITSUI POLYCHEMICALS Co., Ltd.), 48 parts by weight of a styrene block-containing thermoplastic elastomer (trade name "Rabalon T3221C", manufactured by Mitsubishi Chemical Corporation), 4 parts by weight of titanium dioxide (A220), and 0.2 parts by weight of a light stabilizer (trade name "JF-90", manufactured by Johoku Chemical Co., Ltd.) with a twin-screw kneading extruder. The core was covered with this resin composition by injection molding to form a mid layer. The thickness of the mid layer was 1.00 mm.

A resin composition was obtained by kneading 47 parts by weight of an ionomer resin (trade name "Himilan 1555", manufactured by Du Pont-MITSUI POLYCHEMICALS Co., Ltd.), 46 parts by weight of another ionomer resin (trade name "Himilan 1557", manufactured by Du Pont-MITSUI POLYCHEMICALS Co., Ltd.), 7 parts by weight of a styrene block-containing thermoplastic elastomer (the aforementioned "Rabalon T3221C"), 4 parts by weight of titanium dioxide (A220), and 0.2 parts by weight of a light stabilizer (the aforementioned "JF-90") with a twin-screw kneading extruder. The sphere consisting of the core and the mid layer was placed into a final mold having a large number of pimples and minute recesses on its cavity face. The mid layer was covered with the resin composition by injection molding to form a cover. The thickness of the cover was 1.25 mm. Dimples having a shape that is the inverted shape of the pimples were formed on the cover. Furthermore, minute projections (exposed portions) having a shape that is the inverted shape of the minute recesses were formed on the cover.

Examples 2 to 8 and Comparative Examples 1 and 3

Golf balls of Examples 2 to 8 and Comparative Examples 1 and 3 were obtained in the same manner as Example 1, except the final mold was changed and exposed portions having specifications shown in Tables 1 to 3 below were formed. The golf ball according to Comparative Example 3 does not have any exposed portions.

Comparative Example 2

A golf ball of Comparative Example 2 was obtained in the same manner as Comparative Example 3, except the entirety of the cover was covered with a paint layer. The thickness of the paint layer was 10 μm .

[Spin Rate]

An iron club #5 (trade name "SRIXON", manufactured by Sumitomo Rubber Industries, Ltd., shaft hardness: S) was attached to a swing machine manufactured by Golf Laboratories, Inc. A golf ball was hit under a condition of a head speed of 41 m/sec, and the spin rate was measured. The average value of data obtained by 20 measurements is shown in Tables 1 to 3 below. A ratio of the spin rate obtained with the value of Comparative Example 2 being used as a reference is also shown in Tables 1 to 3 below.

[Stain Resistance]

The golf balls according to each Example and each Comparative Example were put into a bucket together with soil, and the soil was agitated. Thereafter, the degree of stain of each golf ball was categorized on the basis of the following criteria.

- A: Stain is very little
- B: Stain is little

C: Stain is much
D: Stain is very much

The results are shown in Tables 1 to 3 below.

[Washability]

The golf balls that had been evaluated for stain resistance were put into a bucket together with water, and the water was agitated. Thereafter, the degree of stain of each golf ball was categorized on the basis of the following criteria.

A: Stain is very little
B: Stain is little
C: Stain is much
D: Stain is very much

The results are shown in Tables 1 to 3 below.

TABLE 1

	Example 2	Example 3	Example 1	Example 4
Dav (μm)	15	25	25	25
Pav (μm)	30	50	50	50
Pp (%)	22.7	22.7	22.7	22.7
Hav (μm)	10	5	10	30
Paint layer	Absent	Absent	Absent	Absent
Sa (μm)	5	2.5	5	15
Sz (μm)	50	25	50	150
Stain resistance	B	B	A	B
Washability	B	A	A	A
Spin (rpm)	4675	4625	4650	4675
Spin (%)	99.5	98.4	98.9	99.5

TABLE 2

	Compa. Example 1	Example 5	Example 6	Example 7
Dav (μm)	25	25	40	25
Pav (μm)	50	75	80	95
Pp (%)	22.7	10.1	22.7	6.3
Hav (μm)	55	10	10	10
Paint layer	Absent	Absent	Absent	Absent
Sa (μm)	27.5	5	5	5
Sz (μm)	275	50	50	50
Stain resistance	C	A	B	B
Washability	C	B	B	C
Spin (rpm)	4700	4625	4600	4575
Spin (%)	100.0	98.4	97.9	97.3

TABLE 3

	Example 8	Compa. Example 2	Compa. Example 3
Dav (μm)	60	—	—
Pav (μm)	120	—	—
Pp (%)	22.7	0	0
Hav (μm)	10	—	—
Paint layer	Absent	Present	Absent
Sa (μm)	5	—	—
Sz (μm)	50	—	—
Stain resistance	D	D	E
Washability	C	D	E

TABLE 3-continued

	Example 8	Compa. Example 2	Compa. Example 3
Spin (rpm)	4525	4700	4500
Spin (%)	96.3	—	95.7

As shown in Tables 1 to 3, the golf ball of each Example has excellent flight performance upon a shot with a long iron. Furthermore, the golf ball of each Example has excellent stain resistance and washability. From the evaluation results, advantages of the present invention are clear.

The aforementioned minute projections are applicable to golf balls having various structures such as a one-piece golf ball, a two-piece golf ball, a four-piece golf ball, a five-piece golf ball, a six-piece golf ball, a thread-wound golf ball, and the like in addition to a three-piece golf ball. The above descriptions are merely illustrative examples, and various modifications can be made without departing from the principles of the present invention.

What is claimed is:

1. A golf ball comprising a core and a cover positioned outside the core, wherein

the cover has a plurality of minute projections on a surface thereof,

each minute projection has an exposed portion that is exposed on a surface of the golf ball,

the surface of the golf ball has an arithmetic average height Sa of not less than 0.5 μm and not greater than 30 μm, and

an average value Hay of heights H of the exposed portions is not less than 2 μm and not greater than 50 μm,

wherein the arithmetic average height Sa is based on a three-dimensional image obtained from a laser microscope scanning of the golf ball surface to generate unevenness data and corresponds to the average height of the surface of the golf ball as measured according to the standards of ISO-25178.

2. The golf ball according to claim 1, wherein a ratio Pp of a sum of areas of all the exposed portions to a surface area of a phantom sphere of the golf ball is not less than 7%.

3. The golf ball according to claim 1, wherein an average value Day of diameters D of the exposed portions is not less than 5 μm and not greater than 50 μm.

4. The golf ball according to claim 1, wherein an average value Pay of pitches P each between an exposed portion and another exposed portion adjacent to this exposed portion is not greater than 100 μm.

5. The golf ball according to claim 1, wherein the surface of the golf ball has a maximum height Sz of not less than 5 μm and not greater than 200 μm.

6. The golf ball according to claim 1, further comprising a paint layer partially covering the cover, wherein the exposed portions project from the paint layer.

7. The golf ball according to claim 5, wherein the maximum height Sz is based on a three-dimensional image obtained from a laser microscope scanning of the golf ball surface to generate unevenness data and corresponds to the average height of the surface of the golf ball as measured according to the standards of ISO-25178.

* * * * *