

(19) **DANMARK**

(10) **DK/EP 2674198 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **A 62 D 1/00 (2006.01)** **C 08 J 9/34 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2018-06-18**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-04-04**
- (86) Europæisk ansøgning nr.: **12744457.8**
- (86) Europæisk indleveringsdag: **2012-02-09**
- (87) Den europæiske ansøgnings publiceringsdag: **2013-12-18**
- (86) International ansøgning nr.: **IB2012000221**
- (87) Internationalt publikationsnr.: **WO2012107825**
- (30) Prioritet: **2011-02-10 RU 2011104729**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Independent Fire Suppression Technologies Inc., 4047 MT Everest Way, Katy, Texas 77449, USA**
- (72) Opfinder: **BLIZNETS, Igor, ul. Khabarovskaia 14/2-133, Moscow 107589, Russiske Føderation**
SEREGIN, Victor, ul. Oktiabrskaja 4-10, Sergiev-Posad, Moskovskaya obl. 141300, Russiske Føderation
- (74) Fuldmægtig i Danmark: **Holme Patent A/S, Valbygårdsvej 33, 2500 Valby, Danmark**
- (54) Benævnelse: **Autonomt brandbekæmpelsesmiddel**
- (56) Fremdragne publikationer:
WO-A1-99/56830
JP-A- 2007 160 028
JP-A- 2009 119 240
RU-C1- 2 403 934
RU-U1- 90 994
DATABASE WPI Week 201110 Thomson Scientific, London, GB; AN 2011-B04707 XP002741397, & RU 90 994 U1 (PIROKHIMIKA CC) 27 January 2010 (2010-01-27)

DESCRIPTION

[0001] This patent application relates to firefighting agents, in particular, to autonomous firefighting agents and may be used to put out fire at the early stages thereof.

[0002] More specifically, in one embodiment of the invention, it relates to an autonomous firefighting agent.

[0003] A prior art firefighting agent is made from a material having fire-extinguishing properties and consists of microcapsules of fire-extinguishing composition embedded in a polymeric binder. The microcapsules are microspheres consisting of spherical gelatin shells, each enclosing a liquid firefighting agent such as any substances in the class of halo-organic compounds of the formula C_3F_7I , or C_nF_{2n+2} , or $(C_2F_5)_2N(C_mF_{2m+1})$, wherein $n=5-7$ and $m=1-2$, that are released automatically upon heating. The microcapsules have a size of 100 to 400 μm (that is, from 10^{-4} m to $4 \cdot 10^{-4}$ m) and open up within the temperature range of 130 to 149°C and 166 to 190°C (Patent RU2161520, 1998).

[0004] The prior art agent is deficient because making gelatin shells for microcapsules used therein to micro-capsulize a fire-extinguishing composition is a technologically complicated and expensive process that raises significantly the costs of products manufactured from this material. Besides, the prior art agent has a very high triggering threshold (at a temperature of 130°C) that is not always acceptable.

[0005] The closest related prior art invention of the claimed agent is an autonomous firefighting agent made from a material having fire-extinguishing properties that comprises microcapsules containing a fire-extinguishing composition, said microcapsules having a size ranging from 2 to 100 μm (that is, from $2 \cdot 10^{-6}$ m to 10^{-4} m), said material being halocarbon enclosed in a polymeric shell of polyurea and/or polyurethane, and a binder such as a polymeric resin. The prior art agent has a mass content of halocarbon varying between 70% and 90%. The material having fire-extinguishing properties is applied to a solid-phase support, for example, a metal substrate (Patent RU90994, 2009).

[0006] The prior art agent has capsules opening within the temperature range of 110 to 165°C and is manufactured in an advanced process at lower costs.

[0007] The prior art agent, though, has a number of drawbacks. For example, the firefighting layer may crack and flake off the substrate surface over time and/or with fluctuations in the temperature and moisture content of the environment. As a result, the fire-extinguishing properties of the agent deteriorate and it may fail to function in response to ignition. Furthermore, for the substrate material, for example, metal, coated with the fire-extinguishing composition to adhere firmly to the walls of an object protected, the surface to which the agent is attached must meet certain requirements, such as be smooth and level, a requirement that

is not always attainable in practice. It has also been demonstrated practically that a material having fire-extinguishing properties exhibits its best properties when the content of halocarbon therein is other than in the range of 70% to 90%.

[0008] It is an object of the present patent application to develop an autonomous firefighting agent made from a composite material having fire-extinguishing properties on the basis of a micro-capsulized fire-extinguishing composition that is durable, strong, and flexible to be suitable for practical employment without using a solid-phase substrate.

[0009] The technical effect of this invention is achieved in an autonomous firefighting agent made from a material having fire-extinguishing properties and containing microcapsules filled with a fire-extinguishing composition and having a size ranging from 2 to 100 μm (that is, $2 \cdot 10^{-6}$ m to 10^{-4} m), said microcapsules being halocarbon enclosed in a polymeric shell of polyurea and/or polyurethane, and a binder, said binder being a composite material comprising a polymeric component and mineral fibers and/or particles, said halocarbon being enclosed in a polymeric shell of polyurea and/or polyurethane on the basis of a polyisocyanate prepolymer, and said halocarbon being 1,1,2,2-tetrafluorodibromoethane, and/or 1,1,2-trifluorotrichloroethane, and/or 2-iodo-1,1,1,2,3,3,3-heptafluoropropane, and/or a mixture thereof with other halocarbons.

[0010] The other halocarbons in the mixture preferably contain any one of the following second substances: (a) 1,1,2,2-tetrafluoroethane; (b) 1,1-difluoro-2,2,2-trichloroethane; (c) 1,2-difluorotrichloroethane; (d) 1,1-difluoro-1,2-dichloroethane; (e) 1,2-difluoro-1,1-dichloroethane; (f) 1,1-difluoro-1-chloroethane; (g) 1-fluoro-1,1-dichloroethane; (h) 1-fluoro-2-chloroethane; (i) pentafluorochloroethane; (j) 1,1,2,2-tetrafluorodichloroethane; (k) 1,1,1-trifluorotrichloroethane; (l) 1,1,2-trifluoro-trichloroethane; (m) 1,1-difluorotetrachloroethane; and (n) 1,2-difluorotetrachloroethane.

[0011] Preferably, the mineral fibers contain at least one of the following materials: (a) glass fiber; (b) basalt fiber; (c) fiber of natural minerals; and (d) fiber of artificial minerals.

[0012] Preferably, the mineral particles contain at least one of the following materials: (a) calcite; (b) marble; (c) chalk; (d) natural minerals; and (e) artificial minerals.

[0013] Preferably, the polymeric component contains at least one of the following substances: (a) acrylic resin; (b) alkyd resin; (c) glyptal resin; (d) latex resin; (e) pentaphthalic resin; (f) epoxy resin; (g) polyurethane; (h) polyurea; (i) polyvinyl alcohol; and (j) polyvinyl acetate.

[0014] The agent may preferably be manufactured in the form of a plate.

[0015] Microcapsules made from polyurea or polyurethane on the basis of a polyisocyanate prepolymer have a high strength to be filled with halocarbons and also have a thin shell exploding at a specified temperature in the range of 110 to 165°C. The shell remains tightly sealed for a long time for the fire-extinguishing agent to be stored for several years at an

efficiency loss of 10% at most.

[0016] Polyisocyanate prepolymer used in this invention is essential for producing a "denser" cellular polyurea polymer having stronger chemical bonds and/or polyurethane because polyisocyanate reacts with several thousand hydroxyl or amino groups.

[0017] The binder, which is a composite polymeric material containing a polymeric component and mineral fibers and/or particles, contributes strength, flexibility, and durability to the agent.

[0018] The properties of the polymeric component are beneficial for manufacturing the agent in which microcapsules and other components of the composite material are distributed in the resin, whereupon the resulting fluid mass is shaped and solidifies into the claimed firefighting agent.

[0019] The mineral component helps capsules to be distributed evenly in the filler during the agent manufacturing process such that the filler does not crush the capsules upon drying. Mineral fibers prevent the resulting material from cracking, and mineral particles cause air pores to be formed in the material for all the capsules in the material to function upon ignition such that all gas enclosed in the capsules, rather than a portion thereof, is used to put out the fire.

[0020] The geometrical plate-like shape of the agent contributes to its maximum efficiency in use. Apart from plate shape, the agent may have any other shape suitable for protecting a particular object.

[0021] According to its second embodiment, the invention relates to a method for manufacturing an autonomous firefighting agent according to the claimed invention. The method comprises the manufacturing steps of:

- preparing a first mixture of a fire-extinguishing agent and polyisocyanate;
- obtaining an emulsion of the first mixture in an aqueous solution of polyvinyl alcohol;
- adding the resulting emulsion to an aqueous solution of polyethylene polyamine;
- producing a suspension of microcapsules in water;
- preparing a second mixture of the suspension and a binder;
- shaping plates from the second mixture;
- drying the plates;
- applying an adhesive layer to one side of a plate;
- covering the adhesive layer with a detachable protective film; and
- cutting pieces of a specified size out of the plates.

[0022] This manufacturing method helps obtain a highly effective firefighting agent that releases the fire-extinguishing agent intensively and is flexible, strong, durable, reliable, and lightweight in use.

[0023] According to its third embodiment, the invention relates to an object using the autonomous firefighting agent of this invention to put out fire within 10 to 20 seconds after ignition.

[0024] The invention helps effectively to protect objects such as, for example, electrical switchboards and boxes (in particular, electrical socket boxes), engine bays of vehicles, transformer stations, server stations, and other electrical switchgear and power units against destruction by fire.

[0025] Other distinctive features and advantages of the invention will be clear from the description following below for illustration, rather than restriction, purposes with reference to FIG. 1 to FIG. 4 attached hereto.

[0026] The patent application is illustrated by the drawings wherein:

FIG. 1 is a diagrammatic general side view of the autonomous firefighting agent;

FIG. 2 is a microphotograph of the structure of a composite fire-extinguishing material;

FIG. 3 and FIG. 4 are specific examples of the claimed agent placed on an object to be protected, in particular:

FIG. 3 shows the agent placed in an electrical socket box; and

FIG. 4 shows diagrammatically the application of the agent in an electrical switchboard.

FIG. 5 shows diagrammatically an exemplary sequence of steps of the method for manufacturing an autonomous firefighting agent of the present invention.

[0027] In its first embodiment, the invention relates to an autonomous firefighting agent 10 cut out of a sheet 1 of a composite material having fire-extinguishing properties. The material comprises microcapsules 2 of a fire-extinguishing composition having a size of 2 to 100 μm (that is, from $2 \cdot 10^{-6}$ m to 10^{-4} m) selected from halocarbons, such as 1,1,2,2-tetrafluorodibromoethane, and/or 1,1,2-trifluorotrichloroethane, and/or 2-iodo-1,1,1,2,3,3,3-heptafluoropropane, and/or a mixture thereof with other halocarbons, enclosed in a polymeric shell of polyurea, and/or polyurethane on the basis of a polyisocyanate prepolymer.

[0028] The aforesaid halocarbons may be used in a mixture with the following halocarbons: 1,1,2,2-tetrafluoroethane; 1,1-difluoro-2,2,2-trichloroethane; 1,2-difluorotrichloroethane; 1,1-difluoro-1,2-dichloroethane; 1,2-difluoro-1,1-dichloroethane; 1,1-difluoro-1-chloroethane; 1-fluoro-1,1-dichloroethane; 1-fluoro-2-chloroethane; pentafluorochloroethane; 1,1,2,2-tetrafluorodichloroethane; 1,1,1-trifluorotrichloroethane; 1,1,2-trifluorotrichloroethane; 1,1-difluorotetrachloroethane; 1,2-difluorotetrachloroethane; and so on.

[0029] Microcapsules 2 are distributed in a binder 3, which is a composite polymeric material comprising a polymeric component and a mineral component 4 in the form of fibers 5 and/or particles. Natural and artificial minerals may be used as mineral component 4 in the binder. Glass fiber, basalt fiber, and other fibers may be used as mineral fibers 5. Calcite, marble, chalk, and other particles may be used as mineral particles.

[0030] The polymeric component may be chosen from acrylic, and/or alkyd, and/or glyptal, and/or latex, and/or pentaphthalic, and/or epoxy resins, and/or polyurethane, and/or polyurea, and/or polyvinyl alcohol, and/or polyvinyl acetate.

[0031] An adhesive layer 6 covered with a protective film 7 (FIG. 1) is applied to one side of the formed composite material 1 to attach the same to the surface of an object to be protected.

[0032] According to its second embodiment, the invention relates to a method for manufacturing (100) an autonomous firefighting agent 10.

[0033] Microcapsulized halocarbons are obtained by polymerization on the interface of the phases. For this purpose, a first mixture of a fire-extinguishing agent and polyisocyanate is prepared (101). The resulting first mixture is poured into an aqueous solution of polyvinyl alcohol to obtain (102) an emulsion. An aqueous solution of polyethylene polyamine is added (1020) to the emulsion to obtain (103) a suspension to form the shells of microcapsules 2. The suspension of microcapsules 2 and the fire-extinguishing agent is mixed with binder 3 to obtain (104) a second mixture.

[0034] The resulting second mixture mass is placed (1040) in a pan designed for this purpose to solidify and dry (105). The solidified and dried composite material 1 is cut up (106) into pieces of desired shape that are used as agent 10 having fire-extinguishing properties. For agent 10 to be affixed to the surface of objects to be protected, one side of the agent is coated (107) with an adhesive layer 6 that is covered (108) with an easily detachable protective film 7.

[0035] FIG. 5 shows diagrammatically an example of a possible sequence of aforesaid steps of the method for manufacturing (100) an autonomous firefighting agent according to the invention by:

- preparing (101) a first mixture of a fire-extinguishing agent and polyisocyanate;
- obtaining (102) an emulsion of the first mixture in an aqueous solution of polyvinyl alcohol;
- adding (1020) the resulting emulsion to an aqueous solution of polyethylene polyamine;
- obtaining (103) a suspension of microcapsules in water;
- preparing (104) a second mixture of the suspension and a binder;
- shaping (1040) the second mixture into plates of desired thickness;
- drying (105) the plates;
- applying (107) an adhesive layer 6 to one side of a plate;
- covering (108) the adhesive layer with a detachable protective film 7; and

- cutting up (106) the plates into pieces of desired size.

[0036] According to its third embodiment, the invention relates to an object 11 and 12 using autonomous firefighting agent 10 of the invention to put out fire within 10 to 20 seconds after ignition. In use, autonomous firefighting agent 10 is placed at a potentially fire-hazardous point and puts out the fire upon ignition at an early stage thereof. Fire is extinguished by halocarbon vapors released profusely when the agent is heated to a temperature above 110°C as the microcapsule shells are broken up. Fire is put out within 10 to 20 seconds after ignition, preventing the objects protected from being destroyed. The agent is effective in protecting electrical switchboards 11 (FIG. 4) and boxes (FIG. 3), vehicle engine bays, transformer and server stations, and other electrical switchgear and power units from fire.

[0037] The invention of this patent application produces a highly efficacious firefighting agent 10 that releases intensively a fire-extinguishing agent and is flexible, strong, durable, reliable, and easy to use.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description



- [RU2161520 \[0003\]](#)
- [RU90994 \[0005\]](#)

Krav

1. Autonomt brandbekæmpelsesmiddel (10) fremstillet af et materiale, der har brandslukkende egenskaber og omfattende mikrokapsler (2), der er fyldt med en brandslukningssammensætning og har en størrelse fra 2 til 100 μm , nævnte mikrokapsler er et halocarbon indesluttet i en polymerskal af polyurea og/eller polyurethan og et bindemiddel (3), hvor bindemidlet (3) er et kompositmateriale omfattende en polymerkomponent og mineralfibre (5) og/eller -partikler.
2. Autonomt brandbekæmpelsesmiddel (10) ifølge krav 1, hvori halocarbonet er indesluttet i en polymerskal af polyurea og/eller polyurethan på basis af polyisocyanat-prepolymer.
3. Autonomt brandbekæmpelsesmiddel (10) ifølge krav 1 eller krav 2, hvori halocarbonet er valgt blandt en af de følgende første stoffer: (a) 1,1,2,2-tetrafluordibromethan; (b) 1,1,2-trifluortrichlorethan; og (c) 2-iod-1,1,1,2,3,3,3-heptafluorpropan og/eller en blanding deraf med andre halocarboner.
4. Autonomt brandbekæmpelsesmiddel (10) ifølge krav 3, hvori andre halocarboner i blandingen indeholder et af de følgende anden stoffer: (a) 1,1,2,2-tetrafluorethan; (b) 1,1-difluor-2,2,2-trichlorethan; (c) 1,2-difluortrichlorethan; (d) 1,1-difluor-1,2-dichlorethan; (e) 1,2-difluor-1,1-dichlorethan; (f) 1,1-difluor-1-chlorethan; (g) 1-fluor-1,1-dichlorethan; (h) 1-fluor-2-chlorethan; (i) pentafluorchlorethan; (j) 1,1,2,2-tetrafluordichlorethan; (k) 1,1,1-trifluortrichlorethan; (l) 1,1,2-trifluortrichlorethan; (m) 1,1-difluortetrachlorethan; og (n) 1,2-difluortetrachlorethan.
5. Autonomt brandbekæmpelsesmiddel (10) ifølge et hvilket som helst af kravene 1 til 4, hvori mineralfibre (5) indeholder mindst ét af følgende materialer: (a) glasfiber; (b) basaltfiber; (c) fibre af naturlige mineraler; og (d) fibre af syntetiske mineraler.
6. Autonomt brandbekæmpelsesmiddel (10) ifølge et hvilket som helst af kravene 1 til 5, hvori mineralpartiklerne indeholder mindst ét af følgende materialer: (a) calcit; (b) marmor; (c) kridt; (d) naturlige mineraler og (e) syntetiske mineraler.

7. Autonomt brandbekæmpelsesmiddel (10) ifølge et hvilket som helst af kravene 1 til 6, hvori den polymer komponent omfatter mindst ét af følgende stoffer: (a) acrylresin; (b) alkydresin; (c) Glyptalresin; (d) latexresin; (e) pentaphthalatresin; (f) epoxyresin; (g) polyurethan; (h) polyurea; (i) polyvinylalkohol; og (j) polyvinylacetat.
8. Autonomt brandbekæmpelsesmiddel (10) ifølge et hvilket som helst af kravene 1 til 7, der er formet som en plade.
9. Fremgangsmåde til fremstilling (100) af et autonomt brandbekæmpelsesmiddel (10) ifølge krav 8 kombineret med krav 2, der omfatter trinnene at:
 - fremstille (101) en første blanding af et brandslukningsmiddel og polyisocyanat;
 - opnå (102) en emulsion af den første blanding i en vandig opløsning af polyvinylalkohol;
 - tilsætte (1020) den resulterende emulsion til en vandig opløsning af polyethylenpolyamin;
 - fremstille (103) en suspension af mikrokapsler i vand;
 - fremstille (104) en anden blanding af suspensionen og et bindemiddel;
 - forme (1040) den anden blanding til plader;
 - tørre (105) pladerne;
 - påføre (107) et klæbemiddellag (6) på den ene side af en plade;
 - dække (108) klæbemiddellaget med en aftagelig beskyttelsesfilm (7); og
 - skære (106) pladerne i stykker af ønsket størrelse.
10. Emne (11), (12), der anvender det autonome brandbekæmpelsesmiddel (10) ifølge et hvilket som helst af kravene 1 til 8 til at slukke ilden.

DRAWINGS

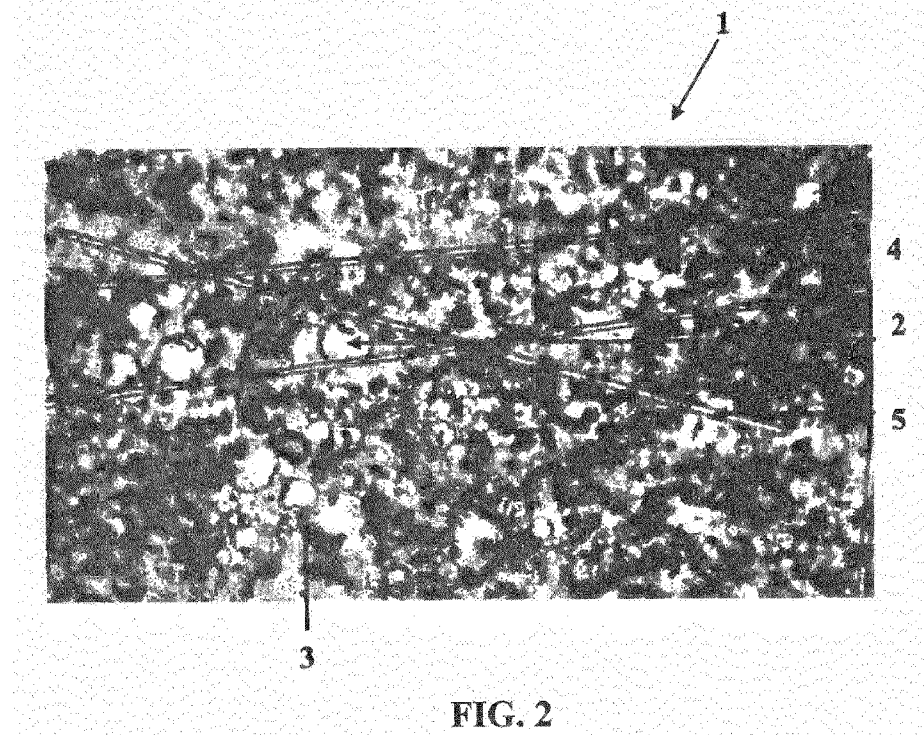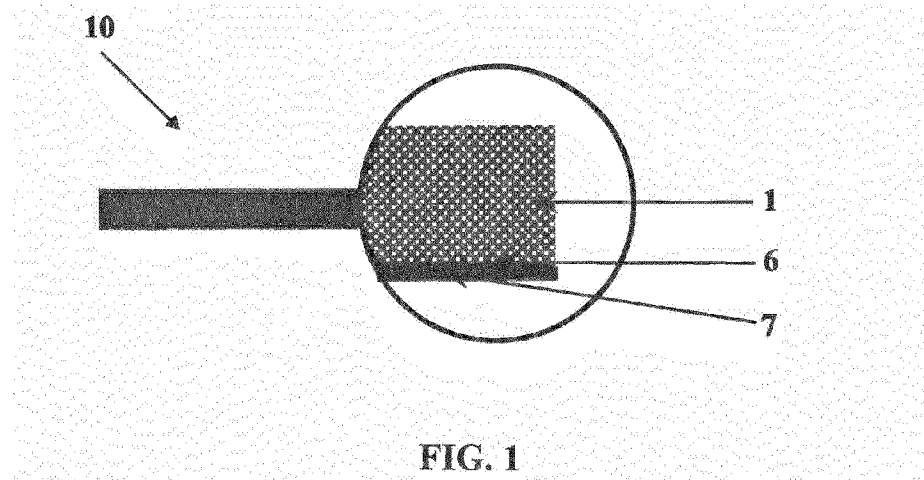

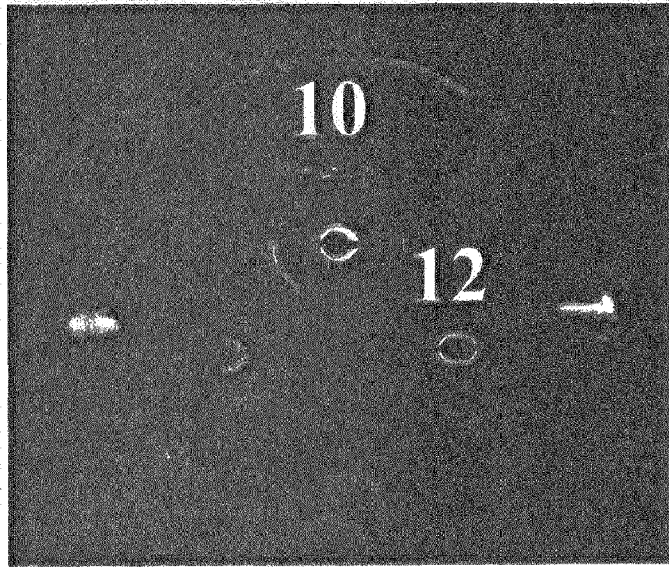


FIG. 3

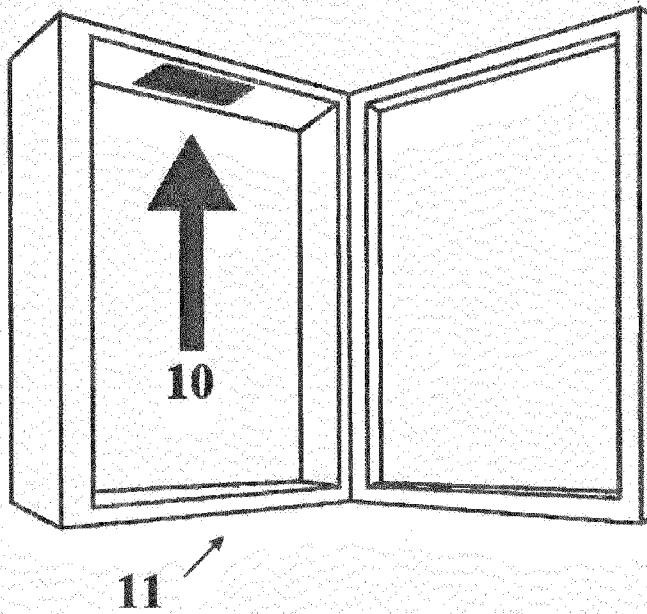


FIG. 4

