



US008523088B2

(12) **United States Patent
Mueller**

(10) **Patent No.: US 8,523,088 B2**
(45) **Date of Patent: Sep. 3, 2013**

(54) **PARTICLE SPRAYING**

(75) Inventor: **Peter J. Mueller**, Manchester, NH (US)

(73) Assignee: **Velcro Industries B.V.**, Willemstad,
Curacao

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 297 days.

(21) Appl. No.: **13/008,564**

(22) Filed: **Jan. 18, 2011**

(65) **Prior Publication Data**

US 2012/0181345 A1 Jul. 19, 2012

(51) **Int. Cl.**

B05B 9/04 (2006.01)

B05B 7/04 (2006.01)

B05B 7/30 (2006.01)

B05B 7/28 (2006.01)

B05B 7/32 (2006.01)

A44B 18/00 (2006.01)

(52) **U.S. Cl.**

USPC **239/373**; 239/310; 239/316; 239/318;
239/337; 239/340; 24/448

(58) **Field of Classification Search**

USPC 239/1, 8, 10, 302, 310, 316, 318,
239/337, 340, 373, 526; 24/442, 444, 446-448
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,128,514 A 4/1964 Parker et al.
3,494,006 A 2/1970 Brumlik
4,288,036 A 9/1981 Jubinville
4,894,060 A * 1/1990 Nestegard 604/391

5,188,263 A 2/1993 Woods
5,450,983 A 9/1995 Stern et al.
5,749,129 A 5/1998 Murasaki et al.
6,056,901 A 5/2000 Hamatani et al.
6,106,944 A 8/2000 Heikkila et al.
6,112,945 A 9/2000 Woods
6,352,184 B1 3/2002 Stern et al.
6,663,017 B2 * 12/2003 Endres et al. 239/311
6,666,352 B1 12/2003 Woods
6,769,628 B1 * 8/2004 Vaage et al. 239/152
7,226,001 B1 6/2007 Stern et al.
7,308,738 B2 12/2007 Barvosa Carter et al.

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1810754 A1 7/2007
GB 2399496 A 9/2004
WO WO0133989 A1 5/2001
WO WO2010050831 A1 5/2010

OTHER PUBLICATIONS

International Search Report and Written Opinion for Application No.
PCT/US/2011/046361; dated Dec. 8, 2011; 10 pages.

(Continued)

Primary Examiner — Darren W Gorman



(74) *Attorney, Agent, or Firm* — Fish & Richardson P.C.

(57)

ABSTRACT

A particle sprayer includes a source of discrete particles, a spray outlet coupled to the particle source, and a conduit extending from a pressurized fluid inlet to the spray outlet and configured to constrain a flow of carrier fluid to flow along the conduit toward the spray outlet to propel particles from the particle source away from the spray outlet. The particles including discrete fastening bits having one or more projections, with each projection having an overhanging head for snagging fibers. The particle sprayer may be used to spray fastening bits onto a surface, to turn the surface into a touch fastener.

19 Claims, 18 Drawing Sheets

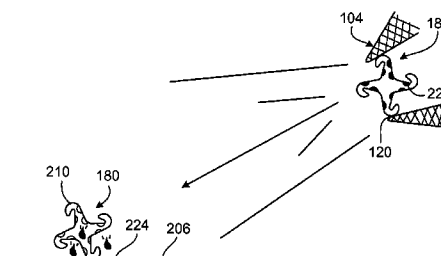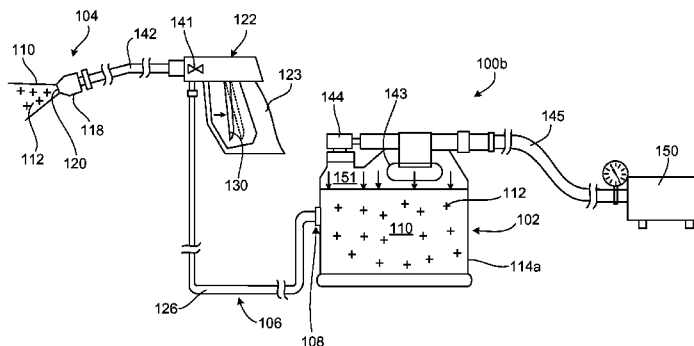

(56)

References Cited

U.S. PATENT DOCUMENTS

7,374,068	B2	5/2008	Greer
7,487,893	B1	2/2009	Greer et al.
7,784,649	B2	8/2010	Greer
8,082,637	B2	12/2011	Tolan et al.
2005/0181171	A1	8/2005	Ausen et al.
2005/0181352	A1	8/2005	Shephard et al.
2008/0021144	A1	1/2008	Stahlberg et al.
2009/0068463	A1	3/2009	Mochizuki et al.
2009/0130443	A1	5/2009	Lustiger
2009/0188948	A1	7/2009	Stern et al.

OTHER PUBLICATIONS

International Search Report and Written Opinion for Application No. PCT/US/2012/021662; dated Apr. 20, 2012; 11 pages.
Texture Paint Spray Gun; Model 66103; Set Up and Operating Instructions; Central Pneumatic; Distributed exclusively by Harbor Freight Tools, 2008; 13 pages.
International Preliminary Report on Patentability and Written Opinion; Baharlou; Feb. 14, 2013; World Intellectual Property Organization (WIPO) (International Bureau of); PCT/US/2011/046361; 7 pages.

* cited by examiner

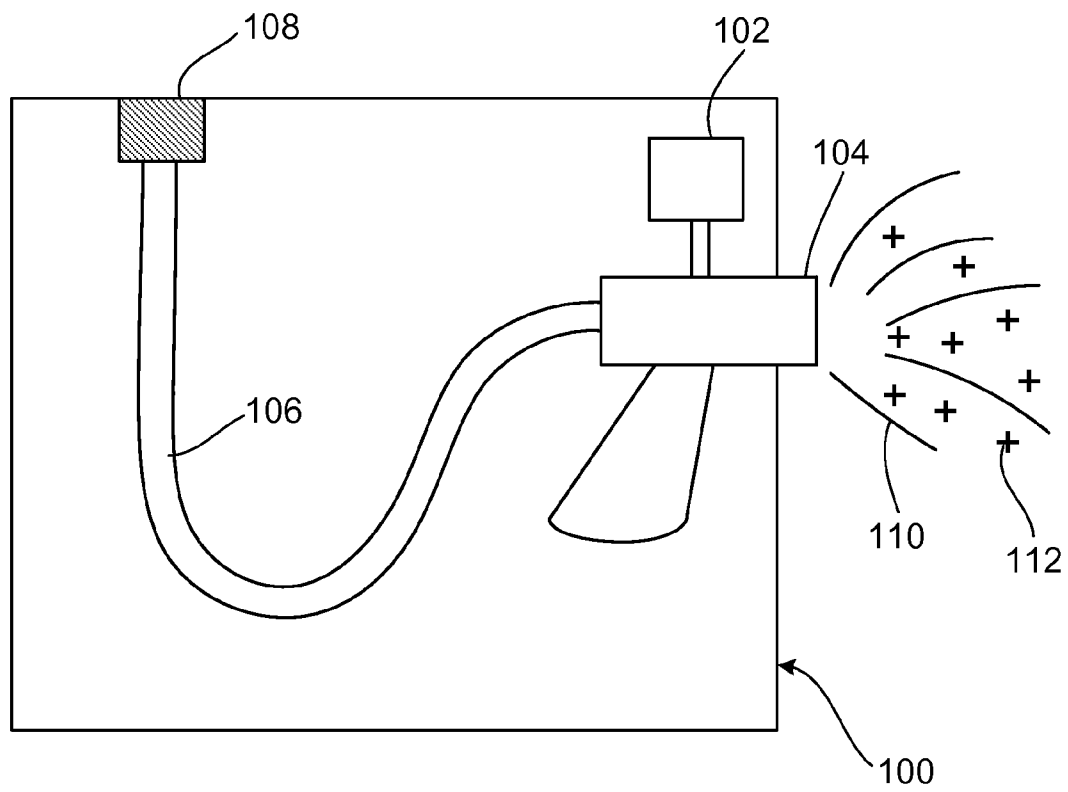


FIG. 1

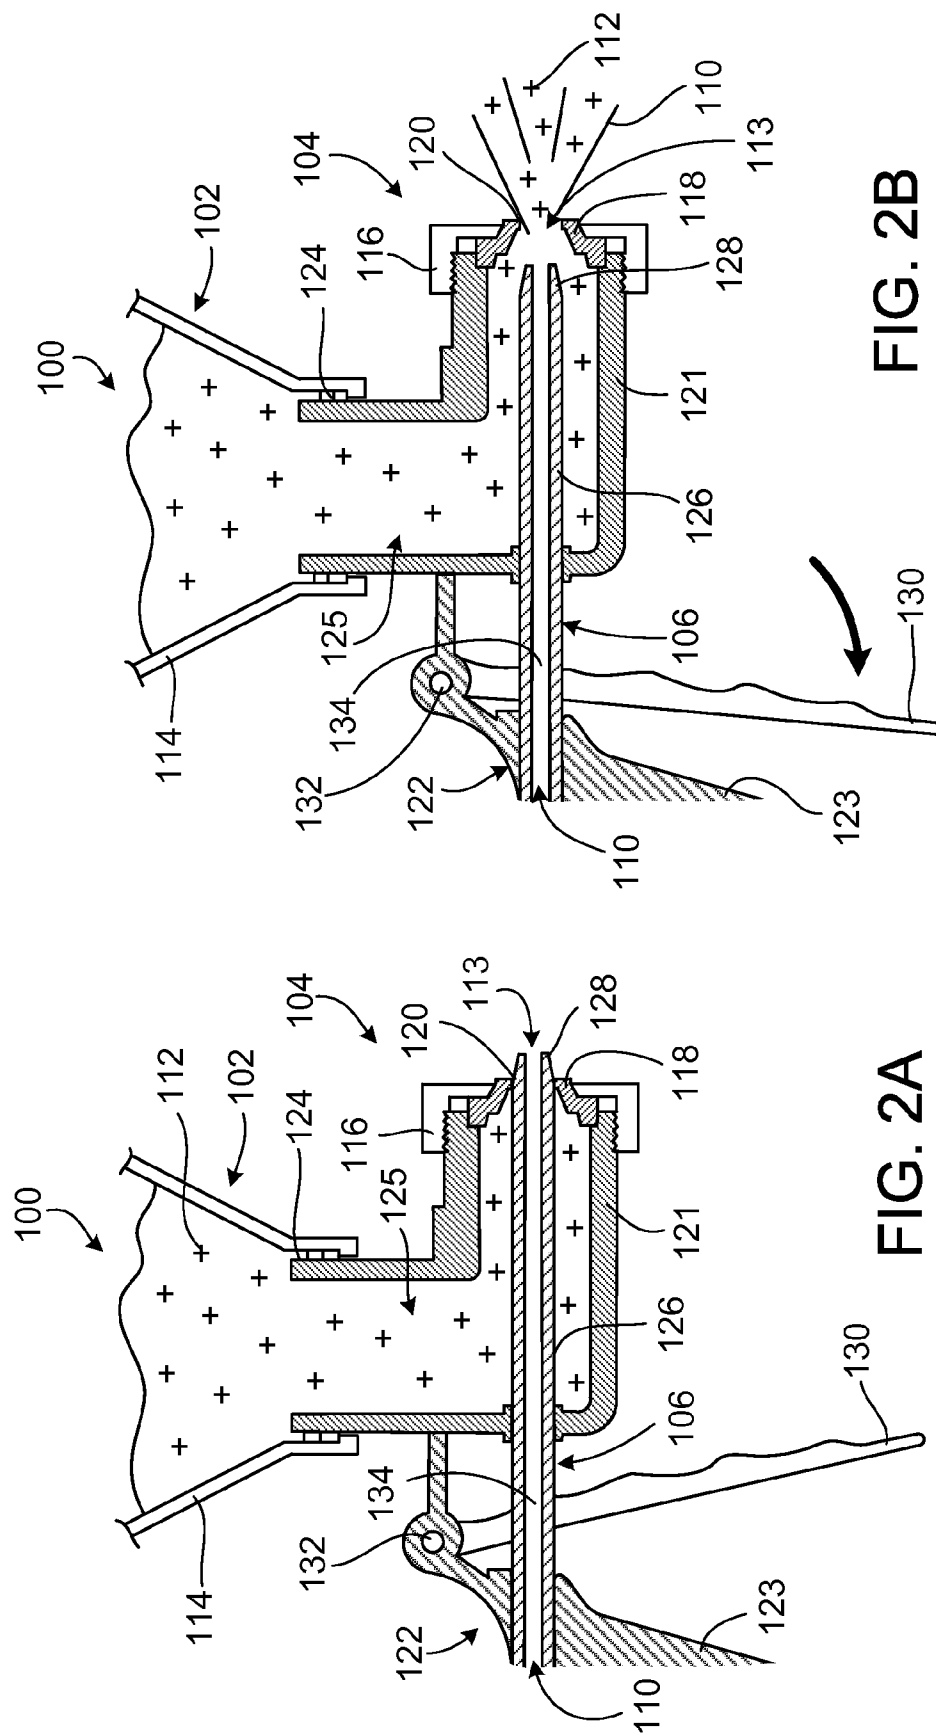


FIG. 2B

FIG. 2A

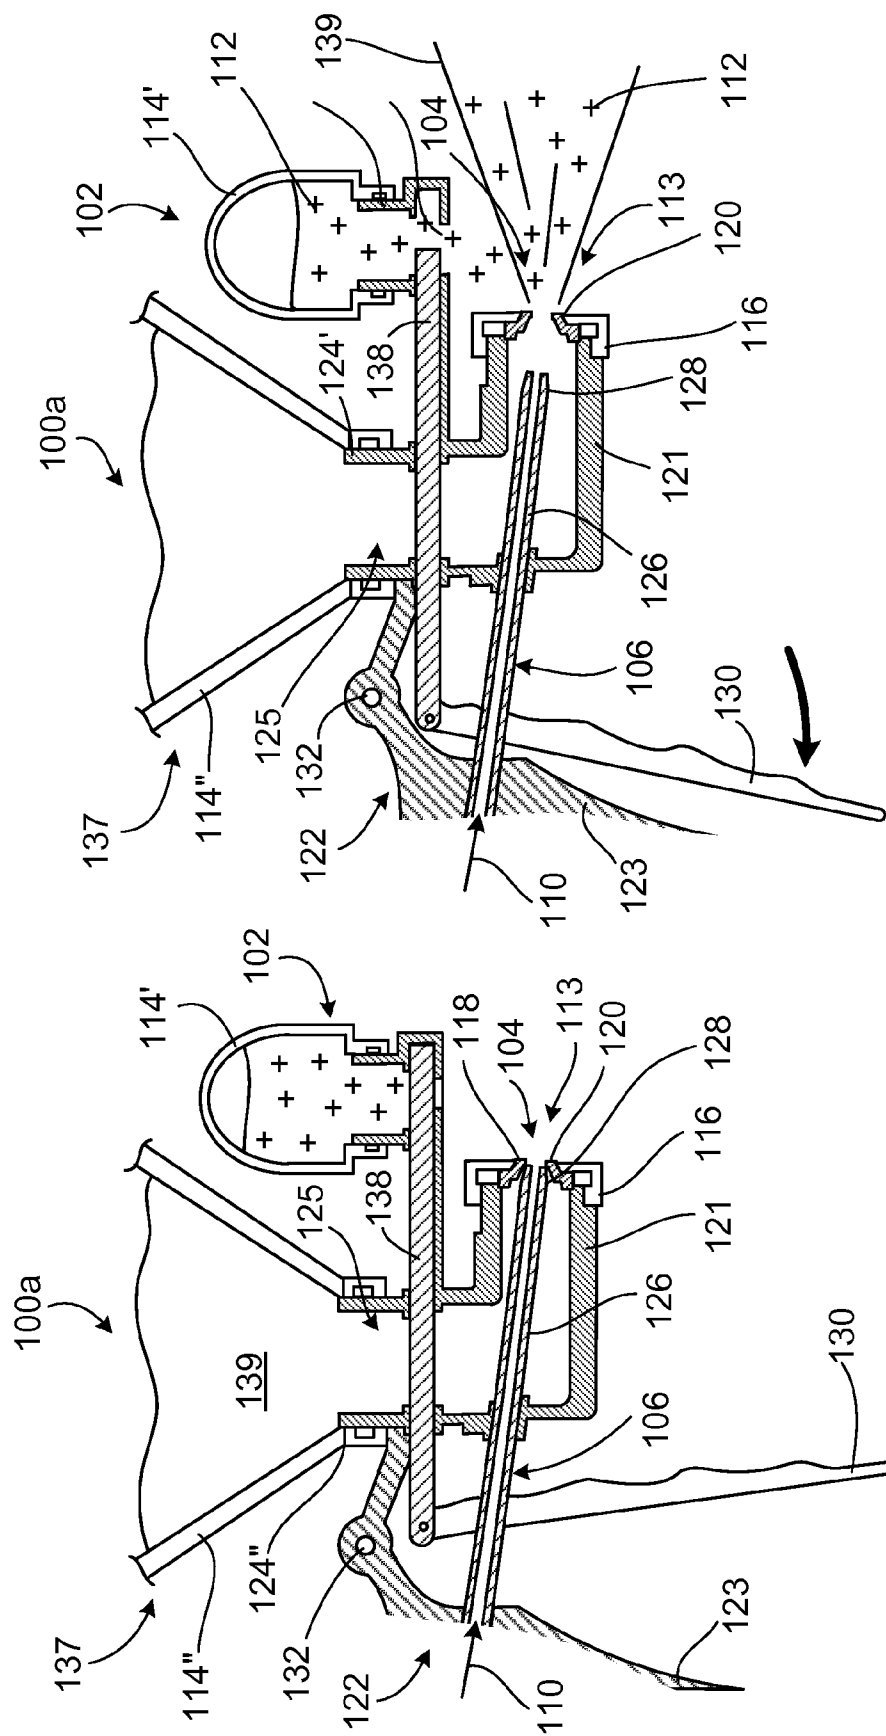
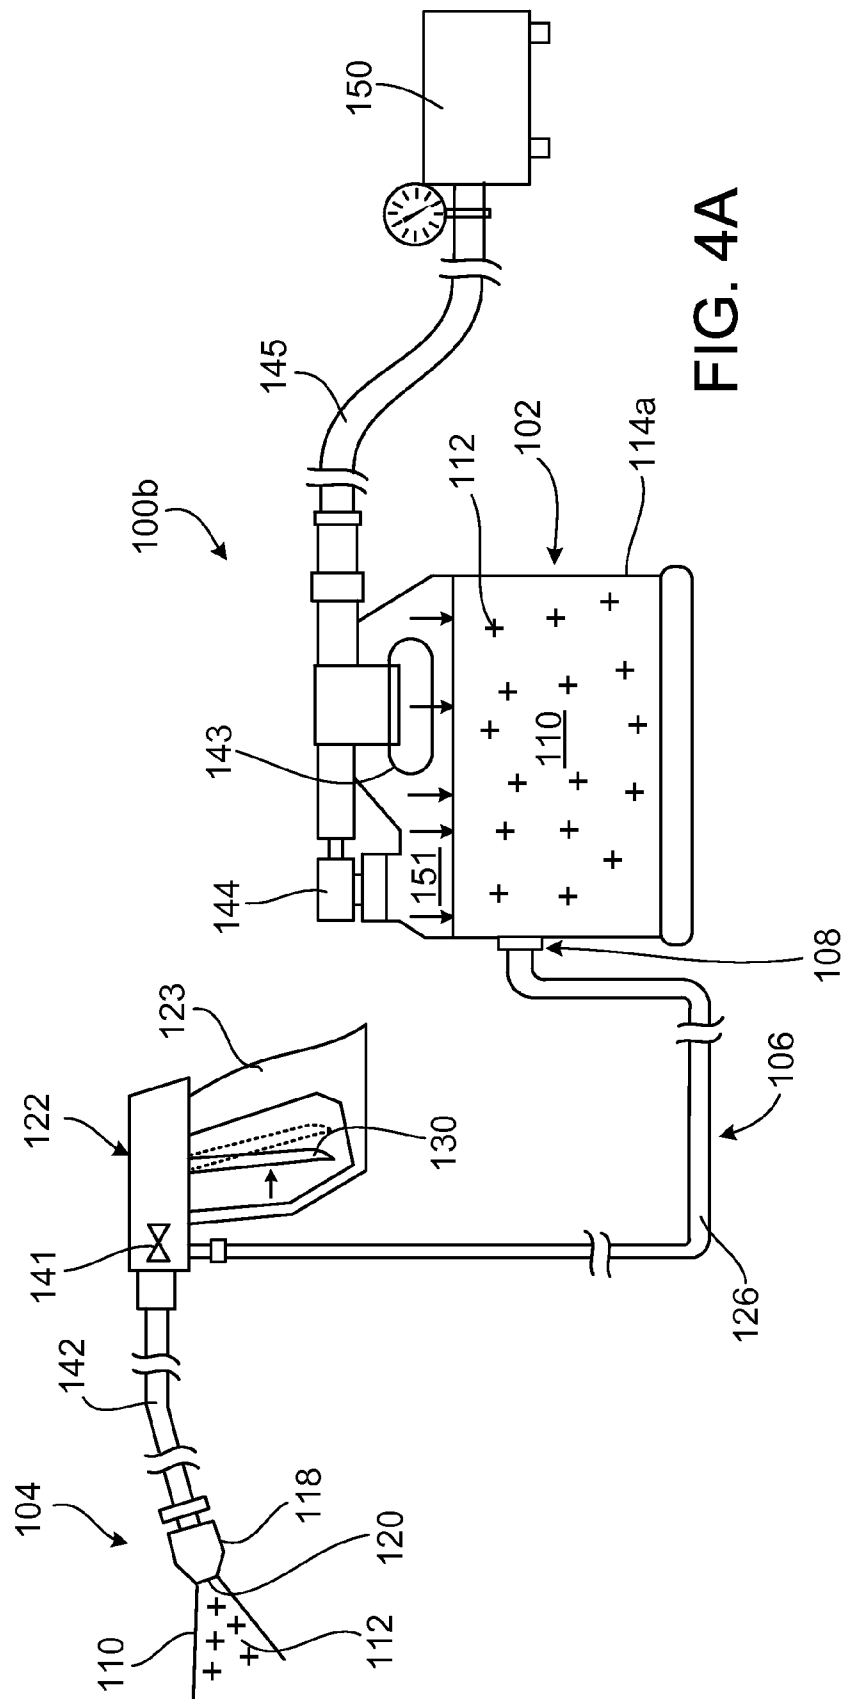
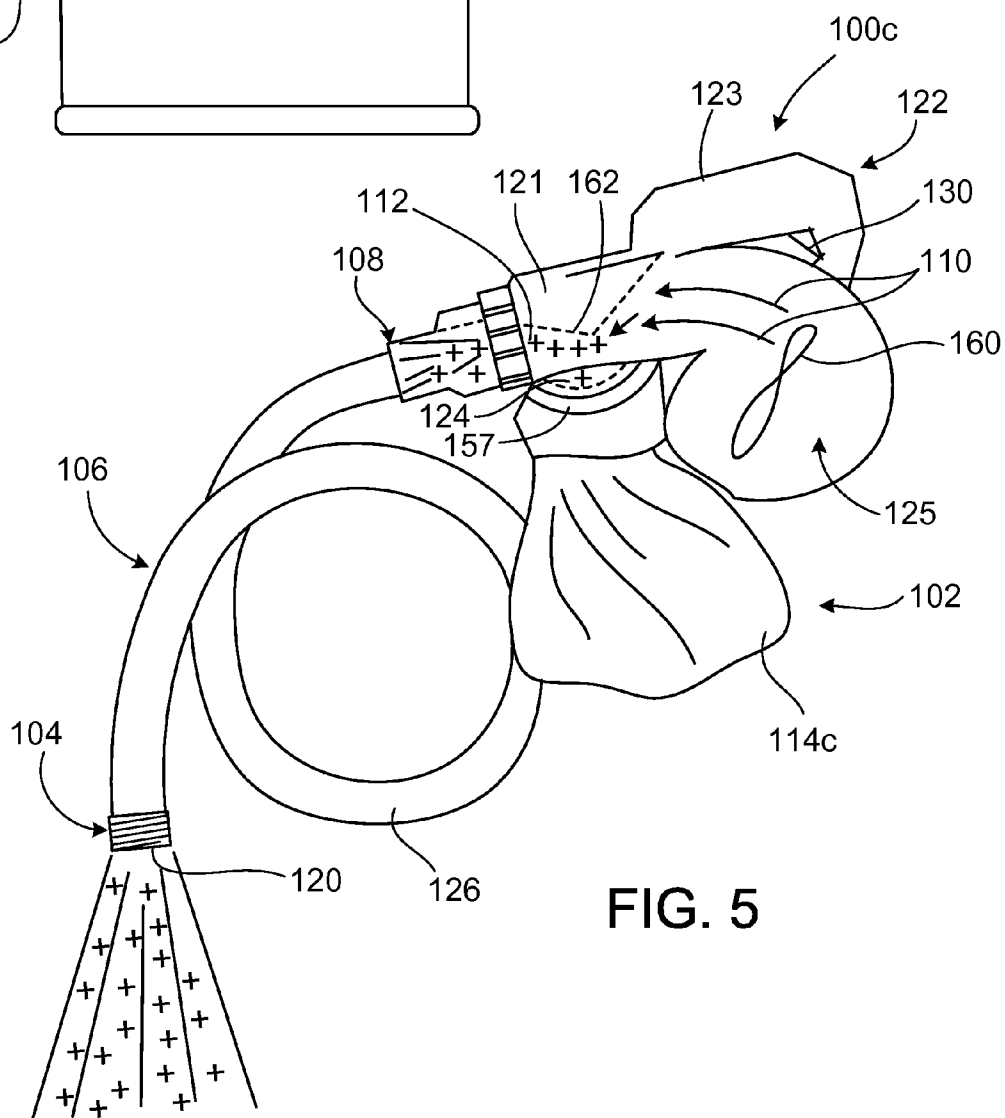
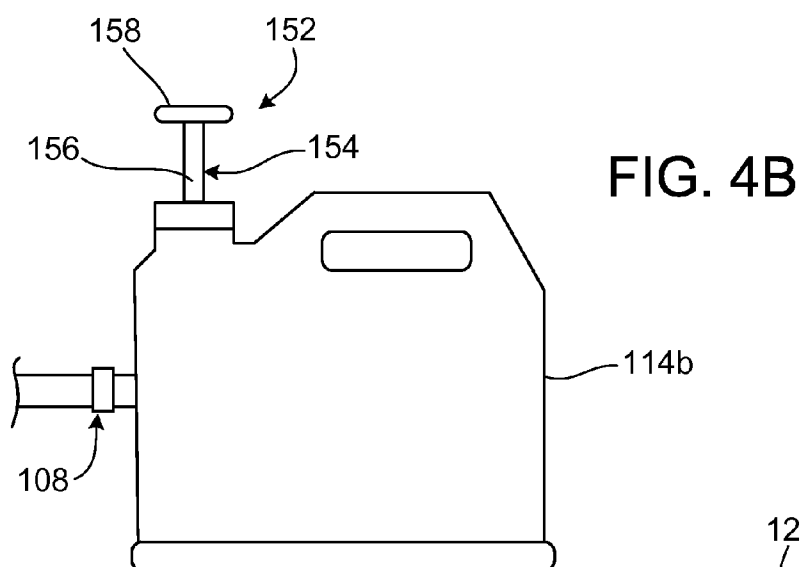


FIG. 3B

FIG. 3A





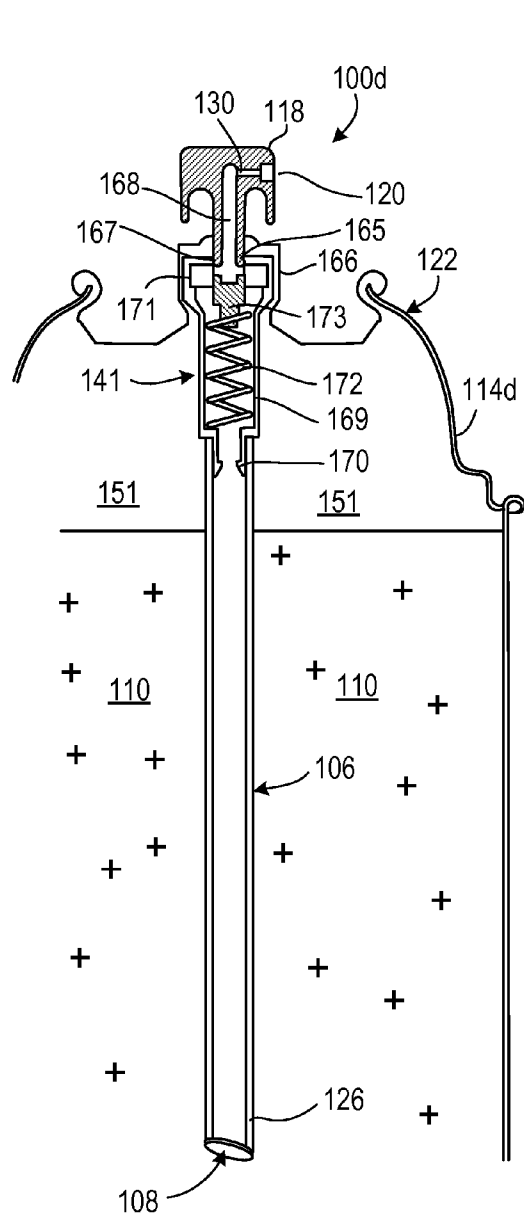


FIG. 6A

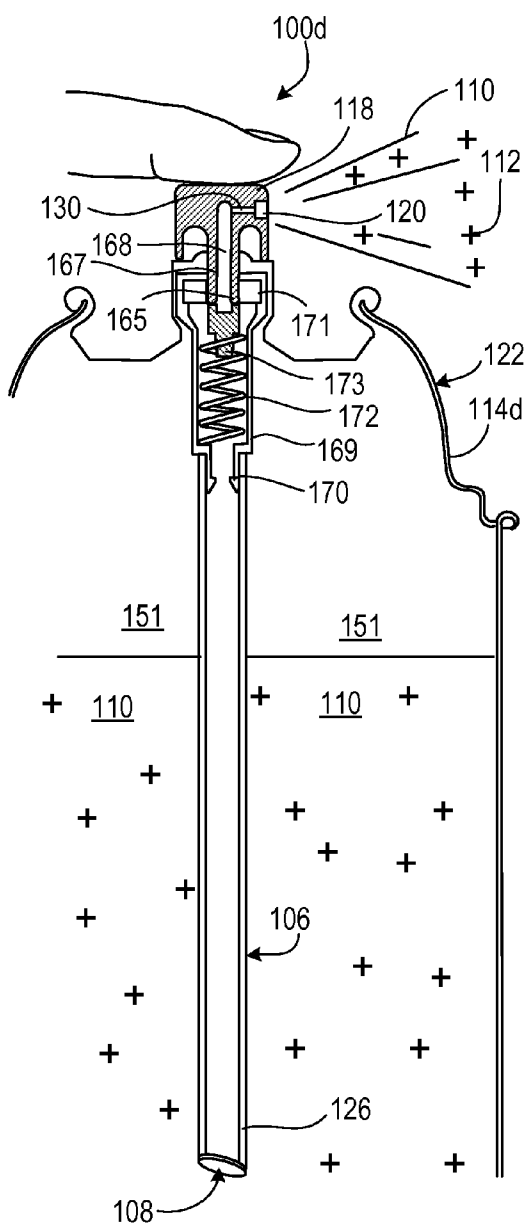


FIG. 6B

FIG. 7

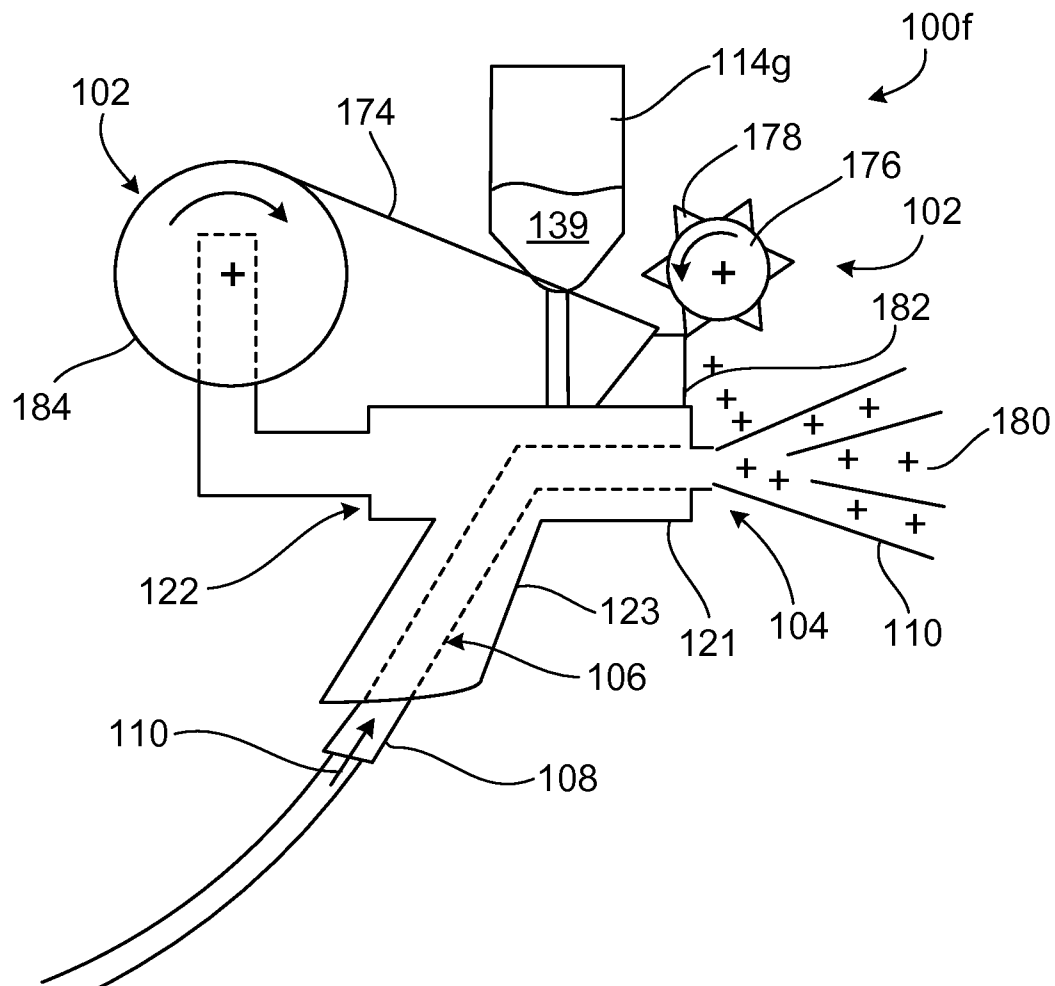
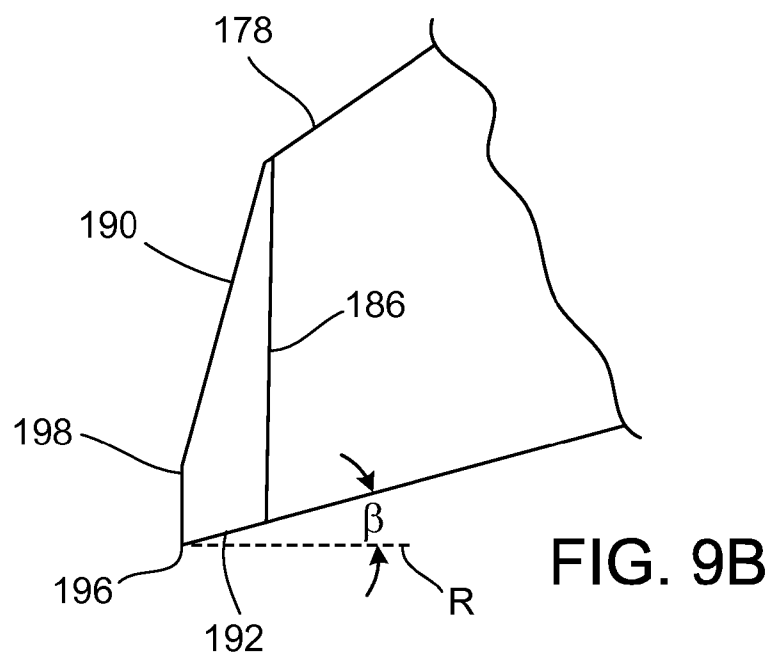
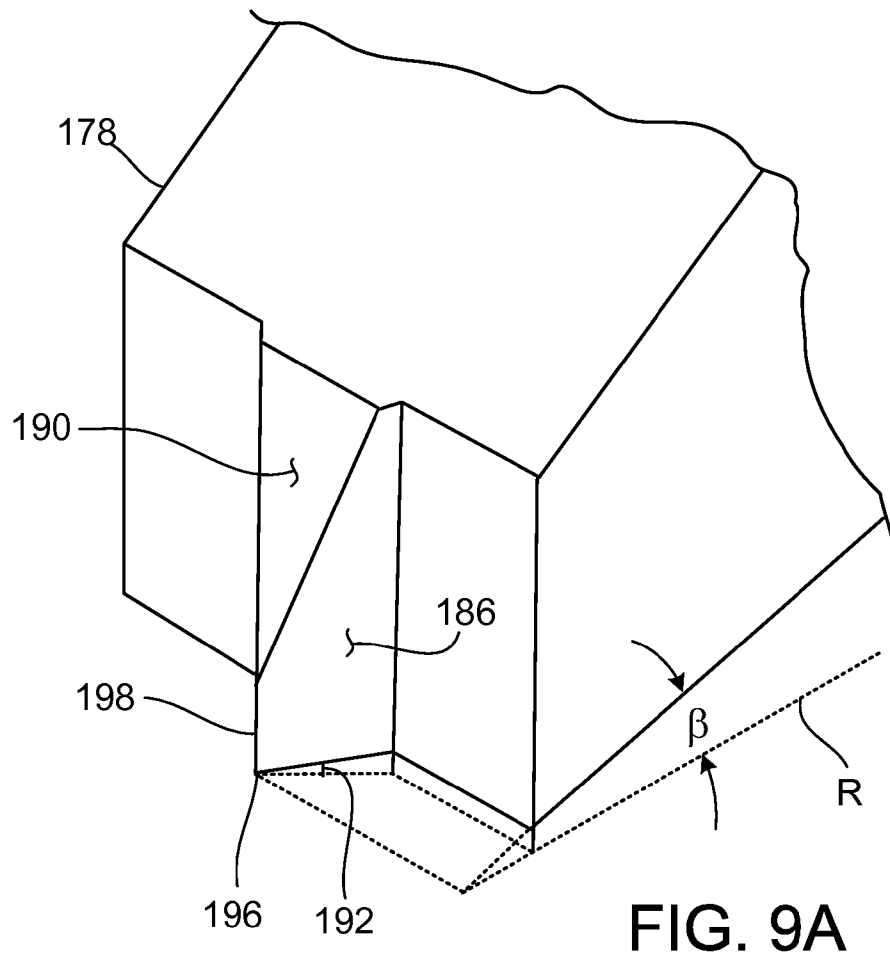


FIG. 8



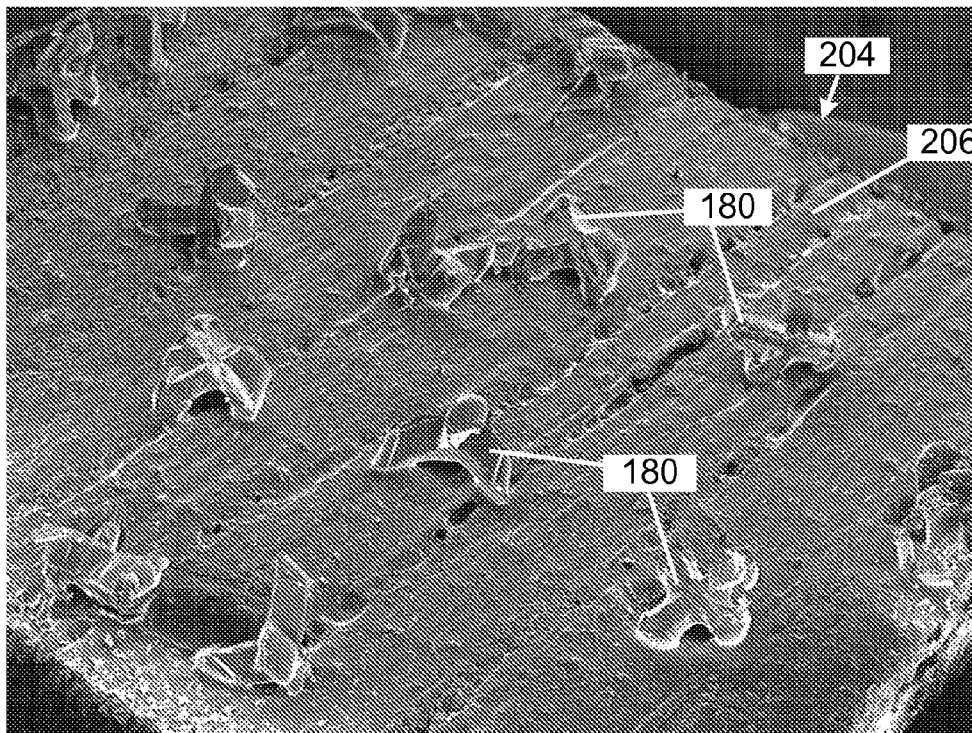


FIG. 10

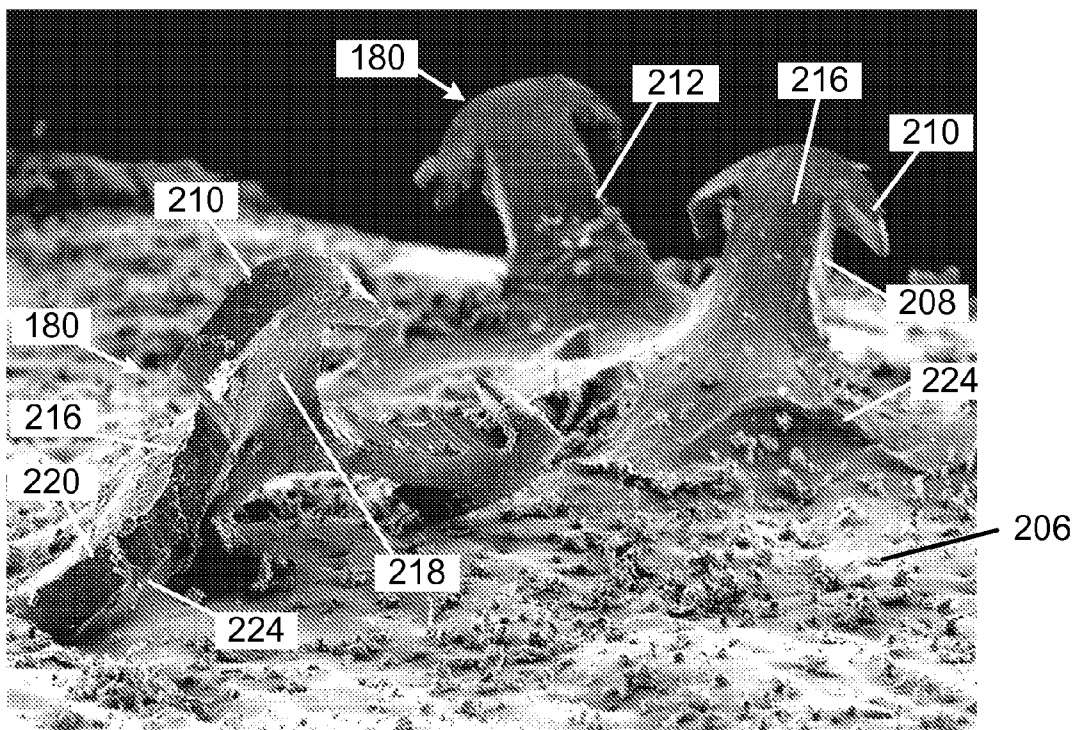


FIG. 11

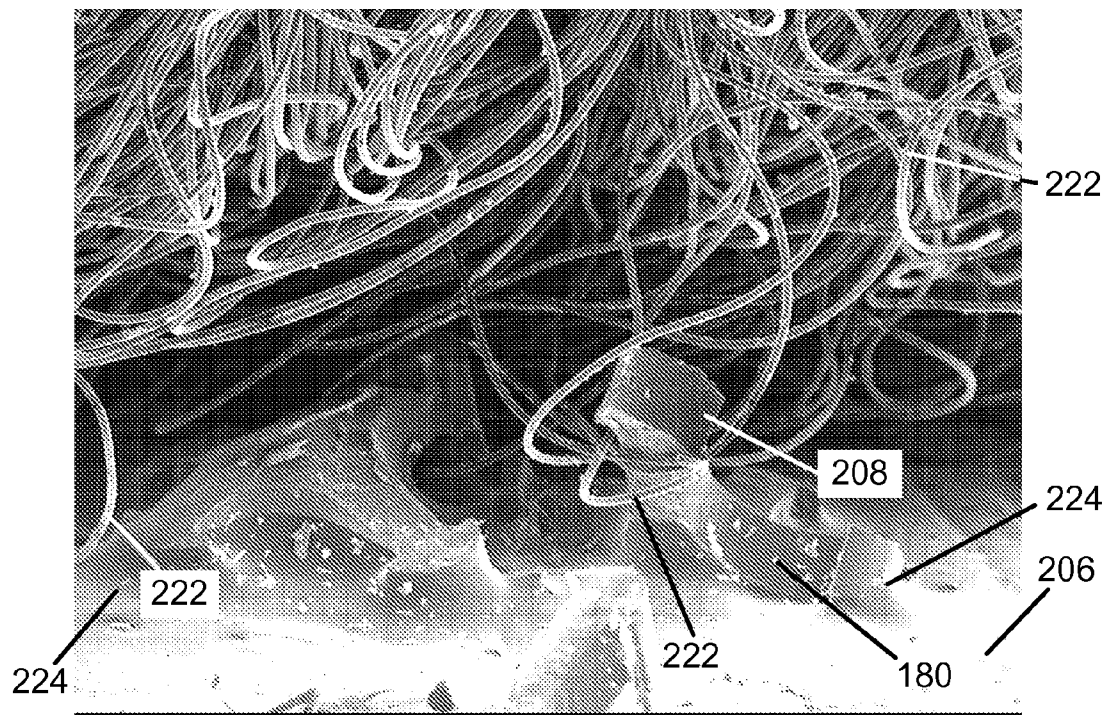


FIG. 12

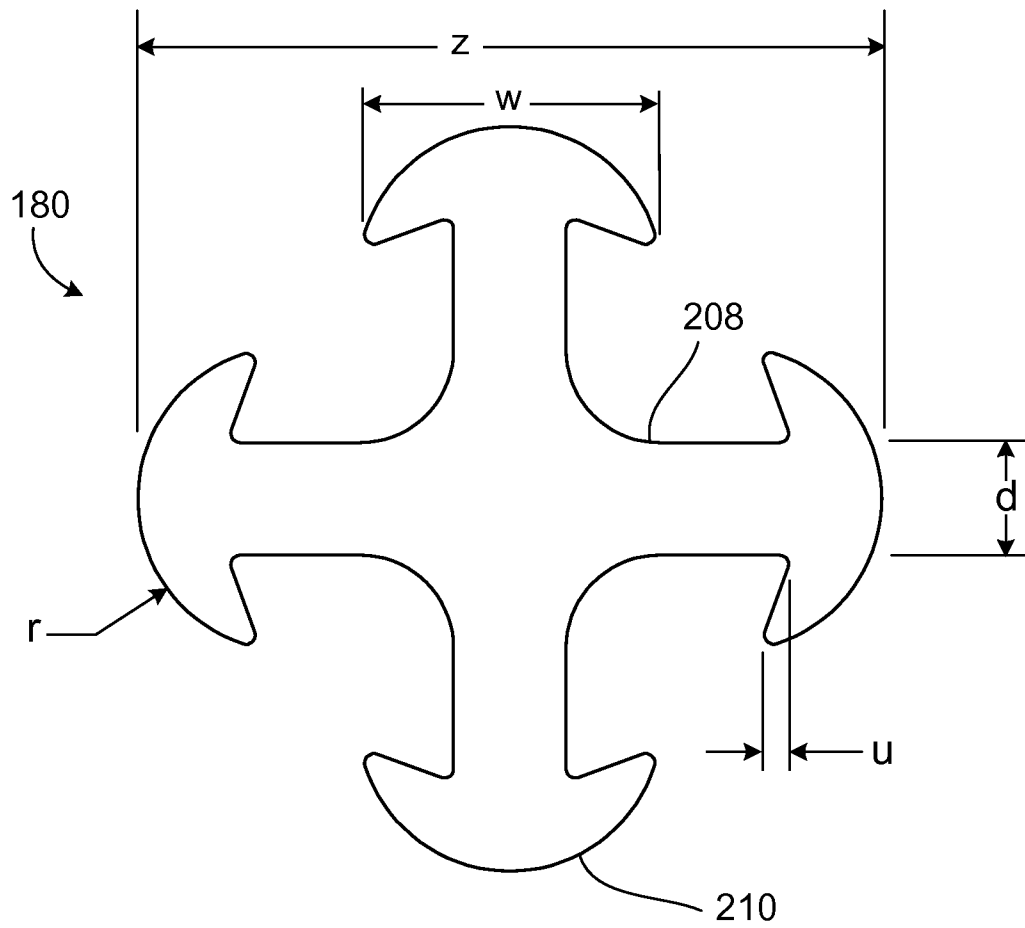


FIG. 13

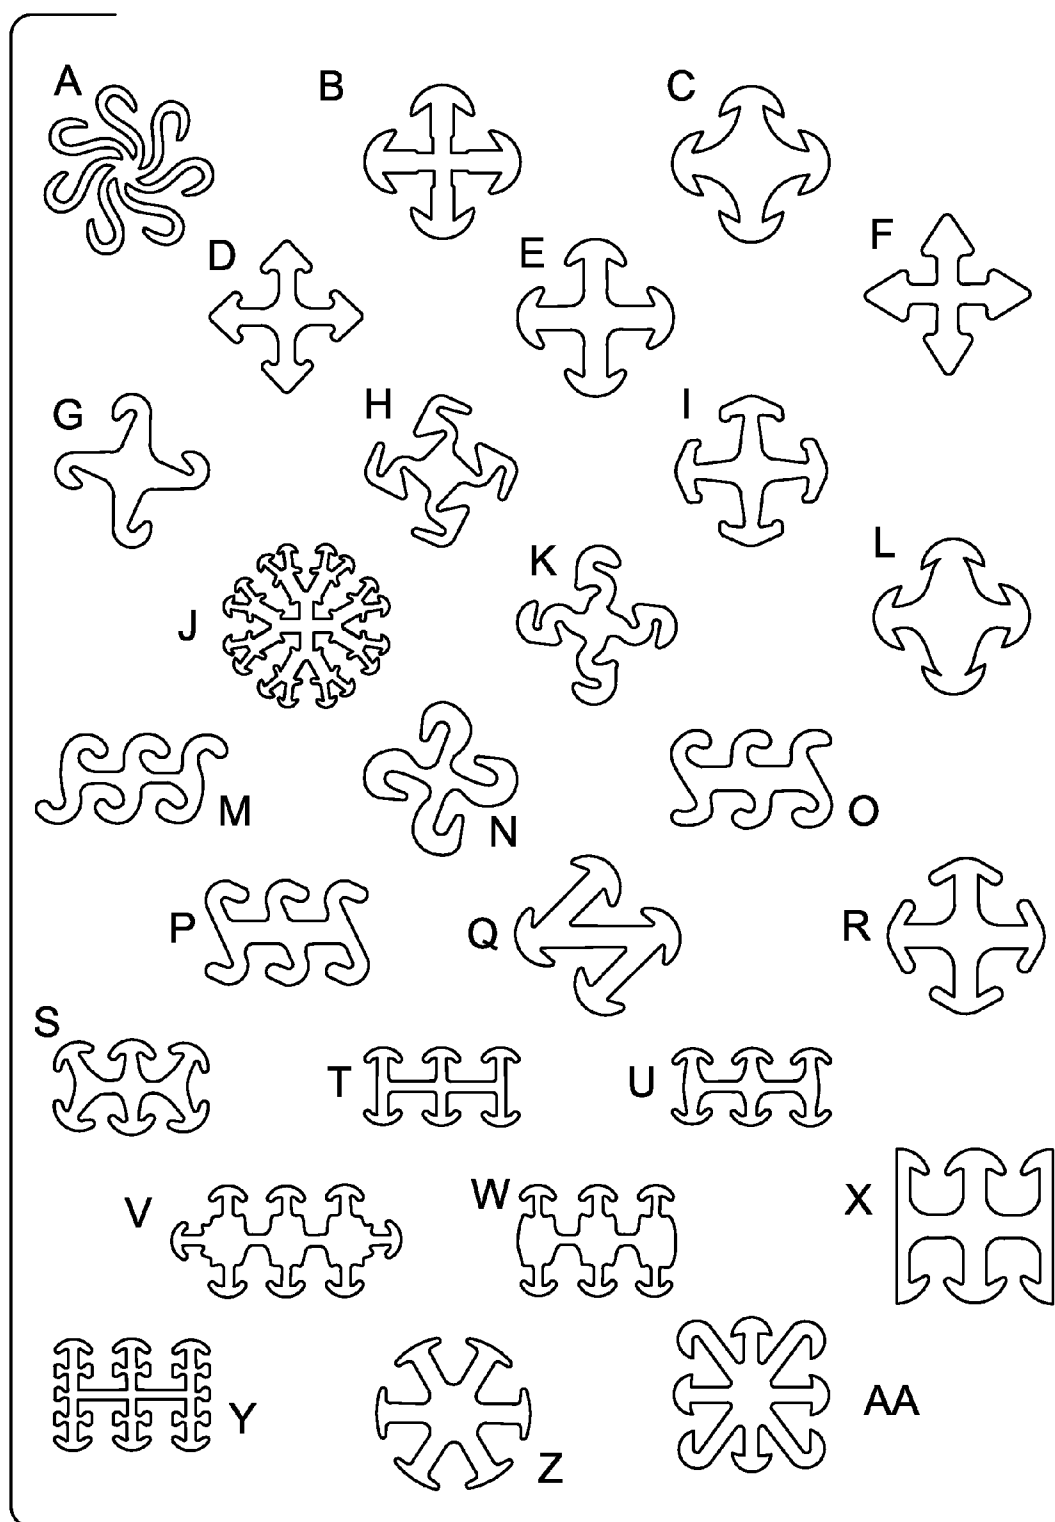


FIG. 14

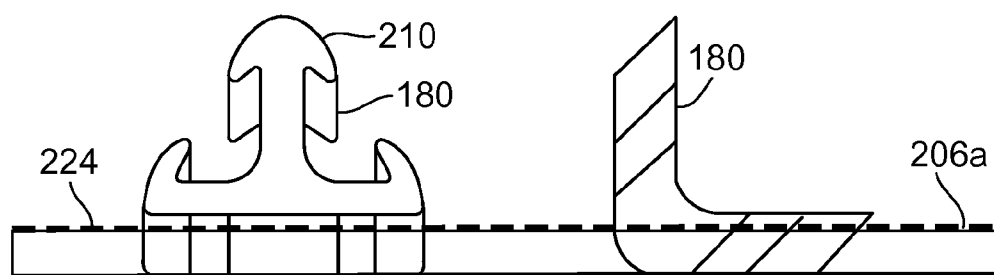


FIG. 15A

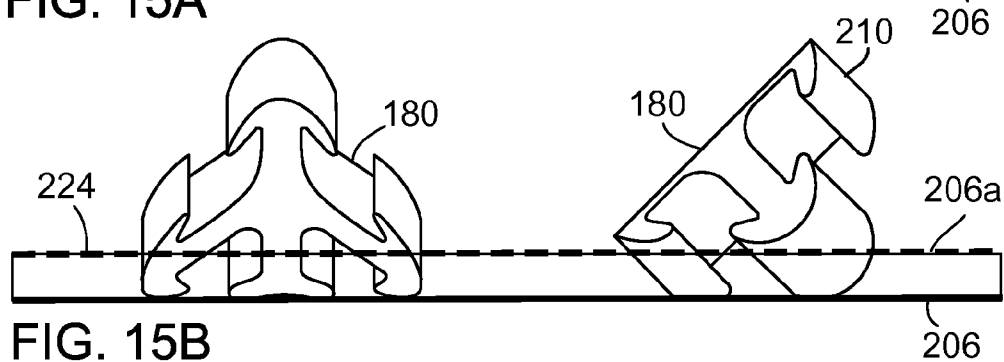


FIG. 15B

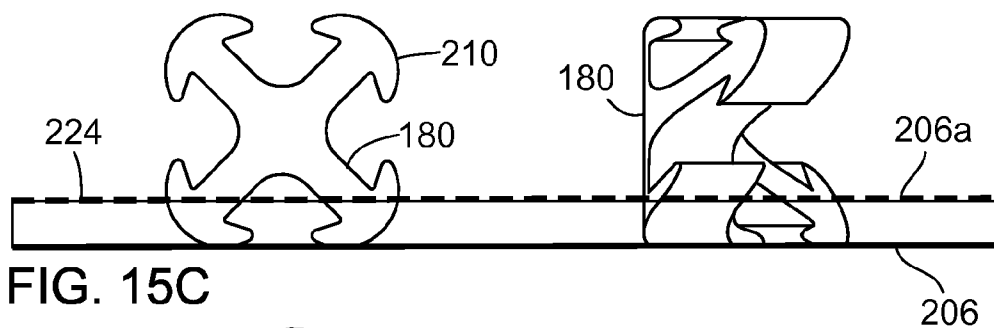


FIG. 15C

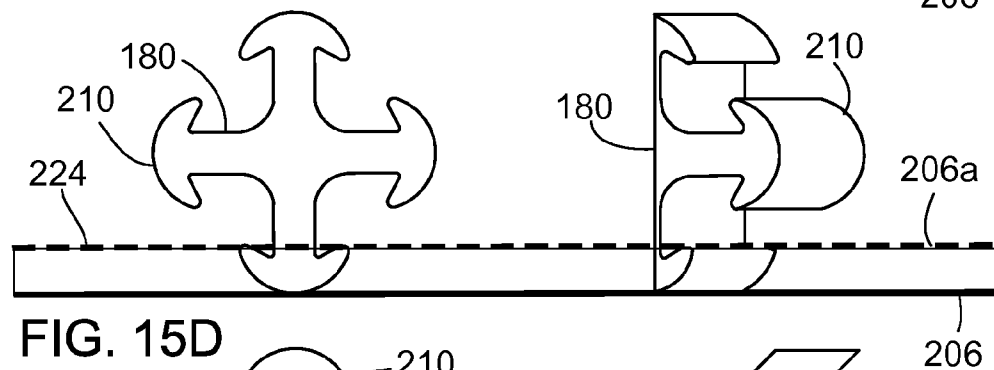


FIG. 15D

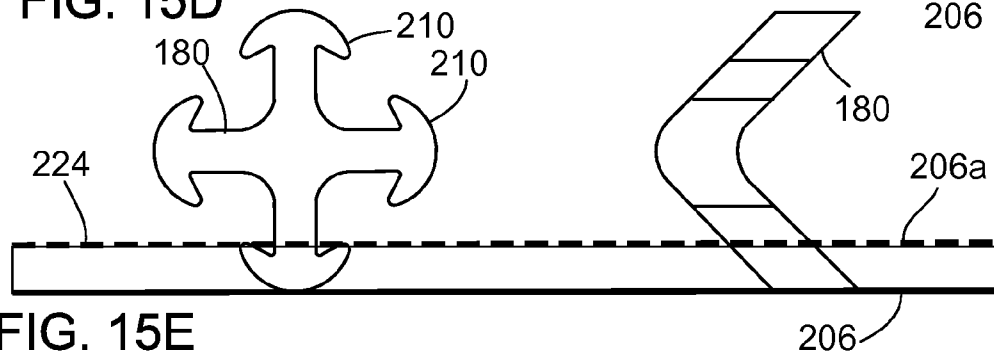


FIG. 15E

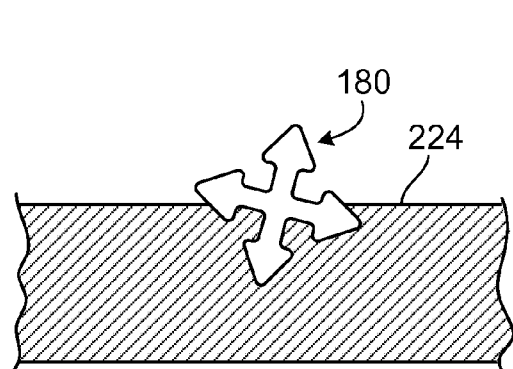


FIG. 16

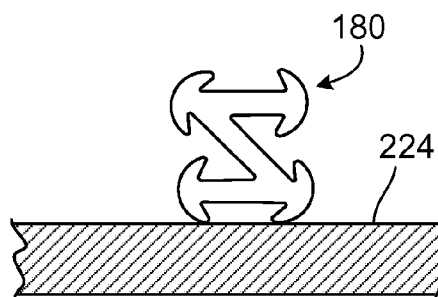


FIG. 17

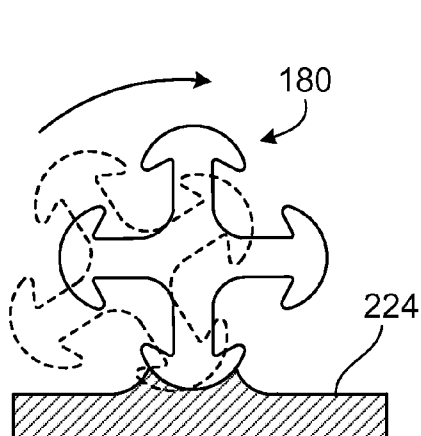


FIG. 18A

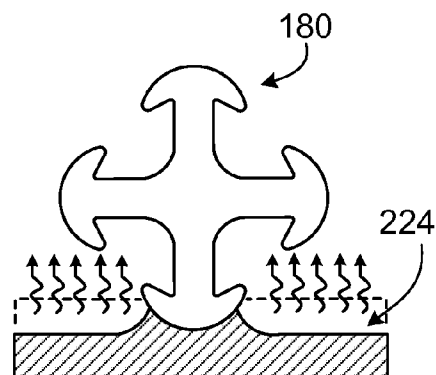


FIG. 18B

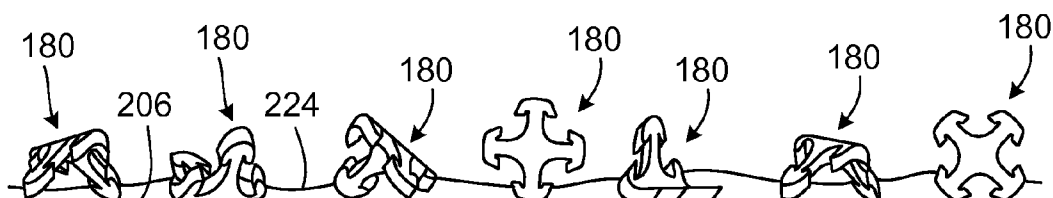


FIG. 19

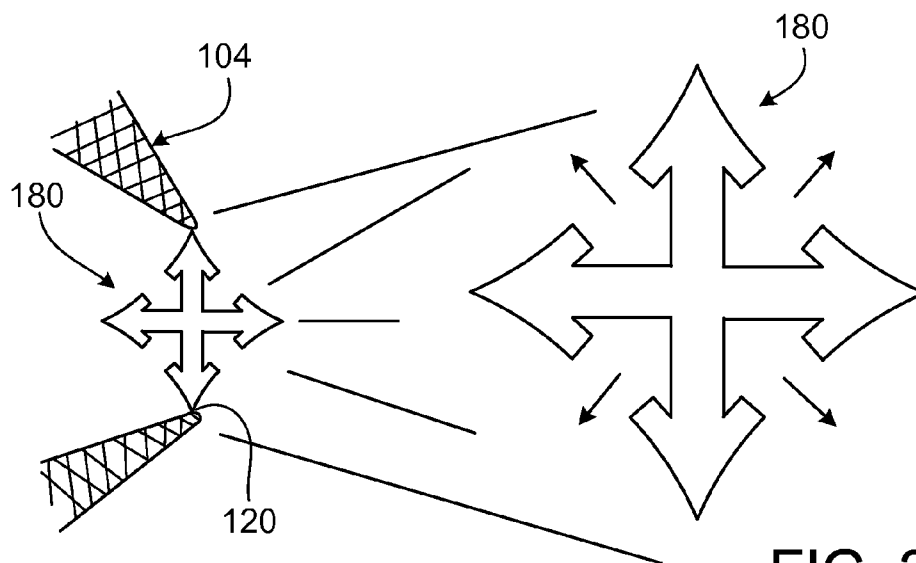


FIG. 20A

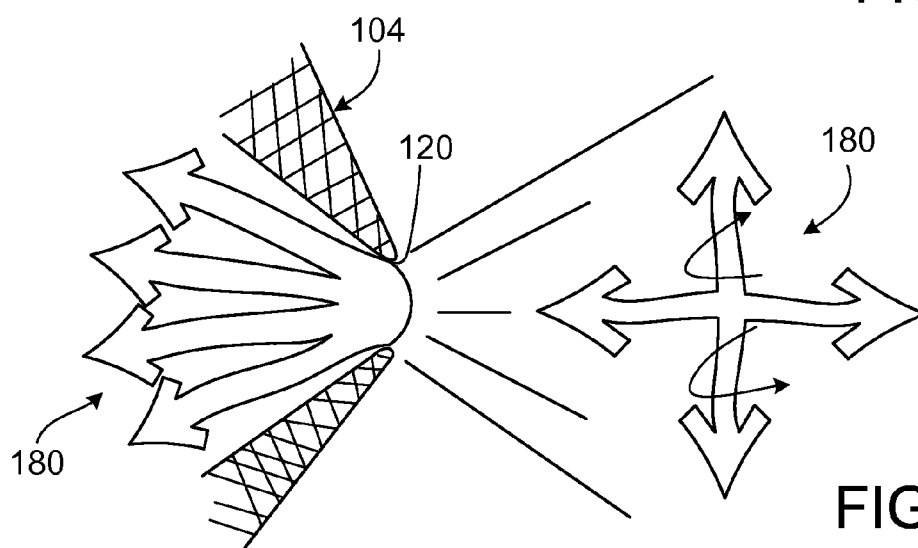


FIG. 20B

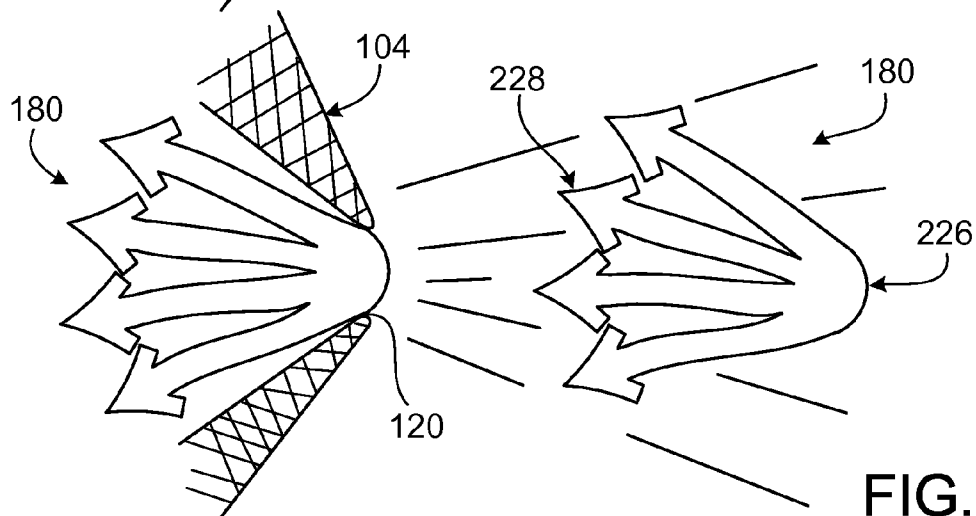


FIG. 20C

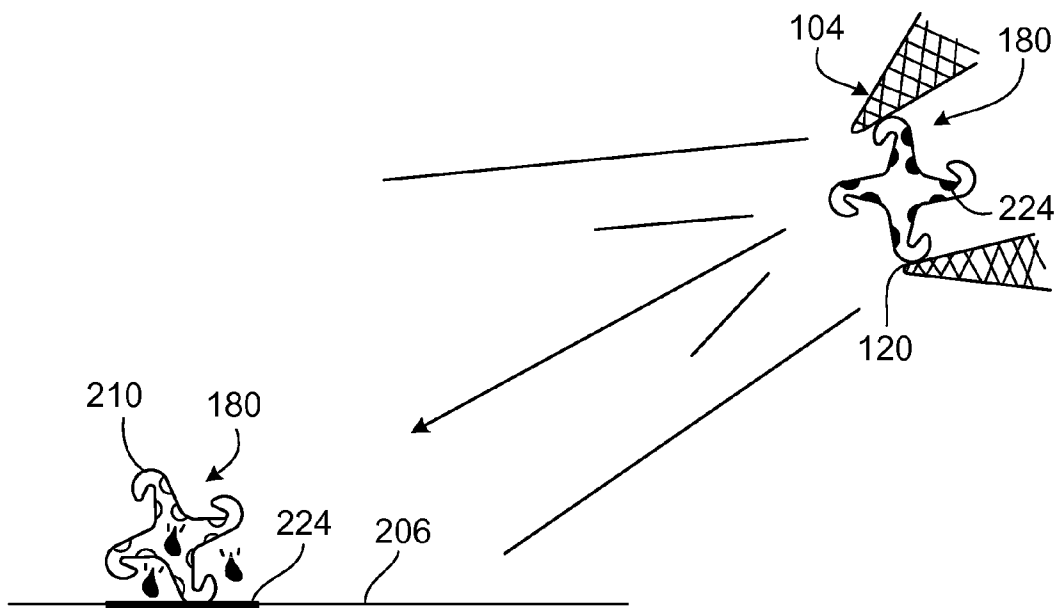


FIG. 21A

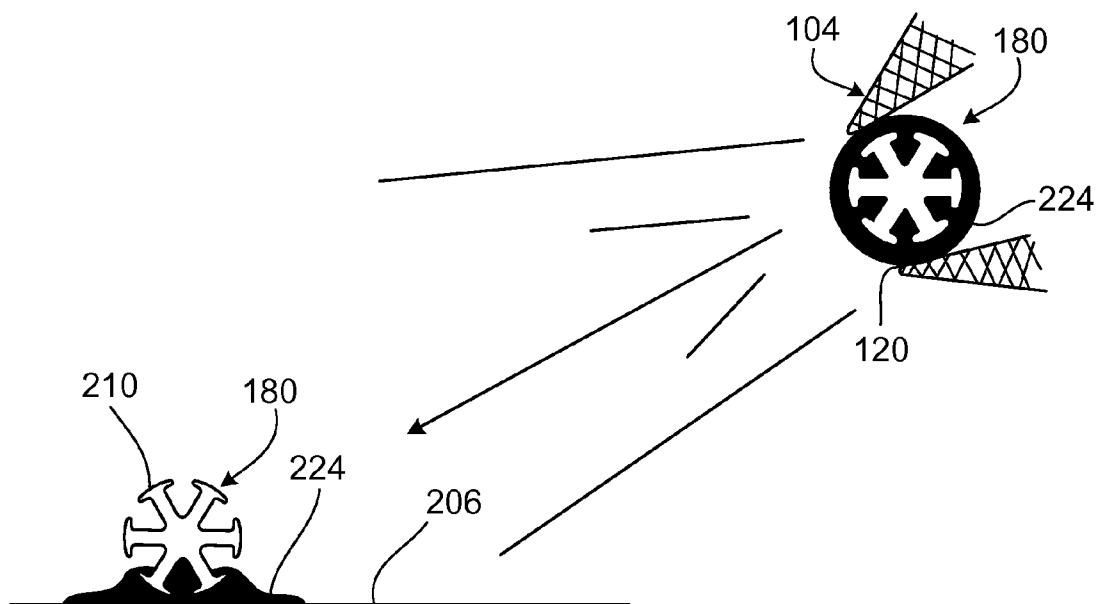


FIG. 21B

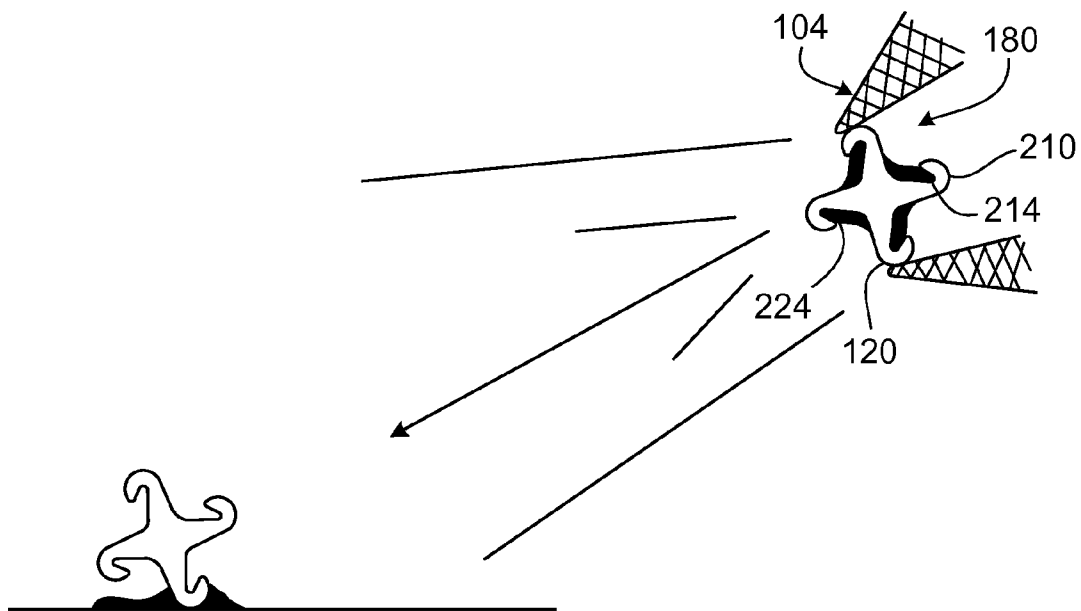


FIG. 21C

1

PARTICLE SPRAYING

TECHNICAL FIELD

This invention relates to particle spraying, and more particularly to spraying discrete fastening bits towards a support surface to which the sprayed bits adhere.

BACKGROUND

Mechanical touch fasteners are traditionally formed by weaving methods, or by molding discrete fastener elements on a substrate. Applying such touch fasteners to larger surfaces, such as a wall or floor, can involve positioning and adhering a section of touch fastener to the surface, often positioning several small sections of touch fastener to cover a large area. Non-planar surfaces in particular can be difficult to cover, even with large (e.g., stretched) webs of touch fastener material. Other means of providing surfaces with touch fastening properties are sought, particularly to releasably engage such surfaces with fibrous loop fasteners.

SUMMARY

One aspect of the invention features a particle sprayer including a particle source, a spray outlet coupled to the particle source, and a conduit extending from a pressurized fluid inlet to the spray outlet and configured to constrain a flow of carrier fluid to flow along the conduit toward the spray outlet to propel particles from the particle source away from the spray outlet, the particles including discrete fastening bits having one or more projections, with each projection having an overhanging head for snagging fibers.

In some cases, the particle source is releasably coupled to the spray outlet.

In some examples, the particle source is provided in the form of a reservoir in which a quantity of particles is contained. In some applications, the reservoir may be an enclosed and/or hermetically sealed container. Examples of a suitable container may include, but are not limited to, a can, a bottle, a jug, or a bag. In some embodiments, the container is of an appropriate size to be hand held by a user.

In some instances, the reservoir defines an opening for replenishing sprayed particles.

In some cases, the reservoir contains a carrier fluid. The reservoir may contain a selected ratio of particles or bits to carrier fluid. In some instances, the carrier fluid is motivated by a propellant. Examples of a suitable propellant may include, but are not limited to, an inert gas, compressed air, or a liquefied gas (e.g., compressed butane). In some embodiments, the carrier fluid is provided in the form of a foam, a liquefied gas, or a low viscosity liquid. In some applications, the carrier fluid includes an adhesive (such as a solvent based adhesive). In some cases, the particles are distributed substantially uniformly in the carrier fluid at rest. In some instances, the viscosity of the carrier fluid is sufficient to hold the particles in suspension when the carrier fluid is at rest. The carrier fluid may include one or more suspending agents (such as a thixotropic agent). In some cases, the density of the carrier fluid is approximately equal to the density of the particles, such that the particles have neutral buoyancy in the carrier fluid.

In some implementations, the particle sprayer is provided with a loose mixing element (such as a stainless steel ball) for dispersing the particles in the carrier fluid.

In some applications, the particle sprayer further includes a venturi constriction in hydraulic communication with the

2

reservoir for siphoning particles from the reservoir. Preferably, the venturi constriction causes a low pressure region (such as a vacuum region) to form proximate an opening in the reservoir when a fluid flows through the constriction.

In some examples, the particle sprayer further includes a pump for injecting a propellant into the reservoir. The pump may be provided in the form of a hand operated pump or a pump driven by an electric motor.

In some embodiments, the particle sprayer further includes a fluid source coupled to the pressurized fluid inlet. The fluid source may be externally located with respect to the other components of the particle sprayer.

In some applications, the fluid source is placed in fluid communication with the pressurized fluid inlet.

In some instances, the fluid source is provided in the form of a reservoir containing a quantity of fluid.

In some cases, the fluid source includes a pump (such as a hand operated pump or a pump driven by an electric motor) for injecting fluid into the conduit. The fluid may be a carrier fluid or a propellant.

In some embodiments, the particle sprayer further includes a longitudinally continuous ribbon and a cutter for cutting through the ribbon at discrete intervals to form the discrete fastening bits. The ribbon may define a longitudinal axis and the cutter may be configured to cut completely through the ribbon along the longitudinal axis of the ribbon. In some cases, the cutter is mounted to an outer edge of a wheel. The cutter preferably includes a solid cutting edge. The cutting edge may form an acute cutting angle. In some examples, the ribbon includes a polymeric resin containing a thermoplastic.

In some implementations, the particle sprayer further includes a support surface coupled to the cutter for supporting a portion of the ribbon during use. The support surface may be provided in the form of a bed knife.

In some embodiments, the particle sprayer further includes a conveyor coupled to the cutter for feeding the ribbon towards the cutter. The conveyor may include a single feed roll or a pair of counter rotating feed rolls.

In some examples, the particle sprayer further includes a valve in hydraulic communication with the particle source for dispensing particles. The valve may be provided in the form of an aerosol valve or a metering gate. In some cases, the valve includes a plunger. In some applications, the valve includes an opening of sufficient size to dispense particles (such as discrete fastening bits).

In some implementations, the particle sprayer further includes a suitable actuator coupled to the valve for adjusting the valve between opened and closed positions. Examples of a suitable actuator include, but are not limited to, a spring biased trigger, a rotatable knob, or a spring biased plunger.

In some cases, the spray outlet includes an opening of sufficient size to eject discrete fastening bits. Preferably, the opening or orifice includes an open area of at least about 1.1 square millimeters.

In some embodiments, the spray outlet includes a nozzle. The nozzle may be placed in hydraulic communication with a fluid source. In some cases, the nozzle includes an opening of sufficient size to eject or propel particles (such as discrete fastening bits). In some examples, the nozzle defines a first orifice and a second orifice, the first orifice being configured to eject bits and the second orifice being configured to eject fluid. Preferably, the first orifice includes an open area of at least about 1.1 square millimeters and the second nozzle includes an open area of at least about 0.1 square millimeter.

In some cases, a multiplicity of the bits are highly hydrophilic.

In some applications, a multiplicity of the bits are statically charged.

In some embodiments, a multiplicity of the bits include one or more compressible portions.

In some examples, a multiplicity of the bits include one or more pliable portions.

In some implementations, a multiplicity of the bits include one or more porous portions.

In some instances, a multiplicity of the bits include one or more elastically deformable portions.

In some embodiments, a multiplicity of the bits are aerodynamically included to land on a support surface in a selected orientation when sprayed. The selected orientation is characterized by the bit having at least one projection head extending away from the support surface.

In some examples, each bit includes a quantity of adhesive, the bits being configured to release the adhesive upon impact with a support surface.

In some cases, each bit includes opposite side surfaces defining the projections. One, or both, of the opposite side surfaces of each bit may be non-planar.

In various touch fastening applications, each projection head defines a crook for releasably snagging fibers.

In some instances, each bit has an overall thickness, measured between side surfaces, that is less than the maximum overall linear dimension of the bit.

In some embodiments, all linear dimensions of each bit are less than about 1.2 millimeters.

In many cases, a multiplicity of the bits are of an average bit size less than about three millimeters across.

In some examples, all or substantially all of the particles are discrete fastening bits.

Yet another aspect of the invention features a particle sprayer including a reservoir containing a multiplicity of particles, a valve in hydraulic communication with the reservoir for dispensing particles from the reservoir, and a nozzle coupled to the reservoir for spraying particles dispensed by the valve, the particles including discrete fastening bits, each bit having one or more projections, with each projection having an overhanging head for snagging fibers.

Yet another aspect of the invention features a particle sprayer including a source of particles, means for displacing the particles from the source, and means for propelling the particles away from the source towards a support surface in a spray, the particles including discrete fastening bits, each bit having one or more projections, with each projection having an overhanging head for snagging fibers.

Yet another aspect of the invention features a method of spraying particles. The method includes providing a particle sprayer, the particle sprayer including a particle source, a spray outlet coupled to the particle source, a conduit extending from a pressurized fluid inlet to the spray outlet and configured to constrain a flow of carrier fluid to flow along the conduit toward the spray outlet to propel particles from the particle source away from the spray outlet, and an actuator coupled to the conduit and configured to initiate spraying of the particles, the particles including discrete fastening bits having one or more projections, with each projection having an overhanging head for snagging fibers. The method further includes operating the actuator to initiate particle spraying.

Various embodiments can provide a very flexible means of adding fastening bits to a pre-formed surface, either to produce a touch fastening material that is later applied to another surface, or to impart touch fastening properties directly to an otherwise functional surface, such as a surface of a building, or to a curved surface. Some examples of the methods described herein will be considered appropriate for imple-

mentation by contractors or other skilled users, while others may be performed by untrained operators, such as with sprayers purchased at retail stores. In some cases the supply of bits may be replenished, such as by replacement reservoirs or from bulk bags. In some other cases, the sprayer will be designed for disposal when the quantity of bits is exhausted. In some examples, the sprayer may be a part of a fastener manufacturing line; in some other cases it may be portable for carrying to a worksite.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic representation of a particle sprayer.

FIGS. 2A and 2B are cross-sectional views of a first particle sprayer.

FIGS. 3A and 3B are cross-sectional views of a second particle sprayer.

FIG. 4A is a side view of a third particle sprayer.

FIG. 4B is a side view of a reservoir that is suitable for use in the particle sprayer shown in FIG. 4A.

FIG. 5 is a side view of a fourth particle sprayer.

FIGS. 6A and 6B are cross-sectional views of a fifth particle sprayer.

FIG. 7 is a cross-sectional view of a sixth particle sprayer.

FIG. 8 is a schematic representation of a seventh particle sprayer.

FIGS. 9A and 9B are a perspective and side views of a distal end of a cutter.

FIG. 10 is an enlarged photograph showing a perspective view of a surface of a touch fastener product to which a number of fastening bits are adhered.

FIG. 11 is an even more enlarged view of a portion of the surface shown in FIG. 10.

FIG. 12 is an enlarged photograph showing a few fastening bits of the surface of FIG. 10 engaging loop fibers of a mating fastener material.

FIG. 13 is a front view of a fastening bit.

FIG. 14 shows 27 different ribbon cross-sectional shapes, from which bits may be cut, the shapes labeled A through AA.

FIGS. 15A-15E show, in side view, five different stable bit orientations upon a surface.

FIG. 16 shows a bit partially submerged in an adhesive coating.

FIG. 17 shows a bit floating on an adhesive coating.

FIG. 18A illustrates a bit being righted by adhesive surface tension forces.

FIG. 18B shows an adhesive coating being thinned through evaporation.

FIG. 19 shows a plurality of bits applied to a support surface.

FIGS. 20A through 20C illustrate three different modes of discharging bits from an orifice smaller than the bit.

FIGS. 21A through 21C illustrate three different modes of discharging a bit with discrete quantities of adhesive from an orifice of a particle sprayer onto a support surface.

Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

FIG. 1 shows a schematic view of a particle sprayer 100 that may be used to form a touch fastener product (e.g., touch

5

fastener product **204**, see FIG. **10**), or to otherwise spray fastening particles onto a support surface or substrate. As shown, particle sprayer **100** includes a particle source **102** coupled to a spray outlet **104**, and a conduit **106** extending from a pressurized fluid inlet **108** to the spray outlet. Conduit **106** is configured to constrain a flow of carrier fluid **110** to flow along the conduit toward spray outlet **104** to propel particles **112** provided by particle source **102** away from the spray outlet. As used herein, the term "carrier fluid" refers to any fluid (e.g., a gas, liquid, or a combination of both) carrying and/or motivating particles **112** as the particles are sprayed. The particles **112** include discrete fastening bits (e.g., bits **180**, see FIG. **10**). In some examples, all or substantially all of particles **112** are discrete fastening bits.

FIGS. **2A** and **2B** show a first example of a particle sprayer **100** in use. In this example, particle sprayer **100** is provided with a particle source **102** in the form of a reservoir **114** containing a quantity of particles **112**, which may either be dry, loosely packed particles or particles mixed in a liquid or semiliquid binder (e.g., a hardenable liquid such as adhesive **224**, see FIG. **10**). If mixed in a liquid binder that is to form a coating on a surface onto which the particles and binder are sprayed, the mixture should contain a selected ratio of particles **112** to binder in order to achieve a desired surface coating. Reservoir **114** is placed in hydraulic communication with a spray outlet **104** by operation of a valve, as discussed below. Spray outlet **104** features a cap **116** housing a frustoconical nozzle **118** having an orifice **120** for discharging particles **112** and carrier fluid **110**. Orifice **120** should be of a size suitable to discharge particles **112** at sufficient velocity to propel the particles away from the sprayer. In this example, orifice **120** is circular. For some particle shapes and sizes discussed below, orifice **120** has an open area of at least about 1.1 square millimeters. Reservoir **114** and nozzle **118** are each releasably coupled to a sprayer body **122**. In this example, the sprayer body **122** includes a barrel **121** and a handle **123**.

Reservoir **114** is funnel-shaped, with its smaller opening **124** in hydraulic communication with a hollow portion **125** of sprayer body **122**. Reservoir **114** may be formed of any material suitable to hold particles **112** and any associated fluid (e.g., a liquid binder). Reservoir **114** is positioned above sprayer body **122** such that the particles are urged by gravity toward opening **124**. If containing dry particles, the reservoir shape should be selected in accordance with dry packing properties of the particles, to keep the particles from packing in the reservoir and starving the sprayer. Dry flow additives may be included.

Particle sprayer **100** also includes a rigid conduit tube **126** that forms the downstream end of a conduit **106** which is coupled to an external pressurized fluid source (not shown). Conduit tube **126** extends through hollow portions **125** of sprayer body **122** from a pressurized fluid inlet of the sprayer body (in this example, a standard pneumatic quick-connect fitting, not shown, for attaching the sprayer to an air compressor or compressed air tank). Conduit tube **126** has a rigid tubular body terminating in a frustoconical outlet **128** that seats against an inner surface of nozzle **118**. Any communication between reservoir **114** and nozzle orifice **120** is blocked when conduit outlet **128** is pressed against the inner surface of nozzle **118**. During use, conduit tube **126** delivers a flow of carrier fluid **110** from the pressurized fluid source to outlet **128**.

As shown, outlet **128** and nozzle **118** cooperate to form a needle valve **113** in hydraulic communication with reservoir **114** for dispensing particles **112** into a stream of carrier fluid **110** such as air. A biasing member (in this example, a helical compression spring, not shown, disposed between a portion

6

of sprayer body **122** and conduit tube **126**) is used to urge outlet **128** towards nozzle **118**. An actuator **130** (in this example, a trigger) for adjusting the needle valve between opened and closed positions is pivotally coupled to sprayer body **122** by a pin **132** and to tube **126** by another pin **134**. As used herein, the term "opened position" refers to any valve position resulting in flow through the valve. Likewise, as used herein, the term "closed position" refers to the valve position in which flow through the valve is mostly blocked.

FIG. **2A** shows particle sprayer **100** with the needle valve in a closed position. FIG. **2B** shows particle sprayer **100** with the needle valve in an opened position. As shown, when actuator **130** is pulled towards sprayer handle **123**, the backwards pivoting motion of the actuator causes conduit outlet **128** to be refracted from nozzle **118**, thereby opening the valve by providing an annular opening **136** through which particles **112** are dispensed. Once particles **112** are dispensed by the needle valve, they are carried through nozzle orifice **120** and towards a support surface (not shown) by carrier fluid **110** discharged from conduit outlet **128**.

While in the illustrated example the carrier fluid continues to flow even with the trigger released, in a similar example actuator **130** also operates a pneumatic valve that opens in concert with needle valve **113**, such that when the trigger is released no carrier fluid is flowing along conduit **106**.

FIGS. **3A** and **3B** show another particle sprayer **100** similar to the particle sprayer shown in FIGS. **2A** and **2B**. In this example, particle sprayer **100a** has a particle source **102** in the form of a first reservoir **114'** containing a quantity of dry particles **112**. The particle sprayer also includes a fluid source **137** in the form of a second reservoir **114''** containing a liquid binder **139**. First reservoir **114'** and second reservoir **114''** are placed in hydraulic communication with a spray outlet **104** by operation of a metering gate and a valve, respectively, as discussed below. Spray outlet **104** features a cap **116** housing a frustoconical nozzle **118** defining an orifice **120** for discharging liquid binder **139** into the flow of carrier fluid **110**. In this example, first reservoir **114'**, second reservoir **114''**, and nozzle **118** are each releasably coupled to a sprayer body **122**. As in the previous example, the sprayer body includes a barrel **121** and a handle **123**.

As shown, first reservoir **114'** is a cylindrical capsule having an opening **124'** at the bottom end of a size suitable for releasing particles **112**. Second reservoir **114''** is funnel-shaped, with its smaller opening **124''** in hydraulic communication with a hollow portion **125** of sprayer body **122**. As in the previous example, particle sprayer **100** also includes a conduit **106** having a rigid conduit tube **126**. A distal end **128** of conduit tube **126** is pressed against an inner surface of the nozzle to form a needle valve for dispensing liquid binder **139** from second reservoir **114''**. An actuator **130** coupled to sprayer body **122** and tube **126** is used for adjusting the needle valve and a metering gate (discussed below) between opened and closed positions. Metering gate **138** is aligned with opening **124'** for dispensing particles **112** from second reservoir **114'**. A trailing end of metering gate **138** is fixedly coupled to actuator **130** and a leading end of the metering gate traverses reservoir opening **124'**.

FIG. **3A** shows particle sprayer **100a** with both the needle valve and metering gate **138** in closed positions. FIG. **3B** shows the particle sprayer with both the needle valve and metering gate **138** in opened positions. As shown, when actuator **130** is pulled towards sprayer handle **123**, the backward pivoting motion of the actuator causes conduit tube **126** to be retracted from nozzle **118**, thereby providing an annular opening **136** through which liquid binder **139** is dispensed. The pivoting motion of actuator **130** also causes metering

7

gate **138** to be drawn back across opening **124'**, thereby providing an orifice **140** through which particles **112** are dispensed by gravity. In this example, orifice **140** is provided with an open area of sufficient size to dispense discrete fastening bits. Once dispensed, liquid binder **139** is propelled through nozzle orifice **120** by carrier fluid **110** discharged from the conduit tube. As shown, particles **112** are released into a spray of liquid binder **139** and carrier fluid **110** and propelled away from the sprayer. In some examples, bits or particles **112** are configured (e.g., provided having the correct geometry and/or size) such that they are only partially wetted by the liquid binder in the spray. For instance, only one portion of each of the bits may be wetted by the liquid binder, leaving the other portions of the bits dry as fixed to a support surface of a touch fastener product.

In yet another example, the conduit tube **126** of the above example is replaced with a solid rod and reservoir **114"** contains a pressurized carrier fluid, such that retracting actuator **130** retracts the solid rod to release a spray of carrier fluid that entrains the dispensed bits falling from opening **124'**.

FIG. 4A shows yet another particle sprayer **100b** in use. In this example, particle sprayer **100b** is provided having a particle source **102** in the form of a reservoir **114a** containing a quantity of particles **112** dispersed in a carrier fluid **110** (in this example, the carrier fluid includes a liquid binder or adhesive). Reservoir **114a** is placed in hydraulic communication with a spray outlet **104** by a flexible conduit **126** in the form of a hose that forms the main body of a conduit **106**. Conduit **106** also includes a pressurized fluid inlet **108** coupled to reservoir **114a**. As shown, conduit **126** extends from pressurized fluid inlet **108** to spray outlet **104**, where a downstream portion of the conduit tube is coupled to an operable valve **141** disposed in a sprayer body **122**. Spray outlet **104** is provided in the form of a nozzle **118** having an orifice **120** configured to spray particles **112** carried by carrier fluid **110**, and a rigid conduit **142** extending from sprayer body **122** to the nozzle. As in previous examples, sprayer body **122** includes a barrel **121**, a handle **123**, and an actuator **130**.

As shown, reservoir **114a** is a jug or other container including a handle **143** to facilitate transport of the reservoir by a user, an inlet **144** coupled to an external pressurized fluid source **150** (e.g., a propellant source) by way of a conduit **145**, and an outlet at conduit inlet **108** for releasing a mixture of particles **112** and carrier fluid **110** to conduit **126**. Propellant source **150** should be a suitable mechanical or pneumatic device for providing a pressurized flow of propellant **151** to reservoir **114a**. In this example, propellant source **150** is a positive displacement, motor driven air pump. As used herein, the term "propellant" refers to any fluid motivating another fluid (e.g., a fluid imparting a motive force on another fluid). For instance, in this example, propellant **151** is pressurized air (e.g., provided by a pressurized fluid source). A fluid may be considered "pressurized" when a pressure greater than atmospheric pressure is exerted on the fluid. Once provided to reservoir **114a**, propellant **151** bears down on carrier fluid **110** in which particles **112** are dispersed, thereby pushing the carrier fluid from the reservoir and through conduit **126**. Particles **112** are carried from reservoir **114a** by the flowing carrier fluid. The pressure exerted on carrier fluid **110** by propellant **151** should be sufficient to drive the carrier fluid from reservoir **114a** and through nozzle orifice **120** at sufficient velocity to propel the carrier fluid and particles **112** away from the sprayer. Carrier fluid **110** and particles **112** are provided in a constrained flow by the conduit **126** to valve **141** which is coupled to actuator **130**. Valve **141** is configured to dispense the mixture of carrier fluid **110** and particles **112** to

8

spray outlet **104** in response to manual manipulation of actuator **130**. For instance, in this example, pulling actuator **130** adjusts valve **141** to an opened position, thereby allowing the mixture of carrier fluid and particles to pass through the valve.

Valve **141** is in hydraulic communication with spray outlet **104**, such that when the valve is adjusted to an opened position, the mixture of carrier fluid **110** and particles **110** passes through rigid conduit **142** and is discharged through nozzle orifice **120** away from the sprayer.

FIG. 4B shows an alternate reservoir **114b** suitable for use in the particle sprayer **100b** shown in FIG. 4A. In this example, reservoir **114b** is provided in the form of a jug or other closed container having an integral pump assembly **152**. Pump assembly **152** includes a pump casing (not shown) and a piston **154** mounted to the pump casing. The pump casing is configured to support reciprocating linear movement of piston **154**. Piston **154** features a piston rod **156** and a handle **158**. Handle **158** may be gripped by a user to displace piston rod **156** linearly inward and outward of the pump casing to inject a propellant (in this case ambient air) into reservoir **114b**. In this manner a sufficient amount of propellant to drive the mixture of carrier fluid and particles from the reservoir to the spray outlet can be provided by repeated manual operation of pump assembly **152**.

FIG. 5 shows a particle sprayer **100c** having a particle source **102** in the form of a reservoir **114c** containing a quantity of loosely packed, dry particles **112**. Reservoir **114c** is coupled to a sprayer body **122**, the sprayer body including a handle **123**, a barrel **121**, and an actuator **130**. In this example, the reservoir **114c** is a flexible sack or a bag having an opening **124** and a coupling member **157** (e.g., in this example, a standard male or female quick coupling member cooperating with a counterpart member of sprayer body **122**) securing the reservoir to the sprayer body. Particle sprayer **122** also includes a spray outlet **104** having an orifice **120** for discharging particles **112** in a flow of air as a carrier fluid **110**. Spray outlet **104** is placed in fluid communication with reservoir **114** by a hose **126** which forms the main body of a conduit **106**. The conduit **106** also includes a pressurized fluid inlet **108** which is coupled to the barrel of sprayer body **122**.

As shown, particle sprayer **100c** also includes a blower assembly **160** (depicted schematically) disposed within a hollow portion **125** of sprayer body **122**. Blower assembly **160** should be configured to provide a flow of carrier fluid **110** for motivating particles **112** from reservoir **114c** to spray outlet **104**. In this example, blower assembly **160** features a motor driven, rotatable impeller mounted to sprayer body **122**. The impeller includes a multiplicity of vanes configured to create a pressure differential on opposite sides of the impeller when the impeller is revolved rapidly by the motor. The pressure differential generates a flow of carrier fluid **110** (in this example, air) passing through sprayer barrel **121**. Barrel **121** includes a venturi constriction **162** for syphoning particles **112** from reservoir **114c**. Venturi constriction **162** is in hydraulic communication with the reservoir opening **124** and creates a low pressure region **164** (e.g., a vacuum region) formed proximate reservoir opening **124**. The differential between low pressure region **164** and the ambient pressure of reservoir **114c** is sufficient to siphon particles **112** from the reservoir and up into the flow of carrier fluid. The flowing carrier fluid **110** then carries the particles through conduit **126** and through orifice **120**. The bag of reservoir **114c** may be sufficiently porous to admit ambient air into the bag, or may be sealed but sufficiently flexible to collapse during use.

FIGS. 6A and 6B show a particle sprayer **100d** in the form of an aerosol can. The can itself forms a reservoir **114d** containing a quantity of particles **112**, a carrier fluid **110** in

which the particles are dispersed, and a pressurized propellant **151** (in this example, an inert gas) bearing down on the carrier fluid. Particles **112** should be dispersed evenly in carrier fluid **110** prior to spraying. In some examples, particles **112** are suspended in carrier fluid **110** when the carrier fluid is at rest. For instance, the viscosity of carrier fluid **110** is sufficient to hold particles **112** in suspension when the carrier fluid is at rest. In this example, the carrier fluid **110** may include one or more suspending agents for attaining a sufficient viscosity to suspend particles **112** in the carrier fluid. In particular, carrier fluid **110** may be formed of a liquid binder to which a thixotropic agent is added (e.g., about 0.3% and 5% by volume of fused silica). In some examples, the density of particles **112** and the density of carrier fluid **110** are matched so that the particles have neutral buoyancy in the carrier fluid, thereby allowing the particles to remain dispersed when the carrier fluid is at rest. In some examples, particles **112** are suspended in carrier fluid **110** by surface energy. For instance, particles **112** may be highly hydrophilic, causing them to disperse in carrier fluid **110** due to their interactions with the ions in the carrier fluid solution. In some examples, particles **112** are electrostatically suspended in carrier fluid **110**. For instance, particles **112** may be statically charged such that they are motivated apart from one another, thereby creating a uniform semi-stable suspension of particles **112** in carrier fluid **110**. In some examples, particles **112** are dispersed and/or suspended in a viscous foam or gel carrier fluid **110**. In some examples, a liquid binder or hardenable fluid may be used as a carrier fluid (e.g., when creating a touch fastener product). For instance, in this example, carrier fluid **110** includes a quantity of V-Block PRIMER-SEALER, manufactured by APAC of 2424 Lakeland Road, Dalton, Ga. 30721 (www.apacadhesives.com).

In some cases, the fluid contents of the reservoir (e.g., a carrier fluid and/or a propellant) are not configured to hold the particles in a dispersed suspension. In such cases, the reservoir can be provided with a mixing element (such as a loose stainless steel ball) for dispersing the particles in the carrier fluid. For example, a user can shake the reservoir to agitate the mixing element and disperse the particles in the carrier fluid prior to spraying.

Reservoir **114d** is a hermetically sealed can or bottle configured to contain one or more pressurized fluids. For instance, in this example, reservoir **114d** is formed of a material with good tensile properties. As shown, reservoir **114d** is an integral part of a sprayer body **122**, the sprayer body also including an opening **165** in which a spray outlet **104** is disposed, and a valve cup **166**. Spray outlet **104** features a nozzle **118** having an actuator **130**, an outlet orifice **120**, an inlet orifice **167**, and a stem **168** hydraulically coupling the inlet orifice to the outlet orifice. Spray outlet **104** and reservoir **114** are placed in hydraulic communication by a conduit **106** cooperating with a valve **141**, as discussed below.

A flexible conduit tube **126** forms the main body of conduit **106**, the conduit also including a pressurized fluid inlet **108** and an outlet **170** coupled to valve **141**. In this example, valve **141** features a housing **169** supported by a lower portion of valve cup **166**, a sealing member **171** (in this example, an o-ring gasket) positioned between an upper portion of the valve housing and the valve cup, a biasing member **172** (in this example, a helical compression spring), and a plunger **173** coupled to nozzle **118**. As shown, biasing member **172** and plunger **173** are disposed in valve housing **169**.

FIG. 6A shows particle sprayer **100d** with valve **141** in a closed position. As shown, when the valve is in a closed position, the force provided by biasing member **172** urges nozzle **118** upward (via plunger **173**), such that inlet orifice

167 is pressed against sealing member **171**. FIG. 6B shows valve **141** in an opened position. As shown, when a user presses on actuator **130** (and therefore plunger **173**) with sufficient force, the upwards force provided by biasing member **172** is overcome, thereby allowing nozzle **118** to be urged downwards. As the nozzle is pressed downwards, inlet orifice **167** traverses sealing member **171** and is placed in hydraulic communication with conduit tube **126**. At this point, there exists a passage from the pressurized reservoir to the ambient pressure (i.e., atmospheric pressure) environment. As such, propellant **151** is allowed to drive carrier fluid **110** from reservoir **114** through conduit house **126** and nozzle orifice **120**. Particles **112** are carried from the reservoir by the motivated carrier fluid and subsequently sprayed from the nozzle orifice away from the sprayer.

As shown in FIGS. 6A and 6B, propellant **151** may be provided in the form of a pressurized inert gas. In some other examples, however, propellant **151** is provided in the form of a liquid or a liquefied gas (e.g., compressed butane). The liquefied gas may exist as a liquid when reservoir **114** is kept under high pressure (for example when valve **141** is closed). When the pressure on the liquefied gas is relieved (for example, when valve **141** is opened), some of the liquefied gas should begin to boil, thereby forming a layer of gas near the top of the reservoir bearing down on carrier fluid **110** and driving the carrier fluid as well as some of the liquefied gas through conduit tube **126** toward nozzle orifice **120**. In some cases, liquefied gas driven from the reservoir can be used to increase the flowability of the particles. For example, a liquefied gas propellant having a lower viscosity than the carrier fluid can be provided to the particle sprayer. Additionally, in some examples, the evaporating liquefied gas propellant forms bubbles in the carrier fluid, creating a foam. By using a propellant in the form of a liquid or liquefied gas, the mixture may be further diluted as it is sprayed towards the support surface. The propellant may evaporate upon release to the atmosphere, thereby increasing the ratio of bits to liquid binder on the support surface.

FIG. 7 shows a particle sprayer **100e** similar to the particle sprayer shown in FIGS. 6A and 6B. In this example, particle sprayer **100e** has a particle source **102** in the form of a first reservoir **114e** containing a quantity of particles **112** dispersed in a carrier fluid **110**. The particle sprayer **100e** also includes a fluid source **137** in the form of a second reservoir **114f** containing a liquid binder **139**. As shown, the reservoirs include flexible bags (in this example, hermetically sealed, multi-layered laminated pouches) disposed in a hollow cavity **125** of a sprayer body **122**. A propellant **151** occupies the remaining space in the hollow cavity. Sprayer body **122** is hermetically sealed, such that propellant **151** pressurizes hollow cavity **125** and presses in on the first and second reservoirs. The reservoirs are placed in hydraulic communication with a spray outlet **104** by first a first conduit **106'** and a second conduit **106''** cooperating with a valve (not shown) for dispensing the particles and carrier fluid to the spray outlet. Spray outlet **104** features a nozzle **118** having an actuator **130** as well as a first orifice **120'** and a second orifice **120''** hydraulically coupled to first conduit **106'** and second conduit **106''**, respectively. For some particle shapes and sizes discussed below, first orifice **120'** should be provided having an open area of at least about 1.1 square millimeters. In this example, second orifice **120''** is provided having a smaller open area than the first orifice. In some examples, second orifice **120''** is provided having an open area of at least about 0.1 square millimeter.

FIG. 8 shows a schematic view of yet another particle sprayer **100f**. In this example, the particle source **102** coupled

11

to a spray outlet **104**, a conduit **106** extending from a pressurized fluid inlet **108** to the spray outlet, and a reservoir **114g** containing a liquid binder **139**.

Particle source **102** includes a flexible ribbon of stock material **174** having a longitudinal axis, and a wheel **176** on which a multiplicity of cutters **178** are mounted for cutting through the ribbon at discrete intervals to form discrete fastening bits **180**. Cutters **178** are mounted to the outer edge of wheel **176** and are configured to cut completely through the ribbon along the longitudinal axis. Ribbon **174** should be formed of a suitable material (e.g., thermoplastic) for forming discrete fastening bits, and may be of a cross-sectional shape chosen to provide overhanging projections on each severed bit.

Particle sprayer **100** further includes a support surface **182** (in this example, a bed knife) for supporting a distal end of ribbon **174** as discrete fastening bits **180** are severed. Support surface **182** may be formed of a much harder, wear-resistant material than cutters **178**. For instance, in this example, the support surface is formed of carbide, and the cutters are formed of 303 stainless steel. Rotation of the cutting wheel may be sufficient to pull ribbon **174** from spool **184** to advance the ribbon during cutting. Alternatively, other ribbon feeding means may be provided, such as a feed nip between counter-rotating rollers or a feed belt (not shown).

FIGS. 9A and 9B show the detail of one of cutters **178**, which is formed to have a pointed projection **186** that engages and severs the ribbon. The trailing portion of projection **186** has a wedge-shaped relief **190**, and the leading edge **192** of the projection defines a rake angle β with a radius R of wheel **176**, such that the point **196** defined at the intersection of the radially distal edge **198** of the projection and leading edge **192** of the projection leads cutter **178** in its rotation. Distal edge **198** is shown essentially perpendicular to the cutting wheel radius from point **196** to the beginning of relief **190**. Rake angles of about 20 to 25 degrees have been found to be appropriate with polyester ribbons. While this cutter **178** is shaped with an outwardly-directed projection for forming concave cuts in the ribbon, cutting may also be performed by a cutter defining a recess, such that the ribbon is first engaged on either lateral side by the advancing edges of the walls defining the recess. Such a cutter shape may help to trap the ribbon end as it is severed, forming convex surfaces on the exposed ribbon end.

When forming a touch fastener product, it may be required to provide a support surface with a mixture of particles (e.g., discrete fastening bits **180**) and liquid binder having a high volumetric ratio of particles to binder. In some examples, having a high volumetric ratio of bits to binder ensures that a sufficient number of bit fiber snagging components (e.g., projection heads **210**, see FIG. 11) are exposed for loop engagement. The proper coating ratio can be achieved by governing the density of the liquid binder. For example, when the bits are suspended in a foam carrier fluid, the volume taken up by the liquid binder in the carrier fluid is greatly enhanced for a given mass of the mixture. As the foam carrying the particles flows from of the orifice of a particle sprayer, the cell structure of the foam may be destroyed (i.e., the foam collapses, releasing its gas and leaving behind the liquid binder), such that the final coating on the support surface has the original density of the liquid binder in the carrier fluid. As such, many more bits per volume of carrier fluid can be deposited on the support surface when compared with an un-foamed carrier fluid. Likewise, in some examples, the carrier fluid is provided in the form of a liquid having a low volume of liquid binder (in some applications, a water based acrylic adhesive mixed with about 66.67% by volume of

12

water). In such examples, when the coating is allowed to set on the support surface, the majority of the liquid in the carrier fluid evaporates and the final coating of the support surface has the original density of the liquid binder in the carrier fluid.

As mentioned above, the particles **112** include discrete fastening bits. The discrete fastening bits **180** may be applied to a support surface to form a touch fastening product. FIG. 10 shows a touch fastener product **204** having a broad support surface **206**, with a multiplicity of discrete fastening bits **180** dispersed across and fixed to the support surface **206** in various orientations. The bits **180** are dispersed in a random pattern, each bit being supported by surface **206** and generally separated from the other bits by varying distances. To give some sense of proportion, the bits **180** shown in FIG. 10 are each only about one millimeter across, from tip to tip.

FIG. 11 shows an even more greatly enlarged view of surface **206** and a few of the bits **180**. Each bit **180** has multiple projections **208** extending in different directions, with at least one projection **208** of each bit extending away from surface **206**. Each projection has a head **210** that overhangs the bit beyond the neck **212** of the projection, to define crooks **214** for the releasable engagement of fibers. Each bit **180** has two opposite side surfaces **216** and **218** that form boundaries of surfaces **220** that define the projections. Surfaces **220** form the perimeter or profile of each projection, and the opposite side surfaces **216** and **218** form the broad faces of the bits and their projections. Each of the bits has a thickness, measured between its opposite side surfaces **216** and **218**, that is less than a maximum overall linear dimension of the bit. In the example shown, the thickness of each bit is only about 0.3 millimeter, while the maximum overall linear bit dimension, in this case measured between opposite projections, is about 1.0 millimeter, such that the ratio of thickness to maximum linear bit dimension is only about 0.3.

Each of the bits **180** shown in FIGS. 10 and 11 has four projections **208** extending in perpendicular directions, such that the bit has an overall shape similar to a '+' symbol, with rounded arrowheads on each projection. In this example, both of the opposite side surfaces **216** and **218** are non-planar, and are of complementary topography. The shape of the bits is such that, at rest on a planar horizontal surface, they will self-orient with at least one projection **208** extending away from the surface **206**, to be available for loop engagement. The bits **180** shown in FIG. 11 each have a thickness, measured between their side surfaces **216** and **218**, of about 0.102 millimeter. Bits of a similar profile but of about 0.3 millimeter in thickness, have been found to exhibit higher peel performance when mated with some loop materials.

Thus, as fixed to surface **206** and as shown in FIG. 12, each bit **180** is oriented with at least one of the projections **208** extending away from the support surface **206** for engaging loop fibers **222**. In many cases, the projections themselves project at acute angles from the support surface **206**, such that fibers may be snagged under the projection and/or in the crooks formed on either side of the projection. Furthermore, because the bits **180** are distributed randomly, the fastening properties of the overall touch fastener product are generally independent of engagement direction. For many touch fastener applications, the bits will be distributed with an average bit density of at least one bit per square centimeter, with all linear dimensions of the bit being less than about 1.2 millimeters (in some cases, 0.25 millimeter or less across). For some applications, bit densities between about 8 and 15 bits per square centimeter are preferable, with bits of such small size. For some other applications, bits as large as, for example, three millimeters across, are useful. While it may be, due to the random distribution of the bits, that some bits

13

become fixed to the surface in contact with other bits, in most cases it is preferable that the bits be spaced from other bits so that the presence of other bits does not impede the engagement of fibers by the exposed projections.

As can be seen in FIGS. 11 and 12, each bit is permanently fixed to support surface 206 by an adhesive 224 into which lower portions of each bit are embedded. While the degree of wetting on the surfaces of the bits, and the amount of each bit that remains exposed will vary, in this example most bits have three out of four projections directly adhered to surface 206, leaving only one projection 208 of each bit exposed for engagement. With some other bit shapes (to be discussed further below), more than one projection of each bit will, on average, remain exposed for engagement.

The projected profile of each bit, as seen from one of its opposite side surfaces, is shown in FIG. 13. Each projection 208 ends at a head 210 that has an overall width 'w' of about 0.4 millimeter and a curved outer surface of radius 'r' of about 0.2 millimeter, overhanging a projection neck of a width 'd' of about 0.15 millimeter. The underside of each head forms two opposite loop-retaining crooks, the edges of each head extending back toward the bit a distance 'u' of about 0.033 millimeter. The maximum lateral dimension 'z' of the bit, measured from outer head surfaces, is about 1.02 millimeter.

Bits of non-planar opposite side surfaces of complementary topography may be formed by cutting the bits from a shaped ribbon (e.g., ribbon 174 of FIG. 8) with a series of identical cuts, each cut simultaneously forming an opposite side surface 216 of one bit and an opposite side surface 218 of another bit. The ribbon shape and material resiliency may be chosen such that the process of cutting bits from the rail imparts further geometric properties. For example, as a cutter (e.g., cutter 178 of FIGS. 9A and 9B) enters the material, force from the cutter compresses the material of the ribbon, which remains compressed during cutting. Because the ribbon material is resilient, after a bit is severed from the rail its severed surface obtains a curvature perpendicular to the path of the cut, due to relaxing of the compressed bit material. Thus, curvature in one plane can be provided by cutter shape, while curvature in a perpendicular plane can be provided by compression during cutting, and curvature in yet another perpendicular plane can be provided by ribbon shape. In this manner, bit geometry may be altered in essentially any orthogonal direction.

Furthermore, the resulting geometry of each cut can be modified by adjusting the unsupported length of ribbon extending between the end of its support surface and the cutter. For example, spacing the cutter wheel so as to engage the ribbon beyond the end of its support will cause the unsupported length of rail to be resiliently deflected during cutting by bending forces induced by the cutting, such that, after the cutting, the unsupported length of ribbon returns to a position, prior to a subsequent cut, in which an edge of the ribbon corresponding to an exit point of the cutting extends farther in a longitudinal direction than an edge of the ribbon corresponding to an entrance point of the cutting. However, for many applications it may be preferable to reduce or eliminate any unsupported length of ribbon during cutting.

While the cutting patterns described above may be performed by linear reciprocation of a cutter blade, they may also be formed by a rotating cutter wheel (e.g., wheel 176). The methods of bit severing described herein may be employed to produce discrete bits that are then assembled into, or fed to, the various sprayers discussed above.

FIG. 14 shows several examples of cross-sections that may be continuously extruded to form ribbons from which bits may be severed. Each cross-section shown in FIG. 14 repre-

14

sents a constant ribbon cross-section, with the outline of the profile representing the projection-defining surfaces that extend continuously along the length of the ribbon and maintain their as-extruded nature in the severed bits. Many shapes, like those labeled B-I, K, L, N and R, have four projections, each extending from a common hub generally perpendicular to two adjacent projections. In many of those, the projections are all identical. Shape L shows an example in which the projections are not all identical. Many, such as shapes B-F, I, L and R-Z, are symmetric about each of two axes (one vertical and the other horizontal as illustrated). Shape L, for example, is stiffer with respect to compression in the vertical direction, so as to withstand cutter load without buckling. Some, such as shapes M, O, P, S-W and Y, have both a major axis and a minor axis perpendicular to their longitudinal axis, with the cross-section longest along its major axis. With such shapes it is preferred that the cutting occur along the direction of their minor axis. Many of the shapes with major and minor axes of different dimensions have projection extending in only two opposite directions, such as in shapes M, O, P, T, U and W. Shapes S and Z each have six projections, each extending in a different direction, and shape AA has eight projections each extending in a different direction. Shape V is similar to shape W, but with the addition of projections extending from either end along the major axis. Shape Y has six primary projections extending in the direction of its minor axis, the neck of each primary projection carrying a pair of secondary projections extending in the direction of its major axis. Shape J has four primary projection groups, each group including several branches that form discrete projections, such that the outer periphery of the bit has 16 separate heads for engaging loop fibers, while additional features on the sides of the projection stems form even more engagement points. Many of the shapes have projections with heads that overhang their stems on both sides of the projection, such as those in shapes B-F, H-L, Q-W, Y and Z, and some of the projections of shapes X and AA. Other projections, such as those of shapes A, G and M-P, and some of those of shapes X and AA, have heads that overhang to engage fibers on only one side of their stem. In some shapes, such as shapes H and K, the projections each overhang in two directions, but at different distances along the projection, such that each projection defines two fiber-retaining crooks, one nearer the central hub of the bit than the other. In shape Z the heads overhang both sides of the projection stems to form crooks, but with no return of the tips of the head toward the hub of the bit, such that the underside surfaces of the heads are essentially flat and perpendicular to the adjacent projection stems surfaces. In shape Q projections extend at acute angles up and down from a central web (shown horizontal in the figure), the ends of which are also equipped with overhanging heads for loop engagement, such that the overall cross-section of the ribbon has the general appearance of a letter 'N' or 'Z'. This shape also provides for some vertical collapse during cutting, the upper and lower arms of the shape elastically compressing against the central web to support the arms during cutting. In most of the illustrated shapes the outer surfaces of the projection heads are rounded, while the heads of shapes D and F are generally pointed. The various projections shown in these shapes are designed to have particular engagement and disengagement properties. For example, the heads of the projections of shape Z are designed to snag very low-loft fibers, such as those of non-woven materials, while the heads of the projections of shape N are designed to engage with high-loft loops and to aggressively retain the loop fibers once engaged, without distending. Of course, many other ribbon shapes, and corresponding bit shapes, are useful.

15

Referring next to FIGS. 15A and 15E, when bits 180 are randomly distributed over a horizontal support surface 206, and rest on that surface only under their own weight, they may assume any one of the orientations shown in these figures. All of these orientations have in common that at least one projection head 210 of the bit is raised from surface 206 for loop fiber engagement. In the orientation shown in FIG. 15A, the bit is resting on a portion of its convex side surface, with one projection flat against surface 206 and the heads of two other projections in contact with surface 206. One projection extends away from surface 206, its head 210 fully raised or spaced from surface 206 for loop fiber engagement. Because the convex side surface of bit 180 defines essentially a 90-degree angle, the upwardly extending projection extends essentially perpendicular to surface 206. In the orientation of FIG. 15B, bit 180 is resting on three of its projection heads, with the fourth projection head 210 extending away from, and raised from, surface 206 for fiber engagement. Due to the shape of the bit, the upper projection extends at an acute angle to the surface. As seen from FIGS. 10-12, when broadcast over a surface many of the bits assume this particular orientation. In general, the shape and structure of the bits are stable as cut, prior to being distributed onto the surface. The bits are not applied to the surface in liquid form, nor do they obtain their individual shape by influence of gravity or the surface itself. In this sense they may be considered rigid bodies in comparison to the adhesive bonding them to the surface.

FIGS. 15C-15E illustrate three other potential orientations that may be assumed by a bit 180 at rest on a horizontal surface 206. The incidence of the orientation shown in FIG. 15C, in which two heads 210 are raised at the distal ends of two projections extending at acute angles relative to surface 206, is a function of the thickness of the bit, relative to other geometric properties and linear dimensions, with a thicker bit (e.g., one resulting from a higher rail advance rate between successive cuts) more frequently assuming this orientation than a thinner bit cut from the same rail. The orientations of FIGS. 15D and 15E may be considered stable orientations only in the presence of an adhesive mechanism. In these two orientations, three engageable heads 210 are raised, one on a vertically-extending projection and two on horizontally-extending projections. Even in these three orientations, at least one projection head 210 is raised from surface 206 for loop fiber engagement.

The dashed lines shown in FIGS. 15A-15E represent an upper surface of an adhesive 224 fixing the bits 180 in these orientations. The dashed lines are also labeled as 206a to illustrate that "surface" over which the bits 180 are sprayed may be a surface 206a of a layer of adhesive disposed on a substrate 206. The bits 180 may be partially embedded in adhesive 224 as shown in these illustrations and in FIG. 16, or float on the adhesive surface as in FIG. 17. The adhesive 224 may be in place before the bits are sprayed, or may be delivered to the surface with the bits.

Even with relatively thin bits 180, the orientations shown in FIGS. 15D and 15E have been observed occurring as a result of surface tension or capillary forces at the surface of a liquid adhesive. This phenomenon is illustrated in FIG. 18A, which shows bit 180, which initially is oriented as shown by dashed outline, righting itself due to forces at the interface between the adhesive 224 and the projection head 210 in contact with the adhesive. This phenomenon appears more frequently with very light/small bits 180 and high wetting properties between the adhesive and bit materials.

Once applied to the surface, the thickness of the adhesive 224 may be reduced by drying. In this manner, low solids water-based adhesives may be applied as coatings thicker

16

than would otherwise be tolerable in the finished product. FIG. 18B illustrates water or solvent evaporating from the adhesive, leaving an adhesive with a higher proportion of solids fixing the bit to the surface.

Similarly, the bits may be fixed to a surface, such as to a film or other solidified resin layer, by at least partially melting the surface after the bits are sprayed onto the surface. For example, bits may at first rest on the surface of a solidified adhesive 224 (or film surface) as in FIG. 17, and then become partially embedded in the adhesive 224 as the adhesive is melted, such as to either be suspended within the adhesive (as in FIG. 16, for example), or to come to rest on an underlying substrate (as, for example, in FIG. 15A). In such cases it will generally be the case that the resin from which the bits are formed is chosen to not melt under the conditions required to melt the surface onto which the bits are sprayed. Such conditions could be elevated temperature, or energy supplied by radiation or other means, such as sonic vibration.

In some embodiments, a component of the bits 180 (e.g., a projection head 210) is provided with either a much higher or much lower affinity to the adhesive 224 than the rest of the bits 180. In the case of high affinity, that component may then serve as the anchor for a coating of the adhesive 224 that would otherwise not wet onto the bit. Conversely, in the case of low affinity, that same component may serve as an exposed, fiber snagging portion for a coating of the adhesive 224 that would otherwise completely cover the bit.

In some embodiments, the bits 180 have either positive or negative buoyancy in a coating of adhesive 224. When the bits 180 are provided having a positive buoyancy, they may be completely encapsulated in the adhesive coating when sprayed on the support surface 206 (e.g., a floor surface) but float upwards to expose one or more of the fiber engaging projection heads 210. When the bits 180 are provided having a negative buoyancy, they may be completely encapsulated in the adhesive coating when sprayed on the support surface 206 (e.g., a ceiling surface) but sink downwards to expose one or more of the fiber engaging projection heads 210.

FIG. 19 shows an additional illustration of a plurality of bits 180 applied to a support surface 206. As was mentioned above, the bits are adhered to the support surface 206 by adhesive 224 and are oriented having at least one projection head 210 available for loop fiber engagement.

As discussed above referring to FIGS. 10-19, discrete fastening bits 180 may be configured for loop fiber engagement. The bits should also be configured for ejection from an orifice 120 of a particle sprayer 100. In some examples, discrete fastening bits 180 are configured for ejection from an orifice 120 having a relatively small diameter. FIG. 20A shows a compressible bit 180 being discharged from an orifice 120 of a spray outlet 104. The bit is formed of a material including a compressible substance (in this example, expanded polystyrene, however, melamine and urethane foam materials may also be suitable) such that the internal pressure of the reservoir in which the bit 180 is contained (e.g., reservoir 114d, see FIGS. 6A and 6B) compresses the bit to a suitable size for being ejected from orifice 120. Once bit 180 is free of orifice 120, it expands in the lesser atmospheric pressure to a larger size for snagging fibers.

FIG. 20B shows a highly elastic bit 180 being discharged from an orifice 120 of a spray outlet 104. The bit is formed of a material including a highly elastic substance (e.g., the bit may have very little central mass and high aspect ratio projections). As shown, the undistorted dimensions of bit 180 would not allow it to be ejected from orifice 120. Due to its highly elastic composition, however, the bit may be contorted

17

and deformed to fit through orifice **120** under force of the flow of carrier fluid, and will elastically rebound to its original shape after ejection.

FIG. **20C** shows a plastically deformable bit **180** being discharged from an orifice **120** of a spray outlet **104**. Again, as shown, the undistorted dimensions of the bit would not allow it to be discharged from orifice **120**. Bit **180**, however, may be plastically contorted and deformed to fit through orifice **120**. The formable bit may retain at least some of its deformation after ejection, allowing curvature developed during ejection to assist in its orientation on the support surface. Additionally, bit **180** as deformed may be aerodynamically aligned for self-orientation onto a support surface **206** when sprayed in a carrier fluid. For example, the deformation of bit **180** may provide an aerodynamic leading end **226** for adhesion to the support surface and an aerodynamic trailing end **228** having projection heads **210** for engaging fibers.

FIGS. **21A-21C** show a bit **180** being discharged from an orifice **120** of a spray outlet **104** with discrete quantities of adhesive **224**. Spraying the bits such that the adhesive is only provided where the bits land can allow the support surface to which the bits are adhered to maintain its permeability, stretchability, or other similar properties.

FIG. **21A** shows a bit **180** having voids or pockets in which a quantity of adhesive **224** is disposed. In this example, adhesive **224** includes a foaming agent such that the adhesive filling the pockets of the bit is an unstable foam (e.g., a water based acrylic). After bits **180** have impacted support surface **206**, the foam collapses to allow adhesive **224** to vacate the pockets of the bit and flow onto the surface to fix the bit to the support surface. In some cases, the impact against surface **206** collapses the foam or otherwise ejects the adhesive from the bit.

FIG. **21B** shows a bit **180** encased in an adhesive **224**. After the encased bit impacts surface **206**, adhesive **224** is made to flow from the bit onto the surface to expose at least some of the projection heads **210** for engagement and to fix the bit to the surface, such as by melting of the adhesive.

FIG. **21C** shows a bit **180** with adhesive **224** collecting or clumping on its surface such that the bit is propelled toward a support surface **206** with little or no loose liquid (i.e., liquid not attached to the bits) in the spray. More specifically, as shown, adhesive **224** has accumulated in crooks **214** defined by projection heads **210**. In some other examples, one or more portions of the bit are provided having a higher affinity for the adhesive (e.g., wettability) than other portions of the bit, thereby causing the adhesive to wet only those portions of the bit having the high affinity. Or in some cases the entire surface of the bit is formed to have a high affinity to the adhesive, such that the adhesive tends to wet, and stick to, the surface of the bit. In still some other examples, the nozzle of spray outlet **104** is configured to release relatively large droplets of adhesive **224** with bits **180** in order to avoid having loose liquid in the spray. The resulting spray pattern may be particularly useful when spraying bits onto a permeable fabric, for example, so as to not impair the permeability of the overall fabric by flooding with the adhesive. Similarly, a stretchable material may retain its overall stretch properties even when adhering bits in small amounts of even a non-stretchable adhesive.

While a number of examples have been described for illustration purposes, the foregoing description is not intended to limit the scope of the invention, which is defined by the scope of the appended claims. There are and will be other examples and modifications within the scope of the following claims.

What is claimed is:

1. A particle sprayer, comprising:

a reservoir containing a multiplicity of particles;

18

a valve in hydraulic communication with the reservoir for dispensing particles from the reservoir; and
a spray outlet coupled to the reservoir for spraying particles dispensed by the valve;

wherein the particles comprise discrete fastening bits, each bit having one or more projections, and each projection having an overhanging head for snagging fibers.

2. The particle sprayer of claim 1, wherein the reservoir also contains a quantity of carrier fluid in which the particles are sprayed from the sprayer.

3. The particle sprayer of claim 2, wherein the carrier fluid is pressurized within the reservoir.

4. The particle sprayer of claim 2, wherein the carrier fluid is motivated by a propellant also contained within the reservoir.

5. The particle sprayer of claim 2, wherein the carrier fluid comprises an adhesive formulated to bond the sprayed particles onto a surface onto which they are sprayed.

6. The particle sprayer of claim 2, wherein the particles are suspended within the carrier fluid within the reservoir.

7. The particle sprayer of claim 2, wherein the carrier fluid is in liquid form within the reservoir.

8. The particle sprayer of claim 1, wherein the bits are larger, in an unstressed state, than the spray outlet.

9. The particle sprayer of claim 1, wherein the bits are porous.

10. The particle sprayer of claim 1, wherein the bits are configured to self-orient upon spraying, such that the bits tend to land on a support surface in a particular orientation when sprayed.

11. The particle sprayer of claim 1, wherein each bit comprises a quantity of an adhesive that releases upon impact with a support surface.

12. The particle sprayer of claim 1, wherein each bit comprises opposite side surfaces defining the projections, and wherein at least one of the opposite side surfaces of each bit is non-planar.

13. A particle sprayer, comprising:

a particle source comprising particles, wherein the particles comprise discrete fastening bits having one or more projections, and each projection having an overhanging head for snagging fibers;

a spray outlet coupled to the particle source; and

a conduit extending from a pressurized fluid inlet to the spray outlet and configured to constrain a flow of carrier fluid to flow along the conduit toward the spray outlet to propel the particles from the particle source away from the spray outlet.

14. The particle sprayer of claim 13 further comprising an impeller operable to motivate air through the spray outlet to propel the particles away from the sprayer.

15. The particle sprayer of claim 13, wherein the particle source is releasably coupled to the spray outlet.

16. The particle sprayer of claim 13, wherein the particle source comprises a reservoir containing a quantity of the particles.

17. The particle sprayer of claim 16, further comprising a venturi constriction in hydraulic communication with the reservoir for siphoning particles from the reservoir.

18. The particle sprayer of claim 13, further comprising a fluid source coupled to the pressurized fluid inlet.

19. The particle sprayer of claim 13, wherein the particle source comprises a longitudinally continuous ribbon and a cutter operable to cut through the ribbon at discrete intervals to form the discrete fastening bits.

* * * * *