




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/04/09
(87) **Date publication PCT/PCT Publication Date:** 2010/04/01
(45) **Date de délivrance/Issue Date:** 2018/01/30
(85) **Entrée phase nationale/National Entry:** 2011/03/24
(86) **N° demande PCT/PCT Application No.:** CA 2009/000444
(87) **N° publication PCT/PCT Publication No.:** 2010/034099
(30) **Priorités/Priorities:** 2008/09/24 (US12/236,854);
2009/04/08 (US12/420,660)

(51) **Cl.Int./Int.Cl.** **A61B 6/02** (2006.01),
A61B 5/055 (2006.01), **A61B 6/03** (2006.01),
A61G 99/00 (2006.01)
(72) **Inventeur/Inventor:**
GEIGER, PAUL ARTHUR, CA
(73) **Propriétaire/Owner:**
CEDARA SOFTWARE CORP., CA
(74) **Agent:** BLAKE, CASSELS & GRAYDON LLP

(54) **Titre : SYSTEME ET PROCEDE POUR LA SEGMENTATION AC-PC**

(54) **Title: AC-PC SEGMENTATION SYSTEM AND METHOD**

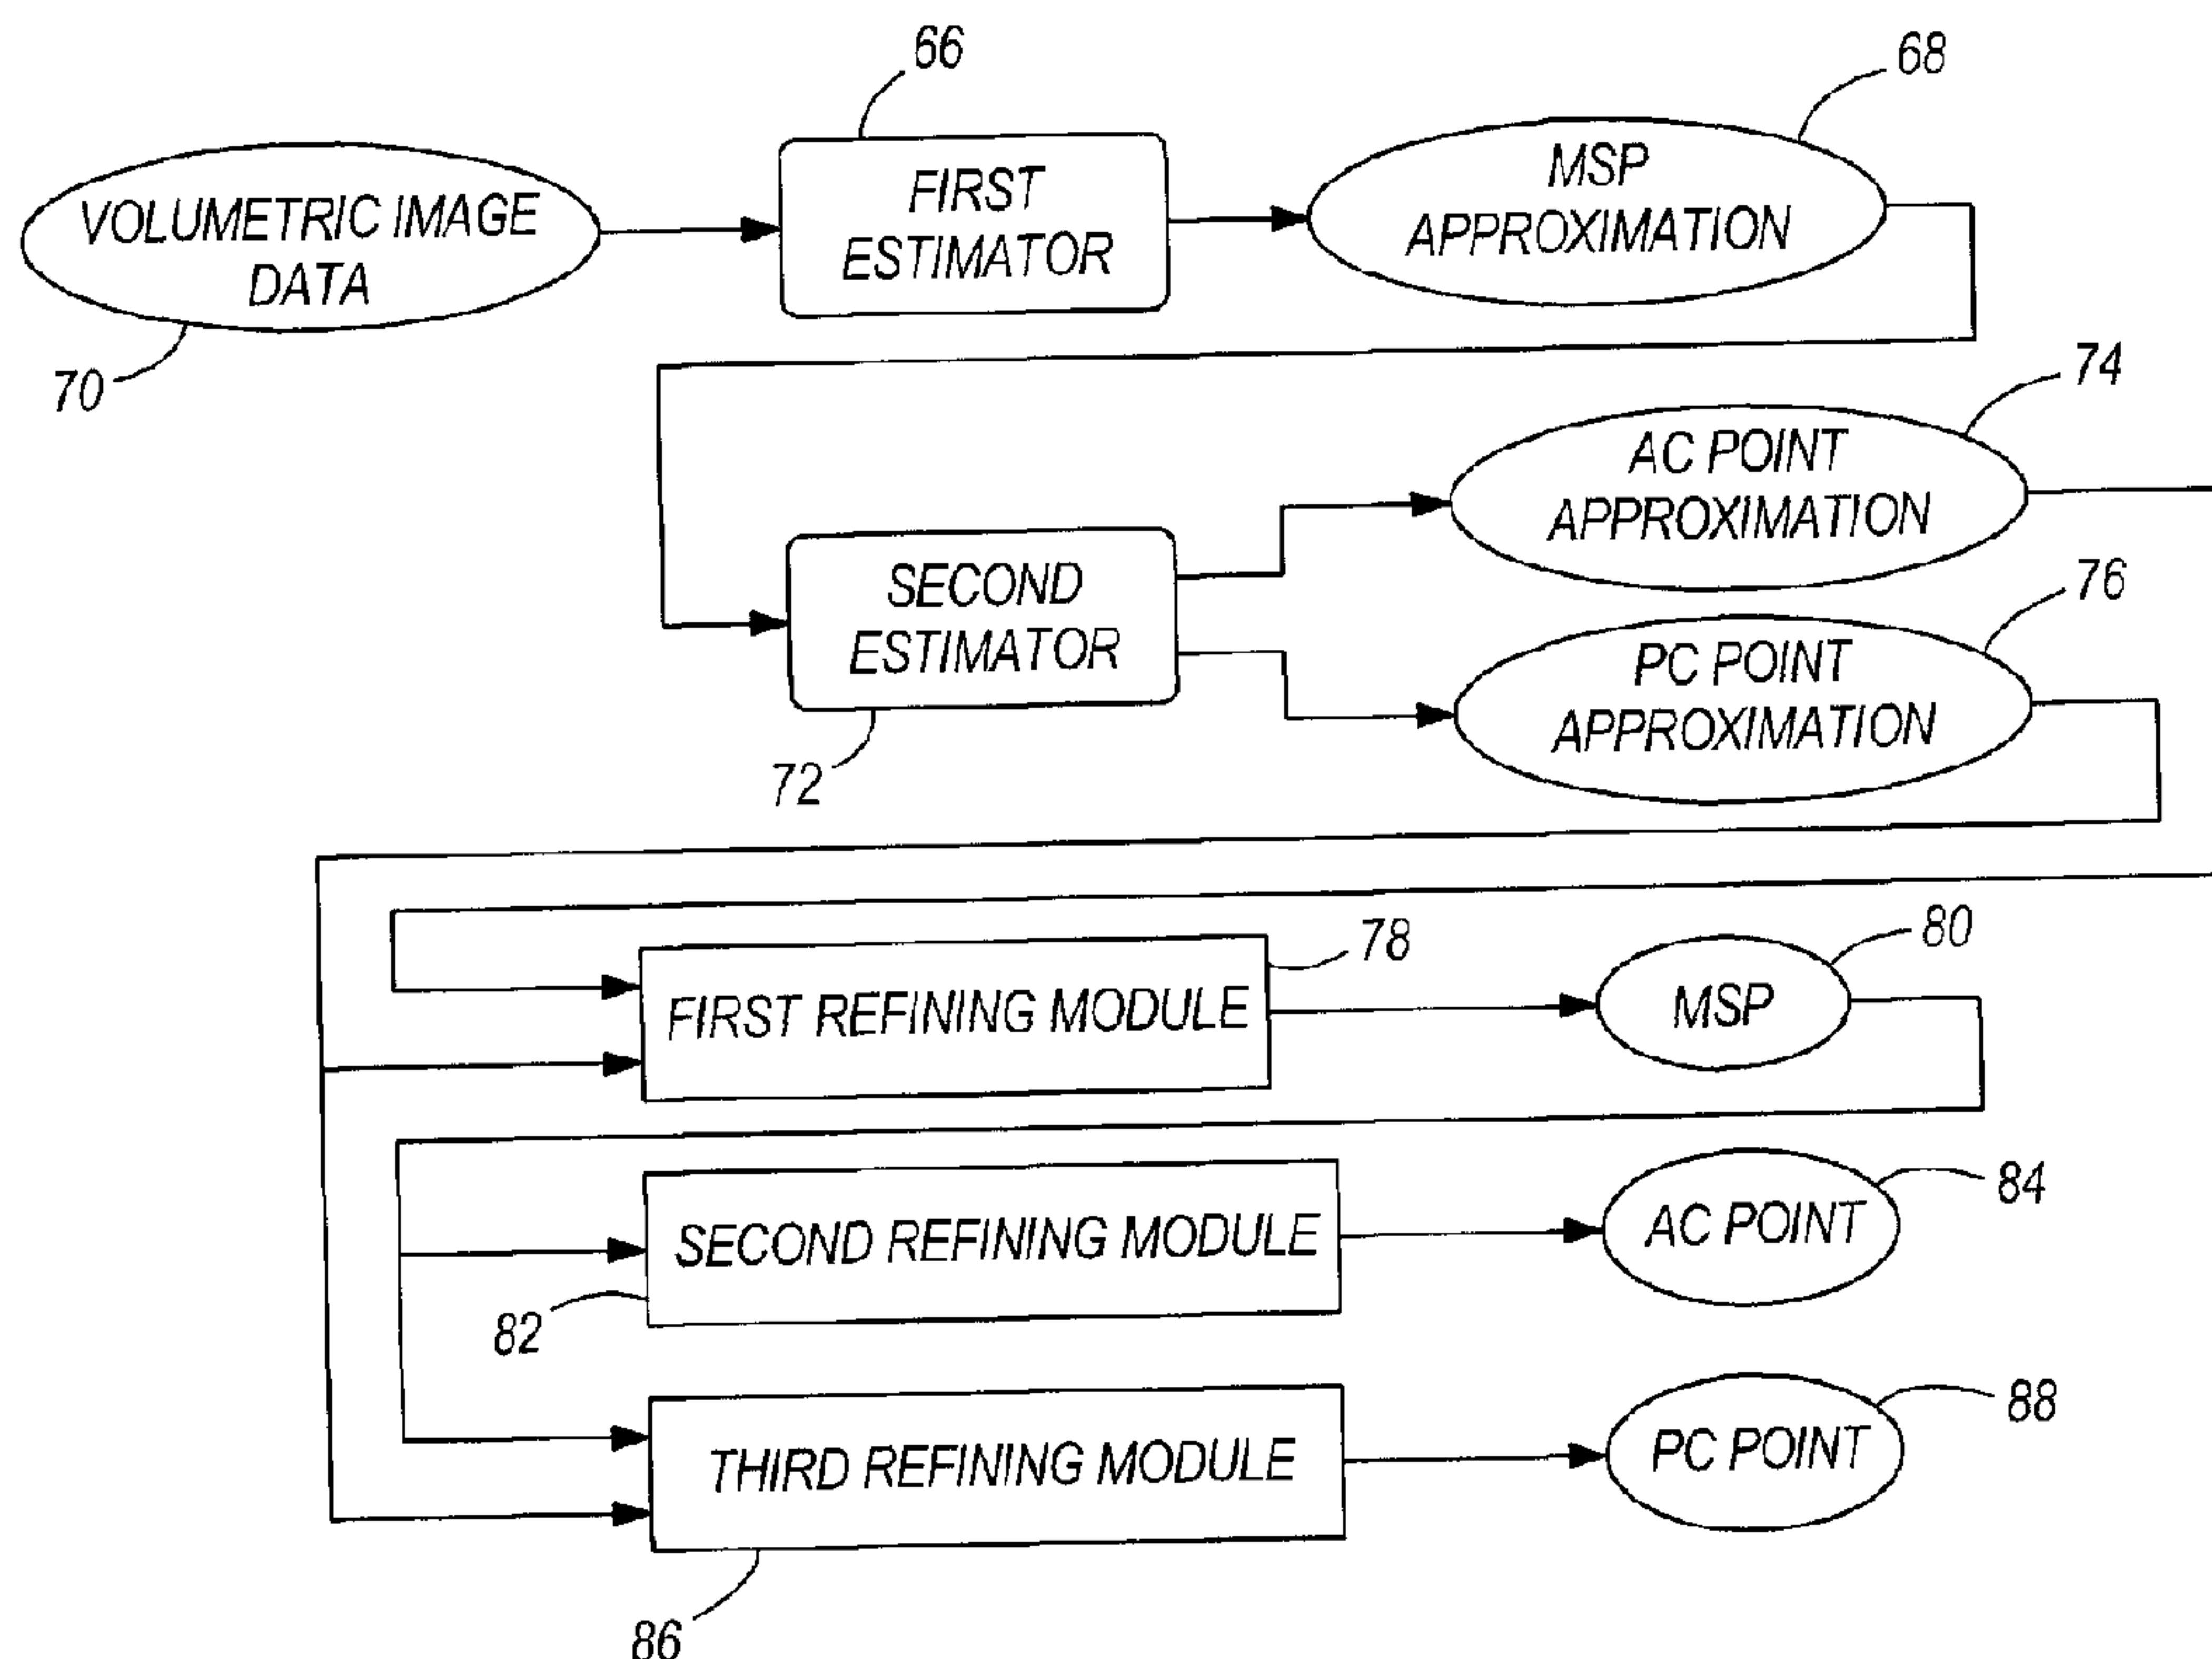

(57) **Abrégé/Abstract:**

A computer-implemented system and method of determining anterior commissure (AC) and posterior commissure (PC) points in a volumetric neuroradiological image. The method includes determining, by a computer, a mid-sagittal plane estimate to extract a mid-sagittal plane image from the volumetric neuroradiological image, and AC and PC point estimates in the mid-sagittal plane image. The method further includes determining, by the computer, a refined mid-sagittal plane estimate from the AC and PC point estimates to extract a refined mid-sagittal plane image, the AC point from the refined mid-sagittal plane image, and the PC point from the refined mid-sagittal plane image and the AC point.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
1 April 2010 (01.04.2010)

PCT

(10) International Publication Number
WO 2010/034099 A1

(51) International Patent Classification:

A61B 6/02 (2006.01) A61B 6/03 (2006.01)
A61B 5/055 (2006.01) A61G 99/00 (2006.01)

(21) International Application Number:

PCT/CA2009/000444

(22) International Filing Date:

9 April 2009 (09.04.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/236,854 24 September 2008 (24.09.2008) US
12/420,660 8 April 2009 (08.04.2009) US

(71) Applicant (for all designated States except US):
CEDARA SOFTWARE CORP. [CA/CA]; 6509 Airport
Road, Mississauga, Ontario L4V 1S7 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GEIGER, Paul,
Arthur** [CA/CA]; 508-35 Walmer Road, Toronto, On-
tario M5R 2X3 (CA).

(74) Agents: **ORANGE, John, R.S.** et al.; Box 25, Commerce
Court West, 199 Bay Street, Toronto, Ontario M5L 1A9
(CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AC-PC SEGMENTATION SYSTEM AND METHOD

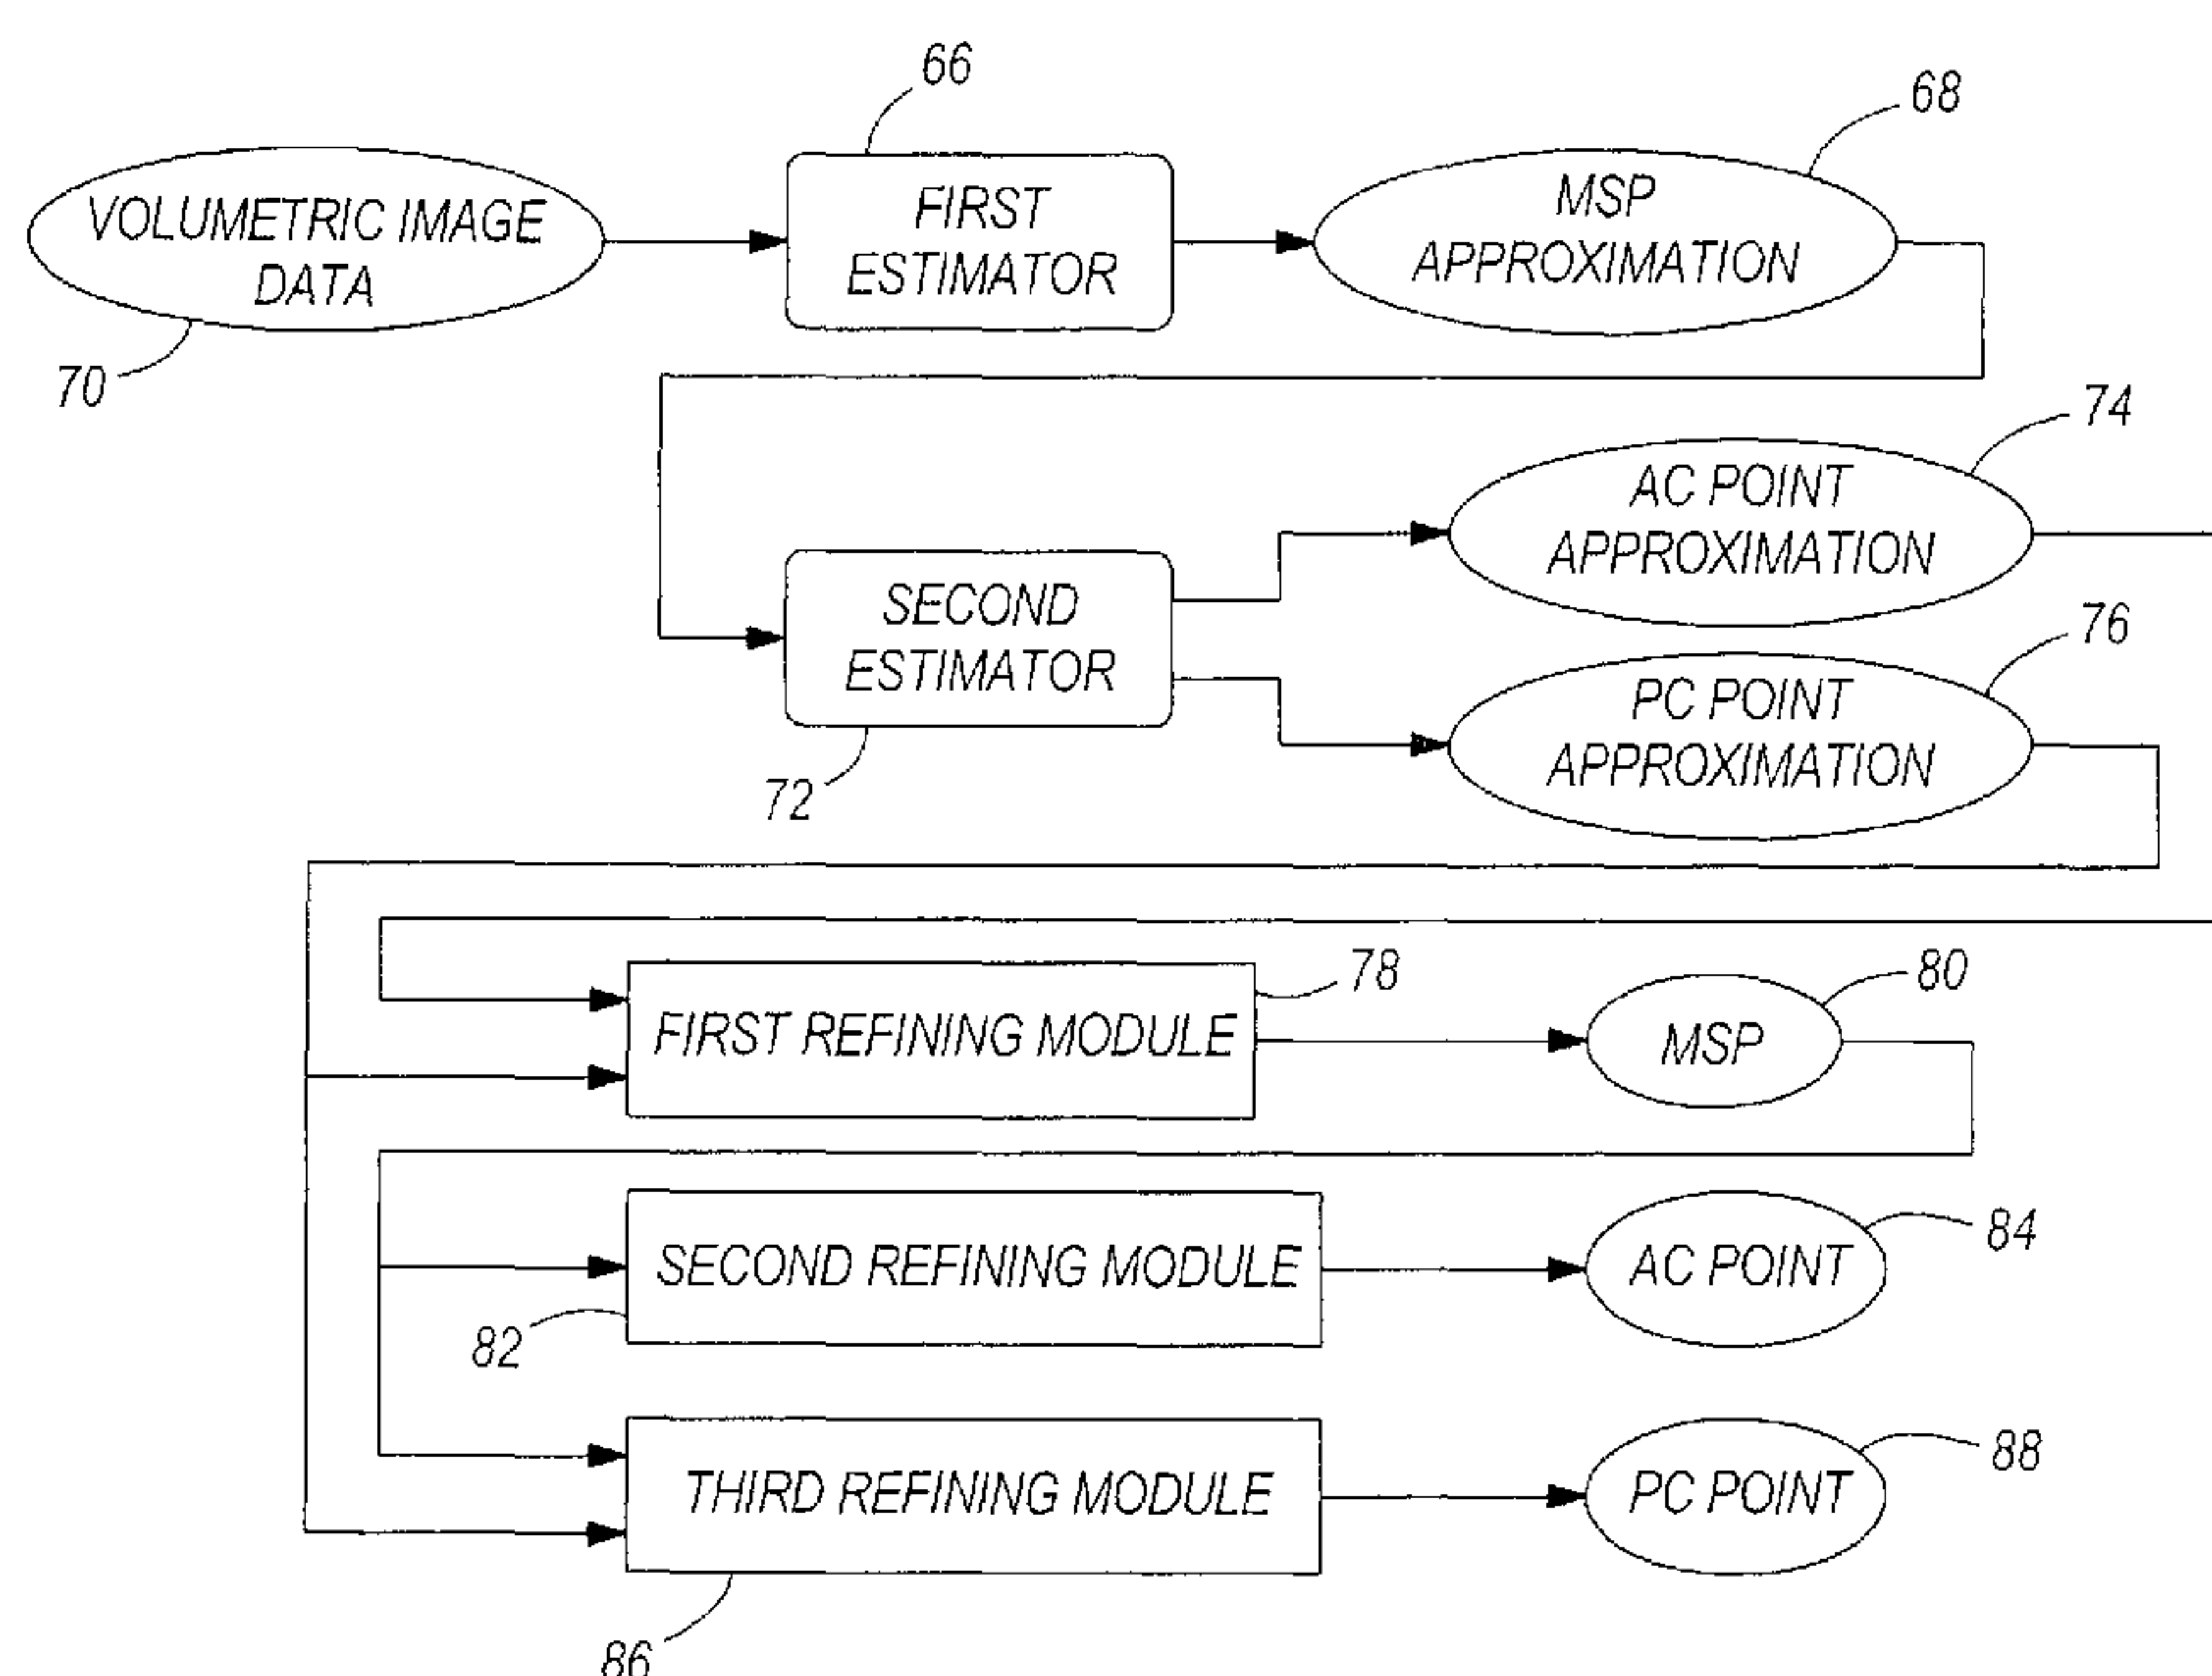


FIG. 16

(57) Abstract: A computer-implemented system and method of determining anterior commissure (AC) and posterior commissure (PC) points in a volumetric neuroradiological image. The method includes determining, by a computer, a mid-sagittal plane estimate to extract a mid-sagittal plane image from the volumetric neuroradiological image, and AC and PC point estimates in the mid-sagittal plane image. The method further includes determining, by the computer, a refined mid-sagittal plane estimate from the AC and PC point estimates to extract a refined mid-sagittal plane image, the AC point from the refined mid-sagittal plane image, and the PC point from the refined mid-sagittal plane image and the AC point.

AC-PC SEGMENTATION SYSTEM AND METHOD

BACKGROUND

[0001] The present invention relates to a system and method for locating the anterior and posterior commissures (AC and PC) in a three-dimensional image of a human brain. Identification of the AC and PC are critical for operations such as targeting stereotactic and functional neurosurgery, localization, analysis in brain mapping, structure segmentation and labeling neuroradiology. For example, the Talairach atlas and its associated transformations, which have been widely used as a standard by neuroscientists and neurosurgeons to perform spatial normalization, require identification of the mid-sagittal plane (MSP), AC and PC.

[0002] Manual identification of the AC and PC from a volumetric neuroradiological image is tedious and inherently results in a degree of variability across analysts, while identification of these structures by known computer image analysis methods is either too computationally time-consuming or produces unreliable results. For these reasons, there is a need for an automated method of AC and PC identification that is simultaneously accurate, robust, and efficient.

SUMMARY

[0003] In one embodiment, the invention provides a computer-implemented method of determining anterior commissure (AC) and posterior commissure (PC) points in a volumetric neuroradiological image. The method includes determining, by a computer, a mid-sagittal plane estimate to extract a mid-sagittal plane image from the volumetric neuroradiological image, and AC and PC point estimates in the mid-sagittal plane image. The method further includes determining, by the computer, a refined mid-sagittal plane estimate from the AC and PC point estimates to extract a refined mid-sagittal plane image, the AC point from the refined mid-sagittal plane image, and the PC point from the refined mid-sagittal plane image and the AC point.

[0004] In another embodiment, the invention provides a computer readable medium encoded with a plurality of processor executable instructions for identifying AC and PC points in a volumetric neuroradiological image, the instructions enabling execution of the method outlined above.

[0005] In still another embodiment, the invention provides an image processing system configured to determine AC and PC points in a volumetric neuroradiological image. The system includes a first estimator to determine a mid-sagittal plane approximation from the volumetric neuroradiological image, and a second estimator to determine AC and PC point approximations from the mid-sagittal plane approximation. The system also includes a first refining module to identify a mid-sagittal plane using the AC and PC point approximations, a second refining module to identify the AC point from the mid-sagittal plane, and a third refining module to identify the PC point from the mid-sagittal plane and the AC point.

[0006] Other aspects of the invention will become apparent by consideration of the detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Fig. 1 includes a series of axial image slices taken from a volumetric scan of a human head;

[0008] Fig. 2 is an axial image slice from Fig. 1 before and after brightness equalization;

[0009] Fig. 3 is an edge mask created from the brightness equalized axial image slice from Fig. 2;

[0010] Fig. 4 is an edge mask of an axial image slice reflected over a tentative symmetry axis;

[0011] Fig. 5 illustrates the ranges of tentative symmetry axis parameters on the brightness equalized axial image slice from Fig. 2;

[0012] Fig. 6 illustrates the series of axial image slices from Fig. 1 with symmetry axes fit to a plane;

[0013] Fig. 7 is an image slice taken along the mid-sagittal plane estimate;

[0014] Fig. 8 illustrates the active appearance model of the brainstem region applied to the image from Fig. 7;

[0015] Fig. 9 is an axial image slice taken along a plane including the AC and PC point estimates;

- [0016] Fig. 10 is an edge mask of a portion of the image from Fig. 9;
- [0017] Fig. 11 illustrates the AC estimate and AC point in a refined mid-sagittal plane image slice;
- [0018] Fig. 12 illustrates the PC estimate in a refined mid-sagittal plane image slice;
- [0019] Fig. 13 is an edge mask of the refined mid-sagittal plane image slice;
- [0020] Fig. 14 includes close-ups of the refined mid-sagittal plane image from Fig. 12 and the edge mask from Fig. 13;
- [0021] Fig. 15 is a flow chart that illustrates the phases and steps of the AC-PC system and method according to one embodiment of the present invention; and
- [0022] Fig. 16 illustrates the AC-PC system according to one embodiment of the present invention.

DETAILED DESCRIPTION

- [0023] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of the method steps and the parameters of individual algorithms set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways.
- [0024] The system and method of the present invention are broadly applicable to input volumetric image data obtained via magnetic resonance imaging (MR and fMR) and computed tomography (CT), and can be implemented with data from other imaging modalities, given an appropriate degree of resolution and contrast. Further, data from multiple modalities can be merged to create a hybrid data set with which the system and method can be implemented. The input image data can be obtained directly from an imaging modality or picture archiving and communications system (PACS), or from a database accessible via the internet.
- [0025] In an embodiment of the invention, the AC-PC segmentation method is broken down into the following five basic phases: 1) approximation of the mid-sagittal plane (MSP),

2) approximation of the AC and PC points, 3) refining the mid-sagittal plane, 4) refining the AC point, and 5) refining the PC point. These phases (and the steps within each phase identified and discussed in detail below) are only defined as such for the purposes of explanation. Thus, it should be understood by one of ordinary skill in the art that combination of consecutive phases/steps and/or separate execution of elements of individual steps are within the scope of the invention. Further, all the steps identified below are not required in all embodiments of the invention, and some variance from the order of the steps within the process as described below is also within the scope of the invention.

[0026] The first phase, approximation of the mid-sagittal plane from a volumetric image, begins by extracting several two-dimensional axial images, or slices, from the image volume 20. As shown in Fig. 1, the selected slices 22, 24a, 26, 28, 30 approximately span the vertical (axial) range from the medulla to the top of the corpus callosum. Outside of this range, the cross-sectional images of the head and neck tend to be roughly circular; hence, they are not as useful for determining the orientation of the head by this method. In some embodiments, about 15 equally-spaced images can be used, but the exact number is not critical, nor is the requirement that they be equally spaced.

[0027] Brightness equalization is optionally applied to the selected axial image slices. This is generally only necessary if the images are not uniformly bright to begin with. For example, MR images often suffer from significant non-uniform brightness, whereas CT images do not. Fig. 2 illustrates an axial image slice before 24a and after 24b brightness equalization. The purpose of brightness equalization is to produce a better, more complete edge mask (explained below). Brightness equalization is a common operation in the field of image processing, and can be performed in a variety of ways. A standard reference is “Image Processing, Analysis, and Machine Vision” by Sonka, Hlavac, and Boyle.

[0028] One such method of brightness equalization is executed as follows: given an input image X, first create an auxiliary image Y by convolving image X with a Gaussian kernel whose size is L/f , where L is larger of the width of X and the height of X. The factor $f = 20$ has been found to give good results for the purposes of this AC-PC segmentation method, but any similar value that is roughly in the range 10 to 30 could be used as well. The brightness-equalized image Z is then calculated as

$$Z = X * (Y_{\min} + D)/(Y + D)$$

where

$$D = (Y_{\max} - K * Y_{\min}) / (K - 1),$$

and K is a parameter that controls the amount of equalization. Ymin is the minimum pixel value in image Y, and Ymax is the maximum pixel value in image Y. The parameter K = 3 has been found to provide adequate equalization without unacceptably increasing the image noise, which is a common, however undesirable side-effect of brightness equalization.

[0029] Continuing with phase one, an edge mask of each selected axial image slice is created. Fig. 3 illustrates the brightness-equalized image 24b and its edge mask 24c. As with brightness equalization, there are several well-known techniques for creating an edge mask from an image. The results of AC-PC segmentation by the method disclosed herein do not depend strongly on the particular technique that is chosen. The Canny algorithm is a well-known and effective method used to produce an edge mask (J. Canny, "A computational approach to edge detection," IEEE Trans. Pattern Anal. Machine Intell., 8, pp. 679-698, 1986).

[0030] The symmetry axis of each axial image slice 24b (and its corresponding edge mask 24c) is determined as follows (Fig. 4). A tentative symmetry axis 38a is selected, each pixel 40a on one half of the edge mask is reflected through the tentative symmetry axis 38a, and one point is scored for each reflected pixel 40a that lands on another pixel 40b of the edge mask. These steps are iterated over a range of tentative symmetry axes, and the actual symmetry axis 38b is identified as the one that produces the highest score. This method of identifying the symmetry axis of each edge mask is less computationally complex and consequently many times faster than other known methods without sacrificing accuracy.

[0031] As illustrated in Fig. 5, the iteration range for the purposes of this AC-PC segmentation method includes a range of values 32 for the center point 34 of the tentative axes. The center point 34 is moved away from the image center by +/-20% of the image width, with a step size of 1 pixel. Also, for each center point 34 within the specified range 32, axis angles within a range 36 of +/-30° of the vertical with a step size of 1° are included in the iterative process. The step size does not need to be extremely small because the MSP orientation is refined later in phase three of the method. These parameters are dictated by the required precision of the particular application and reasonable expectations about the imaging scenario. In particular, the head is expected to be nearly vertical in these images because the

patient is lying face up in the scanner. However, this method for finding the symmetry axis would work for any angle-range and step size, though computation time becomes longer as the range increases and the step size decreases.

[0032] Fig. 6 illustrates the symmetry axes of the axial image slices 22, 24b, 26, 28, 30 fitted to a single plane 42 using a robust regression method. This plane 42 is taken to be the estimate (or approximation) of the MSP. Robust regression is a well-known technique for fitting a set of data points (in this case, the axis angles and center points) to a parameterized function (in this case, a plane). Robust regression is more computationally demanding than ordinary regression, but is often more accurate.

[0033] The second phase, approximation of the AC and PC points, begins by reformatting the volumetric image data onto the MSP estimate in order to extract a MSP image 44 as shown in Fig. 7. An active appearance model (AAM) of the brainstem and third ventricle region 46 is applied to the MSP image 44 as shown in Fig. 8. The process of obtaining an AAM is yet another widely known method (T. F. Cootes, G. J. Edwards, and C. J. Taylor, "Active appearance models," IEEE Trans. Pattern Anal. Machine Intell I, 23(6):681–685, 2001). Once the AAM 46 has found the best match for its internal model on the MSP image 44, the AC and PC point estimates 48, 50 are identified at locations in the image corresponding to locations identified in the model.

[0034] The use of an AAM to identify anatomical structures in images has several advantages over "binary" methods. For example, the AAM uses all of the grayscale information in the image, whereas binary methods convert the image to black and white, which entails a loss of information and also requires a choice for the threshold. Usually it is difficult if not impossible to find a threshold that works well across many images for this purpose. Further, the accuracy of AAM results can often be improved by training the model on additional images. There is no corresponding way to improve the results of the binary methods. The choice of the brainstem and third ventricle region for the AAM was arrived at by inspecting a large number of brain images for anatomical features that are both relatively constant across subjects and are recognizable by the AAM method, and was verified and fine-tuned by analyzing the segmentation results on a set of test images. In the case that an anatomical anomaly was expected in this region (e.g., as a result of pathology), an AAM of a different brain structure can be used to identify the AC and PC point estimates.

Alternatively, application of an AAM of a different brain structure can be used to verify that the AC and PC point estimates given by application of the brainstem and third ventricle AAM are acceptable approximations.

[0035] The third phase, refining the MSP, begins by reformatting the volumetric image data onto an axial plane passing through the AC and PC point approximations (Fig. 9). The resulting image is cropped to a region 52 just large enough to surround the AC and PC point estimates 48, 50 and a portion of the third ventricle 54. The width of the cropped image is taken to be 0.8 times the AC-PC separation distance, and the height of the cropped image is taken to be 1.1 times the AC-PC separation distance. However, in other embodiments, the dimensions of the cropped image can vary from these parameters.

[0036] An edge mask (Fig. 10) is created from the cropped image using the Canny algorithm or another comparable method known in the art. The symmetry axis 56 of the edge mask is identified using the technique discussed above in the first phase. The orientation of the symmetry axis 56 gives the refined MSP.

[0037] The fourth phase, refining the AC point, begins by reformatting the volumetric image data onto the refined MSP in order to extract a refined MSP image 58, which is shown in Figs. 11 and 12. The AC estimate 48 from phase two is projected onto the refined MSP image 58, and a rectangular region 60 approximately 6mm x 6mm and centered at the projected AC estimate 48 is identified. The brightest peak within this region is taken to be the AC point 62.

[0038] The fifth phase, refining the PC point, begins by projecting the PC estimate 50 from phase two onto the refined MSP image 58, as shown in Fig. 12. An edge mask (Fig. 13) is created from the image using the Canny algorithm or another comparable method known in the art, and a rectangular region 64 approximately 6mm x 6mm centered around the projected PC estimate 50 is identified. In Fig. 14, three points are identified (X , Y , PC) which correspond to the three stages involved in identifying the PC point from the edge mask (Fig. 13). Point X is the point on the edge mask for which the line $AC-X$ is most nearly parallel to the image gradient at X . Point Y is obtained by translating point X 1mm along the $AC-X$ line, away from AC . Finally, the PC point is identified as the largest intensity peak along the line that passes through Y and that is perpendicular to the $AC-Y$ line.

[0039] Fig. 15 is a flow chart illustrating the phases and steps of the AC-PC segmentation method discussed above.

[0040] As shown in Fig. 16, the AC-PC segmentation system can be implemented in a modular format. Each module is represented by a rectangular or rounded-corner rectangular box. The input and output data is represented by ovals—input data enters each module on the left-hand side, and output data exits each module on the right-hand side of the figure. Arrows indicate the movement of data through the system. The system functions as follows. A first estimator 66 determines a mid-sagittal plane approximation 68 from the volumetric neuroradiological image data 70. A second estimator 72 determines AC and PC point approximations 74, 76 from the mid-sagittal plane approximation 68. A first refining module 78 identifies the mid-sagittal plane 80 using the AC and PC point approximations 74, 76 as input data. A second refining module 82 identifies the AC point 84 from the mid-sagittal plane 80, and a third refining module 86 identifies the PC point 88 from the mid-sagittal plane 80 and the AC point 84.

[0041] In some embodiments, identification of the mid-sagittal plane, AC and PC via implementation of the method discussed above can serve many purposes including, but not limited to, use as input data to merge images of a subject from a plurality of imaging modalities; in interventional radiological equipment for treatment planning, subject positioning, and the like; for neuroradiological research, etc. The system and method can also be used to find AC and PC points in neuroradiological volumetric images of some animals, though certain parameters of the method require adjustment. For example, the tentative symmetry axis ranges differ based upon the positioning/orientation of the animal subject's head in the scanner.

[0042] In some embodiments, this system and method can be implemented within a picture archiving and communications system (PACS) to, for example, facilitate image normalization across subjects, or any of a wide range of objectives such as those discussed above. Alternatively or in addition, the system and method can be part of a software-implemented segmentation tool kit. This tool kit or application software implementing the method can be installed on a stand-alone computer work station or a server accessible by work stations over a network. In another embodiment, a computer-readable medium encoded with instructions to carry out the AC-PC segmentation method disclosed can be used in a

mobile device such as a PDA or laptop computer. In other embodiments, the system and method can be implemented as an automated function of an imaging modality. As such, the volumetric neuroradiological image data can be reformatted to a standard format for viewing or storage. A standard format can include several image slices at various locations and planes of interest.

[0043] Various features and advantages of the invention are set forth in the following claims.

CLAIMS

What is claimed is:

1. A computer-implemented method of determining anterior commissure (AC) and posterior commissure (PC) points in a volumetric neuroradiological image, the method comprising:
 - a computer automatically computing a mid-sagittal plane estimate to extract a mid-sagittal plane image from the volumetric neuroradiological image;
 - the computer automatically computing AC and PC point estimates in the mid-sagittal plane image;
 - the computer automatically computing a refined mid-sagittal plane estimate from the AC and PC point estimates to extract a refined mid-sagittal plane image;
 - the computer automatically computing the AC point from the refined mid-sagittal plane image; and
 - the computer automatically computing the PC point from the refined mid-sagittal plane image and the AC point.
2. The computer-implemented method of claim 1, wherein computing the mid-sagittal plane estimate comprises:
 - creating an edge mask of each of a plurality of axial image slices;
 - identifying a symmetry axis of each edge mask; and
 - fitting a plane to the symmetry axes.
3. The computer-implemented method of claim 2, further comprising equalizing brightness of the plurality of axial image slices prior to creating the edge mask.
4. The computer-implemented method of claim 2, wherein the plurality of axial image slices includes slices in a vertical range from a medulla to the top of a corpus callosum.

5. The computer-implemented method of claim 2, wherein identifying the symmetry axis of each edge mask comprises:

- (a) identifying a tentative symmetry axis, the tentative symmetry axis defining first and second halves of the edge mask;
 - (b) reflecting each pixel of the first half of the edge mask over the tentative symmetry axis;
 - (c) scoring one point for each pixel which lands on the second half of the edge mask; and
 - (d) adding each point into a total score for the tentative symmetry axis;
- the method further comprising,
- iterating acts (a), (b), (c), and (d) for each of a range of tentative symmetry axes; and
- identifying the tentative symmetry axis with the highest total score as the symmetry axis.

6. The computer-implemented method of claim 2, wherein fitting a plane to the symmetry axes comprises use of a robust regression method.

7. The computer-implemented method of claim 1, wherein computing AC and PC point estimates comprises applying an active appearance model to the mid-sagittal plane image.

8. The computer-implemented method of claim 7, wherein the active appearance model is one of a brainstem and third ventricle region.

9. The computer-implemented method of claim 1, wherein computing the refined mid-sagittal plane estimate comprises:

reformatting a plurality of axial image slices onto a plane which is perpendicular to the mid-sagittal plane estimate and which passes through the AC and PC point estimates;

extracting an axial plane image;

cropping the axial plane image to a region including the AC and PC point estimates and at least a portion of a brain ventricle extending therebetween;

creating an edge mask of the cropped axial plane image; and

identifying a symmetry axis of the cropped axial plane image.

10. The computer-implemented method of claim 9, wherein the symmetry axis of the edge mask is identified by,

(a) identifying a tentative symmetry axis, the tentative symmetry axis defining first and second halves of the edge mask;

(b) reflecting each pixel of the first half of the edge mask over the tentative symmetry axis;

(c) scoring one point for each pixel which lands on the second half of the edge mask; and

(d) adding each point into a total score for the tentative symmetry axis;

the method further comprising,

iterating acts (a), (b), (c), and (d) for each of a range of tentative symmetry axes; and

identifying the tentative symmetry axis with the highest total score as the symmetry axis.

11. The computer-implemented method of claim 1, wherein computing the AC point comprises:

projecting the AC point estimate onto the refined mid-sagittal plane image; and

identifying a brightness peak within a region surrounding the projected AC point estimate as the AC point.

12. The computer-implemented method of claim 1, wherein computing the PC point comprises:

projecting the PC point estimate onto the refined mid-sagittal plane image;

creating an edge mask of the refined mid-sagittal plane image;

identifying a point X within a region surrounding the projected PC point estimate, which lies on the edge mask, and for which a gradient of the refined mid-sagittal plane image is approximately parallel to a direction from the AC point to the point X;

obtaining a point Y by translating the point X along the direction from the AC point to the point X; and

identifying an intensity peak in a direction perpendicular to the direction from the AC point to Y as the PC point.

13. An image processing computing system configured to determine anterior commissure (AC) and posterior commissure (PC) points in a volumetric neuroradiological image, the computing system comprising:

a first estimator to determine a mid-sagittal plane approximation from the volumetric neuroradiological image;

a second estimator to determine AC and PC point approximations from the mid-sagittal plane approximation;

a first refining module to identify a refined mid-sagittal plane using the AC and PC point approximations;

a second refining module to identify a refined AC point from the refined mid-sagittal plane; and

a third refining module to identify a refined PC point from the refined mid-sagittal plane and the refined AC point.

14. The image processing computing system of claim 13 for implementation within a picture archiving and communications system (PACS).

15. The image processing computing system of claim 13, wherein the volumetric neuroradiological image is obtained from a database accessible via the internet.
16. The image processing computing system of claim 13 wherein the processing system is a component of a segmentation tool kit.
17. A computer readable medium encoded with a plurality of processor executable instructions for identifying anterior commissure (AC) and posterior commissure (PC) points in a volumetric neuroradiological image, the instructions enabling the execution of a method comprising:
 - determining a mid-sagittal plane estimate to extract a mid-sagittal plane image from the volumetric neuroradiological image;
 - determining AC and PC point estimates in the mid-sagittal plane image;
 - determining a mid-sagittal plane from the AC and PC point estimates to extract a refined mid-sagittal plane image;
 - determining the AC point from the refined mid-sagittal plane image; and
 - determining the PC point from the refined mid-sagittal plane image and the AC point.
18. The computer readable medium of claim 17 being installed on a processor within a picture archiving and communications system (PACS).
19. The computer readable medium of claim 18, wherein the AC and PC points are input data used in interventional radiological equipment.
20. The computer readable medium of claim 18, wherein the AC and PC points are input data used to merge images from a plurality of imaging modalities.
21. A computer-implemented method of determining an anterior commissure (AC) point and a posterior commissure (PC) point in a volumetric image, the method comprising:

a computer automatically creating an edge mask of each of a plurality of axial image slices included in the volumetric image;

the computer automatically identifying a symmetry axis of each edge mask;

the computer automatically fitting a plane to the symmetry axes, the plane defining a mid-sagittal plane estimate;

the computer automatically extracting a mid-sagittal image from the volumetric image based on the mid-sagittal plane estimate; and

the computer automatically computing the AC point and the PC point in the mid-sagittal plane image.

22. The computer-implemented method of claim 21, wherein computing AC and PC points in the mid-sagittal plane image includes:

determining the AC point and the PC point in the mid-sagittal plane image;

determining a refined mid-sagittal plane estimate based on the AC point and the PC point;

extracting a refined mid-sagittal plane image from the volumetric image based on the refined mid-sagittal plane estimate; and

updating at least one of the AC point and the PC point based on the refined mid-sagittal plane image.

23. The computer-implemented method of claim 22, wherein updating at least one of the AC point and the PC point includes updating the PC point based on the refined mid-sagittal plane image and the AC point.

24. The computer-implemented method of claim 21, further comprising equalizing brightness of the plurality of axial image slices prior to creating the edge mask.

25. The computer-implemented method of claim 21, wherein the plurality of axial image slices includes slices in a vertical range from a medulla to a top of a corpus callosum.
26. The computer-implemented method of claim 21, wherein identifying a symmetry axis of each edge mask includes:
- (a) identifying a tentative symmetry axis, the tentative symmetry axis defining first and second halves of the edge mask;
 - (b) reflecting each pixel of the first half of the edge mask over the tentative symmetry axis;
 - (c) scoring one point for each pixel which lands on the second half of the edge mask; and
 - (d) adding each point into a total score for the tentative symmetry axis;
- the method further comprising, iterating acts (a), (b), (c), and (d) for each of a range of tentative symmetry axes and identifying the tentative symmetry axis with the highest total score as the symmetry axis.
27. The computer-implemented method of claim 22, wherein computing the AC point and the PC point comprises applying an active appearance model to the mid-sagittal plane image.
28. The computer-implemented method of claim 27, wherein the active appearance model is one of a brainstem and third ventricle region.
29. The computer-implemented method of claim 22, wherein determining the refined mid-sagittal plane estimate comprises:
- reformatting a plurality of axial image slices onto a plane which is perpendicular to the mid-sagittal plane estimate and which passes through the AC point and the PC point;
 - extracting an axial plane image;

cropping the axial plane image to a region including the AC point and the PC point and at least a portion of a brain ventricle extending therebetween;

creating an edge mask of the cropped axial plane image; and

identifying a symmetry axis of the cropped axial plane image.

30. The computer-implemented method of claim 29, wherein identifying the symmetry axis of the cropped axial plane image comprises:

(a) identifying a tentative symmetry axis, the tentative symmetry axis defining first and second halves of the edge mask;

(b) reflecting each pixel of the first half of the edge mask over the tentative symmetry axis;

(c) scoring one point for each pixel which lands on the second half of the edge mask; and

(d) adding each point into a total score for the tentative symmetry axis;

the method further comprising, iterating acts (a), (b), (c), and (d) for each of a range of tentative symmetry axes; and identifying the tentative symmetry axis with the highest total score as the symmetry axis.

31. The computer-implemented method of claim 22, wherein updating at least one of the AC point and the PC point comprises:

projecting the AC point onto the refined mid-sagittal plane image;

identifying a brightness peak within a region surrounding the projected AC point; and

updating the AC point based on the brightness peak.

32. The computer-implemented method of claim 22, wherein updating at least one of the AC point and the PC point comprises:

projecting the PC point onto the refined mid-sagittal plane image;

creating an edge mask of the refined mid-sagittal plane image;

identifying a point X within a region surrounding the projected PC point, which lies on the edge mask, and for which a gradient of the refined mid-sagittal plane image is approximately parallel to a direction from the AC point to the point X;

obtaining a point Y by translating the point X along the direction from the AC point to the point X;

identifying an intensity peak in a direction perpendicular to the direction from the AC point to Y; and

updating the PC point based on the intensity peak.

33. An image processing computing system configured to determine an anterior commissure (AC) point and a posterior commissure (PC) point in a volumetric image, the computing system comprising:

a first module configured to identify a mid-sagittal plane image included in the volumetric image using an AC point approximation and a PC point approximation;

a second module configured to identify a refined AC point based on the mid-sagittal plane image; and

a third module configured to identify a refined PC point based on the mid-sagittal plane image and the refined AC point.

34. The image processing computing system of claim 33, further comprising:

a first estimator configured to determine a mid-sagittal plane approximation based on the volumetric image; and

a second estimator configured to determine the AC point approximation and the PC point approximation based on the mid-sagittal plane approximation.

35. The image processing computing system of claim 33, wherein the first estimator is configured to determine the mid-sagittal plane approximation by:
- creating an edge mask of each of a plurality of axial image slices included in the volumetric image;
 - identifying a symmetry axis of each edge mask;
 - fitting a plane to the symmetry axes;
 - determining, a mid-sagittal plane estimate based on fitting a plane to the symmetry axis;
- and
- extracting the mid-sagittal plane approximation based on the mid-sagittal plane estimate.
36. The image processing computing system of claim 35, wherein the first estimator is further configured to equalize brightness of the plurality of axial image slices prior to creating the edge mask.
37. A non-transitory computer readable medium encoded with a plurality of processor-executable instructions for identifying an anterior commissure (AC) point and a posterior commissure (PC) point in a volumetric image, the instructions including instructions for:
- determining a mid-sagittal plane estimate to extract a mid-sagittal plane image from the volumetric image;
 - estimating the AC point and the PC point in the mid-sagittal plane image;
 - determining a refined mid-sagittal plane based on the AC point and the PC point to extract a refined mid-sagittal plane image; and
 - updating at least one of the AC point and the PC point based on the refined mid-sagittal plane image.

38. The computer readable medium of claim 37, wherein the instructions for updating at least one of the AC point and the PC point includes instructions for updating the PC point based on the refined mid-sagittal plane image and the AC point.

39. The computer readable medium of claim 37, wherein the instructions for determining the mid-sagittal plane estimate includes instructions for:

creating an edge mask of each of a plurality of axial image slices included in the volumetric image;

identifying a symmetry axis of each edge mask;

fitting a plane to the symmetry axes, the plane defining the mid-sagittal plane estimate.

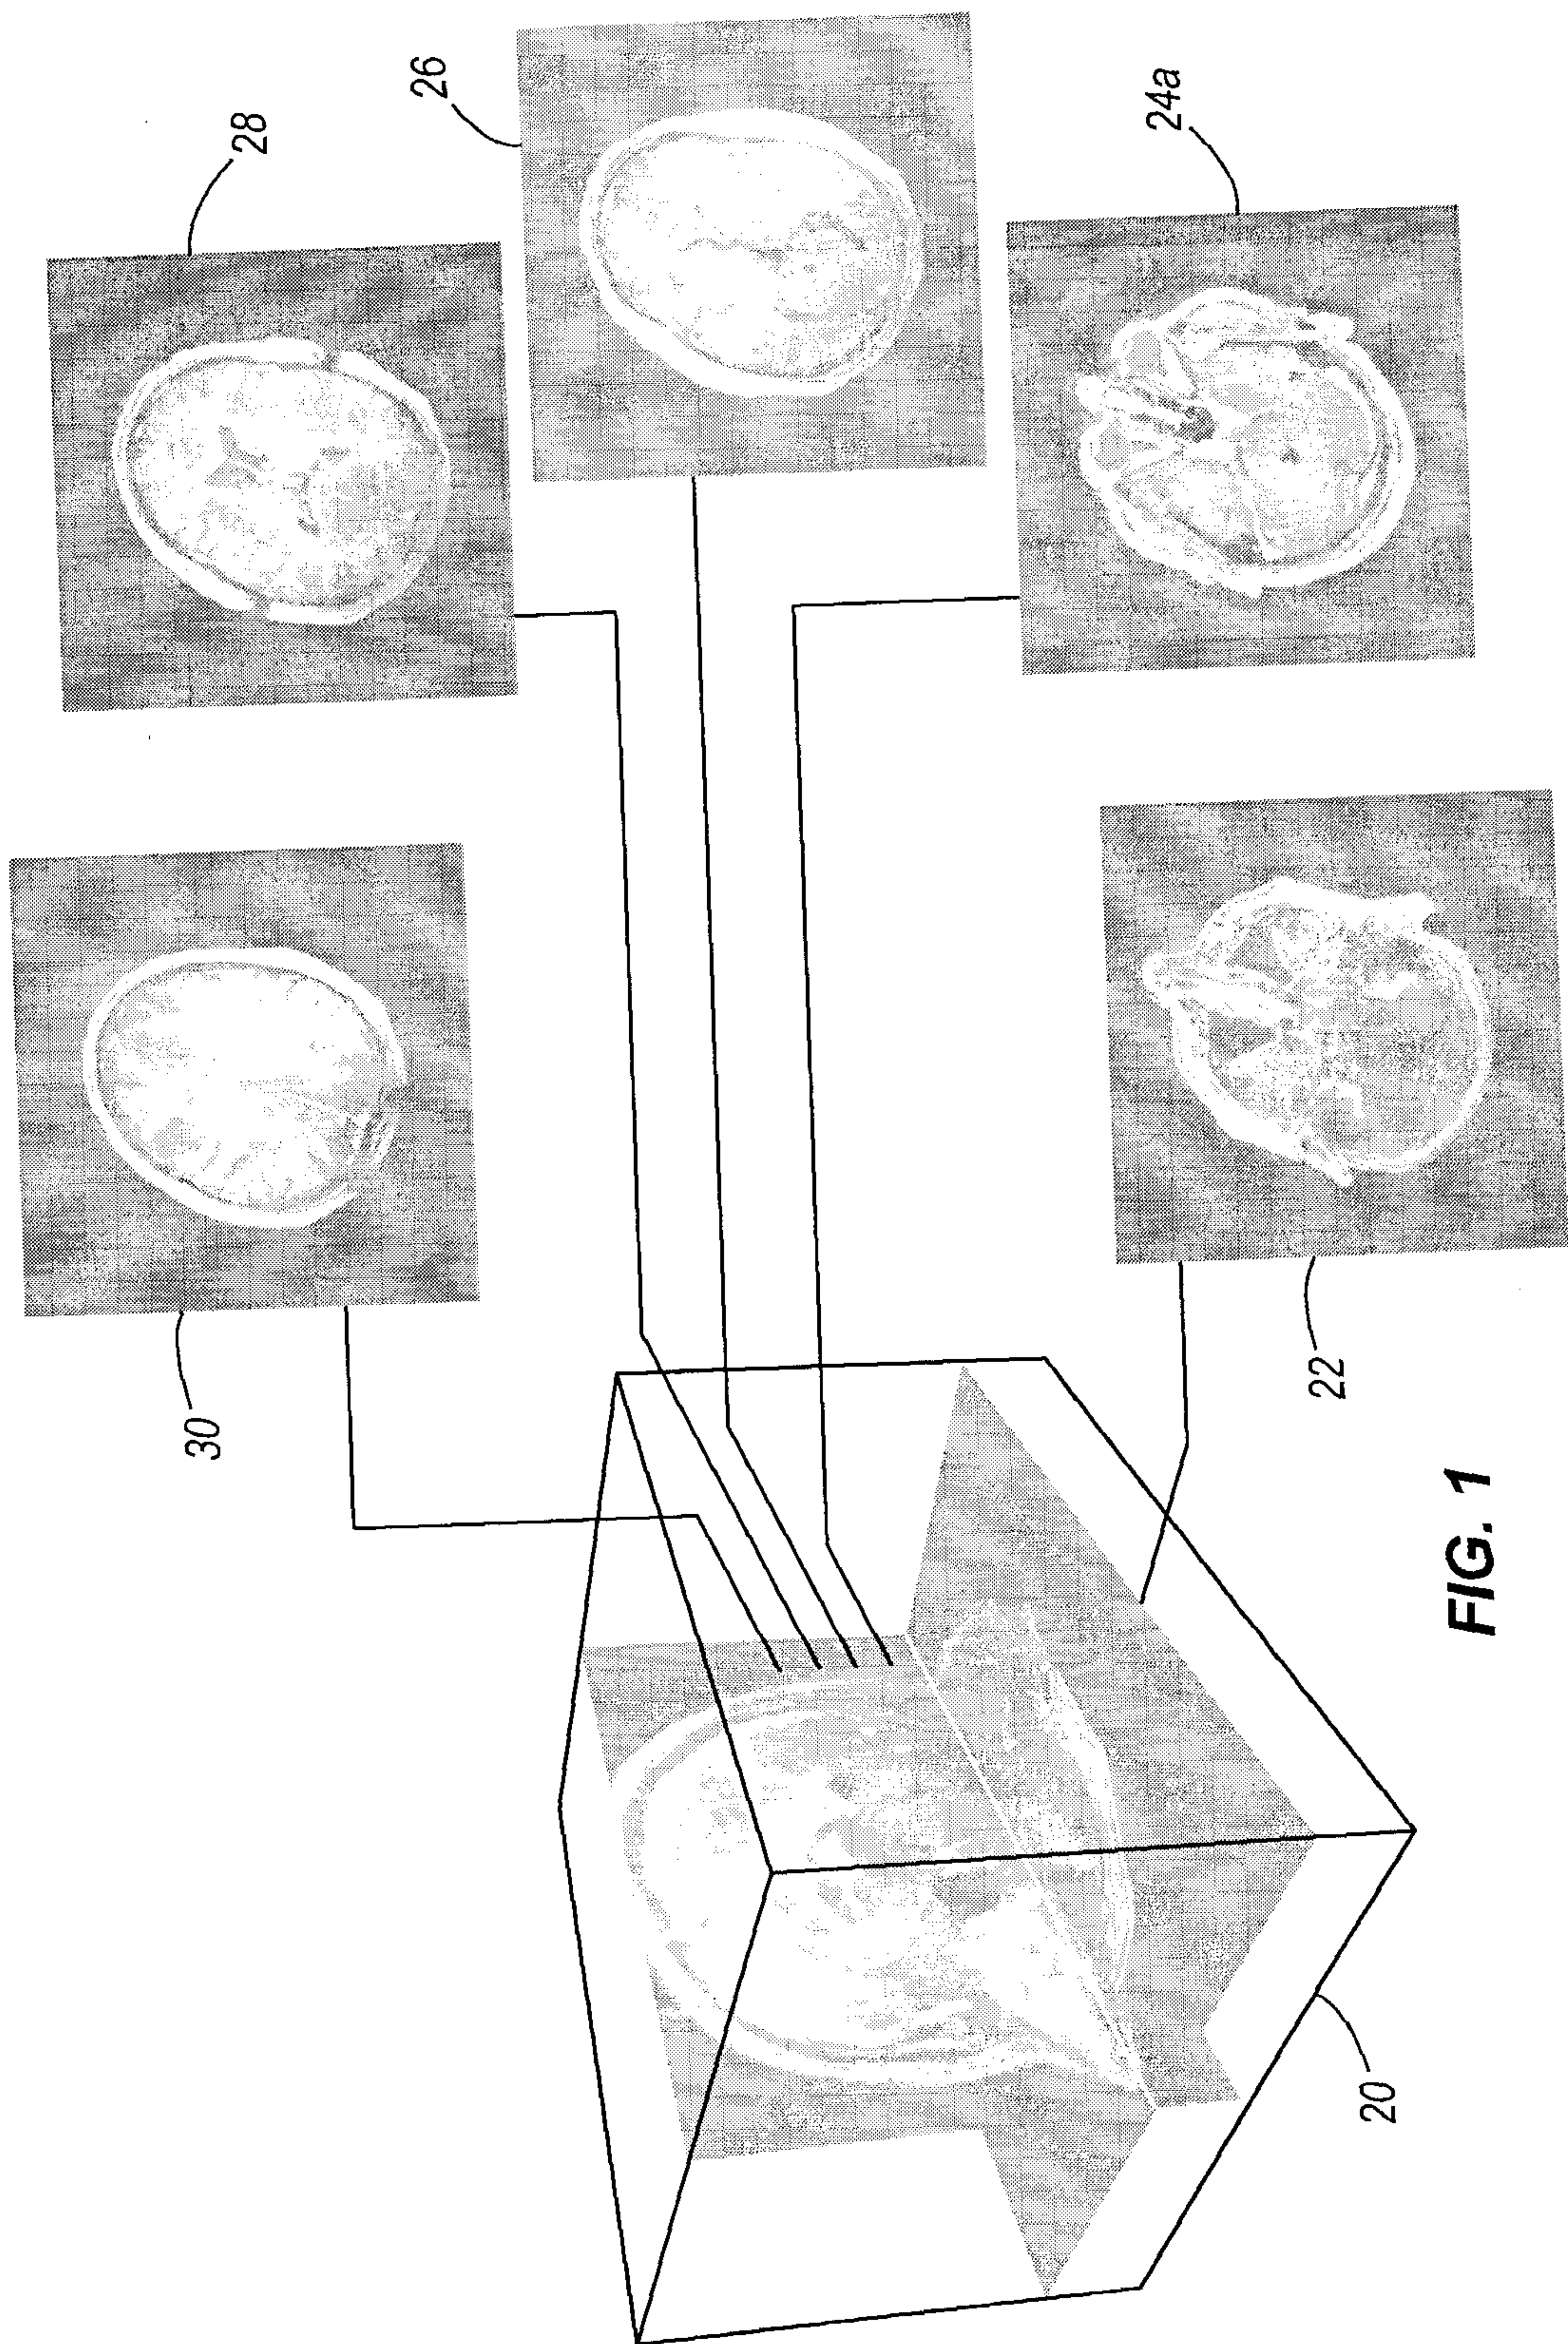
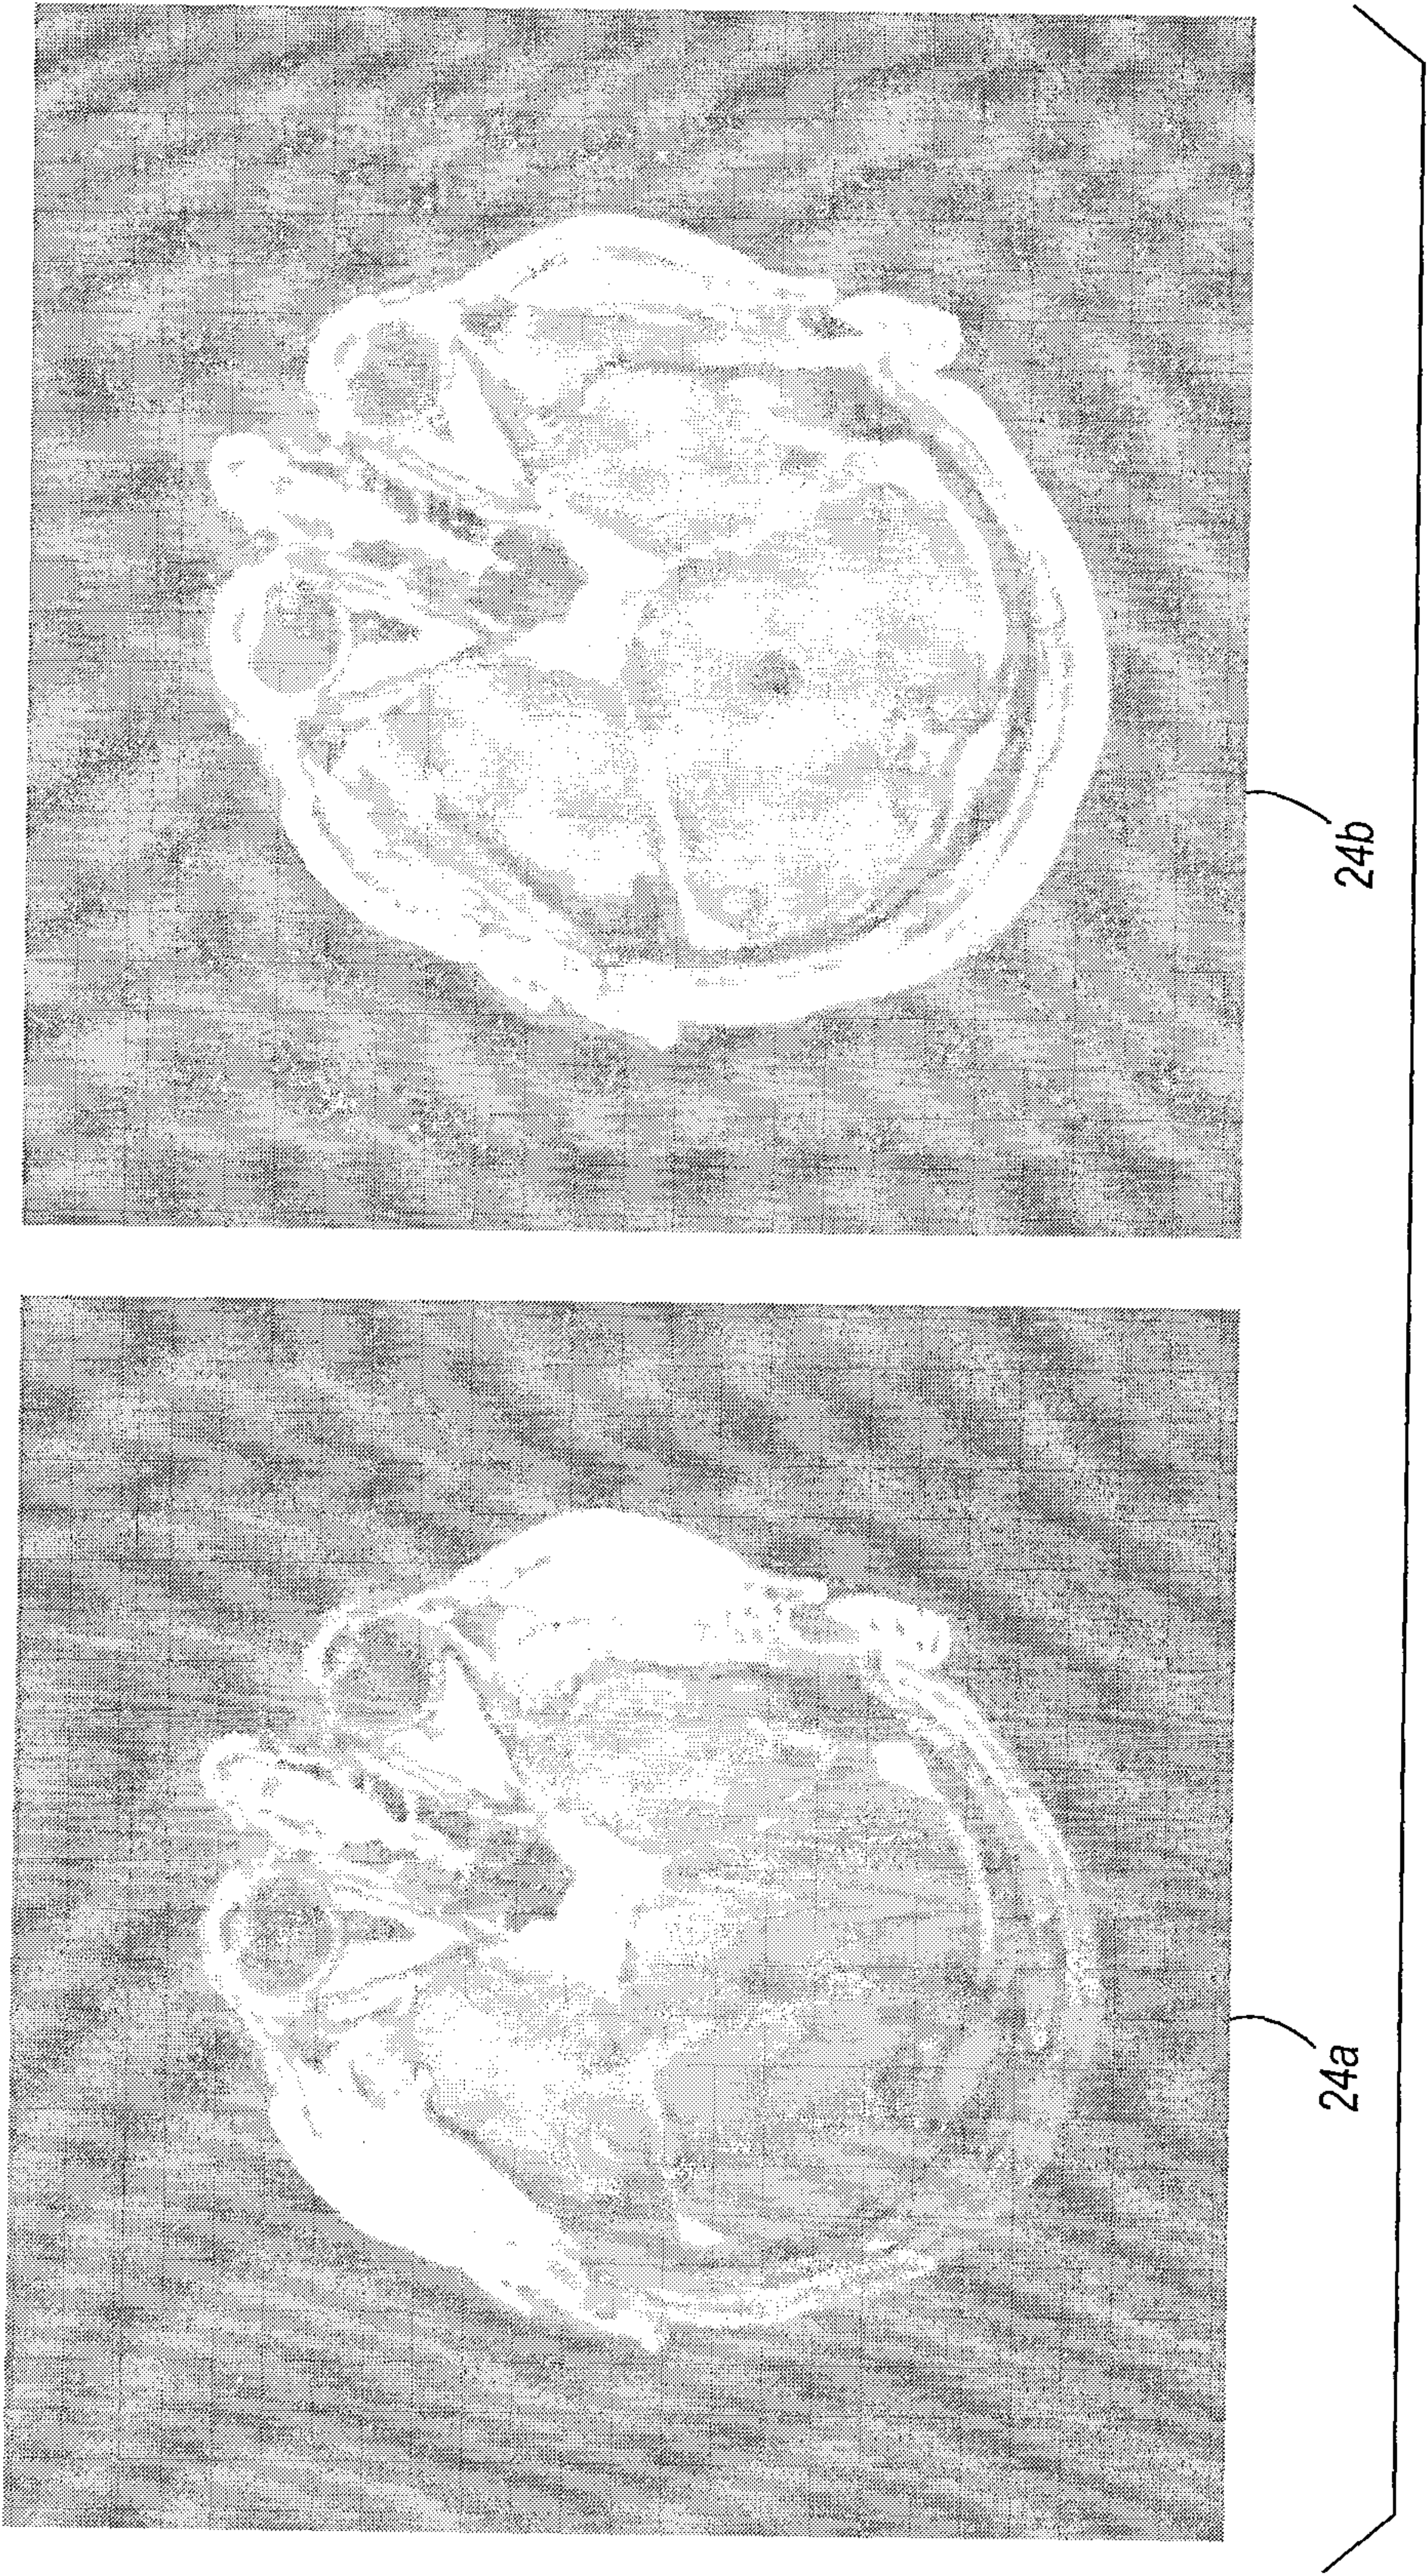


FIG. 1



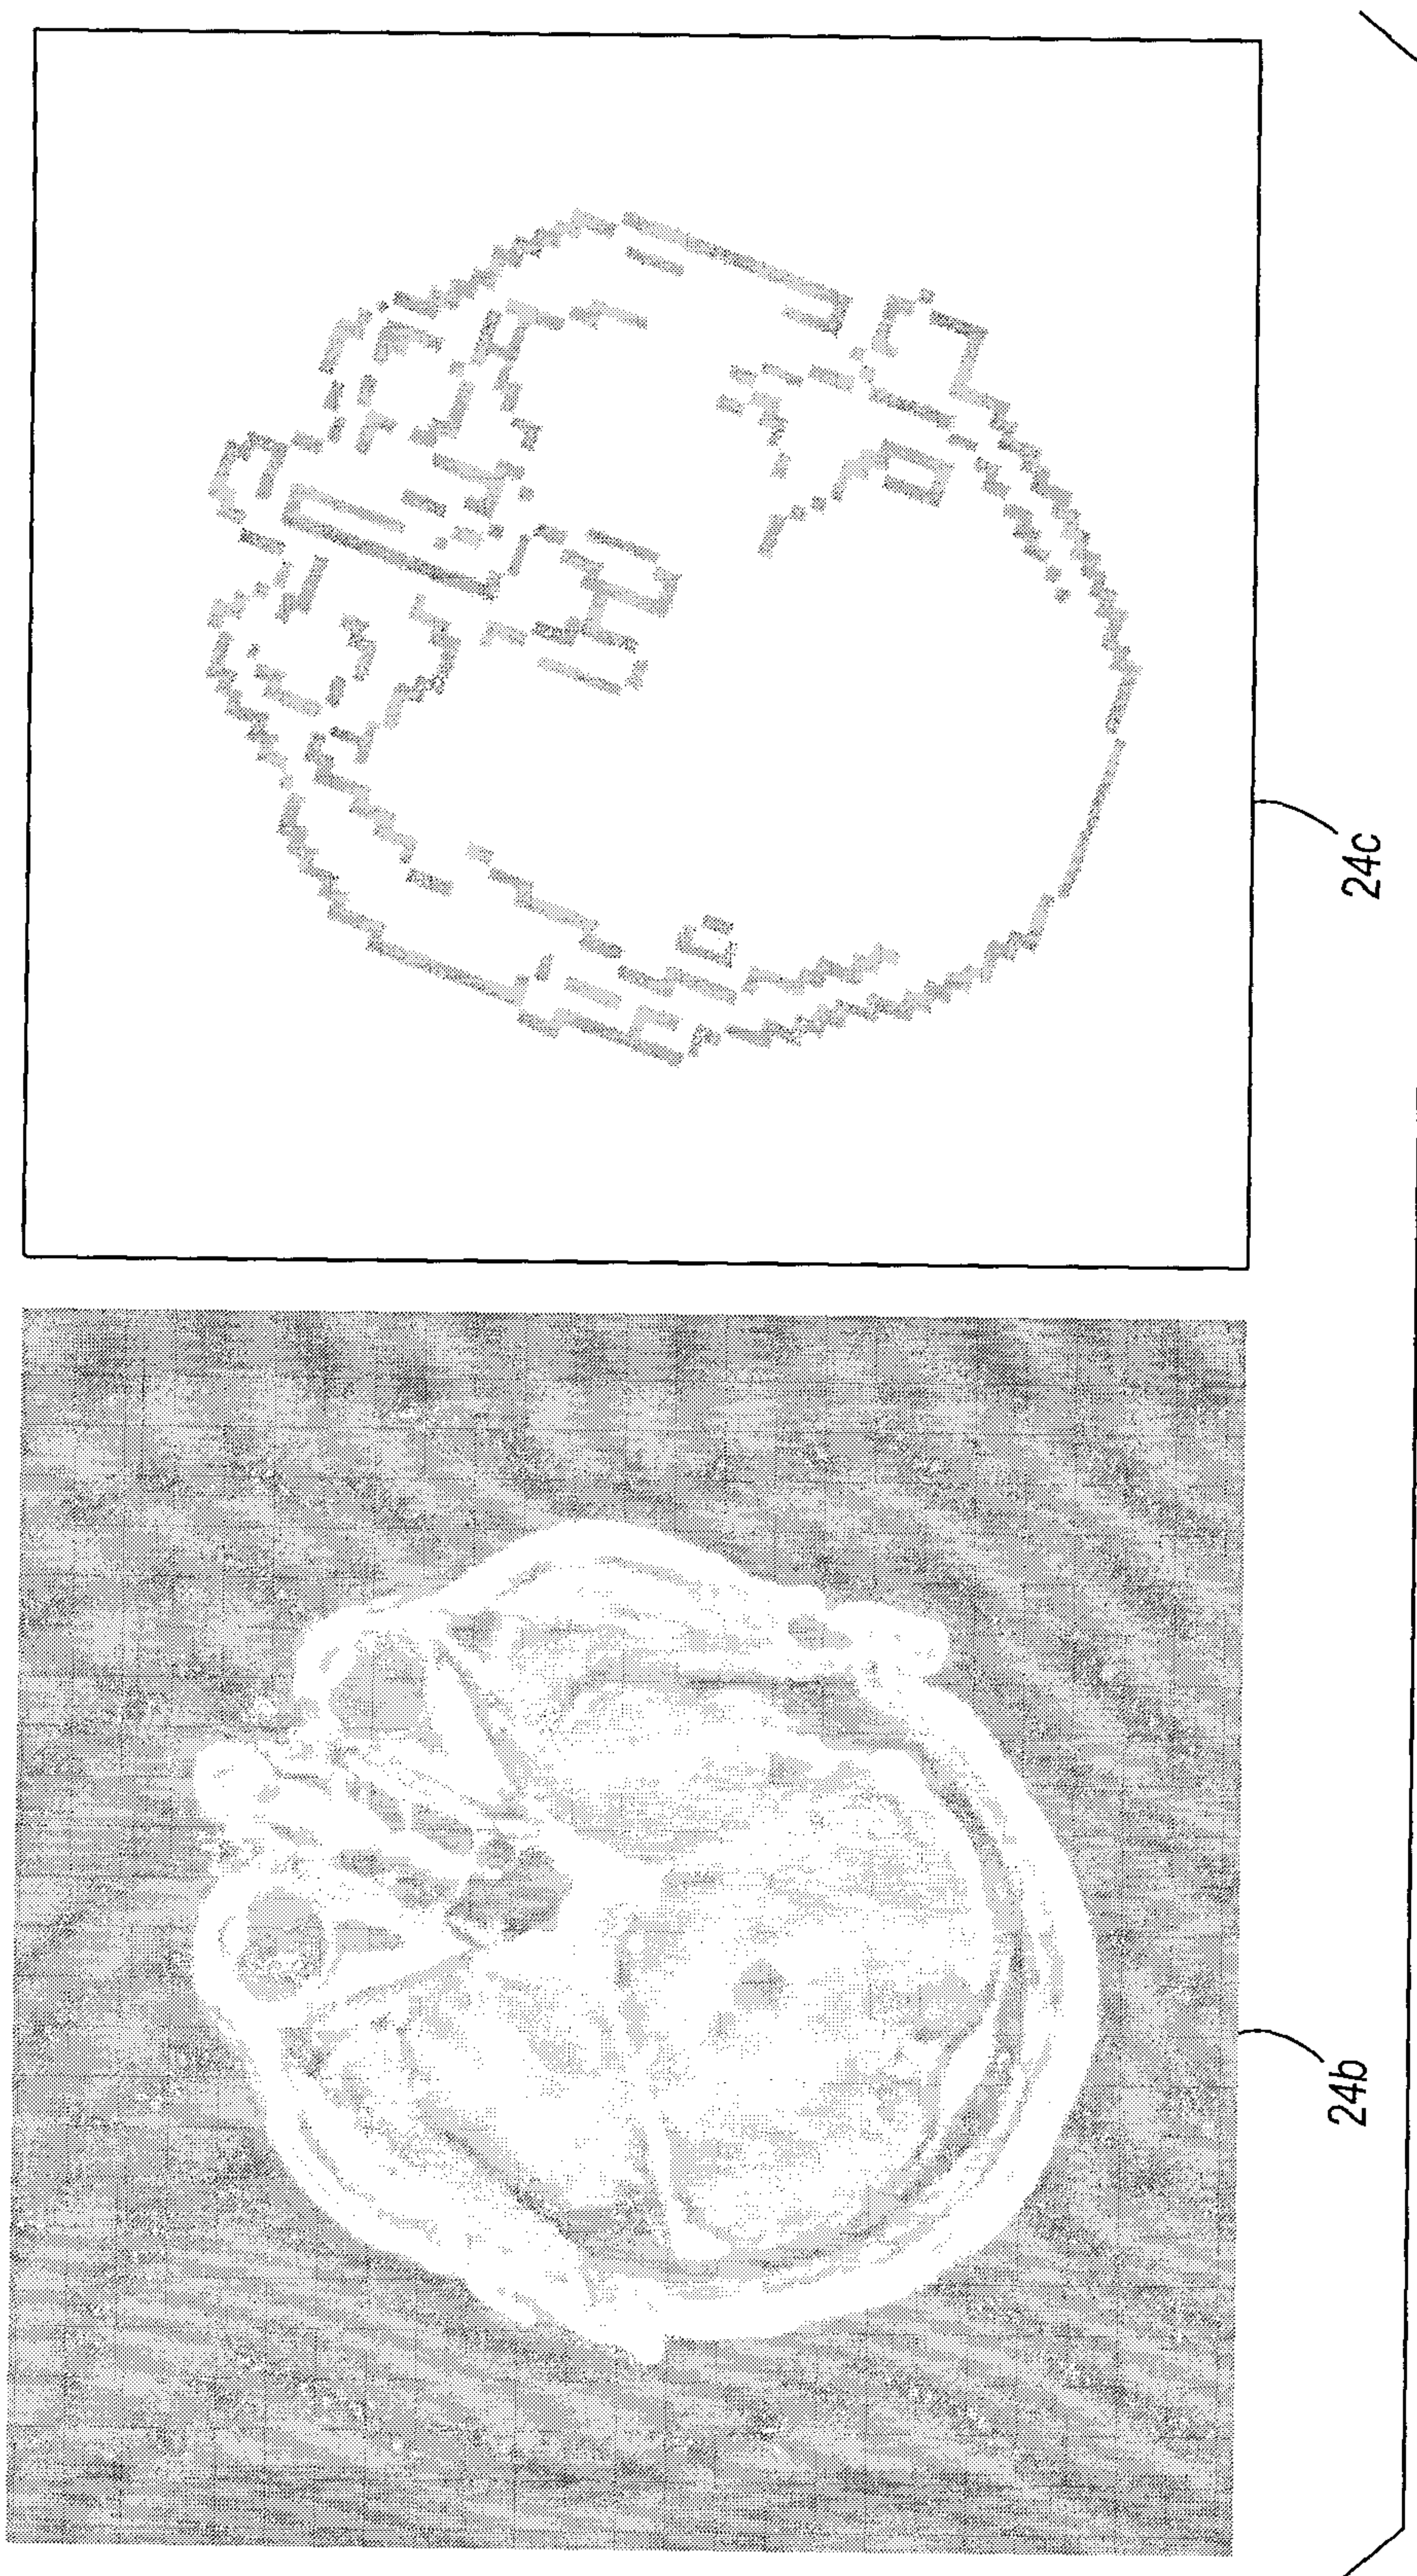
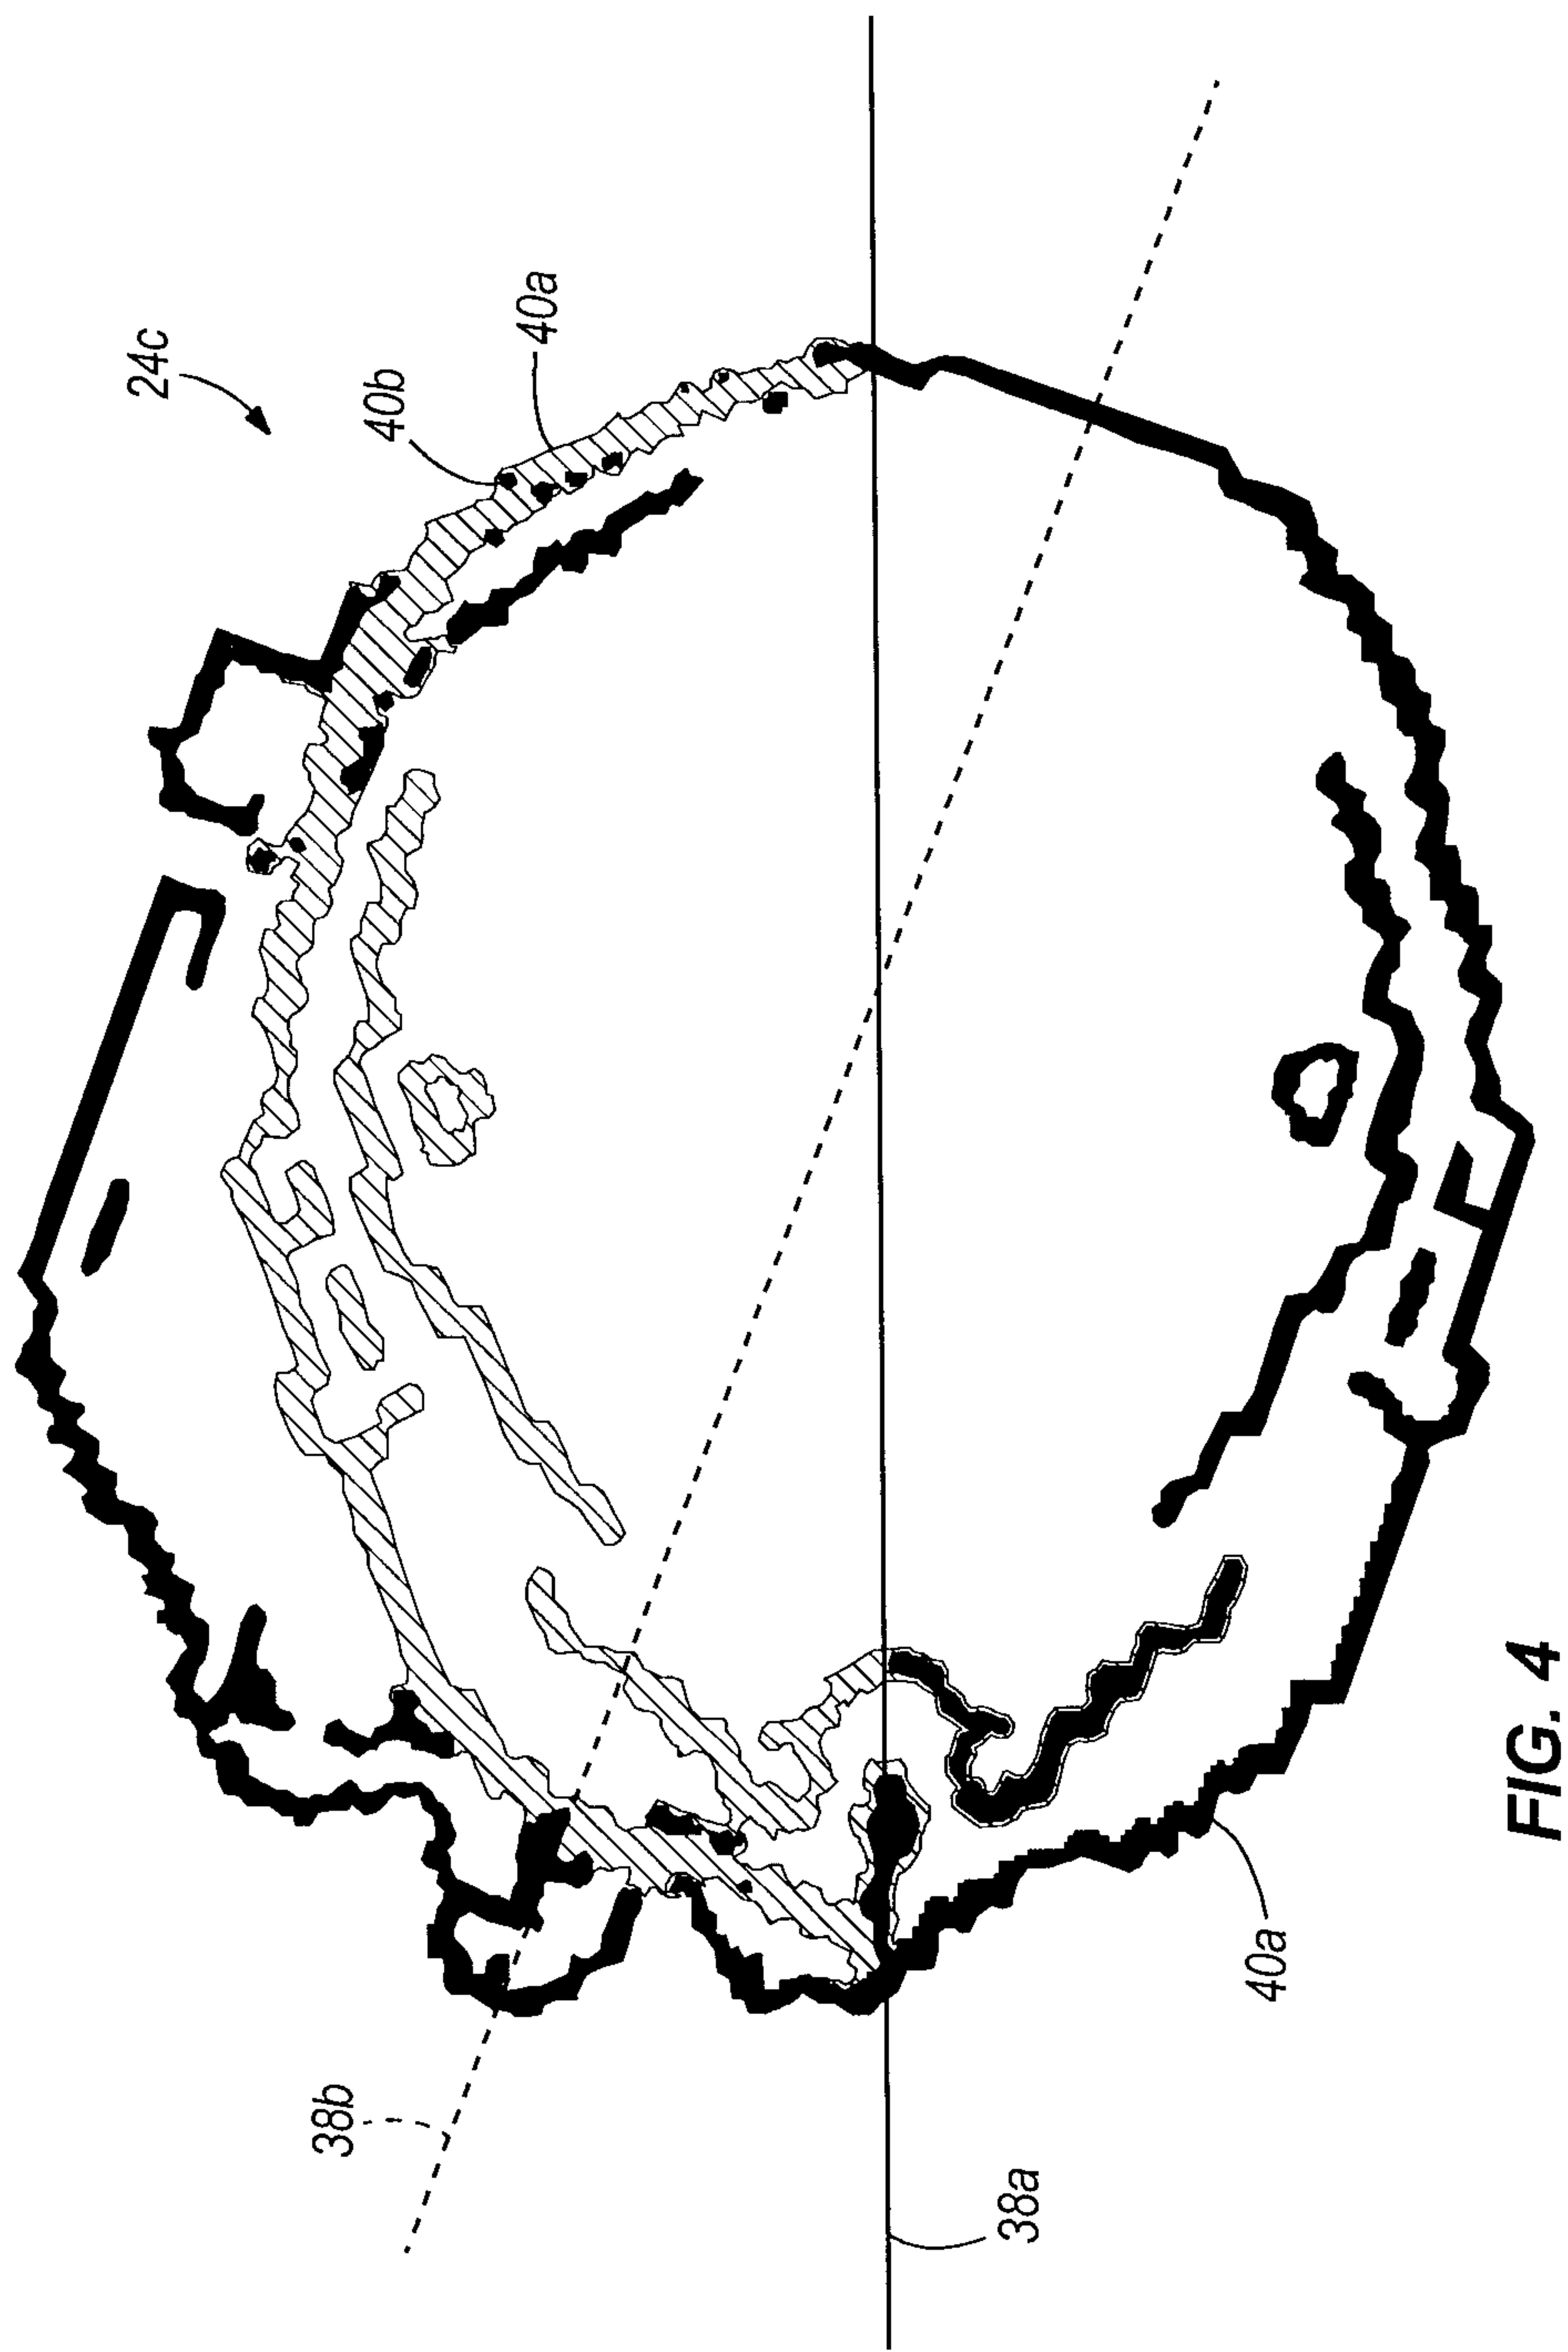
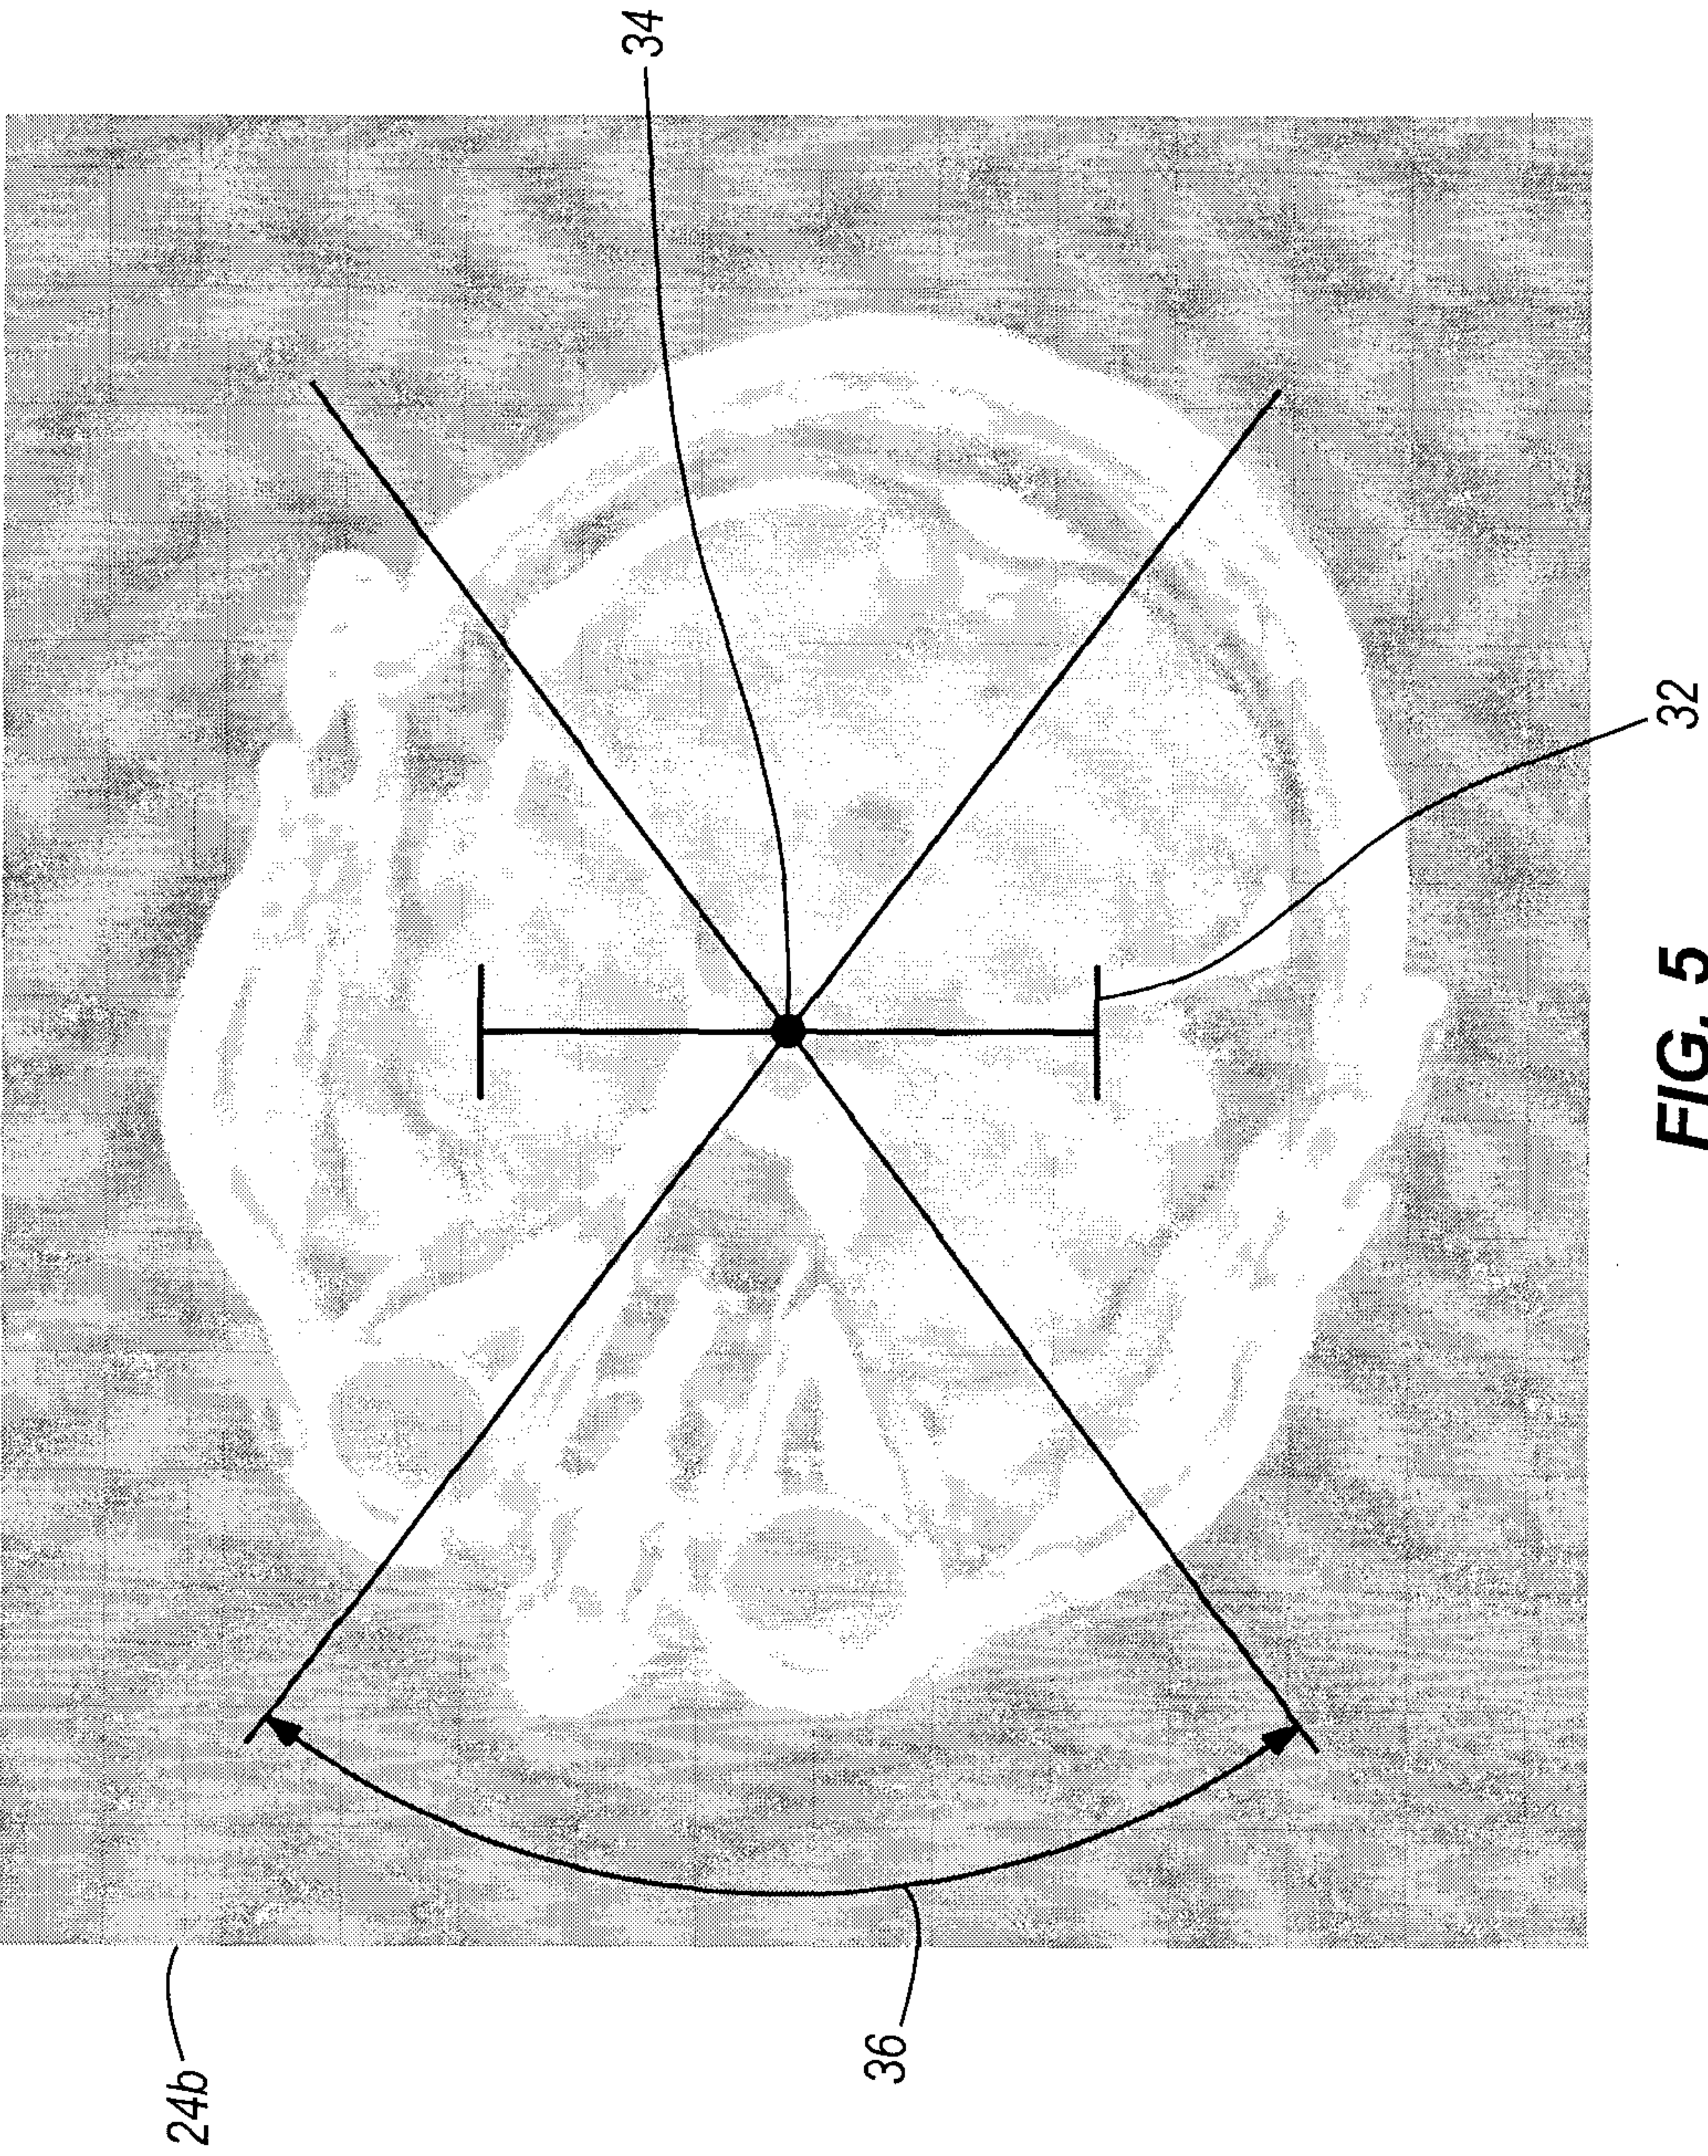


FIG. 3





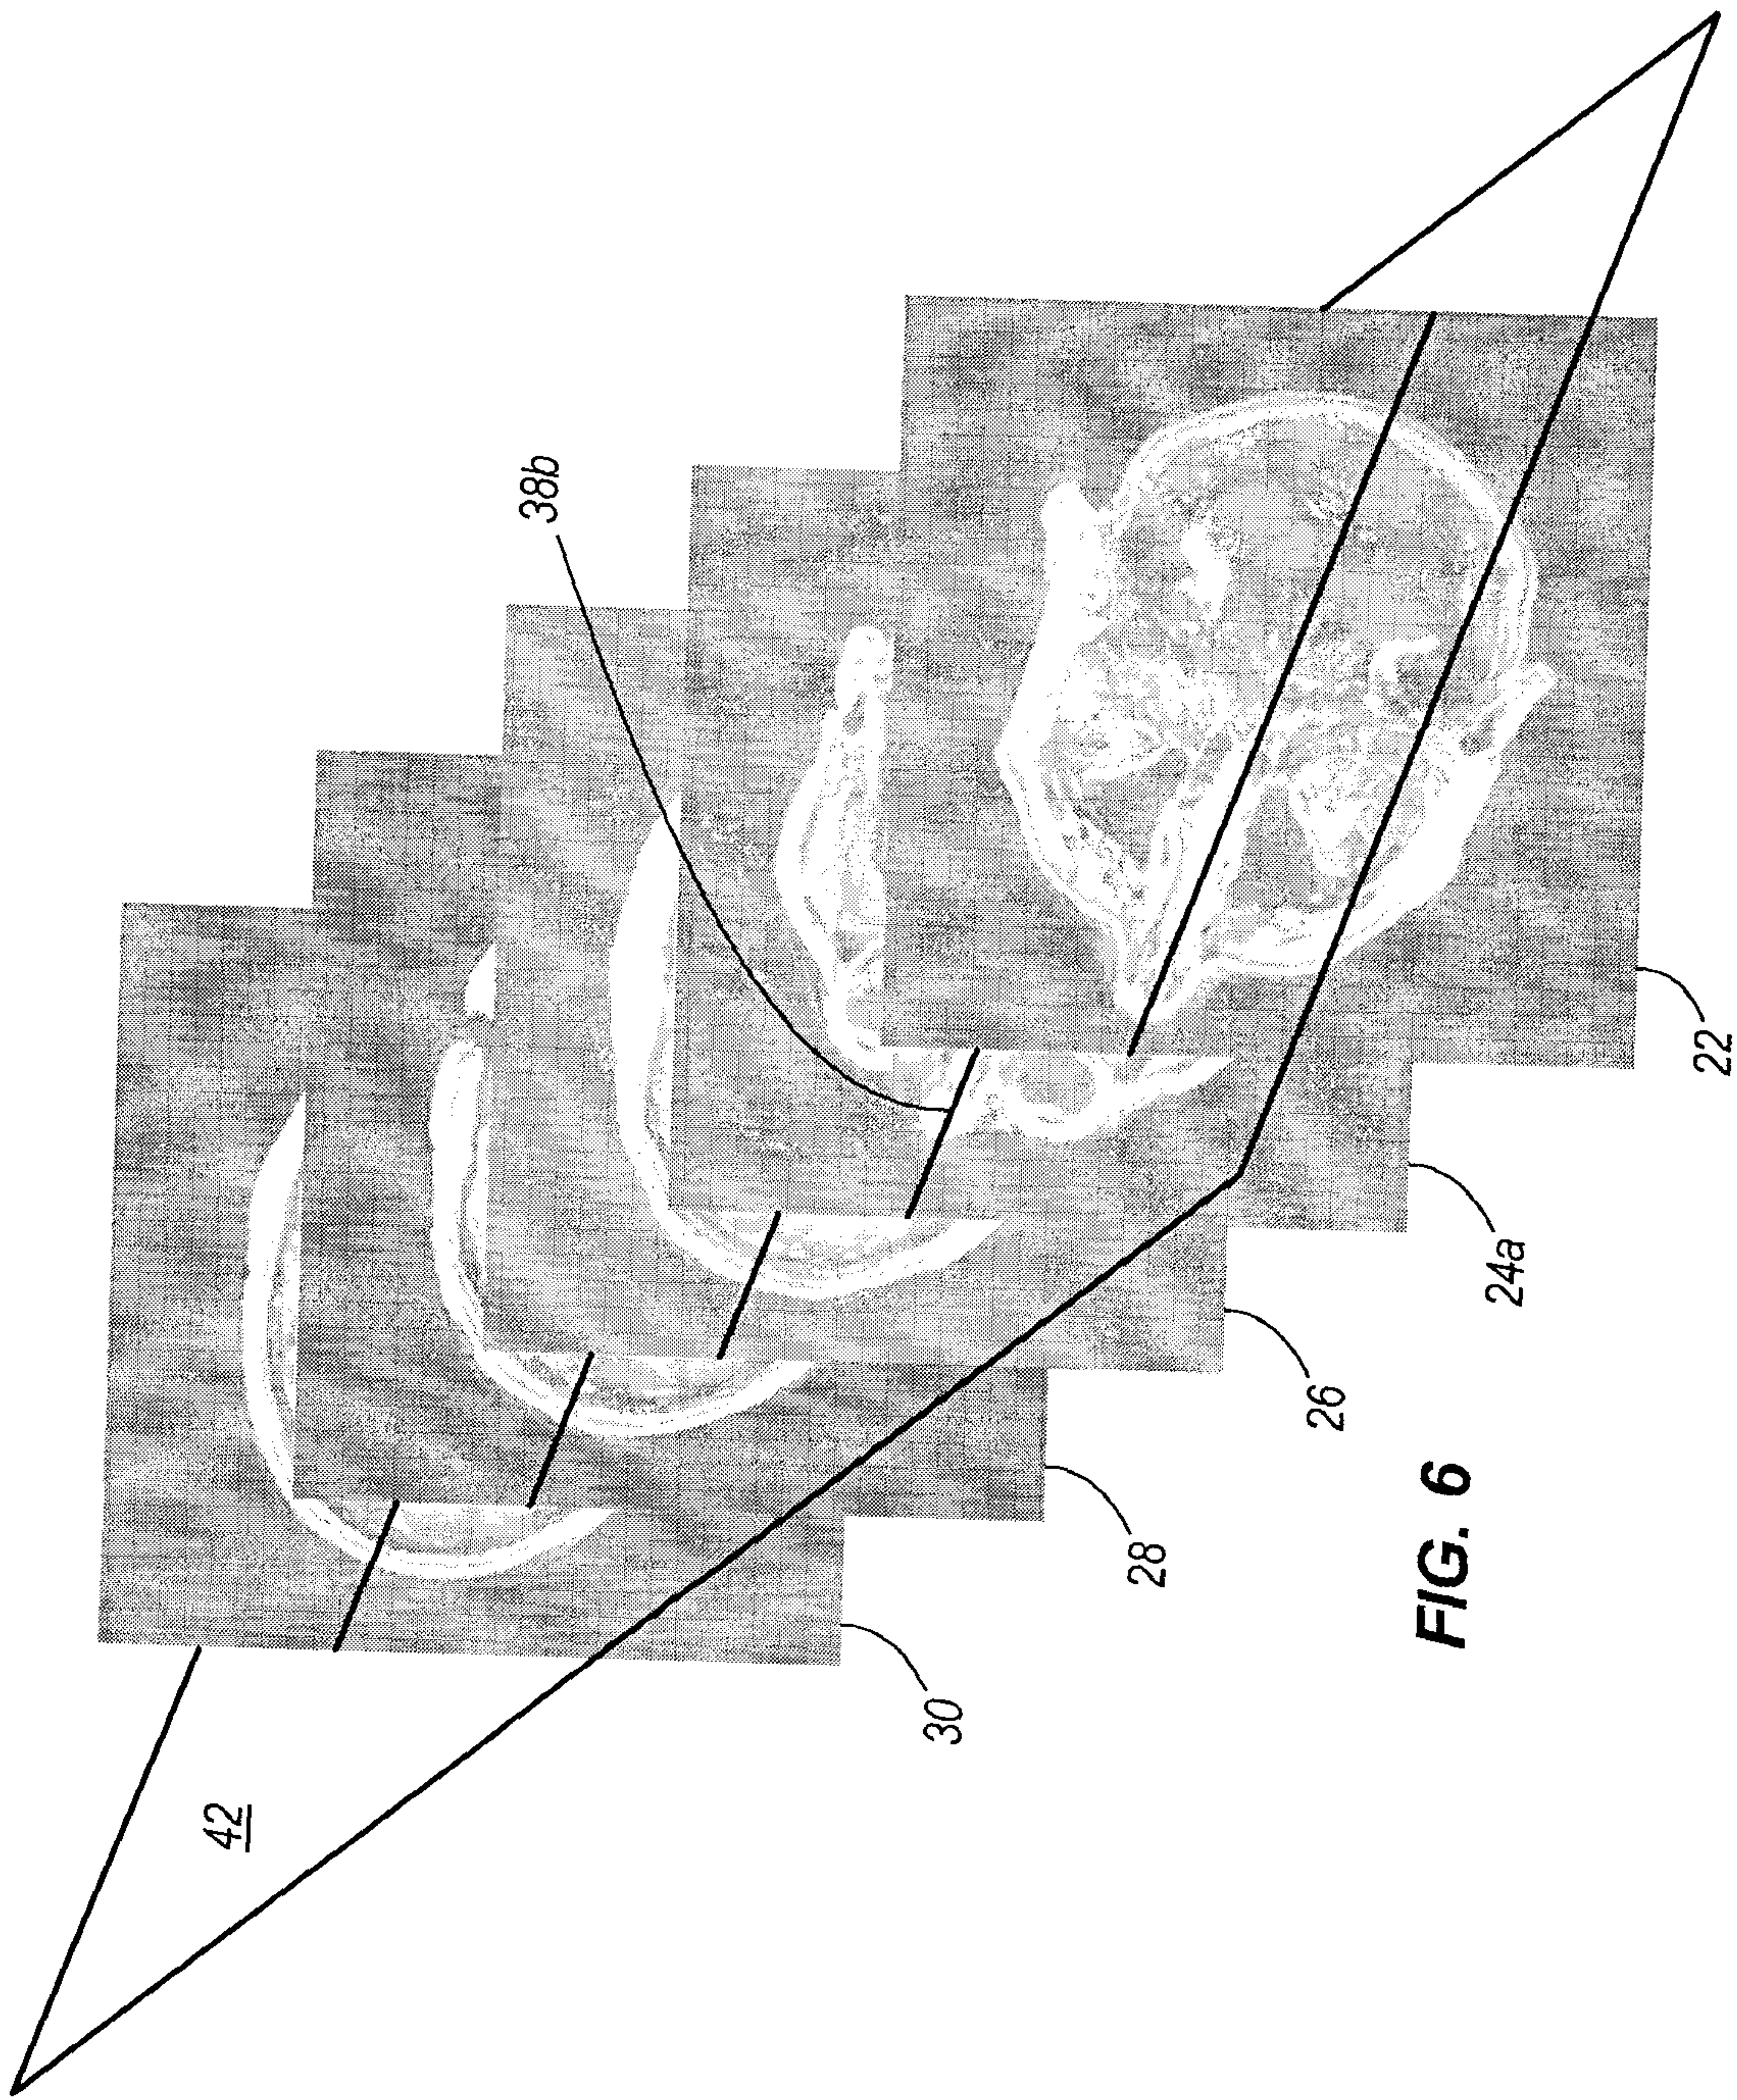
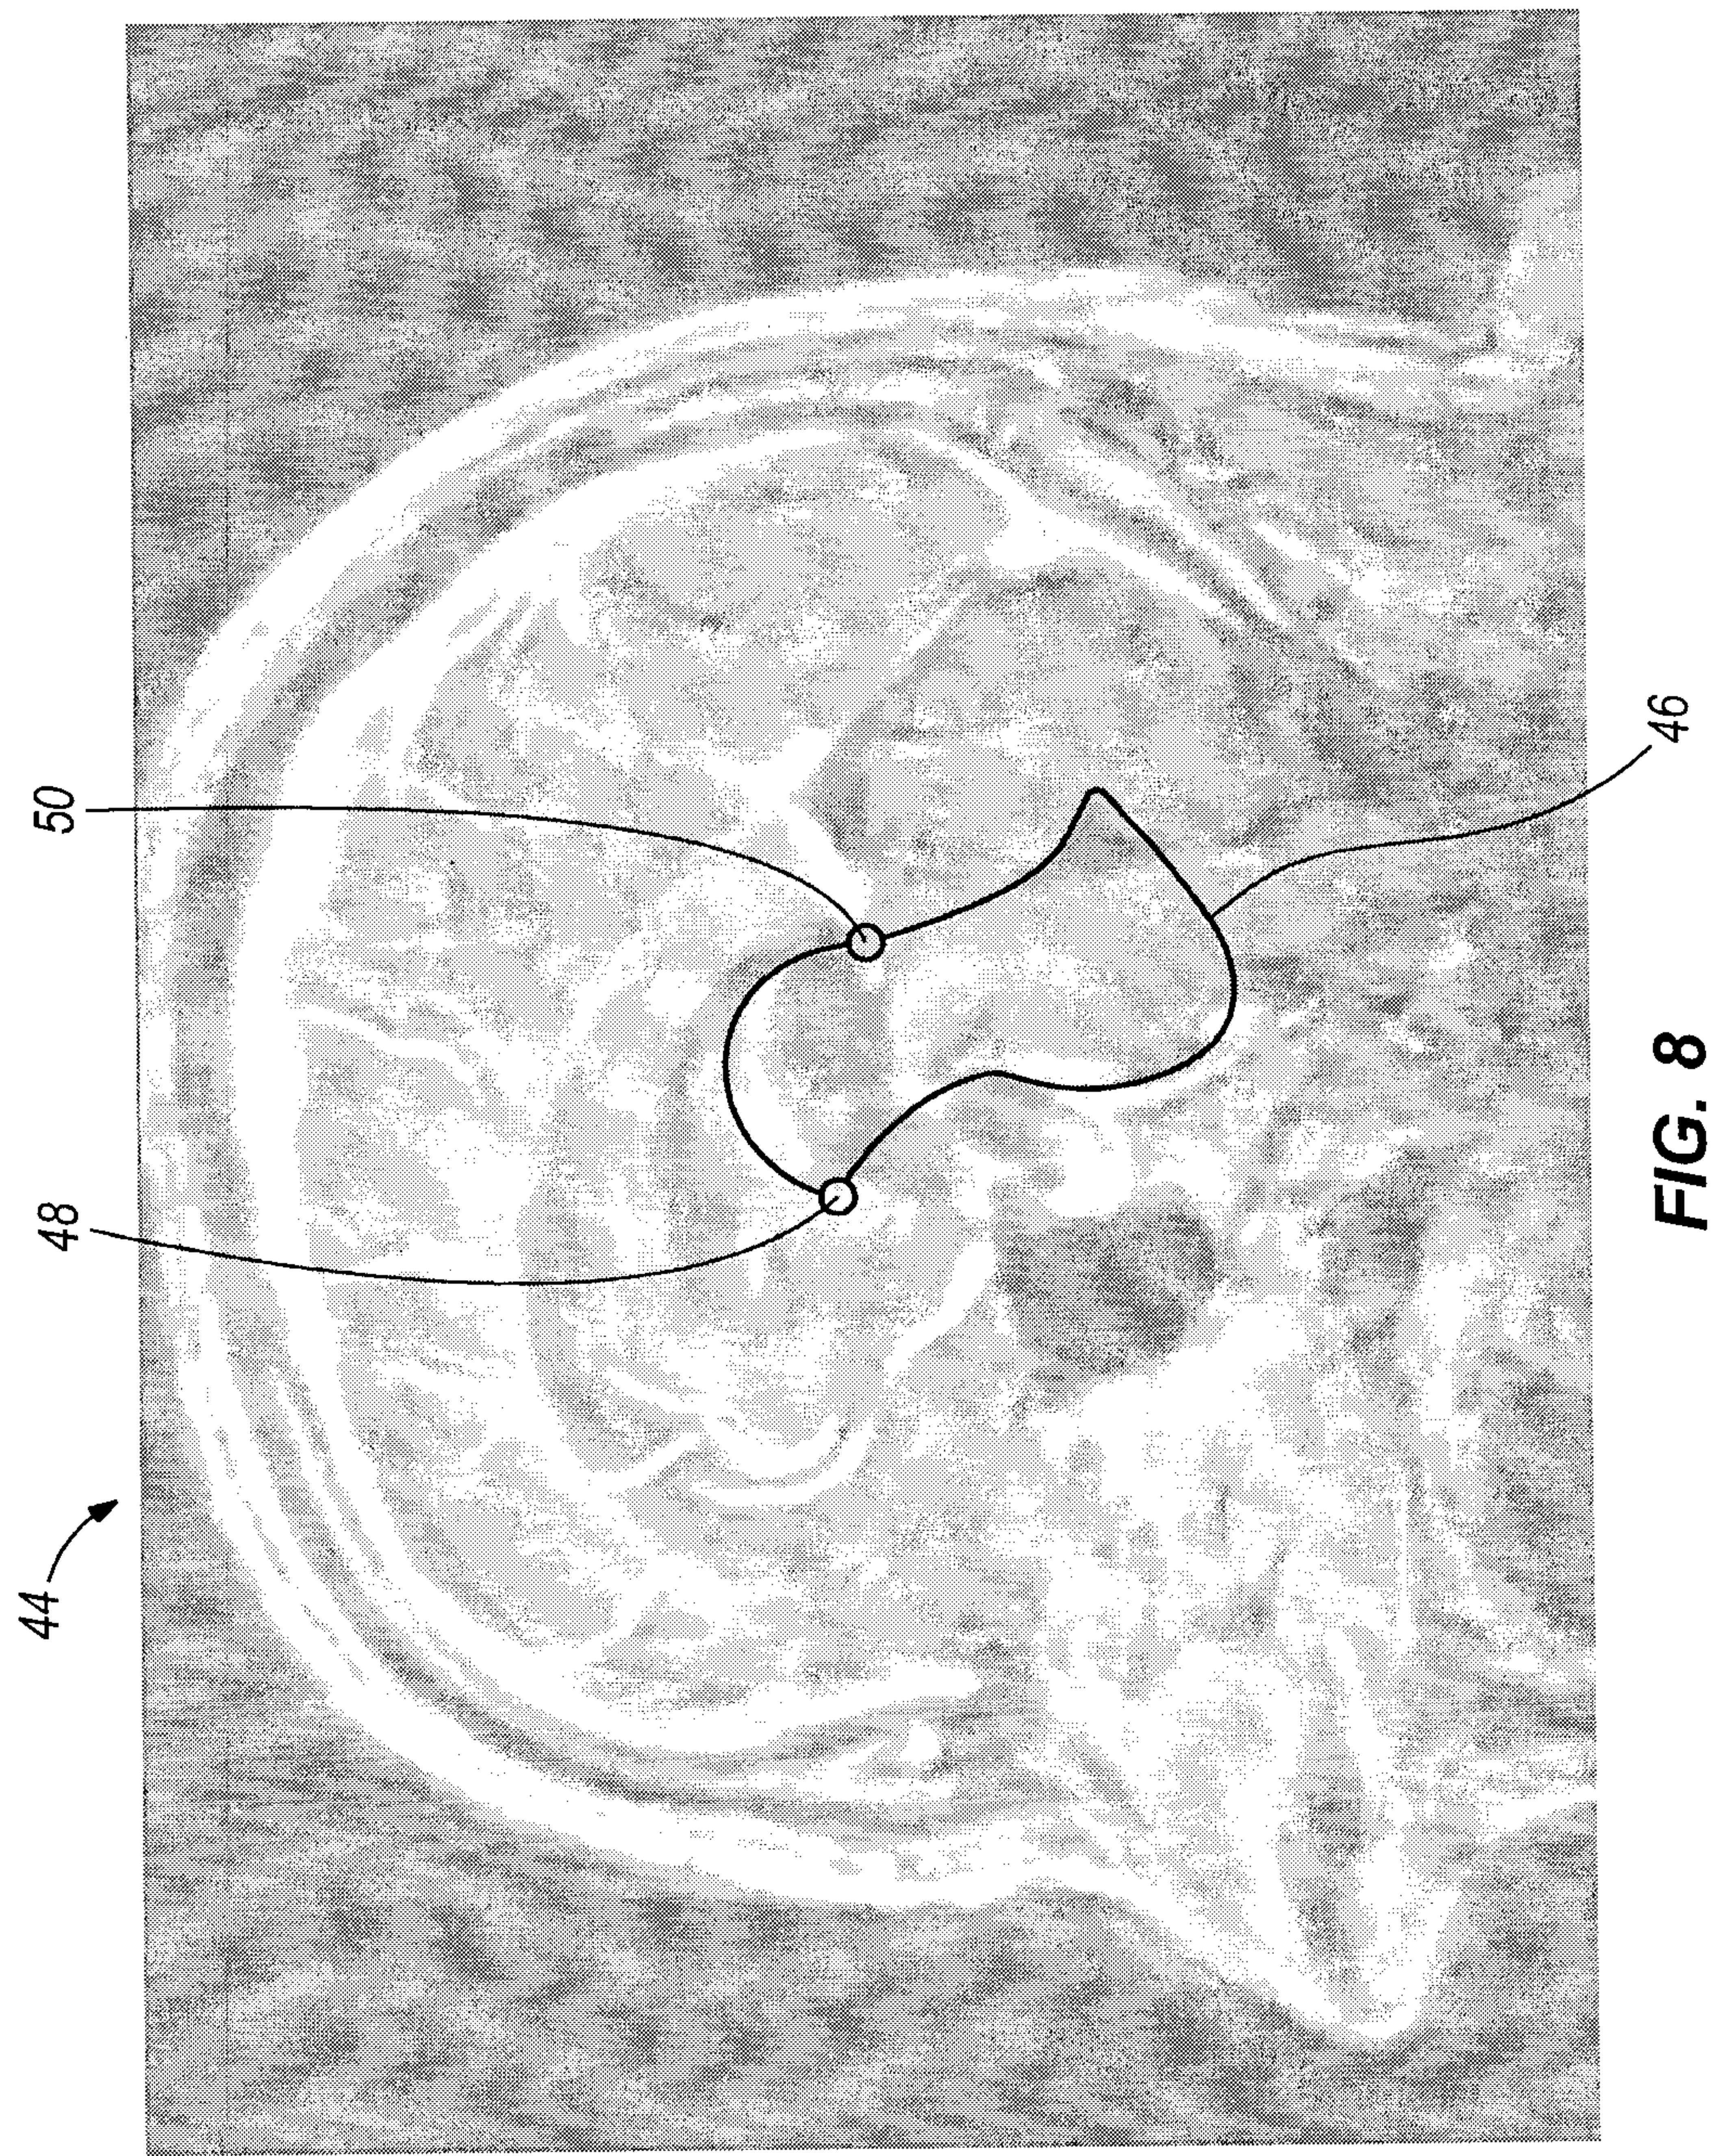




FIG. 7



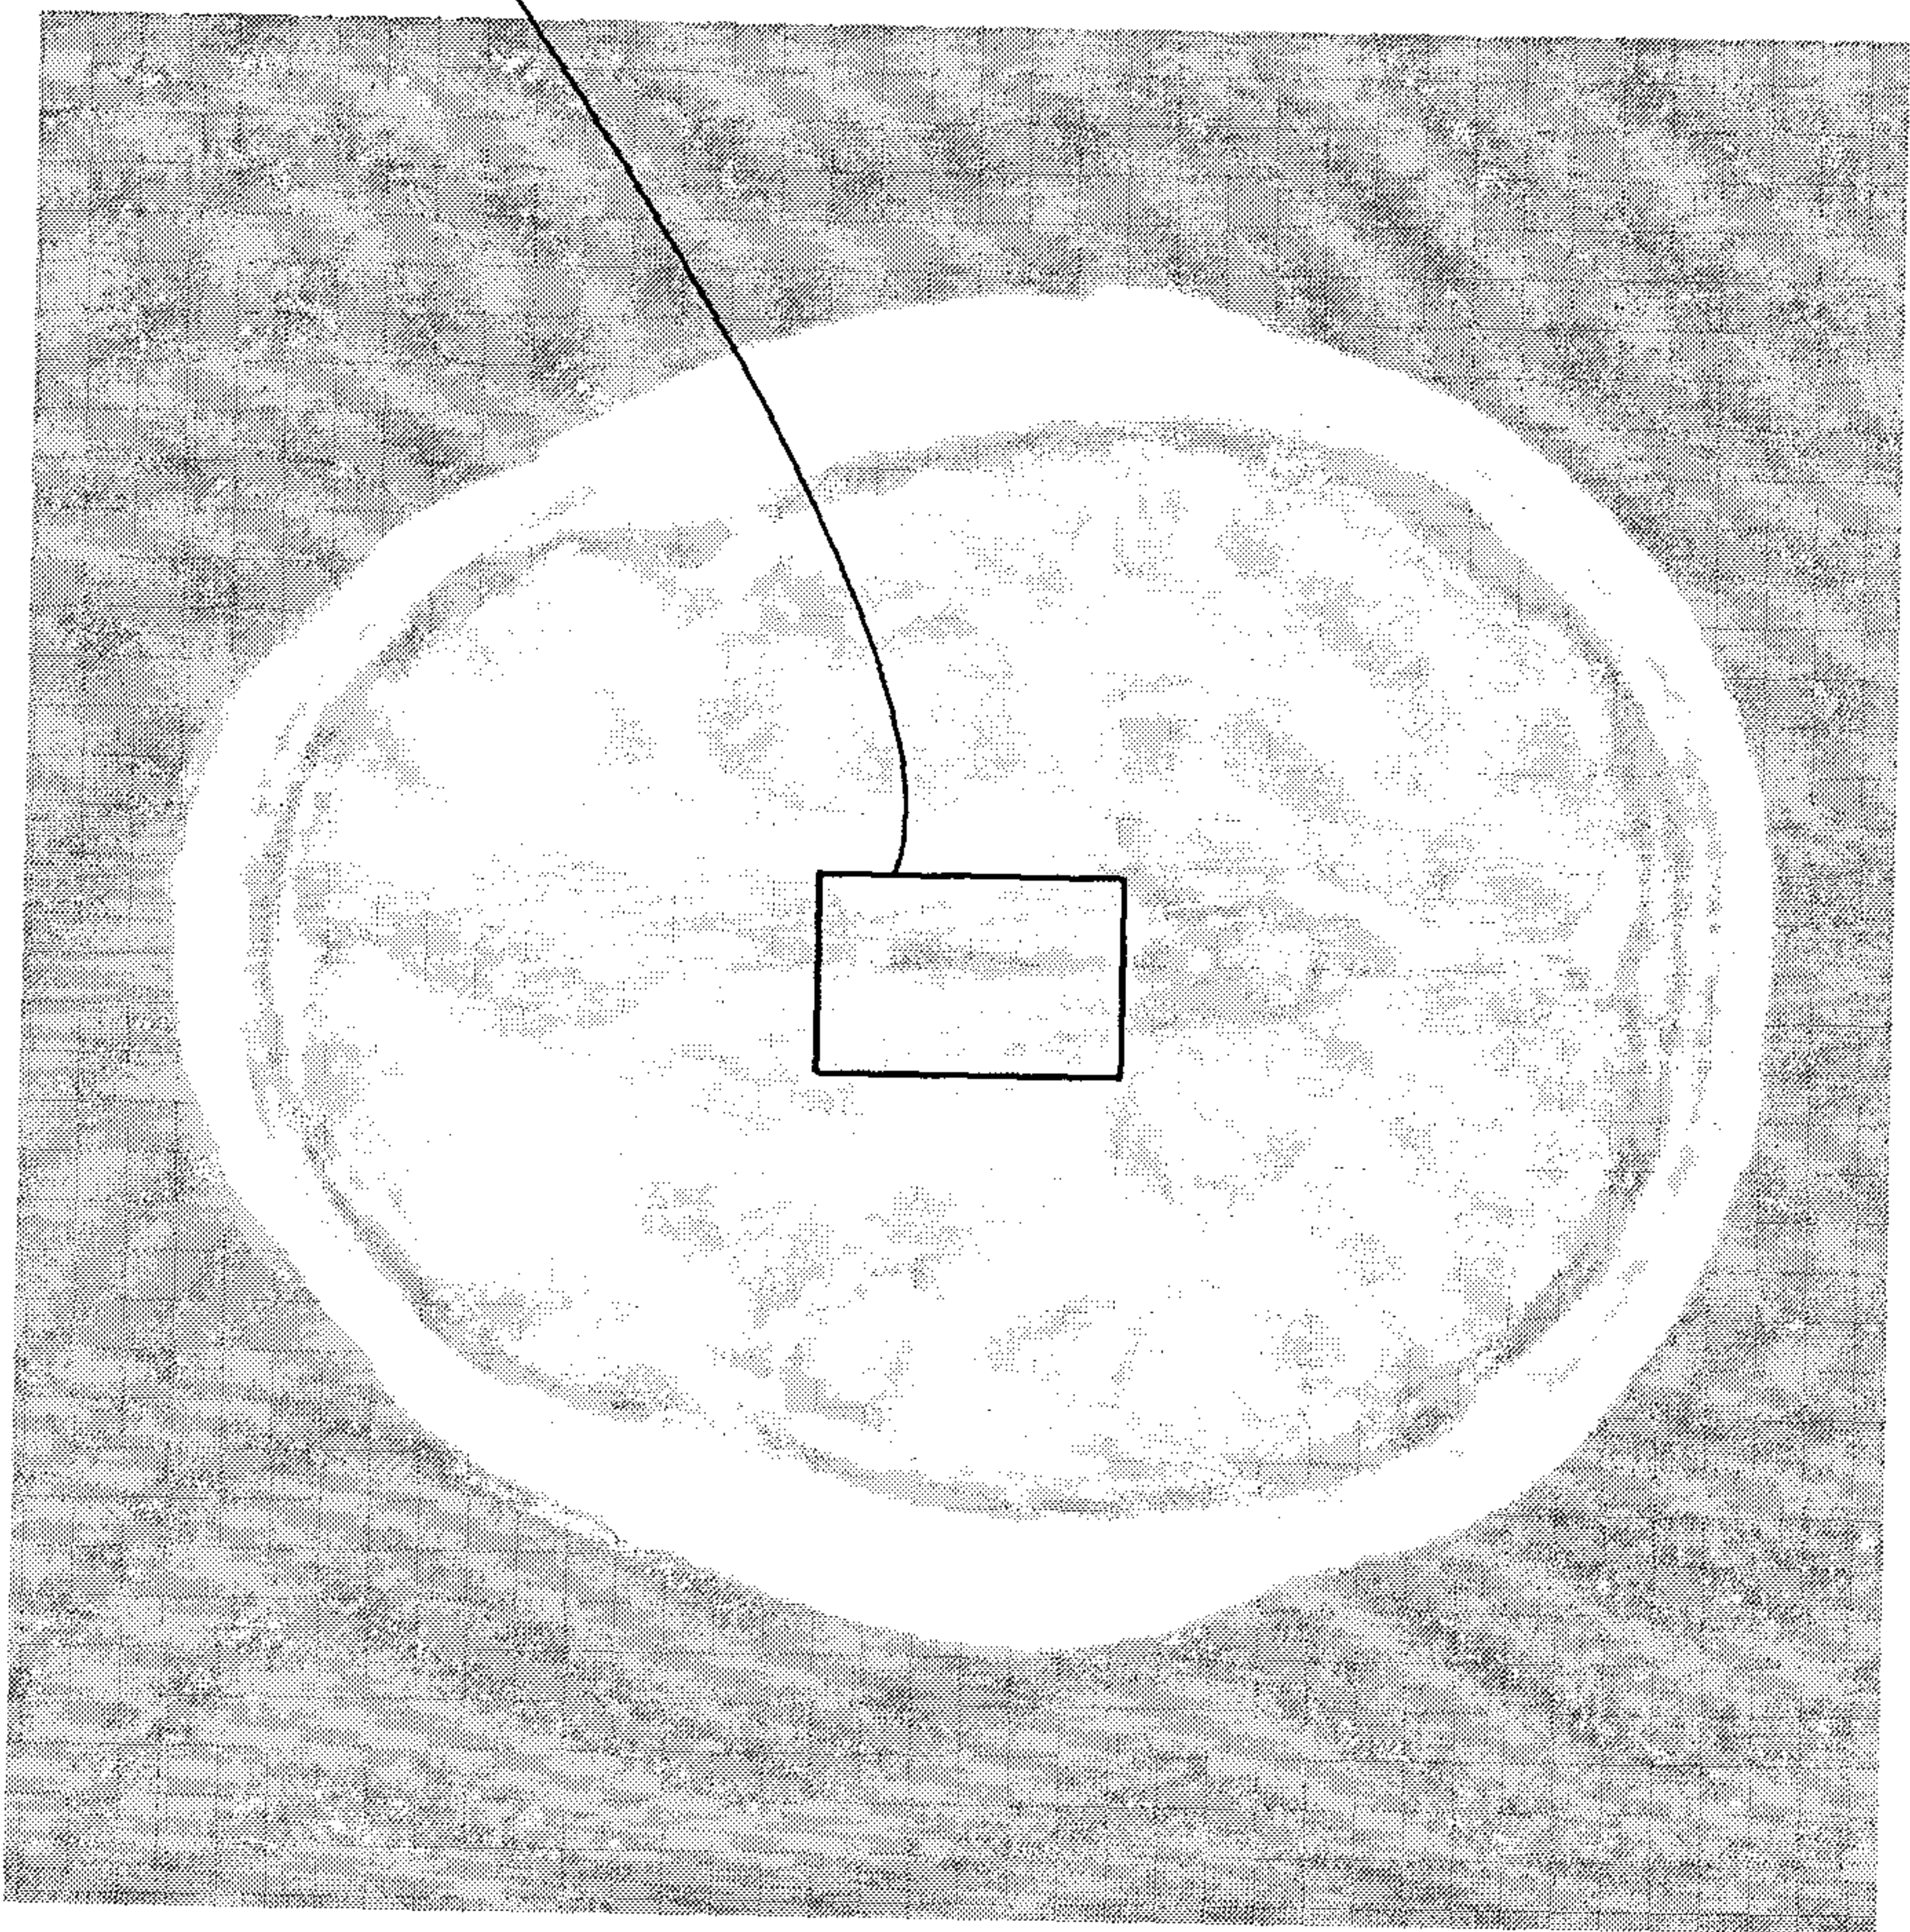


FIG. 9

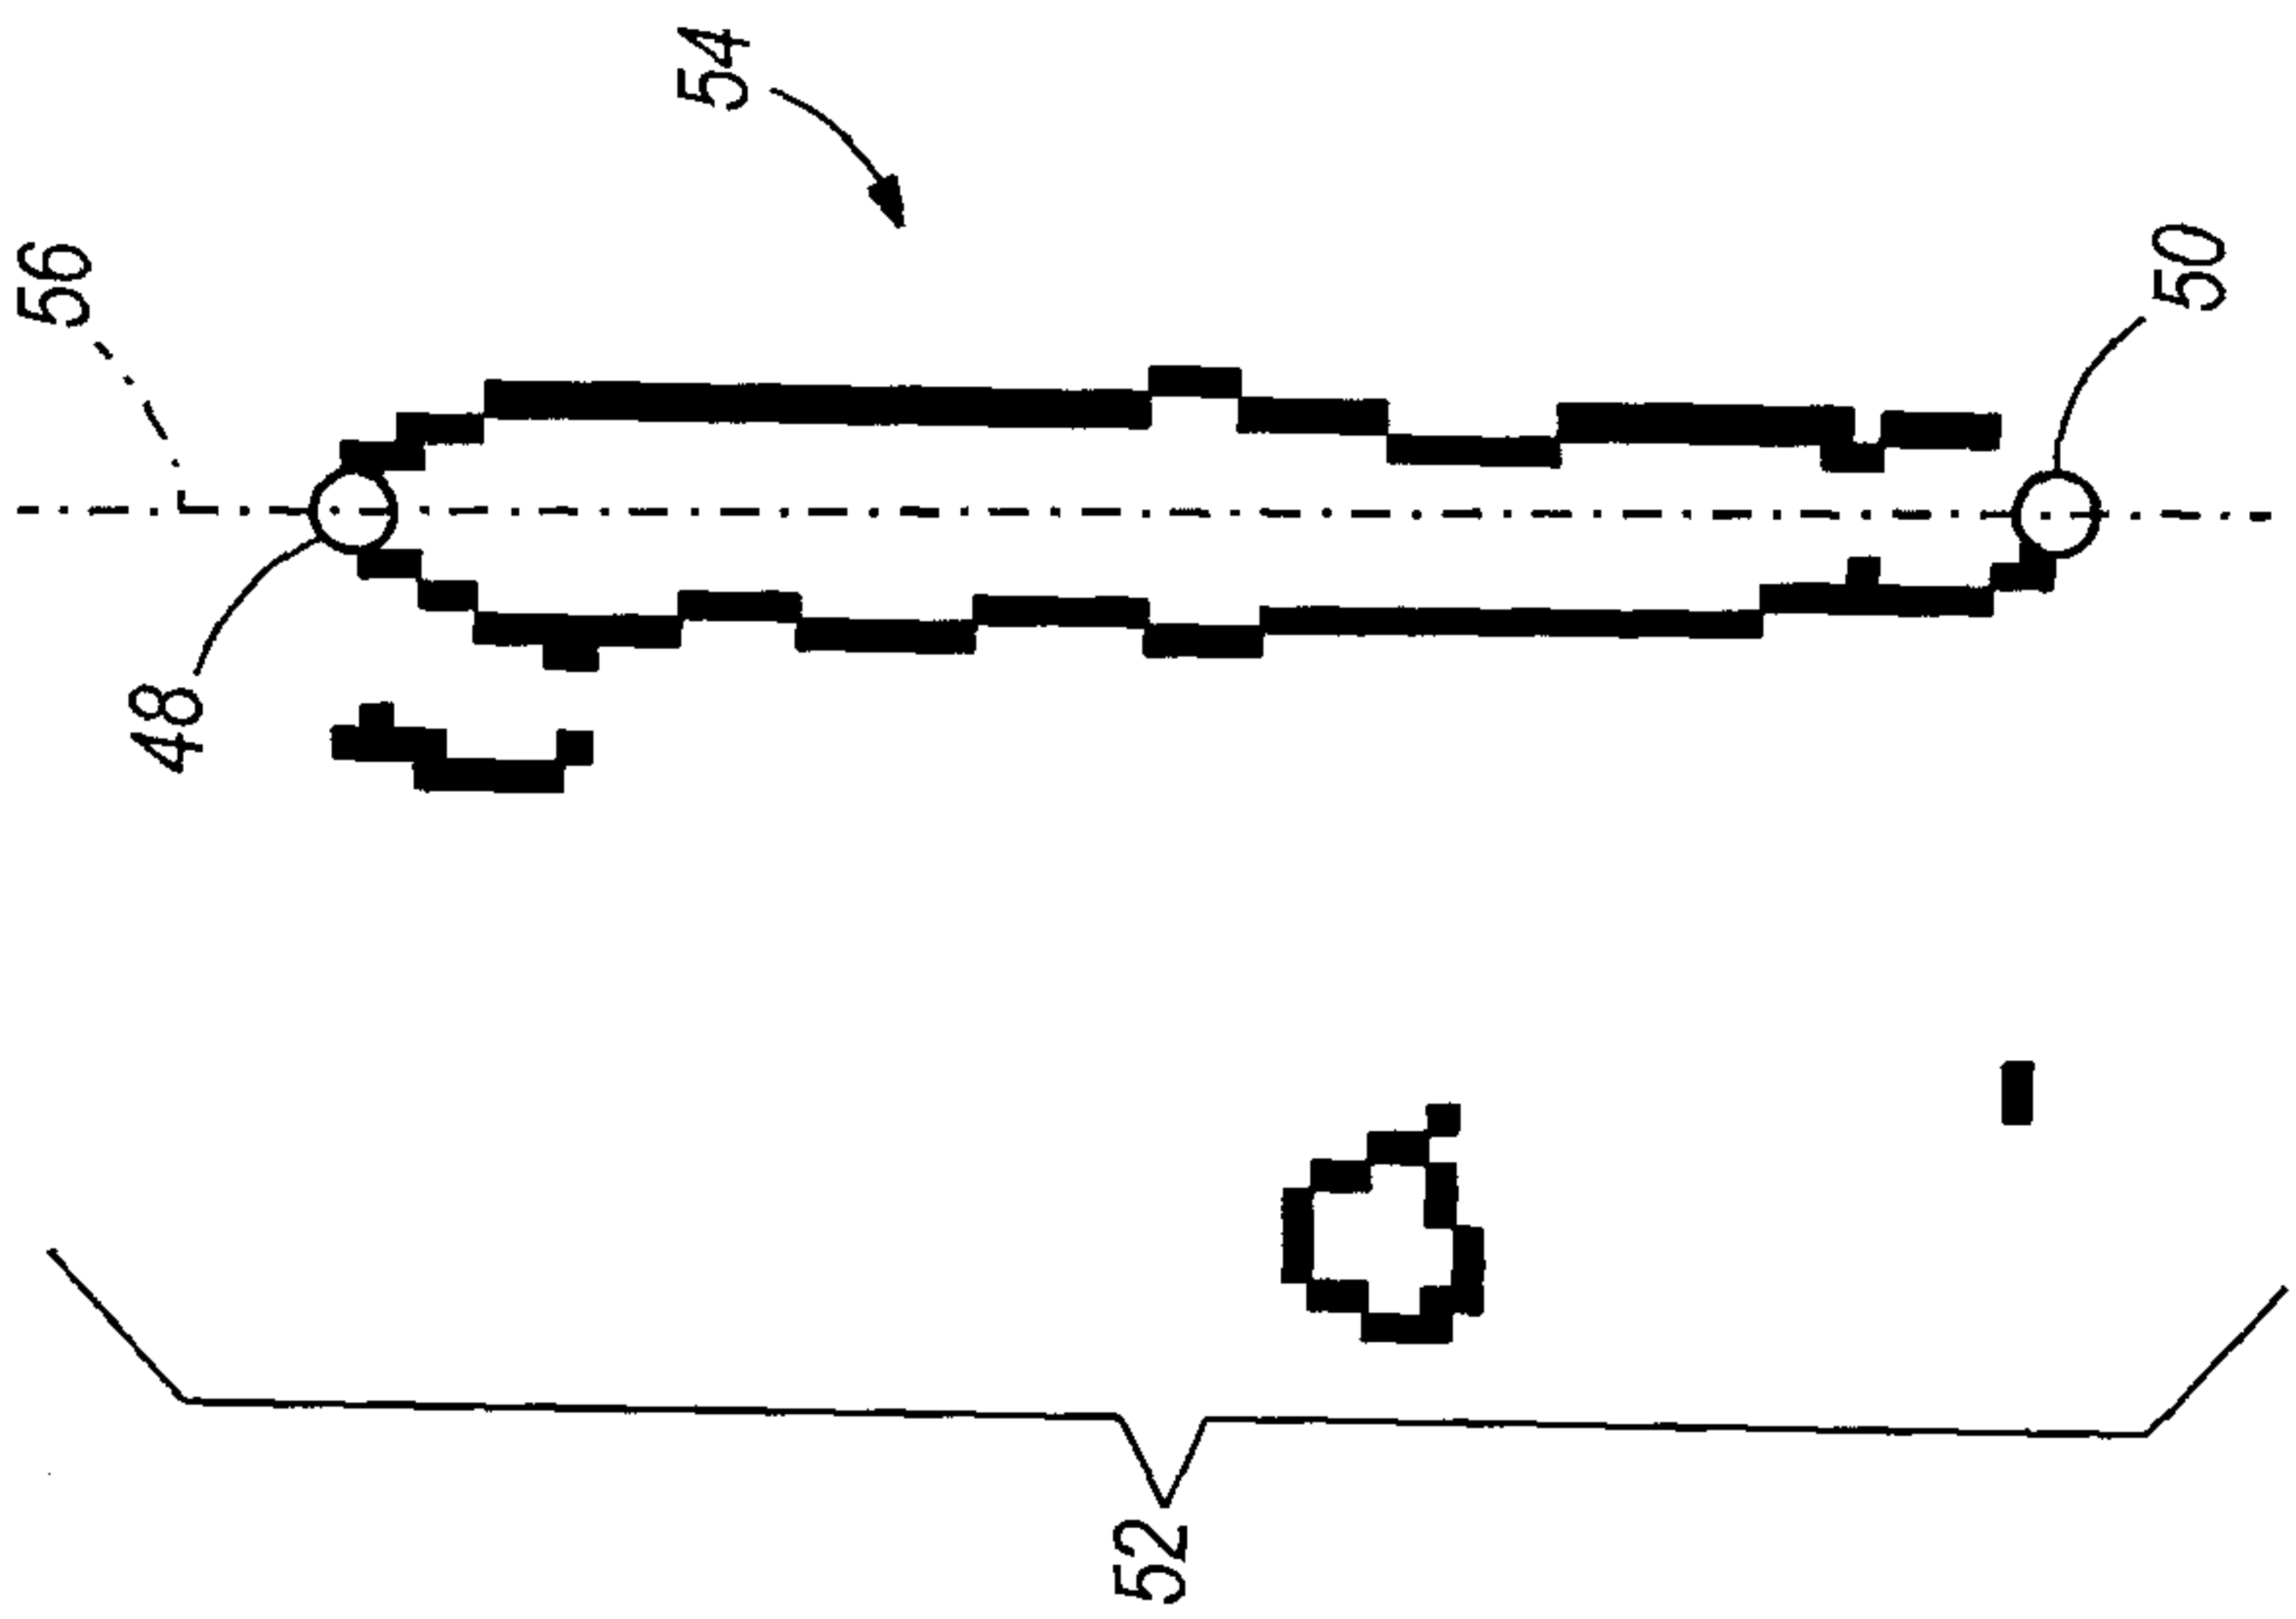
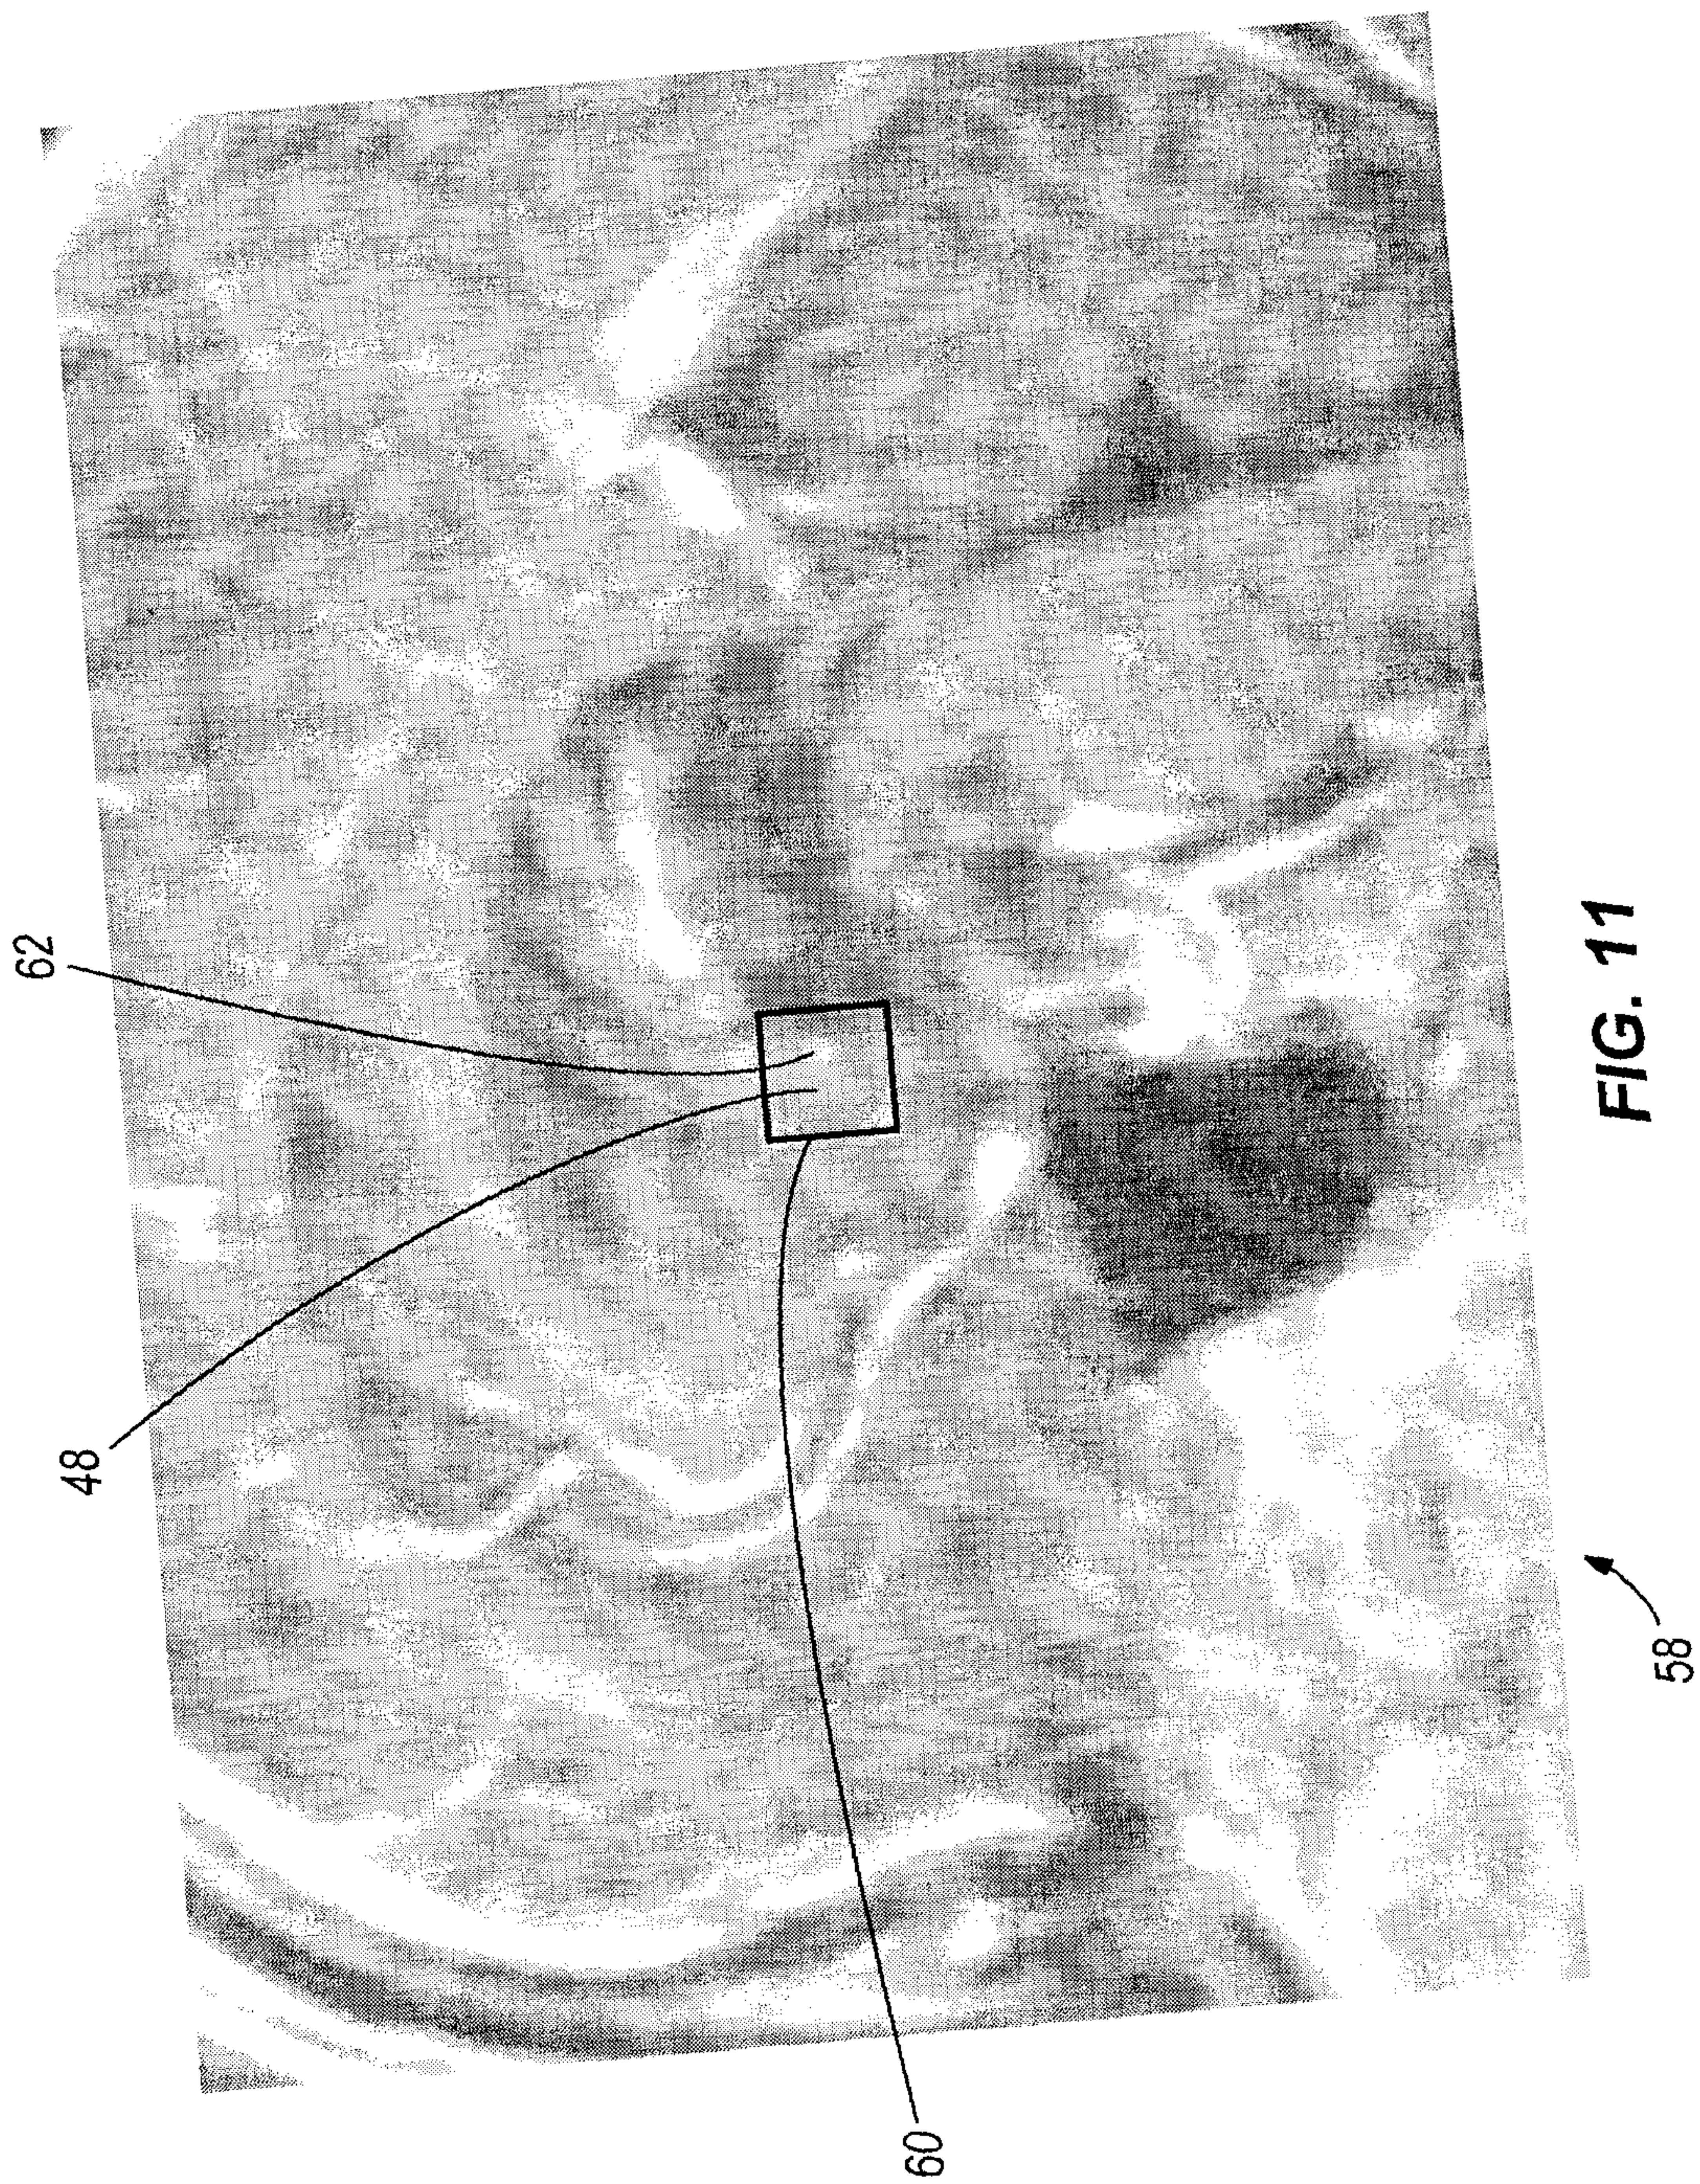


FIG. 10



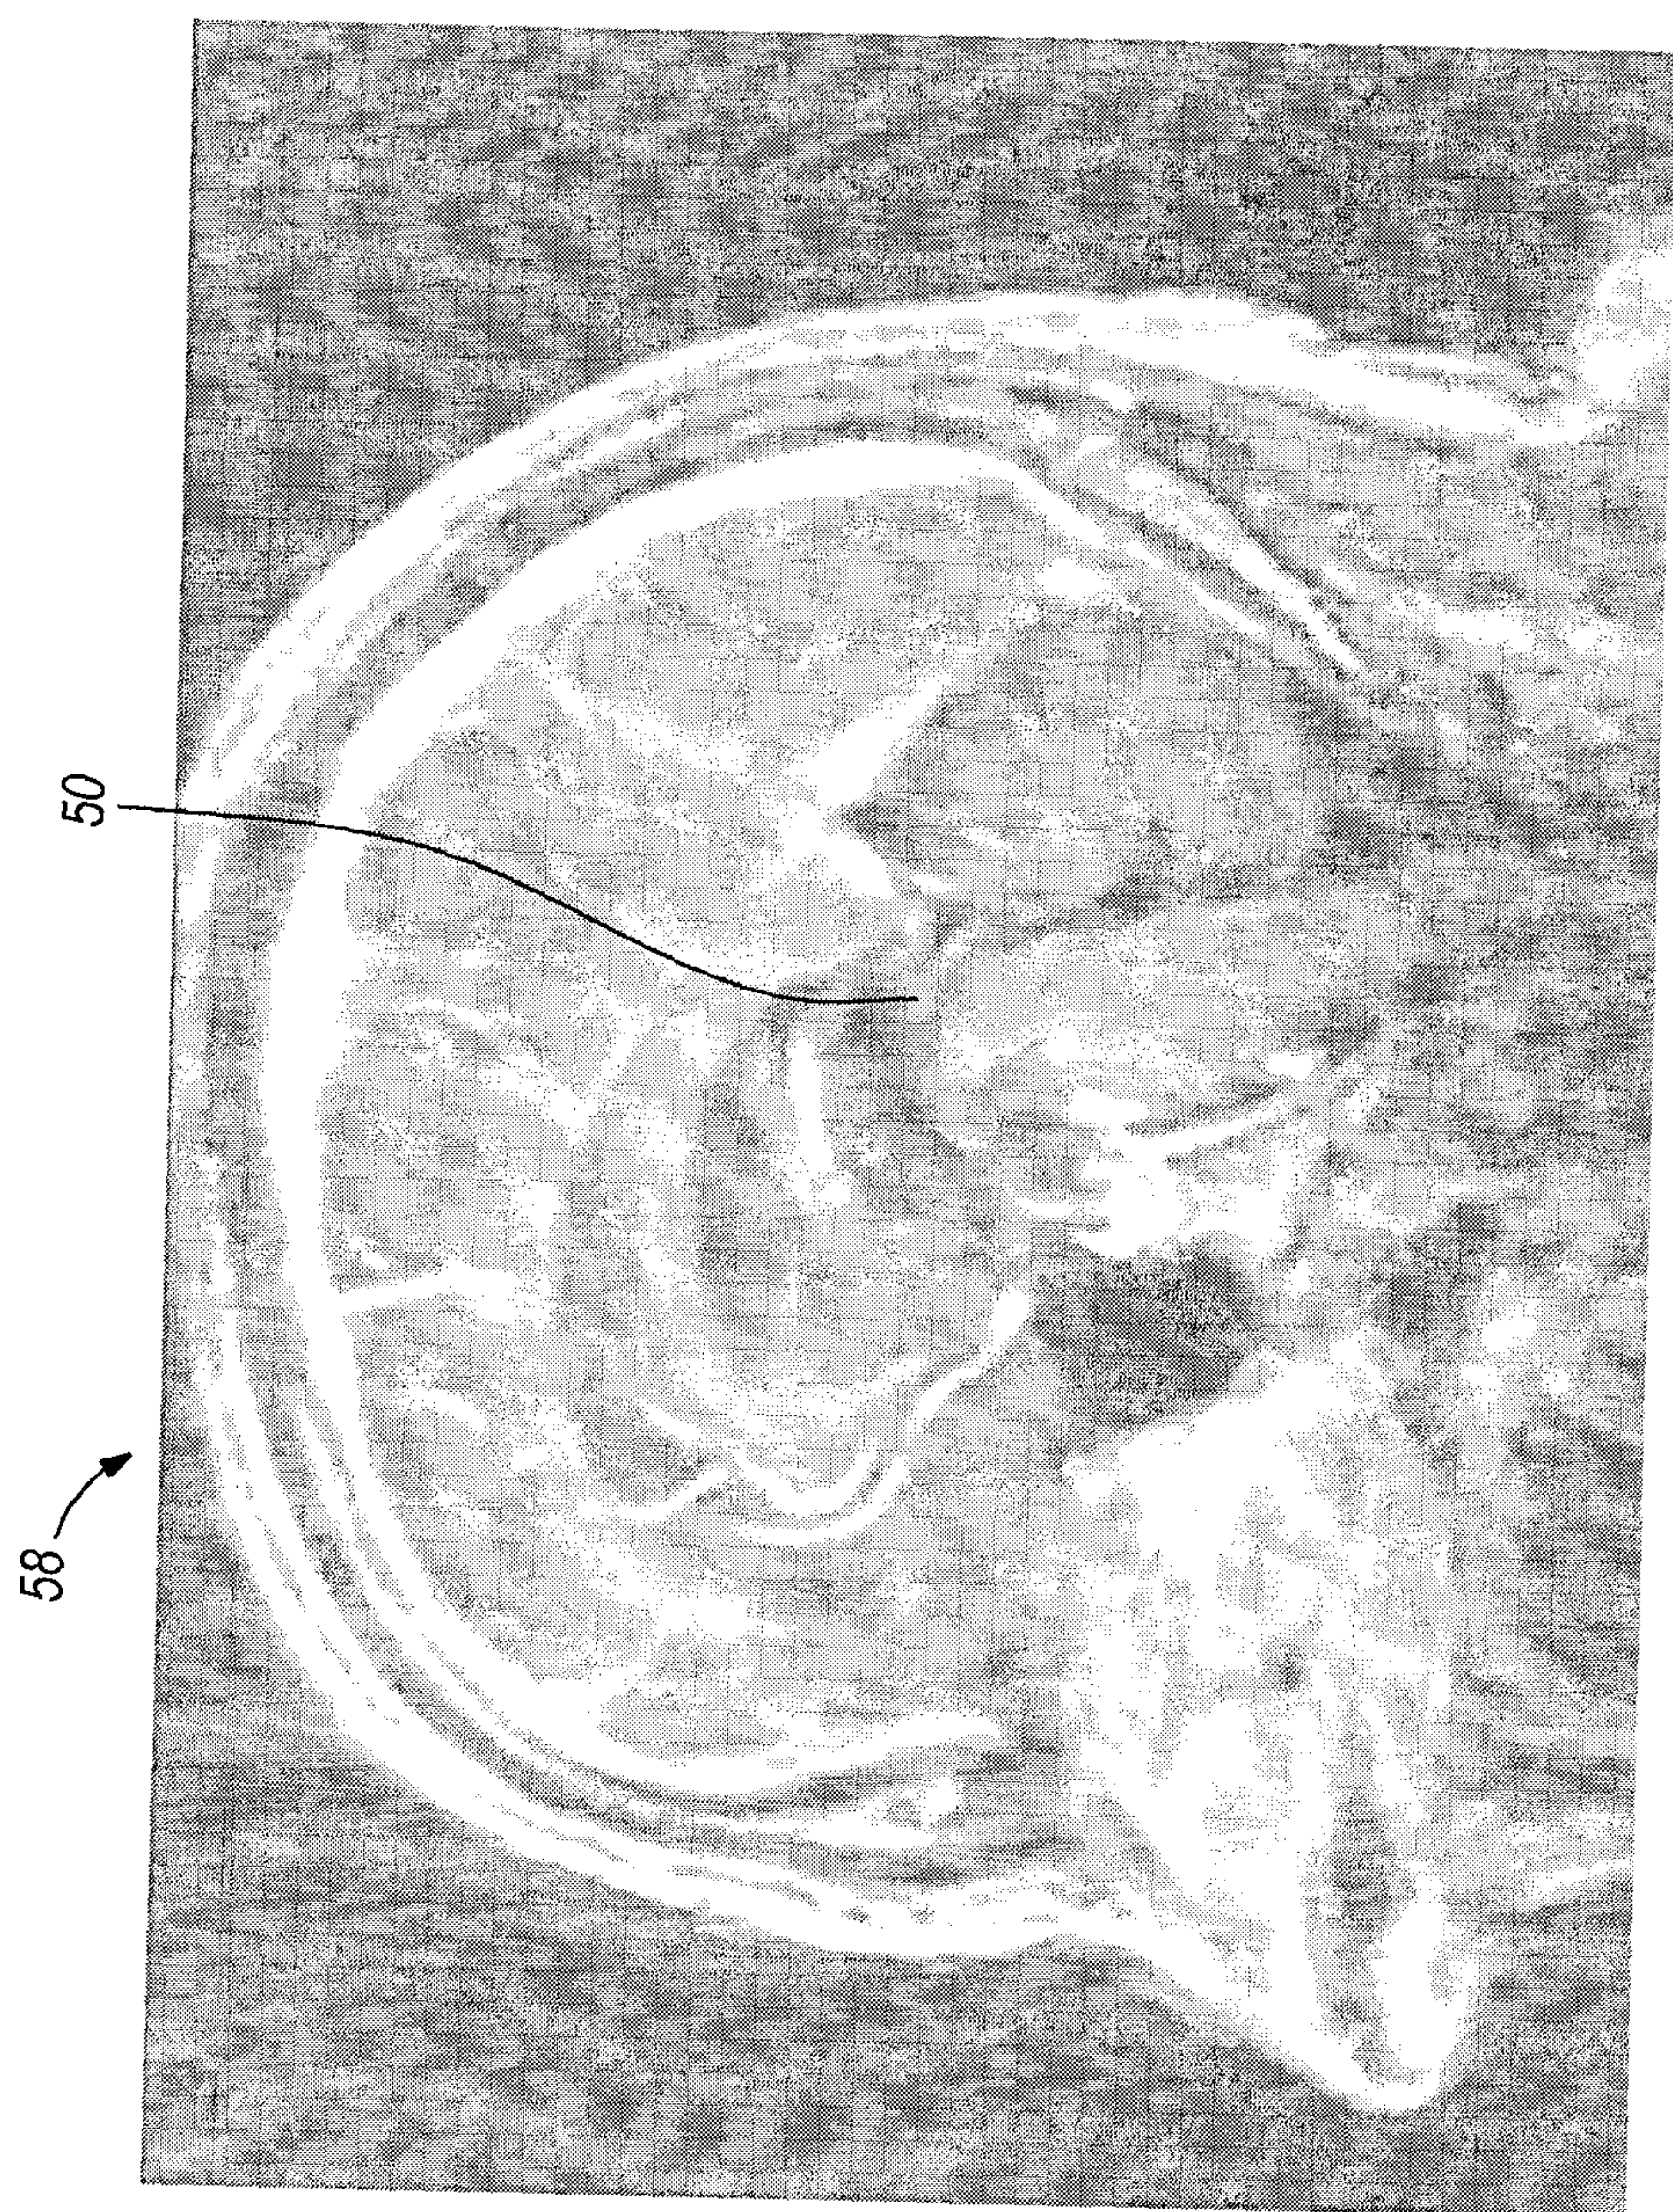


FIG. 12




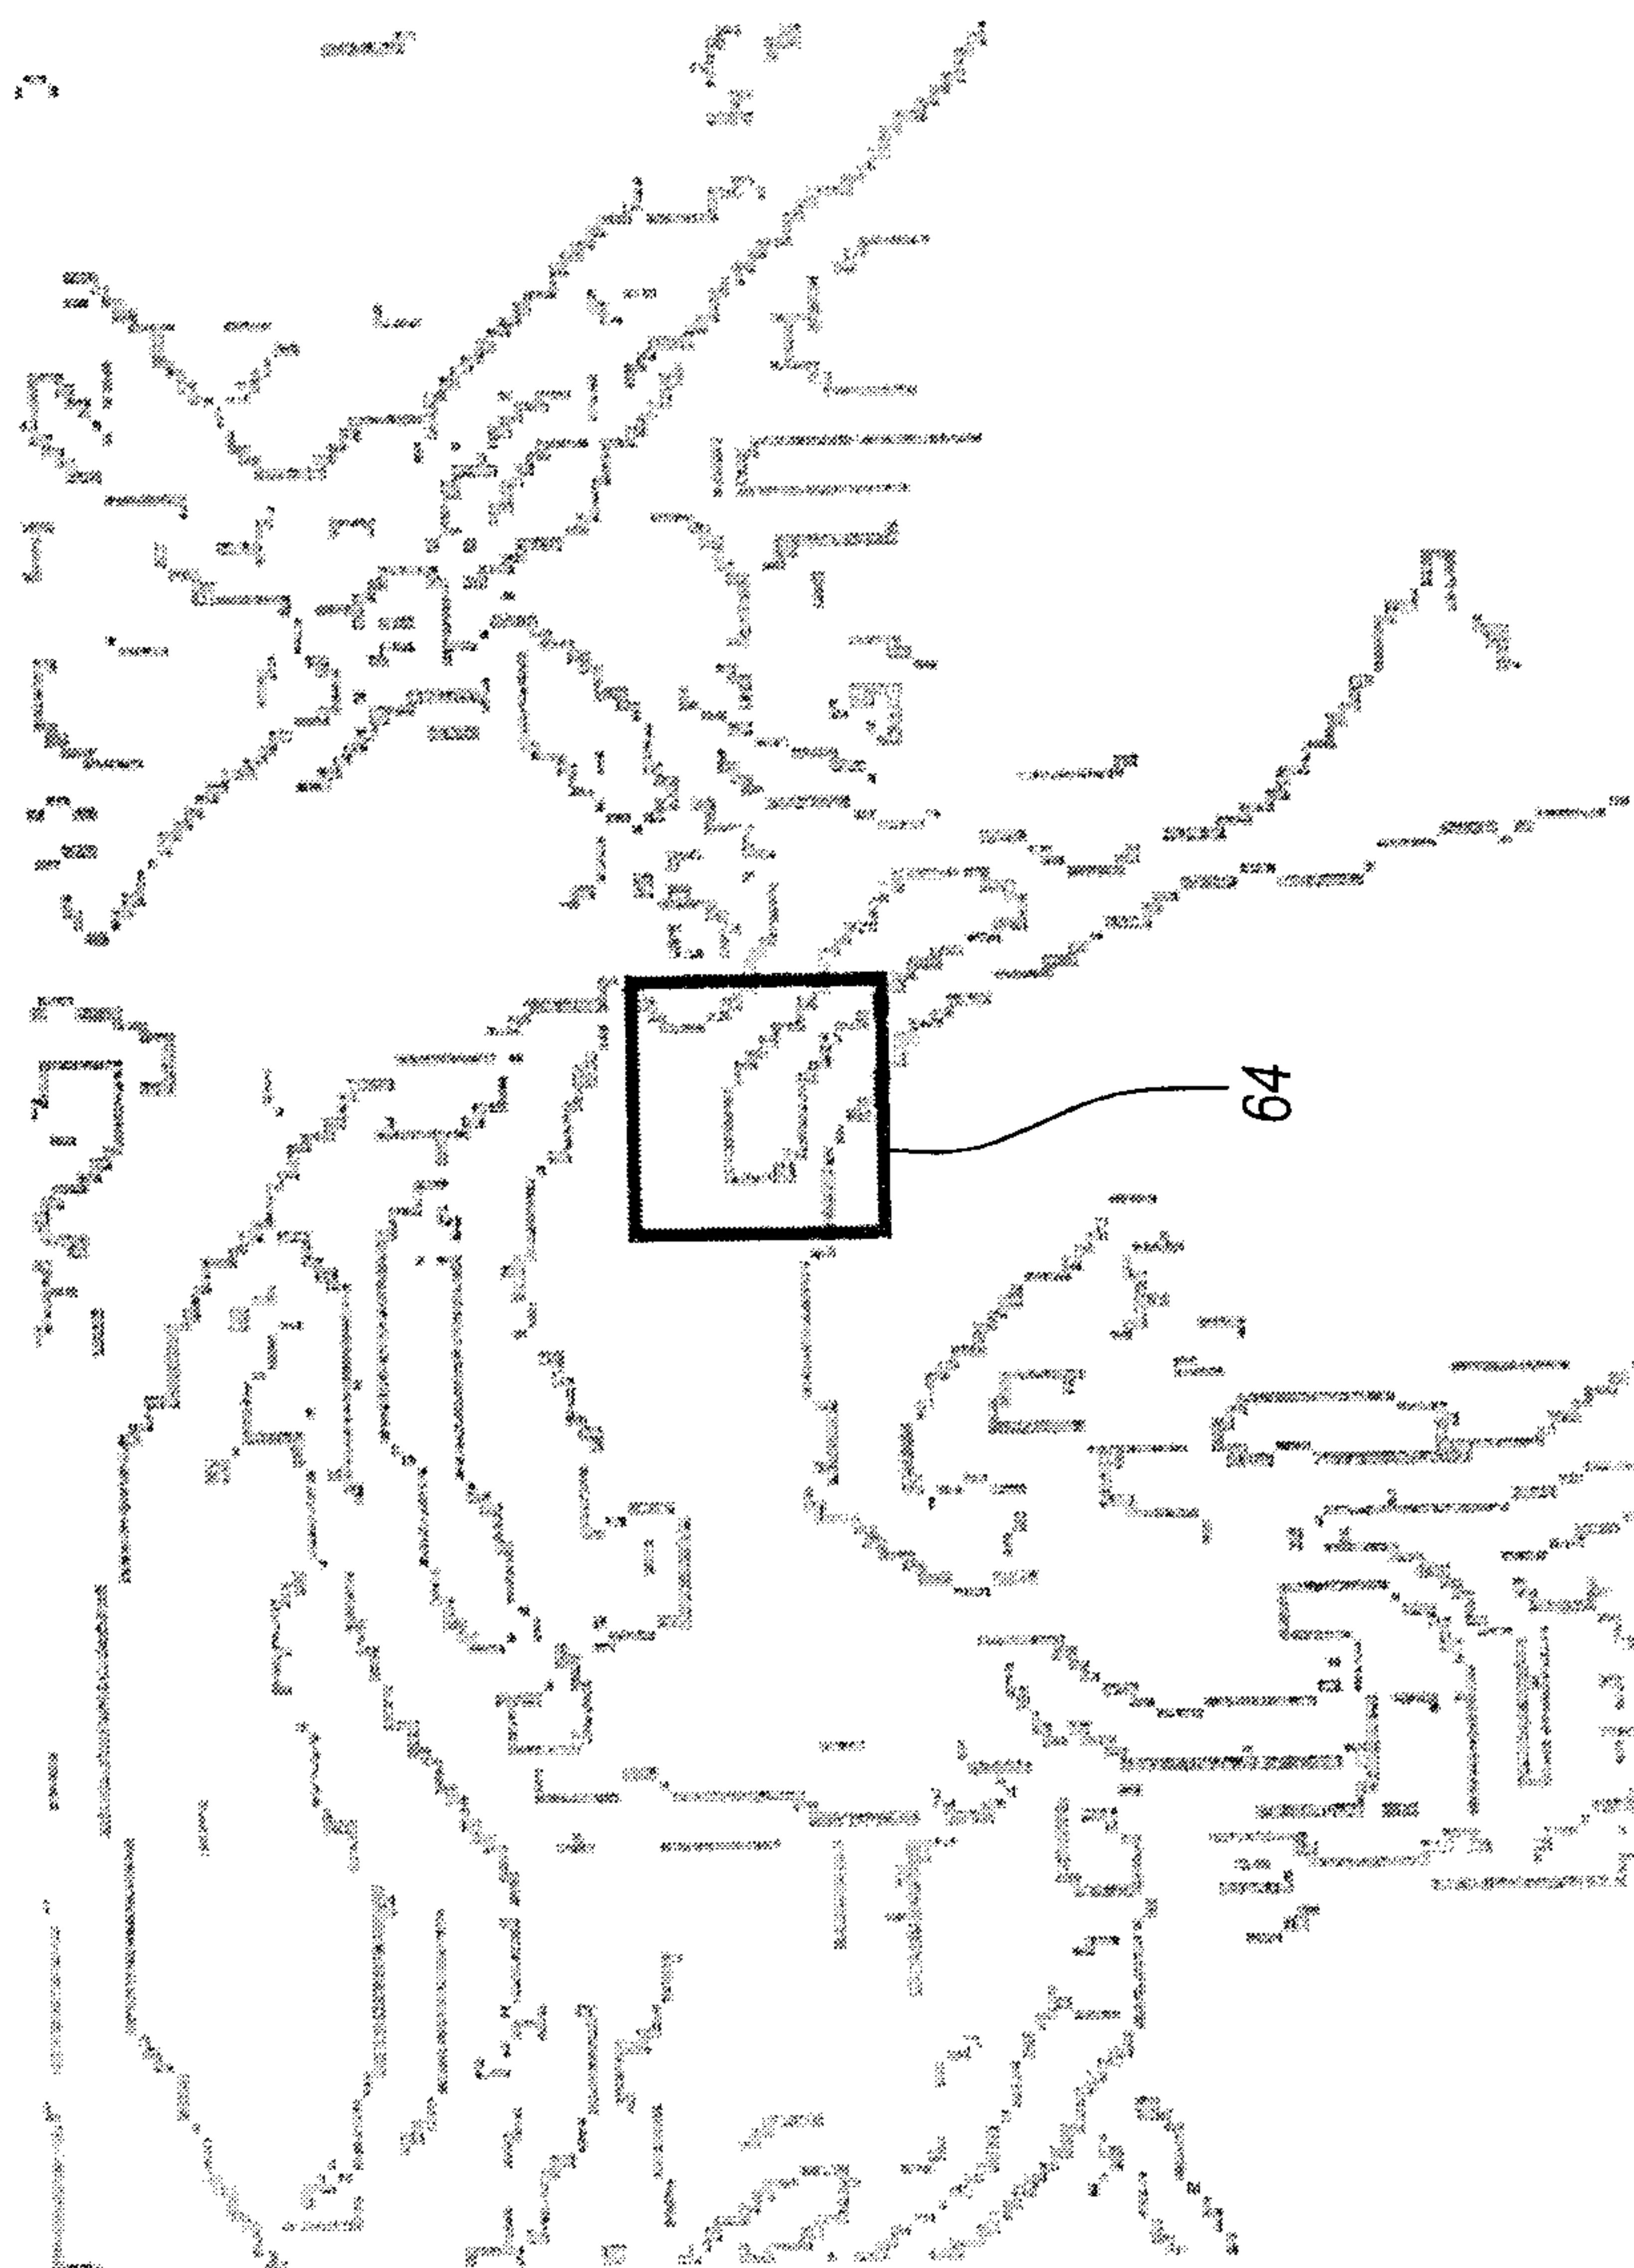


FIG. 13



**FIG. 15**

**FIG. 16**

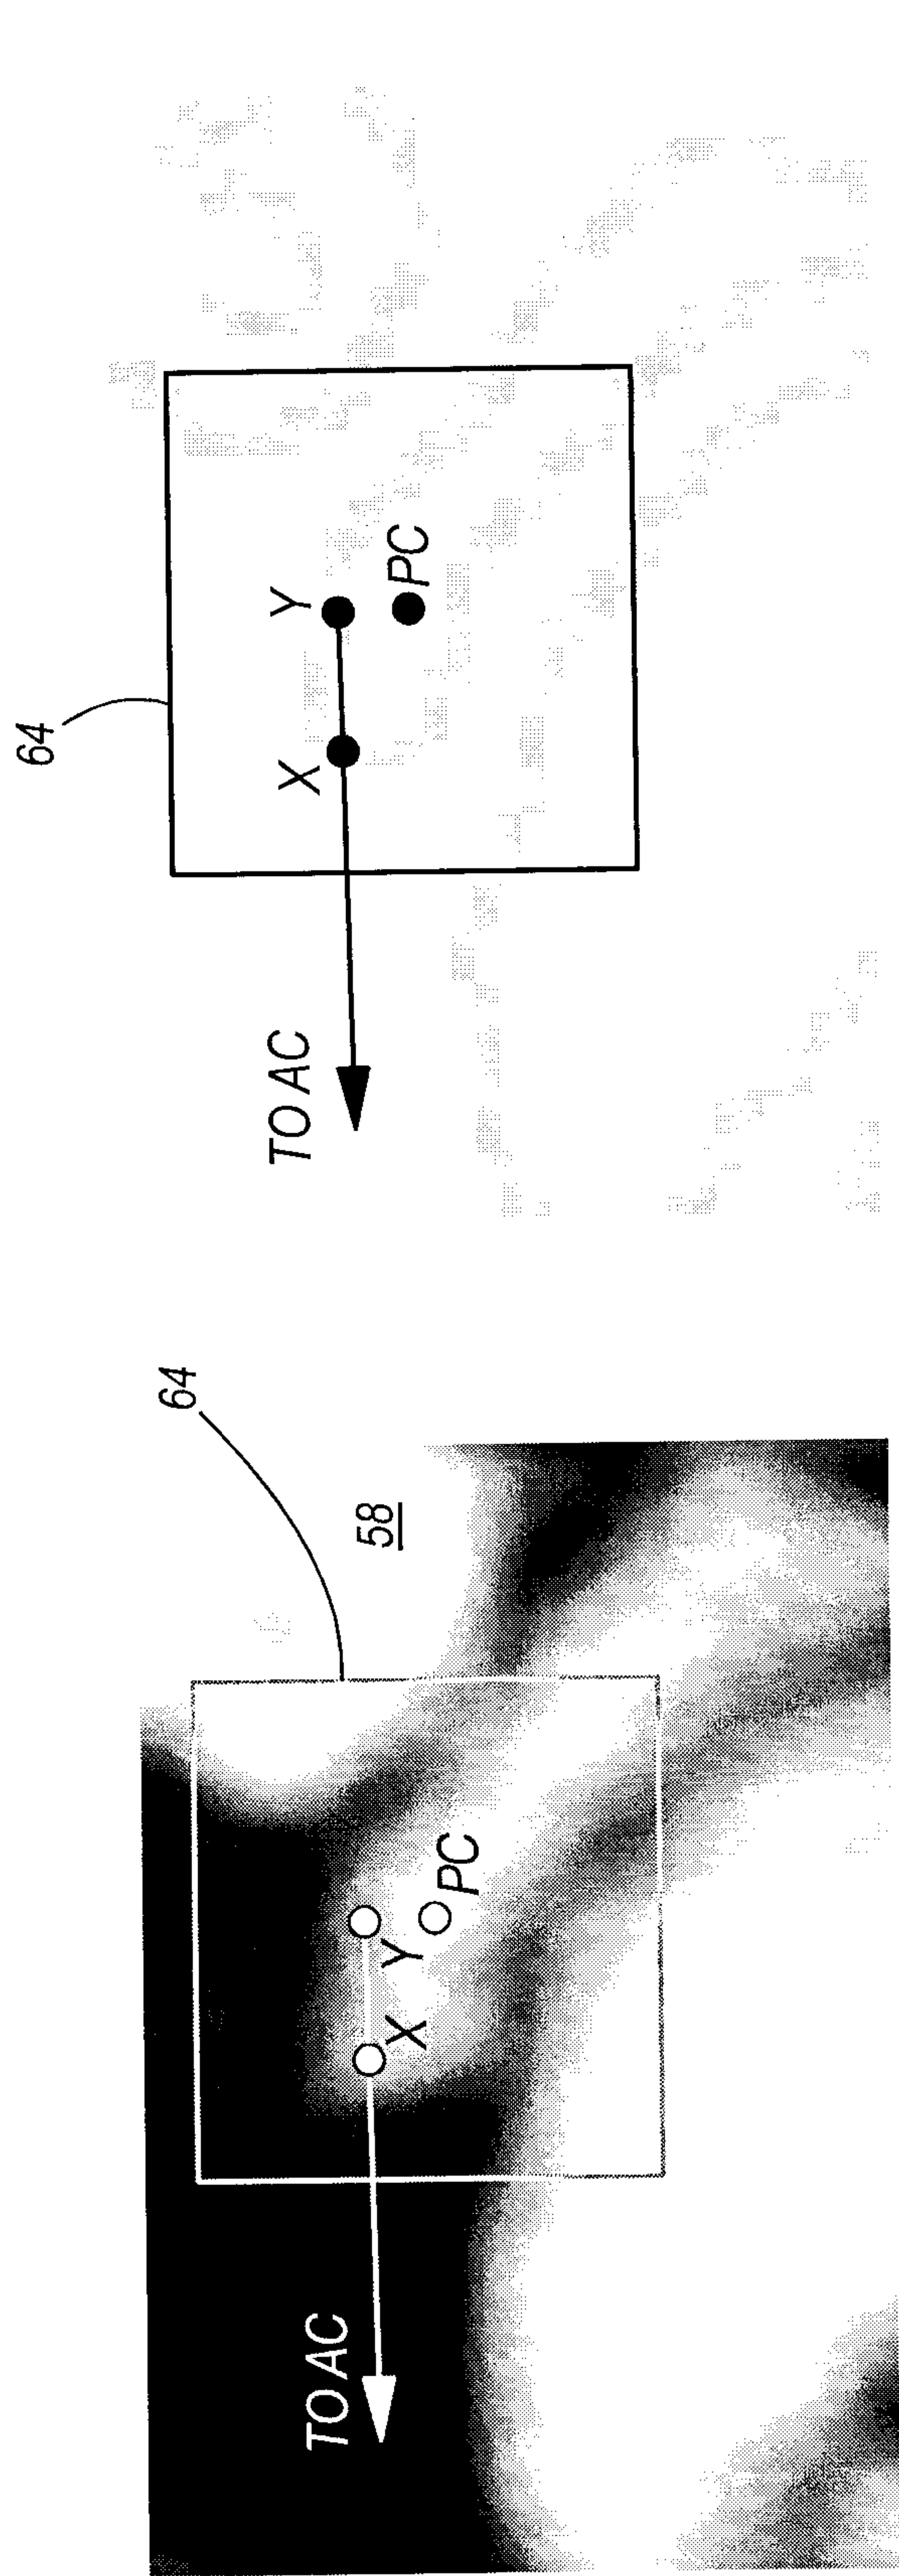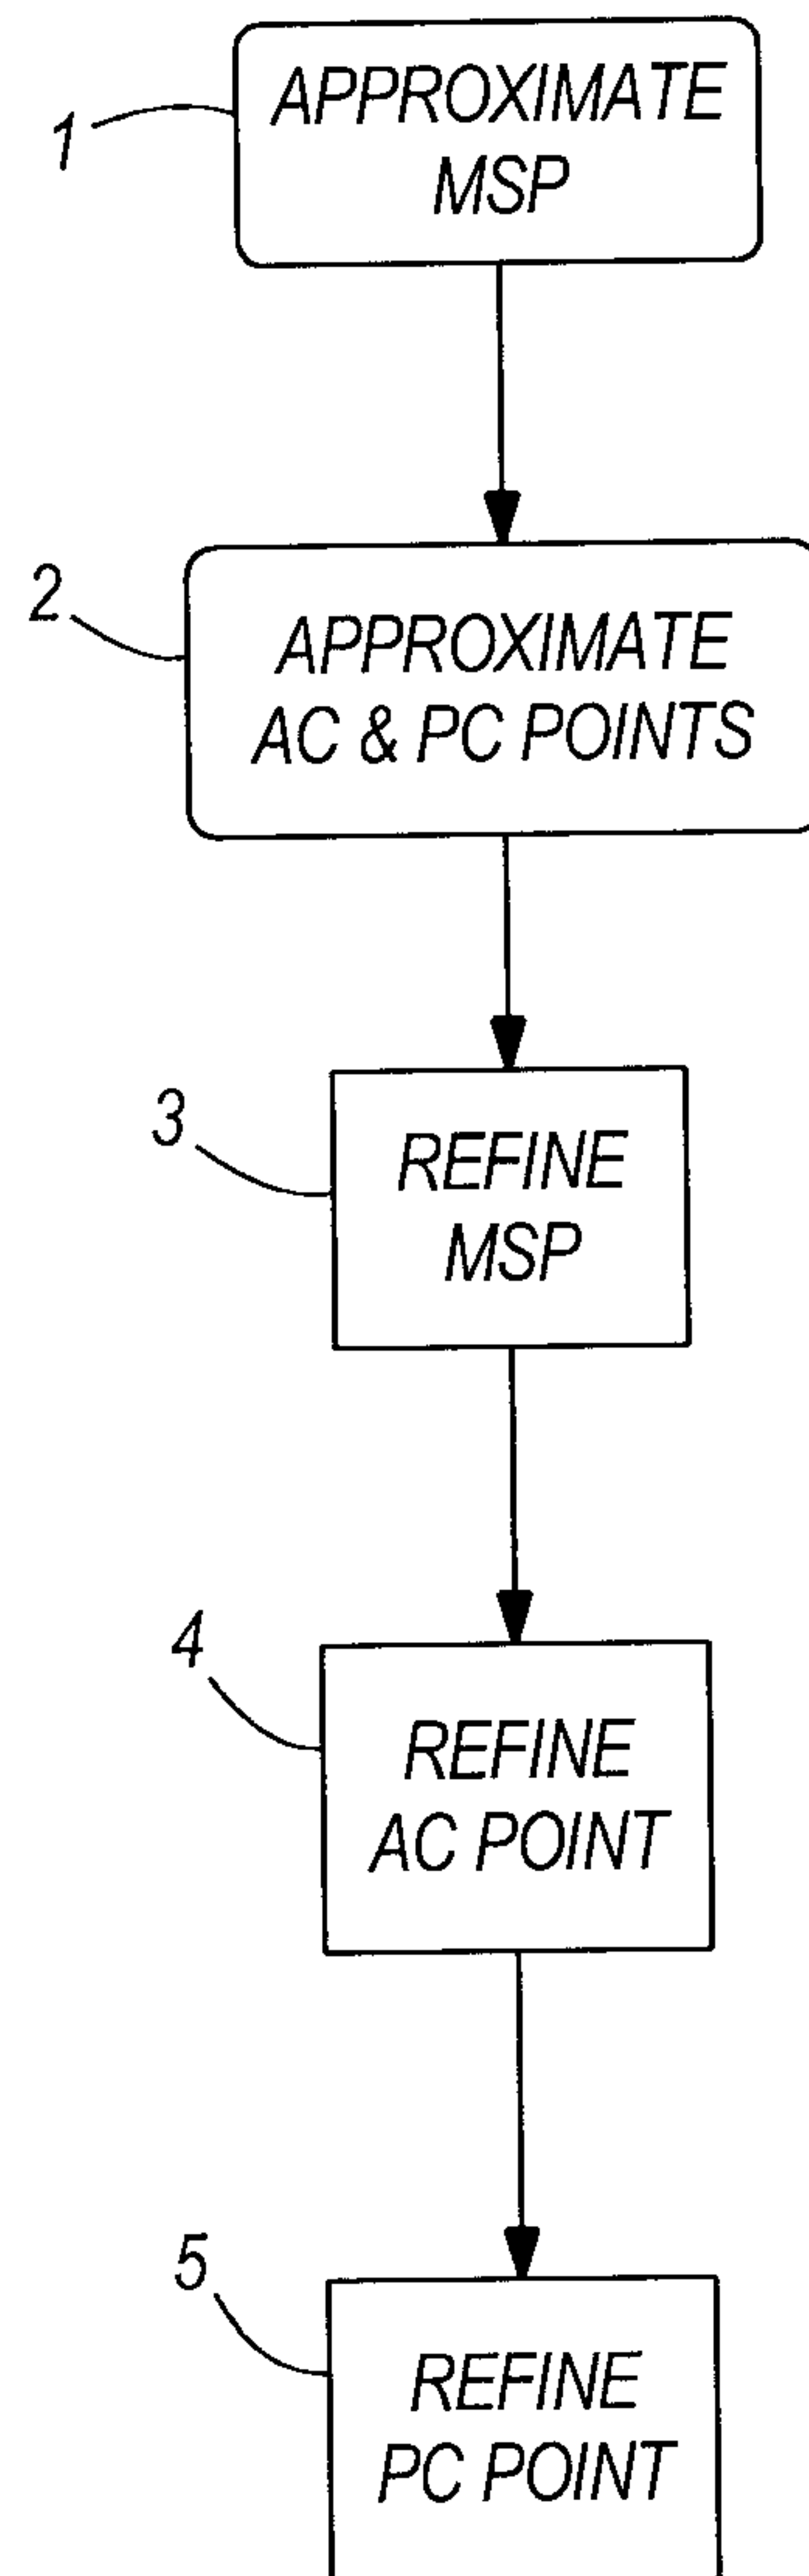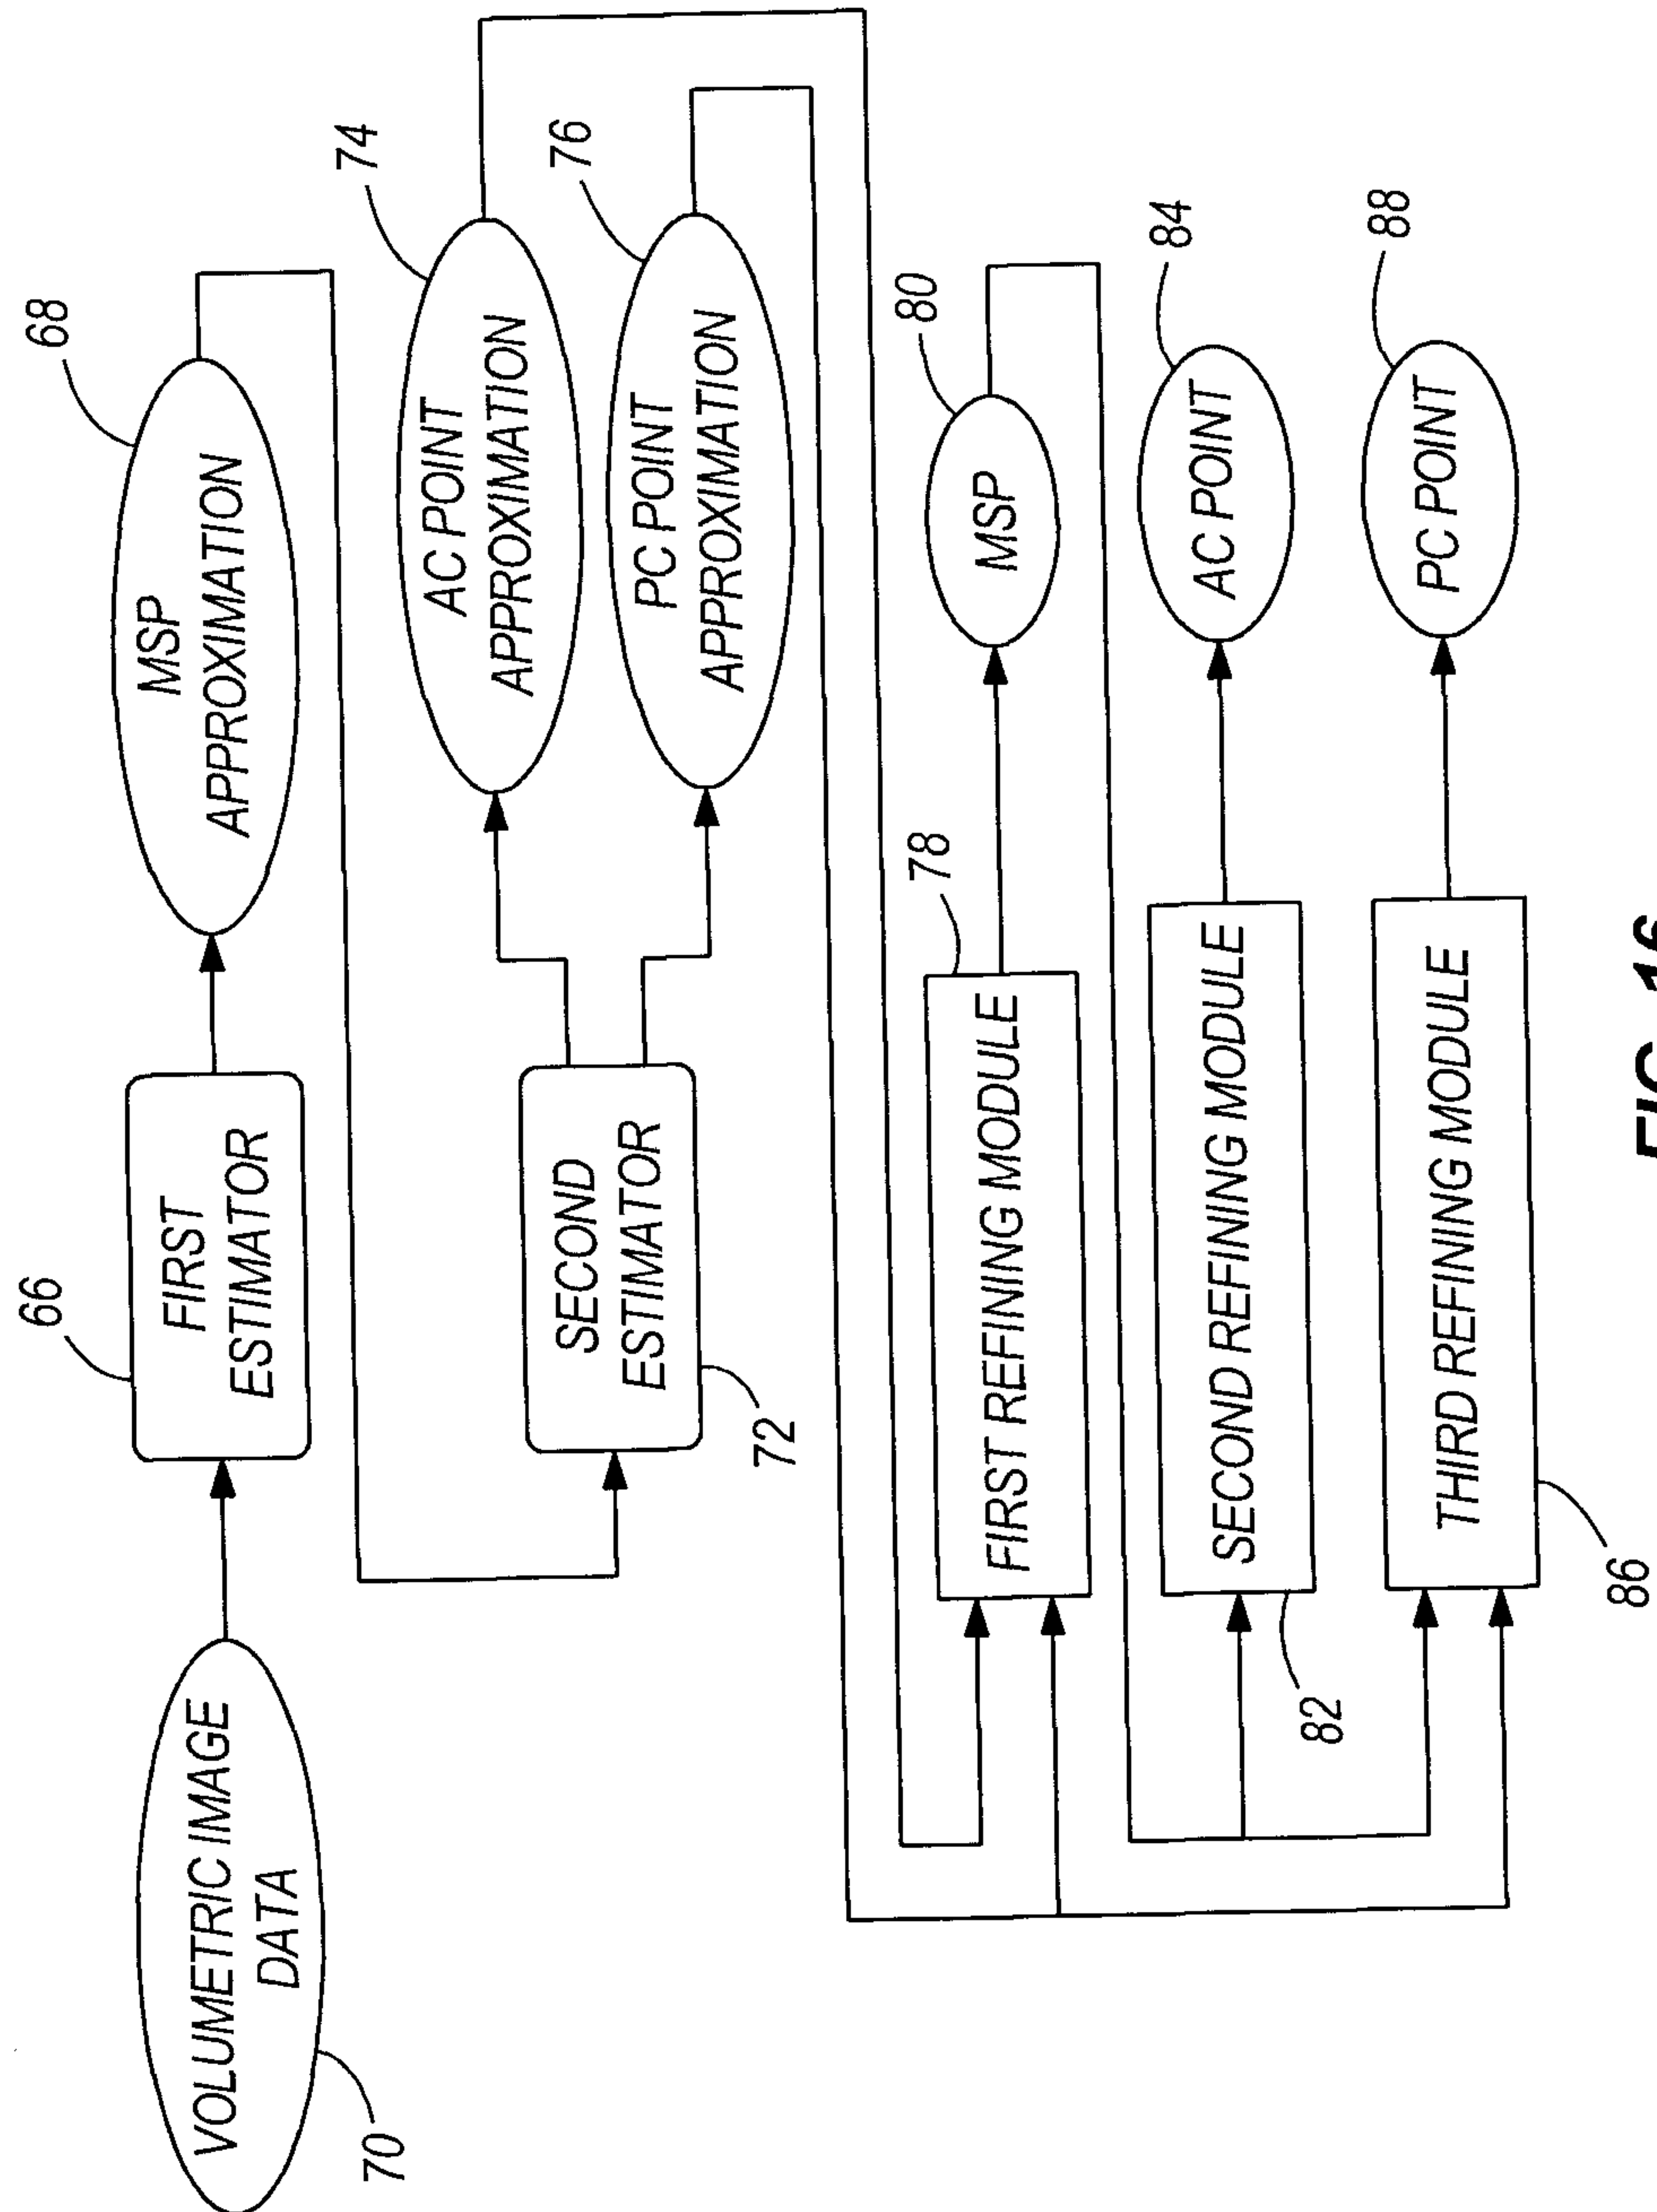