

Ogihara 215200-Australia

AUSTRALIA

PATENTS ACT 1990

681982

Request for A Standard Patent
and Notice of Entitlement

The Applicant identified below requests the grant of a patent to the nominated person identified below for an invention described in the accompanying standard complete patent specification.

Applicant and Nominated Person:

OGIHARA AMERICA CORPORATION

A corporation organized under the laws of the
State of Michigan, U.S.A.;

1480 West McPherson Park Drive,

Howell, Michigan 48843

United States of America.

Invention Title: STRETCH CONTROLLED FORMING MECHANISM AND
METHOD FOR FORMING ~~METAL BLANKS~~

Multiple Gauge Welded Blanks

Actual inventor: WERNER MUNZEN: A citizen of the U.S.A.;

C/O Ogihara America Corporation

1480 West McPherson Park Drive,

Howell, Michigan 48843 U.S.A.

Address for service: Carter, Smith & Beadle
Qantas House
2 Railway Parade
Camberwell
Melbourne 3124 AUSTRALIA

Details of basic application(s):

<u>Country</u>	<u>Filing Date</u>	<u>Application No.</u>
US	10.02.95	08/387,418
EP	12.05.95	95 303210.9


Applicant states as follows:

1. The nominated person is the assignee of the actual inventor.
2. The nominated person is the assignee of the applicant of the basic application(s).
3. The basic application was the first made in a Convention country in respect of the invention.

The nominated person is not an opponent or eligible person described in Section 33-36 of the Act.

date November 10, 1995

OGIHARA AMERICA CORPORATION


Name: HIDEO SENECKA
Title: *Vice President*



AUSTRALIA
Patents Act 1990

PATENT REQUEST : STANDARD PATENT

We, being the person identified below as the Applicant, request the grant of a patent to the person identified below as the Nominated Person, for an invention described in the accompanying standard complete specification.

Applicant: OGIHARA AMERICA CORPORATION
Address: 1480 West McPherson Park Drive, Howell, Michigan 48843,
United States of America

Nominated Person: As above
Address: As above

Invention Title: STRETCH CONTROLLED FORMING MECHANISM AND
METHOD FOR FORMING ~~METAL BLANKS~~
Multiple Gauge Welded Blanks

**Name of actual
Inventor:** Werner MUNZEN

BASIC CONVENTION APPLICATIONS DETAILS

Applicant Name: WERNER MUNZEN
Application Number: 08/387,418
Country: United States of America
Code: US
Date of Application: 10 February 1995



Applicant Name: OGIHARA AMERICA CORPORATION
Application Number: 95303210.9
Country: Europe
Code: EP
Date of Application: 12 May 1995

Address for service in Australia: **CARTER SMITH & BEADLE**, 2 Railway Parade,
Camberwell, Victoria, 3124, Australia. (Attorney Code CD)

Dated : 6 December 1995

CARTER SMITH & BEADLE
Patent Attorneys for the Applicant

TO: The Commissioner of Patents
Fee: \$364.00
Our Ref: #19532 TJH:GM 13ogi



AU9540265

(12) PATENT ABRIDGMENT (11) Document No. AU-B-40265/95
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 681982

(Modified Examination)

(54) Title
STRETCH CONTROLLED FORMING MECHANISM AND METHOD FOR FORMING MULTIPLE GAUGE
WELDED BLANKS

International Patent Classification(s)
(51)⁶ B21D 025/02 B21D 011/02

(21) Application No. : 40265/95

(22) Application Date : 06.12.95

(30) Priority Data

(31) Number	(32) Date	(33) Country
387418	10.02.95	US UNITED STATES OF AMERICA
95303210	12.05.95	EP EUROPEAN PATENT OFFICE (EP)

(43) Publication Date : 22.08.96

(44) Publication Date of Accepted Application : 11.09.97

(71) Applicant(s)
OGIHARA AMERICA CORPORATION

(72) Inventor(s)
WERNER MUNZEN

(74) Attorney or Agent
CARTER SMITH & BEADLE , Qantas House, 2 Railway Parade, CAMBERWELL VIC 3124

(56) Prior Art Documents
WO 94/23860
WO 94/22609
WO 94/22611

(57) Claim

1. A forming mechanism providing controlled stretch of a blank formed thereon, the forming mechanism comprising:

a first die member;

a second die member disposed in opposed facing relation to the first die member, at least one of the first die and the second die being mounted for selective movement toward and away from the other of the first die and the second die; and

a floater assembly comprising at least one blank engaging component disposed adjacent to said second die, the floater assembly being mounted for axial sliding movement relative to the second die;

said floater assembly further comprising a support assembly for said component, said support assembly being constructed and arranged to selectively dispose said at least one blank engaging component in a first position in which a blank engaging surface thereof is closer to said first die member than a blank engaging surface of said

(11) AU-B-40265/95
(10) 681982

-2-

second die member such that said blank engaging component can lock a portion of the blank between said blank engaging component and said first die when said first die engages said blank engaging component thereby preventing further flow of material of said portion and to permit said blank engaging component and the locked portion of the blank to be displaced axially from said first position upon engagement of said component by said first die during a forming stroke thereof.

AUSTRALIA

Patents Act 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name of Applicant:

OGIHARA AMERICA CORPORATION

Actual Inventor:

Werner MUNZEN

Address for service
in Australia:

CARTER SMITH & BEADLE
2 Railway Parade
Camberwell Victoria 3124
Australia

Invention Title:

STRETCH CONTROLLED FORMING MECHANISM
AND METHOD FOR FORMING ~~METAL BLANKS~~
MULTIPLE GAUGE WELDED BLANKS

The following statement is a full description of this invention, including the best method of performing it known to us



BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a method and apparatus for forming sheet metal and, more particularly to a method and apparatus that controls stretching of multiple gauge welded blanks during forming.

2. Description of the Related Art

Recent advancements in technology have provided blanks for stamping that are comprised of sheet metals of various gauges having different mechanical and chemical properties welded together to form a single welded blank. Conventional techniques used to weld the sheet metal components together include laser, induction, and mash welding. These welded blanks are of interest particularly to the automotive industry. Welded blanks can be formed into automotive body panels such that heavier gauge steel is positioned where strength is required, and lighter gauge steel is positioned where strength is less critical. Consequently, body panels formed from welded blanks provide weight reduction because heavier gauge material is provided only to those areas requiring additional strength. Additionally, welded blanks afford a reduction in the number of sheet metal components and welding operations required.

Conventional stamping dies, however, are generally incapable of producing satisfactory products, including automotive body panels, from welded blanks. Indeed, to produce products of satisfactory quality, it is essential to



deform sheet metal blanks in a uniform manner. When conventional dies are used to form welded blanks, the lighter gauge portion of the welded blank stretches before the heavier gauge portion is subject to deformation. At a minimum, such a condition causes uneven stretch of the lighter gauge material. In the worst case, conventional dies split or wrinkle the lighter gauge material of the welded blank during forming.

SUMMARY OF THE INVENTION

10 It is an objective of the present invention to provide an apparatus and method for forming welded blanks that uniformly deforms the welded blank. It is a further objective of the present invention to provide an apparatus and method for forming welded blanks that prevents splitting or wrinkling of the welded blank. It is yet a further objective of the present invention to provide an apparatus and method for forming welded blanks that provides unlimited and effective control over material flow during product formation from welded blanks. It is a further objective of the present invention to provide an apparatus and method for forming welded blanks that may be adapted to a variety of configurations.

To achieve the foregoing and other objectives of the invention, a stretch controlled forming mechanism is provided that, in accordance with the present invention, forms and locks the welded blank between opposed die surfaces at the junction where the different gauge material of the blank are welded together. Such locking prevents continued flow of material in the welded areas during the remainder of the formation process. Thereafter, with the joined areas restricted from further material flow, the



portion of the welded blank not previously formed is formed between the remaining opposed surfaces of the dies.

Thus, in accordance with the present invention, a first set of opposed dies having opposed die surfaces is provided.

5 One or all of those dies are movable relative to the others in a conventional manner. Disposed adjacent to or bounded by one of the dies of the set is a floater assembly, also having an opposed die surface. In a first embodiment of the invention, as described below, the floater assembly is
10 disposed inwardly of the outer periphery of a lower die of the set. As one skilled in this art will appreciate after reading this description, placement of the floater is dictated by the location of the welded areas in the blank to be formed. The floater assembly is mounted to a positioning
15 assembly so as to be moveable relative to the dies of the first set. In a first embodiment of the present invention, the positioning assembly is actuated or powered by a die cushion incorporated as a part of the press.

More particularly, in the first embodiment in
20 accordance with the principles of the invention, a first die having a die surface is provided and spaced from a second die having a die surface opposed to the first die surface. Disposed inside of the second die and slidable relative to the second die is a floater assembly that also has die
25 surface(s) opposed to the first die surface. Again, the die surface(s) of the floater assembly are positioned so that they will correspond to the welded areas of the blank. Thus, the floater assembly is opposed to a portion of the first die, and the second die is opposed to the remainder of
30 the die surface of the first die.

Prior to commencement of the forming process, the floater assembly is biased by the die cushion assembly, which is of known type, so that its die surface is ahead of



that of the cavity of the second die. A welded blank is placed in the apparatus so that at least a portion of a welded seam of the welded blank overlies a die surface of the floater assembly. Once the blank is so positioned, 5 upper binders disposed peripherally of the first die and opposed to the periphery of the second die are displaced towards the second die to clamp and hold the blank in position. The first die is then moved towards and into contact with the floater assembly by conventional means. 10 During this period, the cushion assembly biases the floater assembly against the first die with sufficient force to effect formation of the blank therebetween, thereby both forming and locking the welded portion of the welded blank between the first die and the floater assembly. This 15 biasing force, however, is insufficient to prevent the forward progress of the first die. Thus, continued movement of the first die pushes the welded blank and displaces the floater assembly relative to the second die. During this displacement, the welded portion of the welded blank remains 20 locked between the first die and the floater assembly. By the end of the stroke of the first die, the remaining portion(s) of the welded blank are formed between the first die and the second die.

In accordance with a second embodiment of the invention 25 the floater assembly is disposed inwardly of the outer periphery of an upper die of the press. As in the first embodiment, the floater assembly is mounted to a positioning assembly for movement relative to the upper and lower dies. In this embodiment, the positioning assembly incorporates a 30 pneumatic or hydraulic system to bias the floater assembly to position the die surface of the floater assembly ahead of the cavity of the upper die. When the upper die and floater assembly are displaced towards the lower die, the welded



portion of the blank is formed and locked between the floater assembly and the lower die. Continued engagement of the floater assembly against the lower die displaces the floater assembly relative to the upper die and permits
5 formation of the remaining portion(s) of the welded blank between the upper die and the lower die.

Other objects, features, and characteristics of the present invention as well as the methods of use of related elements will become more apparent upon consideration of the
10 following description and the appended claims with reference to the accompanying drawings, wherein like reference numbers designate corresponding elements in the various figures.

10
20
30
40
50
60
70
80
90
100
110
120
130
140
150
160
170
180
190
200
210
220
230
240
250
260
270
280
290
300
310
320
330
340
350
360
370
380
390
400
410
420
430
440
450
460
470
480
490
500
510
520
530
540
550
560
570
580
590
600
610
620
630
640
650
660
670
680
690
700
710
720
730
740
750
760
770
780
790
800
810
820
830
840
850
860
870
880
890
900
910
920
930
940
950
960
970
980
990

10
20
30
40
50
60
70
80
90
100
110
120
130
140
150
160
170
180
190
200
210
220
230
240
250
260
270
280
290
300
310
320
330
340
350
360
370
380
390
400
410
420
430
440
450
460
470
480
490
500
510
520
530
540
550
560
570
580
590
600
610
620
630
640
650
660
670
680
690
700
710
720
730
740
750
760
770
780
790
800
810
820
830
840
850
860
870
880
890
900
910
920
930
940
950
960
970
980
990



BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a schematic sectional view of a stretch controlled forming apparatus provided in accordance with a first embodiment of the present invention;

FIGURE 2 is a schematic sectional view of the apparatus of FIGURE 1 showing the binder clamping a blank in position between the binder and the periphery of the second die;

FIGURE 3 is a schematic sectional view of the apparatus of FIGURE 1 showing the first die displaced into engagement with the floater assembly;

FIGURE 4 is a schematic sectional view of the apparatus of FIGURE 1 showing the first die displaced into engagement with the remainder of the second die;

FIGURE 5 is a schematic sectional view of the apparatus of FIGURE 1 showing the first die retracted after formation;

FIGURE 6 is a schematic sectional view of the apparatus of FIGURE 1 showing the binder dies retracted after formation and the floater assembly in its elevated position; and

FIGURE 7 is a plan view of the lower die assembly in accordance with the invention;

FIGURE 8 is a schematic sectional view taken along line 8-8 of FIGURE 7; and

FIGURE 9 is a schematic sectional view of a stretch controlled forming apparatus provided in accordance with a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PRESENTLY
PREFERRED EXEMPLARY EMBODIMENTS

In FIGURE 1, a first embodiment of a stretch-
5 controlled forming mechanism in accordance with the
invention, and with which the method of the
invention can be carried out, is designated
generally by the reference number 10. At a minimum,
the mechanism of this and other embodiments of the
10 present invention includes three blank forming die
components, one of which is opposed to the other
two, which are disposed adjacent one another. As
one skilled in the art will recognize after
reviewing the following detailed description, any
15 number of die components greater than three may be
used. Additionally, for the sake of convenience
only, the dies will be referred to by the
designations first, second, etc. and one of the die
components, which could be characterized as a third
20 die, will be referred to as a floater assembly
because of the manner in which it is preferably,
although not necessarily, mounted. Further, for
convenience, the upper die will be referred to as
the first die. The apparatus and method of the
25 present invention, however, are not limited to the
particular die orientations or labels used herein,
as will become apparent from the detailed
description provided herein below. Thus, for
example, the first die could be either the upper die
30 or the lower die and the floater assembly could be
disposed adjacent to or inside of either the upper
die or the lower die. As will become clear
following review of this detailed description,
placement of the floater assembly is dictated by the

relative location of the welded areas of the blank to be formed.

As shown in FIGURE 1, the molding apparatus embodying the principles of the present invention includes a first die which in the first illustrated embodiment is in the form of an upper punch 12 selectively driven towards or retracted from a workpiece ~~for example~~ comprising a welded blank ~~14~~, by a press inner ram 16 which may be of conventional construction. The first die 12 has a die surface 18 that, upon operative engagement, imparts a desired shape to the welded blank 14. An upper binder 20, which is conventionally considered as a portion of the first die 12, is mounted in surrounding relation to the first die 12 and is selectively driven towards or retracted from the workpiece 14 by a press outer ram 22, again of conventional construction, to hold the workpiece 14 during forming. Presses of this configuration commonly are called double action presses. As one of ordinary skill in this art will recognize, particularly following review of the description of the second embodiment, the present invention is not limited in application to double action presses.

The molding assembly 10 further comprises a lower die assembly 24 which in the first illustrated embodiment includes the second die 26. As best seen by reference to FIGURES 1, 7, and 8, the second die 26 defines roughly a U-shaped space 25 in which other assemblies, as described below, are disposed. The second die 26 is provided in opposed, facing relation to the first die 12, and upper binder 20. The second die 26 has a die surface 30 that in conjunction with the first die surface 18 imparts a



particular shape and configuration to a portion of the welded blank 14.

As shown in FIGURE 1, the first embodiment of the present invention includes a ~~fixed~~
 5 ~~second die 26 having the U-shaped space 25 and a~~
~~first die 12 that can be selectively~~ displaced
 toward and away from the second die. The present
 invention, of course, only requires relative
 movement between the first and second dies. Thus,
 10 either or both of the dies may be movable.

In accordance with the invention, a floater
 assembly 32 is positioned to correspond to the
 locations of welded seams 34 of the blank to be
 formed. In the first exemplary embodiment
 15 illustrated in FIGURES 1-8, the floater assembly 32
 is defined inside of the second die 26 so as to
 correspond to the location(s) of welded seams 34 in
 the welded blank 14. The floater assembly 32 may be
 in the form of a single die component 36 mounted
 20 inside of the second die. Alternatively, the
 floater assembly 32 may be comprised of a plurality
 of die components 36 suitably disposed about the
 periphery or inside of the second die as deemed
 appropriate or necessary to correspond to the
 25 location of the welded seams 34 of the welded blank
 14 to be formed in the molding apparatus 10. While
 such variations will be apparent to one skilled in
 this art upon review of this disclosure, the first
 illustrated embodiment contemplates a floater
 30 assembly comprising floater die components 36
 disposed inside of a second die and the description
 hereinbelow will be directed to that embodiment.

The floater assembly 32 comprises at least
 one die component 36, as noted above, hereinafter



referred to in the singular as a floater component 36. In the first illustrated embodiment, the die component 36 is mounted slidably in a vertical portion of the U-shaped space 25 defined by the second die 26. It is also to be noted that in this embodiment, the blank engaging face of the floater component has a step 37 defined on the die surface thereof to lock both the light and heavy gauge sheets of the blank in a secured position during subsequent forming.

The floater assembly 32 further comprises a positioning assembly 38 for supporting the floater component 36 relative to the second die 26. In the first illustrated embodiment, the positioning assembly 38 includes a support plate 40 having a first side 42 and a second side 44. The first side 42 of the plate 40 is in supporting relation to the floater component 36. The second side 44 of the plate 40 is supported relative to the second die 26 and the press base by cushion pins 46. Stop blocks 43 are mounted to the first side 42, and bottoming blocks 45 are mounted to the second side 44. Those blocks are sized, as described more fully hereinbelow, to appropriately define the stroke of the positioning assembly 38. In the first illustrated embodiment, a single plate 40 supports the floater component 36 of the floater assembly 32. It is to be appreciated, however, that separate plates 40 may be provided for each floater component 36 of the floater assembly 32 where more than one component 36 is provided. However, to ensure simultaneous and uniform displacement of the floater component 36 of the floater assembly 32 the provision of a single continuous plate structure is

currently envisioned to be most desirable. The U-shaped space 25 accommodates such a common plate.

The cushion pins 46 may be steel rods approximately 1.5 inches in diameter that extend
 5 through pin holes in the base of the press and transmit force from the die cushion assembly (not shown) to the floater plate and hence to the floater component 36. Die cushion assemblies are conventional mechanisms provided to supply power to
 10 presses so equipped. For example, cushion assemblies are used to lift, through pins, a workpiece from a die cavity following formation.

In the first illustrated embodiment, the cushion pins 46 are provided through pin holes such
 15 that sufficient support is provided for and force is applied to the floater component 36. For example, the pins may be disposed every six inches over the area of the plate 40. Generally, the floater component 36 is biased continually by the cushion
 20 assembly subject to lockout, as described more fully hereinbelow.

The force with which the floater component is biased and the displacement of the floater assembly relative to the cavity of the second die, i.e. the
 25 stroke of the floater component 36 depends on that deemed necessary or desirable to form the blank at the weld seam and to lock it during subsequent forming, the characteristics of the weld blank, the part being formed, etc. It is anticipated that
 30 optimum displacement and force values will be best determined by try-out.

As noted above, specific values for the aforementioned parameters are dictated necessarily, of course, by the design considerations presented by

particular applications, and therefore, no preferred values are suggested. Orders of magnitude for those parameters observed by the inventor during experimentation, however, likely will prove typical.

5 In one case, satisfactory results were achieved when the inner ram 16 was a 500 ton press, the outer ram 22 was an 80 ton press, the bias force of the cushion assembly was set at 19 tons, and the cushion travel was limited to 1 3/4 inches. In another
10 case, satisfactory results were achieved when the inner ram 16 was a 1,200 ton press, the outer ram 22 was an 90 ton press, the bias force of the cushion assembly was set at 25 tons, and the cushion travel was limited to
15 60 mm.

A mechanism other than a conventional die cushion for biasing the floater component 36 may be provided in addition or in the alternative where appropriate, as will be readily evident upon review
20 of the description of the second embodiment, including hydraulic pistons operatively engaged in hydraulic cylinders, pneumatic cylinders, and other known resilient/biasing support structures.

Wear plates 48 are suitably disposed
25 intermediate the floater assembly 32 and each side of the vertical portion of the U-shaped space 25 of the second die 26. The wear plate(s) 48 ensure there will be smooth, low friction, axial sliding movement of the floater assembly 32 relative to the
30 structures adjacent thereto without undue component wear.

While in the illustrated embodiment the floater assembly 32 is provided so as to be selectively displaced relative to the second die 26,

it is to be understood that depending upon the shape to be imparted to the welded blank 14, and other considerations, it may be deemed advantageous or desirable to provide an assembly in which the so called floater assembly is in fact fixed and the second die is mounted for selective displacement towards the first die to impart the desired shape to the metal blank following engagement of the welded seams by the floater assembly and first die. Thus, while the first illustrated embodiment contemplates a fixed second die and a shiftable floater assembly the invention is not deemed to be limited to that particular configuration.

In use, a welded blank 14 is positioned on the top of the lower die assembly 24 while the first die 12 and upper binder 20 are disposed in their elevated positions (FIGURE 1). The welded blank 14 is secured in position by the upper binder 20 once it reaches the end of its descending stroke and clamps the welded blank 14 between the upper binder 20 and the periphery of the second die 26 (FIGURE 2). Once clamped and in a conventional manner, the binder 20 prevents gross movement of the workpiece yet allows blank material to flow inwardly during formation.

The first die 12 is then displaced towards the second die 26 and the floater assembly 32. As the first die 12 contacts the welded blank 14 and displaces it relative to mated surfaces of the upper binder 20 and the second die 26, the first die 12 pushes the blank down onto the top surface of the floating component 36 of the floater assembly 32. This engagement forms or imparts a desired shape to the welded seam portions of the blank 14 and

securely locks the welded seams 34 between the first die 12 and the floater component 36 (FIGURE 3). As noted above, the step 37 assists in locking the welded blank in a secured position during subsequent forming.

To properly form and lock the welded portion of the welded blank, the biasing force and stroke of the cushion assembly must be selected appropriately in light of expected forming loads and final dimensions of the finished product. At a minimum, the cushion assembly must bias the floater component 36 with a force sufficient to deform the blank yet sufficiently less than that of the first die press that the floater component 36 will be displaced against its bias in response to continued movement of the first die 12. Further, the selected biasing force must be sufficient to lock the welded portion of the welded blank to isolate stretch and formation of the heavier gauge material from stretch and formation of the lighter gauge material.

Following forming and locking of the welded portion of the welded blank 14, continued downward motion of the first die 12 displaces the floater assembly 32 downwardly relative to the second die 26 and allows the die surface 18 of the first die 12 and the die surface 30 of the second die 26 to form the remainder of the blank (FIGURE 4). Thus, at the end of the descending stroke of the first die 12, forming of the blank 14 has been substantially completed. Because the welded seam(s) 34 were clamped and locked between the first die 12 and the floater assembly 32 in advance of formation of the remainder of the blank, no cracks or splits are

generated in the thinner sheet material near the joint.

As is apparent, and as was noted above, although in the illustrated embodiment the second die was fixed throughout the stroke of the first die, the second die could be mounted for movement relative to the first die if necessary or appropriate to the formation of the blank.

Following blank formation, the first die 12 is retracted to its elevated position. Thereafter, the upper binder 20 is retracted to its elevated position. However, the floater assembly 32 remains at its bottom dead center or lower limit of its stroke until the first die 12 and the upper binder 20 are completely cleared from the molded blank 14' and are in their elevated positions (FIGURE 5). The floater assembly is maintained at the lower limit of its stroke by locking out the die cushion in a known manner so that no power or biasing force is transmitted to floater assembly 32. The biasing action of the cushion assembly is reengaged following a time delay to allow sufficient time for the upper binder 20 and the first die 12 to retract, to avoid distortion of the formed blank.

After the upper binder 20 is retracted to its elevated position and the time delay expires, the cushion assembly is engaged, and the floater assembly 32 is elevated to lift the formed part 14' off of the lower die 26. The formed part may then be removed and otherwise further processed (FIGURE 6).

As noted above, some presses are not equipped with die cushion assemblies. In such apparatus or when use of the die cushion is impractical or

undesirable, a hydraulic or pneumatic system may be provided to bias the floater assembly. Such an alternative system is schematically illustrated in the embodiment of FIGURE 9, which is described
5 herein below.

In the second embodiment, a floater assembly in accordance with the invention is incorporated in a single action press. As noted above, however, the present invention is not limited to a particular
10 configuration, and the press configurations shown are intended to illustrate the flexibility of the present invention rather than suggest any limitation.

In the second illustrated embodiment, the
15 first die 112 is provided now as a lower fixed die, and the die assembly 124 is disposed above the first die 112. Die assembly 124 is selectively driven towards or retracted from the workpiece 114 by the press ram 116. Again, the press ram 116 is of
20 conventional design.

The first die 112 is fixed to a press bed and includes the die surface 118 that imparts a desired shape to the welded blank 114. A blank holder 150 is mounted in surrounding relation to the first die
25 112 and serves the same function as a binder. Specifically, biasing cylinders 152, for example nitro cylinders, disposed below the blank holder 150 push the facing surface of the holder above the die surface 118 and provide sufficient force to clamp
30 the blank 114 during forming. In a known manner, the blank holder 150 prevents gross movement of the blank during forming while still allowing inward material flow.

The die assembly 124 comprises in part the second die 126 including the U-shaped space in which the positioning assembly of the second embodiment is disposed. The second die 126 is provided in
 5 opposed, facing relation to the first die 112 and the blank holder 150. The second die includes the die surface 130 that in conjunction with the first die surface 118 imparts a particular shape and configuration to a portion of the welded blank 114.

10 The floater assembly 132 is defined inside of the second die 126 and is positioned to correspond to the locations of the welded seams 134 of the blank to be formed. As was noted above with respect to the first embodiment, and remains true in this
 15 exemplary embodiment, the floater assembly 132 may include a single die component 136 or a plurality of such die components disposed about the periphery or inside of the second die as deemed necessary by the position of the welded seams 134. As with the first
 20 embodiment, the blank engaging face of the floater component 136 preferably includes a step 137 to positively lock the welded portion of the blank 114 in a secured position during subsequent forming.

25 The floater assembly 132 further comprises a positioning assembly 154 incorporating many of the components of the positioning assembly 38 of the first illustrated embodiment. The positioning assembly 154 of the second embodiment includes the plate 140 having a first side 142 and a second side
 30 144. The first side 142 is in engaging relation to the floater component 136. The second side 144 is in engaging relation to a drive assembly 156, described more fully hereinbelow. Stop blocks 143 and bottoming blocks 145 are mounted to the plate

140. Those blocks are sized and serve the same function as those indicated in the description of the first illustrated embodiment. Again, it is to be appreciated that separate plates may be provided
5 for each floater component 136.

In the second illustrated embodiment, the drive assembly 156 serves a function similar to that of the cushion assembly. The drive assembly 156 includes an adapter plate 158 disposed between the
10 press ram 116 and the second die 126. A plurality of drive devices 160 housed within the adapter plate 158 are engaged operatively to the plate 140. Suitable drive devices 160 may be, for example, hydraulic or pneumatic cylinder and piston
15 assemblies. For this illustrated embodiment, the drive devices are pneumatic cylinders. Notwithstanding the illustrated structure, the particular drive devices provided in accordance with the second embodiment of the invention depend upon
20 the desired displacement of the floater component 136 during the descending stroke of the die assembly 124 and the necessary load to lock and form the welded portion of the blank 114.

The drive assembly 156 further includes
25 supply lines, exhaust lines, and a storage tank (not shown in detail). The drive assembly 156 continually biases the floater component 136 subject to lockout. During formation, the pneumatic cylinders are pressurized to push the floater
30 component 136 towards its extended position with sufficient force to form and lock the welded portion of the welded blank. When required, as described below, the pneumatic cylinders can be selectively deactivated by exhausting to tank.

The second illustrated embodiment is used to form the welded blank in a manner generally similar to the first embodiment. A welded blank 114 is positioned on the elevated surface of the blank holder 150 while the die assembly 124 is in its elevated position. Thereafter, the press ram 116 pushes the die assembly 124 towards the welded blank 114. Because the blank holder 150 is elevated slightly relative to the first die 112, a peripheral portion of the second die 126 clamps the blank 114 against the blank holder 150 prior to any other contact between the dies and the blank. The blank holder 150 retracts under the force of the second die 126, and the biasing force of the nitro cylinders 152 prevents gross movement of the blank 114 during subsequent forming. At this stage, the blank 114 contacts the die surface 118 of the first die 112.

Continued downward motion of the die assembly 124 displaces the blank holder 150 and brings the floater component 136 into contact with the welded portion of the welded blank 114. This engagement forms the welded portion of the blank 114 and securely locks that portion between the floater component 136 and the first die 112. The discussion of required forces and displacements in regard to the first illustrated embodiment is generally applicable here, and therefore, is not repeated.

Following forming and locking of the welded portion of the welded blank 114, continued downward motion of the die assembly 124 displaces the floater component 136 against the biasing action of the pneumatic cylinders and allows the die surface 130 of the second die 126 and the die surface 118 of the

first die 112 to form the remainder of the blank. Again, because the welded seam 134 was locked between the first die 112 and the floater component 136 prior to formation of the remainder of the blank, no wrinkling or splitting occurs.

5 Following formation, the pneumatic cylinders are exhausted to tank thereby unloading the biasing force of the drive devices 160. Thereafter, the die assembly 124 is retracted to its elevated position and moves relative to the floater assembly 132. The floater assembly 132 moves
10 relative to the second die 126 under its weight and gently pushes the formed workpiece 114' away from the die cavity.

It should be noted that the embodiment of FIG.9 is seen to be particularly advantageous when forming, for example, an automotive body panel, such as a door, because the formed
15 part does not need to be turned over in advance of further processing, as would be the case with a press of the type shown in FIG.1.

Indeed, as is apparent from the foregoing, the floater assembly of the invention can advantageously be incorporated
20 either in the upper or lower die structure of a press. This flexibility permits the advantages of the invention to be realized in a variety of part forming systems.



While the invention has been described in connection with the preferred embodiments, it should be understood readily that the present invention is not limited to the disclosed embodiments. Rather, the present invention is
5 intended to cover various equivalent arrangements and methods included within the scope of the appended claims.

10
20
30
40
50
60
70
80
90
100

110
120
130
140
150
160
170
180
190
200



JRG:NLF:#19532.EXM

16 May 1997

The claims defining the invention are as follows:

1. A forming mechanism providing controlled stretch of a blank formed thereon, the forming mechanism comprising:

a first die member;


5 a second die member disposed in opposed facing relation to the first die member, at least one of the first die and the second die being mounted for selective movement toward and away from the other of the first die and the second die; and

10 a floater assembly comprising at least one blank engaging component disposed adjacent to said second die, the floater assembly being mounted for axial sliding movement relative to the second die;

15 said floater assembly further comprising a support assembly for said component, said support assembly being constructed and arranged to selectively dispose said at least one blank engaging component in a first position in which a blank engaging surface thereof is closer to said first die member than a blank engaging surface of said
20 second die member such that said blank engaging component can lock a portion of the blank between said blank engaging component and said first die when said first die engages said blank engaging component thereby preventing further
25 flow of material of said portion and to permit said blank engaging component and the locked portion of the blank to be displaced axially from said first position upon engagement of said component by said first die during a forming stroke thereof.

2. A forming mechanism according to claim 1, wherein the
30 first die is movable toward and away from the second die and the second die is fixed.

3. A forming mechanism according to claim 1, wherein the support assembly comprises a plate having a first surface and a second surface, the first surface being inoperative
35 engagement with said



component, and a spring assembly inoperative engagement with said second surface of the plate.

4. A forming mechanism according to claim 3, wherein said spring assembly at least selectively urges said component toward said first die.

5. A forming mechanism according to claim 4, wherein said spring assembly comprises a plurality of cushion pins.

6. A forming mechanism according to claim 1, wherein at least one blank engaging component are arranged so as to substantially correspond to a location and arrangement of welded seams of a blank to be formed by said first and second dies.

7. A forming mechanism according to claim 1, wherein the floater assembly further comprises at least one wear plate disposed between said component and said second die.

8. A forming mechanism according to claim 1, further comprising an upper binder engageable to a periphery of said second die for clamping and holding a peripheral edge of a blank to be formed by said first and second dies.

9. A forming mechanism according to claim 1, wherein said at least one blank engaging component is disposed inside of said second die.

10. A forming mechanism according to claim 1, further comprising an upper binder and a lower



binder for clamping and holding a peripheral edge of a blank to be formed by said first and second dies.

11. A method for forming a blank, comprising the steps of:

providing a molding apparatus comprising:

first die member;

a second die member disposed in opposed facing relation to the first die member, at least one of the first die and the second die being mounted for selective movement toward and away from the other of the first die and the second die; and

a floater assembly comprising at least one blank engaging component disposed adjacent to said second die, the floater assembly being mounted for axial sliding movement relative to the second die, said floater assembly having a support assembly for said component, said support assembly being constructed and arranged to selectively dispose said at least one blank engaging component in a first position in which a blank engaging surface thereof is closer to said first die member than a blank engaging surface of said second die member and to permit said blank engaging component to be displaced axially from said first position upon engagement of said component by said first die member during a forming stroke thereof;

placing a metal blank intermediate said first and said second die members;

displacing said first die member toward said second die member;

locking a first portion of said blank between said first die member and said blank engaging component thereby preventing further flow of material of said first portion;

- 5 (displacing said first die member, said blank engaging component and said first portion of said blank clamped therebetween towards said second die member; and

forming a second portion of the blank spaced from said first portion between the first die member and the second die member.

- 10 12. A method as in claim 11, where the step of providing a molding apparatus comprises providing a molding apparatus having an upper binder, and further comprising the step of clamping a periphery of said blank between said upper binder and a periphery of said second die before said step of
15 clamping a first portion.

13. A method as in claim 11, where the step of providing a molding apparatus comprises providing a molding apparatus having upper and lower binders, and further comprising the step of clamping a periphery of said blank between said
20 upper and lower binders before said step of clamping a first portion.

14. A method as in claim 11, wherein said at least one blank engaging component is disposed inside of said second die.

- 25 15. A method as in claim 11, wherein said step of placing a metal blank comprises placing a metal



blank having at least one welded seam intermediate said first and said second die members.

16. A method as in claim 11, wherein said step of placing a metal blank comprises placing a steel blank intermediate said first and second die members.

17. A method for forming a welded blank having a relatively light gauge portion, a relatively heavy gauge portion and a welded portion defined therebetween, said method controlling stretch of said welded blank formed thereby, the method comprising the steps of:

forming said welded portion of said welded blank;

locking said welded portion thereby preventing further flow of material of said welded portion; and

forming remaining portions of said welded blank while the welded portion is locked.

18. A method for forming a metal blank, said method controlling stretch of said blank formed thereby, the method comprising the steps of:

providing a metal blank having a first portion to be formed and a second portion to be formed;

forming said first portion of said blank;

locking said first portion of said blank thereby preventing further flow of material of said first portion; and

forming said second portion of said blank while the first portion is locked.

19. A method as in claim 18, wherein said step of providing a metal blank comprises providing a steel blank.

20. A method as in claim 18, wherein said step of providing a metal blank comprises providing a metal blank having
5 portions of differing gauges.

DATED: 16 May 1997

CARTER SMITH & BEADLE
Patent Attorneys for the Applicant:
OGIHARA AMERICA CORPORATION



JRG:NLP:#19532.EXM

16 May 1997

ABSTRACT

The present invention relates to a stretch controlled forming mechanism (10) and method for preventing uncontrolled stretching, wrinkling, or splitting of blanks (14) during forming. Specifically, a stretch controlled forming mechanism (10) is provided that, in accordance with the present invention, forms and locks the blank (14) between opposed die surfaces (12,36) along selected portions (34) thereof. Such locking prevents continued flow of material in those areas during the remainder of the formation process. Thus, with the selected areas (34) restricted from further material flow, the portion of the blank not previously formed can be formed between opposed dies, without damage to the selected seams (34) or the remaining material of the blank (14).

40265/95

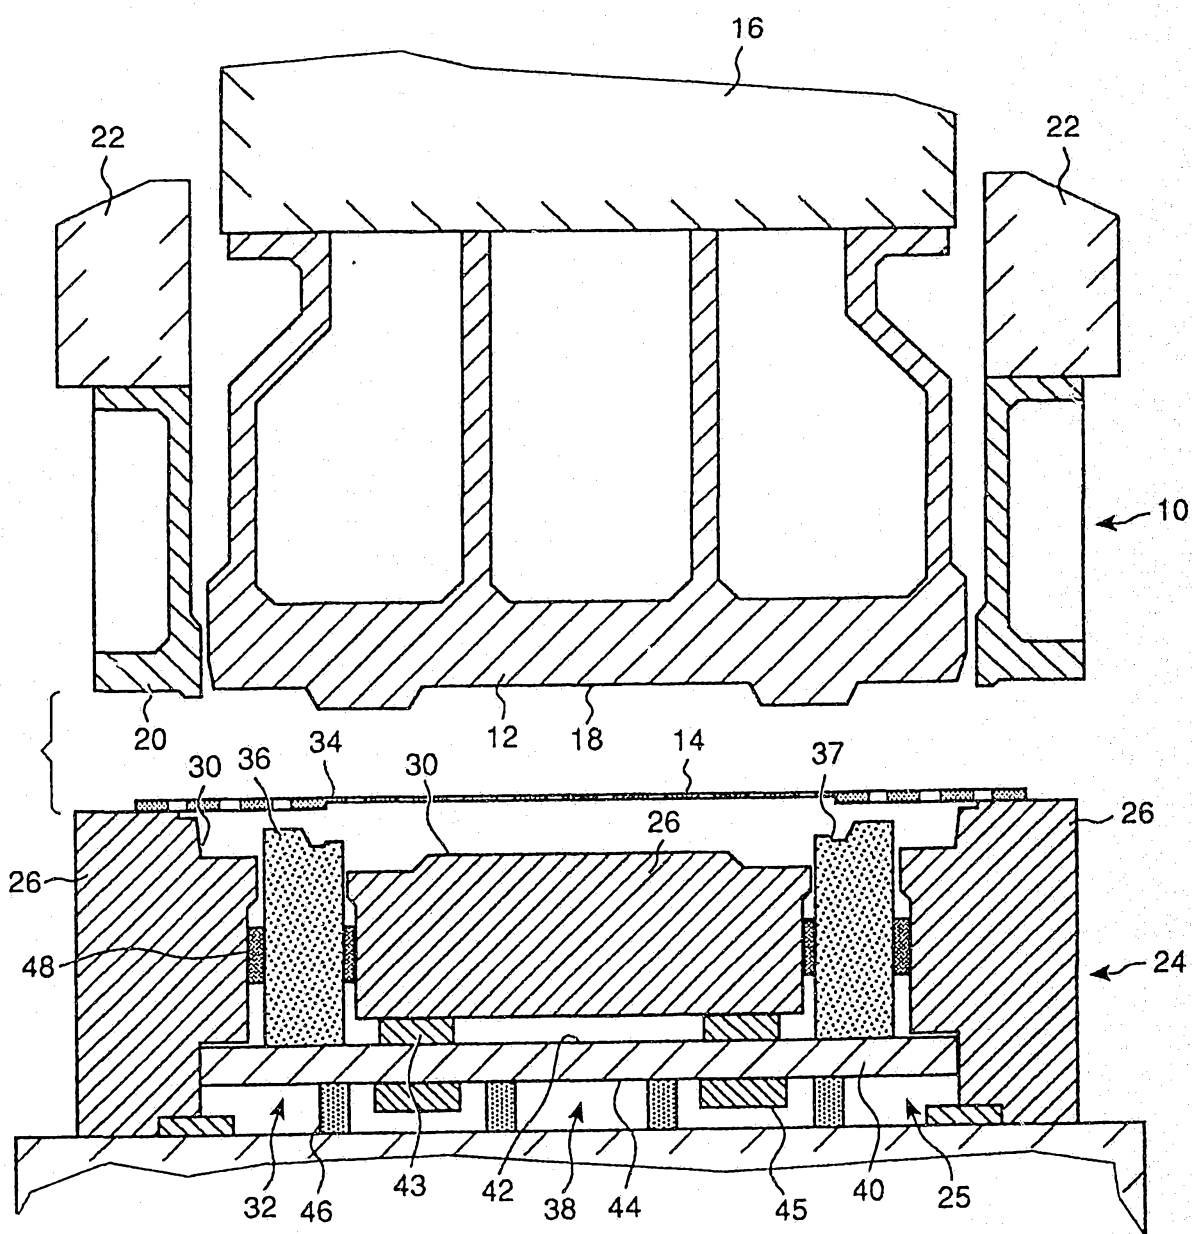
Fig. 1

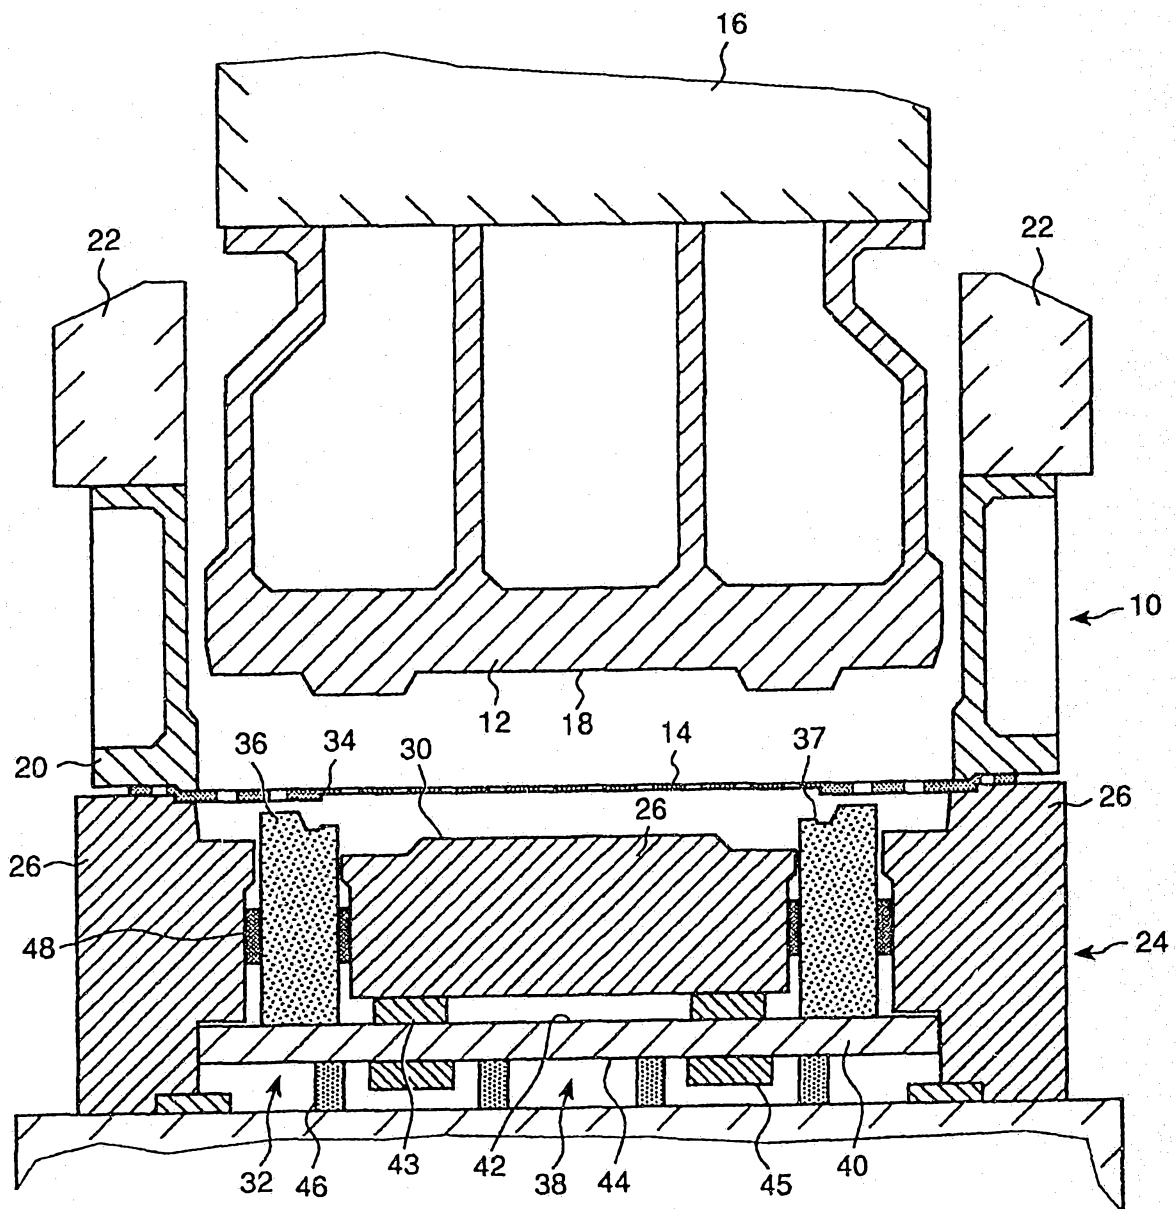
Fig. 2

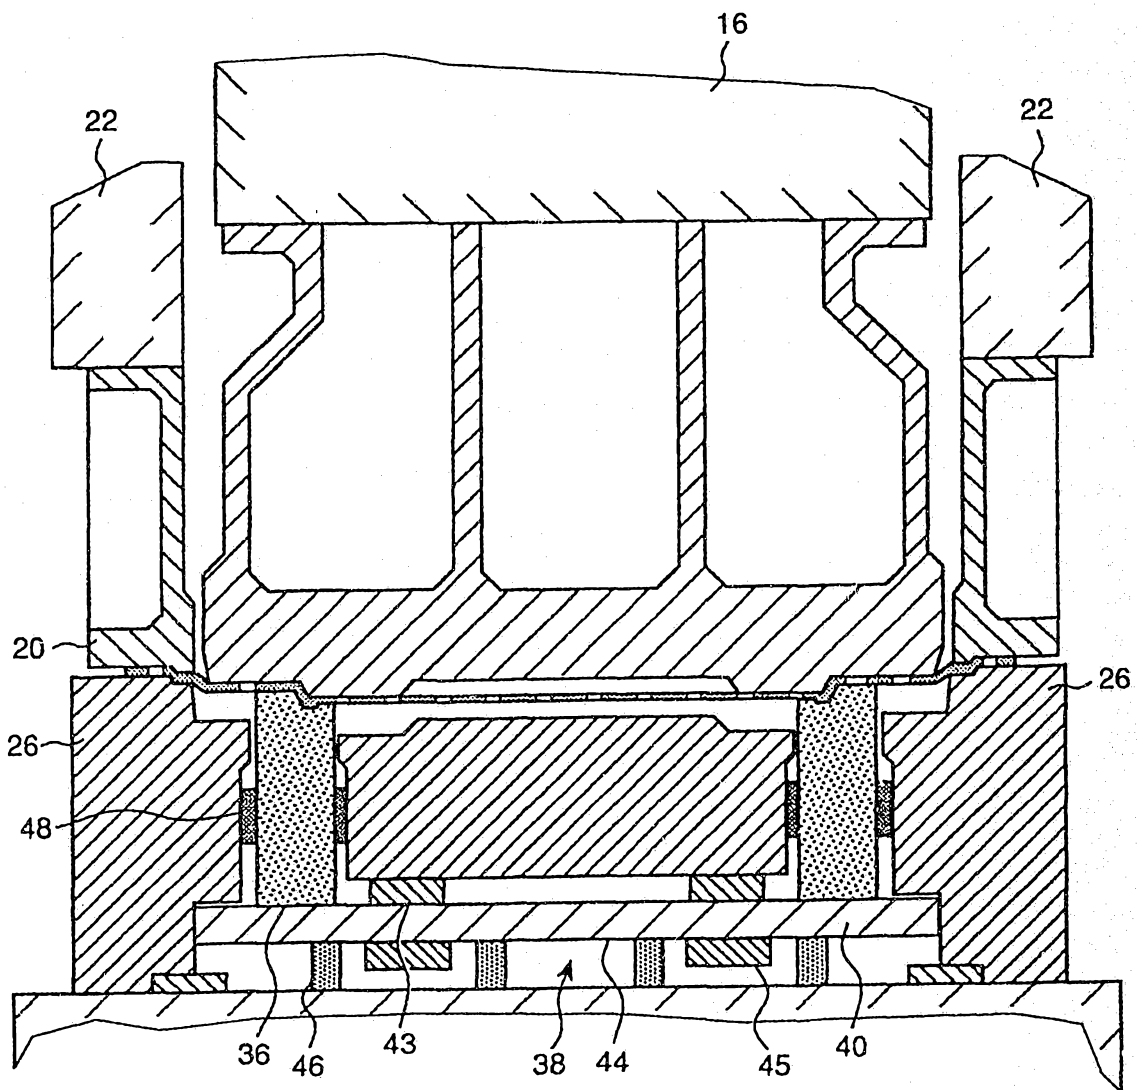
Fig. 3

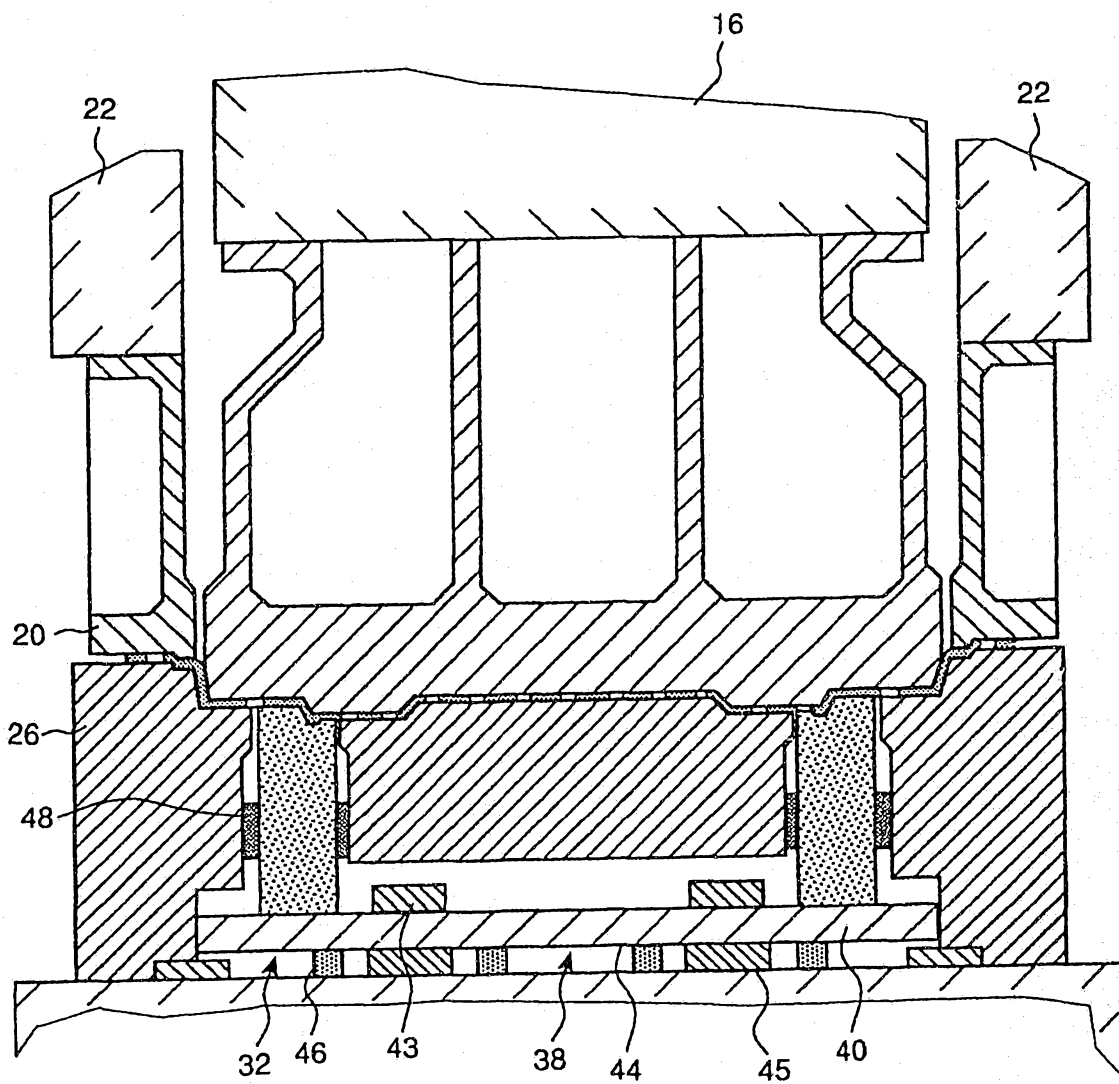
Fig. 4

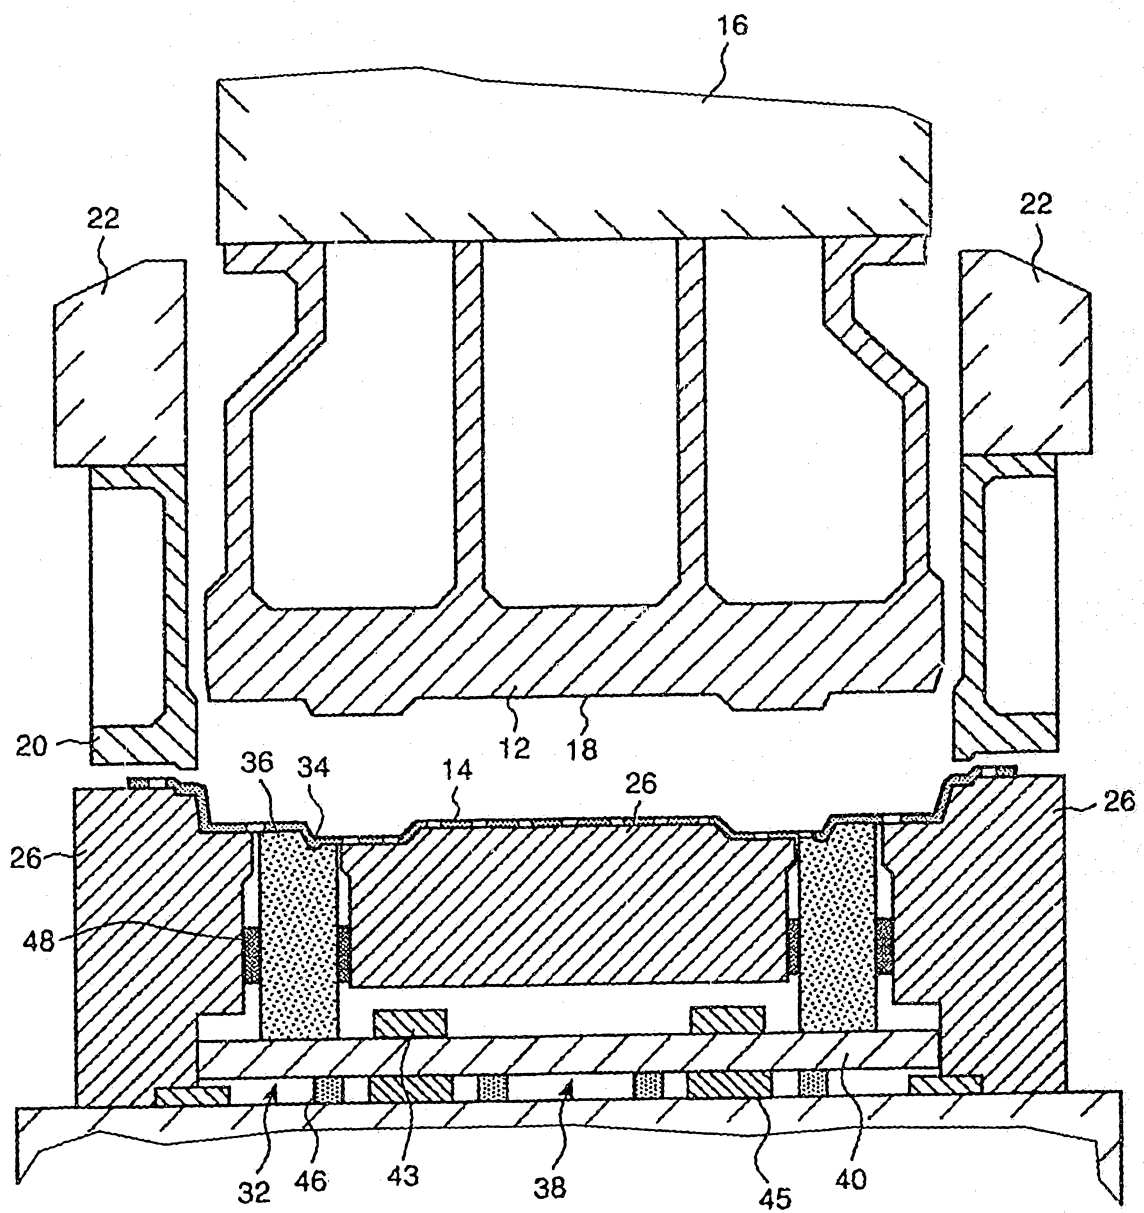
Fig. 5

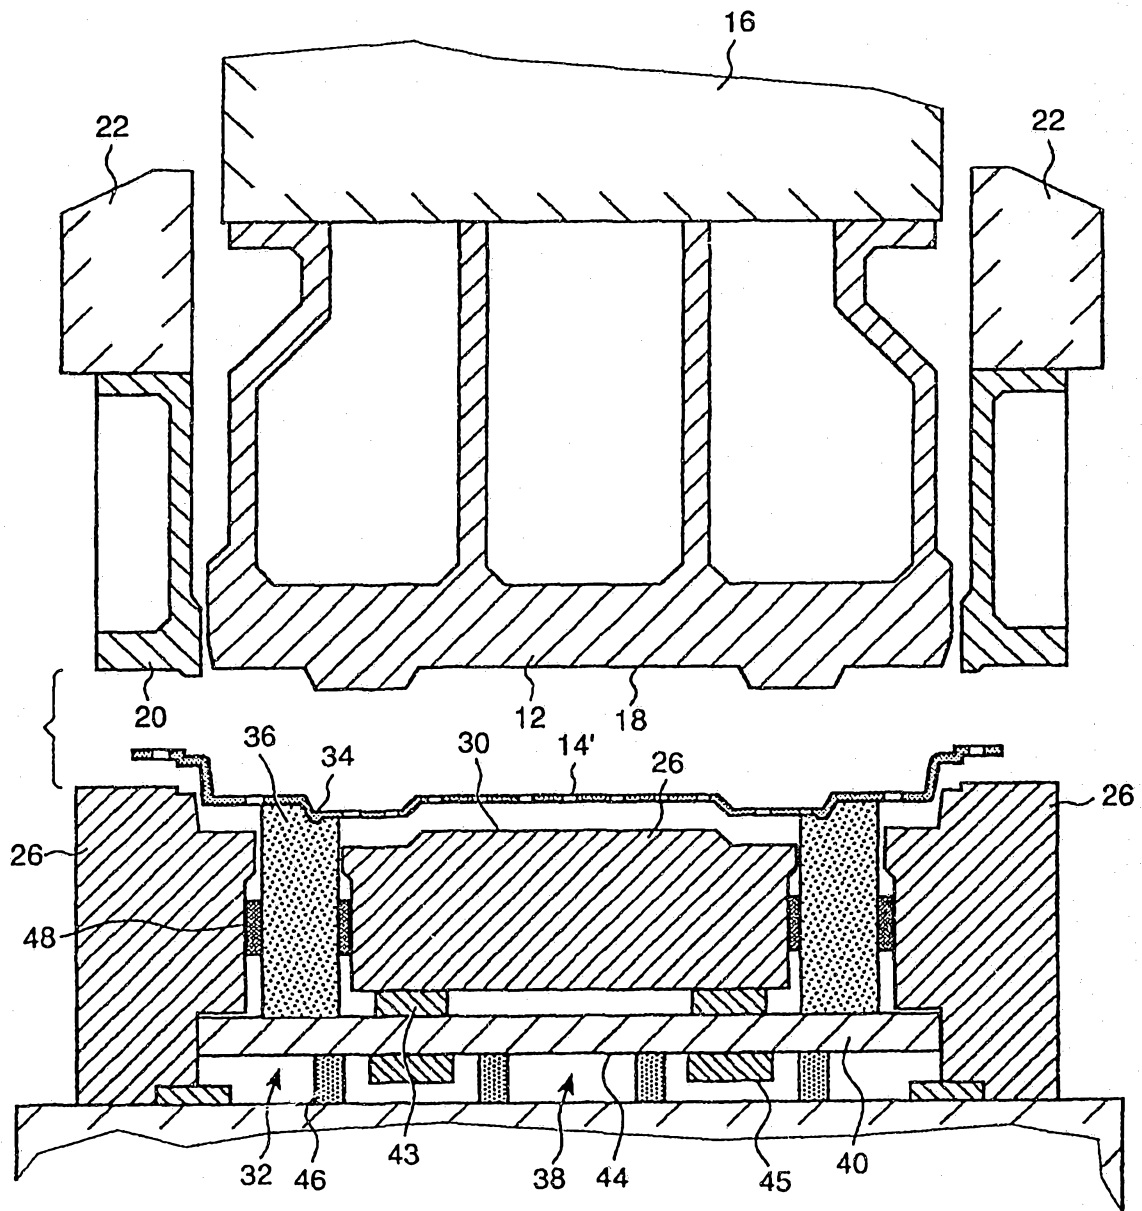
Fig. 6

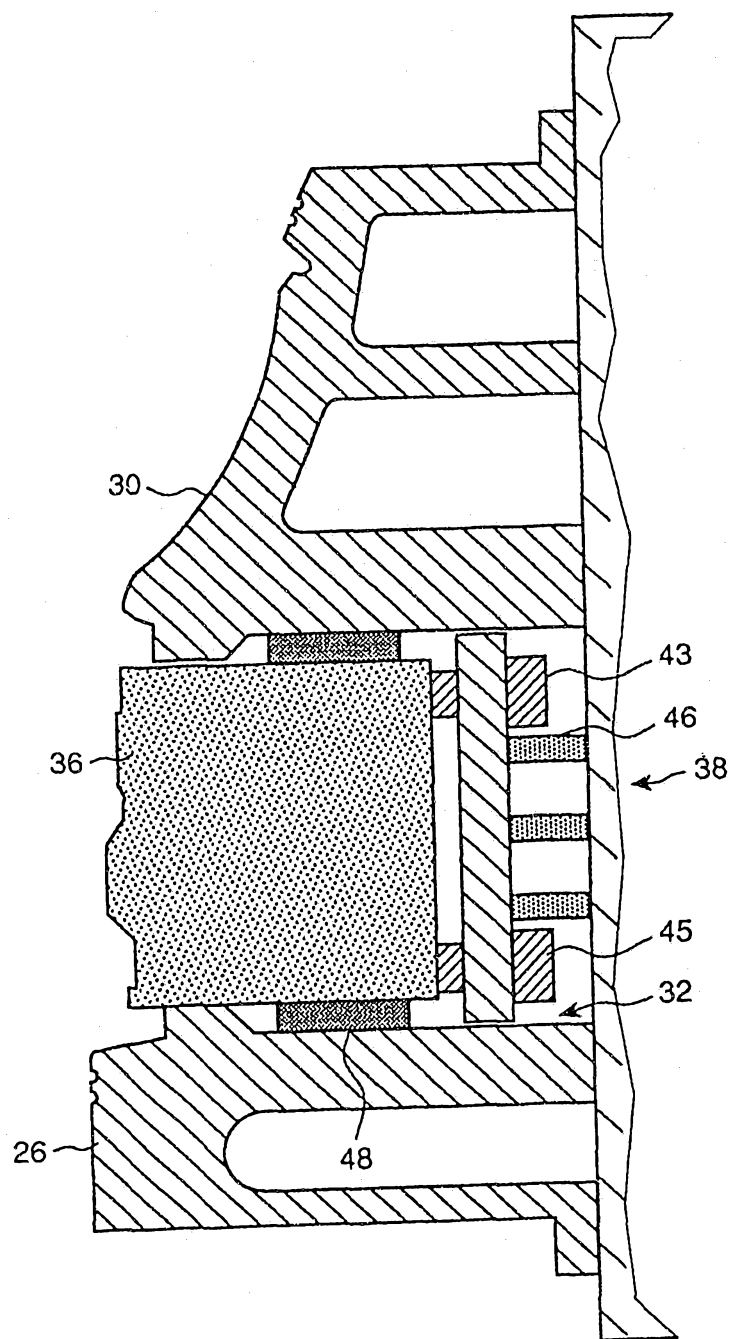
Fig. 8

Figure 1 is a cross-sectional view of a multi-layered electronic device assembly. The assembly includes a top layer 116, a middle layer 154, a bottom layer 158, and a base layer 124. A central core 126 is shown with internal structures 130, 132, 134, 136, 140, 142, 143, 144, and 145. A bottom layer 150 is also shown with internal structures 152 and 156. The assembly is supported by a base 160.