


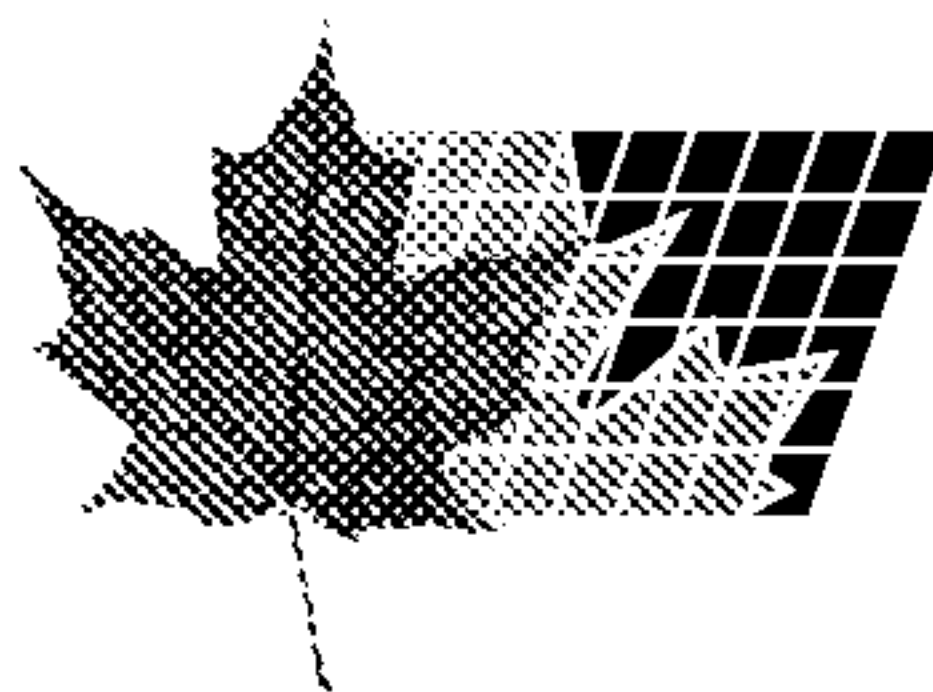

(72) TIPPETTS, JOHN RUSSELL, GB

(72) PRIESTMAN, GEOFFREY HUGH, GB


(71) THE UNIVERSITY OF SHEFFIELD, GB

(51) Int.Cl.⁶ G05D 9/02, E21B 43/34, F15C 1/16, G05D 7/01, B01D 19/00

(30) 1997/12/23 (9727078.9) GB

(54) **SYSTEMES DE REGULATION DU NIVEAU DU FLUIDE**

(54) **FLUIDIC LEVEL CONTROL SYSTEMS**

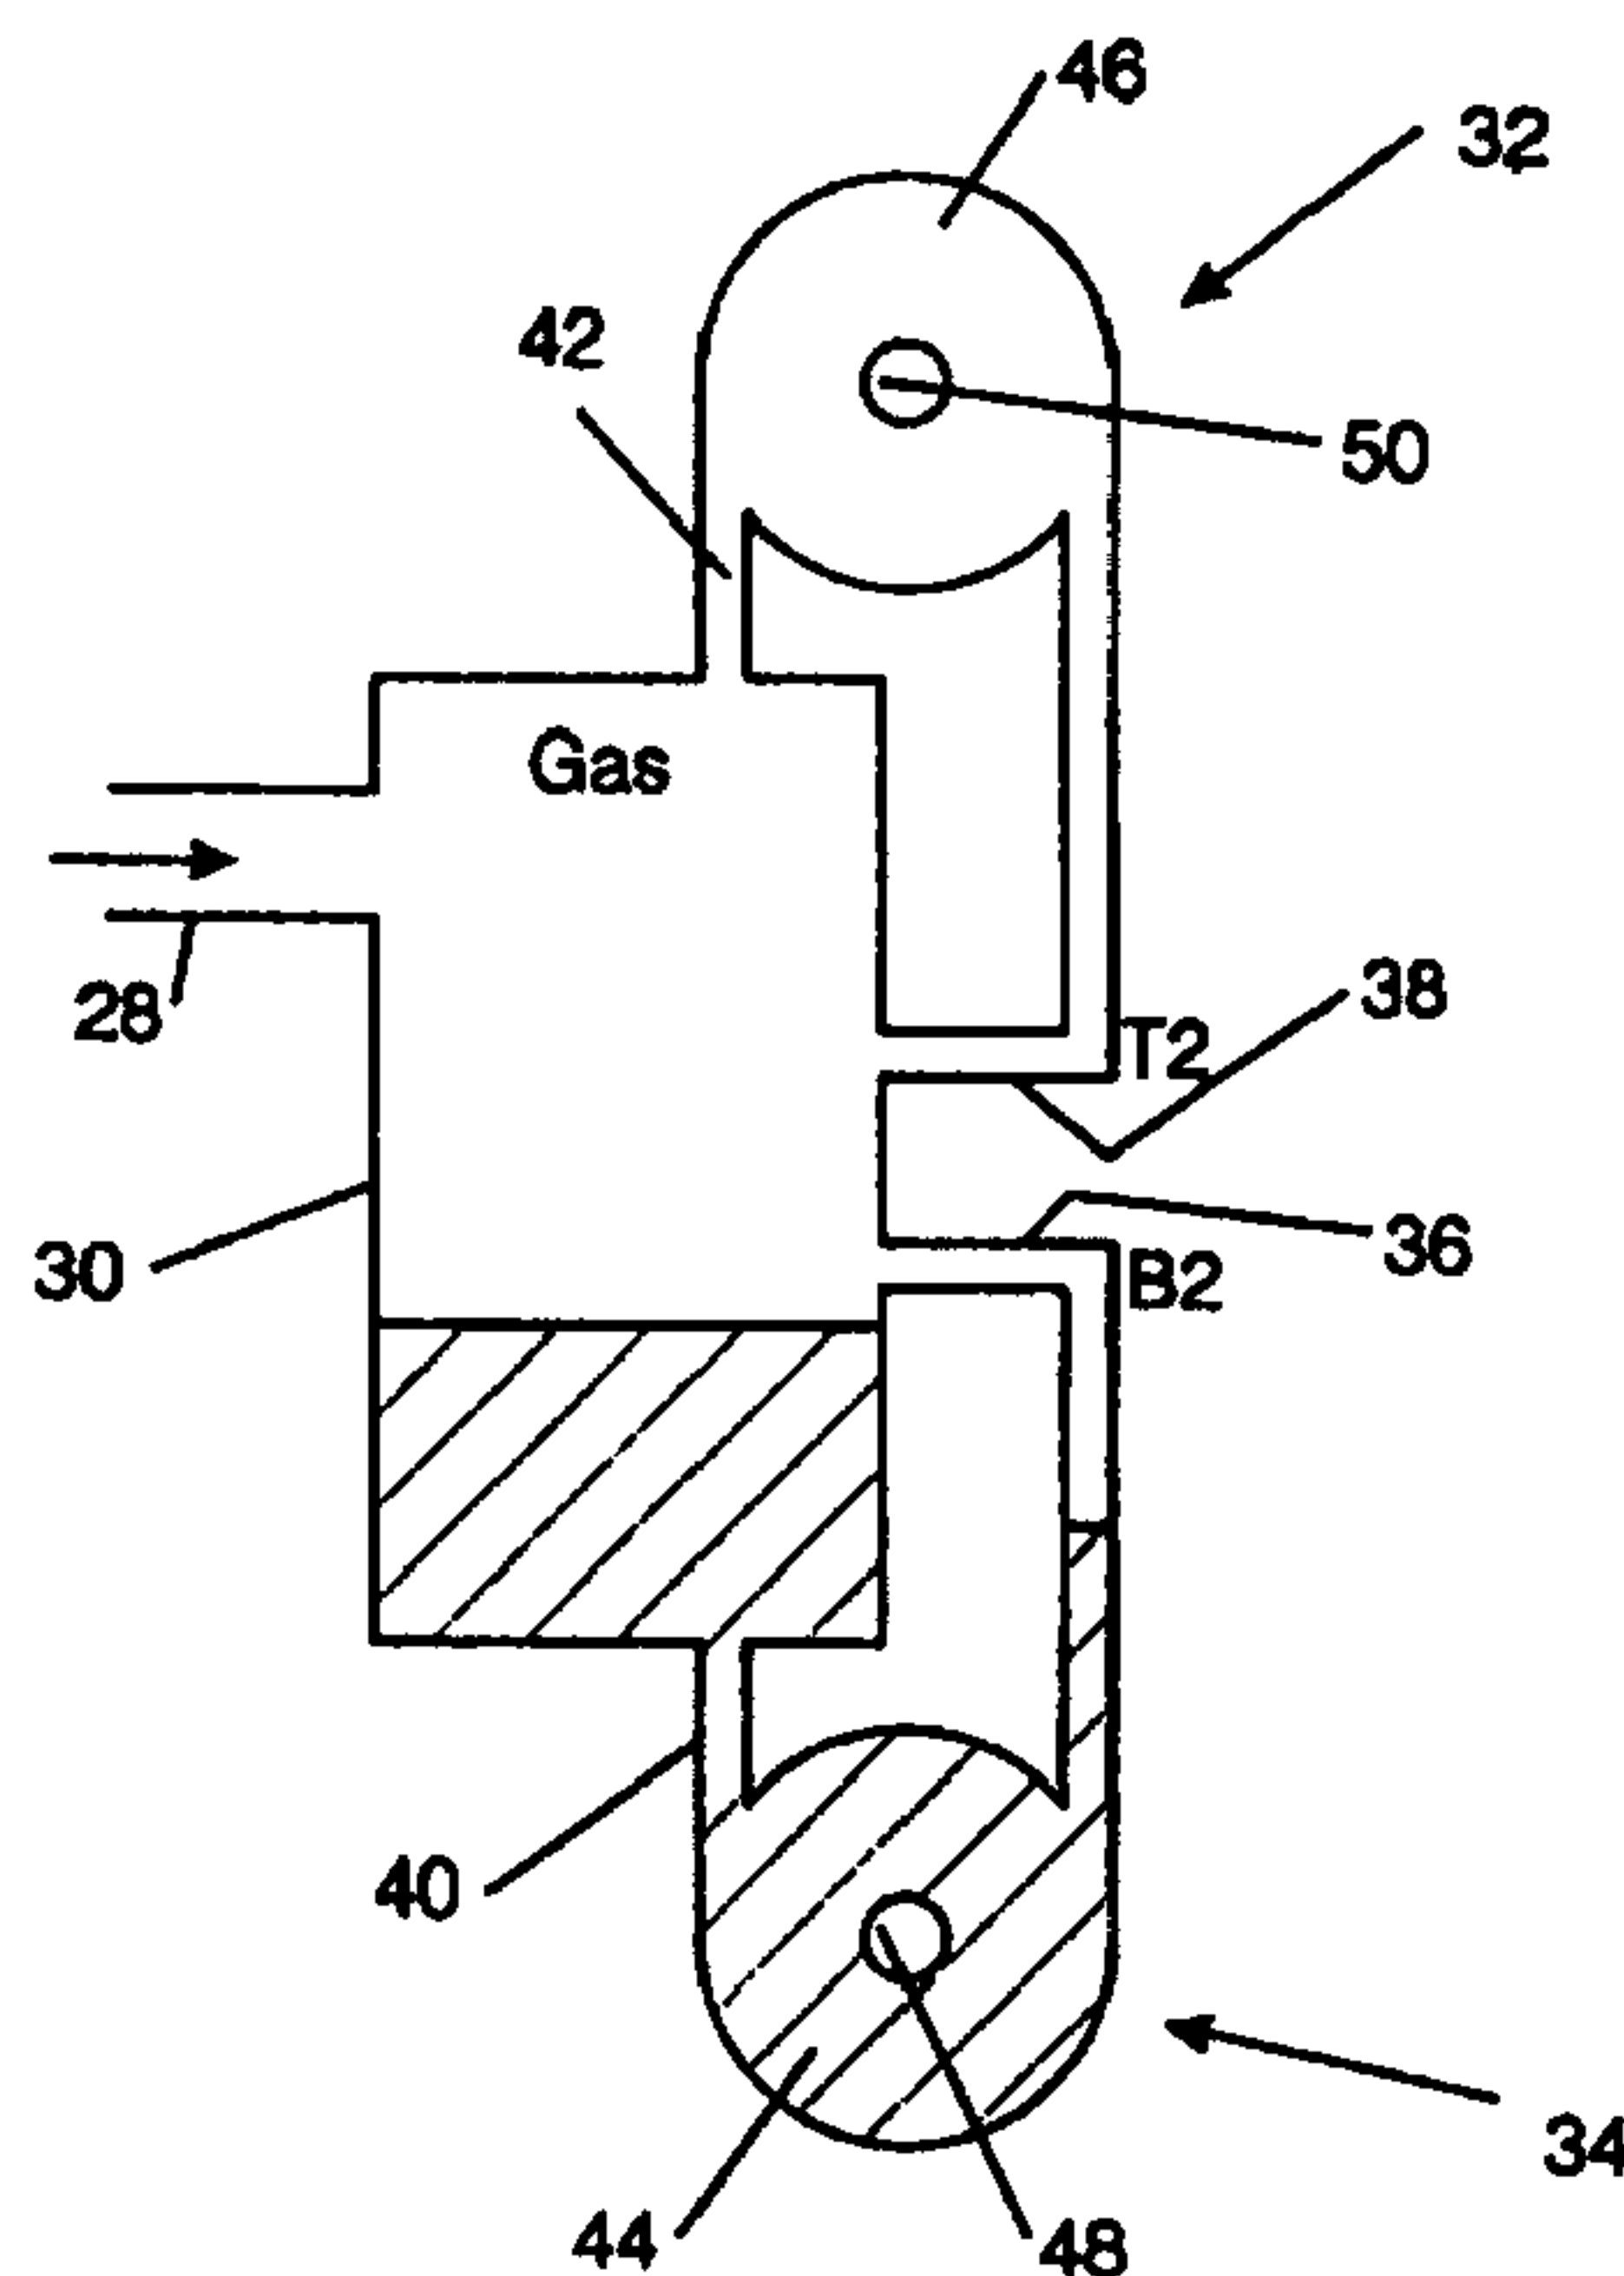


(57) L'invention concerne un système permettant de séparer un liquide et un gaz, ce système comprenant un récipient de séparation (30) pourvu d'un orifice d'entrée (28) pour le mélange gaz/liquide. Des orifices de sortie (40, 42) pour fluides sont en outre ménagés à différentes hauteurs sur ledit récipient, ces orifices étant commandés par des amplificateurs à vortex vertical (soupapes à fluide - TuVA) présentant un orifice d'alimentation (40, 42), un orifice de régulation (36, 38), et un orifice de sortie (48, 50). L'orifice de régulation est placé, sur le récipient, à un niveau intermédiaire situé entre les orifices de sortie, de sorte que tout changement du niveau de l'interface gaz/liquide à ce niveau intermédiaire modifie l'écoulement à travers ledit orifice de régulation, altérant ainsi la résistance à l'écoulement à travers la soupape.

(57) A system for separating a liquid and a gas comprises a separation vessel (30) with an inlet (28) for the gas/liquid mixture. Outlets (40, 42) for the fluids are disposed at different heights in the vessel. The outlets are controlled by turn-up vortex amplifiers (fluidic valves - TuVAs) comprising a supply port (40, 42), a control port (36, 38) and an outlet port (48, 50). The control port is supplied from the vessel at a level intermediate the outlets, so that a change in level of the interface between the gas and liquid about said intermediate level results in a change of flow in said control port, thereby altering resistance to flow through the valve.

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G05D 9/02, F15C 1/16, G05D 7/01, B01D 19/00, E21B 43/34	A1	(11) International Publication Number: WO 99/34269 (43) International Publication Date: 8 July 1999 (08.07.99)
(21) International Application Number: PCT/GB98/03801 (22) International Filing Date: 22 December 1998 (22.12.98) (30) Priority Data: 9727078.9 23 December 1997 (23.12.97) GB (71) Applicant (for all designated States except US): THE UNIVERSITY OF SHEFFIELD [GB/GB]; Firth Court, Western Bank, Sheffield S10 2TN (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): TIPPETTS, John, Russell [GB/GB]; "Barncroft", Vicarage Lane, Dore, Sheffield S17 3GX (GB). PRIESTMAN, Geoffrey, Hugh [GB/GB]; 49 Endcliffe Glen Road, Sheffield S11 8RW (GB). (74) Agent: LUNT, Mark, George, Francis; Dibb Lupton Alsop, Fountain Precinct, Balm Green, Sheffield S1 1RZ (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

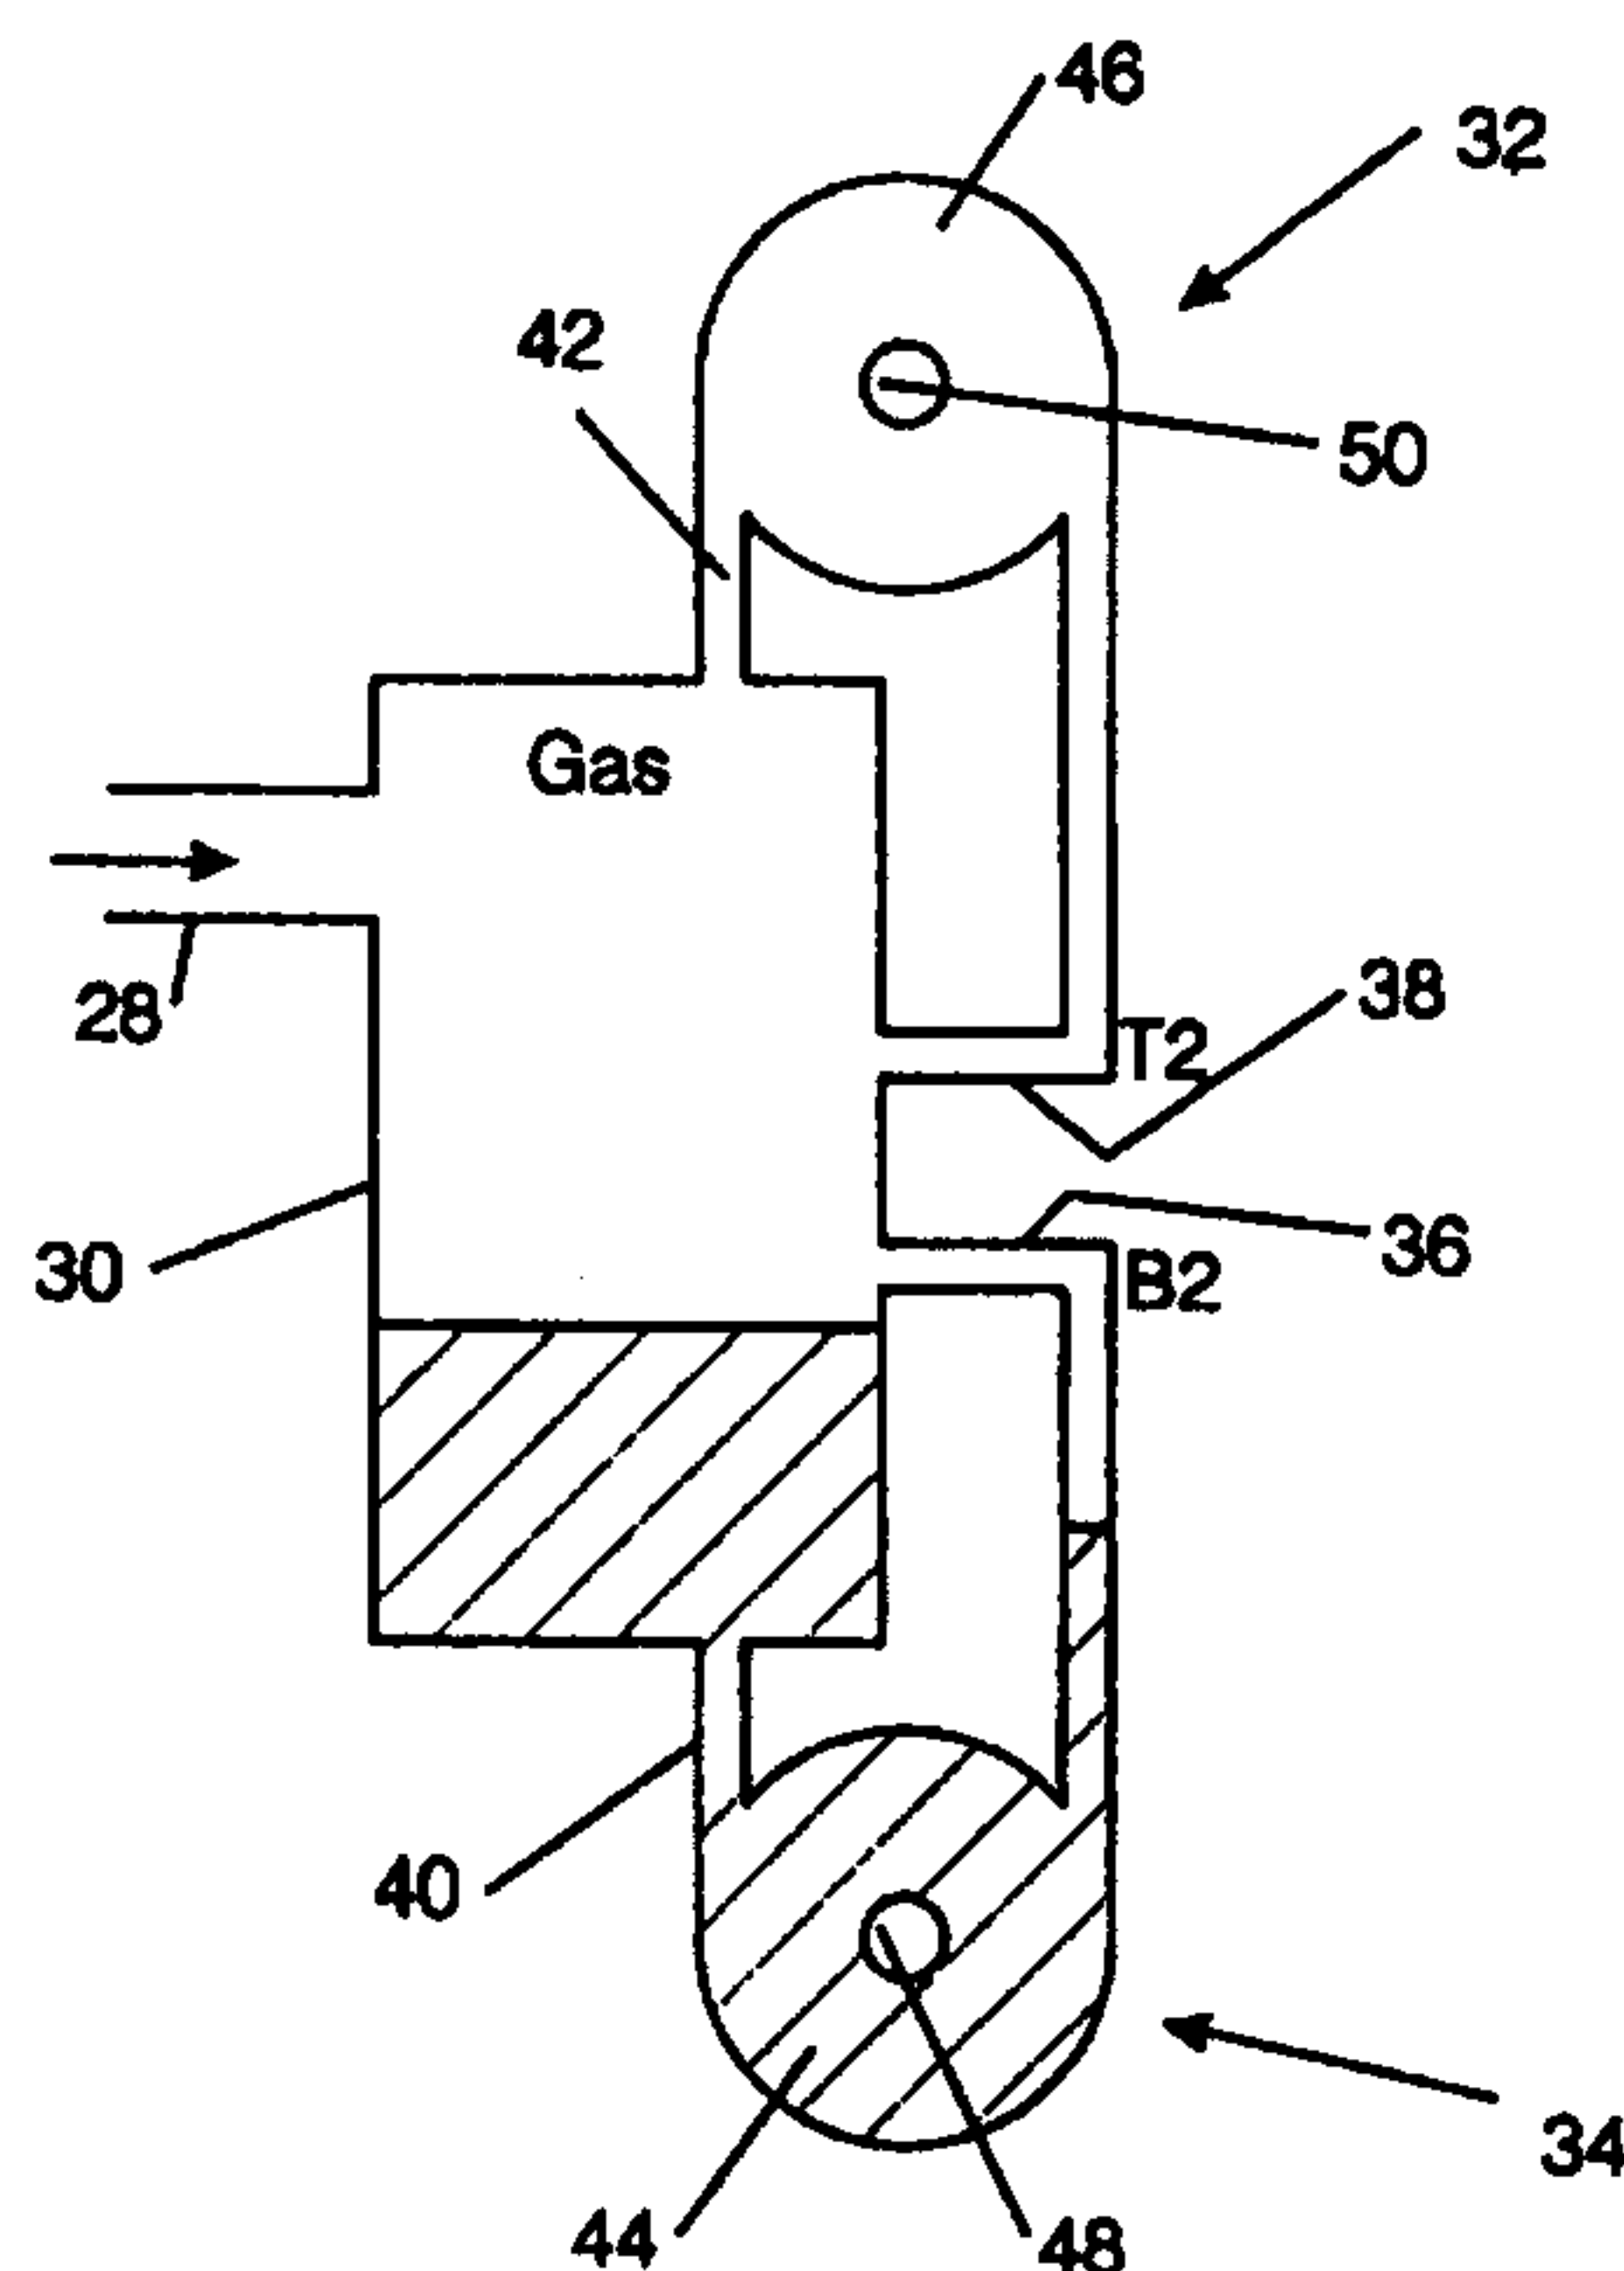(54) Title: FLUIDIC LEVEL CONTROL SYSTEMS**(57) Abstract**

A system for separating a liquid and a gas comprises a separation vessel (30) with an inlet (28) for the gas/liquid mixture. Outlets (40, 42) for the fluids are disposed at different heights in the vessel. The outlets are controlled by turn-up vortex amplifiers (fluidic valves - TuVAs) comprising a supply port (40, 42), a control port (36, 38) and an outlet port (48, 50). The control port is supplied from the vessel at a level intermediate the outlets, so that a change in level of the interface between the gas and liquid about said intermediate level results in a change of flow in said control port, thereby altering resistance to flow through the valve.

FLUIDIC LEVEL CONTROL SYSTEMS

This invention relates to a method and system to control the level of a liquid in a pressurised vessel or at least in a reservoir in which a pressure difference exists between the fluid above the liquid whose level is being controlled and an outflow of the liquid from the reservoir. This invention finds particular application in a fluid separation system to separate immiscible fluids of different density. The invention also relates to an improved fluidic valve.

In the petroleum extraction industry, but also elsewhere, there is frequently a requirement to separate different density immiscible fluids such as oil and water or oil and gas or all three. Indeed such mixtures may be found in large volumes and often in rapidly varying ratios of one component with respect to the other. A major problem associated with such multiphase flow is the fact that the constituent parts of the flow are extracted at a variable rate, such that in operation there is poor control over, for example, the amount of gas followed by the amount of liquid obtained from the well. This sometimes results in what is known as "slugging flow", which can cause control problems.

Partial processing is a system where coarse separation of the various components is effected adjacent a well site,

AMENDED SHEET

or other location near where the mixed components requiring separation first emanate. This results in much reduced transportation costs. In the petroleum extraction industry, for example, water and oil are frequently
5 combined products of an oil well, and while the oil is to be recovered and transported to a refinery, the water is to be reused for pressurising the well. Consequently, to transport the water to a refinery and then back to the well is wasteful.

10

However, separation is not straightforward. As mentioned above, there are wide variations in the ratio of one component with respect to the other. Secondly, there is frequently solid matter entrained in the flow, which
15 also needs separation and isolation. Thirdly, the separation may need to be performed sub-sea, or in a remote site, where system reliability becomes of paramount importance. Gravitational separation in a vessel is possible, using a weir system for example, but maintaining
20 the different levels of the components in the vessel is problematic when widely varying in-flow of the components occurs. Then, it is necessary to control the outflow of the components so that an appropriate interface level between the components is maintained. However, a simple
25 weir system to maintain a level cannot function if there is a pressure difference between the less dense fluid and the outflow of the dense fluid. In this event there is the danger that that difference will simply result in forcing

of the less dense fluid through the dense fluid outflow.

Pressure variation within the vessel may occur as a result of changes to the inflow rate, or alternatively,
5 from variations to the outflow rate for one or more of the fluids in the system.

It is therefore important to maintain steady-state levels of, for example, oil, gas and water in the vessel so
10 that separation of the fluids can be adequately controlled. Pre-separation of an oil-water stream allows the use of more compact downstream equipment. Further benefits of partial processing include the reduction of bottlenecking in the vessels and an increased yield from new and mature
15 sites.

As mentioned above, another problem associated with production of oil and gas is sediment, which has to be removed from the fluid phase, but poses the added problem
20 of obstructing outlets, and causing wear and stress on the component parts of systems with which it comes into contact.

Fluidic valves are known and have various design
25 possibilities employing vortices or other properties of fluid flow to control flow from an input to an output.

It is known to employ vortex valves, which are

commonly referred to as vortex amplifiers, and which
comprise a vortex chamber, input and output ports, and a
control port. The control port is tangential to the vortex
chamber and induces a vortex in the chamber when there is
5 flow through it. The input and output ports are generally
arranged axially and/or radially with respect to the vortex
chamber, one at least being on the circumference of the
vortex chamber so that vortex flow in the chamber
interferes with flow into or from the circumferential port.
10 Where a conical vortex chamber is employed, the input and
output can be aligned so that resistance to flow, when
there is no control port flow, is minimised.

DE-A-2431112 discloses such a valve employed to
15 control the outflow of flood retention reservoirs. A
radial main flow to an axial outflow is controlled by two
tangential control ports opposing one another. The first
port is supplied with flow when the level of the reservoir
rises above a low level, thereby tending to reduce flow
20 through the valve from the radial input to the axial
output. The second control port is supplied with flow when
the level of the reservoir rises above a high level. In
this event, the flows through the control ports cancel one
another's effect and the valve reverts to low resistance.
25 Thus, as the reservoir rises from a minimum level to a
maximum level, the valve starts with a low resistance
because there is no flow through the control ports. The
valve switches to high resistance when the first control

port receives a flow as the reservoir level rises above that control port's input. Finally, the valve switches back to low resistance when the reservoir fills to its maximum level and the other control port is provided with
5 flow as its input is flooded by the rising reservoir level.

However, a problem associated with this arrangement is that the valve is trying to maintain a fixed outflow rate despite changes in the driving hydrostatic head as set by
10 the reservoir level. The valve is not, therefore, suited to level control where a high resistance to flow is required at a low liquid level while low resistance is required at levels above target.

15 Another problem with the double control vortex amplifier arrangement is that at low liquid levels the vortex chamber can very easily entrain gas and operate partly filled with gas. If the reservoir is pressurised, or suction applied to the outflow, the valve may be prone
20 to the gas venting through one or more of the control ports and this could be highly undesirable in many chemical processing situations.

GB-A-1193089 discloses a vortex valve having an
25 axially arranged outlet port, two tangential control ports and substantially no other ports such that inflow to the valve is through the control ports and outflow is through the outlet, the control ports being opposed to one another

to reduce any vortex formation when flow occurs through both control ports from a common pressure source.

EP-A-0009335 discloses a T-junction modulator having a divided mainstream flow path to either side of the modulator and two control cylinders to oscillate a control flow across the modulator to inhibit mainstream flow therethrough.

It is therefore an object of the present invention to provide a system in which the level of a liquid in a pressurised chamber can be controlled so that the aforementioned problems are overcome, or at least their effects are mitigated within the design limits of the system.

It is a further object of the invention to provide a fluid separation system incorporating such a level control system.

It is moreover, an object of a different aspect of the present invention to provide a novel form of fluidic valve, suitable for use in level control and/or separation systems in accordance with the present invention or otherwise.

According to the first mentioned objective, the invention therefore provides a pressure vessel containing a reservoir of fluid and having a valve controlling an outlet

of the vessel and wherein there is a pressure differential across said valve beyond any hydrostatic pressure head of the reservoir fluid, the vessel comprising a system for the control of the level of reservoir fluid in the reservoir, the system comprising said valve being a fluidic valve and having an outlet port and at least two control ports either or both of which control ports may serve to inlet fluid into the fluidic valve, the inlets being arranged at different levels in the reservoir, whereby the valve has resistance to flow of fluid therethrough which is controlled by flow of said fluid into the control ports, such that said resistance is minimised when flow of fluid in the control ports is substantially equal, and wherein the flow out of the outlet is substantially equal to the combined flow into each control port.

Preferably, said valve is a vortex amplifier comprising a vortex chamber, said control ports being tangential with respect to said chamber and opposed with respect to each other, such that, when the fluid in the reservoir is between said levels, a vortex flow is induced in the vortex chamber increasing its resistance to flow, whereas when the fluid is outside said levels, flow through each control port is substantially the same so that no vortex is established in the vortex chamber whereby the resistance to flow through the valve is minimised.

Preferably, more than two control ports are provided

AMENDED SHEET

7A

around said vortex chamber. Moreover, at least two of said control ports may be tangential in the same direction, their inlets in the reservoir being at different levels so that there is gradual switching between maximum and minimum
5 resistances to flow through the valve and vice versa.

The valve may have two axially opposed outlet ports,

or may have an adjustable needle-valve disposed in the valve so that it protrudes into the outlet port restricting outflow rate.

5 Preferably, the valve is arranged such that the pressure in one control port is at least 90%, preferably 95%, and more preferably 99%, of the pressure in the other port.

10 Alternatively, said valve may comprise a T-junction modulator, wherein a radial diffuser has the narrow end of two conical diffusers, forming said control ports, communicating with said radial diffuser substantially centrally thereof and on opposite sides thereof, said
15 outlet port communicating with a collection gallery around said radial diffuser, whereby absence of supply of fluid to one control port results in oscillation of fluid across said radial diffuser and a high resistance to flow through the valve.

20

 In any event, preferably the control port, whose inlet is nearest the fluid level when both control ports have flow therethrough, is of sufficiently large diameter substantially to eliminate any risk of entrainment of an
25 adjacent fluid in the flow of said reservoir fluid to the valve along said control port.

 Preferably, the valve has no other ports than said

control and outlet ports. Moreover, the control ports are preferably adapted to permit substantially equal, opposing flows within the vortex chamber to reduce any vortex formation, when said control ports are supplied from a common pressure source. The valve may be located internally of the vessel.

In accordance with the further object of the present invention, said fluid level control system may be employed in a fluid separation system for separating immiscible, different-density fluids, the system comprising a separation vessel with an inlet for said fluids, an outlet for each fluid disposed at different levels in the chamber, and a level control system as defined above, wherein one of said control ports is one of said outlets and the other of said control ports is supplied from the vessel at a level intermediate said outlets, so that a change in level of the boundary between said fluids in the vessel about said intermediate level results in a change in the balance of flow in said control ports to alter the resistance to flow of fluid through the valve.

The fluid level control system may be disposed in a separate level control chamber connected to the separation vessel both above and below the level of the interface between said fluids.

Preferably, in such a separation system, said fluids

are a liquid and a gas, the vessel further comprising a second fluidic valve, the first valve controlling outflow of the liquid and the second valve controlling outflow of the gas.

5

Said first and second valves may have different intermediate levels and each intermediate level may be located between the control ports of the other valve.

10

There may be three fluids, being two liquids and a gas, in which event, the system may further comprise an intermediate fluidic valve, said first valve being a dense phase valve controlling outflow of the denser of said liquids, said intermediate valve having a supply port intermediate the supply and control ports of the first valve and a control port above the control port of the first valve.

15

Preferably, the separation system further comprises a shroud around that control port of the or each valve which is nearest said intermediate level when there is balanced flow through both control ports, the shroud being disposed at a level so that only fluid of the same density as the fluid entering the other control port is able to enter the shrouded control port.

20

25

The separation vessel may comprise a cyclone separator comprising a substantially circular cylindrical housing whose inlet is tangentially arranged so as to impart
5 swirling flow on the mixed fluids entering the separator.

In one arrangement, a separate level control chamber is provided incorporating a level control system as herein defined, the control chamber being supplied at different
10 levels with gas and liquid partially separated in said cyclone separator.

Preferably, however, the control system is disposed within the cyclone separator, and comprises a substantially
15 circular cylindrical shroud centrally positioned in the cyclone separator so that swirling flow is outside said shroud, the shroud being apertured and one control port of the valve extending up the shroud.

20 More preferably, however, the level control system is disposed within the cyclone separator, and comprises a control port pipe defining with the wall of the separator an annular control space, swirling flow in the separator being substantially confined to the interior of said pipe
25 and one control port of the fluidic valve being supplied with liquid from inside the pipe, while the other port is supplied with liquid spilling over the pipe and into the annular space. In this event, the annular space may be

closed off around part of its circumference to direct flow from the inlet into the interior of the pipe.

The current invention has the capability of handling
5 solids in the fluid phase because fluidic valves have no moving parts which might jam. Moreover, abrasive wear is far less of a problem in fluidic valves than valves with moving parts.

10 This invention therefore provides a means of controlling the fluid interface in a separator vessel as used for gas/liquid separation with the advantages of:

- 15 (i) being able to recover rapidly from "blow out" or "flood" conditions in the separator vessel, should that occur;
- (ii) substantially eliminating the need to replace damaged and worn components because the controlling valves perform their function with no moving mechanical parts; and,
- 20 (iii) not requiring any power and operating entirely automatically.

It will also be appreciated that an important aspect of the present invention is its ability to accommodate the
25 contents of the vessel or reservoir being pressurised substantially above the pressure at the outlet of one or more of the valves. Moreover, it is capable of accommodating enhanced gravity systems. In either case the

reason is because the arrangement depends primarily on the level of fluid in the reservoir, and not the forces acting on it. The only limitation is the relative pressure above the reservoir with respect to the outside. If this gets
5 too high, blow-out is a possibility and so the system needs to be designed so that, within the design limits of the system, blow-out does not occur.

In accordance with the further aspect of the
10 objectives of the present invention, there is provided a turn-up vortex amplifier, comprising a vortex chamber, one or two axially arranged outlet ports, two or more tangential control ports and substantially no other ports such that inflow to the valve is through the control ports
15 and outflow is through the or each outlet, at least two of the control ports being opposed to one another to reduce any vortex formation when flow occurs through both control ports, and in which an adjustable needle-valve is disposed in the valve so that it protrudes into the outlet port
20 restricting outflow rate.

Such valve preferably has some or all of the features mentioned above in relation to the system aspects of the present invention, which features are applicable to the
25 valve itself.

In a further aspect of the present invention, there is also provided a turn-up vortex amplifier comprising

interconnected control, manifold, vortex and outlet plates defining axially arranged inlet control ports, a distribution manifold, a vortex chamber and an axially arranged outlet port respectively.

5

Preferably, said control plate has a first control port which is centrally arranged, and a plurality of second control ports which are spaced around said central port.

10

Preferably said vortex plate comprises a plurality of antechambers spaced around said vortex chamber, each with a jet passage tangentially arranged with respect to, and connecting with, the vortex chamber in a direction depending on to which of said first and second control

15

ports said antechambers are connected.

Preferably said manifold plate has a central distribution chamber on one side thereof, which side faces said control plate, radially spaced lumens leading off said distribution chamber and connecting with axial passages communicating with said other side of the manifold plate. Preferably, said manifold plate also has an annular equalisation chamber on said other side, and which is supplied by through-passages communicating one with each of

20

said second control ports.

The invention is further described with reference to the accompanying drawings of specific embodiments of the

invention, which are given as non-limiting examples, in which:

Figure 1 is a front elevation of a basic design for a
5 simple turn-up vortex amplifier (TuVA);

Figure 2 is a side elevation of the TuVA of Figure 1;

Figure 3 is a variation of Figure 2, showing a TuVA with two axially opposed outlets;

Figure 4 is another variation of Figure 2, employing a
10 needle valve arrangement to Figure 2;

Figure 5a is a schematic diagram of a system in accordance with the present invention, while Figure 5b is a graph of flow rate through a TuVA as liquid level changes in the system of Figure 5a;

15 Figure 6 is a variation of the system of Figure 5, to accommodate sediment entrained in the multiphase flow;

Figure 7 is a further schematic diagram of a system similar to that shown in Figure 5;

Figure 8 shows the use of a TuVA in a gas/liquid
20 separator with a shrouded control pipe arrangement;

Figure 9 shows the use of a TuVA for maintaining a gas-liquid interface containing two immiscible liquids, both of which flow out through a single control valve;

Figure 10 shows two TuVA's controlling and maintaining
25 the fluid levels in a gas/oil/water gravity separator;

Figure 11 shows a variation in accordance with the present invention in which it is a gas outflow which is controlled by TuVAs;

Figure 12 shows in side elevation a vertical Caisson separator controlled by a TuVA;

Figure 13 shows a coanda switched vortex amplifier (CSVA);

5 Figure 14 shows a multiple port TuVA with staged inlet levels;

Figure 15 shows a T-junction modulator employed in a further embodiment of the present invention;

10 Figure 16 shows a cyclone separator used in association with a system in accordance with the present invention;

Figure 17 shows a cyclone separator incorporating a TuVA;

15 Figure 18 shows a preferred variation of the arrangement in Figure 17;

Figure 19 is a section on the line 19-19 in Figure 20 through a construction of a TuVA in accordance with the present invention; and

20 Figures 20 to 23 are sections along the lines 20-20, 21-21, 22-22 and 23-23 in Figure 19.

Referring to Figure 1 of the drawings, a turn-up vortex amplifier (TuVA) 10, comprises a vortex chamber 16, and two control ports 12,14, hereinafter referred to as a supply port 12 and a control port 14 for ease of
25 identification. Both ports are tangential to the vortex chamber. The axial outlet 18 may be conically shaped, as shown, with a circular outlet increasing in diameter with distance from the vortex chamber, so as to reduce pressure

losses, although the shape of the axial outlet would be governed by design requirements. For example a radial diffuser may also be employed.

5 When fluid flow enters solely through the supply port 12, it passes into the vortex chamber 16 where a fluid vortex forms which impedes the passage of the flow into the outlet port. There is therefore a high resistance to the flow exiting the outlet port and the rate of flow through
10 the valve is reduced to a minimum value, Q_{min} , for a given fluid level or pressure drop across the valve.

 The pressure in the control port, as determined by the pressure resulting from pressure recovery in the vortex
15 state, is only slightly below the pressure in the supply port 12. On the other hand, should the pressure in the control port 12 rise to equate with that in the control port 14, fluid enters the supply and control ports equally, such that flow passes into the vortex chamber 16 in
20 tangentially opposing directions so that the vortex effect is negated. In this instance flow passes to the outlet port with minimum resistance and the flow rate is maximised to Q_{max} , again, at the given level or pressure drop.

25 Figure 2 illustrates a side view of the TuVA of Figure 1. Figure 3 shows an alternative embodiment for altering the performance of a TuVA wherein TuVA 20 is fitted with two axial outlets 21 and 22, shown here in alignment. The

presence of two axially opposed outlets may increase the ratio $Q_{\max}/Q_{\min}$. It should be noted that other features of the valve geometry also influence the valves' performance including the use of conical or radial diffusers (not
5 shown).

The TuVA tangential inlet, outlet, and control ports, and chamber periphery can also be designed and configured to maximise pressure recovery in the vortex state.
10

A further modification is depicted in Figure 4, wherein an adjustable needle valve arrangement 24 is disposed so that it passes through the vortex chamber 16 and into the mouth of the outlet port 18, thereby
15 controlling the exit hole area. The presence of the needle valve enables a valve of a basic given geometry to be fine-tuned in order to provide a specific flow performance and, for example, be able to be switched between high and low flow rates for a specific setting or even be closed
20 completely.

The pressure differential which exists between the inlet port and the centre of the vortex chamber wall, changes as the valve switches from a minimum to a maximum
25 outflow state. This pressure differential can therefore be used to monitor the valve in operation or even as a control signal to another component of the system responsible for another inflow or outflow stream.

Figure 5a shows a fluid level control system in accordance with the present invention, wherein a multiphase inlet port 28 feeds into a separating chamber 30 holding gaseous and liquid layers. Two outflows 40,42 are controlled by two TuVAs 34,32 respectively. The upper TuVA 32 controls gaseous outflow from the gas layer, while the lower TuVA 34 controls the liquid outflow. Each TuVA has a vortex chamber 44,46 and an axial outlet port 48,50. The resistance to flow through each of the two TuVAs is dependent upon the in-flow state of their respective control ports 36,38.

When the level of the liquid in the chamber is below the entrance level of the control port 36 of the lower TuVA 34, the liquid only passes through the supply port 40 of the TuVA, inducing a vortex in its chamber 44 and impeding the flow of liquid out of liquid outlet 48. On the other hand, gas can escape the vessel 30 through both the supply port 42 and control port 38. If the supply and control ports are of equal size, no vortex will be established in TuVA 32 and so it will have minimum resistance to gas flow to its outlet 50. Consequently, assuming that the flow inlet is within the design parameters of the separator and the TuVAs are dimensioned and designed accordingly, the level of liquid in the vessel 30 will rise until it reaches the control port inlet 36.

When the level of liquid in the chamber 30 rises above the inlet to control port 36, liquid enters the lower TuVA 34 via both the supply 40 and control ports 36. This cancels out the vortex effect in the lower TuVA so that
5 liquid flows out of chamber 30 through TuVA 34 and out through flow outlet valve 48 at a maximum rate. Should the level of liquid in the vessel continue to rise, however, perhaps because there is a greater than normal liquid content in the flow inlet 28, until the level of liquid in
10 the chamber 30 rises above the level of the control port 38 to the upper TuVA 32. This enables maximum flow of liquid through the lower TuVA 34, as described above, but impedes gas entering the control port 38 to the upper TuVA and only allows the flow of gas through the supply port 42. This
15 establishes a vortex in chamber 46 of the TuVA and reduces the flow of gas out through gaseous outlet 50 until the level of liquid in the chamber again falls below control port 38 again. Consequently, the level in the vessel 30 is regulated between the two ports 36,38.

20

The variation in the liquid and gas flows, as a function of the level of liquid in chamber 30, is schematically represented in Figure 5b. At low liquid levels, the gas flow rate through the upper TuVA (broken
25 line) remains constant at a maximum value. The liquid flow is at a minimum (solid line) but rises slowly as the liquid pressure head increases. When the liquid level reaches control port 36, gas flow is substantially unchanged, but

liquid flow increases dramatically. Finally, when liquid level reaches control port 38, liquid flow is substantially unchanged, rising slightly as the liquid pressure head increases, but gas flow drops significantly. Any increase
5 in pressure in the vessel due to a reduced gas outflow would of course tend to increase the outflow of both fluids. It should be noted, however, that even during steady state conditions, the gas and liquid flows may be very different, in absolute terms, and the TuVAs will be
10 sized accordingly.

A more responsive system is illustrated in Figure 6. This is achieved by swapping the positions of ports 36', 38', so that there is always one TuVA in an imbalanced,
15 high flow-resistant position. Figure 6 also shows the application of baffles 52 and a sand trap 54 for separating and isolating sediment in the multiphase in-flow 28.

Figure 7 illustrates the use of a single TuVA 56 to
20 control a gas/liquid interface about a control level 60 in a horizontal separator vessel 30" (two TuVAs are shown purely to illustrate the two flow conditions, $Q_{\min}$ and $Q_{\max}$ of the TuVA). Here, the gas outflow is pressure regulated only, by means not shown; which means that the vessel 30"
25 is under gas pressure greater than the ambient pressure residing outside the liquid outflow 62 of the TuVA 56. Consequently there is a gas pressure drop across the control port 68/vortex chamber 66/outlet 62 when the liquid

level is as shown on the left of Figure 7. Since, however, as discussed further below, the pressure in the control port 68 at the vortex chamber 66 is only slightly less than the supply port 64 pressure at the vortex chamber (ie about
5 95% or more thereof), then the level of the liquid in the control port is only slightly lower than the level in the rest of the vessel. This is important to ensure that gas does not force its way down the control port into the vortex chamber and out of the outlet 62. Indeed, the bore
10 of the control port is enlarged so that, should the level of the liquid in the vessel oscillate about the control level 60, slugs of gas will not get pushed into the vortex chamber by liquid over-spillage into the control port when the level in the vessel rises.

15

The arrangement of the pipes connected to the supply and control ports needs to be carefully selected in order to avoid, or at least minimise, the risk that oscillation of the flow becomes established through dynamic interaction
20 between the pipe and TuVA characteristics. Such oscillation would tend to reduce the effective flow ratio $Q_{\max}/Q_{\min}$.

Such oscillation may be avoided, or at least reduced,
25 by designing the valve to operate with a maximum flow state corresponding to opposing vortex flows entering the chamber which are not quite substantially equal, such that the fluid vortex is not quite fully eliminated. A reduction in

the volume of the vortex chamber such that multiple parallel valves are required to accommodate the required total outflows of the fluid stream under control may also reduce oscillation.

5

Incidentally, if TuVAs are mounted, as shown in Figures 7 to 10, internally of the vessel, then this reduces the pressure rating requirement of the equipment and also the number of vessel penetrations. Consequently, 10 this arrangement is preferred. Also, if the valves are mounted in the orientation shown in Figure 7, for example, the possibility of gas entrainment is reduced because the inlets to the vortex chamber are uppermost.

15 The liquid level will thus be maintained close to the required control level 60 for all liquid inflows between $Q_{\max}$ and $Q_{\min}$.

As the liquid in-flow rate increases from $Q_{\min}$ to $Q_{\max}$ 20 the TuVA controller 58 operates in the non-vortex state for a greater fraction of the operating time. The controller therefore behaves as a "no-moving part variable size outlet" from the vessel, with the result that any tendency for the liquid interface level to rise above the desired 25 control level 60 will automatically lead to an effective increase in the size of the liquid outlet orifice.

One example of the ratio between the maximum and

minimum out-flow rates of $Q_{\max}$ and $Q_{\min}$ which can be achieved using fluidic valve controllers is of the order of 4:1 and possibly more.

5 Another application for this type of interface level control exists in a vessel with a constant stream inflow rate, but with a variation in the pressure differential across one or more of the controlled outflow streams. When the fluid inflow rate is constant and the downstream outlet
10 pressure is also constant, it is possible to accommodate a pressure range within the vessel in the order of 16:1 and possibly more.

 This feature may find particular application where the
15 safe operation of vessels containing fluids under pressure is of paramount importance.

 It will be further appreciated that a greater flow range can be achieved if a much larger variation to the
20 interface control level is allowable. This greater degree of freedom results in changes to the effective pressures at the tangential inlets due to changes in the hydrostatic head of the liquid in the vessel. Ultimately, an increased control range can be obtained at the expense of increased
25 level variation.

 A further embodiment of the fluidic level controller as applied to a separator vessel is seen in Figure 8. A

separator vessel 70, fitted with an internal fluidic level controller 72 is additionally supplied with a shrouded control pipe arrangement 74. The shroud 74 ensures that the fluid entering both the inlet port 76 and the control
5 port 78 is fed from a common fluid level within the vessel.

A further application for fluidic level control systems is illustrated in Figure 9, where a control valve 80 is used to maintain the gas-liquid interface in a
10 separating vessel 82 containing two immiscible, different density liquids A & B, both of which are required to pass through a single control valve 80.

In this situation there is observed two interfaces, a
15 liquid-liquid interface 84 and a liquid-gas interface 86 determined by a liquid-liquid control level LS and liquid-gas control level LC respectively. When the level of the liquid-liquid interface 84 is above the inlet port 88, only liquid A is drained through the valve 80. Even if the
20 liquid-gas level rises above the level of control port 90, still only liquid A drains, because shroud 92 has its level below the level of the supply port 88. Only when the liquid-liquid level drops below the level of supply port 88 does liquid B drain through port 88. Liquid B can only
25 drain through both ports when the liquid-liquid level is below the base of the shroud of control port 90 if the liquid-gas interface is still above the level of the control port 90.

Alfred...

Although the arrangement described above does control the two interfaces to the levels LC and LS as shown, at least in respect of the liquid-liquid interface, there is
5 no "servo" assistance in the draining of either liquid with respect to the other should their respective inflow vary. There is only the overall servo assistance with respect to the liquid-gas interface.

10 This position is addressed in the embodiment of Figure 10 in which multiple TuVAs control the separation of an inflow of gas mixed with two immiscible liquids. A typical example is in the oil extraction industry in a gas/oil/water gravity separator 100. The separator 100 has
15 two TuVA's 102,104 mounted internally of the gravity separator.

The water/oil/gas mixture enters the gravity separator vessel 100 through inlet port 106 above the liquid levels
20 and into the gaseous phase. TuVA 102 is arranged so that supply port 108 extends through the water phase 111 into the oil phase, and the entrance to the control port 110 lies at the interface 109 between the oil and gas layers. The control port 110 is shielded by control shroud 112
25 which surrounds the control port 110 and bridges both the oil and gas layers.

When the oil layer increases above the entrance to the

control port 110 oil passes down the control port, into the vortex chamber 114 where it negates the vortex effect of oil passing into it through the supply port 108 and out through the axial outlet 116.

5

A similar situation pertains with the TuVA 104, for which supply port 118 is in the water phase 111 and the control port 120 is just below the level of control port 110. Again a control shroud 122 protects control port 120 ensuring that only water from phase 111 enters the control port, regardless of the levels of the components in the vessel 100, at least within design limits. However, the level of control port 120 being below port 110 means that water is drained under servo conditions when the gas/liquid interface rises before the oil phase is so-drained. This serves to keep the water/oil interface 113 low in the vessel and below the oil supply port 108 so that there is little danger of water spilling into the oil TuVA 102 and its outflow 116. However, if the liquid/gas interface drops to the level of supply port 108, then gas will be able to escape into the oil outlet and consequently, while this embodiment has improved liquid-liquid level control, the design limits are narrower. The relative position of the inlets to ports 108 and 120 is important in the determination of whether gas or water would pass into port 108 if the oil flow ceases.

25

In Figure 11 a fluidic valve arrangement is used to

AMENDED SHEET

control the gas outflow from a gas-liquid separator 120 wherein two control valves 122,124 are configured internally of the separator, each demonstrating an alternative mode of operation.

5

Fluidic valve 122 is arranged such that the valve normally operates in the minimum outflow state such that the control port 126 is blocked by liquid when the level of the liquid is above control level LL. Consequently, gas
10 only enters the control valve via supply port 128. When the level of liquid falls below control level LL, this allows valve 122 to operate in a maximum outflow state permitting a rise in liquid level, which is in any event encouraged by the reduction in the gas pressure in the
15 vessel, caused by the maximum gas outflow, and so that the liquid outflow rate is reduced.

Fluidic valve 124 is arranged to operate such that the valve normally operates in the maximum outflow state. If
20 the level of liquid in the separator rises above a pre-set upper liquid level, denoted by LH, then this closes the opening to the control port and the valve switches to a minimum outflow state. This serves not only to restrict gas escape, so that the liquid level drops back again, but
25 also to increase further the gas pressure in the separator so tending to increase the rate of the liquid outflow.

When the fluidic gas valves 122,124 operate together

AMENDED SHEET

as a primary interface level controller, they are designed so that the gas-liquid interface is normally located intermediate the levels LL, LH.

5 A gas phase fluidic valve can be used to control all or part of the gas outflow. Furthermore it can be used in conjunction with other outflow valves, either fluidic or conventional, on either the gas or liquid outflows. For example, there would be nothing to prevent the arrangements
10 of Figures 9 or 10 being combined with the arrangement in Figure 11.

Another application of fluidic valves is shown in Figure 12, wherein a vertical caisson separator 150 employs
15 a TuVA 151 to control the oil level. TuVA 151 comprises a tangential supply port 152, tangential control port 154 and axial outflow 156. A multiphase flow enters the separator 150 through inlet port 158 and liquid separated from the fluid mixture is removed through the central axial out-flow
20 156 under pressure.

Caisson pressure is maintained by means of a back pressure control valve 160.

25 In Figure 13 there is shown a coanda vortex amplifier (CSVA). In operation, a fluid pulse applied across control ports 172a,b induces the inflow to hug either an upper or lower wall 174,176 of the valve 170 under the coanda

effect. This results in the flow entering the valve 170 down passage 178 or 180 respectively. If the flow is mainly down passage 178, then a high resistance vortex flow is induced in the valve, so that reduced outflow occurs through the outlet 182. However, if the flow is in passage 180, then a low resistance radial flow regime is established.

In application of the coanda valve 170 to fluid separators as described above, switching between the high and low resistance states is effected by arranging the valve to be monostable (ie only one control port 172a being employed). The control port 172a is then supplied with the fluid being drained by the valve when that fluid level raises above a predetermined level in the vessel to switch the valve to its low resistance mode. Once the level drops back and the control flow ceases, the valve reverts to its stable, high resistance position.

Referring back to Figure 8, P_s is the pressure in the supply port 76 at the entrance to the vortex chamber 75 of the valve 72. [All pressures referred to hereinafter being relative to pressure outside the separator at the outlet to the valve, P_o]. Likewise, P_c is the pressure in the control port 78 at the entrance to the vortex chamber. With flow entering only port 76, the interface level being below the inlet 78, P_c is some fraction of P_s , say xP_s , ie

$$P_c = xP_s \quad (1)$$

$$\text{However, } P_s = P_g + P_1 \quad (2)$$

where P_g is the gas pressure above ambient and P_1 is the pressure due to the hydrostatic pressure of the liquid above the exit of the separator. On the other hand,

$$P_c = P_g + P_{c1} \quad (3)$$

5 where P_{c1} is the hydrostatic liquid pressure which is less than P_1 due to some reduced level of the liquid in the control port due to the reduced level of P_c compared with P_s .

Substituting (2) into (1) gives,

$$10 \quad P_c = xP_g + xP_1 \quad (4)$$

Equating (3) and (4) gives,

$$P_{c1} = xP_1 - (1-x)P_g \quad (5)$$

Bearing in mind that,

$$P_{c1} = h\rho g \quad (6)$$

15 where h is the height of the liquid column in 78 above separator exit, ρ is the liquid density and g is the acceleration due to gravity, it follows that,

$$h = (xP_1 - (1-x)P_g) / \rho g \quad (7)$$

20 Of course, when P_g is zero, ie the pressure in the vessel is ambient, the height of the liquid in the control port will vary directly with the level of the gas-liquid interface, from equation (7) above, and variations in P_c versus P_s will not have a substantial impact. When P_g is
 25 substantially above P_o , however, it becomes especially important that x in equation (1) be as close to unity as possible, so that P_c is as close to P_s as possible. Otherwise, there is the danger of blow through of gas

through the control port.

Steps which can be taken to ensure a large value of x include providing a smooth chamber periphery and equal port sizes at the entrance to the chamber of each control port. Moreover, the ducts or pipes to each entrance should be arranged to minimise energy losses, and also, of course to equalise energy losses, so that in full flow through each port there is complete, or close to complete, cancellation of their respective vortex inducing effects in the vortex chamber.

Figure 14 shows a TuVA 10" with multiple control ports 14a,b,c, each becoming operational at increasing level 60a,b,c respectively of the reservoir fluid. This gives smoother transition between $Q_{\min}$ and $Q_{\max}$, and vice versa, which may be of benefit to downstream operation, eg pipework, vessels or a pump inducing outflow.

Figure 15 illustrates a T-junction modulator 200, being a form of fluidic valve which may also be employed to control fluid level 160. Here, a radial diffuser 210 comprises two circular discs 212,214 facing one another having an annular collection gallery 216 around their periphery. An outlet port 218 depends from the gallery 216. Centrally of each disc 212,214 is an orifice 220,222 to which is connected the narrow end of conical diffusers, forming control ports 224,226.

Control port 224 is at a high level 228 in the reservoir (not shown) while port 226 is at a low level 230. When reservoir level 160 is above level 228, equal flow
5 enters each port 224,226 so that no effect is seen and flow through the conical diffusers 224,226 and radial diffuser 210 is at a maximum $Q_{\max}$. However, when the level 160 drops below level 228, flow from the outlet 218 can only come
10 from the control port 226. Such flow causes, however, oscillation in the other port 224, so the level in that port constantly changes and, instead of flowing through the radial diffuser 210, flow oscillates back and forth
resisting flow through the radial diffuser 210 so that flow through the outlet 218 is reduced to a minimum $Q_{\min}$.

15

Figure 16 shows a cyclone separator 300 having a level control chamber 310 connected thereto by a liquid flange 312 and a gas flange 314. A branch 316 of the gas flange provides gas outflow, while a TuVA 318 provides liquid
20 outflow. An inlet 320 to the cyclone separator, which has circular cylindrical housing, is tangential to the housing so that a swirling flow is induced in the liquid/gas mixture entering the separator through the inlet 320. Because of the swirling flow, separation of gas from liquid
25 is enhanced as centripetal acceleration presses the heavier liquid to the outside of the separator, while light entrained gas is pushed to the centre. Nevertheless, such a separator also requires level control and the separate

chamber 310 provides this.

A shroud 322 surrounds and rises above a turn-up
vortex amplifier 318, windows 324 giving access to liquid
5 in the chamber to the inside of the shroud, and from a
relatively low level within the chamber so that the liquid
at this level should have lost most of its gas.

Within the shroud 322, a first control port pipe 326
10 of the TuVA 318 rises to a level 328, which corresponds
with the maximum desired level 330 in the separator 300.
The second control port of the TuVA 318 communicates with
the annular space between the shroud 322 and port 326.
When liquid in the chamber 310 rises above the level 328,
15 liquid spills over into the port 326 so as to equalise the
flow through the two control ports. Thus the level is
maintained as the rate of outflow through the outlet 340 of
the TuVA is increased.

20 In Figure 17, the cyclone separator and level control
chambers are integrated in a single chamber 305. The shroud
322' has apertures 324' supplying a first control port 384
of the TuVA 318' from well below surface level 328', and
ensuring liquid of consistent quality flows through both
25 control ports of the valve. The second control port 382 is
only supplied when liquid spills over the control pipe 326'
when the level in the separator 305 rises. A problem with
this arrangement is that the cyclonic effect is somewhat

inhibited by the shroud 380.

Finally, turning to Figure 18, the arrangement here addresses the problem just mentioned because the shroud has
5 been dispensed with and, instead, the central control port 352 of a TuVA 400 (as described further below) is provided with a wide bore inlet pipe 356.

Thus, the TuVA 400 has a central first control port
10 352 and a number of surrounding second control ports 354. Pipe 356 is disposed between the two ports, so that ports 354 only get flow when liquid spills over the pipe 356 into an annular space 357 defined between the pipe 356 and the wall of chamber 305'. However, inlet 320' is still oblique
15 with respect to the chamber 305' and creates swirling flow in the interior of the pipe 356. Indeed, the annular space 357 may be closed as shown at 359 around part of the top of the space and where flow from the inlet 320' first impinges that space. The chamber 305' is a standard pipe having a
20 flange 350 for connection of the TuVA 400

Referring now to Figure 19 to 23, a construction of a suitable TuVA 500 is shown and which could be employed in the systems described herein. The TuVA 500 comprises a
25 series of plates bolted together by bolts schematically shown at 510, 512 passing through holes 510a, 512a in each plate in positions shown only in Figure 23.

A first plate is a control plate 520 having a central aperture 522 and apertures 524 evenly spaced around. A first control port inlet pipe 526 may be secured in the central aperture, while second control port pipes, opening
5 at a different level to the central pipe 526 (and optionally at different levels to each other - cf Figure 14) may be connected to the apertures 524.

A second plate is a manifold plate 530 which has a
10 central distribution chamber 532 communicating with the central aperture 522 and being provided with radially extending lumens 534. Each lumen 534 communicates with an axial passage 536 leading to the other side of the manifold plate 530. The plate 530 also has through-passages 538
15 communicating directly with each second control aperture 524, and an annular equalisation chamber 539 which surrounds the axial passages 536 and communicates the ports 524 with each other.

20 A third plate is a vortex plate 540 defining a central vortex chamber 542 and as many surrounding antechambers 544, 546 as there are, on the one hand, lumens 534 and axial passages 536, and on the other hand, second control port apertures 524 and through-passages 538. Each antechamber
25 has a jet passage 548, 549 communicating with the vortex chamber 542 and tangential with respect thereto. The jet passages 548 (ultimately all depending from the first control port 526) are all inclined in the same direction

with respect to each other, and which is in opposition to the direction of inclination of all the jet passages 549 (ultimately all depending from equalisation chamber 539 and the second control ports 528).

5

Finally, a fourth plate is an outlet plate 550 having a central outlet 552 for connection of an outlet pipe 554. The outlet 552 is in communication with the vortex chamber 542.

10

Numerous advantages follow from this construction.

Firstly, the axial alignment of the control ports 526, 528 facilitates installation of the TuVA in an axially oriented environment in pipes and the like. Secondly, any one of
15 the plates 520, 530, 540, 550 can be extended radially as a flange for connection to the end of a pipe or a flanged connection of a vessel.

Claims

1. A pressure vessel (30) containing a reservoir of fluid and having a valve (34) controlling an outlet of the vessel and wherein there is a pressure differential across said valve beyond any hydrostatic pressure head of the reservoir fluid, the vessel comprising a system for the control of the level of reservoir fluid in the reservoir, the system comprising said valve being a fluidic valve and having an outlet port (48) and at least two control ports (40, 36) either or both of which control ports may serve to inlet fluid into the fluidic valve, the inlets being arranged at different levels in the reservoir, whereby the valve has resistance to flow of fluid therethrough which is controlled by flow of said fluid into the control ports, such that said resistance is minimised when flow of fluid in the control ports is substantially equal, and wherein the flow out of the outlet is substantially equal to the combined flow into each control port.

2. A vessel as claimed in claim 1, wherein said valve is a vortex amplifier (10) comprising a vortex chamber (16), said control ports (12, 14) being tangential with respect to said chamber and opposed with respect to each other, such that, when the fluid in the reservoir is between said levels, a vortex flow is induced in the vortex chamber increasing its resistance to flow, whereas when

the fluid is outside said levels, flow through each control port is substantially the same so that no vortex is established in the vortex chamber whereby the resistance to flow through the valve is minimised.

5

3. A vessel as claimed in claim 2, in which more than two control ports (12, 14a, b, c) are provided around said vortex chamber.

10 4. A vessel as claimed in claim 3, wherein at least two of said control ports (14a, b, c) are tangential in the same direction, their inlets in the reservoir being at different levels (60a, b, c) so that there is gradual switching between maximum and minimum resistances to flow
15 through the valve and vice versa.

5. A vessel as claimed in claim 2, 3 or 4, in which the valve has two axially opposed outlet ports (21, 22).

20 6. A vessel as claimed in claim 2, 3 or 4, in which an adjustable needle-valve (24) is disposed in the valve so that it protrudes into the outlet port (18) restricting outflow rate.

25 7. A vessel as claimed in any of claims 2 to 6, wherein the valve is arranged such that the pressure in one control port is at least 90%, preferably 95%, and more preferably 99%, of the pressure in the other port(s).

ABSTRACT CONT.

8. A vessel as claimed in claim 1, wherein said valve comprises a T-junction modulator (200), wherein a radial diffuser (210) has the narrow end of two conical
5 diffusers (224, 226), forming said control ports, communicating with said radial diffuser substantially centrally thereof and on opposite sides thereof, said outlet port (218) communicating with a collection gallery (216) around said radial diffuser, whereby absence of
10 supply of fluid to one control port (224) results in oscillation of fluid across said radial diffuser and a high resistance to flow through the valve.

9. A vessel as claimed in any preceding claim, in which the
15 control port (68), whose inlet is nearest the fluid level when both control ports have flow therethrough, is of sufficiently large diameter substantially to eliminate any risk of entrainment of an adjacent fluid in the flow of said reservoir fluid to the valve along said control
20 port.

10. A vessel as claimed in any preceding claim, in which the valve has no other ports than said control and outlet
25 ports.

11. A vessel as claimed in any preceding claim, in which the control ports are adapted to permit substantially equal flows, or flows which are optimised to reduce

RECEIVED 01/22/00

dynamic effects during operation.

12. A vessel according to any preceding claim, in which the valve (56) is located internally of the vessel.

5

13. A vessel as claimed in any preceding claim comprising a fluid separation system for separating immiscible, different-density fluids, the system comprising the vessel which has an inlet (28) for said fluids, and an outlet (40, 42) for each fluid disposed at different levels in the chamber, wherein said valve (34) is a first valve, one of whose control ports comprises the outlet (40) for one of said fluids, the other (36) of said control ports being supplied from the vessel at a level intermediate said outlets (40, 42), so that a change in level of the interface between said fluids in the vessel about said intermediate level results in a change in the balance of flow in said control ports (40, 36) to alter the resistance to flow of fluid through said first valve.

20

14. A vessel as claimed in claim 13, in which, the fluid level control system is disposed in a separate level control chamber (310) connected to the vessel (300) both above (314) and below the level of the interface (328) between said fluids.

25

15. A vessel as claimed claim 13 or 14, in which said fluids are a liquid and a gas, the vessel further

comprising a second fluidic valve (32), the first valve (34) controlling outflow of the liquid and the second valve controlling outflow of the gas.

- 5 16. A vessel as claimed in claim 15, in which said first and second valves have different intermediate levels and each intermediate level is located between the control ports of the other valve.
- 10 17. A vessel as claimed in any of claims 13 to 16, in which there are three fluids, being two liquids and a gas.
18. A vessel as claimed in claim 17, further comprising an intermediate fluidic valve (102), said first valve (104)
15 being a dense phase valve controlling outflow of the denser (111) of said liquids, said intermediate valve having a supply port (108) intermediate the supply (118) and control (120) ports of the first valve and a control port (110) above the control port (120) of the first
20 valve.
19. A vessel as claimed in any of claims 13 to 18, further comprising a shroud (92, 112, 122) around that control port (90, 110, 120) of the or each valve which is nearest
25 said intermediate level when there is balanced flow through both control ports, the shroud being disposed at a level near the level of the other control port (88, 108, 118).

20. A vessel as claimed in claim 19, in which the level of the shroud is such that only fluid of the same density as that entering said other port is able to enter the
5 shrouded control port.

21. A vessel as claimed in any of claims 13 to 20, in which the separation vessel comprises a cyclone separator (300) comprising a substantially circular cylindrical housing
10 whose inlet (320) is tangentially arranged so as to impart swirling flow on the mixed fluids entering the separator.

22. A vessel as claimed in claim 21, in which a separate
15 level control chamber (310) is provided incorporating said level control system, the control chamber being supplied at different levels with gas and liquid partially separated in said cyclone separator.

20 23. A vessel as claimed in claim 21, in which the level control system is disposed within the cyclone separator, and comprises a substantially circular cylindrical shroud (322') centrally positioned in the cyclone separator so that swirling flow is outside said shroud, the shroud
25 being apertured (324') and one control port (326') of the valve extending up the shroud.

24. A vessel as claimed in claim 21, in which the level

control system is disposed within the cyclone separator,
and comprises a control port pipe (356) defining with the
wall of the separator an annular control space (357),
swirling flow in the separator being substantially
5 confined to the interior of said pipe and one control
port (352) of the fluidic valve (400) being supplied with
liquid from inside the pipe, while the other port (354)
is supplied with liquid spilling over the pipe and into
the annular space.

10

25. A vessel as claimed in claim 24, in which the annular
space is closed off (359) around part of its
circumference to direct flow from the inlet into the
interior of the pipe.

15

26. A vessel as claimed in any of claims 13 to 25
comprising a vessel as claimed in any of claims 1 to 12.

27. A vessel as claimed in any preceding claim, in which
20 said valve is a turn-up vortex amplifier (10), comprising
a vortex chamber (16), one or two axially arranged outlet
ports (18), and two or more tangential control ports (12,
14), such that inflow to the valve is substantially only
through the control ports and outflow is substantially
25 only through the or each outlet, at least two of the
control ports being opposed to one another to reduce any
vortex formation when flow occurs through both control
ports from a common pressure source, and in which an

adjustable needle-valve (24) is disposed in the valve so that it protrudes into the, or one, outlet port restricting outflow rate.

5 28. A vessel as claimed in any preceding claim, in which
said valve is a turn-up vortex amplifier (500) comprising
interconnected control (520), manifold (530), vortex
(540) and outlet (550) plates defining axially arranged
inlet control ports (524, 526), a distribution manifold
10 (532), a vortex chamber (542) and an axially arranged
outlet port (554) respectively.

29. A vessel as claimed in claim 28, in which said control
plate has a first control port which is centrally
15 arranged, and a plurality of second control ports which
are spaced around said central port.

30. A vessel as claimed in claim 29, in which said vortex
plate comprises a plurality of antechambers spaced around
20 said vortex chamber, each with a jet passage tangentially
arranged with respect to, and connecting with, the vortex
chamber in a direction depending on to which of said
first and second control ports said antechambers are
connected.

25

31. A vessel as claimed in claim 30, in which said manifold
plate has a central distribution chamber on one side
thereof, which side faces said control plate, radially

spaced lumens leading off said distribution chamber and connecting with axial passages communicating with said other side of the manifold plate.

- 5 32. A vessel as claimed in claim 31, in which said manifold plate also has an annular equalisation chamber on said other side, and which is supplied by through-passages communicating one with each of said second control ports.
- 10 33. A vessel or level control system or separation system substantially as hereinbefore described with reference to the accompanying drawings.
- 15 34. A vortex valve substantially as hereinbefore described with reference to Figures 4, 14, 15, and/or 19 to 23.

1/13

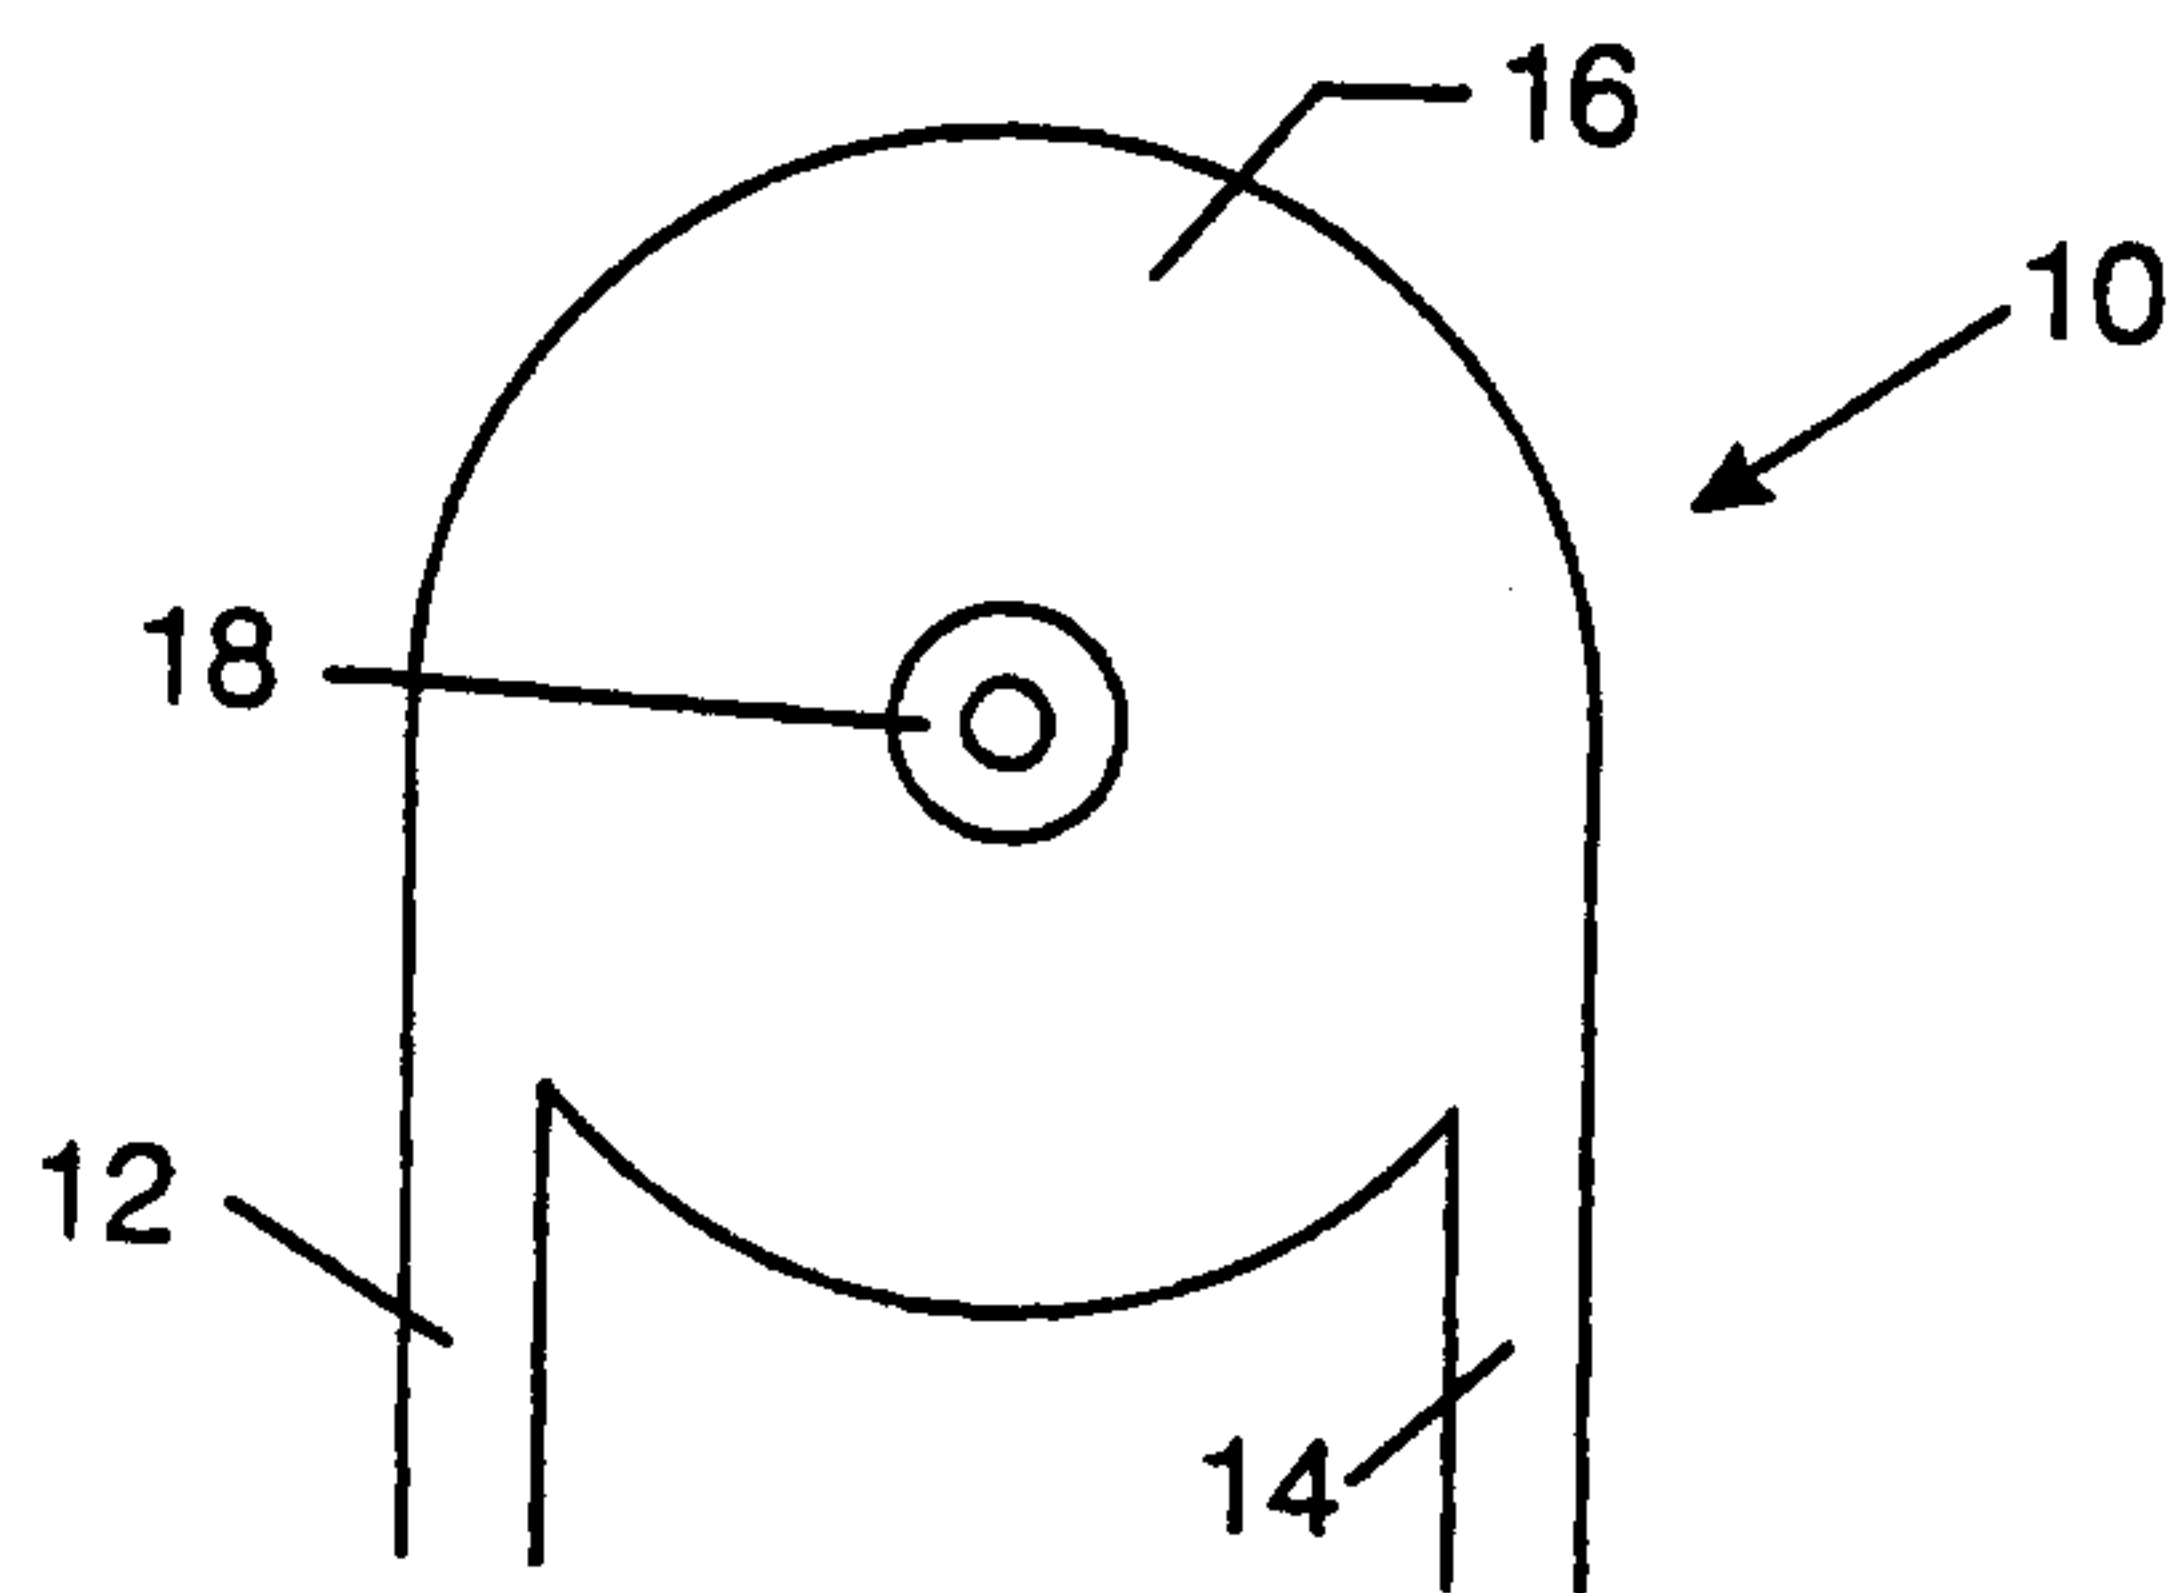


Fig. 1

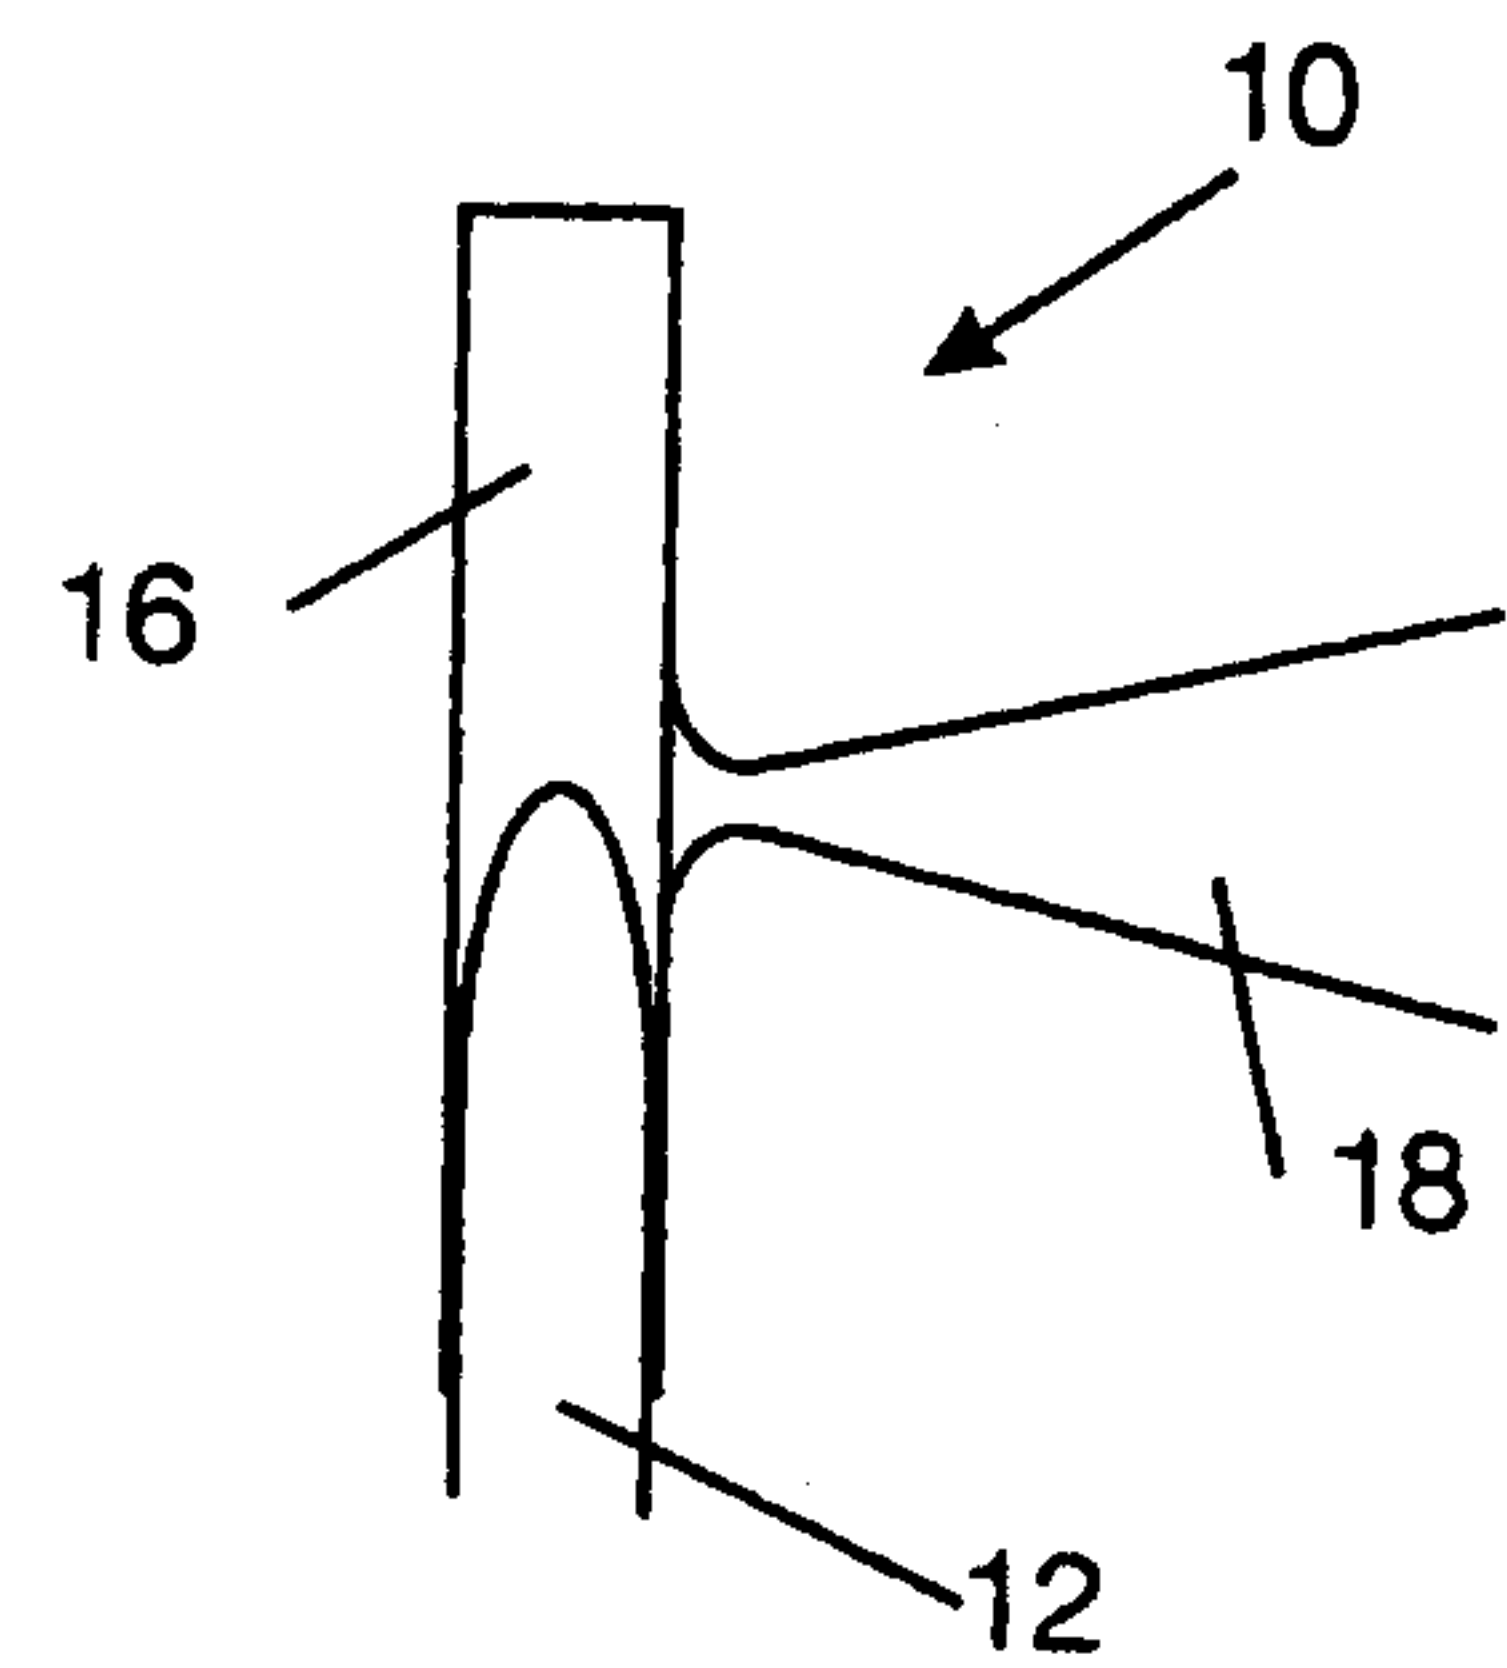


Fig. 2

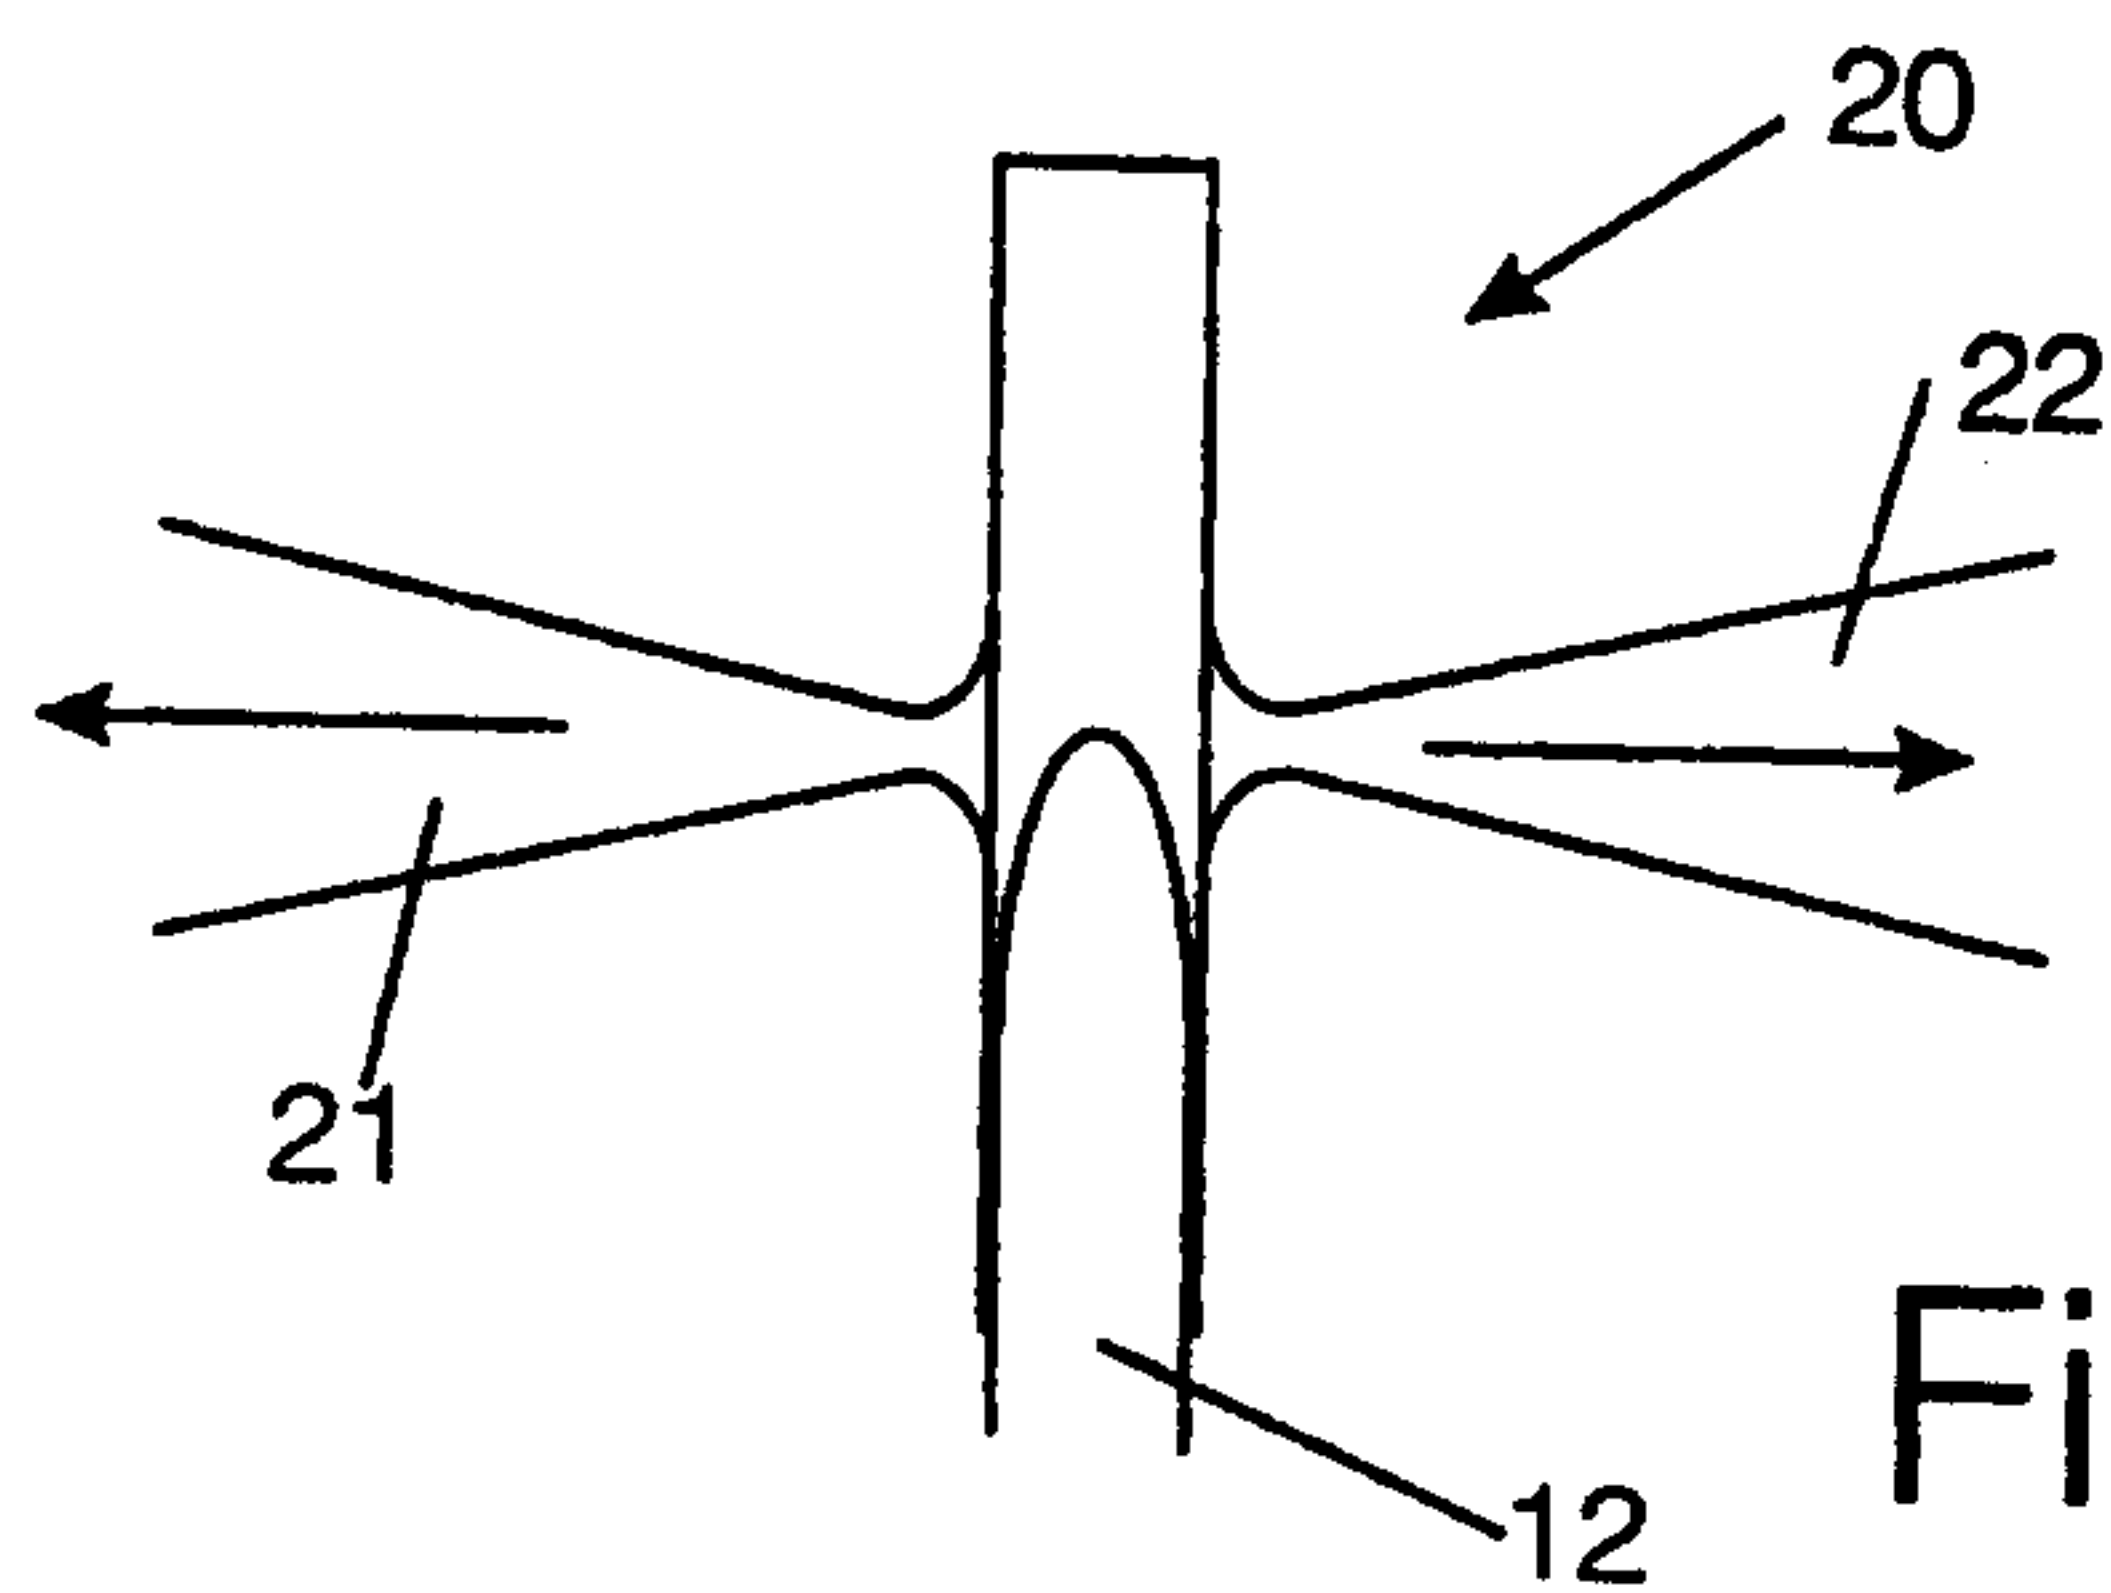


Fig. 3




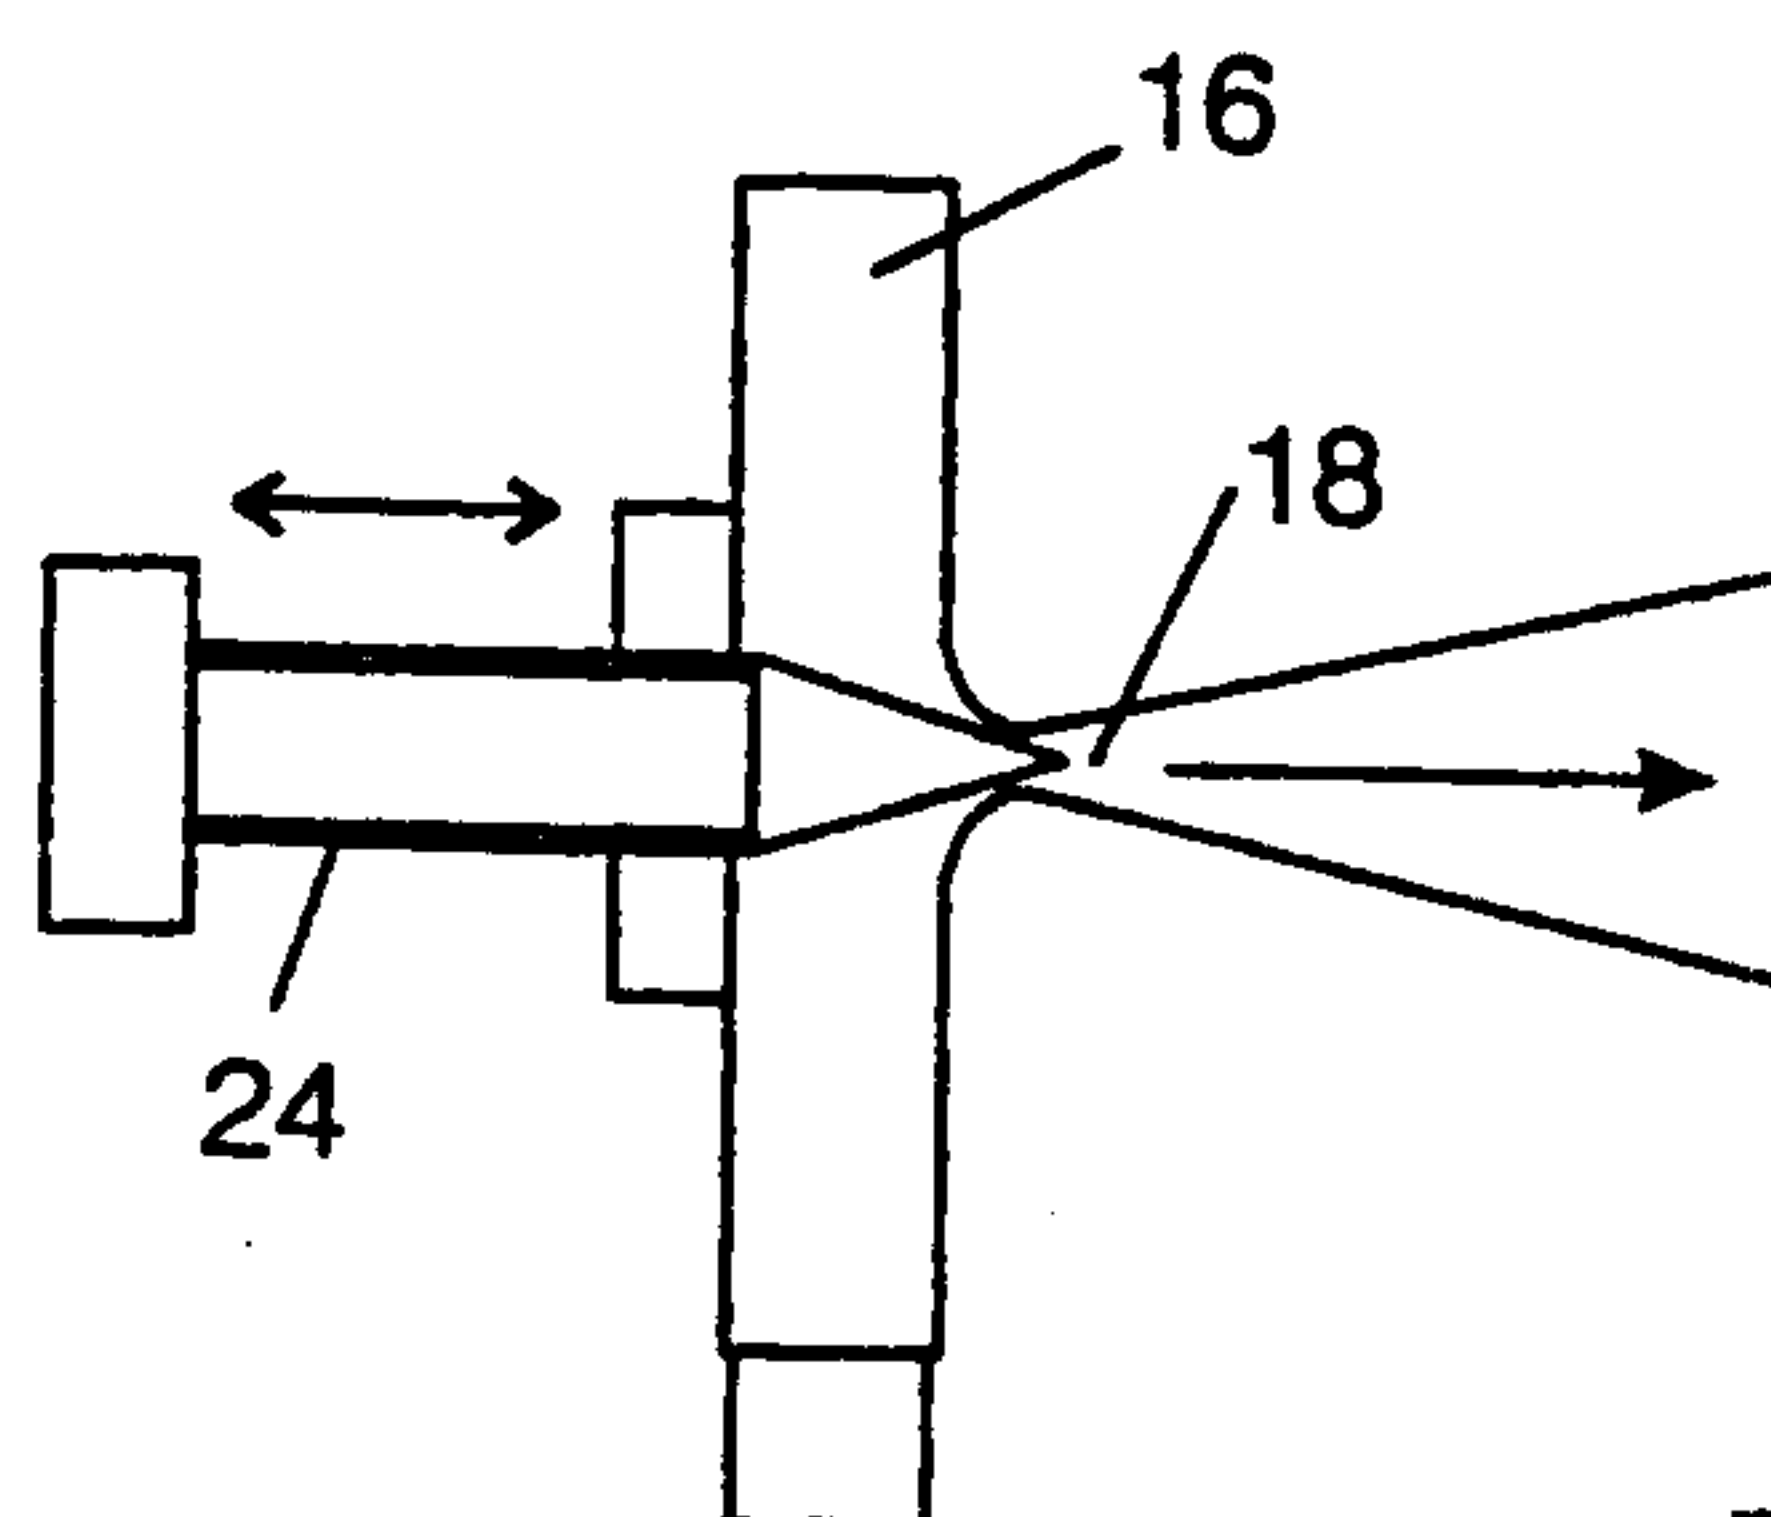


Fig. 4

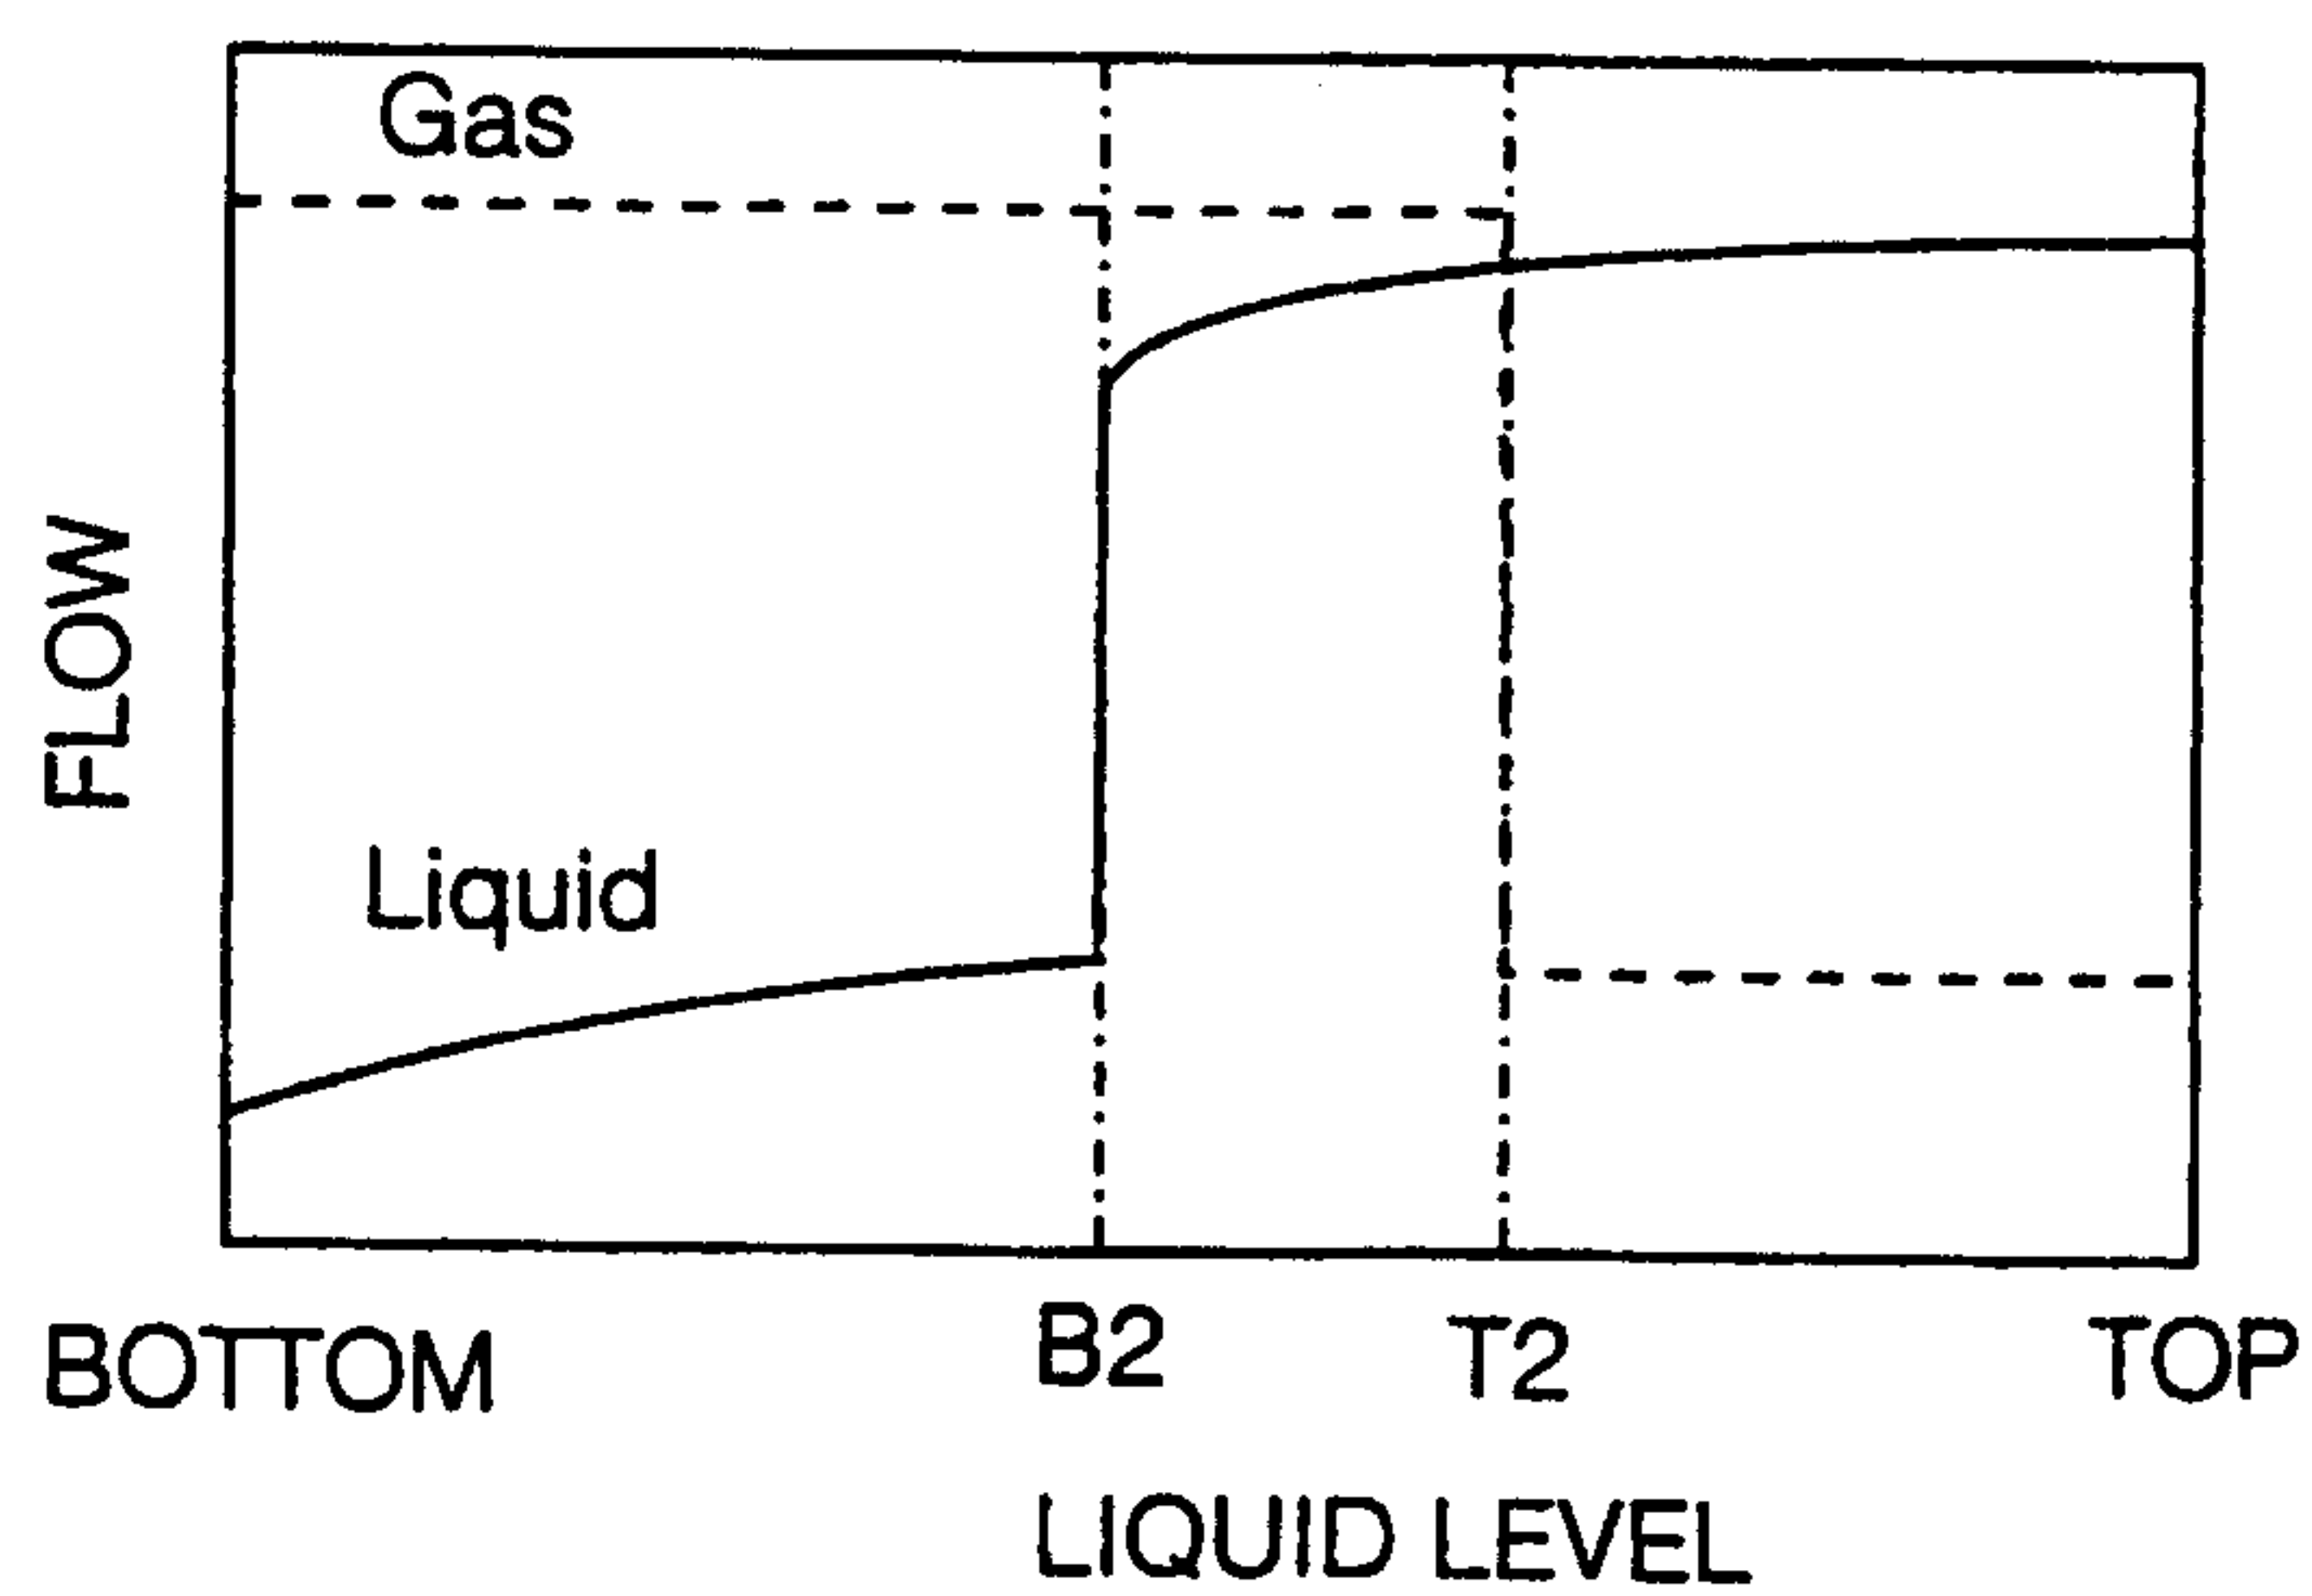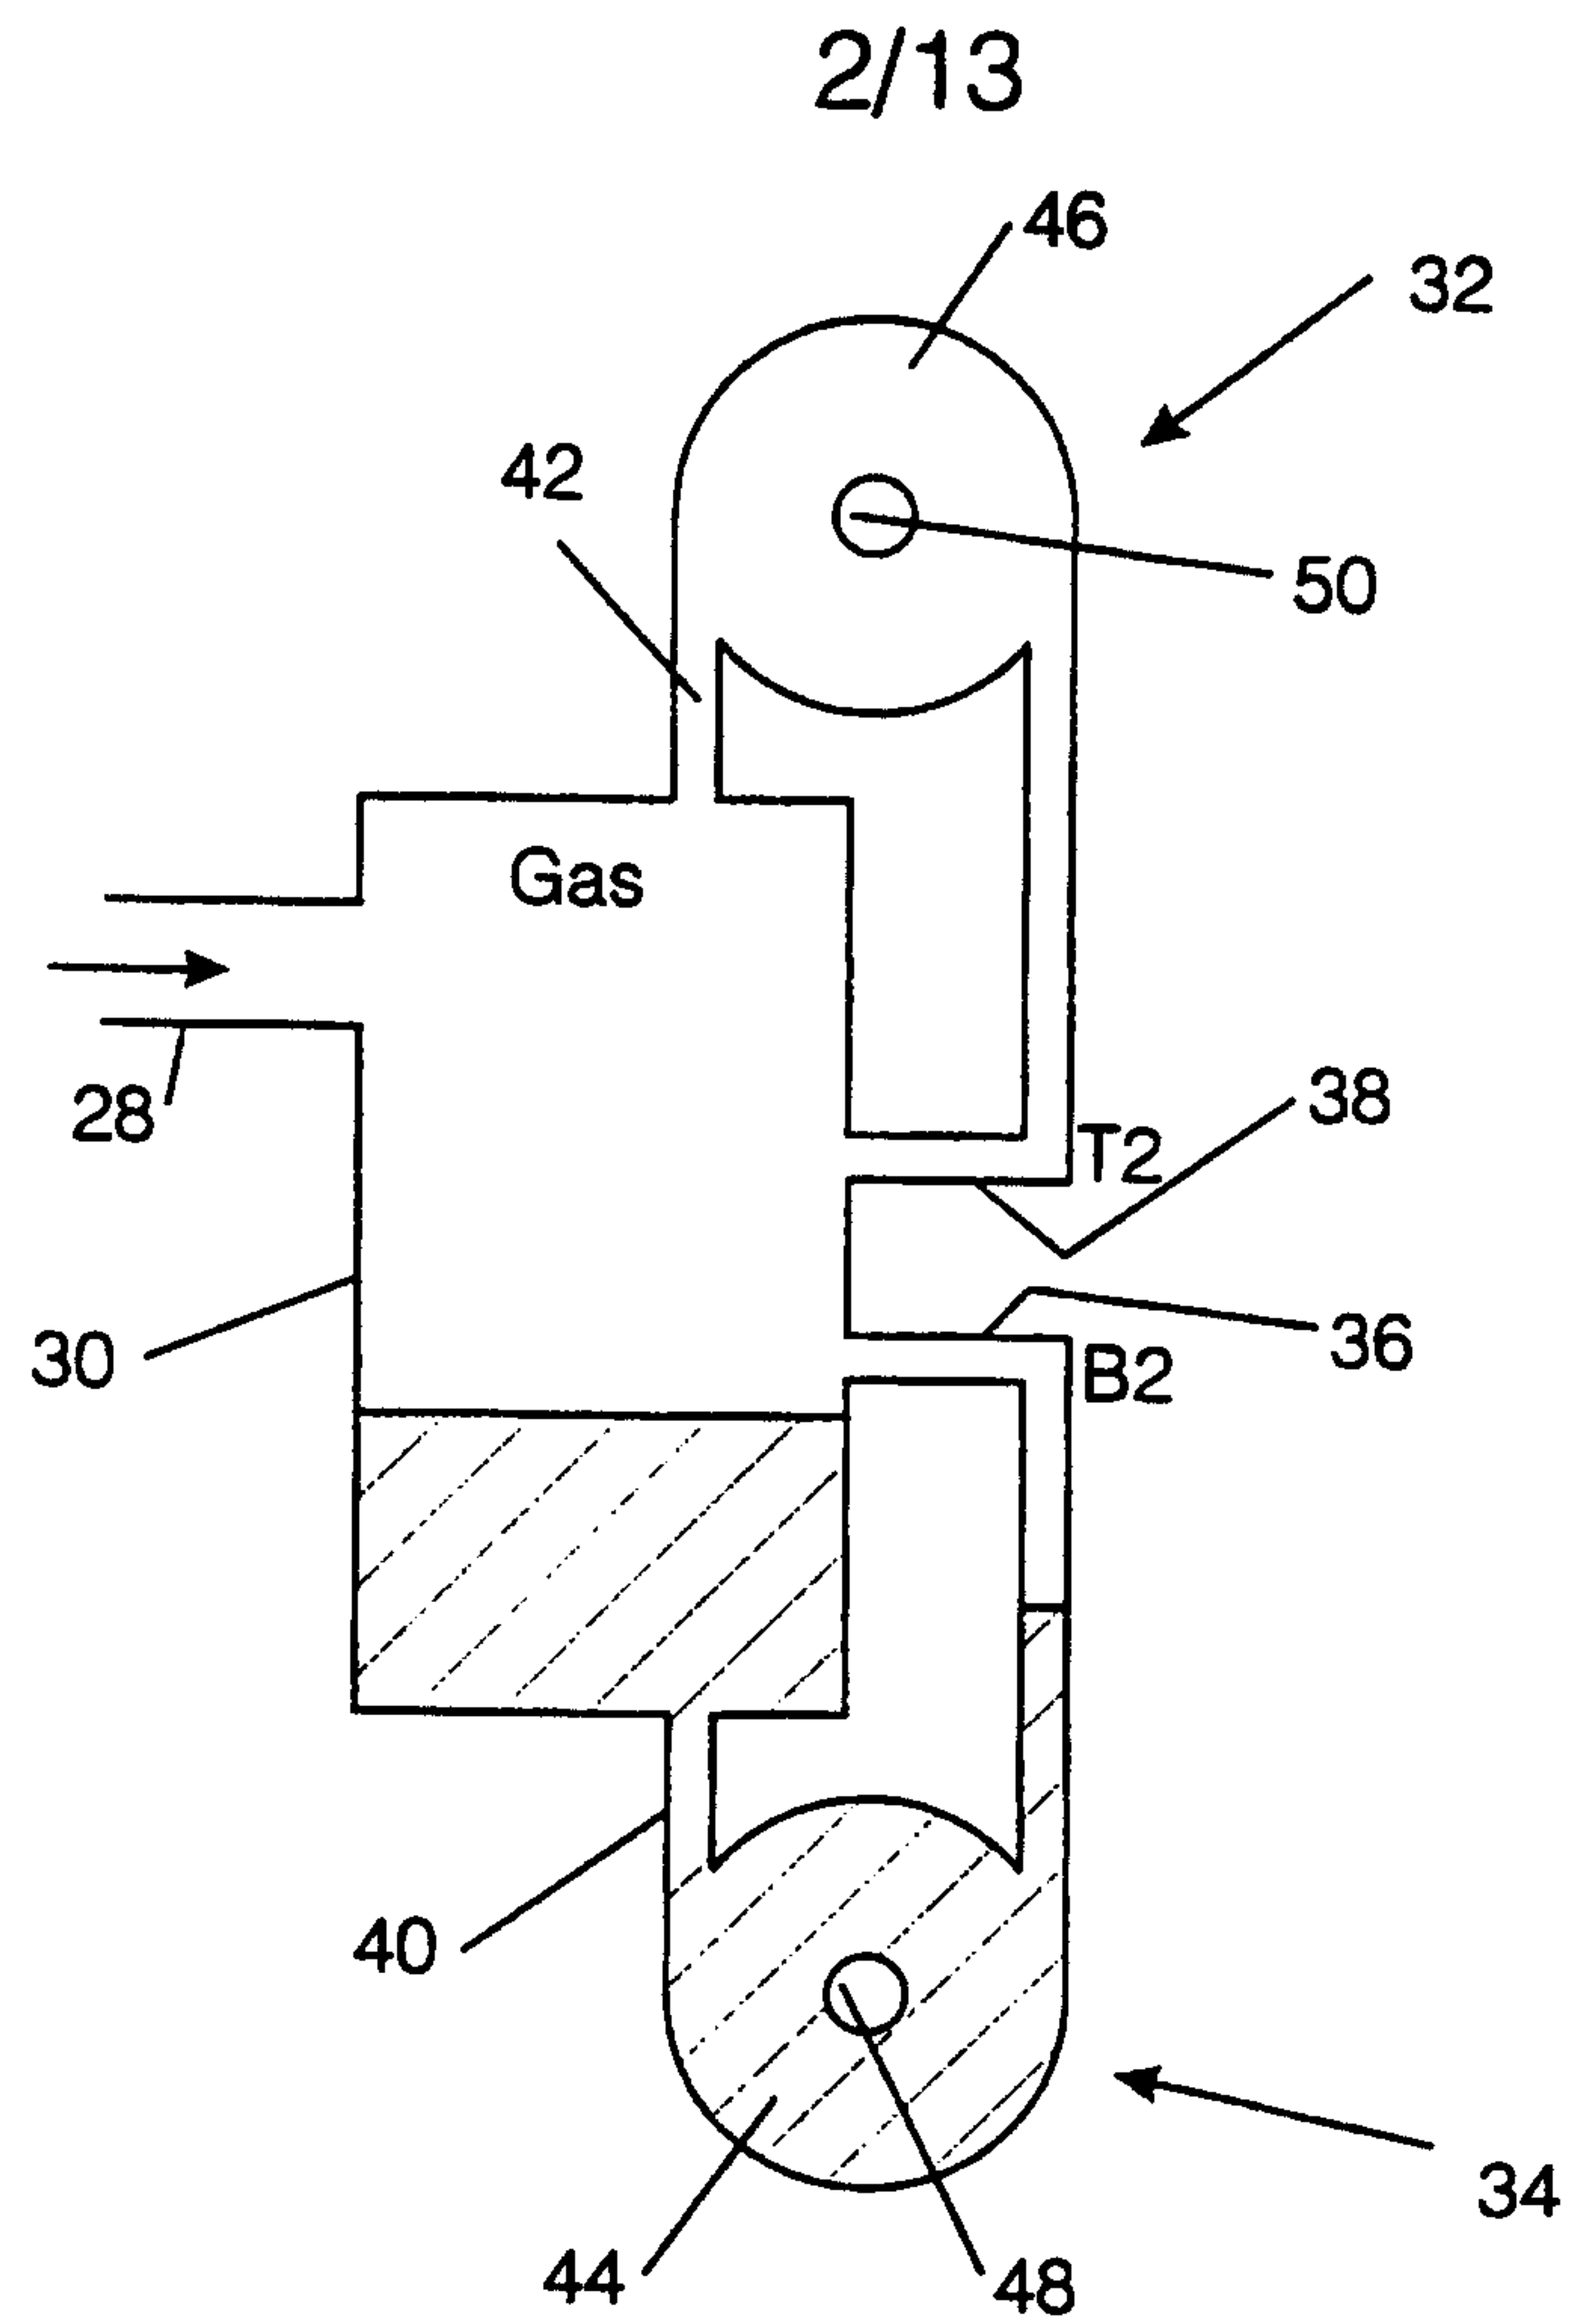

3/13

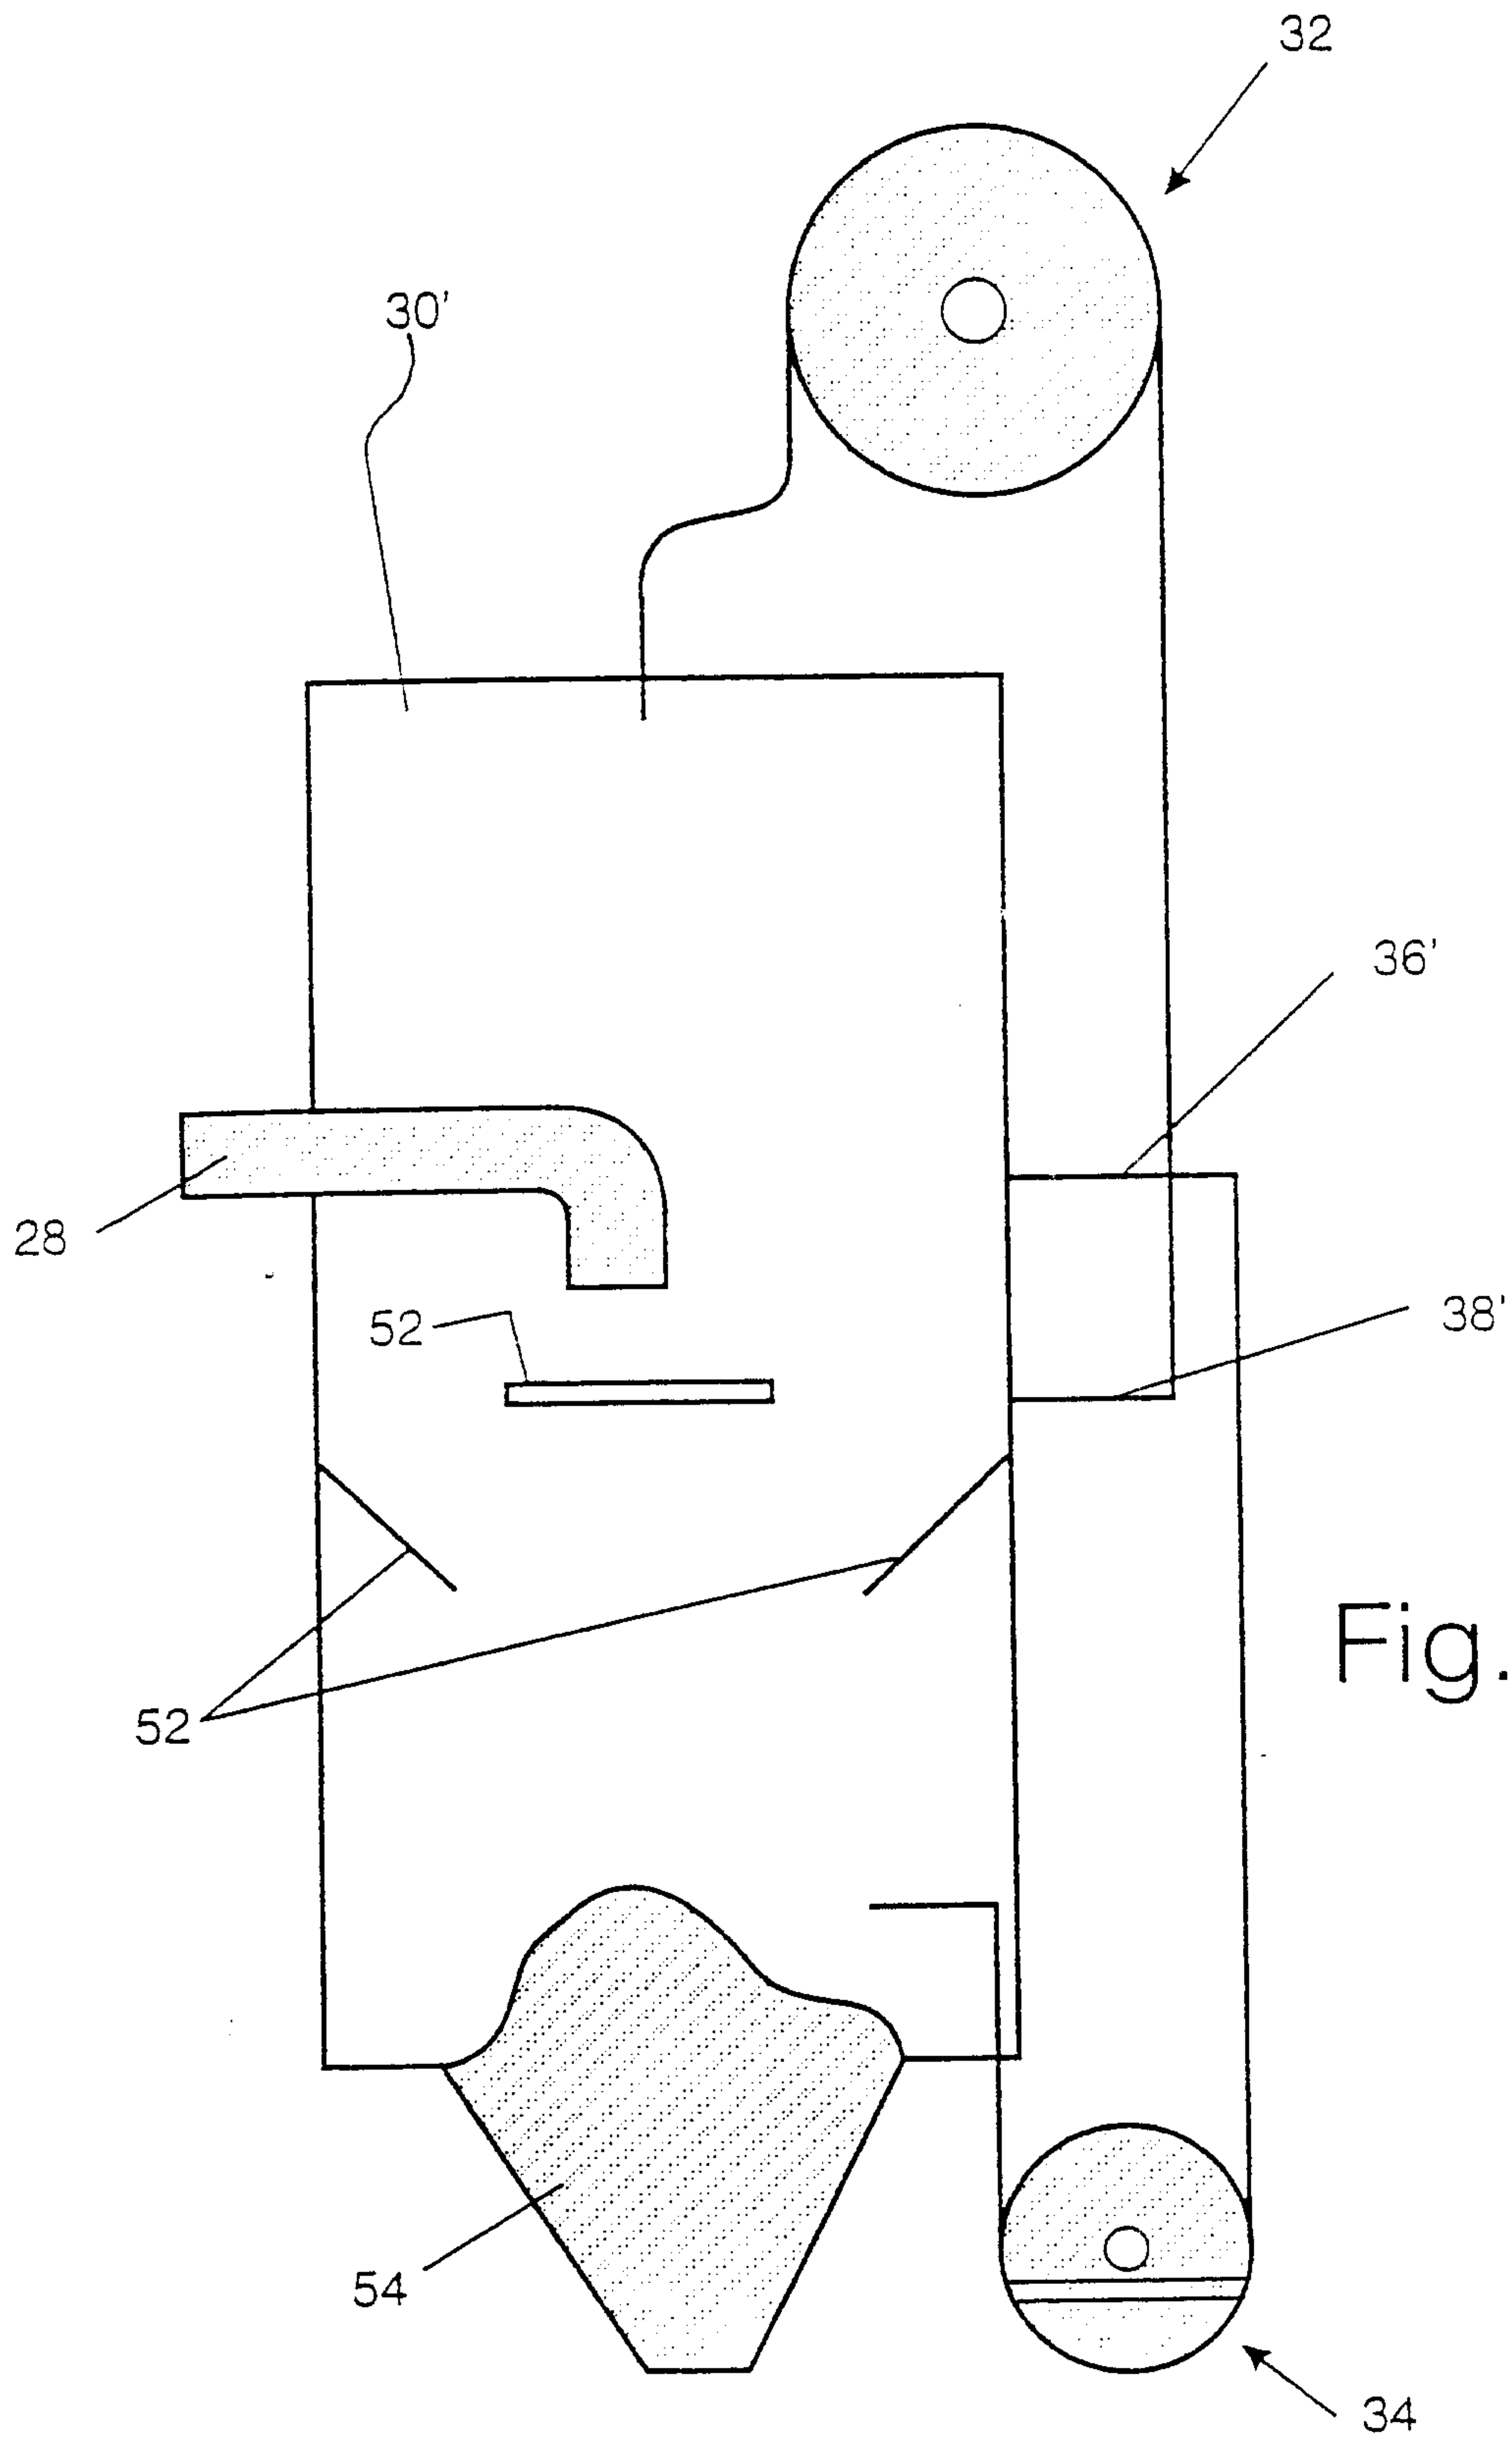

4/13

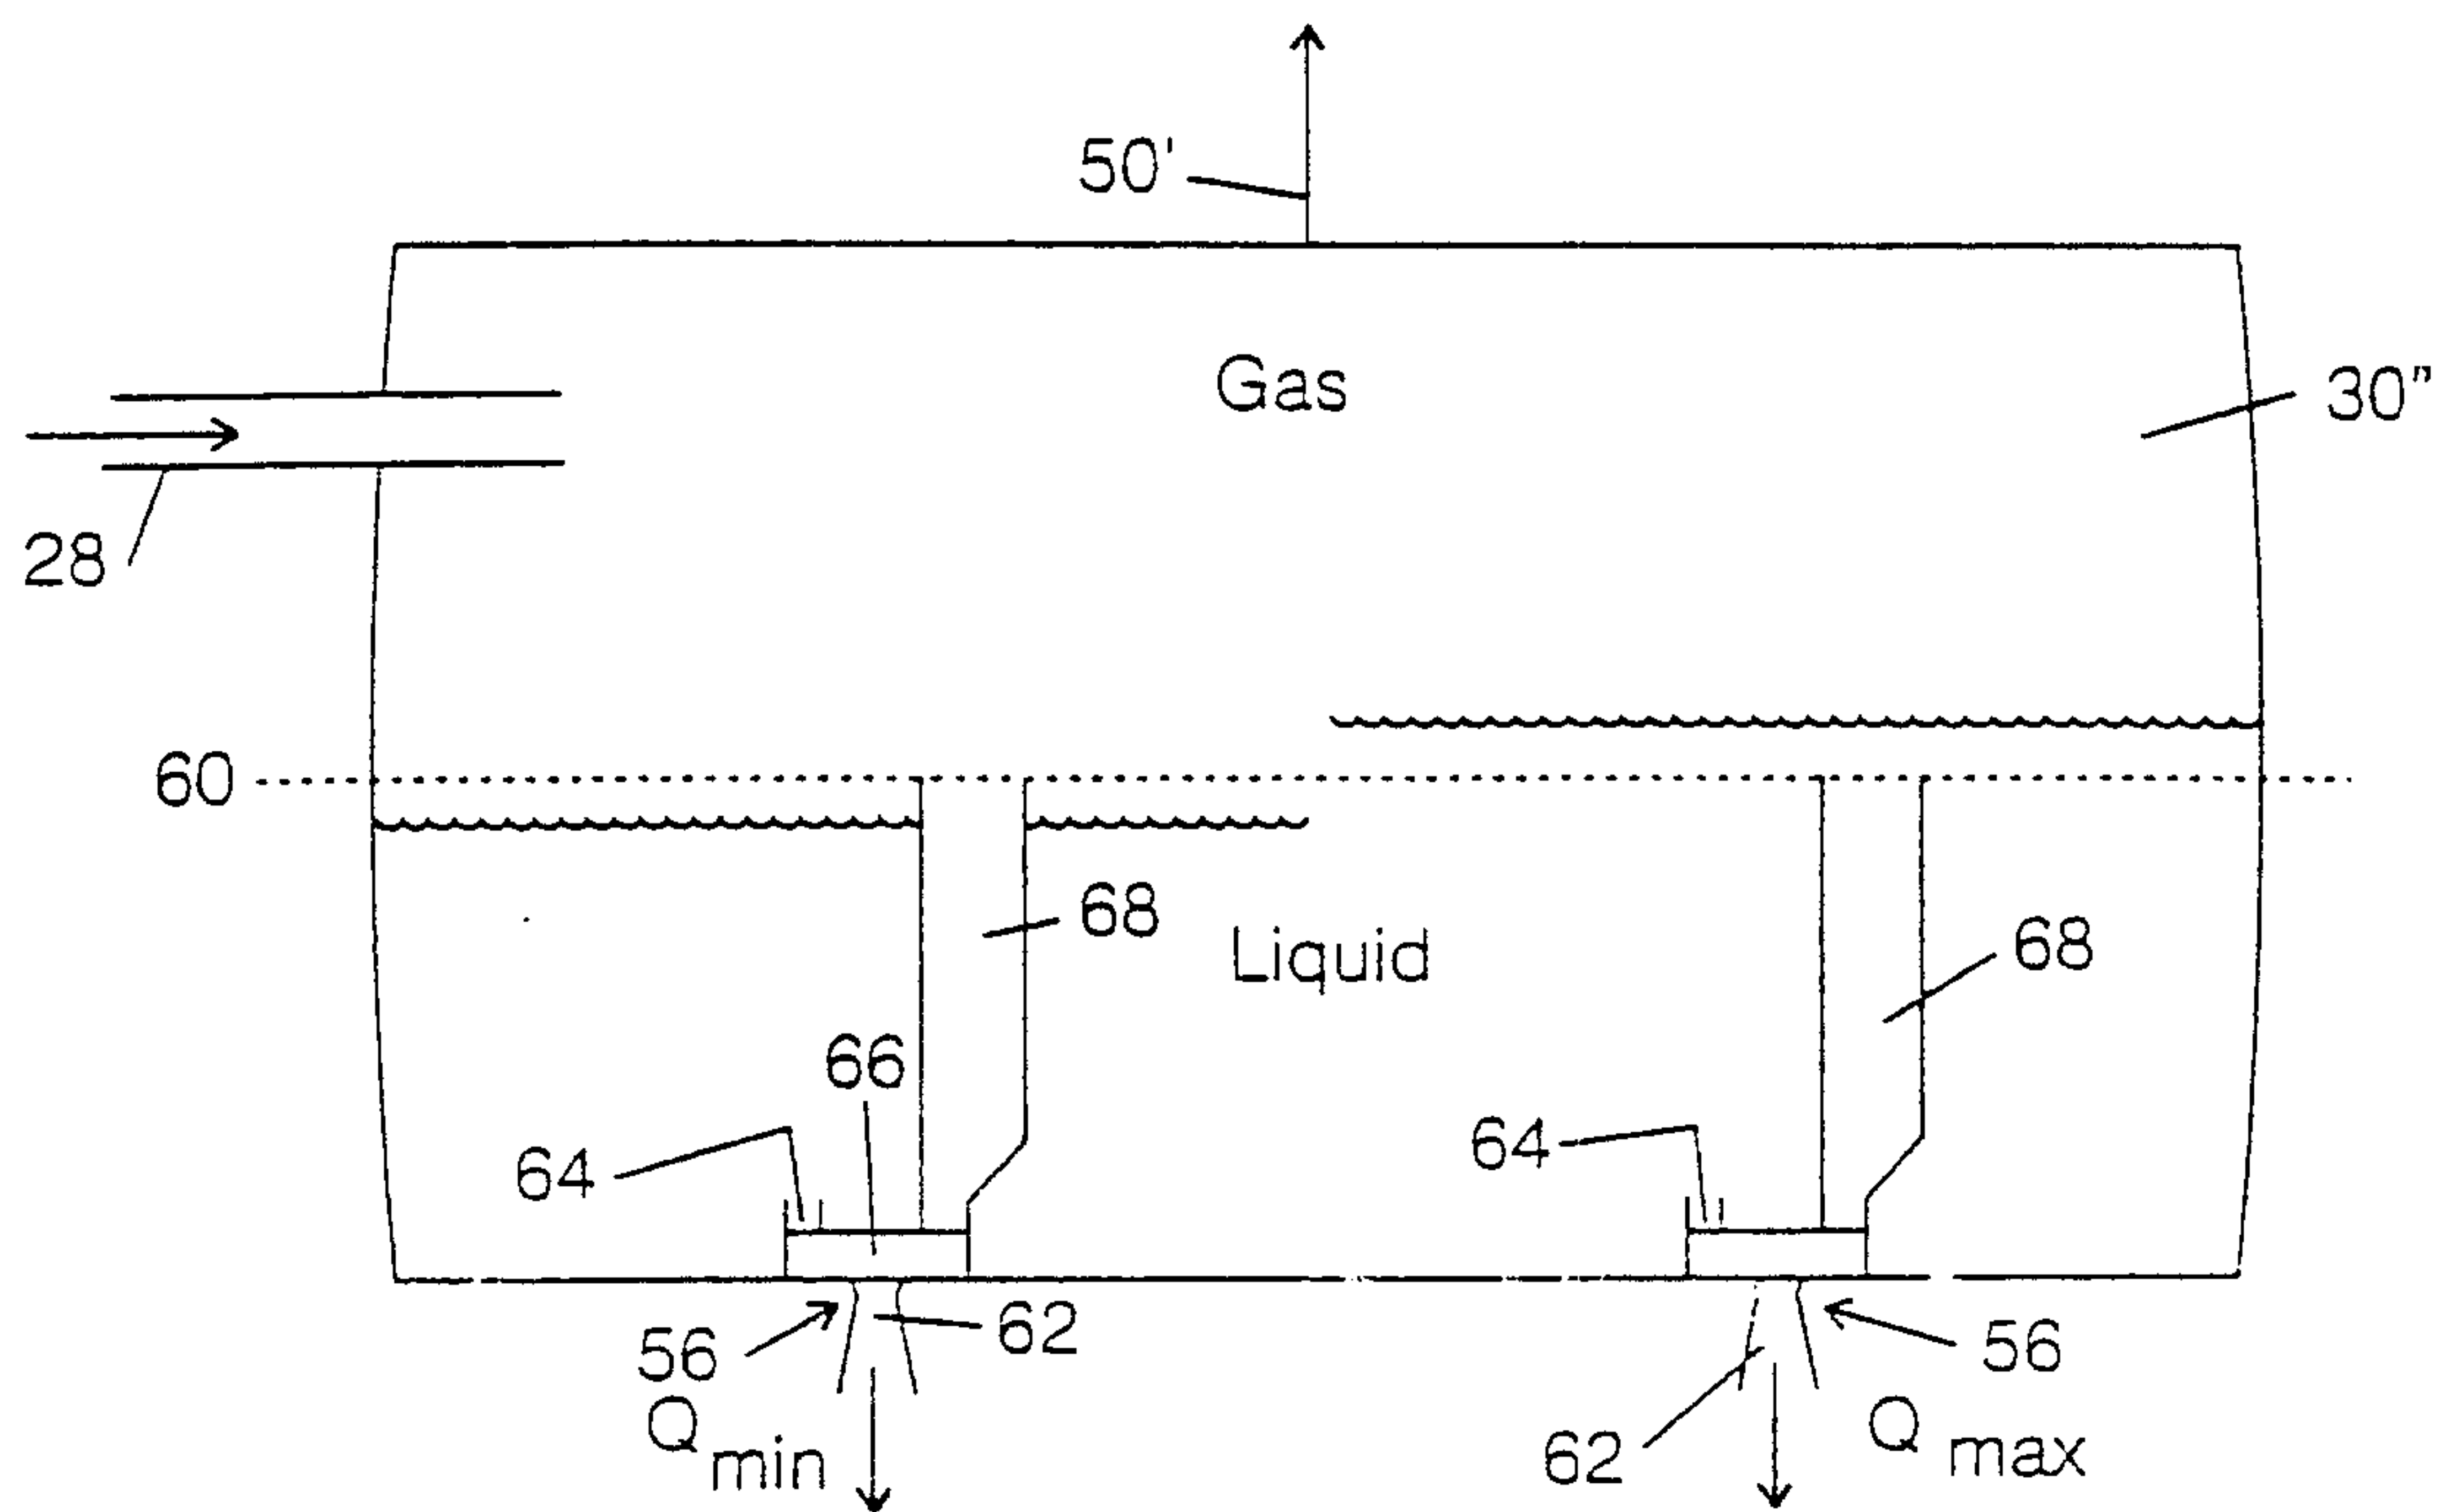


Fig. 7

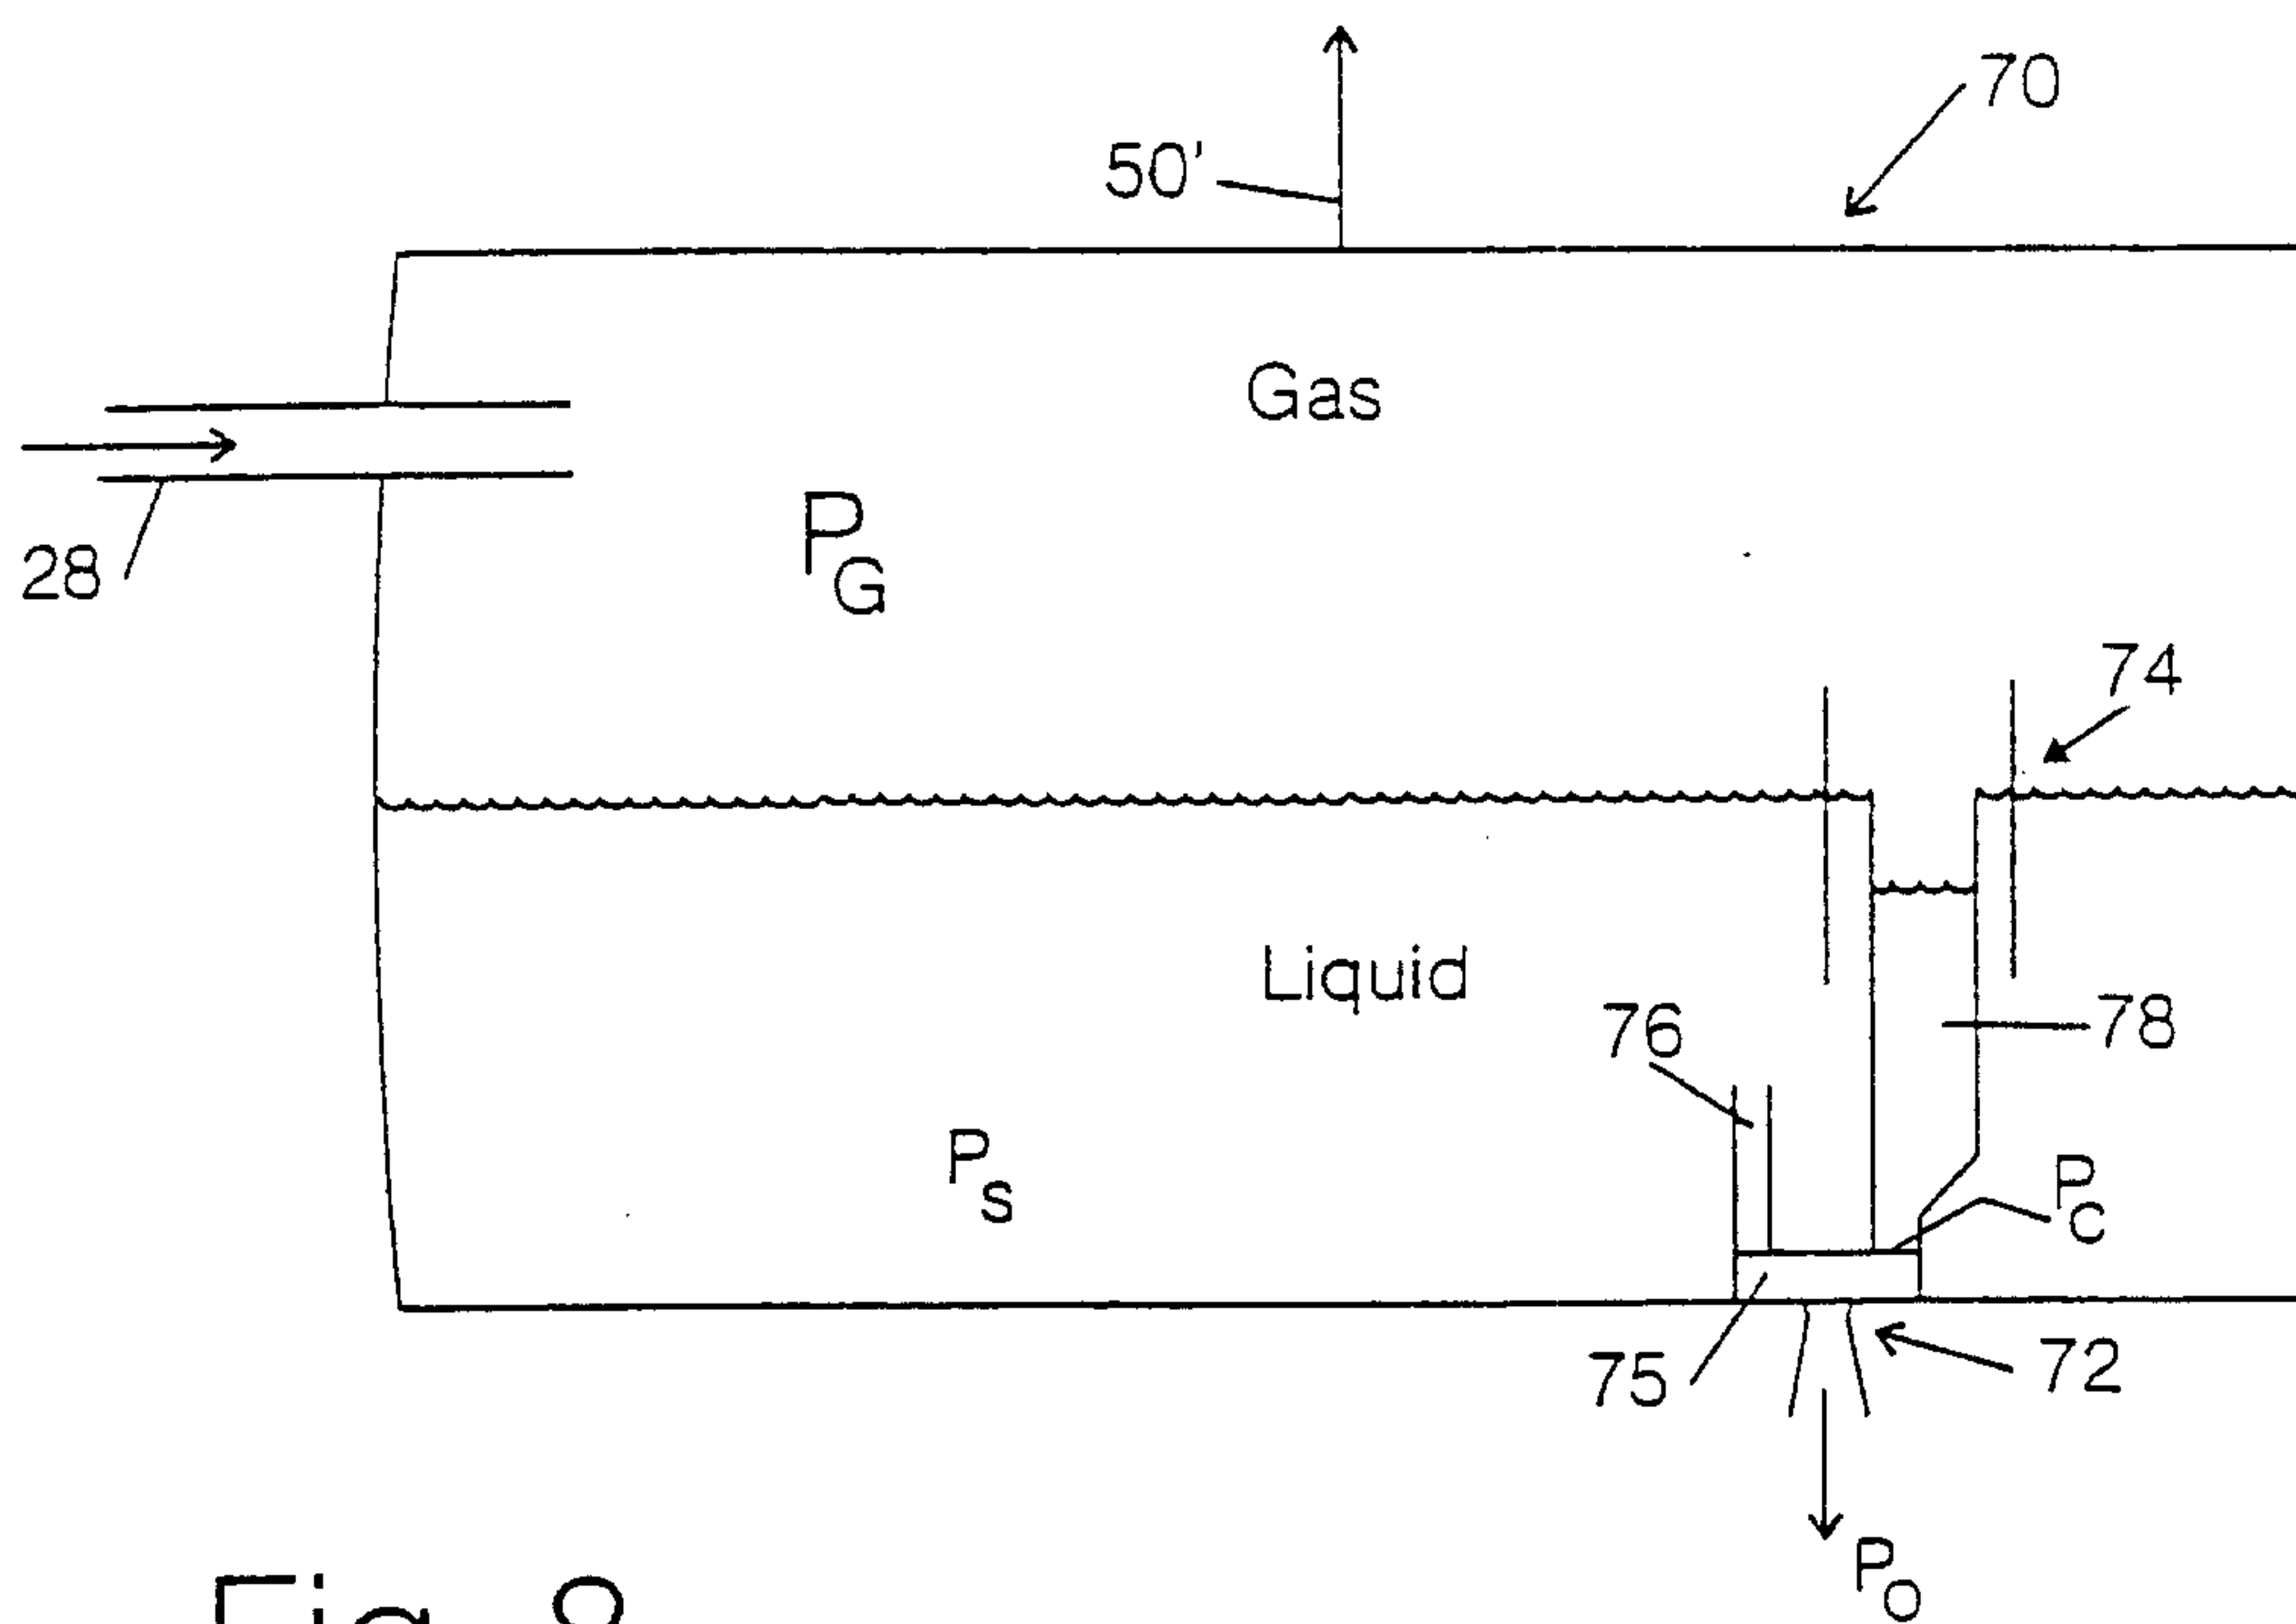


Fig. 8

5/13

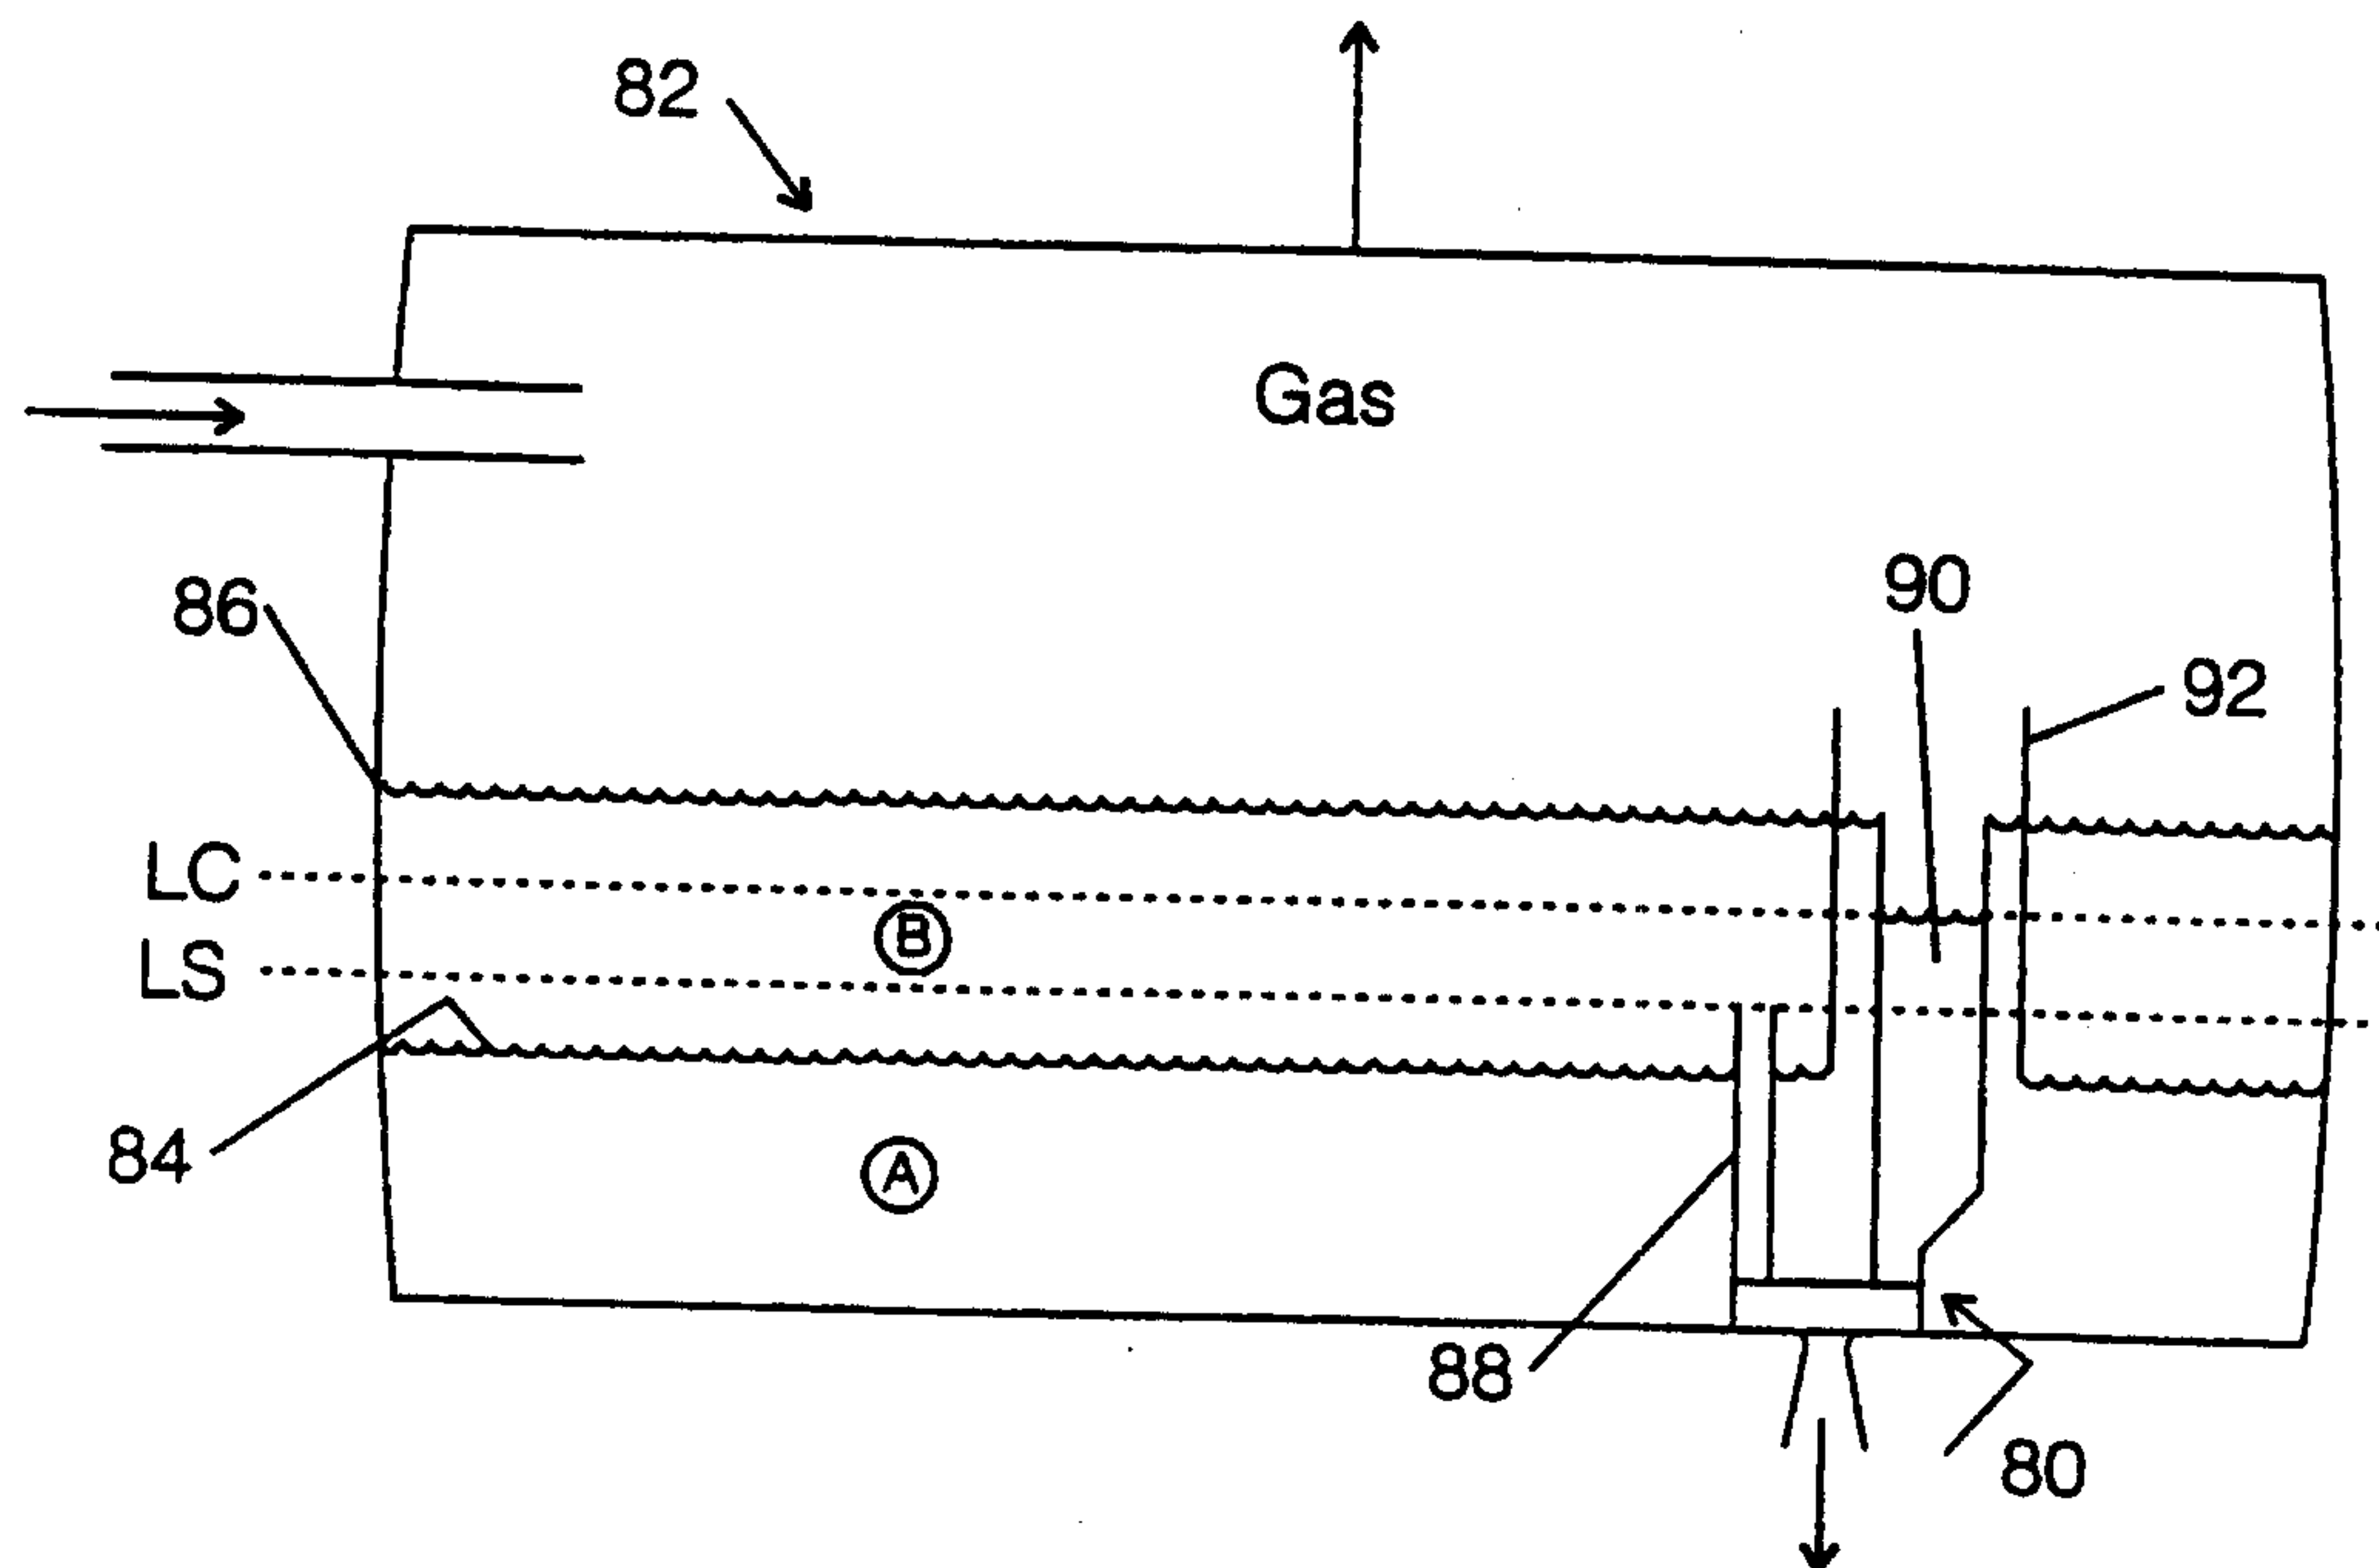


Fig. 9

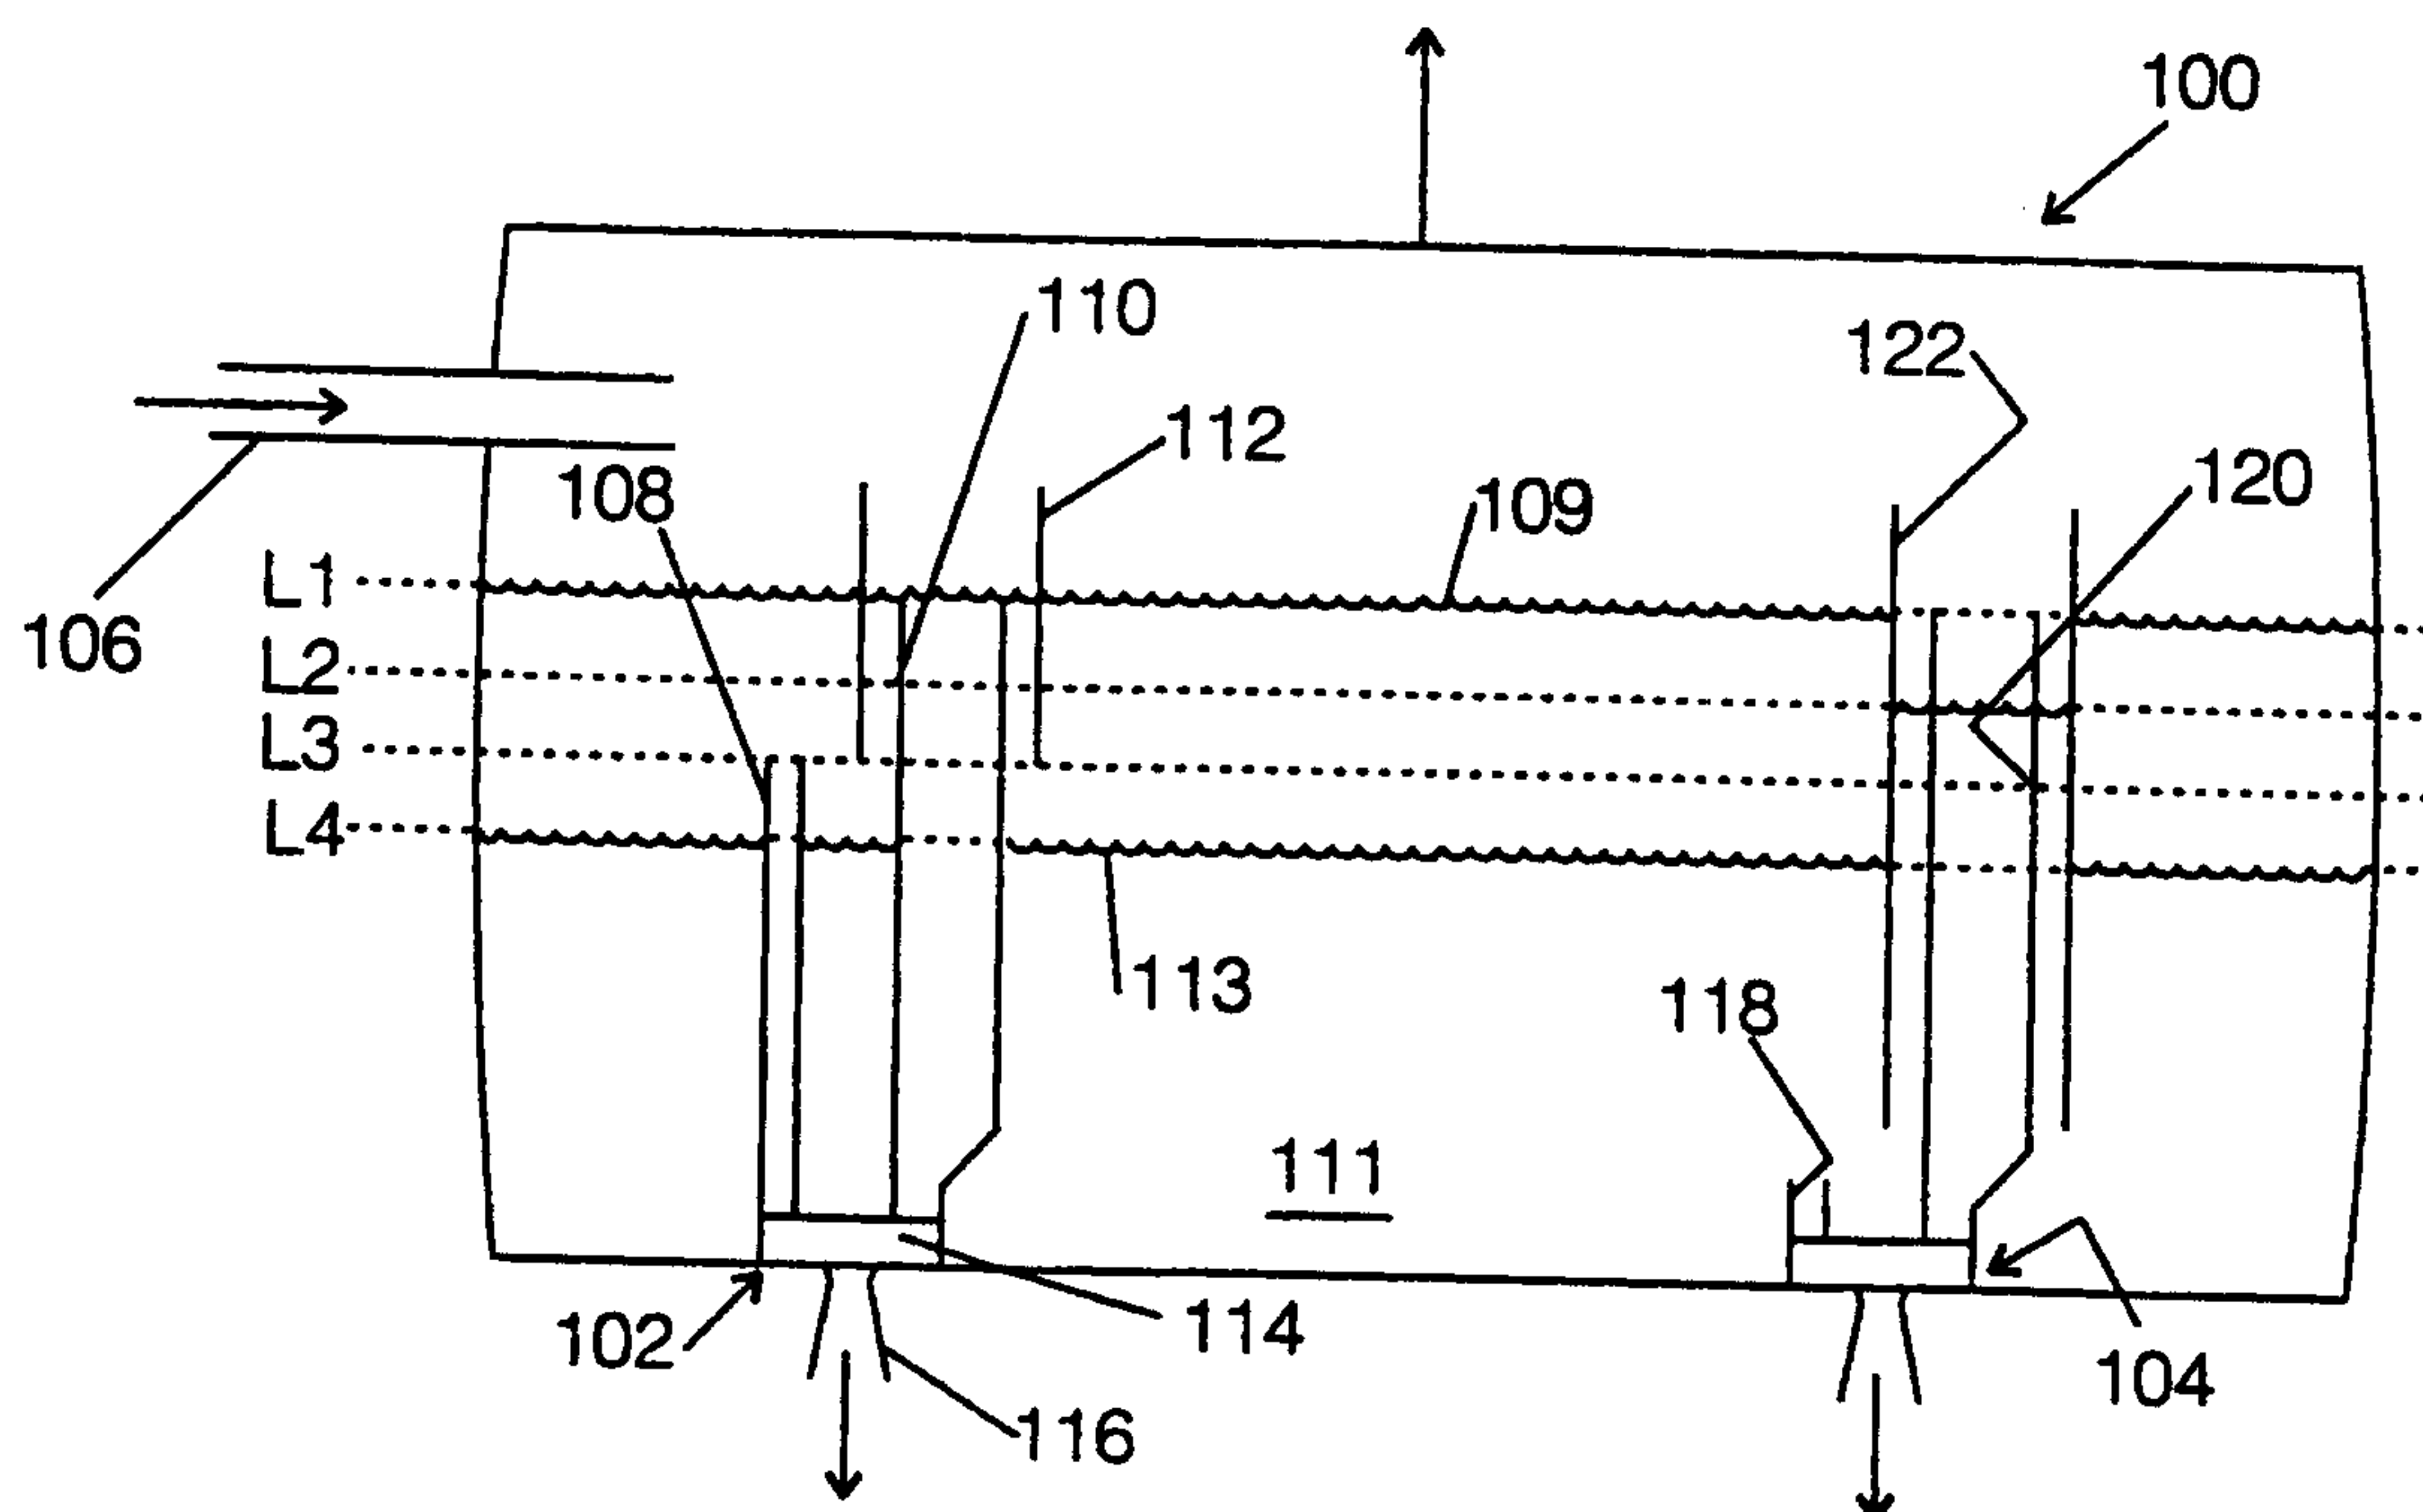


Fig. 10

6/13

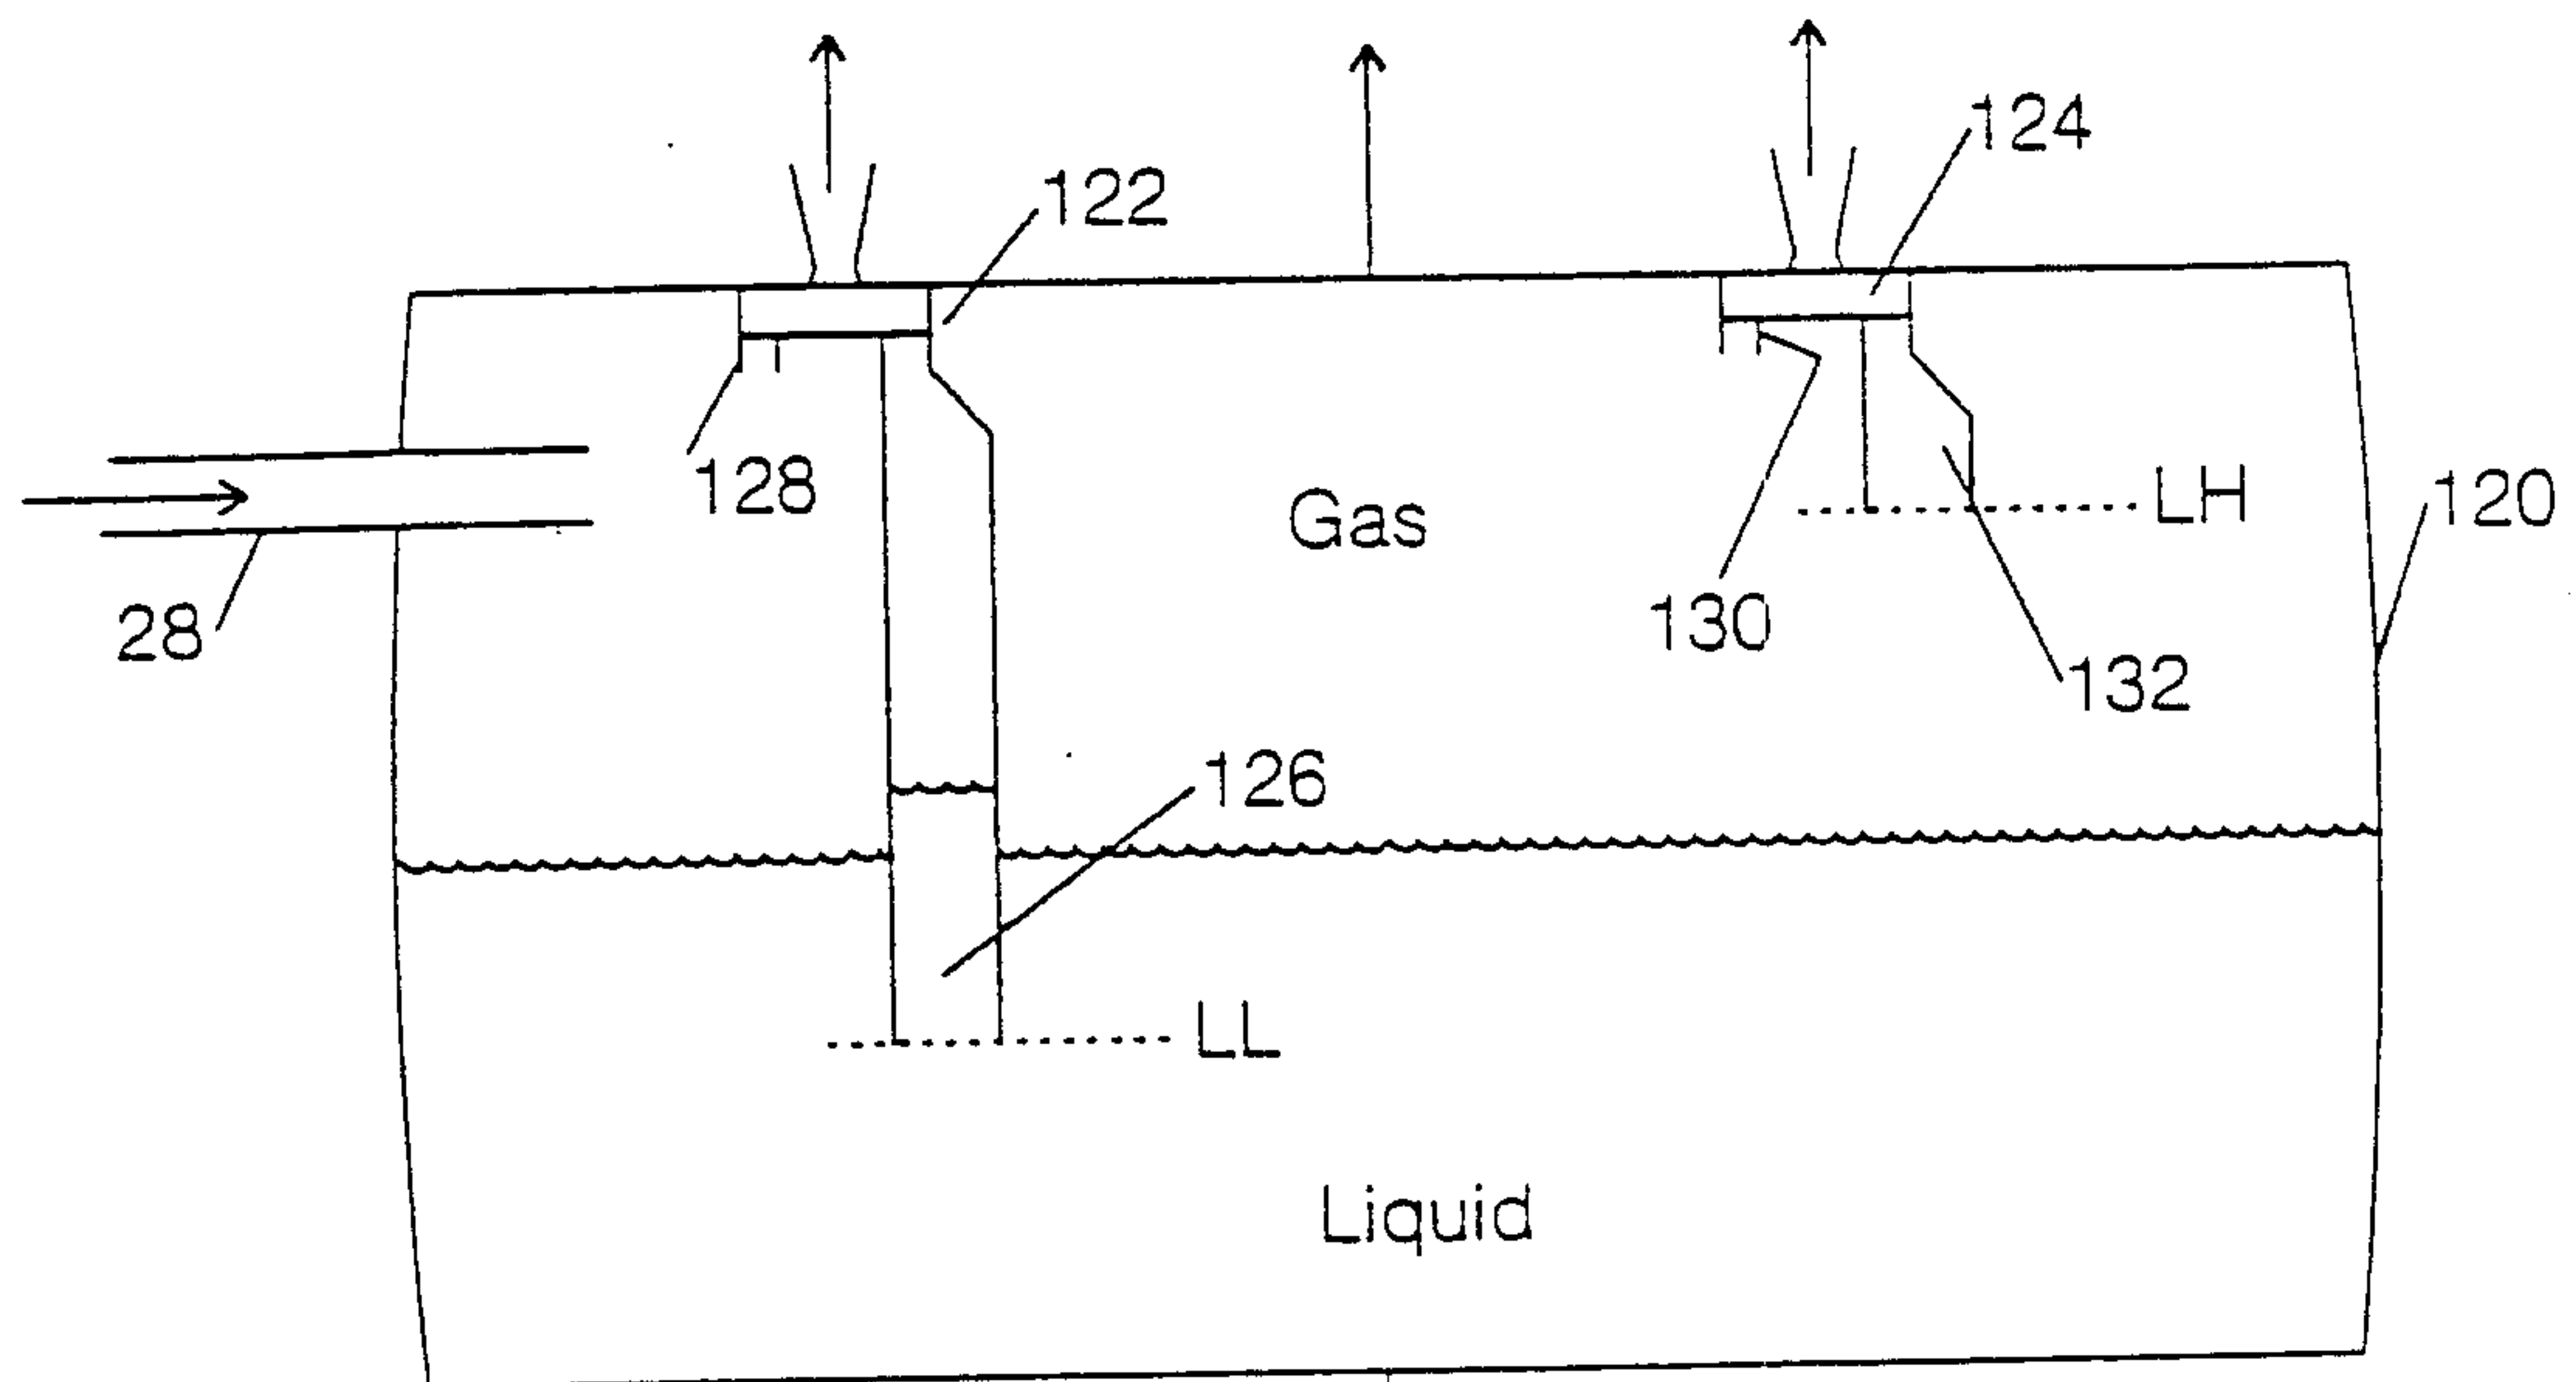


Fig. 11

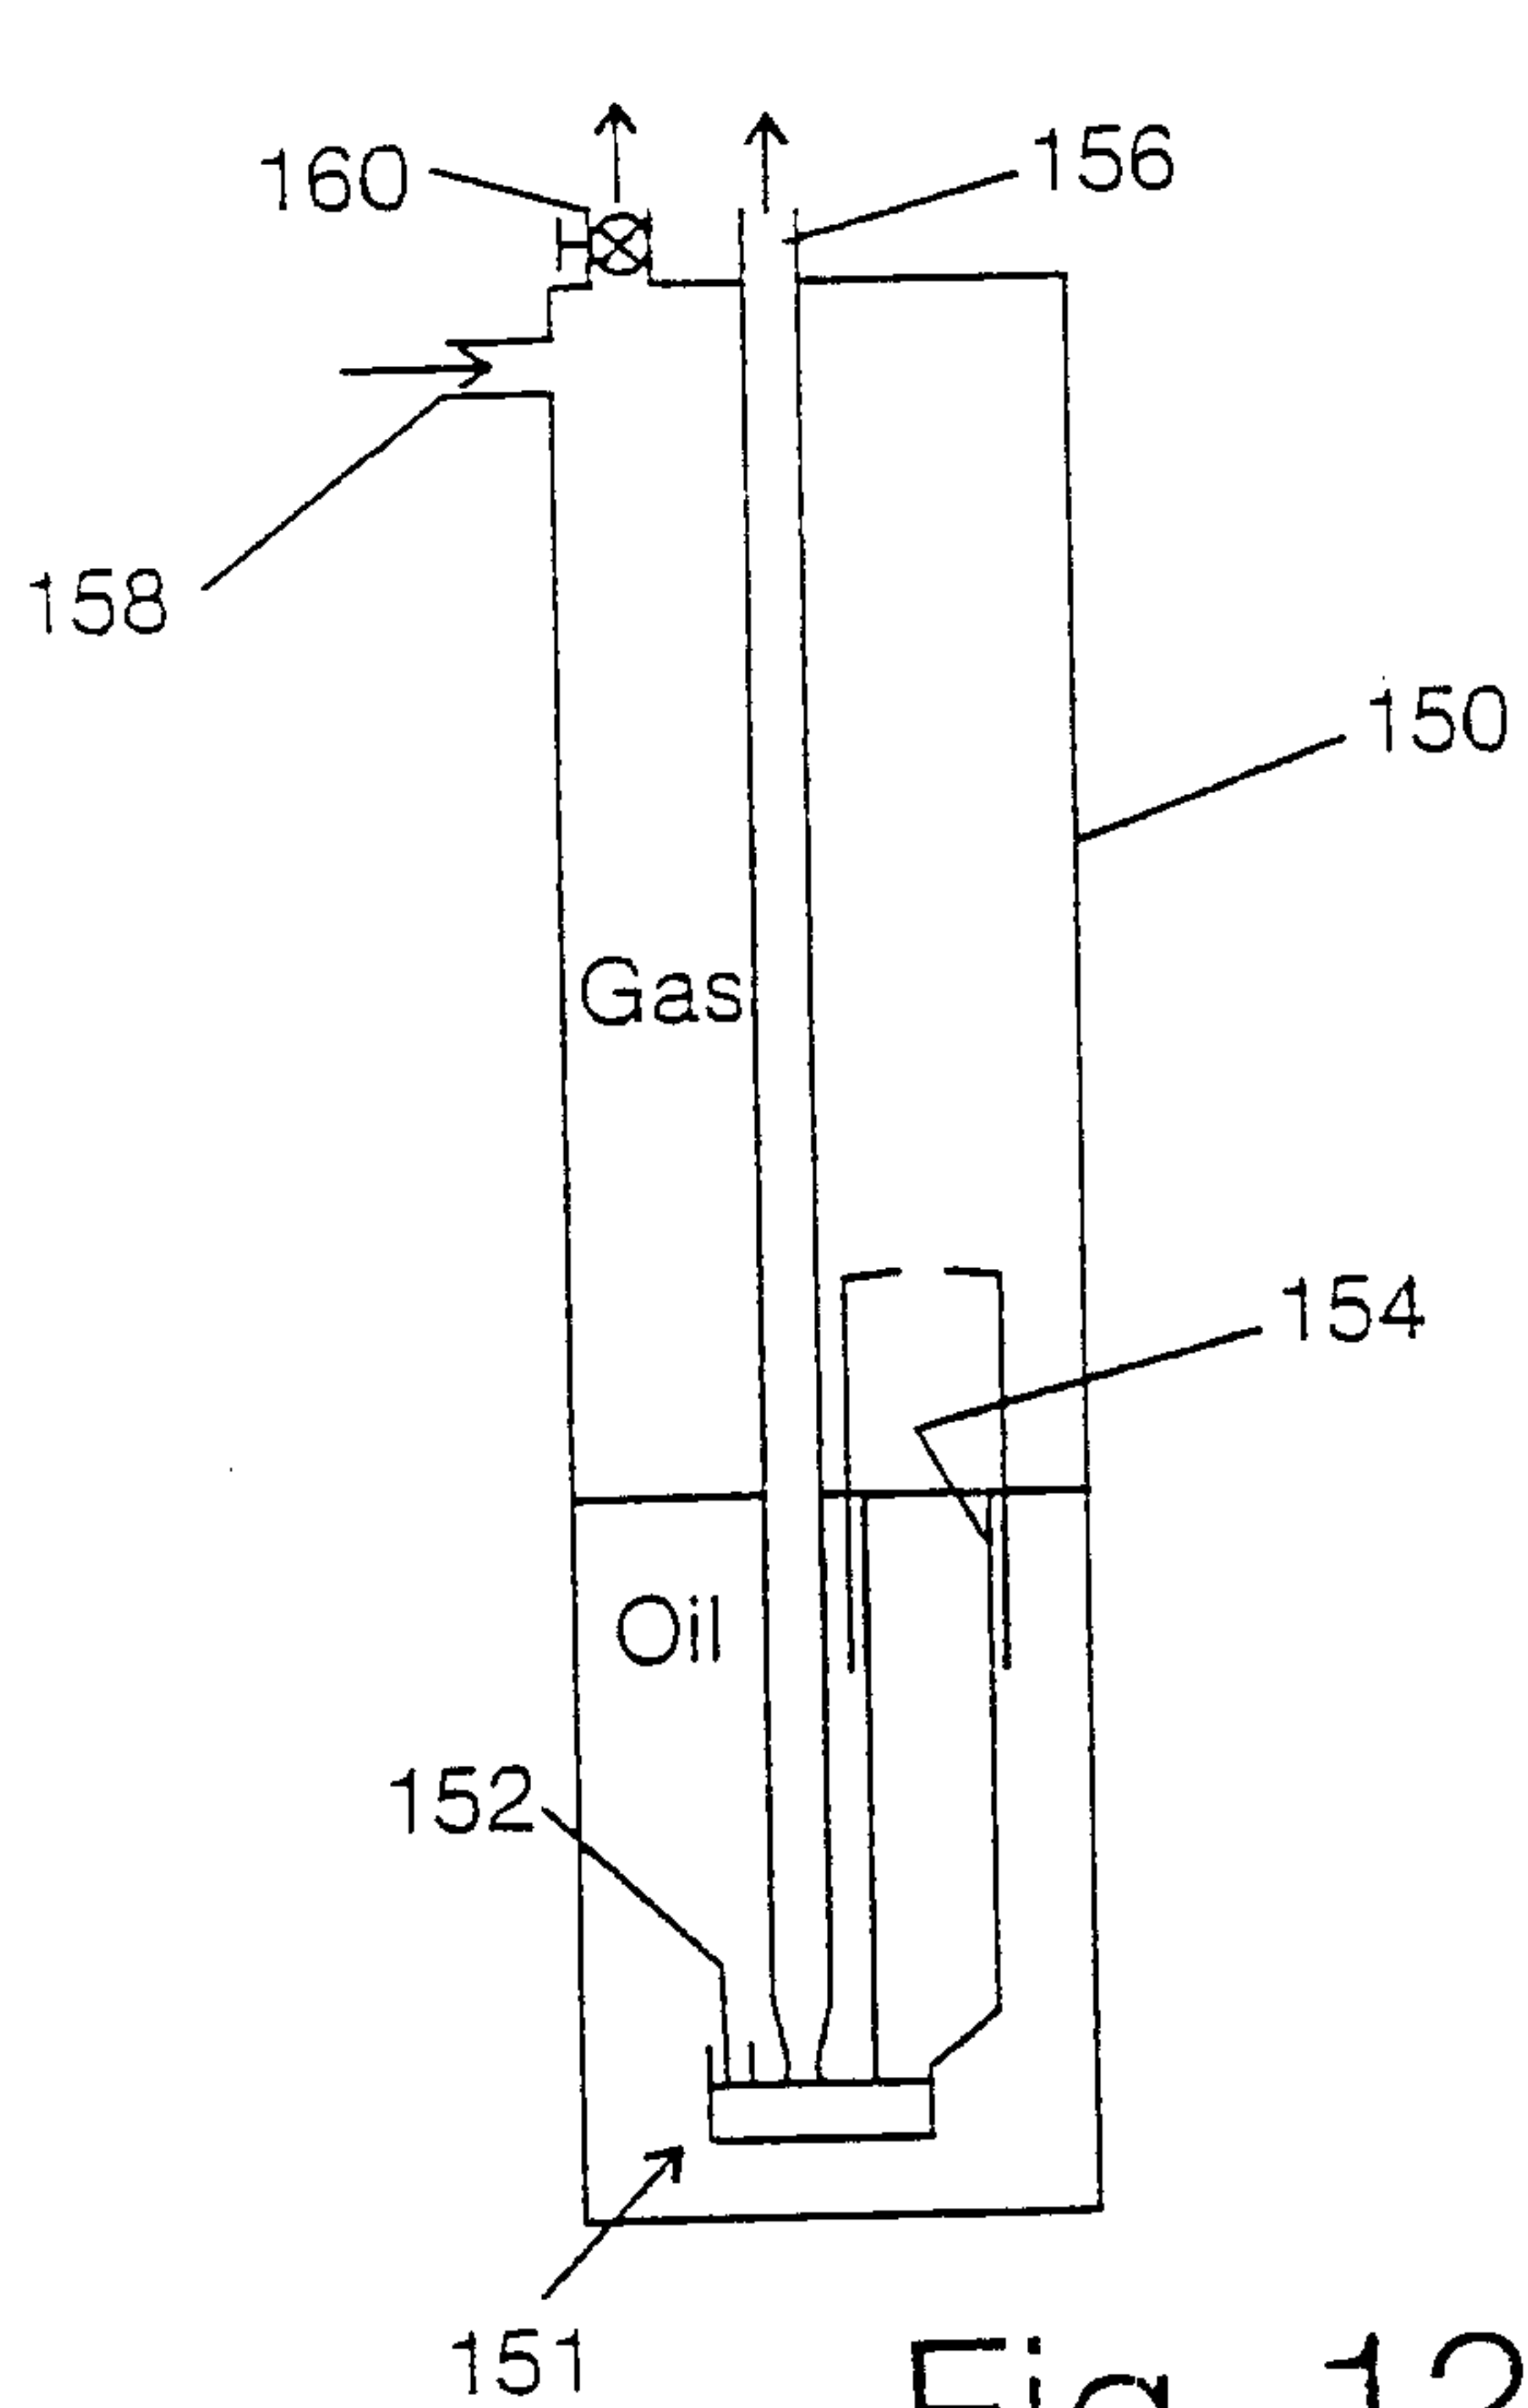


Fig. 12

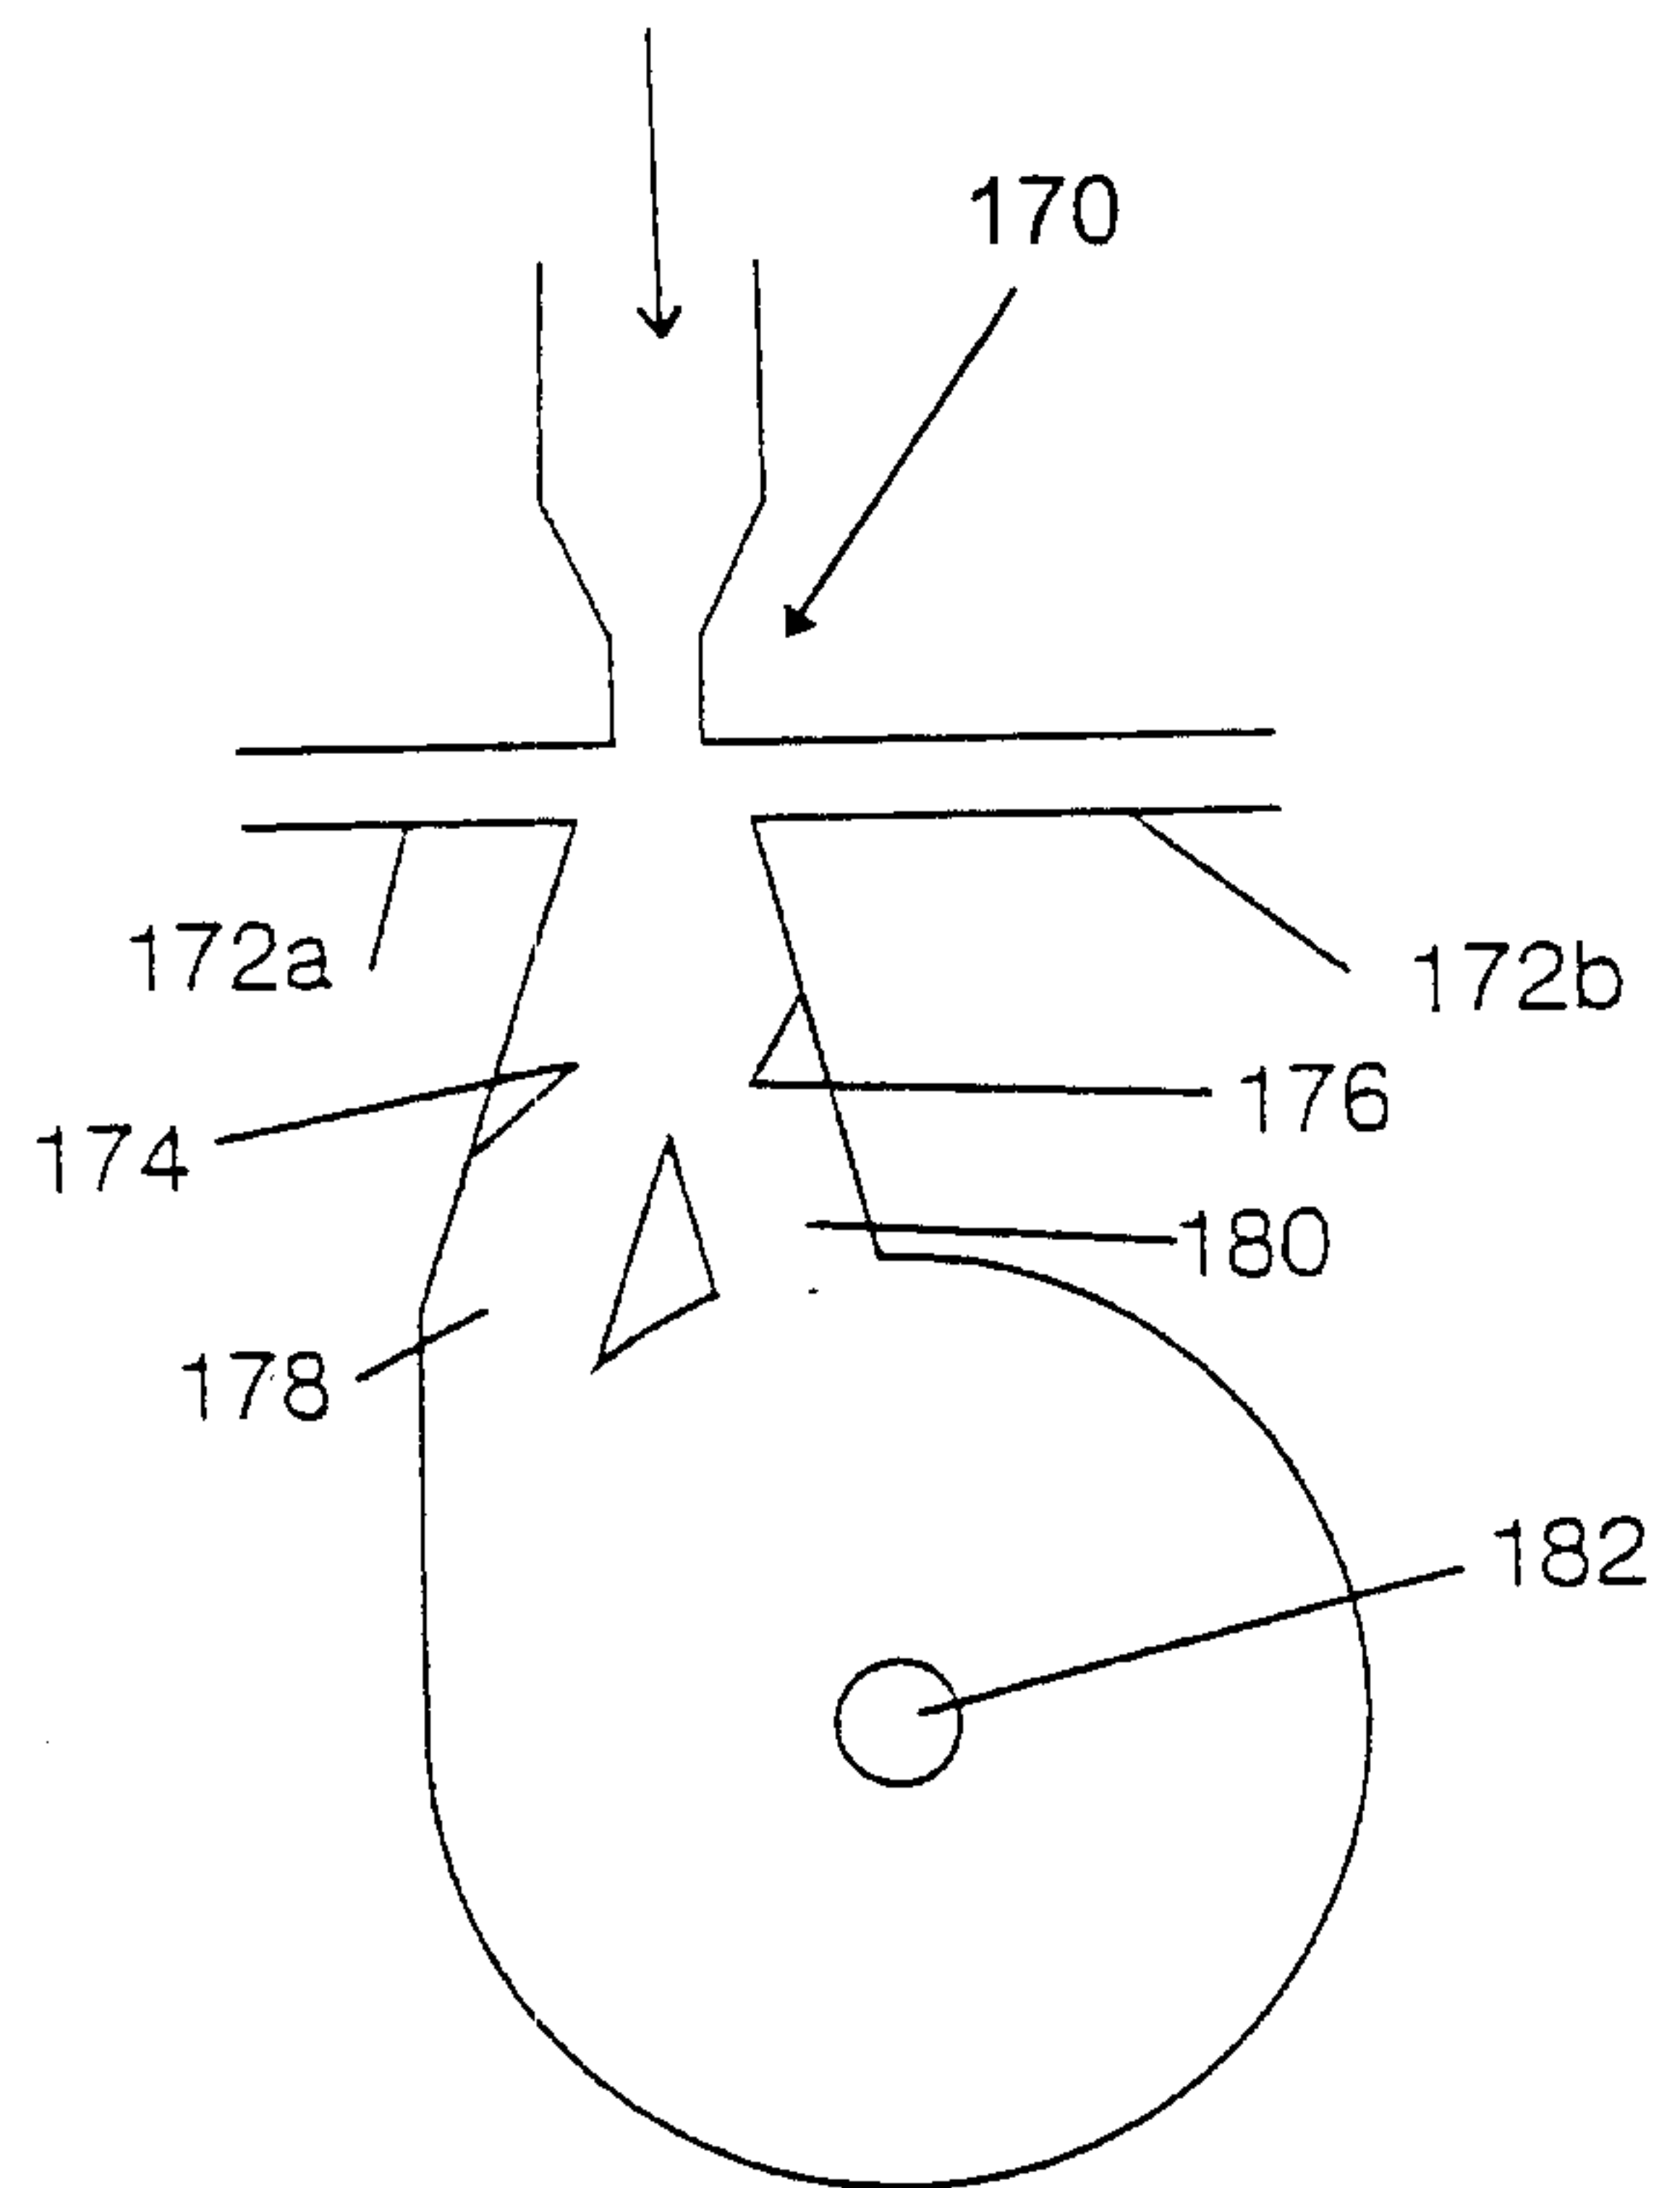


Fig. 13

7/13

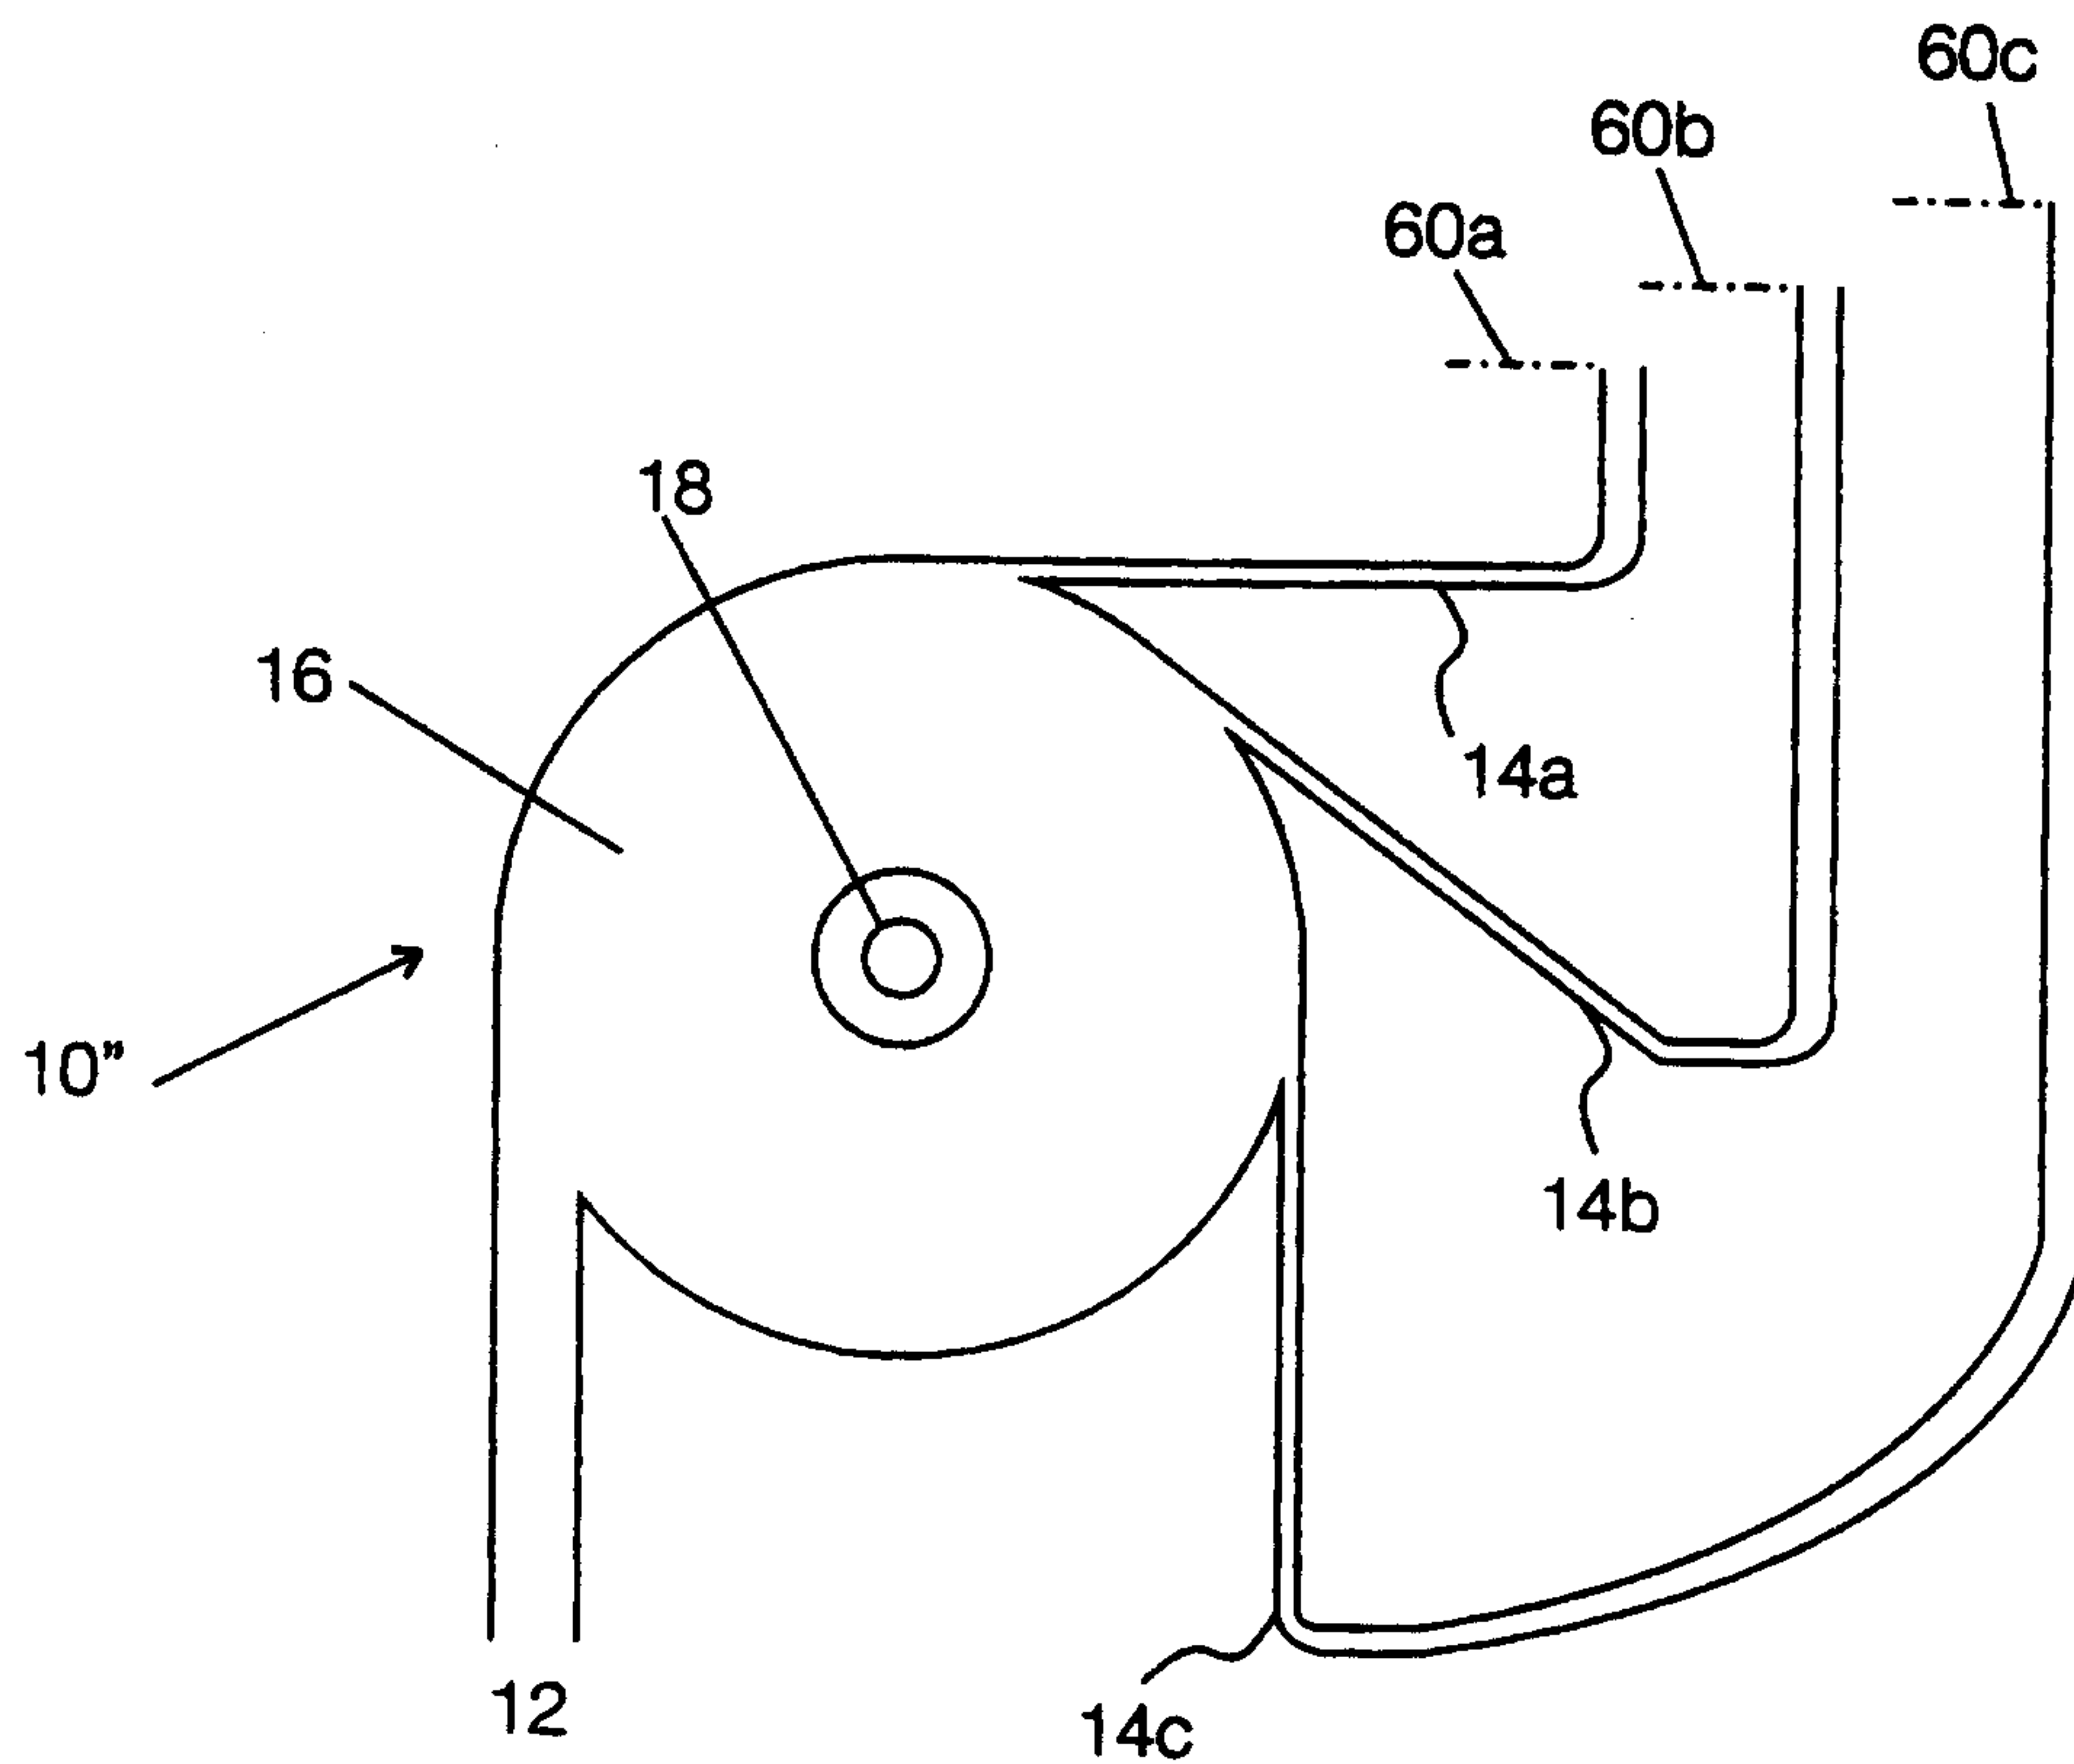


Fig. 14

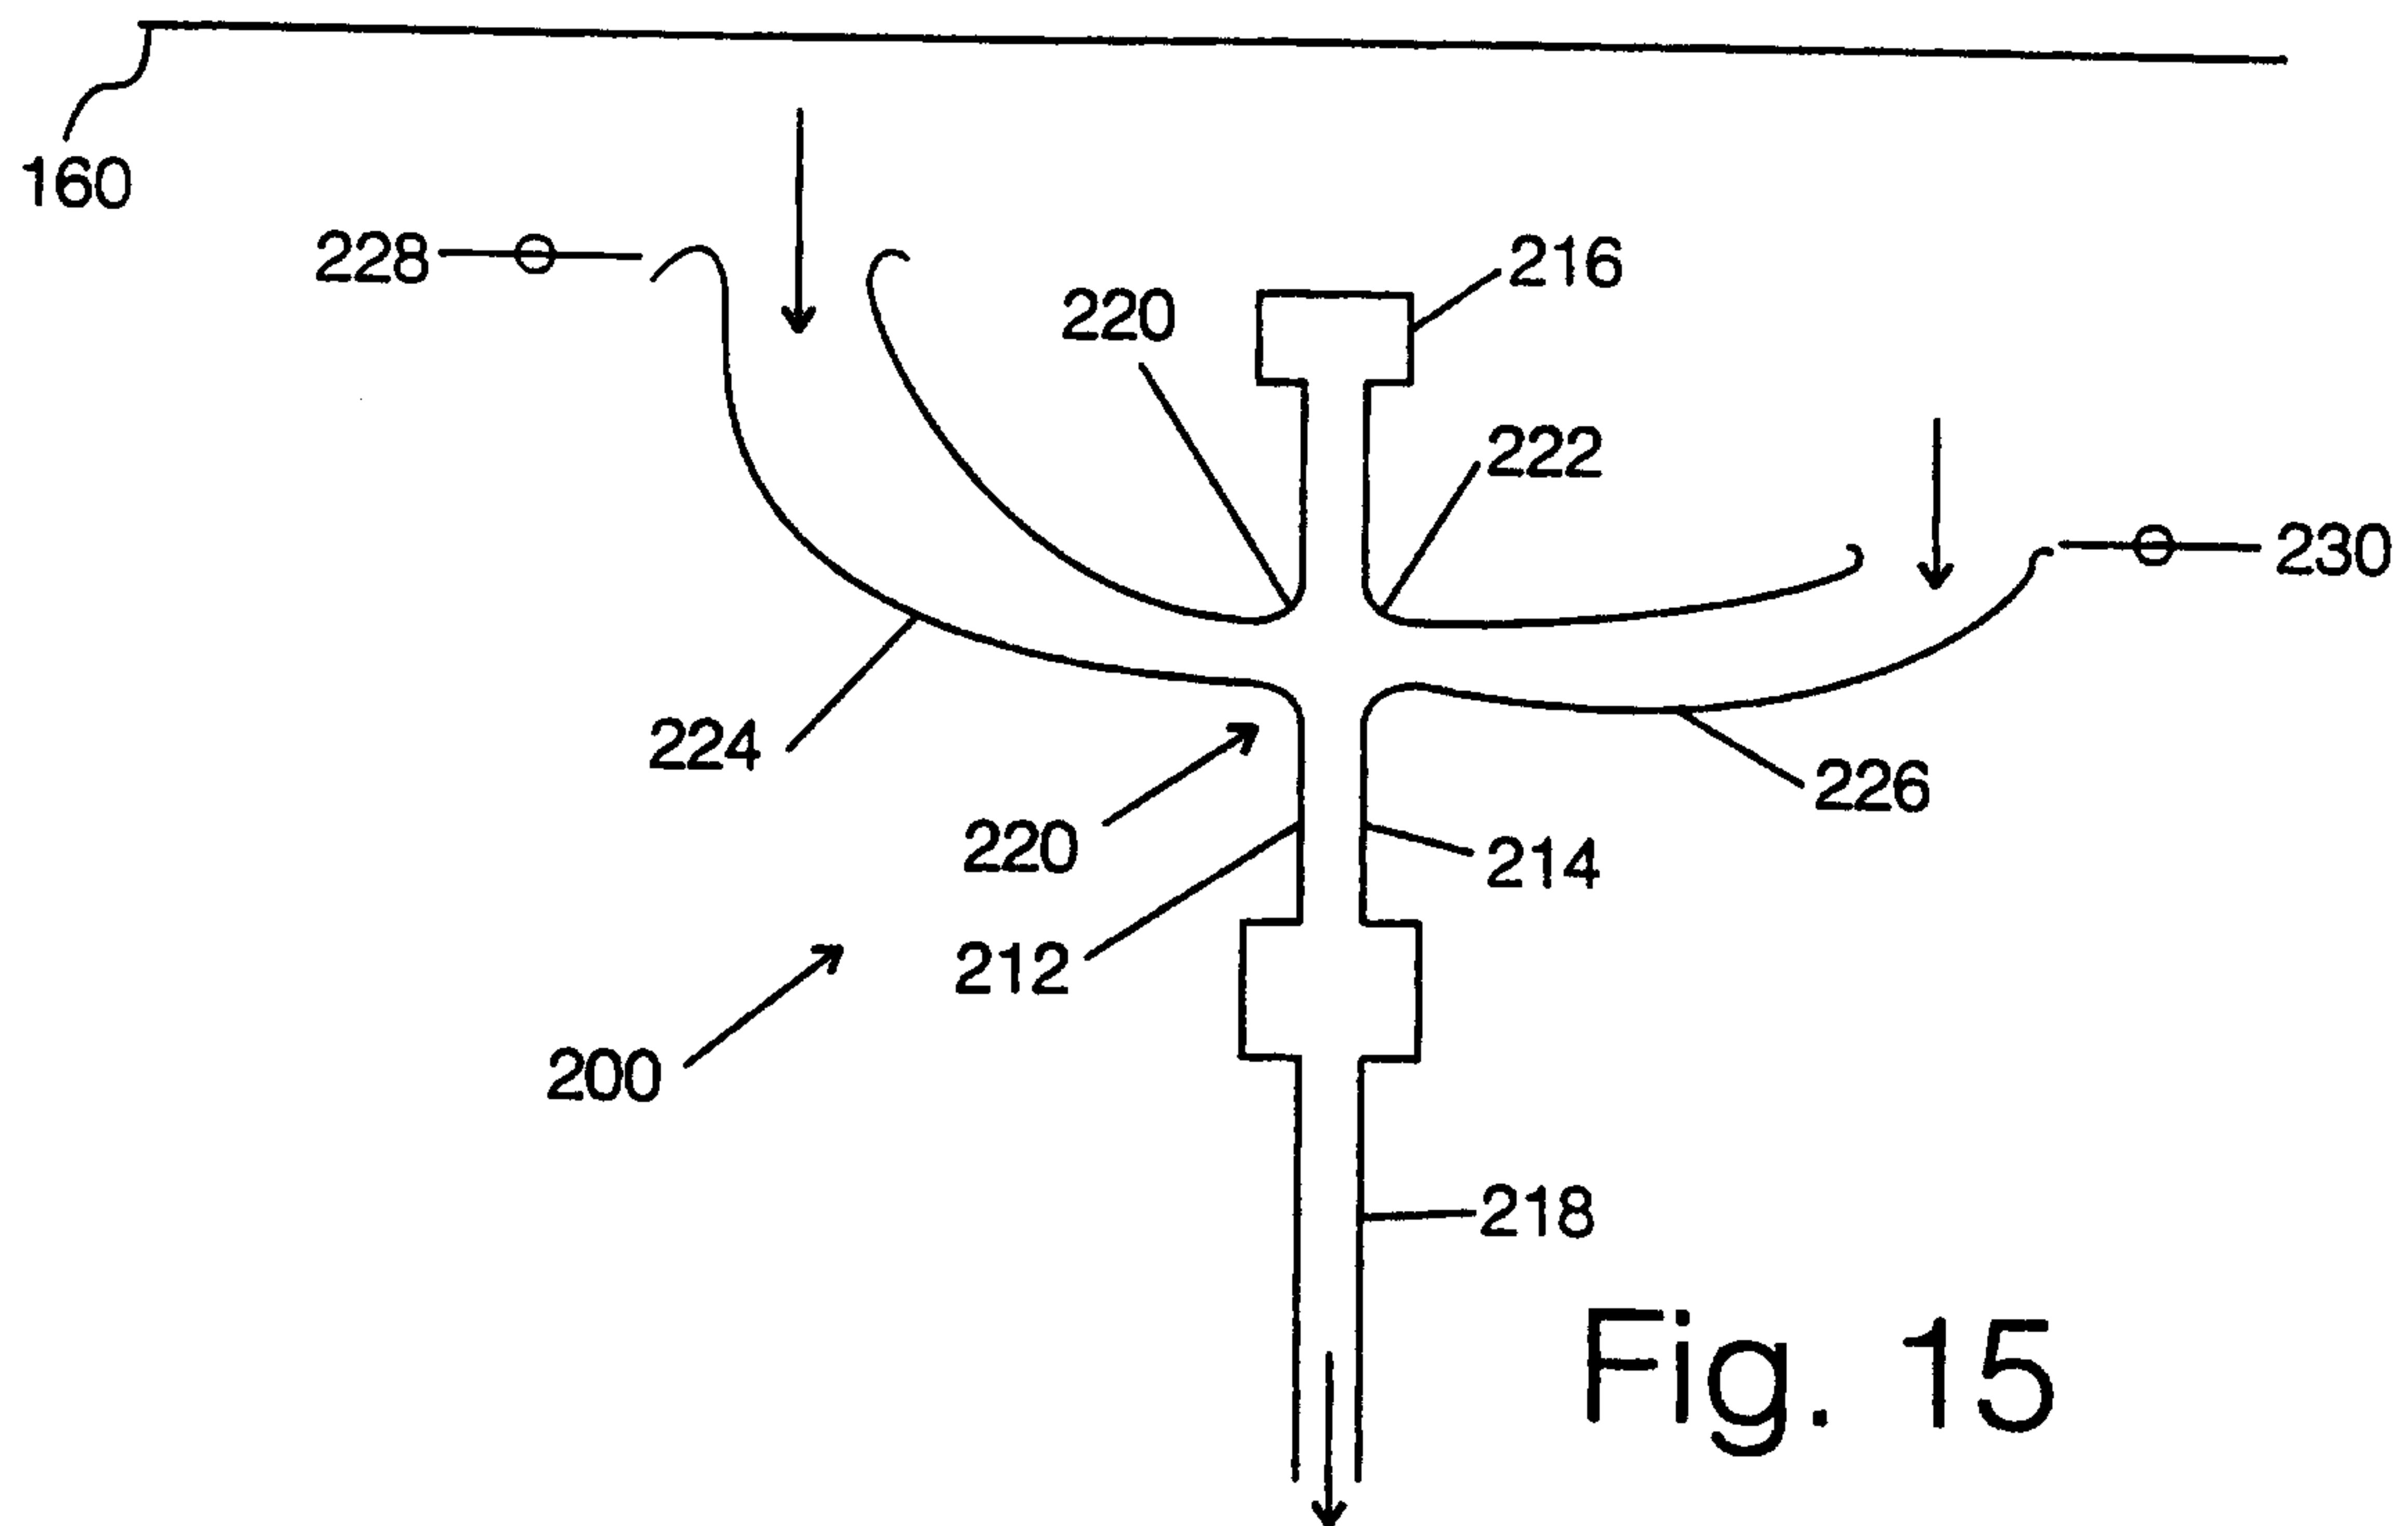


Fig. 15

9/13

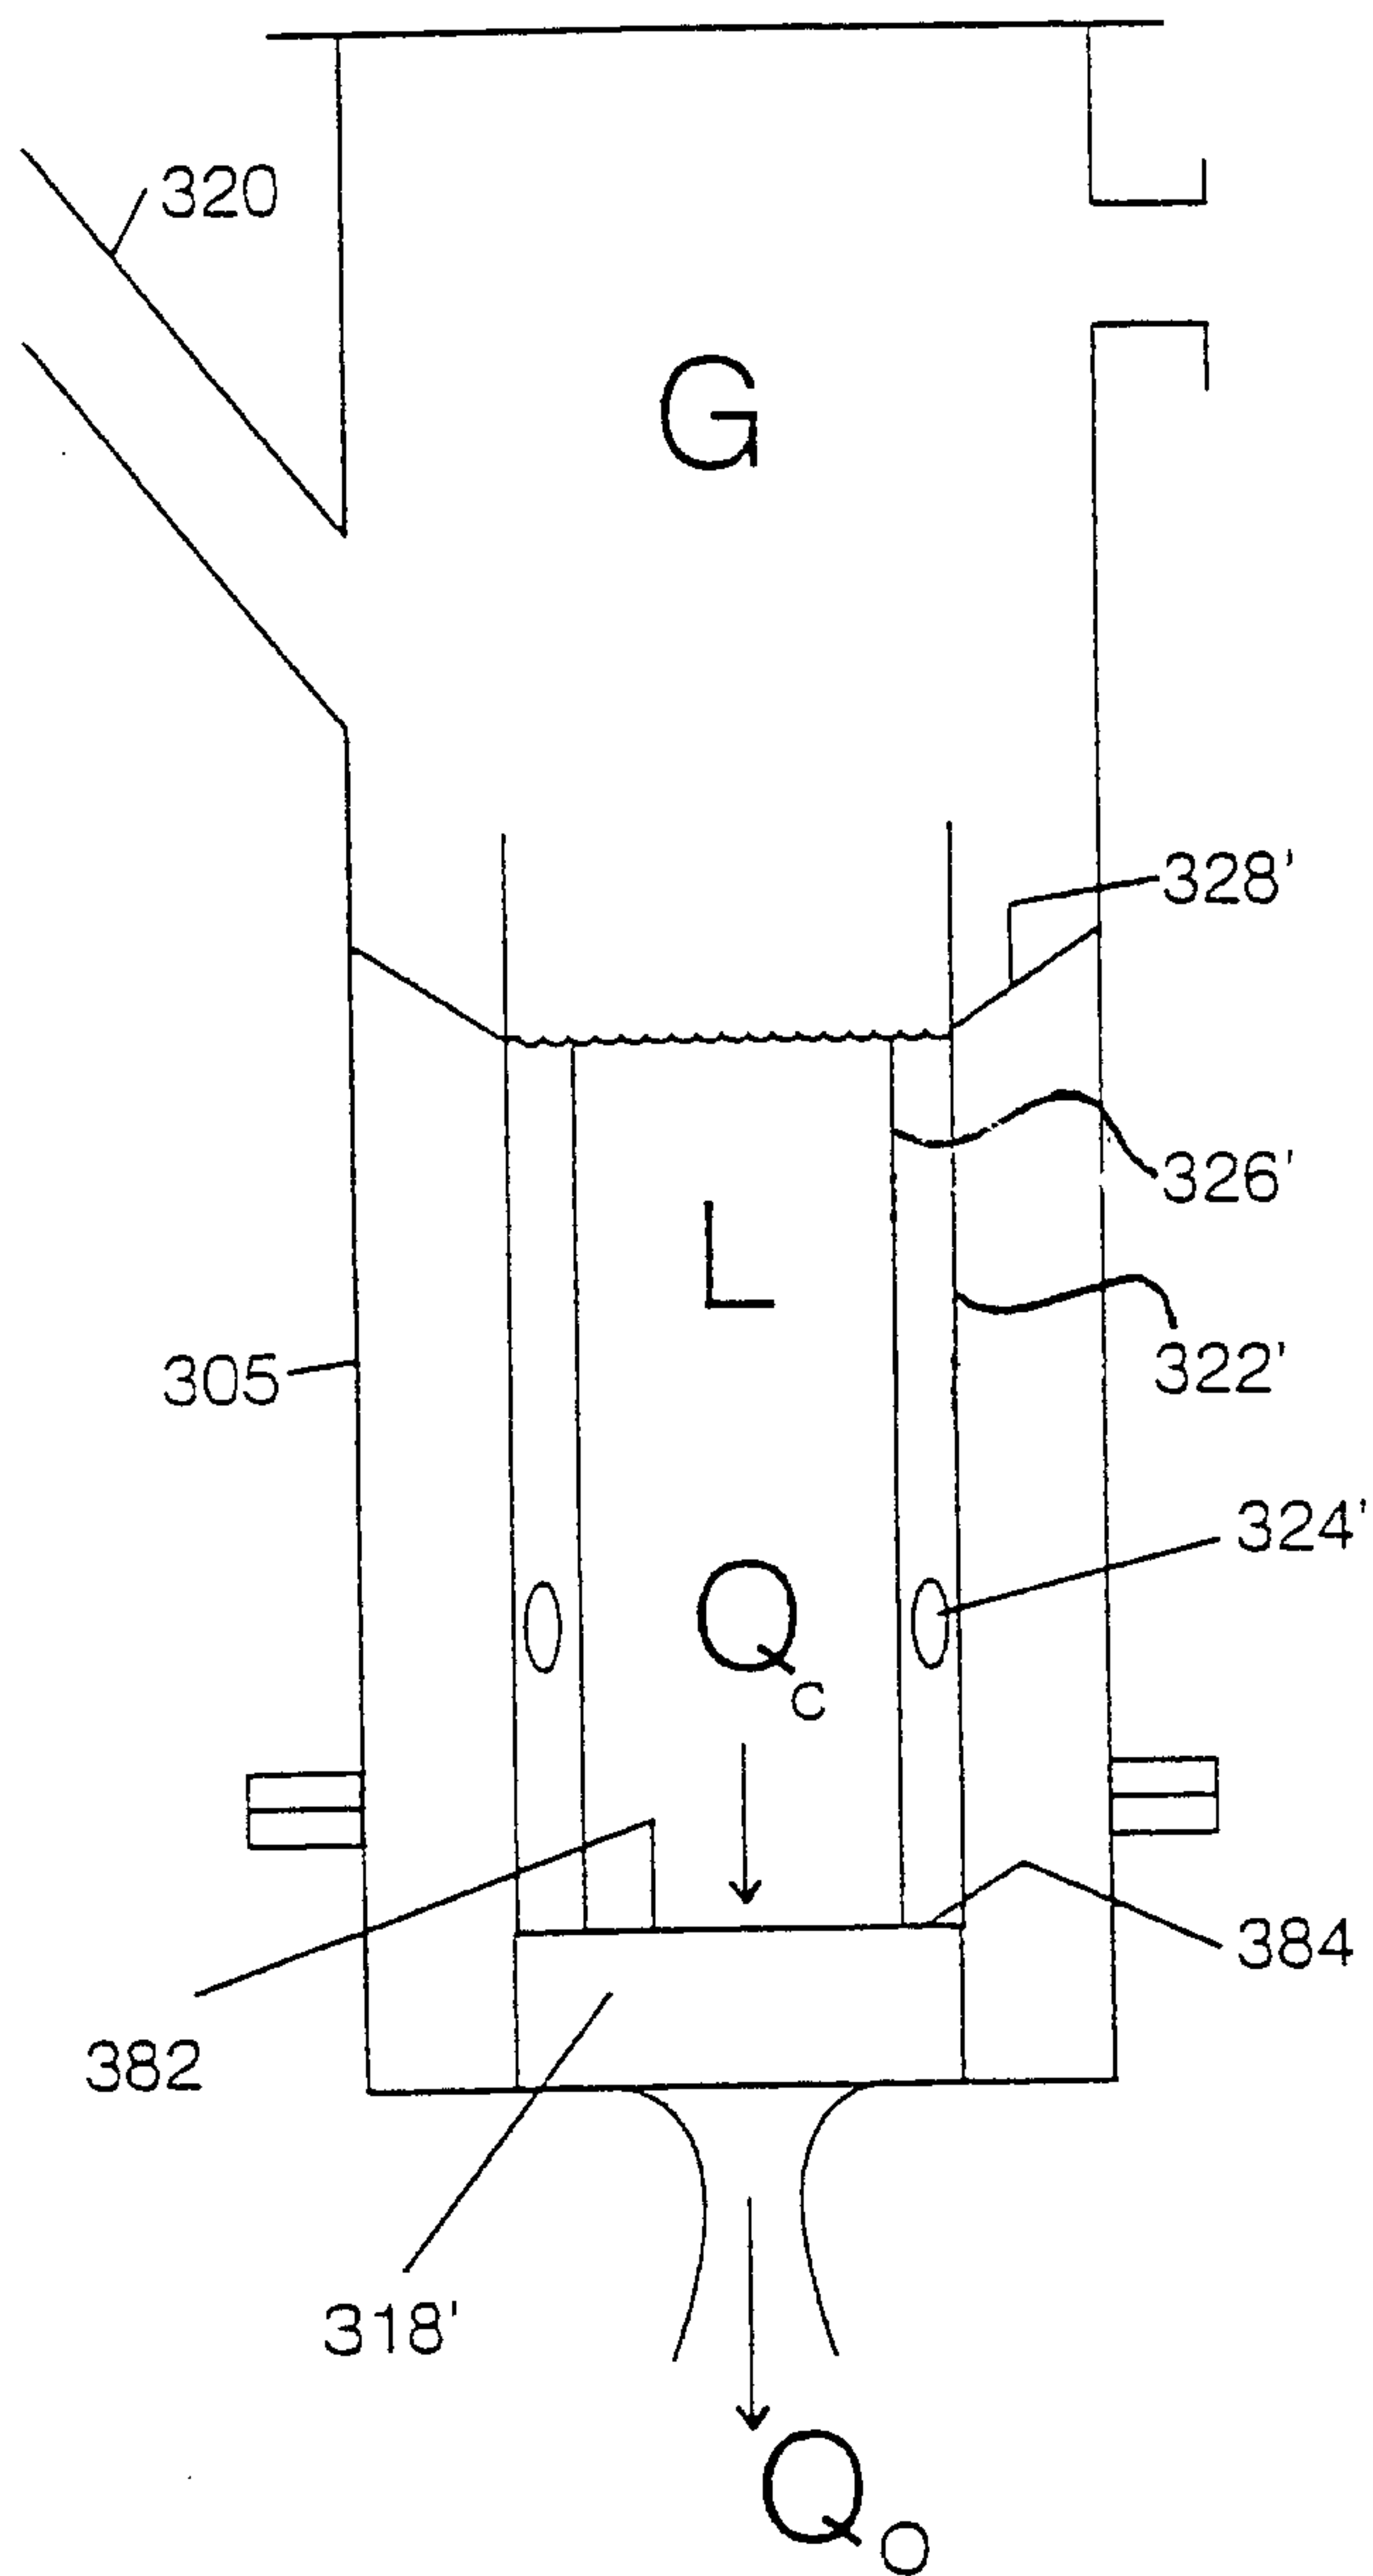


Fig. 17

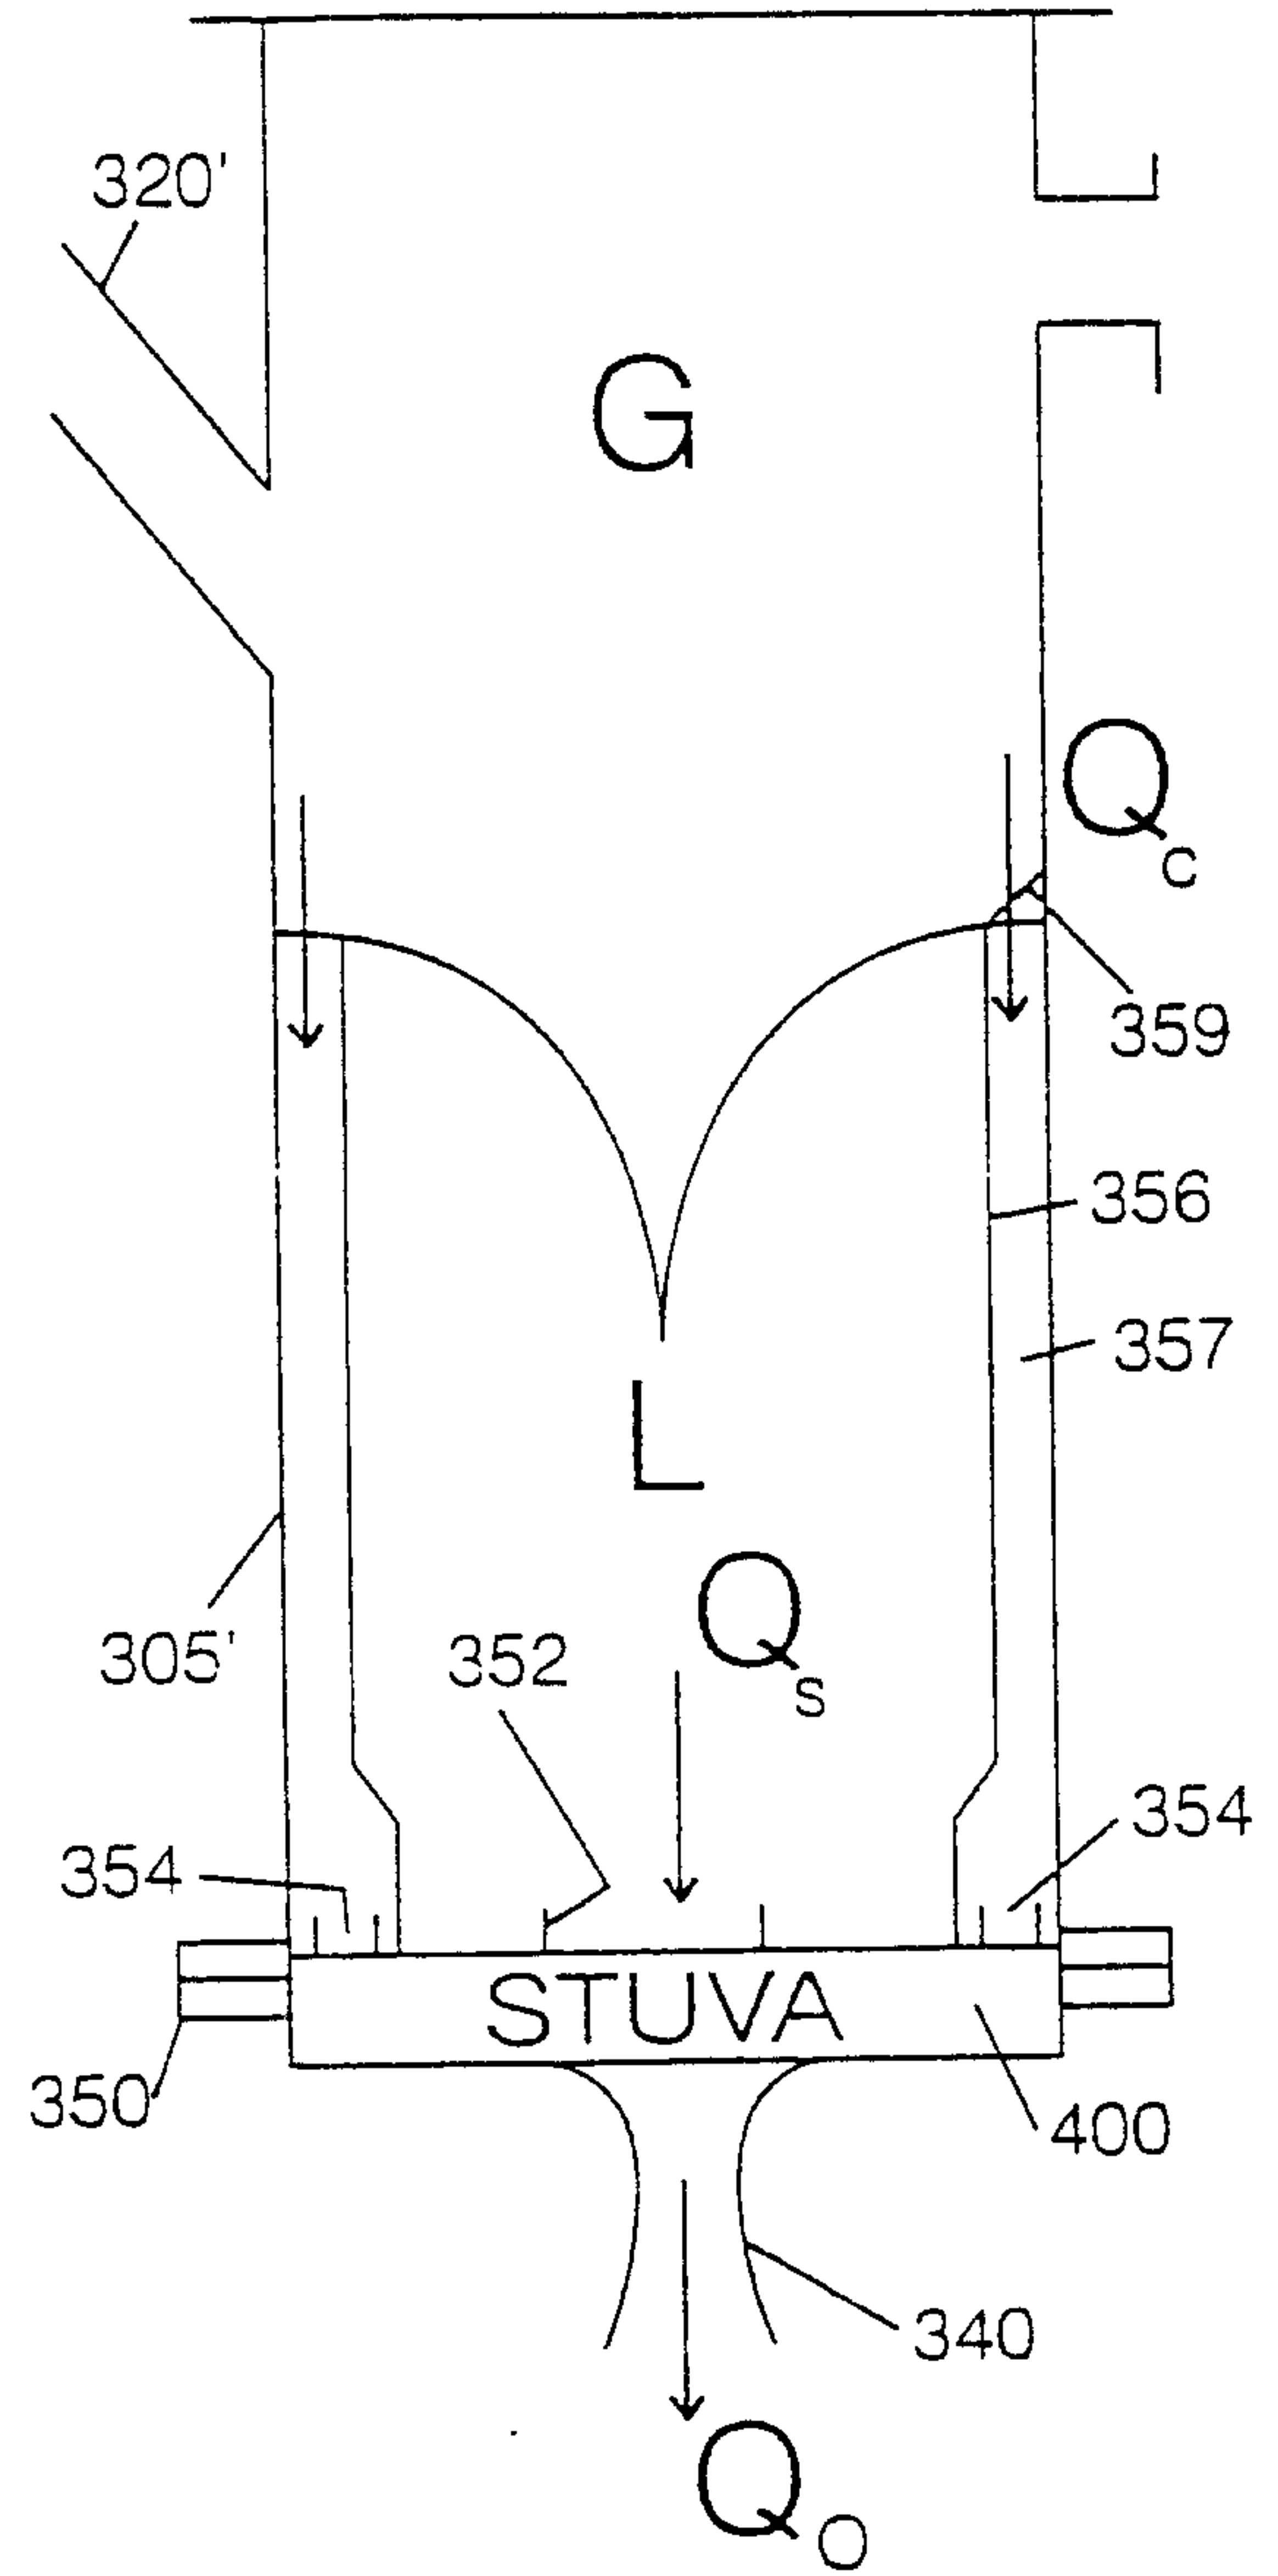


Fig. 18

10/13

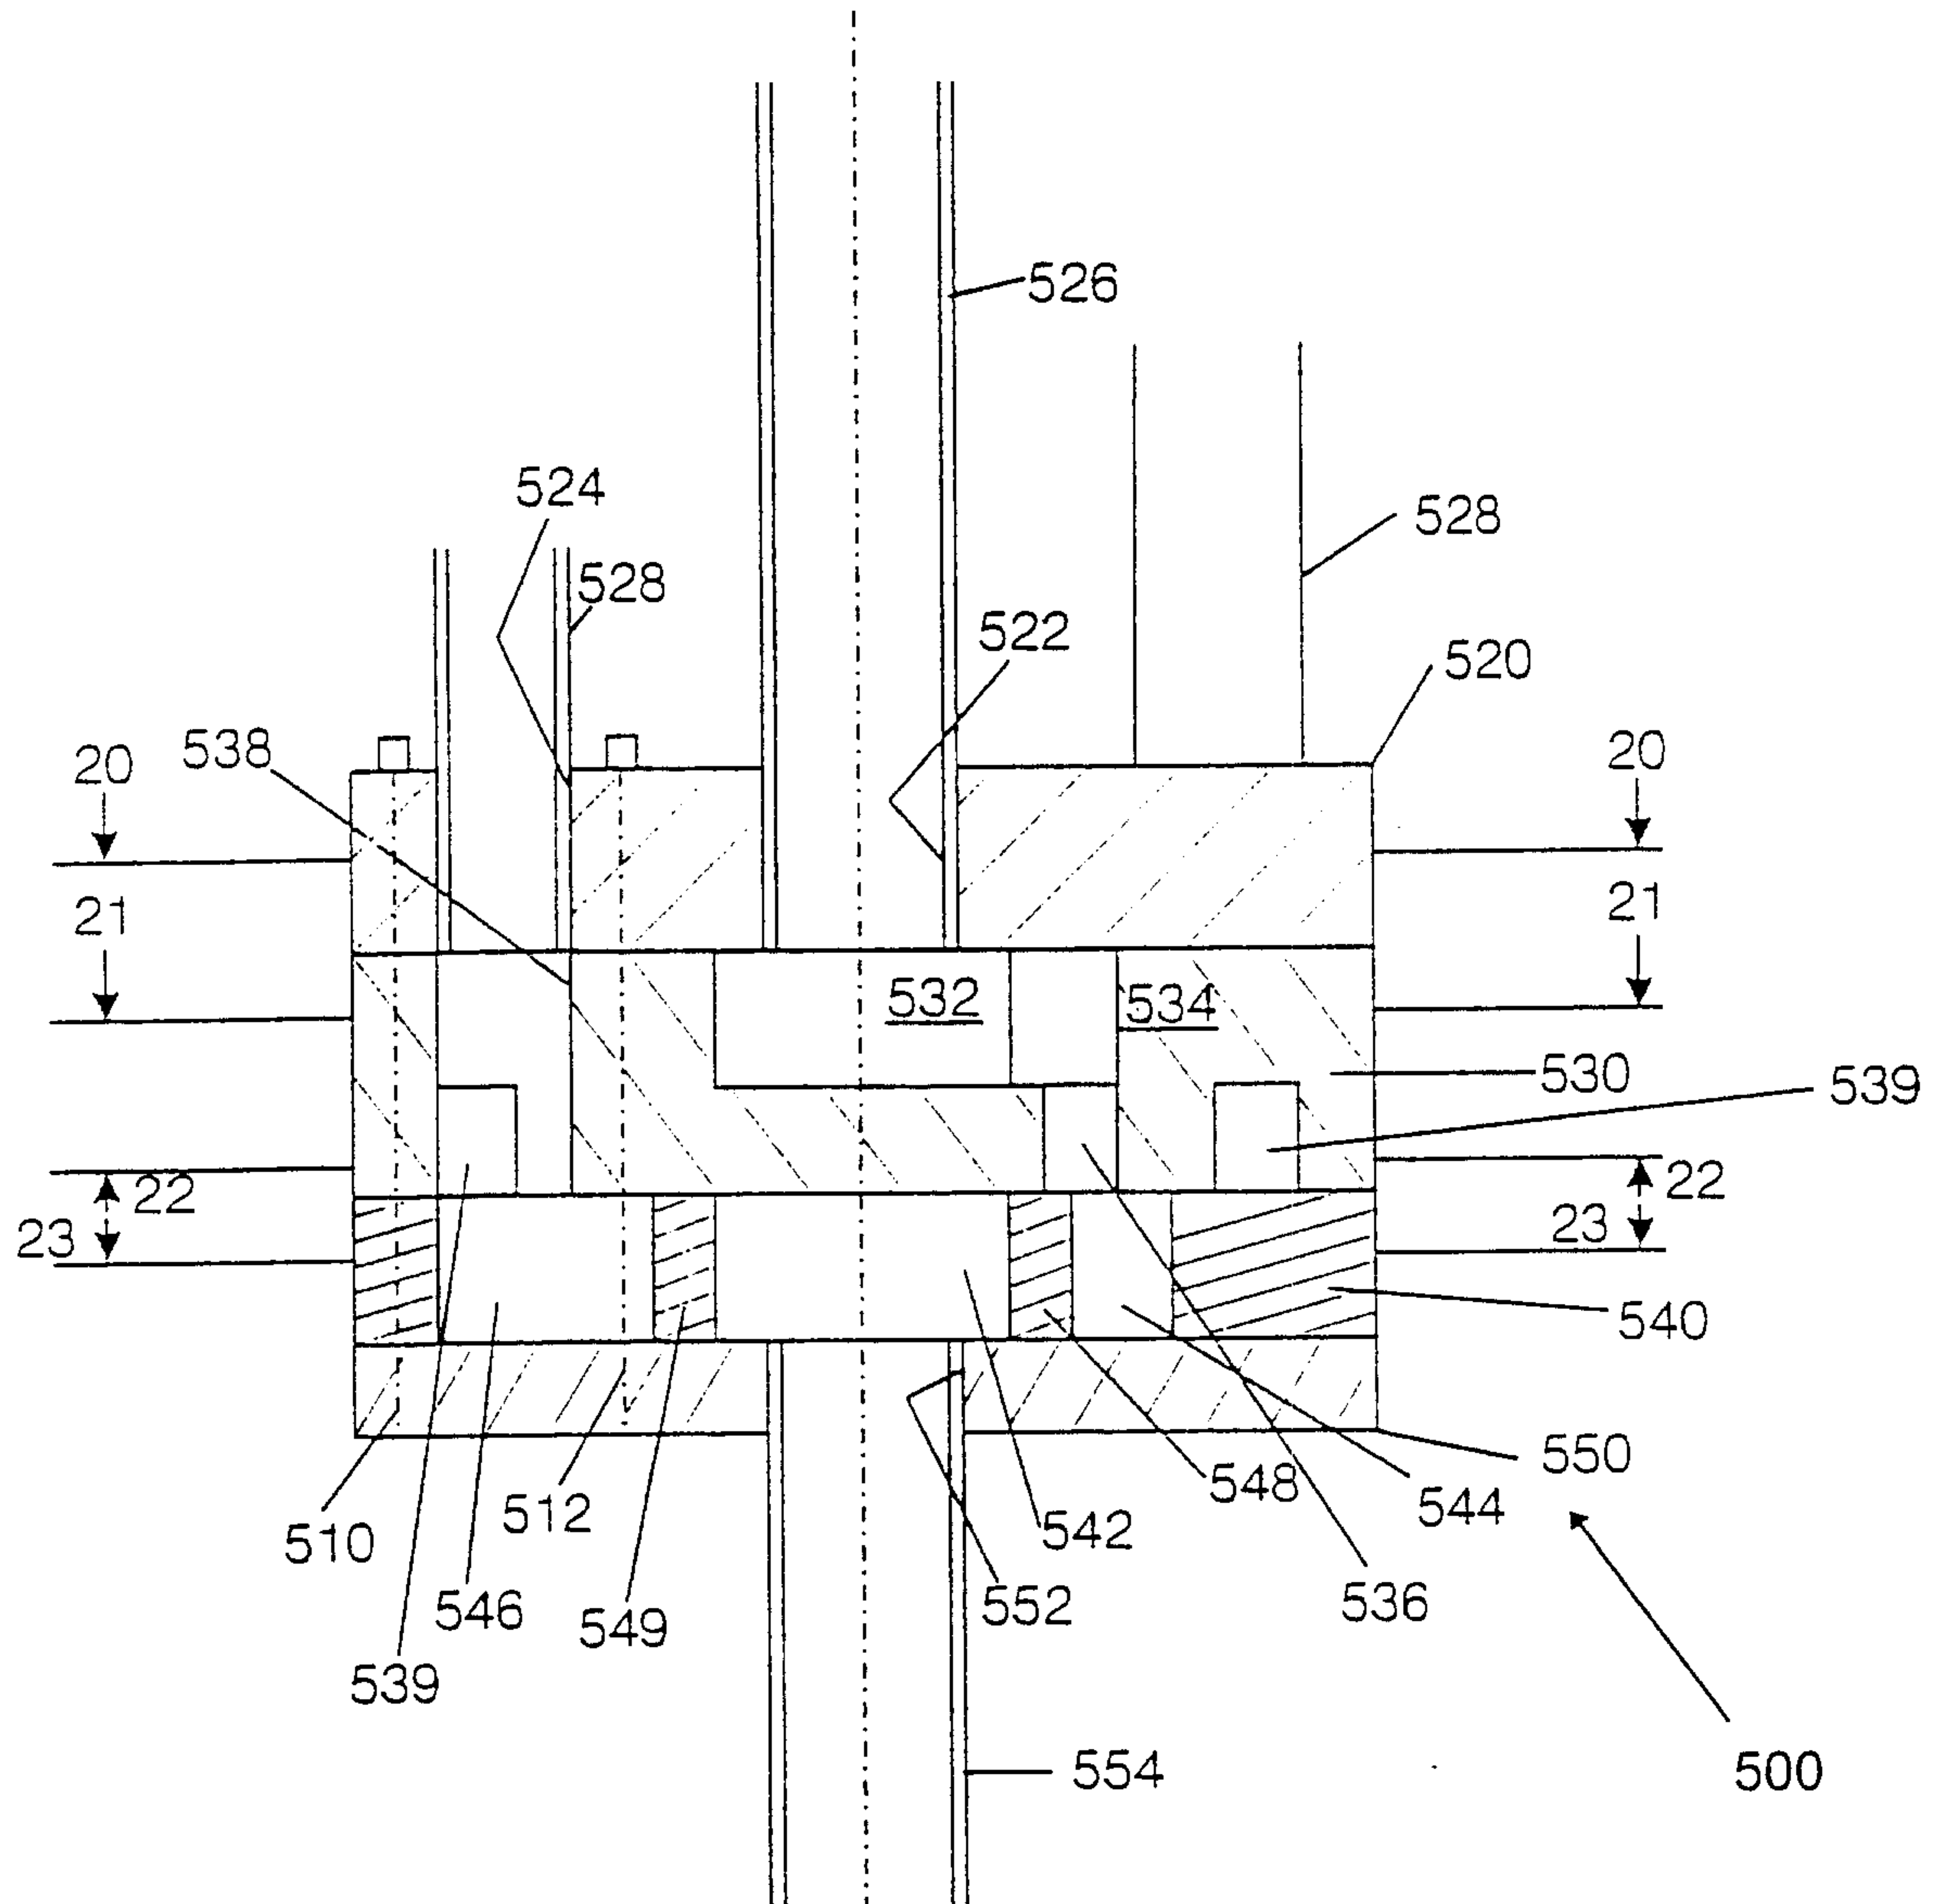


Fig. 19

11/13

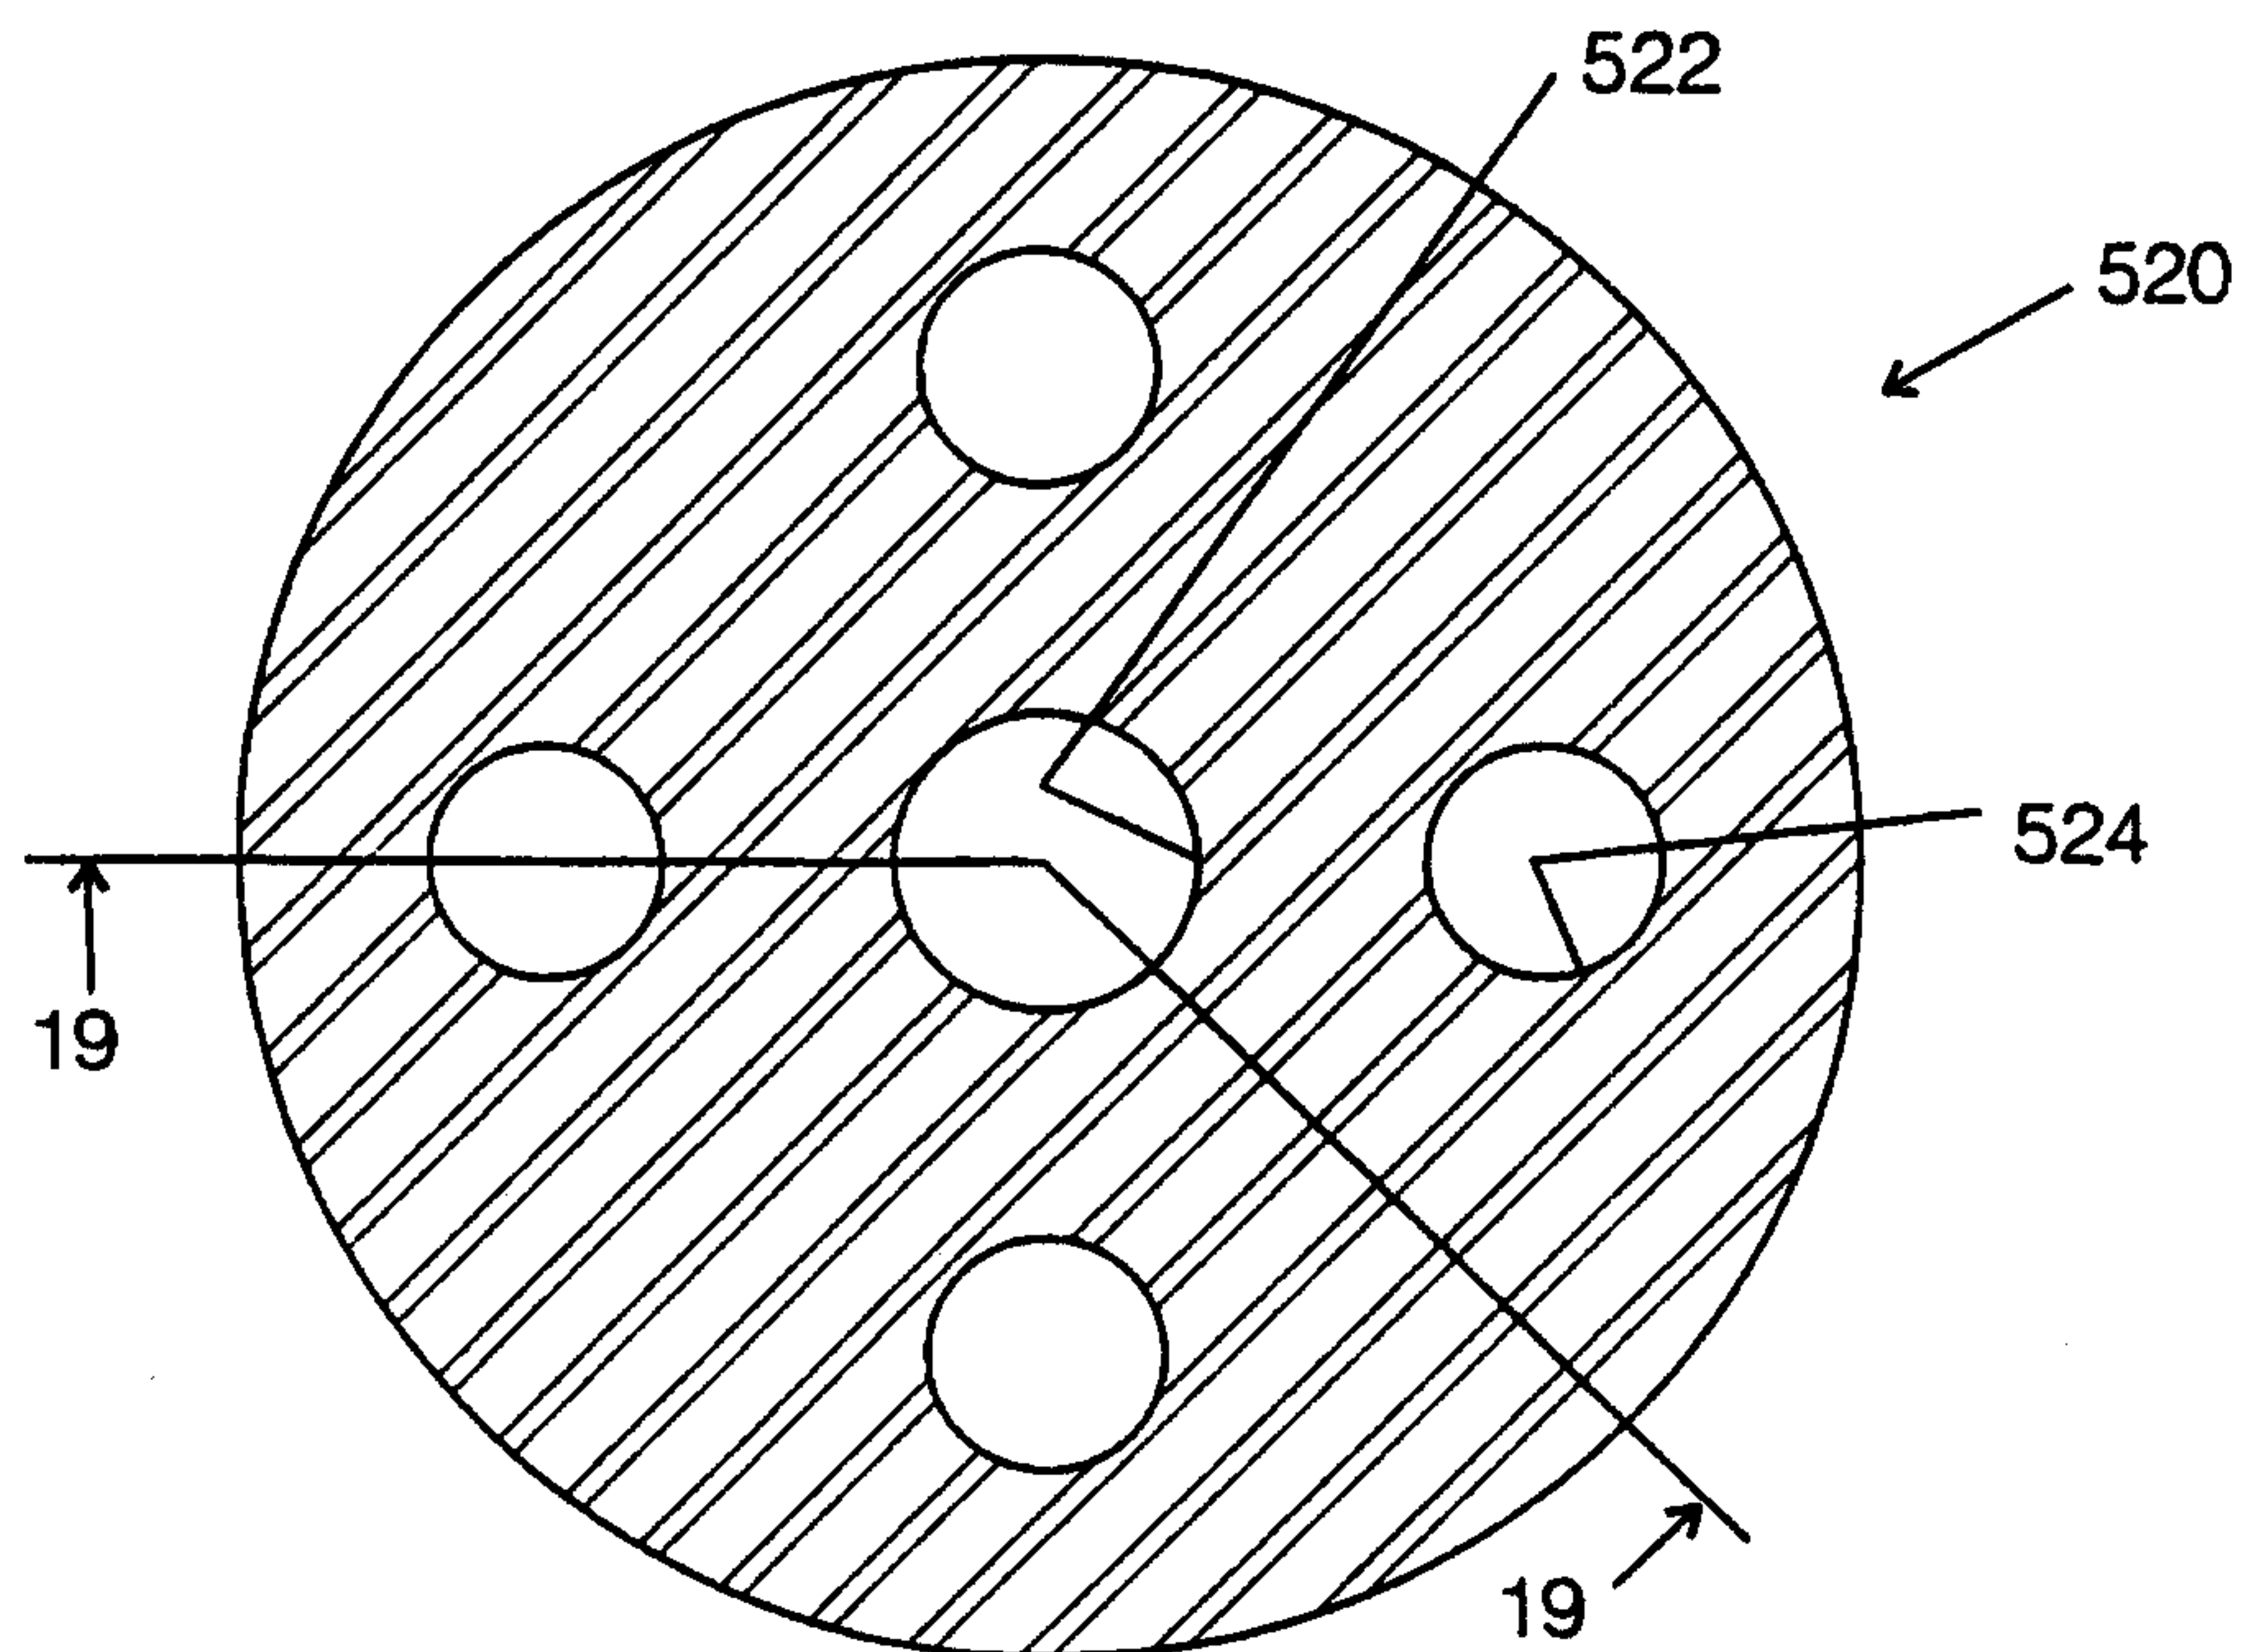


Fig. 20

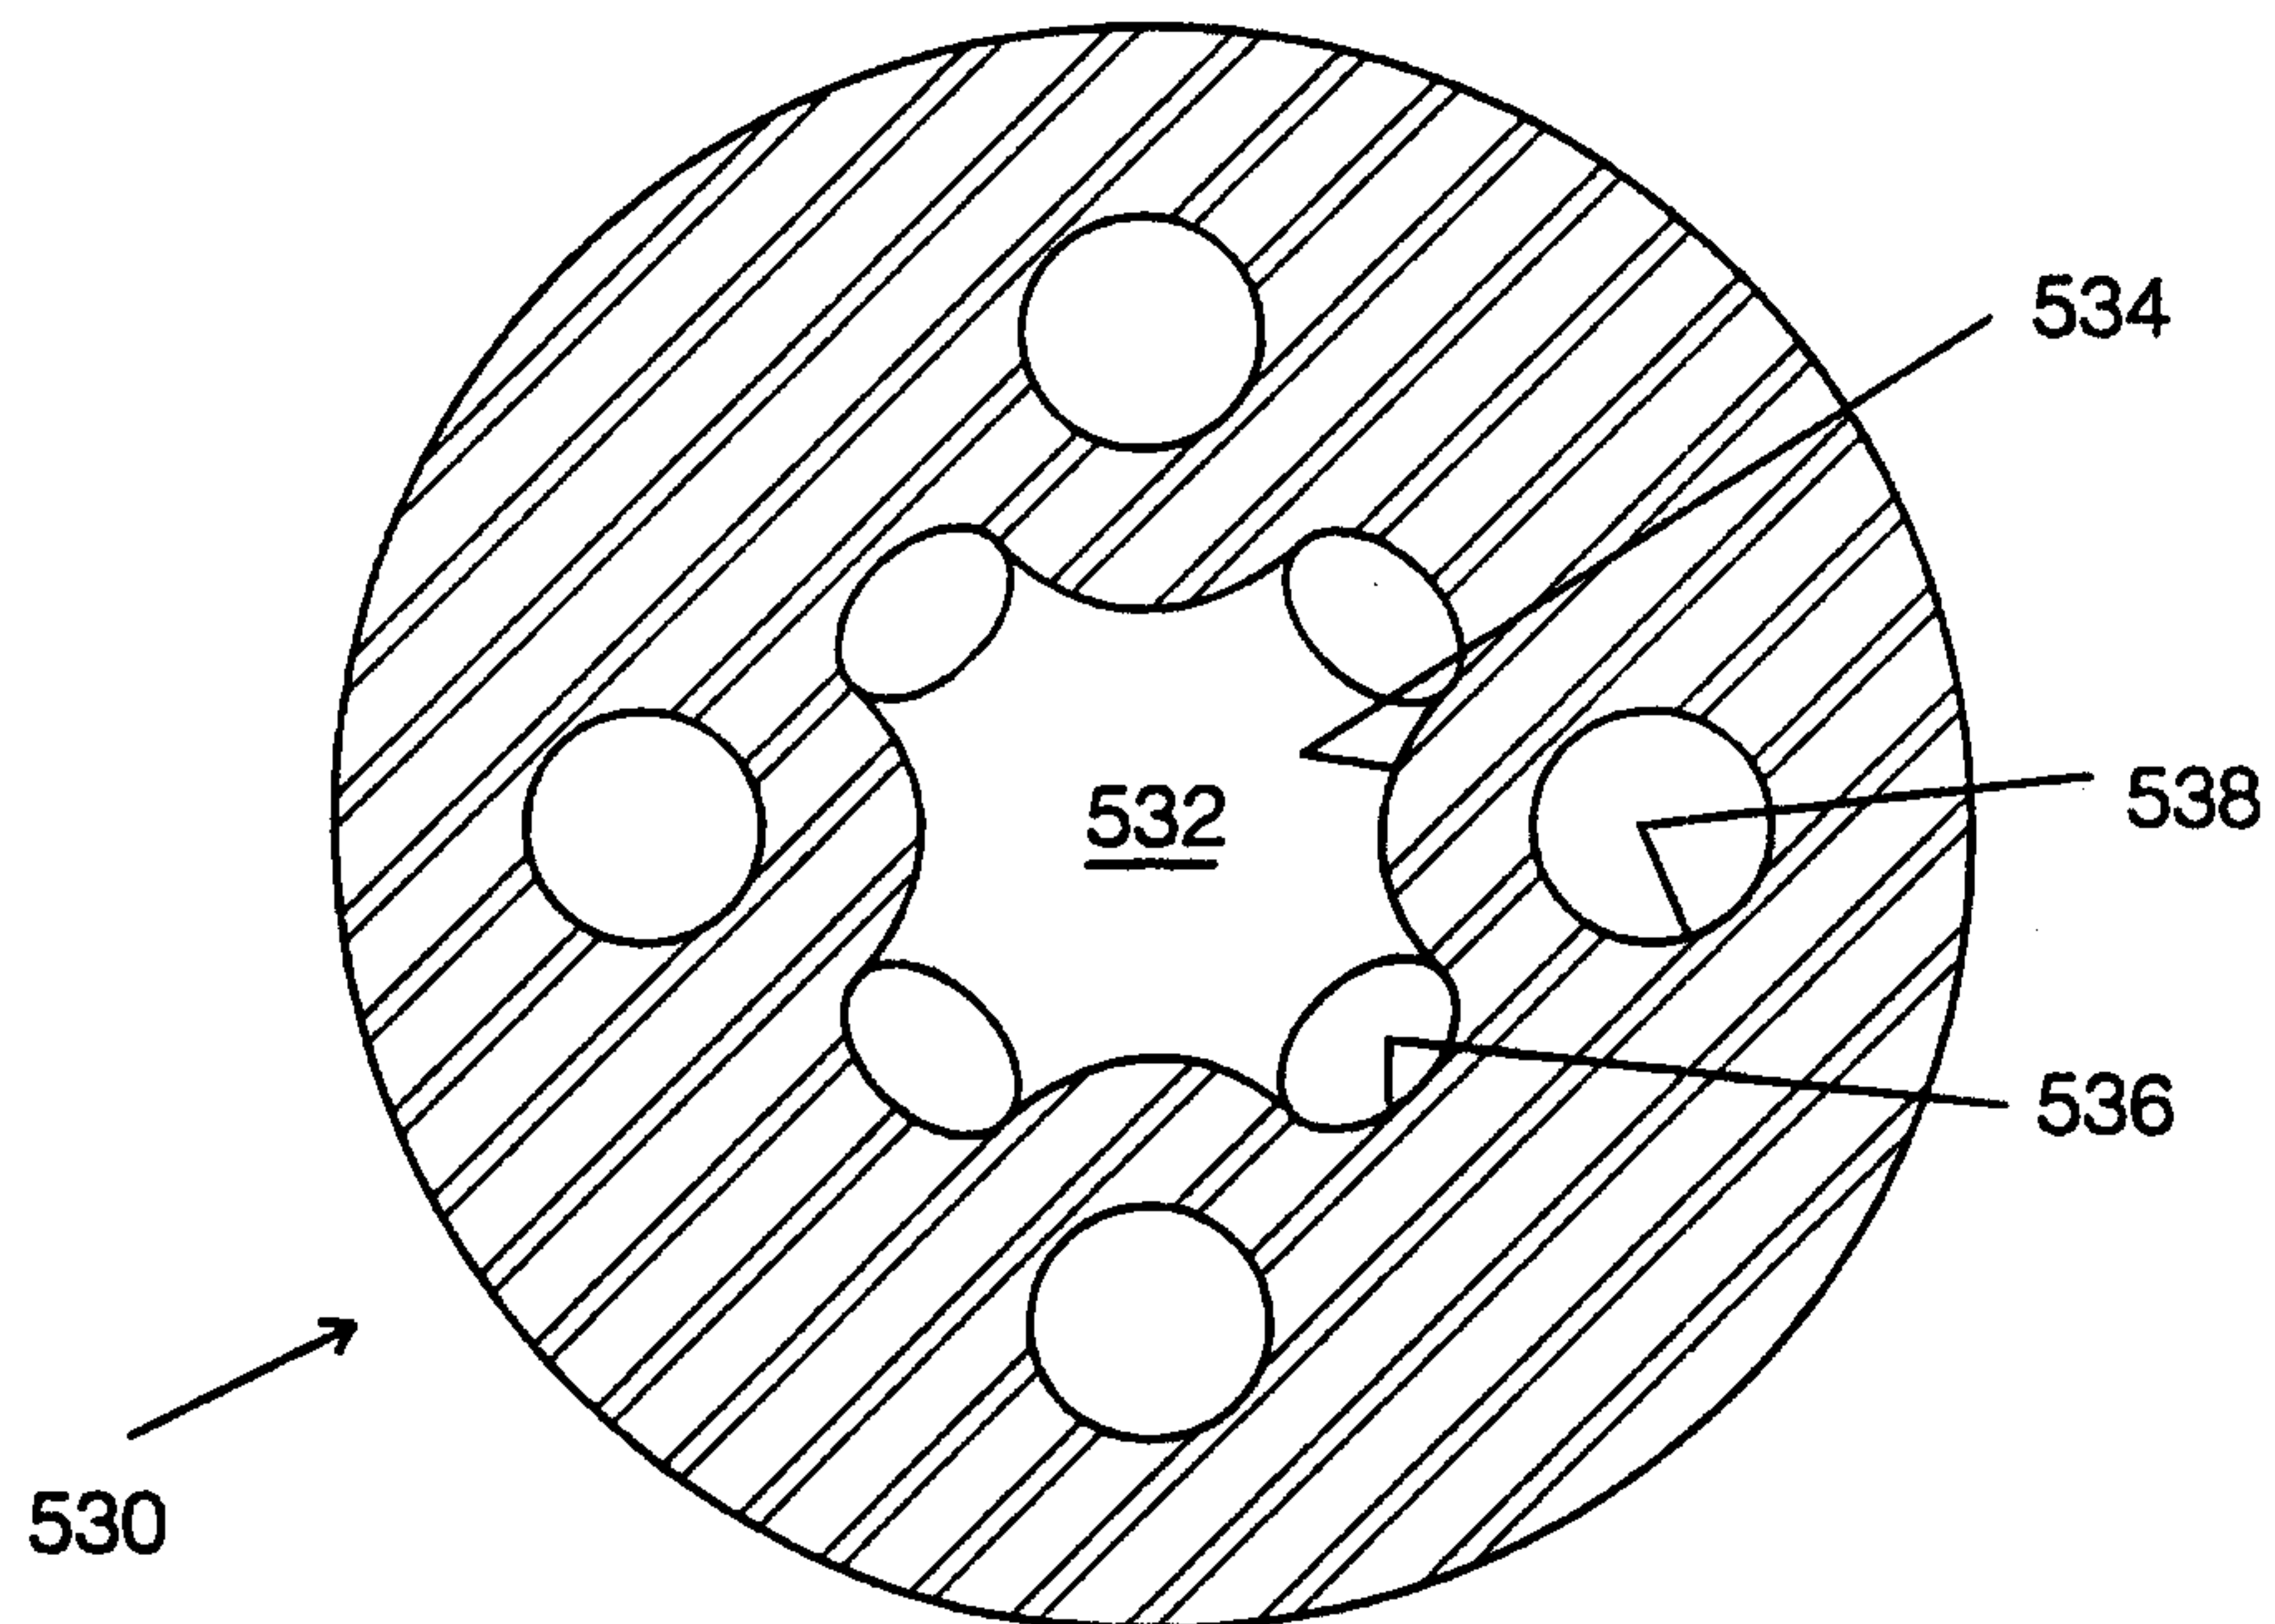


Fig. 21

12/13

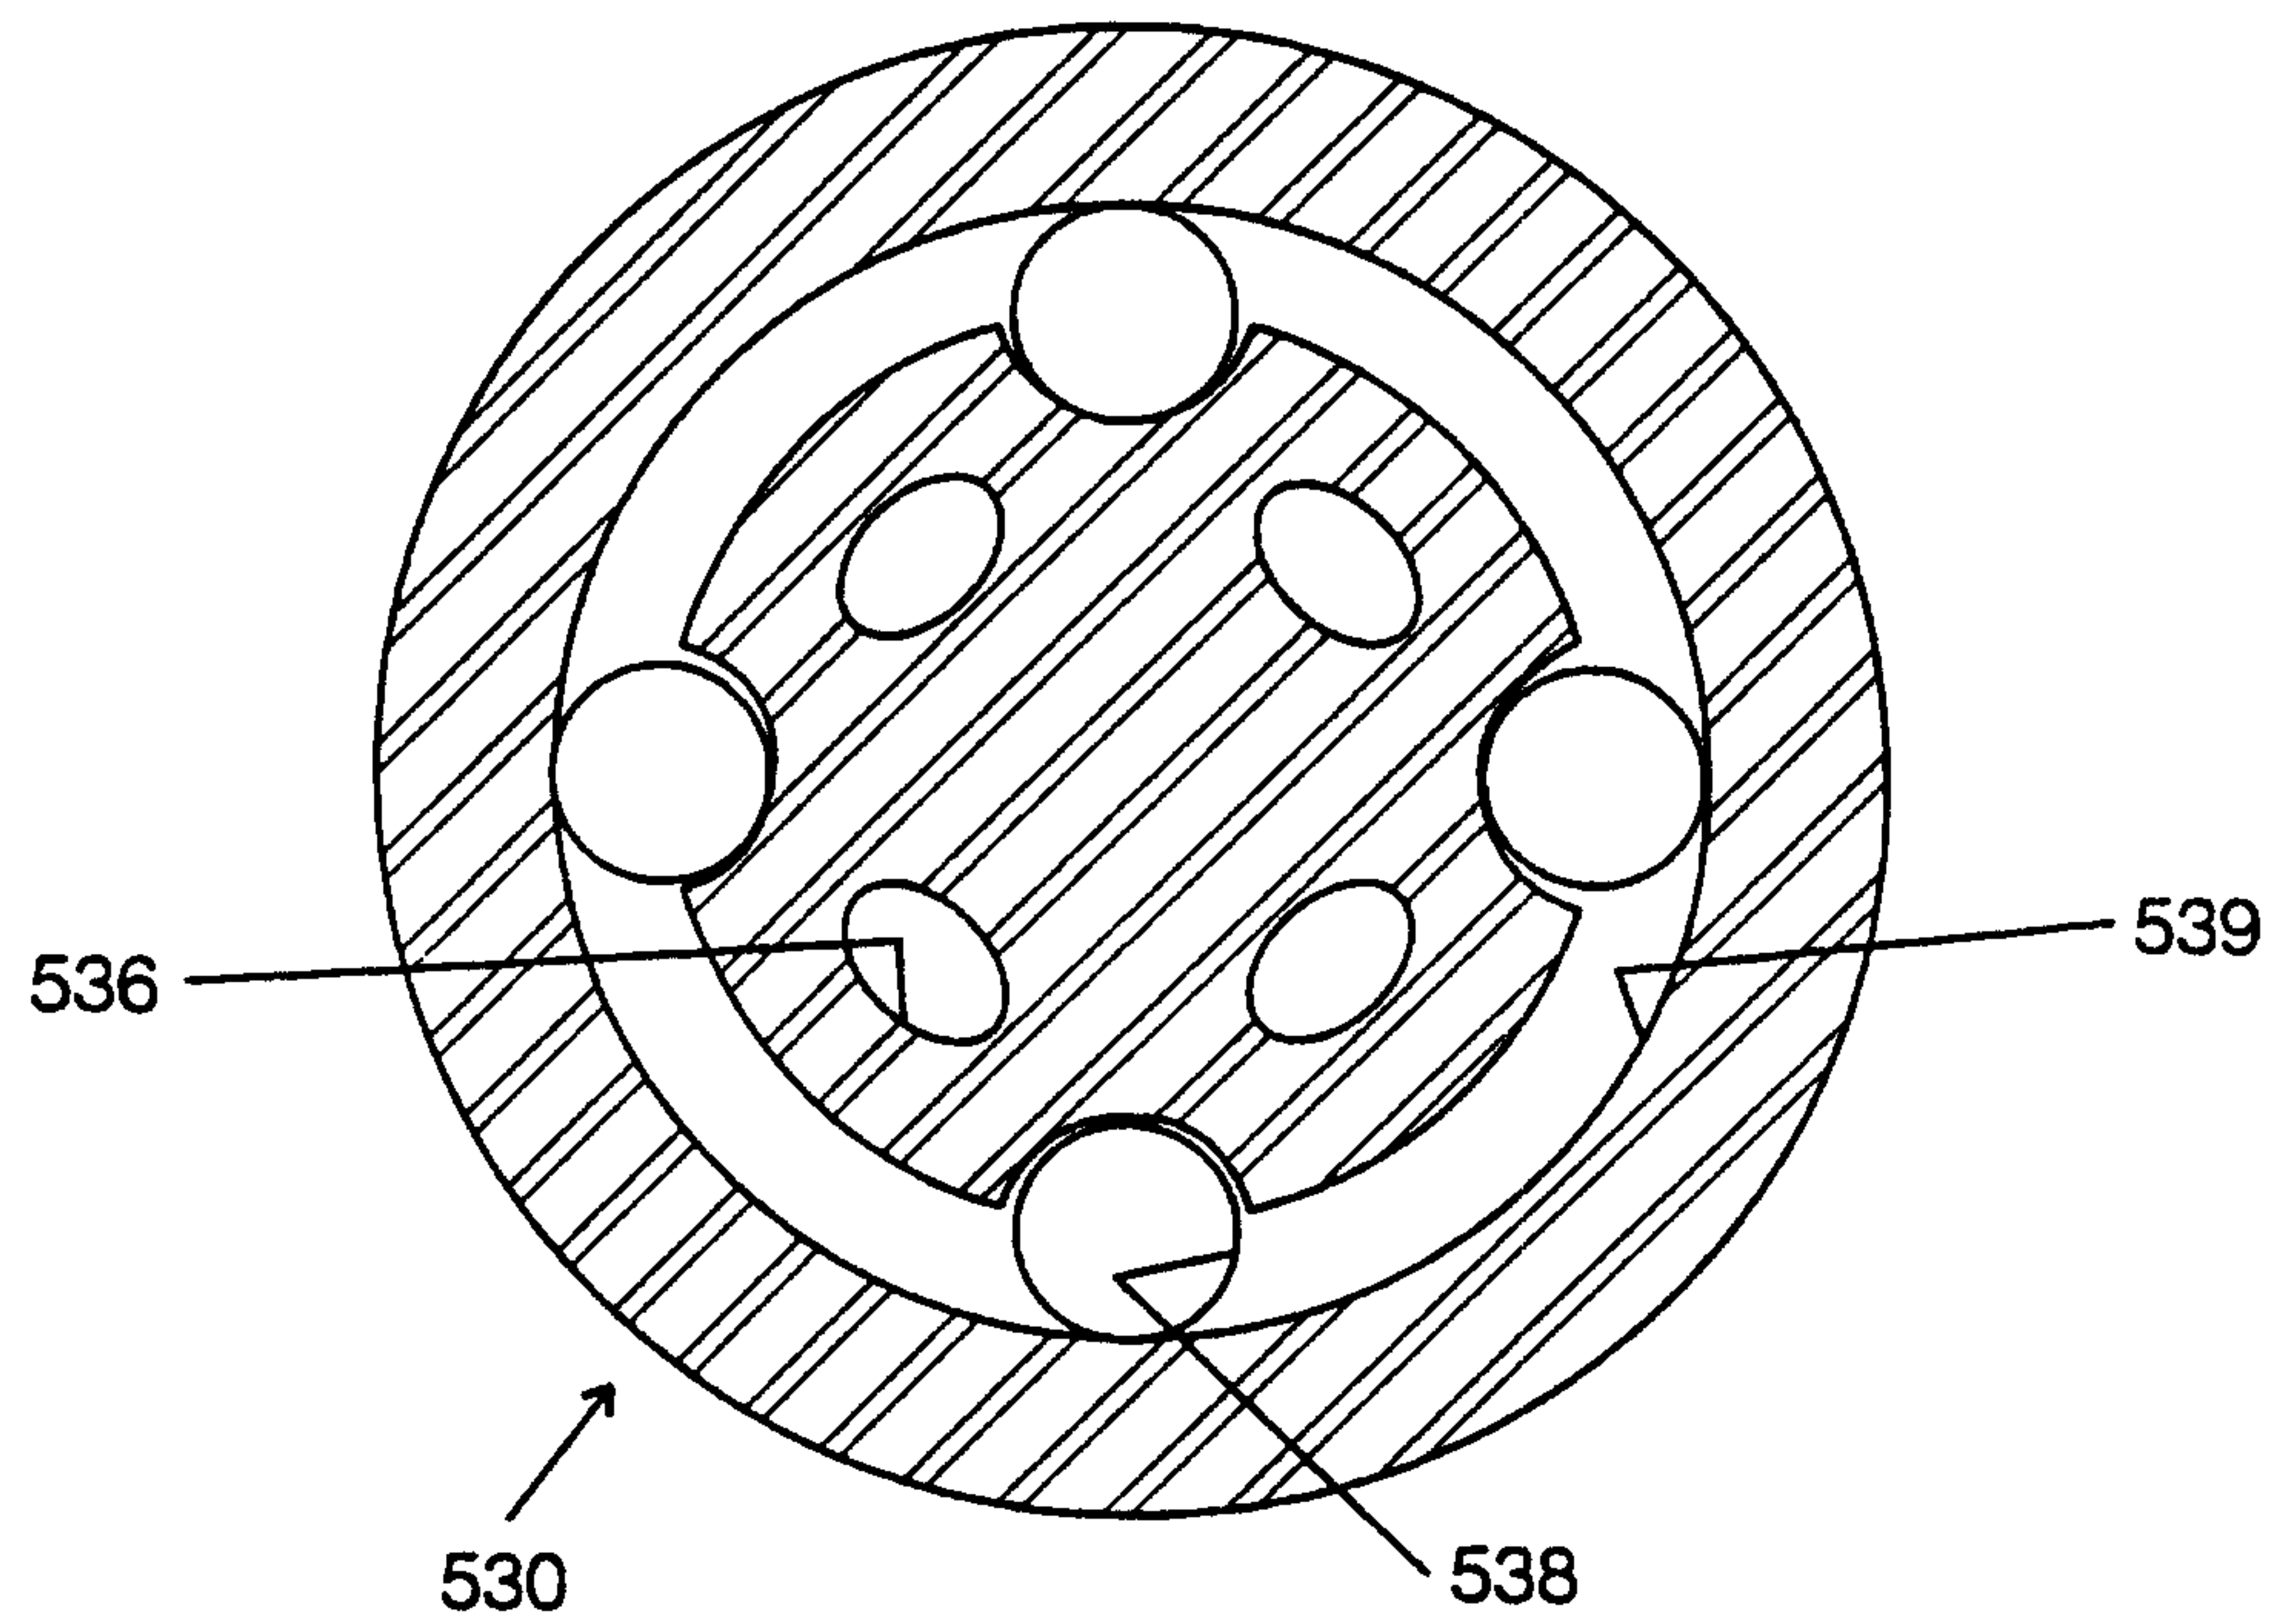


Fig. 22

13/13

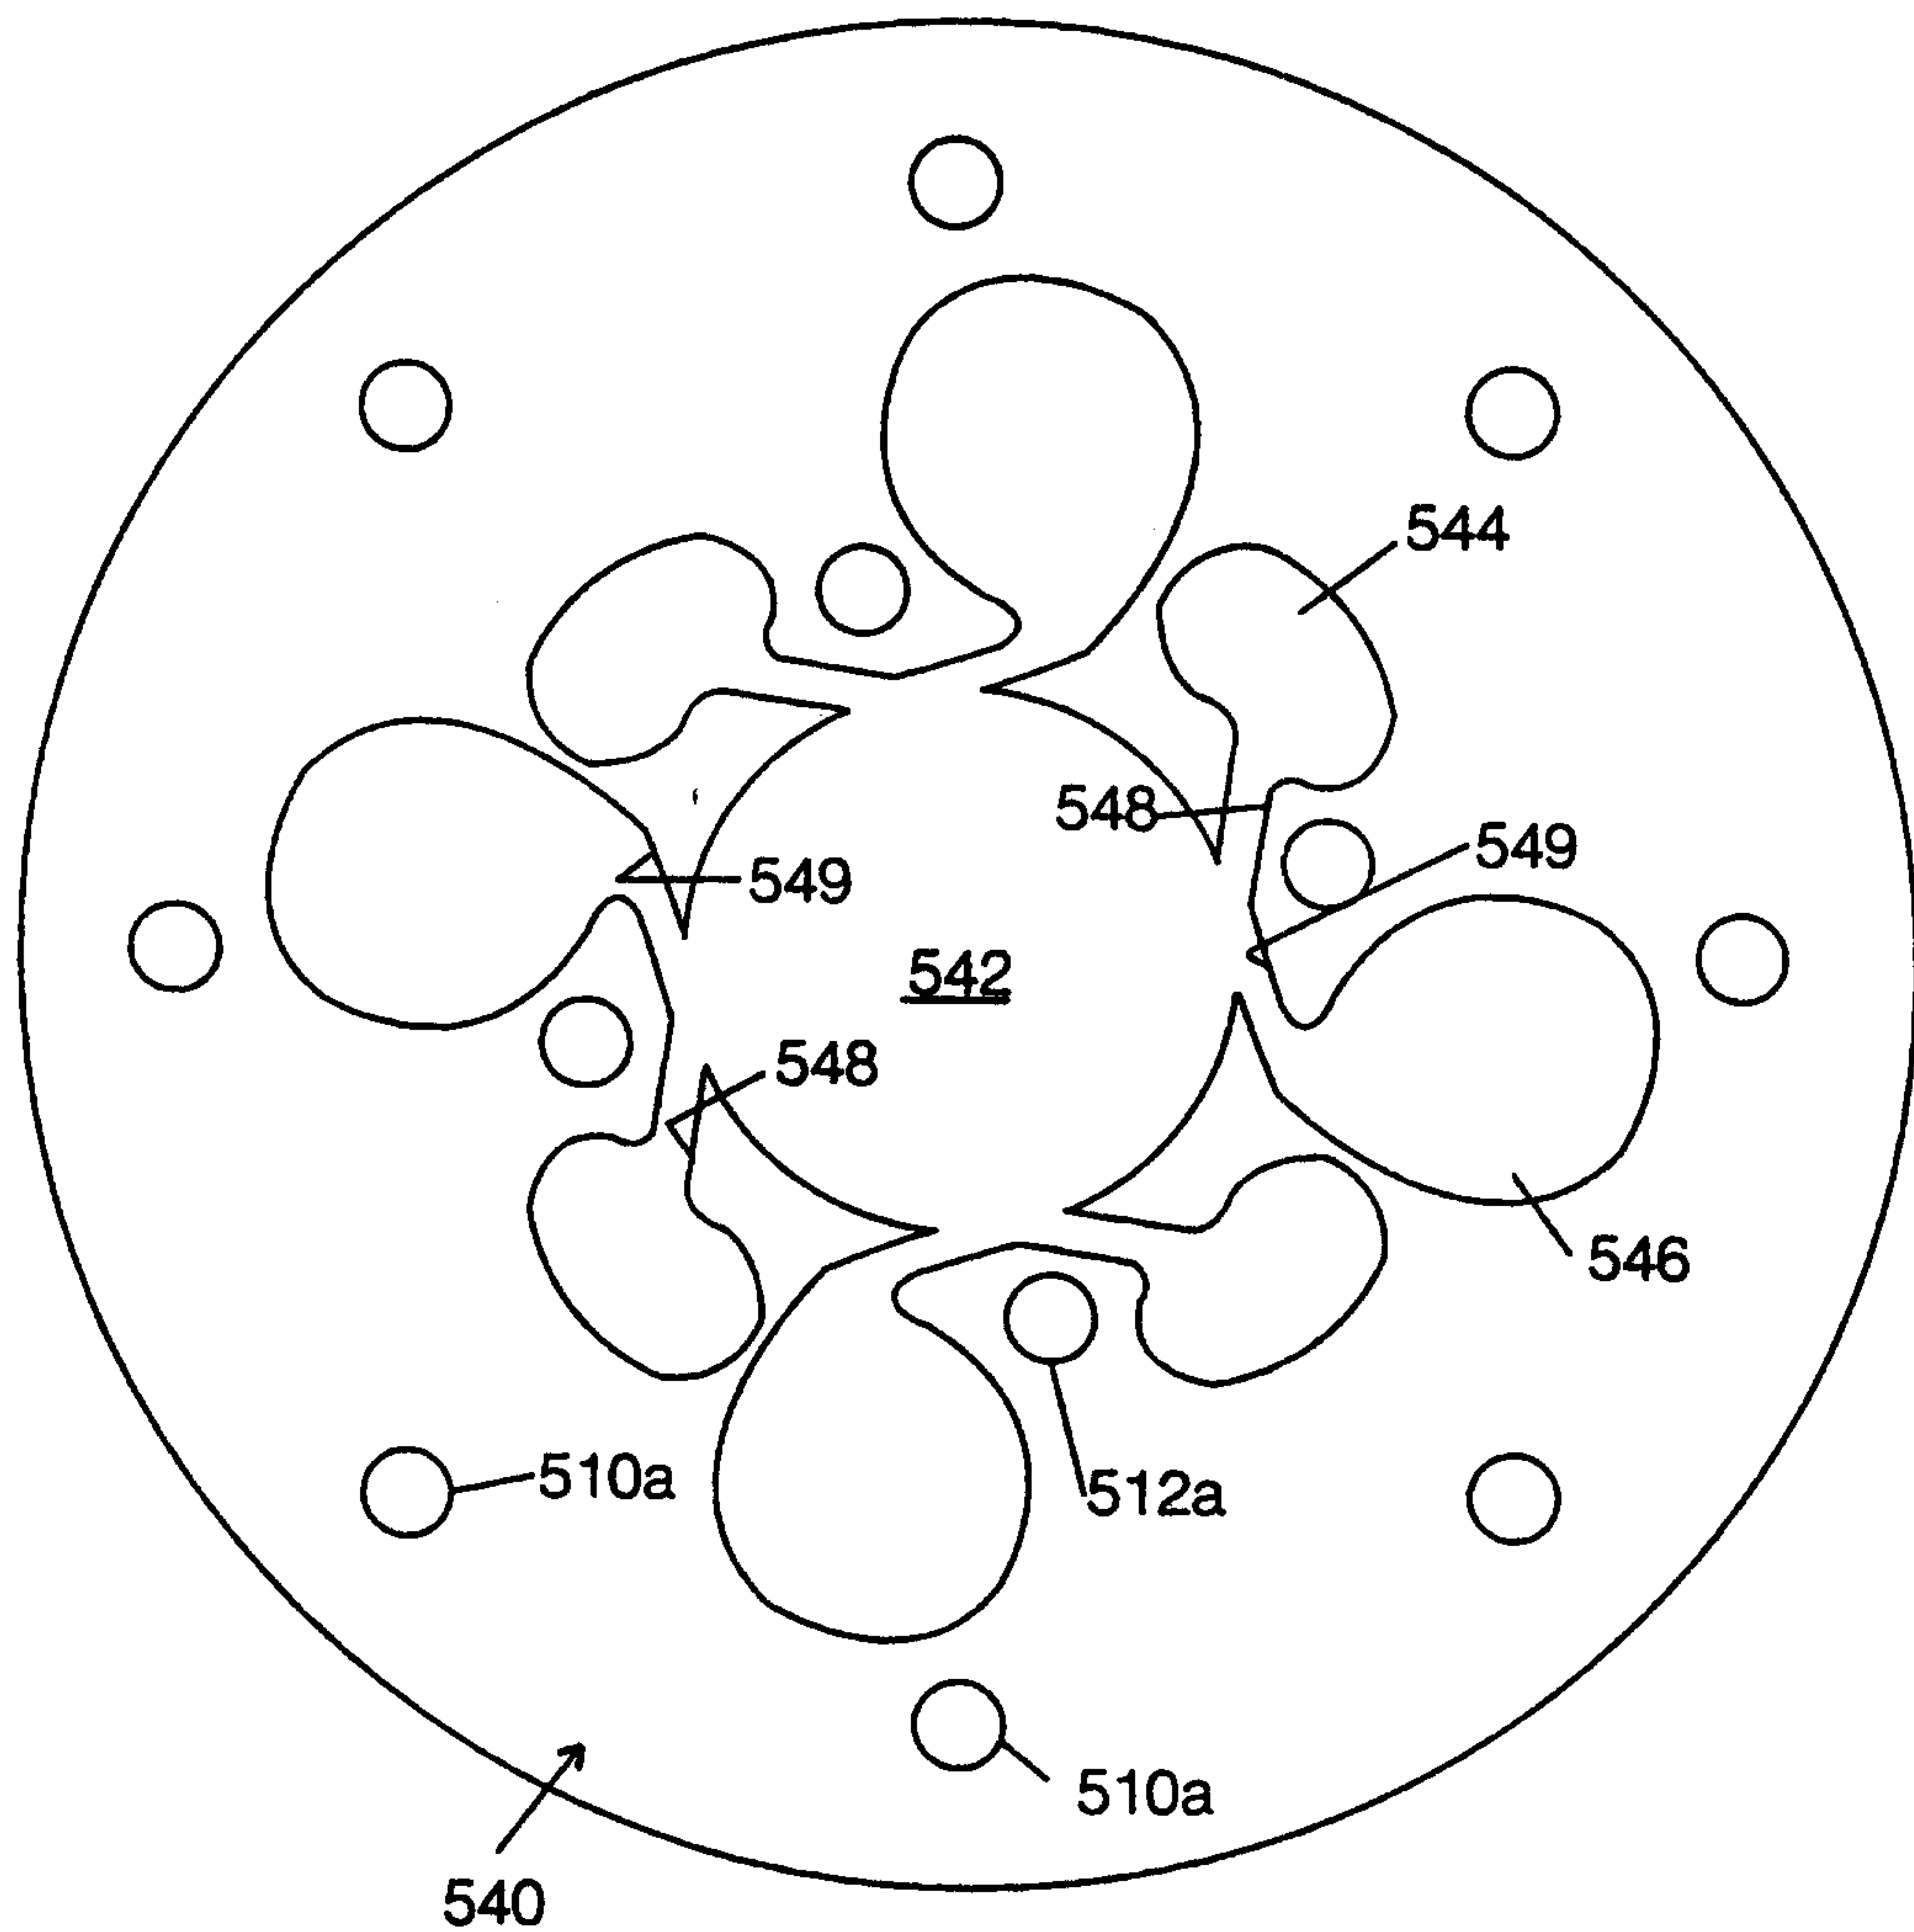


Fig. 23

