

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200071541 A1

(54) Title
Fire-protection sleeve for pipes, cables and the like

(51)⁷ International Patent Classification(s)
F16L 057/04

(21) Application No: **200071541**

(22) Application Date: **2000.11.10**

(30) Priority Data

(31) Number	(32) Date	(33) Country
19960485.1	1999.12.15	DE

(43) Publication Date : **2001.06.21**

(43) Publication Journal Date : **2001.06.21**

(71) Applicant(s)
Hilti Aktiengesellschaft

(72) Inventor(s)
Herbert Munzenberger; Jean-Louis Milhes; Arndt Andresen


(74) Agent/Attorney
BALDWIN SHELSTON WATERS,Level 21,60 Margaret Street,SYDNEY NSW 2000

ABSTRACT OF THE DISCLOSURE

A fire-protection sleeve (1) for a pipe, cable and the like (T) comprises an axially
extending tubular metal housing (2), which has a radially outwardly projecting
connecting flange (3) at one end. An end section (6), at the one end of the housing (2),
5 contains a heat-intumescent composition (10), formed on the inner wall of the housing
(2) and surrounds the axis of an axially extending opening (9) in the tubular housing (2)
for the pipe, cable and the like (T). At the end section (6) of the housing (2) having the
heat-intumescent composition (10), metallic lamellas (12) are arranged, which extend
radially inwardly into the opening (9) of the housing (2) for the pipe, cable or the like (T)
10 and are flexible in the axial direction of the opening (9).

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A fire-protection sleeve for a pipe, cable and the like, comprises an axially extending tubular metal housing with a radially outwardly projecting connecting flange at one end section of said tubular housing, an axially extending opening is formed
5 through said tubular housing and arranged to receive the pipe, cable and the like, a heat-intumescent composition is located on an inner wall of said end section of the tubular housing and encircles said opening, wherein an annular arrangement of metallic lamellas extend radially inwardly into said opening and are flexible in the axial direction of said opening, and said lamellas are located in said end section of said tubular housing in the
10 region of said heat-intumescent composition.
2. A fire-protection sleeve, as set forth in claim 1, wherein the lamellas are arranged in a rosette fashion at a distance from one another in the circumferential direction around the axis of said opening.
3. A fire-protection sleeve, as set forth in claim 2, wherein the lamellas have a
15 minimum spacing in the circumferential direction between adjacent lamellas in the range of about 1 mm to about 8 mm.
4. A fire-protection sleeve, as set forth in claim 1, 2 or 3, wherein the lamellas are formed of a spring steel.
5. A fire-protection sleeve, as set forth in claim 4, wherein said lamellas have a wall
20 thickness in the axial direction of the opening in the range of about 0.15 mm to about 0.4 mm.

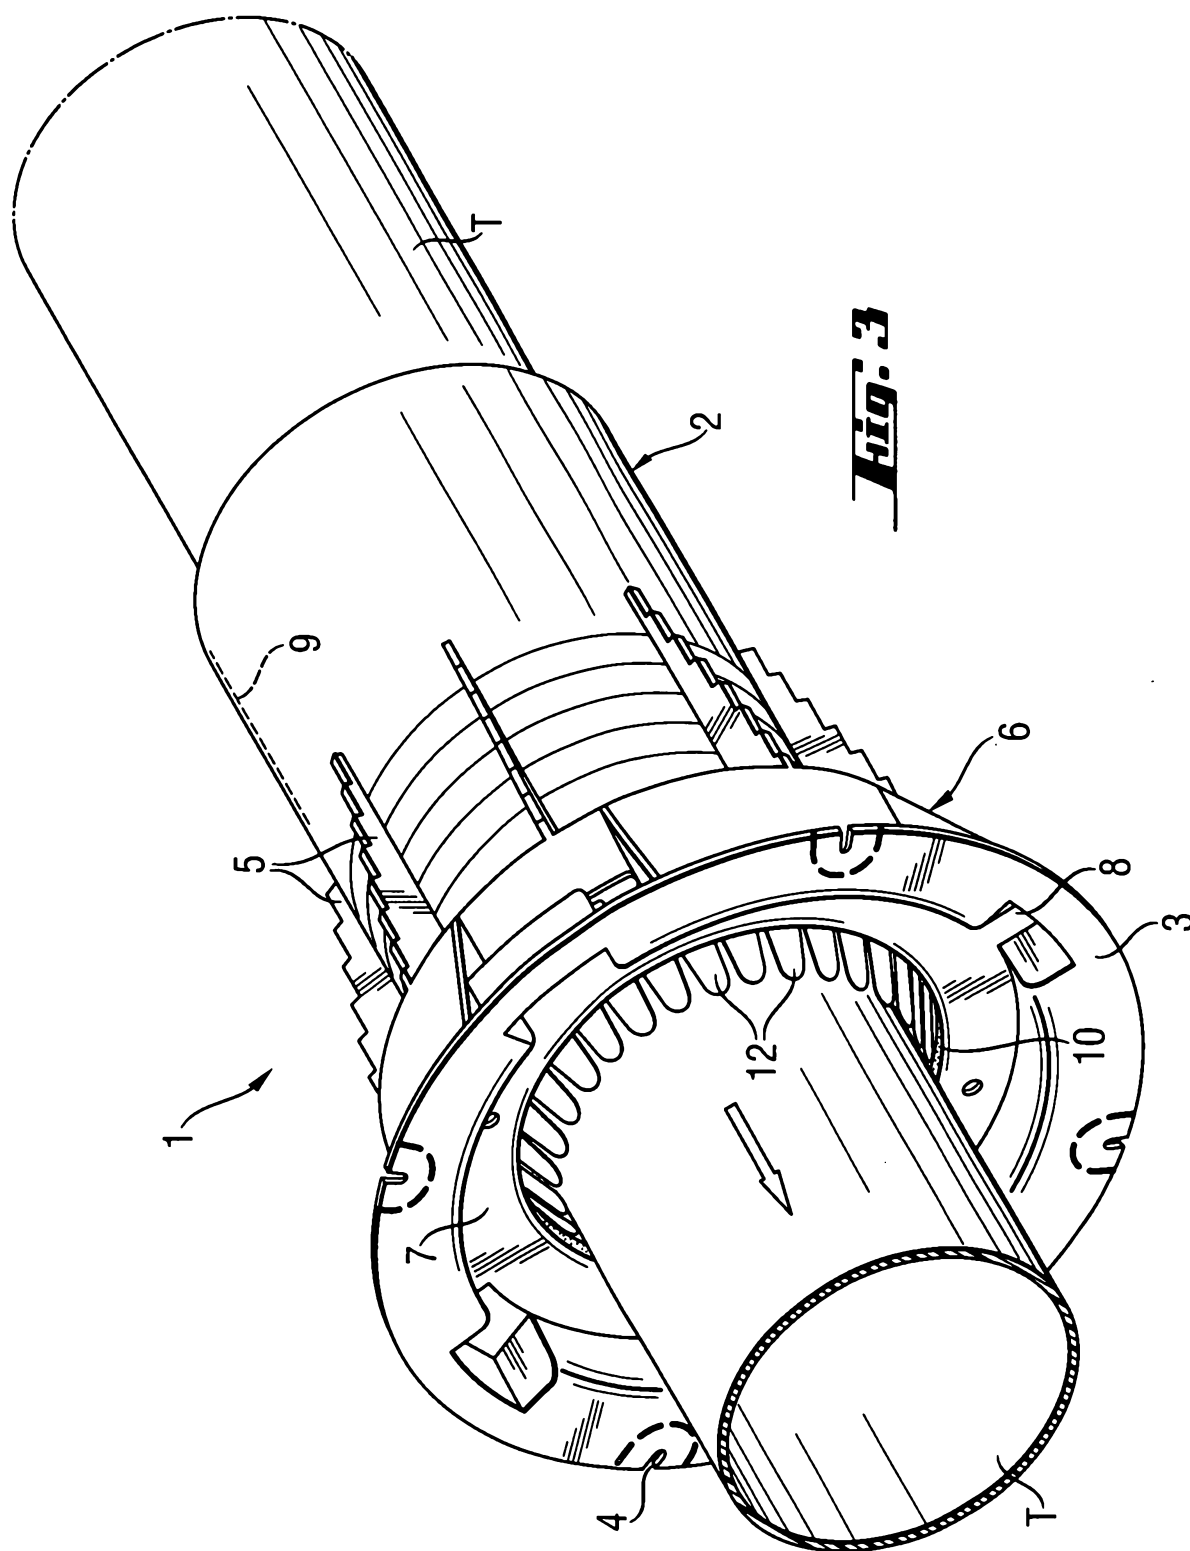

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name of Applicant/s:	Hilti Aktiengesellschaft
Actual Inventor/s:	Herbert Munzenberger and Arndt Andresen and Jean-Louis Milhes
Address for Service:	BALDWIN SHELSTON WATERS 60 MARGARET STREET SYDNEY NSW 2000
Invention Title:	'FIRE-PROTECTION SLEEVE FOR PIPES, CABLES AND THE LIKE'

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

File: 29309AUP00

FIRE-PROTECTION SLEEVE FOR PIPES, CABLES AND THE LIKE

FIELD OF INVENTION

The invention relates to a fire-protection sleeve for pipes, cables and the like, formed of
5 an axially extending tubular metal housing with a radially outwardly extending flange at
one end. A heat-intumescent composition is located within the housing at the one end
and encircles an opening through the housing arranged to receive a pipe, cable and the
like.

10 BACKGROUND INFORMATION AND PRIOR ART

Fire-protection sleeves are used as fire-protection elements for holes through
masonry walls, ceilings or floors of buildings. In the case of combustible or fusible
pipes, cables and the like of plastics material, glass or aluminum, the sleeves are
intended to close off openings in masonry, in order to prevent penetration of fire through
15 the opening. Known fire-protection sleeves usually have a tubular configuration and are
used, for example, as space holders in an early building phase. In these cases, they are
mounted on a form and cast into the concrete. In this way, the concrete wall part is
already provided with a masonry opening. During the installation in a later building
phase or during a subsequent enlargement, fire-protection sleeves, as closing-off sleeves,
20 are inserted from one side into a previously produced opening in the masonry. The
known fire-protection sleeves have a metal or plastics material housing, into which a
sufficient amount of a heat-intumescent composition is integrated, which expands in the

event of a fire and closes off the opening that results when the part or cable burns or melts away.

The larger the diameter of the opening that is to be closed off and the higher the pressure resulting from the fire, the more difficult it is to close off the opening, during a fire. In addition, in the event of a fire, the fire-protection sleeves with the heat-intumescent composition must be able to withstand the pressure of the jet of extinguishing water, used by the firefighters. For this purpose, systems are already known in the state of the art, for which the intumescence of the composition integrated into the fire-protection sleeves, is actively supported by mechanical components, such as springs, flaps, fiberglass fabric, and the like. The main function of these mechanical components is to support the slight expansion force of the heat-intumescent compositions or, since the latter are relatively expensive, to reduce the amount of intumescent composition. The known mechanical aids fulfill their function satisfactorily only if the diameters of the openings are relatively small. In the case of larger diameters, they are relatively unwieldy in use and make the fire-protection sleeve unduly more expensive.

The U.S. patent 4,888,925 discloses a sleeve-like pipe coupling, which is placed in an opening in masonry. The pipe coupling has as a tubular inner housing of plastics material with stops, which project into the interior, for the pipes, which are pushed in and are to be coupled. At one longitudinal end, the interior housing is surrounded by an annular metallic casing. The annular space between the metal casing and the inner housing is filled with a heat-intumescent composition. Metal brackets, radially projecting from the casing to the tubular inner housing, form the boundary of the annular

space at the one longitudinal end of the pipe coupling. The radially extending brackets are to prevent the emergence of the intumescent composition from the annular space and serve to improve the introduction of heat in the event of a fire, so that the expansion of the heat-intumescent composition is reliably initiated. In the event of a fire, the tubular
5 inner housing, together with the plastic material pipe that has been pushed in, burns away and the expanding composition is intended to seal the resulting opening. This effect functions satisfactorily in the case of smaller diameters. However, in the case of larger diameters, the known problems arise with the fire pressure, which exists in the case of a fire, and, optionally, with the water pressure caused by the jet of extinguishing
10 water. This known pipe coupling is suitable only for pipes with the necessary nominal diameter. For pipes with smaller or larger diameters, a different pipe coupling is required. In addition, these known pipe couplings actually are not fire-protection sleeves, since the pipes cannot be passed through the device. Rather, the pipe coupling only joins together the longitudinal ends of individual pipes, which are pushed in at
15 opposite longitudinal ends.

SUMMARY OF THE INVENTION

Therefore, it is a primary object of the present invention to improve the fire-protection sleeve so that, in the event of a fire, openings of a larger diameter can also be
20 reliably closed off. The seal should also withstand a higher fire pressure and the pressure of the extinguishing water used by the firemen. The fire-protection sleeve is suitable for pipes, cables and the like of different diameters. Moreover, it is simple and inexpensive to manufacture the fire-protection sleeve.

This object is accomplished by a fire-protection sleeve with the following distinguishing features. Preferred variations and/or further development of the invention are set forth in the dependent claims. The fire-protection sleeve of the invention for a pipe, cable and the like comprises an essentially tubular metal housing, which has a

5 radially outwardly protruding connecting flange at one longitudinal end. An axial end section of the housing has a heat-intumescent composition, which is disposed at the inner wall of the housing and circularly surrounds an axially extending opening for the pipe, cable and the like. At the axial end section of the housing having the heat-intumescent composition, metallic lamellas are disposed, which extend essentially

10 radially inward from the casing of the metal housing into the opening for the pipe, cables and the like and are flexible in the axial direction.

Because of the flexibility of the metallic lamellas, projecting into the opening, pipes, cables or the like can be easily pushed through. The lamellas do not impede the pushing-in process. There is great latitude with respect to the diameter of the pipes,

15 cables and the like, which can be pushed into the fire-protection sleeve with a given diameter of the opening. The axially flexible lamellas lie against the outer wall of the member that has been pushed in and hold it in a quasi-centered position in the fire-protection sleeve. In the event of a fire, during which the member, which has been pushed in, usually burns or melts away, the lamellas are surrounded by the intumescent

20 composition. They do not actively participate in sealing the opening through the fire-protection sleeve. Instead, embedded in the expanding composition, they form a reinforcement for the sealing plug formed by the action of heat on the expanded intumescent composition. The reinforcement provides greater mechanical strength to

the expanding composition in the event of a fire, so that the composition is better able to withstand the fire pressure arising in the event of a fire and, optionally, the pressure exerted by the directed extinguishing.

Since the lamellas are disposed in a rosette fashion and are at a distance from one
5 another in the circumferential direction, they are embedded even better during the expansion of the intumescent composition. The expanding composition is deposited in the cavity between the lamellas and is tied in even better. For the intumescent compositions usually used, it proves to be advantageous if the lamellas, in the circumferential direction, are at least at a distance of about 1 mm to about 8 mm from
10 one another.

Preferably, the lamellas are formed of a spring steel. By these means, it is ensured that individual lamellas are not broken when pipes, cables and the like are passed through. When a member is pushed in, the lamellas of spring steel are bent only reversibly and lie under tension against the outer wall of the pushed-in member.
15 Whereby, on the one hand, excessive forces do not have to be overcome while pushing in a member and, on the other, there is a sufficiently stiff reinforcement for the intumescent composition in the event of a fire, the lamellas of spring steel have a wall thickness in the range of about 0.14 mm to about 0.4 mm. At these wall thicknesses, there is adequate axial flexibility and, at the same time, the danger that individual
20 lamellas will break is small.

The degree, to which the lamellas are deformed when a pipe, cable and the like is inserted in the axial direction, depends on the diameter of the pipe inserted, as well as on the diameter of the opening, which is edged by the inner free ends of the lamellas.

Advantageously, the lamellas therefore all have the same length. Moreover, they form the boundary of the opening, the diameter of which is at least 10 percent of the diameter of the tubular housing opening.

For manufacturing reasons, it is advantageous if the lamellas are constructed on
5 an annular metallic body, which can be inserted into the housing. Preferably, the lamellas are formed in one piece with the annular metallic body.

BRIEF DESCRIPTION OF THE DRAWING

In the following, the invention is explained in greater detail with reference to an
10 example of a fire-protection sleeve, shown in the Figures, some of which are diagrammatic and not to scale.

Figure 1 is a perspective view, partly in section, of an inventive fire-protection sleeve,

15 Figure 2 is a view of the annular metallic body, with integrally constructed lamellas, as shown in Fig. 1; and

Figure 3 is a perspective view of the fire-protection sleeve of Figure 1, through which a pipe has been passed.

20 DETAILED DESCRIPTION OF THE INVENTION

A fire protection sleeve is shown in Figure 1. It comprises an axially extending tubular housing 2 formed of metal, at the left axially extending end section 6 there is a connecting flange 3 which extends radially outwardly. The connecting flange 3 is

provided with connecting devices 4, such as boreholes or the like, which enable the fire-protection sleeve 1 to be fastened to a concrete form or to a wall. At the outside of the tubular housing 2, radially projecting ribs 5 are provided, which prevent rotation of the fire-protection sleeve 1. At the axially extending end section 6 of the tubular housing, a closing part 7 is connected detachably with the housing 2. For this purpose, locking brackets 8 project radially outwardly from the periphery of the closing part 7, and engage corresponding recesses in the connecting flange 3 and lock behind shoulders. In the axial end section 6 of the tubular housing 2, a heat-intumescent composition 10 is provided. The heat-intumescent composition 10 is disposed at the inner wall of the tubular housing 2 and surrounds an axially extending opening 9 of the tubular housing 2 in annular fashion. The diameter d of the opening 9, is measured across the inner wall of the housing 2. In Figure 1, the right end section of the tubular housing 2, opposite the connecting flange 3, is shown closed off by a lid 14. Optionally the lid 14 is detachable, for example, if the fire-protection sleeve 1 is to be equipped with a pipe only in a later phase of the building and if contamination of the opening 9 is to be prevented.

At the axially extending end section 6 of the tubular housing 2 accommodating the intumescent composition 10, axially flexible lamellas 12 are disposed, which extend in the radially inward direction and project into the opening 9 for a pipe, cable and the like.

Figure 2 shows an annular body 11 with a number of lamellas 12, which are arranged in rosette fashion and project radially inward from the circumference. The annular body 11 is formed of a spring steel. The lamellas 12 are constructed integrally with the annular body 11 and are flexible in the axial direction of the opening 9. For this

purpose, the lamellas 12 are connected over a flector 13 with the circumference of the annular body 11. The wall thickness of the lamellas 12 is about 0.15 mm to about 0.4 mm. The lamellas 12 are at a minimum distance from one another, which amounts to about 1 mm to about 8 mm. The lamellas 12 all have the same radially extending length
5 and leave free an opening cross-section with a diameter O, which amounts at least to about 10% of the diameter d of the axially extending opening 9 (Figure 1). The annular body 11 with the axially flexible lamellas 12 is mounted in the end section 6 of the tubular housing 2 and is fixed by the closing part 7. It is in the immediate vicinity of the heat-intumescent composition 10, which is also disposed in the end section 6 of the
10 housing 2 (Figure 1).

Figure 3 shows the inventive fire-protection sleeve 1 of Figure 1 with an inserted pipe T, which may consist, for example, of plastics material. The individual elements of the fire-protection sleeve 1 have the same reference numerals as in Figure 1. The pipe T is pushed in from the side opposite the end section 6 of the housing 2. During this
15 procedure, the flexible lamellas 12 are bent corresponding to the diameter of the pipe T. The lamellas 12 press against the outer surface of the pipe T and center the latter within the fire-protection sleeve 1. In the event of a fire, the pipe T burns or melts away and the intumescent composition 10, which is disposed at the inner wall of the end section 6, expands. The expanded composition 10 penetrates through and is deposited in the
20 spaces between the lamellas 12. With this embedment, the lamellas 12 form a reinforcement for the expanding intumescent composition 10, which closes off the axial opening 9 of the housing 2.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A fire-protection sleeve for a pipe, cable and the like, comprises an axially extending tubular metal housing with a radially outwardly projecting connecting flange at one end section of said tubular housing, an axially extending opening is formed
5 through said tubular housing and arranged to receive the pipe, cable and the like, a heat-intumescent composition is located on an inner wall of said end section of the tubular housing and encircles said opening, wherein an annular arrangement of metallic lamellas extend radially inwardly into said opening and are flexible in the axial direction of said opening, and said lamellas are located in said end section of said tubular housing in the
10 region of said heat-intumescent composition.
2. A fire-protection sleeve, as set forth in claim 1, wherein the lamellas are arranged in a rosette fashion at a distance from one another in the circumferential direction around the axis of said opening.
3. A fire-protection sleeve, as set forth in claim 2, wherein the lamellas have a
15 minimum spacing in the circumferential direction between adjacent lamellas in the range of about 1 mm to about 8 mm.
4. A fire-protection sleeve, as set forth in claim 1, 2 or 3, wherein the lamellas are formed of a spring steel.
5. A fire-protection sleeve, as set forth in claim 4, wherein said lamellas have a wall
20 thickness in the axial direction of the opening in the range of about 0.15 mm to about 0.4 mm.

6. A fire-protection sleeve, as set forth in claim 1, 2 or 3, wherein said lamellas have the same length in the radially inward direction with the radially inner ends thereof forming a passageway with a diameter at least 10% of the diameter of the opening.

7. A fire -protection sleeve, a set forth in claim 1, 2 or 3, wherein said lamellas are
5 formed extending radially inwardly from an annular metallic body fitted into the opening in said tubular housing.

8. A fire-protection sleeve, as set forth in claim 7, wherein said lamellas are formed integrally with said annular body.

9. A fire protection sleeve for a pipe, cable and the like substantially as herein
10 described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings.

DATED this 10th Day of November, 2000

HILTI AKTIENGESELLSCHAFT

15 Attorney: CAROLINE M. BOMMER
Fellow Institute of Patent and Trade Mark Attorneys of Australia
of BALDWIN SHELSTON WATERS

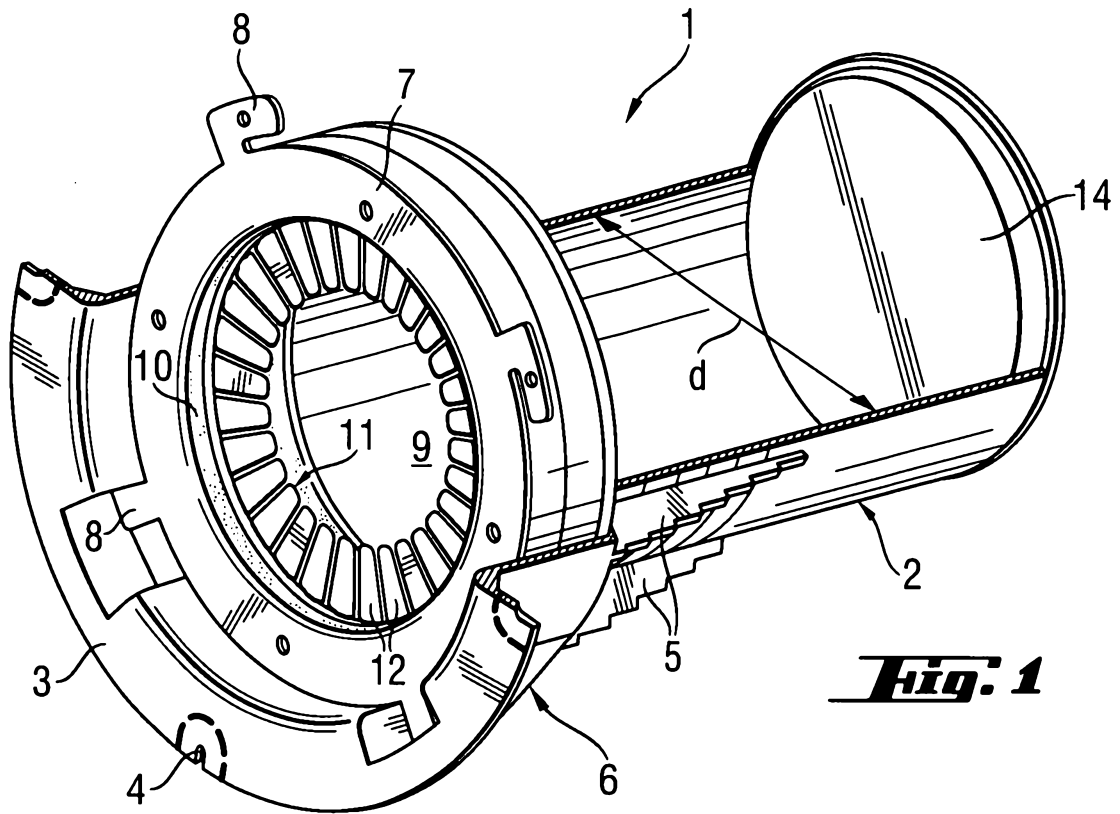


Fig. 1

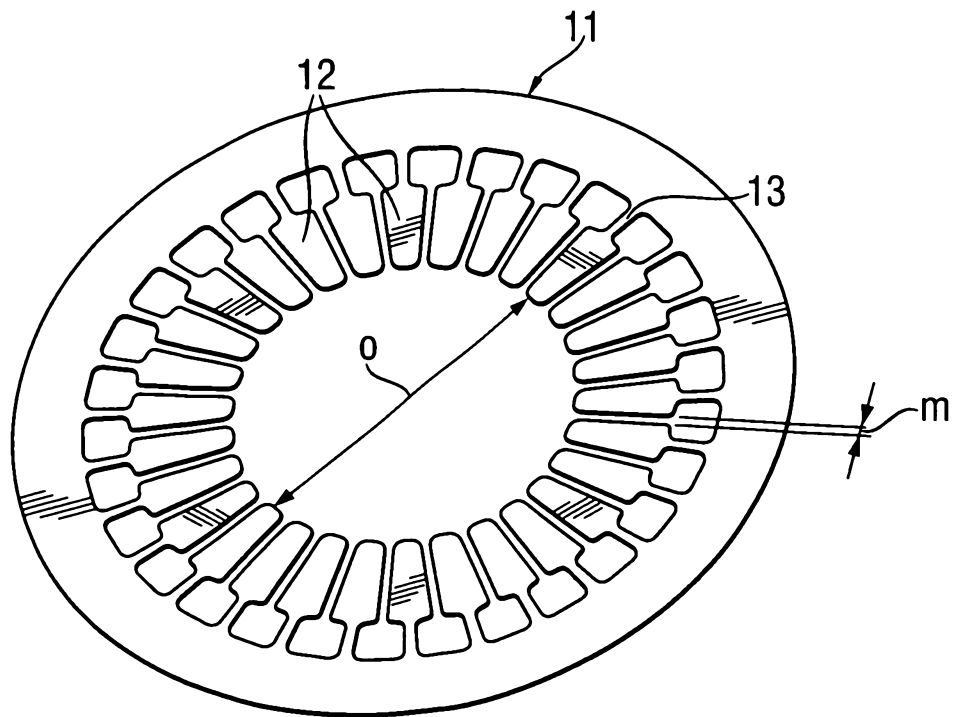


Fig. 2

