



(22) Date de dépôt/Filing Date: 2002/11/25

(41) Mise à la disp. pub./Open to Public Insp.: 2003/06/11

(45) Date de délivrance/Issue Date: 2010/07/13

(30) Priorité/Priority: 2001/12/11 (DE101 60 635.4)

(51) Cl.Int./Int.Cl. *B01J 37/16* (2006.01),
C07F 17/00 (2006.01)

(72) Inventeurs/Inventors:

GIESE, BURKHARDT, DE;
LISOWSKY, RICHARD, DE;
TIMMERMANN, JAN, DE;
WANKE, THOMAS, DE;
HUTTENHOFER, MARIO, DE


(73) Propriétaire/Owner:

CHEMTURA ORGANOMETALLICS GMBH, DE

(74) Agent: MARKS & CLERK


(54) Titre : PROCEDE D'HYDROGENATION DE COMPOSES DE METAUX DE TRANSITION INSATURES

(54) Title: PROCESS FOR THE HYDROGENATION OF UNSATURATED TRANSITION METAL COMPOUNDS

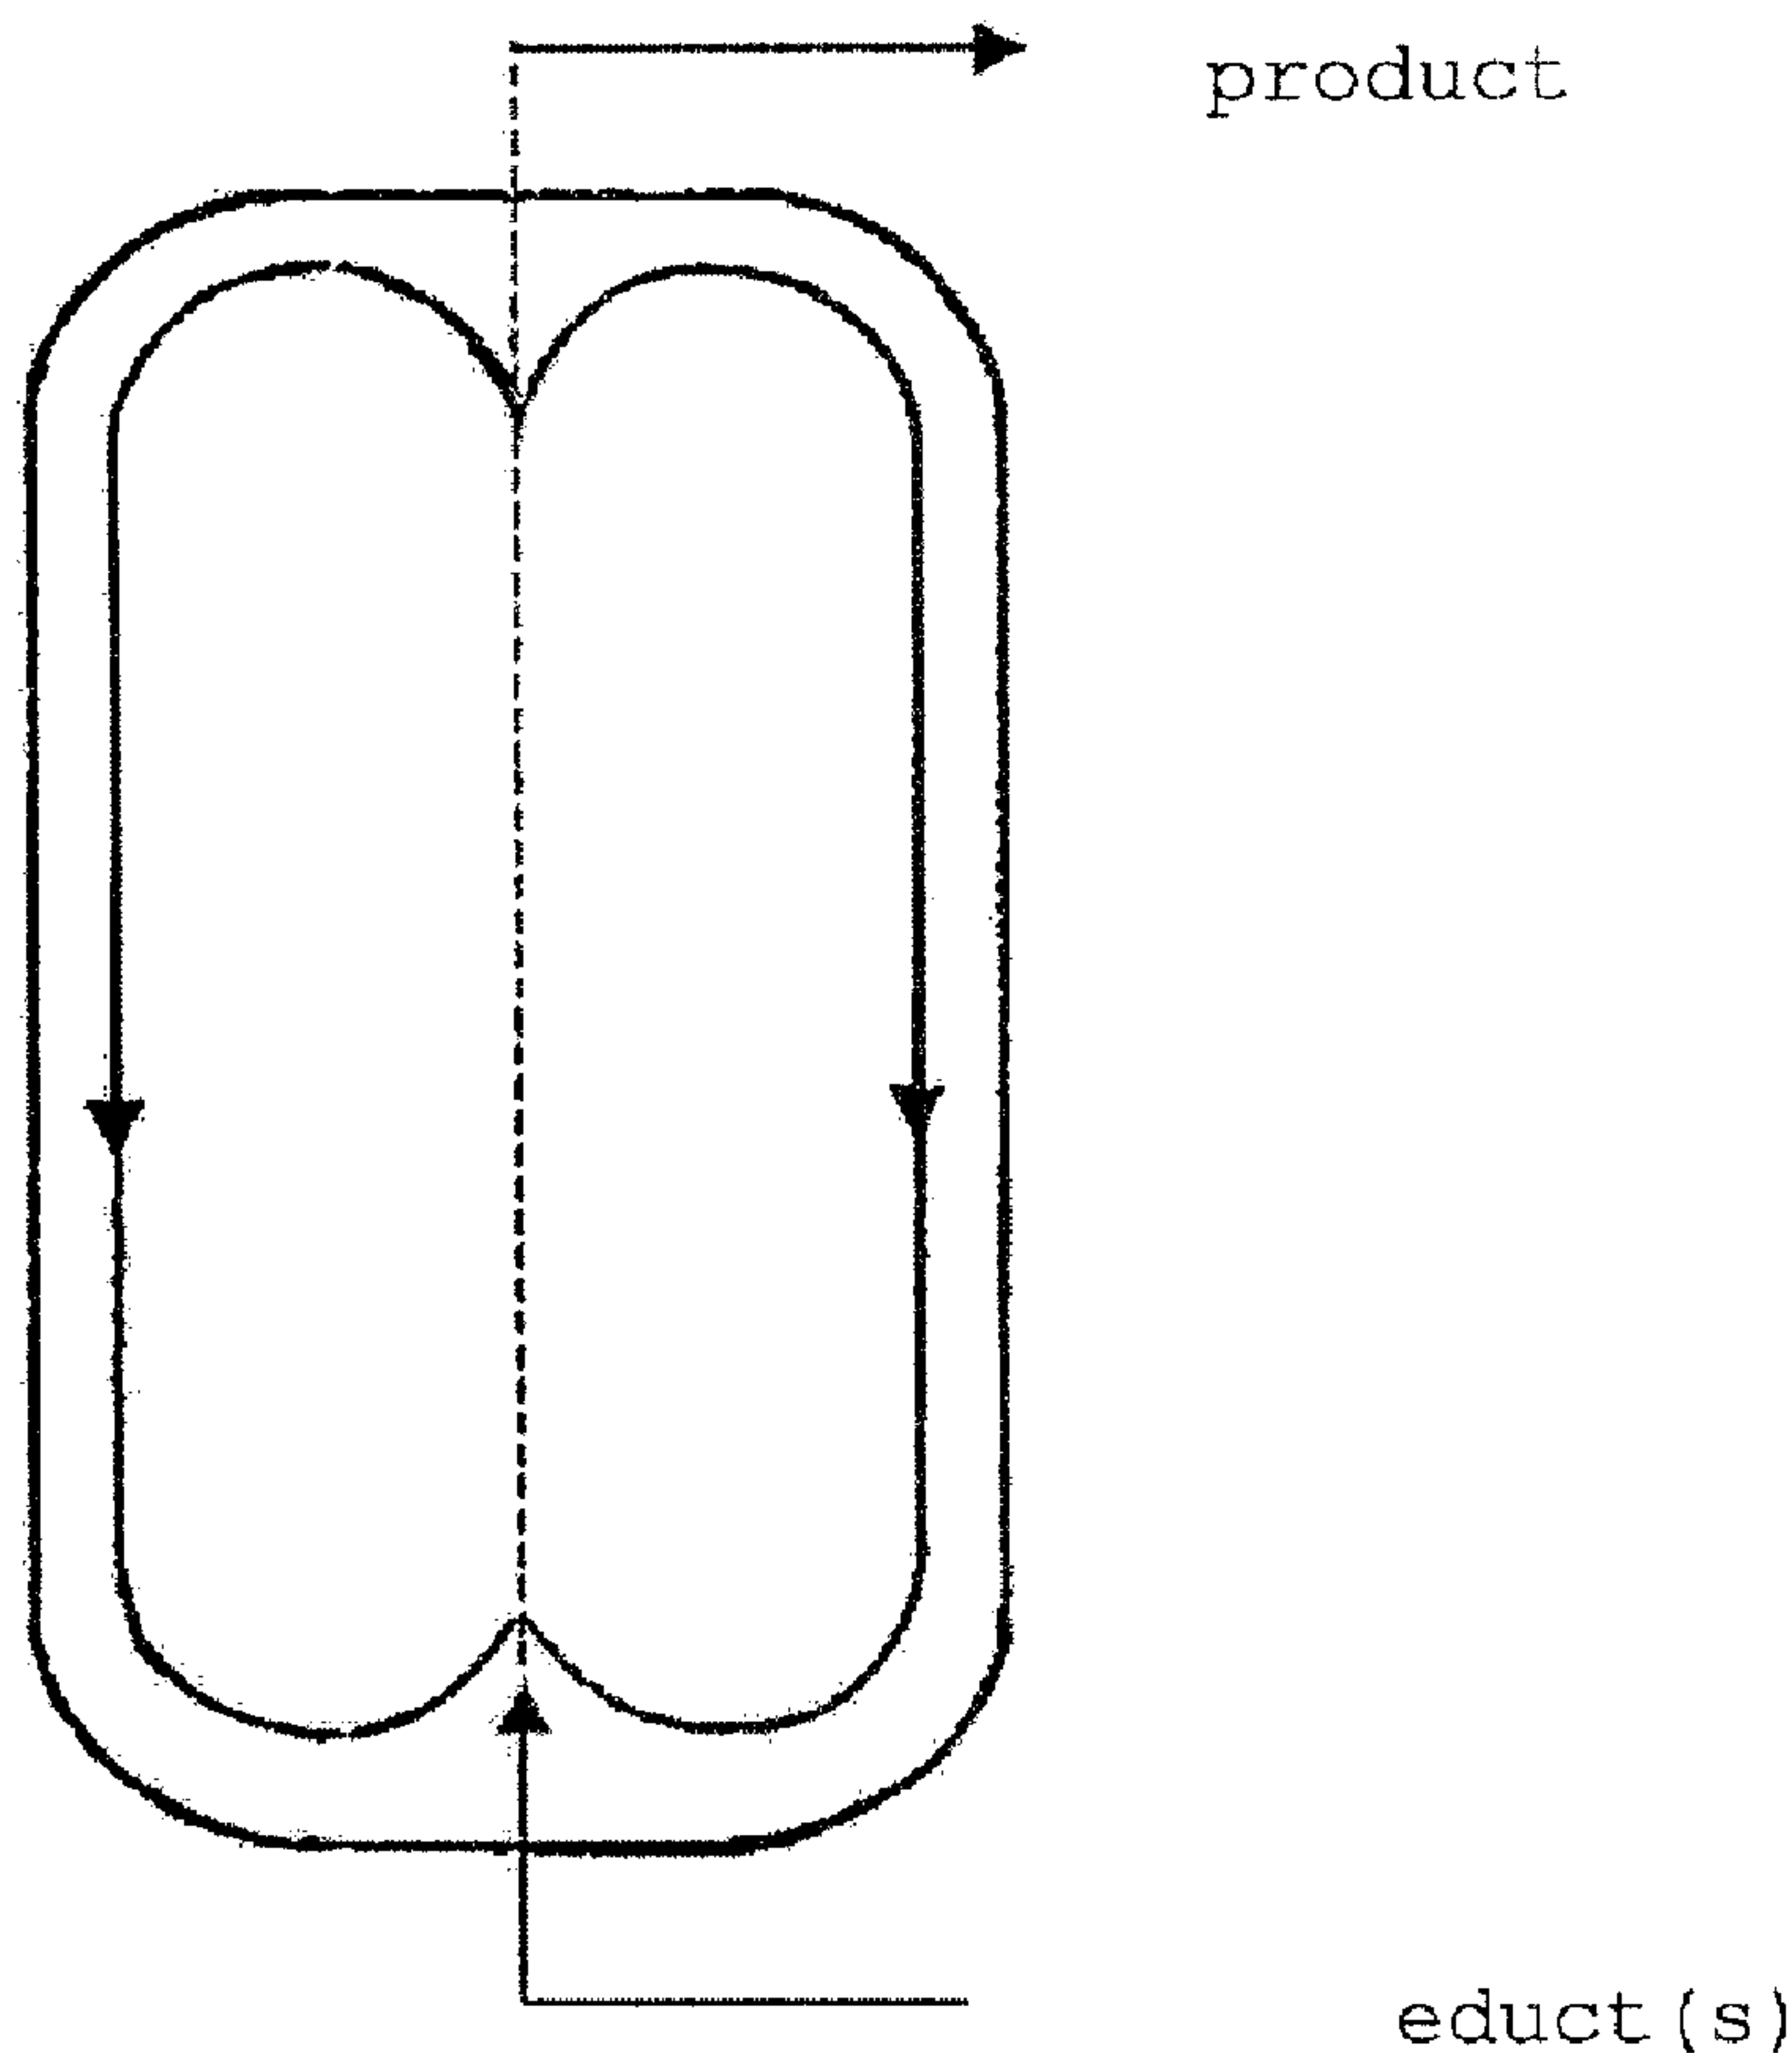

(57) Abrégé/Abstract:

The invention relates to a process for preparing transition metal compounds having hydrogenated or partially hydrogenated monocyclic, bicyclic or polycyclic ligands, which is characterized in that the unsaturated monocyclic, bicyclic or polycyclic transition

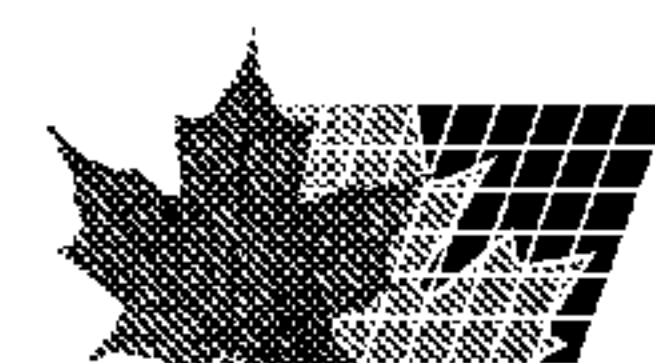

(57) **Abrégé(suite)/Abstract(continued):**

metal compound together with hydrogen is introduced continuously or all at once under pressure into a static mixer in the presence of a suitable solubilizer and a catalyst.

Abstract

Process for the hydrogenation of unsaturated transition metal
compounds

The invention relates to a process for preparing transition metal compounds having hydrogenated or partially hydrogenated monocyclic, bicyclic or polycyclic ligands, which is characterized in that the unsaturated monocyclic, bicyclic or polycyclic transition metal compound together with hydrogen is introduced continuously or all at once under pressure into a static mixer in the presence of a suitable solubilizer and a catalyst.

5

10

15

20

25

35

hitherto unknown polymer structures having very promising properties with a view to industrial applications.

The monocyclic, bicyclic or polycyclic transition metal compounds have a differing polymerization activity and selectivity depending on whether the polycycle is saturated or unsaturated. The hydrogenation and work-up of the transition metal compounds is sometimes technically complicated, the conversions are incomplete, the yields are often low and the products are correspondingly expensive.

Some possible ways of hydrogenating monocyclic, bicyclic or polycyclic transition metal compounds have been described in the literature (W. Kaminsky et al., Angew. Chem. 97 (1985), 507-508).

Some of these processes are technically complicated since they require, inter alia, low reaction temperatures at the beginning or multistage work-up processes and suffer from reduced yields as a result, or the hydrogenated transition metal derivative can often not be obtained in the purity necessary for a high catalyst activity.

It is therefore an object of the present invention to overcome these disadvantages of the prior art and to provide a simple and efficient process for the hydrogenation of monocyclic, bicyclic or polycyclic transition metal compounds.

The invention provides a process for preparing transition metal compounds having hydrogenated or partially hydrogenated monocyclic, bicyclic or polycyclic ligands, which is characterized in that the unsaturated monocyclic, bicyclic or polycyclic transition metal compound together with hydrogen is introduced continuously or all at once under pressure into a static mixer in the presence of a suitable solubilizer and a catalyst. The continuous introduction of hydrogen can also be carried out with return of unreacted hydrogen into the circuit.

Further embodiments of the invention are characterized by the claims.

According to the invention, preference is given to a preparative process in which hydrogen is introduced via a mixing nozzle into a solution or suspension of an unsaturated monocyclic, bicyclic or polycyclic transition metal compound in an aliphatic, cycloaliphatic or aromatic hydrocarbon, if desired a halogenated hydrocarbon, in a static mixer, preferably a flow tube with partial flow return (K. Hübner, Chemie-Technik 6 (1987), 87-92). For the purposes of the present invention, the term solubilizer refers to diluents which lead either to a solution or to a suspension.

Brief description of the figures

Figure 1 schematically shows a flow tube with partial flow return.

Figure 2 schematically shows a liquid jet gas compressor.

Figure 3 schematically shows a Venturi mixer.

The mode of operation of the flow tube with partial flow return (Figure 1), as is described, for example, in DE-A-25 16 284, is based on a liquid driving jet in an internal tube which transmits momentum to the entire contents of the reactor and thus produces a strong circulation. As a result, the flow of circulated liquid in the reactor is from about 8 to 10 times as high as the volume flow of the driving jet.

In the process of the invention, hydrogen is introduced via the single-component or multicomponent mixing nozzle into a suspension or solution of the unsaturated monocyclic, bicyclic or polycyclic transition metal compound in the reactor in a volume flow ratio of from 1:2000 to 1:40 000, preferably 5000-20 000.

The flow tube with partial flow return ensures, because of the strong circulation, good and extremely rapid mixing of the abovementioned suspension or solution with the hydrogen (Figure 1).

5

The mode of operation of the liquid jet gas compressor (Figure 2), also known as liquid jet compressor according to the manufacturer GEA (for example), is based on a liquid driving jet which breaks up in a tube after exiting the nozzle and, as a result of the liquid droplets formed, entrains the surrounding gas phase and thus produces a high degree of mixing.

In the process of the invention, the stream of the solution or suspension of the transition metal compound together with the catalyst is pumped with the aid of a pump around a circuit through the liquid jet gas compressor, resulting in the hydrogen being drawn in and mixed in in finely dispersed form.

20

The liquid jet gas compressor ensures, owing to the strong circulation and the breaking-up of the liquid jet, good and extremely rapid mixing of the abovementioned suspension or solution of the unsaturated monocyclic, bicyclic or polycyclic transition metal compound with the hydrogen (Figure 2).

The mode of operation of the Venturi mixer (Figure 3) is based on a tube through which liquid flows and into which the hydrogen gas stream is drawn. As a result of the high flow, the hydrogen is finely dispersed and a high degree of mixing of the gas is thus produced.

In the process of the invention, the stream of solution or suspension of the transition metal compound together with the catalyst is pumped by means of a pump in a circuit through the Venturi mixer, as a result of which the hydrogen is drawn in and mixed in.

35

Owing to the strong circulation and good dispersion of the hydrogen, the Venturi mixer ensures good and extremely rapid mixing of the solution or suspension of the unsaturated monocyclic, bicyclic or polycyclic transition metal compound with the hydrogen (Figure 3).

The processes of the invention make it possible to prepare hydrogenated or partially hydrogenated transition metal compounds in virtually quantitative yields, without technically complicated process steps. In this context, hydrogenated transition metal compounds are compounds which have no C-C double bond apart from the double bonds in the cyclopentadienyl structure, while partially hydrogenated transition metal compounds are compounds which have at least one C-C double bond in addition to the double bonds in the cyclopentadienyl structure.

In the process of the invention, it is possible to use unsaturated monocyclic, bicyclic or polycyclic transition metal compounds as starting materials.

Preference is given to using indenyl or fluorenyl derivatives of elements of group IVa of the Periodic Table of the Elements as transition metal compounds. The transition metal compounds to be hydrogenated are preferably zirconium, hafnium or titanium complexes.

Particular preference is given to using halides or aryl, alkaryl, alkoxy or alkyl complexes, which may be bridged or unbridged, as unsaturated transition metal compounds. Very particular preference is given to bridged transition metal compounds which are used as halides or alkyl complexes.

Preference is also given, but without implying a restriction, to 1,2-ethylene, Si,Si-dimethylsilyl or 1,1-dimethylmethylene groups being present as bridging units in the transition metal compounds used.

Catalysts used in the process of the invention can be catalysts which are customarily used in hydrogenation, for example Pt, Pd, Ru or Rh catalysts. Preference is given to using a platinum catalyst (as oxide or hydrated oxide, sometimes also supported on support materials such as activated carbon, silica, etc.).

Owing to parameters which can be set in a targeted manner and reproducible process conditions, these hydrogenated or partially hydrogenated monocyclic, bicyclic or polycyclic transition metal compounds prepared by the process of the invention, which are the subject matter of the present invention, have high activities as catalysts and are thus very suitable for the further preparation of catalyst systems for olefin polymerization.

The invention is illustrated below with the aid of examples.

The following examples reflect the general field of application of the present invention and do not imply any restriction.

Percentages are, unless indicated otherwise, percentages by mass.

Examples

Example 1 (flow tube with partial flow return)

30

Hydrogenation of 1,2-ethylenebis[indenyl]zirconium dichloride to 1,2-ethylenebis[tetrahydroindenyl]zirconium dichloride by the process of the invention in a flow tube with partial flow return

Temperature: 40°C
Pressure: 2-3 bar
Volume flow of H₂: 600-700 [standard l/h]
Reaction time: 46 min
5 Materials used: 5 kg of dichloromethane
250 g of transition metal compound
5 g of PtO₂·H₂O

Conversion after 46 min (NMR): > 98 %

10

Procedure:

Dichloromethane, platinum oxide hydrate and transition metal compound were placed in the reactor to form a suspension and heated to 40°C. After starting up the
15 circulation pump, hydrogen was introduced into the flow tube with partial flow return via the metering nozzle. The conversion can be followed by NMR spectroscopy on samples taken during the course of the reaction.

20 Example 2 (liquid jet gas compressor)

Hydrogenation of 1,2-ethylenebis[indenyl]zirconium dichloride to 1,2-ethylenebis[tetrahydroindenyl]zirconium dichloride by the process of the invention in a liquid jet
25 gas compressor

Temperature: 40°C
Pressure: 2-3 bar
Volume flow of H₂: Single introduction
30 Reaction time: 210 min
Materials used: 5 kg of dichloromethane
50 g of transition metal compound
5 g of PtO₂·H₂O

35 Conversion (NMR) after 210 min: > 98%

Procedure:

Dichloromethane, platinum oxide hydrate and transition metal compound were placed in the reactor and heated to 40°C. After starting up the circulation pump, hydrogen was injected. The conversion can be followed by NMR spectroscopy on samples taken during the course of the reaction.

Example 3 (Venturi mixer)

10

Hydrogenation of 1,2-ethylenebis[indenyl]zirconium dichloride to 1,2-ethylenebis[tetrahydroindenyl]zirconium dichloride by the process of the invention in a Venturi mixer

15

Temperature:	40°C
Pressure:	2-4 bar
Volume flow of H ₂ :	Single introduction
Reaction time:	100 min
Materials used:	5 kg of dichloromethane
	50 g of transition metal compound
	5 g of PtO ₂ ·H ₂ O

20

Conversion (NMR) after 100 min: 98%

25

Procedure:

30

Dichloromethane, platinum oxide hydrate and transition metal compound were placed in the reactor and heated to 40°C. After starting up the circulation pump, hydrogen was injected. The conversion can be followed by NMR spectroscopy on samples taken during the course of the reaction.

Comparative example 1 (autoclave)

Hydrogenation of 1,2-ethylenebis[indenyl]zirconium
dichloride to 1,2-ethylenebis[tetrahydroindenyl]zirconium
5 dichloride in a classical pressure reactor (autoclave)

	Temperature:	50°C
	Pressure:	100 bar
	Reaction time:	1 day
10	Materials used:	50 g of dichloromethane 2.5 g of transition metal compound 0.050 g of $\text{PtO}_2 \cdot \text{H}_2\text{O}$ 0.050 g of CaH_2
15	Yield:	< 76%

Procedure:

Prehydrogenation of the catalyst was carried out by
weighing the catalyst and part of the dichloromethane into
20 the autoclave and prehydrogenating the catalyst by means of
hydrogen at 10 bar. After purging the autoclave a number of
times with nitrogen, the transition metal compound and the
remaining dichloromethane are then added. The hydrogenation
is carried out at 50°C and 100 bar for 4 hours.
25 Monitoring of the reaction by means of samples taken during
the reaction is not possible.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. Process for preparing transition metal compounds having hydrogenated or partially hydrogenated monocyclic, bicyclic or polycyclic ligands, wherein the unsaturated monocyclic, bicyclic or polycyclic transition metal compound and hydrogen are introduced into a static mixer in the presence of a suitable solubilizer and a catalyst.
2. Process according to claim 1, wherein the ligand or ligands to be hydrogenated on the transition metal compound are indenyl or fluorenyl derivatives.
3. Process according to claim 1 or 2, wherein the transition metal compounds used are halides or aryl, alkaryl, alkoxy or alkyl complexes.
4. Process according to any one of claims 1 to 3, wherein bridged transition metal compounds are used as halides or alkyl complexes.
5. Process according to claim 3 or 4, wherein 1,2-ethylene, Si, Si-dimethylsilyl, isopropyl or 1,1-dimethylmethylene groups are present as bridging units in the transition metal compounds used.
6. Process according to any one of claims 1 to 5, wherein the hydrogen can be introduced all at once, continuously or in recirculated form.
7. Process according to any one of claims 1 to 6, wherein the static mixer used is a flow tube with coaxial partial

flow return, a liquid jet gas compressor or a Venturi mixer.

8. Process according to any one of claims 1 to 7, wherein the transition metal compound to be hydrogenated can be used as solution or as suspension in a suitable solubilizer.

9. Process according to claim 8, wherein a hydrocarbon or a halogenated hydrocarbon is used as solubilizer.


10. Process according to any one of claims 1 to 9, wherein the catalyst used is a Pt, Pd, Ru or Rh hydrogenation catalyst.

11. Process according to any one of claims 1 to 10, wherein the transition metal compounds to be hydrogenated are zirconium, hafnium or titanium complexes.

12. Process according to any one of claims 1 to 11, wherein the transition metal compounds to be hydrogenated are bridged bisindenyl transition metal compounds containing zirconium, hafnium or titanium as transition metal and a 1,2-ethylene, Si, Sdimethylsilyl, isopropyl or 1,1-dimethylmethylene group as bridging unit.

Crompton GmbH


Figure 1

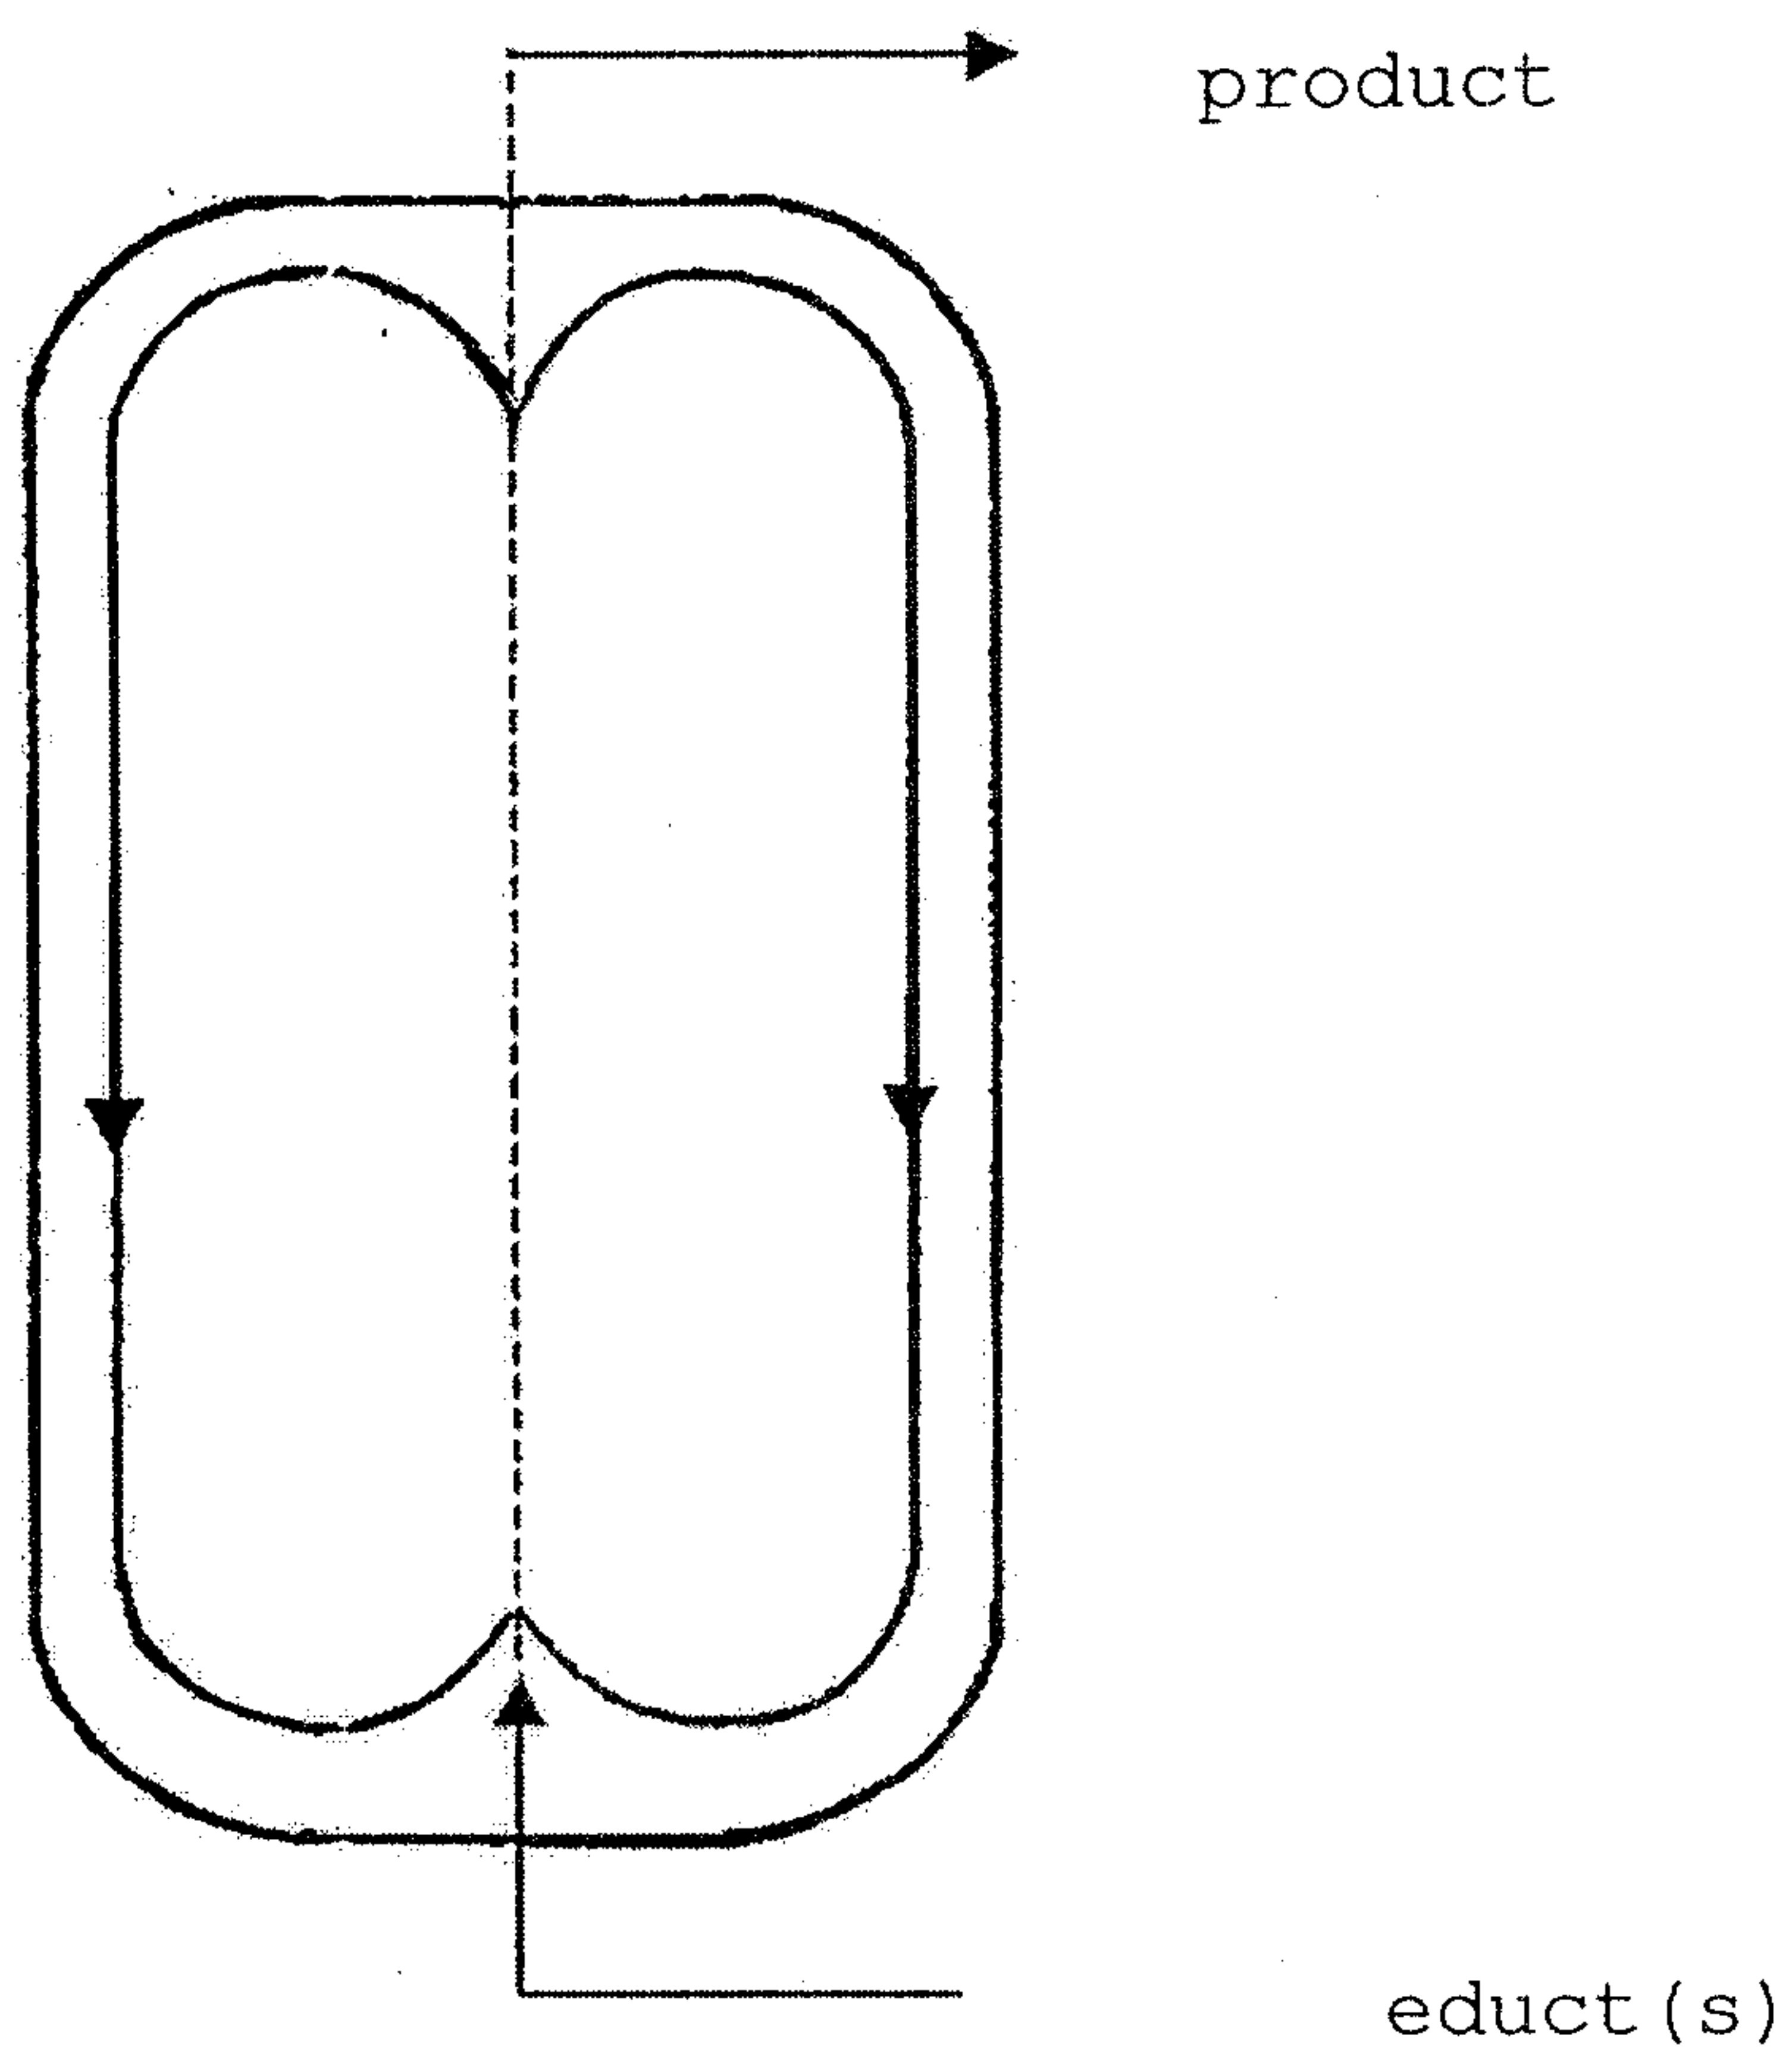

Marks & Clerk

Crompton GmbH


Figure 2

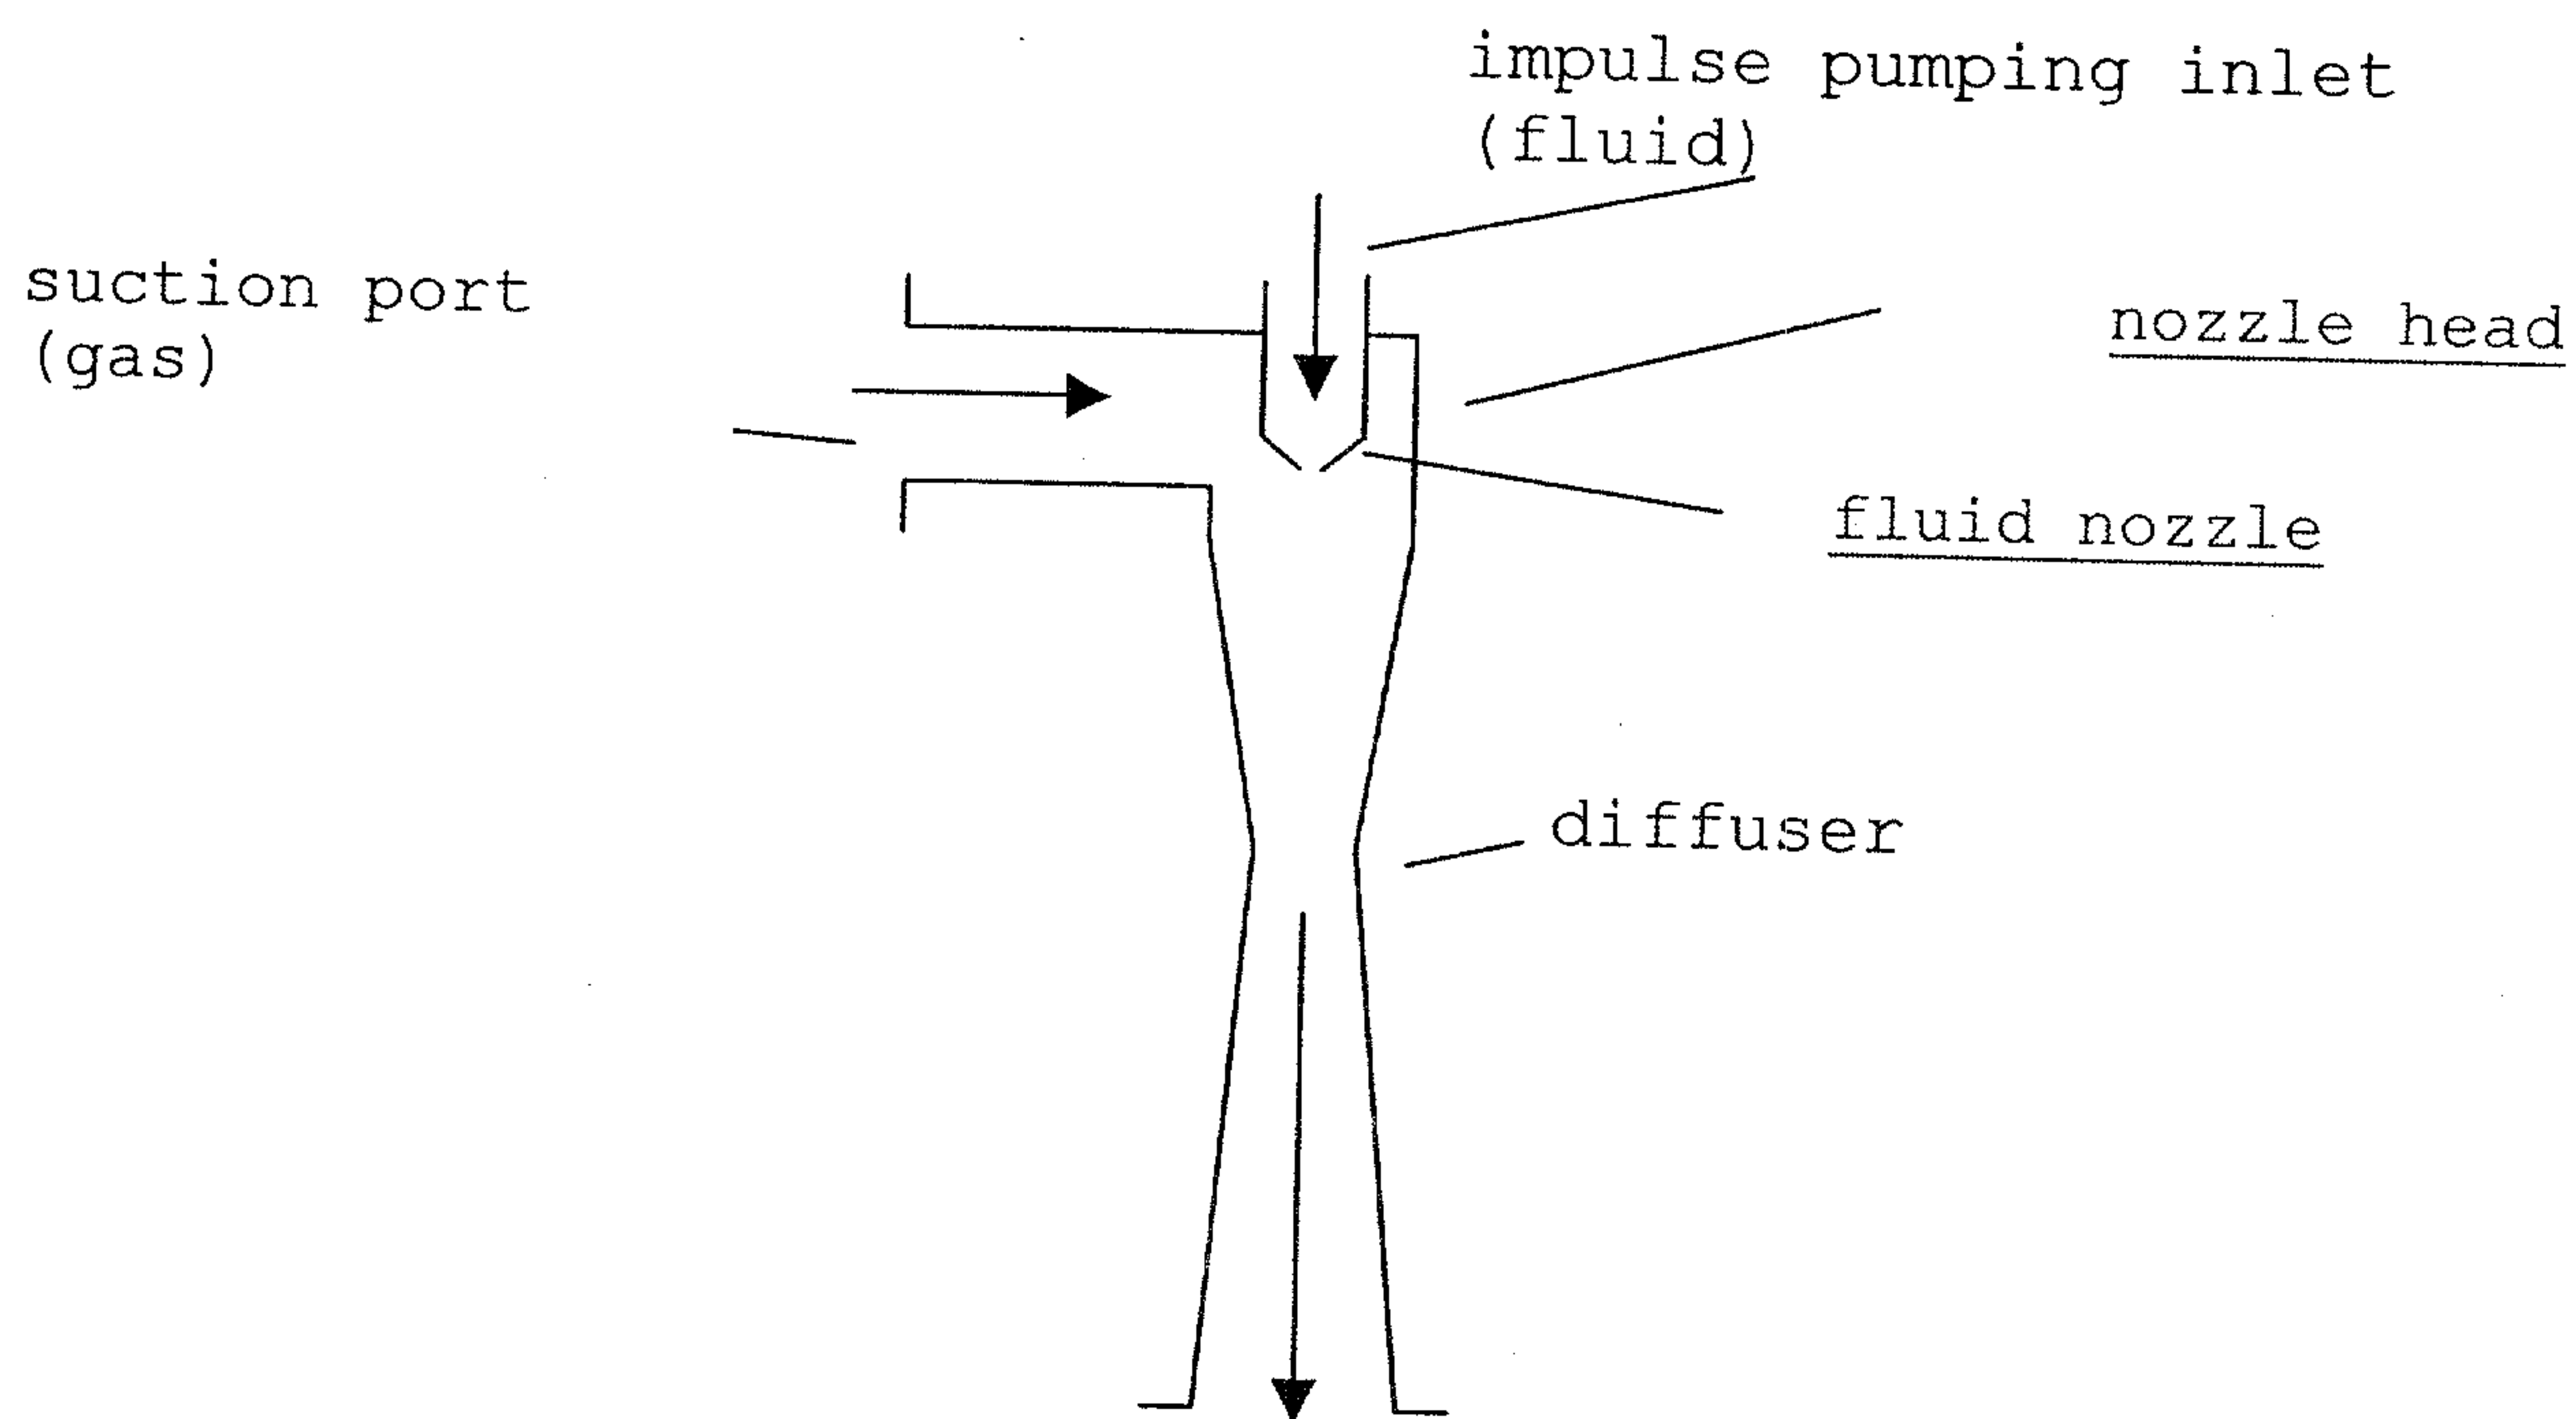


Marks & Clerk

Crompton GmbH

Figure 3

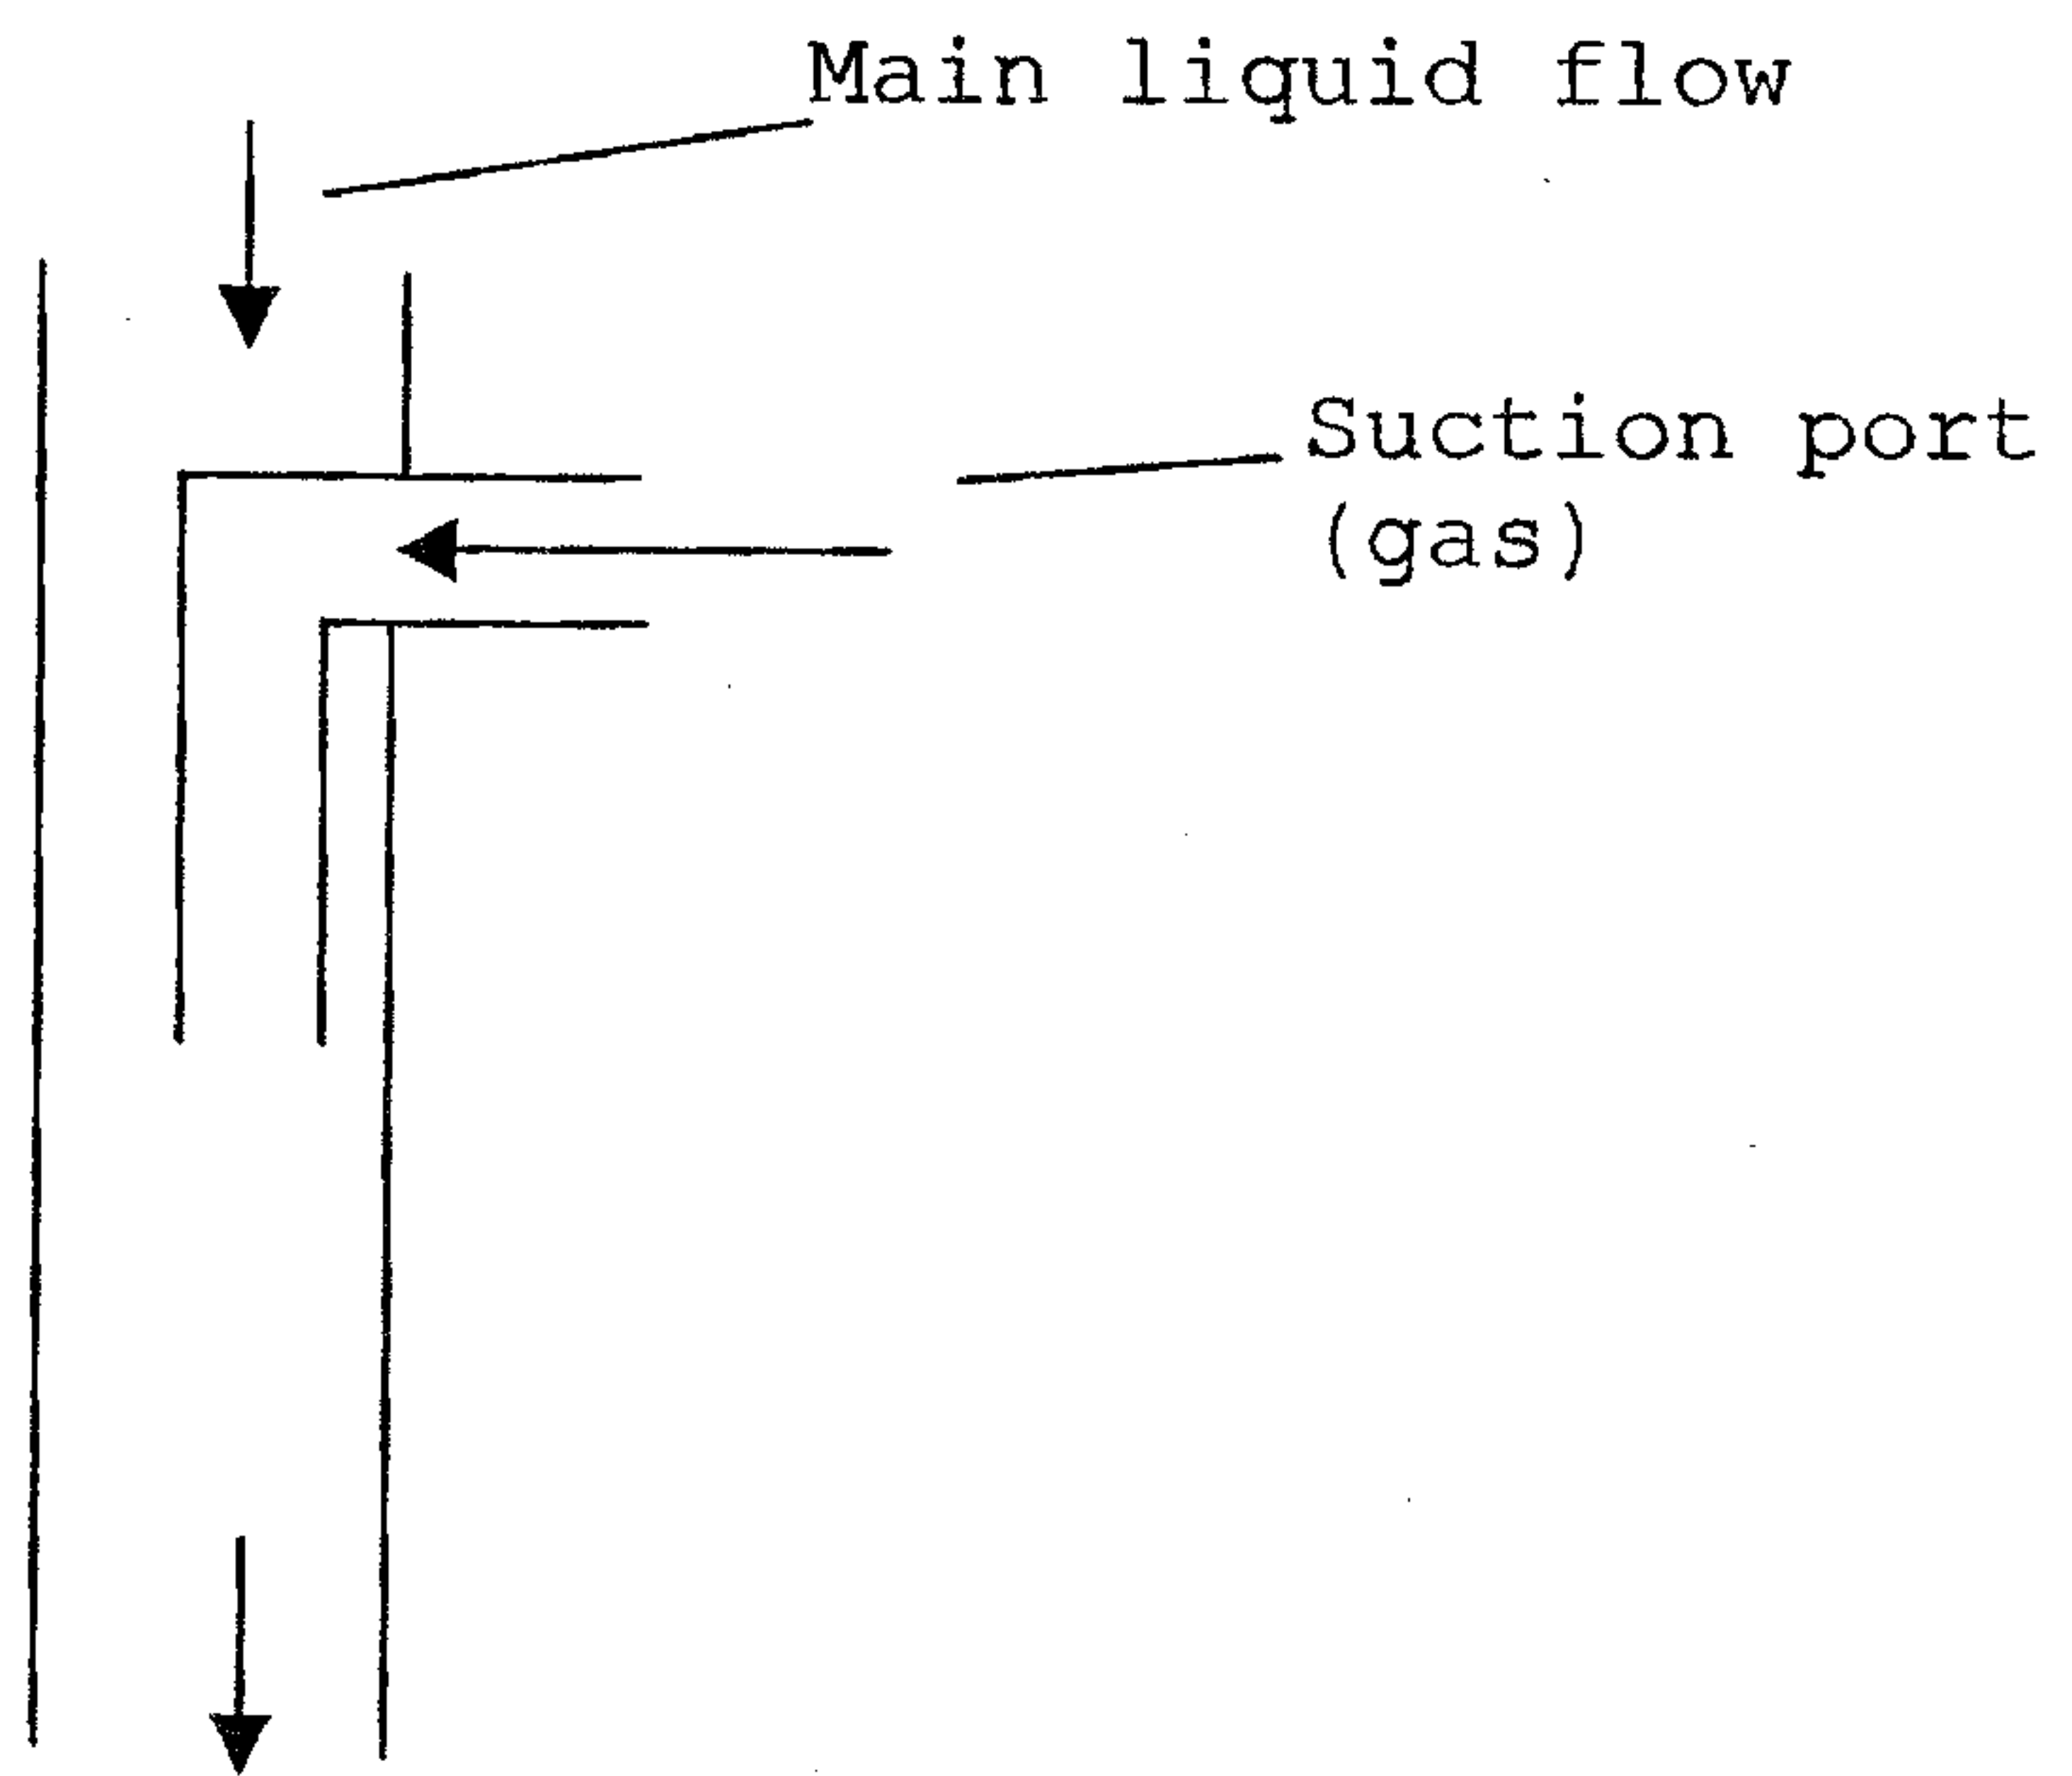

Mark & Clerk

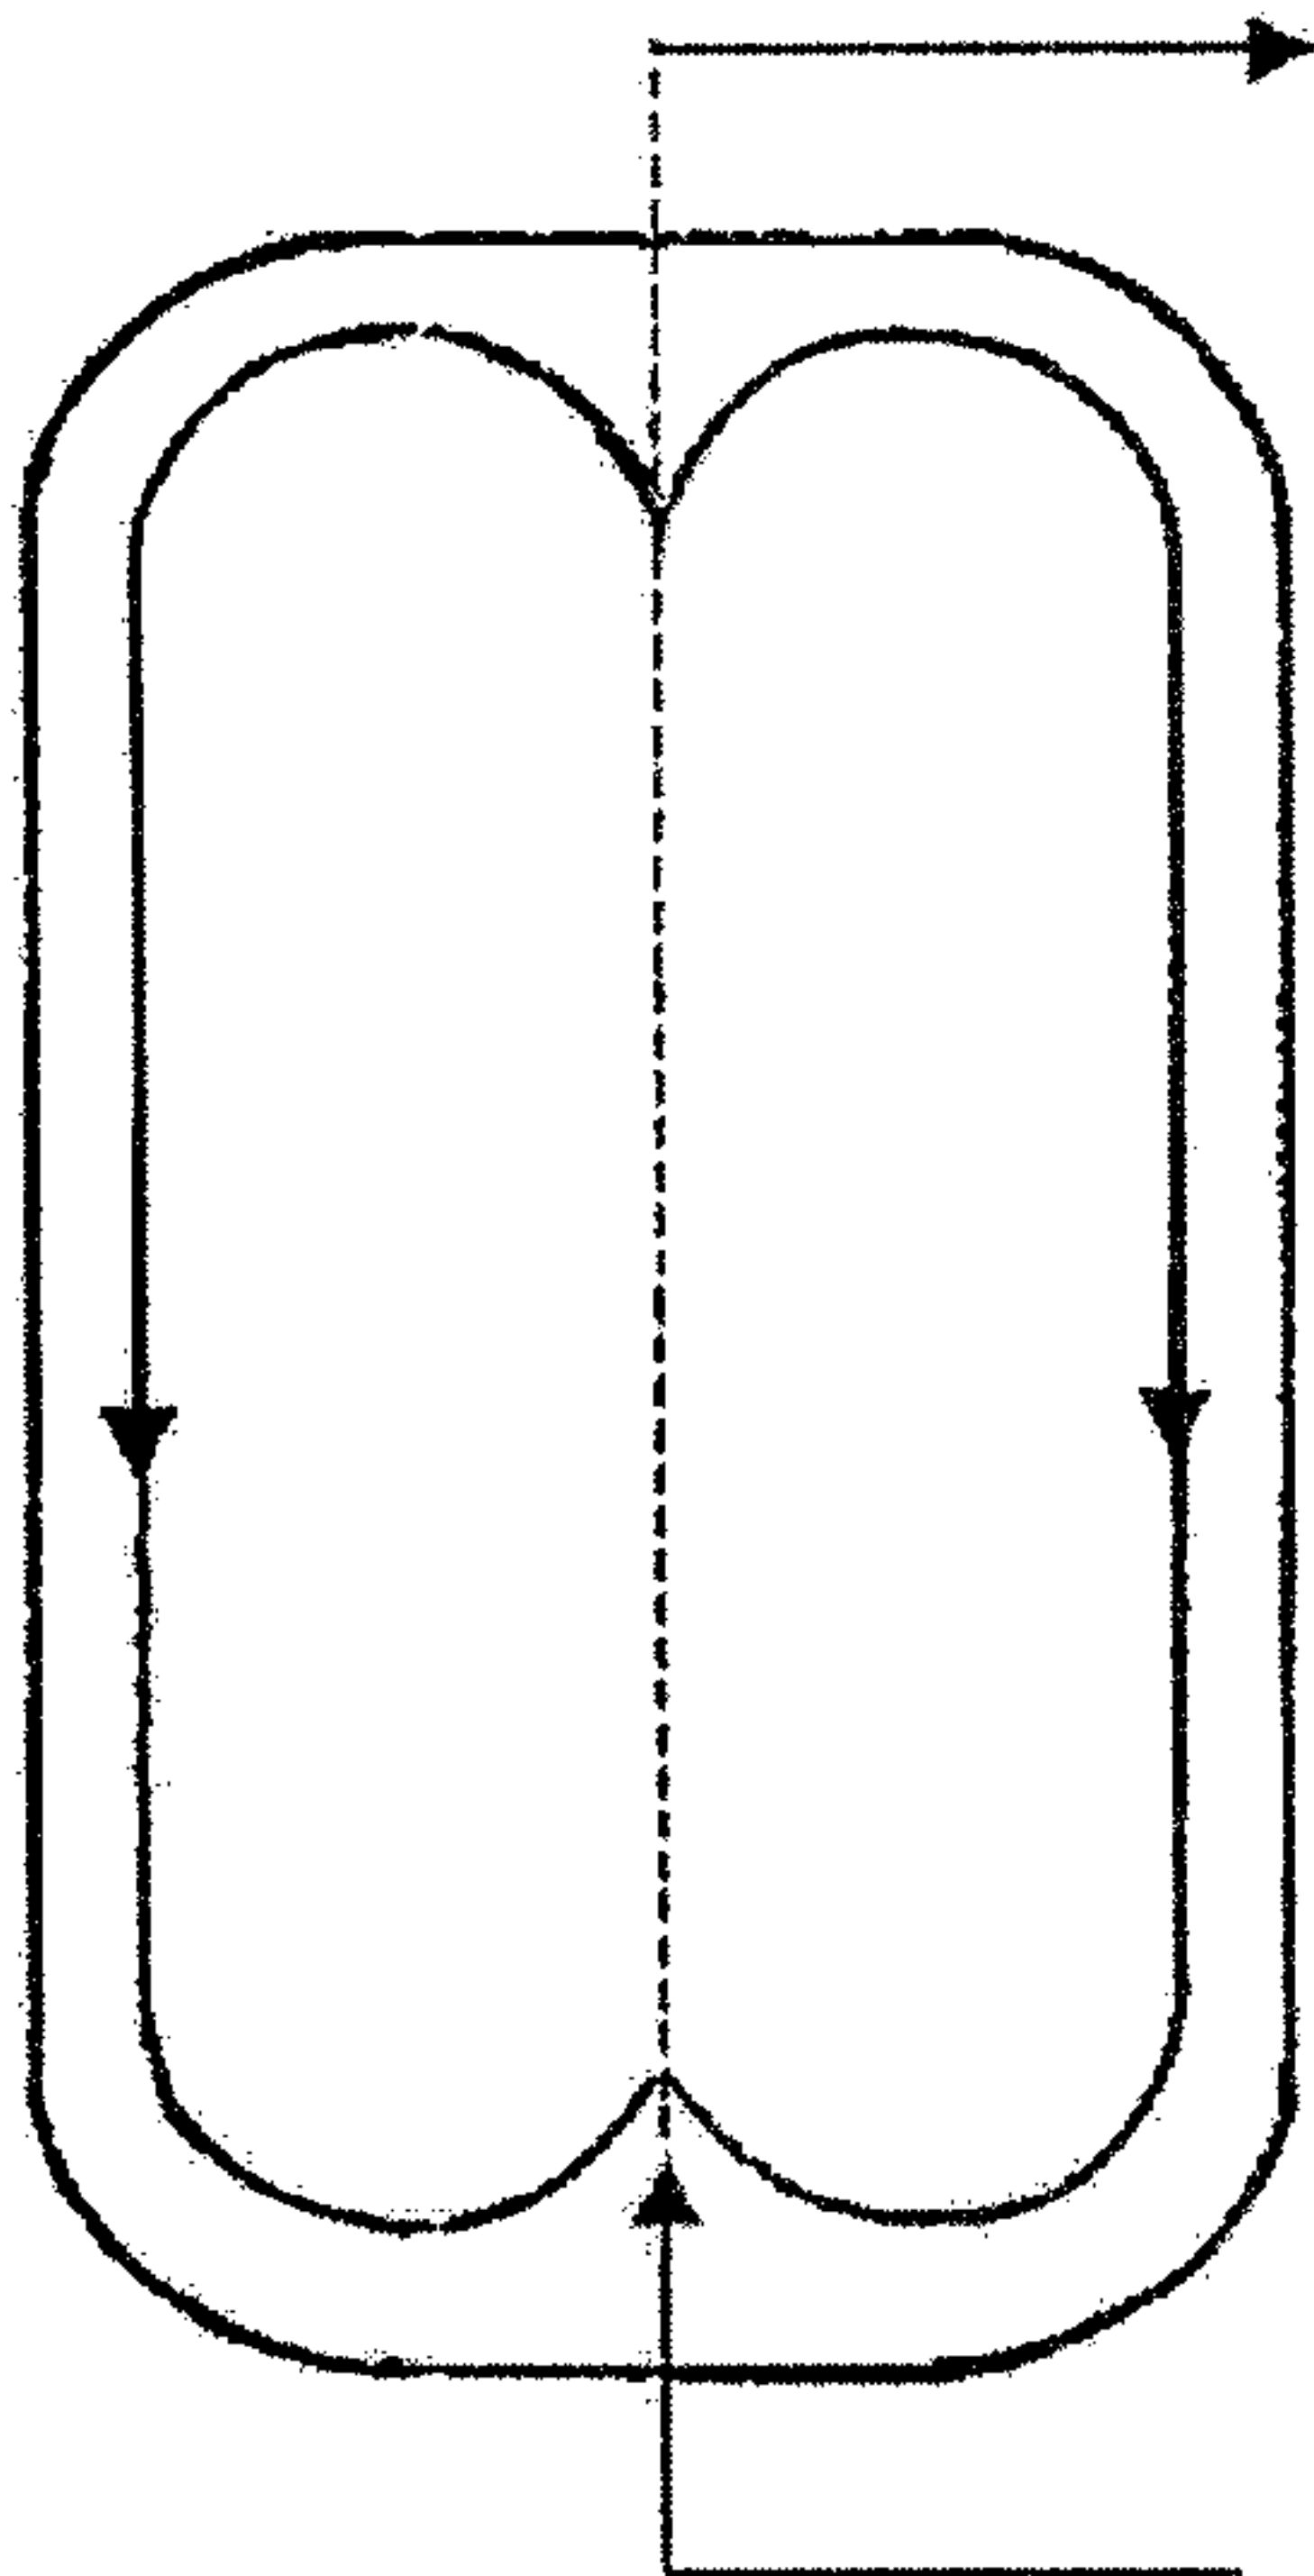

product

educt (s)