

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number  
**WO 03/082997 A1**

(51) International Patent Classification<sup>7</sup>: **C09D 175/04**,  
C08G 18/28, 18/08, 18/34, 18/73, 18/10

(21) International Application Number: PCT/US03/03215

(22) International Filing Date: 4 February 2003 (04.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/106,616 26 March 2002 (26.03.2002) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: **FAN, Wayne, W.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **MARTIN, Steven, J.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **QIU, Zai-Ming**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **TERRAZAS, Michael, S.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **COTE, Linda, G.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **JOHNSON, Mitchell, T.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **LIEN, Larry, A.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: **FAGAN, Lisa, M.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE

(utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

**Published:**

- *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: URETHANE-BASED STAIN-RELEASE COATINGS

(57) Abstract: This invention relates to chemical compositions comprising one or more urethaneoligomers of at least two repeating units selected from the group consisting of fluorine-containing urethane oligomers and long-chain hydrocarbon-containing urethane oligomers. These urethane oligomers comprise the reaction product of (a) one or more polyfunctional isocyanate compounds; (b) one or more polyols; (c) one or more monoalcohols selected from the group consisting of fluorochemical monoalcohols, optionally substituted long-chain hydrocarbon monoalcohols, and mixtures thereof; (d) one or more silanes; and optionally (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group. The chemical compositions of the present invention can be applied as coatings and these coatings can impart stain-release characteristics and resist being worn-off due to wear and abrasion.



WO 03/082997 A1

## Urethane-Based Stain-Release Coatings

### 5     Field of the Invention

          This invention relates to chemical compositions comprising one or more urethane oligomers and coating compositions comprising at least one solvent and the chemical compositions of the present invention. When applied as a coating, these urethane-based chemical compositions impart durable stain-release characteristics. This invention also  
10 relates to articles comprising a substrate and on this substrate is a cured coating derived from the coating compositions of the present invention. The cured coating can impart stain-release characteristics to the substrate and resist being worn-off due to wear and abrasion. In another aspect, this invention relates to a process for imparting stain-release characteristics to substrates.

15

### Background of the Invention

          The use of certain fluorochemical compositions on fibers and fibrous substrates, such as textiles, paper, and leather, to impart oil- and water-repellency and soil- and stain-resistance is well known in the art. See, for example, Banks, Ed., Organofluorine  
20 Chemicals and Their Industrial Applications, Ellis Horwood Ltd., Chichester, England, 1979, pp. 226-234. Such fluorochemical compositions include, for example, fluorochemical guanidines (U.S. Pat. No. 4,540,497, Chang et al.), compositions of cationic and non-cationic fluorochemicals (U.S. Pat. No. 4,566,981, Howells), compositions containing fluorochemical carboxylic acid and epoxidic cationic resin (U.S.  
25 Pat. No. 4,426,466, Schwartz), fluoroaliphatic carbodiimides (U.S. Pat. No. 4,215,205, Landucci), fluoroaliphatic alcohols (U.S. Pat. No. 4,468,527, Patel), fluorine-containing addition polymers, copolymers, and macromers (U.S. Pat. Nos. 2,803,615; 3,068,187; 3,102,103; 3,341,497; 3,574,791; 3,916,053; 4,529,658; 5,216,097; 5,276,175; 5,725,789; 6,037,429), fluorine-containing phosphate esters (U.S. Pat. Nos. 3,094,547; 5,414,102;  
30 5,424,474), fluorine-containing urethanes (U.S. Pat. Nos. 3,987,182; 3,987,227; 4,504,401; 4,958,039), fluorochemical allophanates (U.S. Pat. Nos. 4,606,737)

fluorochemical biurets (U.S. Pat. Nos. 4,668,406), fluorochemical oxazolidinones (U.S. Pat. No. 5,025,052), and fluorochemical piperazines (U.S. Pat. No. 5,451,622).

Certain of these fluorochemical compositions, such as the fluorine-containing addition copolymers of U.S. Pat. No. 6,037,429, may be used on hard surfaces, including for example, ceramics, stone, masonry, wood. U. S. Pat. Nos. 5,414,102 and 5,424,474 suggest that certain fluorine-containing phosphate esters can be used on hard surfaces, such as, ceramics, stone, masonry, wood, and plastics to repel water, grease, oil, and dirt. These previously known fluorochemical compositions typically have been coated on hard substrates by means of aqueous emulsions.

In coating on hard surfaces, durability of the coating of fluorochemical compositions is a concern. In many cases the fluorochemical compositions exhibit poor durability because the majority of the coated hard surface area is exposed to wear and abrasion from use, cleaning, and the elements. Due to this exposure, the coated composition can be worn-off leaving the hard surface unprotected. Certain fluorine-containing urethanes have been found to provide superior abrasion durability and especially good water- and oil-repellency and stainproofing properties (U.S. Pat. No. 4,504,401). These previously known fluorine-containing urethane compositions can be solvent or water-based. In practice, all of the previously known fluorine-containing urethanes rely on perfluoroalkyl groups having an average of eight carbon atoms to achieve the desired repellency and stainproofing properties.

Although urethanes have been found to be especially durable, improved long-term durability is still needed for many hard surface applications. In particular in the widely used siliceous surfaces, such as ceramic and masonry, a coating composition is needed that imparts longer lasting repellency and stain-proofing and is capable of withstanding repeated abrading and washing.

As indicated above, both solvent and water based fluorine-containing urethane compositions have been used to provide water- and oil-repellency to hard surfaces. Since organic solvents pose health, safety, and environmental concerns, the water-based compositions are particularly desirable. However, the previously known compositions are typically aqueous dispersions or emulsions, not solutions; therefore, they require a high temperature cure to impart good repellency properties. In many cases, for example in floors and walls, high temperature curing is not practical or possible. For this reason there


is a continuing need for urethanes that do not require costly and energy consuming high temperature cure conditions to impart good repellency properties. Therefore, urethane compositions, including those containing fluorine, that display increased water solubility are needed to eliminate the need for high temperature cure conditions, as well as to increase the ease of preparation and to provide more stable aqueous solutions.

### **Summary of the Invention**

The inventors recognized the need for shelf-stable chemical compositions, including those containing fluorine, that can successfully impart long term durability, uniform oil- and water-repellency and soil- and stain-resistance. These chemical compositions should be water and organic solvent soluble and should not require high temperatures for curing.

In one aspect, this invention relates to chemical compositions comprising one or more urethane oligomers of at least two repeating units selected from the group consisting of fluorine-containing urethane oligomers and long-chain hydrocarbon-containing urethane oligomers. These urethane oligomers comprise the reaction product of (a) one or more polyfunctional isocyanate compounds; (b) one or more polyols; (c) one or more monoalcohols selected from the group consisting of fluorochemical monoalcohols, optionally substituted long-chain hydrocarbon monoalcohols, and mixtures thereof; (d) one or more silanes; and optionally (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

The silanes are of the following formula (I):



wherein:

X is  $-\text{NH}_2$ ;  $-\text{SH}$ ;  $-\text{OH}$ ;  $-\text{N}=\text{C}=\text{O}$ ; or  $-\text{NRH}$  where R is a phenyl, straight or branched aliphatic, alicyclic, or aliphatic ester group;

$\text{R}^1$  is an alkylene, heteroalkylene, aralkylene, or heteroaralkylene bridging group;

and

each Y is independently a hydroxyl; a hydrolyzable moiety selected from the group consisting of alkoxy, acyloxy, heteroalkoxy, heteroacyloxy, halo, and oxime; or a non-

hydrolyzable moiety selected from the group consisting of phenyl, alicyclic, straight-chain aliphatic, and branched-chain aliphatic, wherein at least one Y is a hydrolyzable moiety.

As used herein, the term "oligomer" means a polymer molecule that consists of at least two repeating (polymerized) units, but up to only a few (for example, from 2 to about 20) repeating units. Each repeating unit comprises a urethane group that is derived or derivable from the reaction of at least one polyfunctional isocyanate compound and at least one polyol. The oligomer is terminated with (i) one or more perfluoroalkyl groups, one or more perfluoroheteroalkyl groups, or one or more long-chain hydrocarbyl groups; and (ii) one or more silyl groups.

The chemical compositions of the present invention, comprising one or more urethane oligomers, impart stain-release characteristics and exhibit durability (i.e. they resist being worn-off) when exposed to wear and abrasion from use, cleaning, and the elements. Therefore, these compositions can be applied as coatings to a wide variety of substrates, for example, by topical application, to impart durable stain-release properties to the substrates. When applied as a coating, the chemical compositions of the present invention can provide a uniform film. Applied as a coating, the chemical compositions of the present invention do not change the appearance of the substrate to which they are applied. Even though the urethane oligomers are of relatively high molecular weight, the chemical compositions of the present invention provide durable stain-release properties comparable to or better than those imparted by the corresponding lower molecular weight compositions containing only the fluorine-containing or long-chain hydrocarbon urethane compound with no repeating unit. In addition, with the chemical compositions of the present invention, there is no need for high temperature curing; they can be cured (i.e., dried) at ambient temperature.

Certain preferred embodiments of the chemical compositions of the present invention include chemical compositions derived from one or more water-solubilizing compounds comprising one more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group. These preferred embodiments exhibit water solubility, while at the same time providing surprisingly good stain-release properties. These embodiments include, for example, those chemical compositions comprising a urethane oligomer containing one or more solubilizing groups. The solubilizing groups include carboxylate, sulfate, sulfonate, phosphate, phosphonate, ammonium, quaternary

ammonium, and the like. These embodiments are particularly well suited for uniform and continuous topical treatments on a variety of substrates, without the need for high temperature curing. This benefit is of particular importance for protecting very large and high mass substrates which are very difficult to heat, such as stone and masonry, and in situations where devices for high temperature cure are not available.

Certain other preferred embodiments of the chemical compositions of the present invention include those compositions comprising terminal  $R_f$  groups having from two to six carbons, preferably from three to five carbons, and more preferably four carbons. Even with  $R_f$  groups that are relatively short (i.e. less than eight carbons), these chemical compositions, surprisingly, exhibit excellent stain-release. Although compositions comprising lower fluorine content are less expensive,  $R_f$  groups shorter than eight carbons typically have been overlooked by those of skill in the art because they have been known to impart inferior oil- and water-repellency and stain resistance.

Many previously known polymeric, fluorochemical surfactants contain perfluorooctyl moieties. These surfactants ultimately degrade to perfluorooctyl-containing compounds. It has been reported that certain perfluorooctyl-containing compounds may tend to bio-accumulate in living organisms; this tendency has been cited as a potential concern regarding some fluorochemical compounds. For example, see U.S. Patent No. 5,688,884 (Baker et al.). As a result, there is a desire for fluorine-containing compositions which are effective in providing desired surfactant properties, and which eliminate more effectively from the body (including the tendency of the composition and its degradation products).

It is expected that the oligomeric, fluorochemical compositions of the present invention, which contain perfluorobutyl moieties, when exposed to biologic, thermal, oxidative, hydrolytic, and photolytic conditions found in the environment, will break down to various degradation products. For example, compositions comprising perfluorobutylsulfonamido moieties are expected to degrade, at least to some extent, ultimately to perfluorobutylsulfonate salts. It has been surprisingly found that perfluorobutylsulfonate, tested in the form of its potassium salt, eliminates from the body much more effectively than perfluorohexylsulfonate and even more effectively than perfluorooctylsulfonate. Accordingly, it is believed that such surprising effective elimination from the body will be found with perfluorobutylcarbonate, which is expected

to be the ultimate degradation product of compositions comprised of perfluorobutylcarbonyl and perfluorobutoalkyl moieties.

Other preferred embodiments of the chemical composition of the present invention include those compositions comprising terminal long-chain hydrocarbon groups having 10 to 18 carbons. Long-chain hydrocarbon groups typically have been known to impart poor oil repellency; however, the chemical compositions of the present invention comprising terminal long-chain hydrocarbon groups having 10 to 18 carbons impart good stain-release properties. For water solubility and performance, long-chain hydrocarbon groups having chain lengths of 12 to 16 carbons are preferred, 12 to 14 carbons being more preferred, and 12 carbons being most preferred.

Another embodiment of the present invention relates to a coating composition comprising a solution comprising the chemical composition of the present invention and a solvent. In this embodiment, it is important that the chemical composition be dissolved in the solvent. When applied to a substrate, this coating composition provides a uniform distribution of the chemical composition on the substrate without altering the appearance of the substrate. A high temperature cure is not required to provide this coating; the coating composition can be cured (i.e. dried) at ambient temperatures.

This invention also relates to an article comprising a substrate having one or more surfaces and on one or more surfaces of this substrate is a cured coating derived from at least one solvent and a chemical composition of the present invention. After application and curing of the chemical composition, the substrate displays durable stain-release properties.

This invention further relates to a method for imparting stain-release characteristics to a substrate, having one or more surfaces, comprising the steps of:

- (a) applying the coating composition of the present invention onto one or more surfaces of the substrate and
- (b) allowing the coating composition to cure (i.e. dry).

### **Definitions**

Unless otherwise stated, the following terms used in the specification and claims have the meanings given below:

"Acyloxy" means a radical  $--OC(O)R$  where R is, alkyl, alkenyl, and cycloalkyl, e.g., acetoxy, 3,3,3-trifluoroacetoxy, propionyloxy, and the like.

"Alkoxy" means a radical  $--OR$  where R is an alkyl group as defined below, e.g., methoxy, ethoxy, propoxy, butoxy, and the like.

5 "Alkyl" means a linear saturated monovalent hydrocarbon radical having from one to about twelve carbon atoms or a branched saturated monovalent hydrocarbon radical having from three to about twelve carbon atoms, e.g., methyl, ethyl, 1-propyl, 2-propyl, pentyl, and the like.

10 "Alkylene" means a linear saturated divalent hydrocarbon radical having from one to about twelve carbon atoms or a branched saturated divalent hydrocarbon radical having from three to about twelve carbon atoms, e.g., methylene, ethylene, propylene, 2-methylpropylene, pentylene, hexylene, and the like.

"Aralkylene" means an alkylene radical defined above with an aromatic group attached to the alkylene radical, e.g., benzyl, pyridylmethyl, 1-naphthylethyl, and the like.

15 "Cured chemical composition" means that the chemical composition is dried or solvent has evaporated from the chemical composition at approximately ambient temperature (15-35°C) until dryness, up to approximately 24 hours.

20 "Fibrous substrate" means materials comprised of synthetic fibers such as wovens, knits, nonwovens, carpets, and other textiles; and materials comprised of natural fibers such as cotton, paper, and leather.

"Fluorocarbon monoalcohol" means a compound having one hydroxyl group and a perfluoroalkyl or a perfluoroheteralkyl group, e.g.  $C_4F_9SO_2N(CH_3)CH_2CH_2OH$ ,  $C_4F_9CH_2CH_2OH$ ,  $C_2F_5O(C_2F_4O)_3CF_2CONHC_2H_4OH$ ,  $c-C_6F_{11}CH_2OH$ , and the like.

25 "Hard substrate" means any rigid material that maintains its shape, e.g., glass, ceramic, concrete, natural stone, wood, metals, plastics, and the like.

"Heteroacyloxy" has essentially the meaning given above for acyloxy except that one or more heteroatoms (i.e. oxygen, sulfur, and/or nitrogen) may be present in the R group and the total number of carbon atoms present may be up to 50, e.g.,  $CH_3CH_2OCH_2CH_2C(O)O-$ ,  $C_4H_9OCH_2CH_2OCH_2CH_2C(O)O-$ ,  $CH_3O(CH_2CH_2O)_nCH_2CH_2C(O)O-$ , and the like.

"Heteroalkoxy" has essentially the meaning given above for alkoxy except that one or more heteroatoms (i.e. oxygen, sulfur, and/or nitrogen) may be present in the alkyl



chain and the total number of carbon atoms present may be up to 50, e.g.

$\text{CH}_3\text{CH}_2\text{OCH}_2\text{CH}_2\text{O}-$ ,  $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{O}-$ ,  $\text{CH}_3\text{O}(\text{CH}_2\text{CH}_2\text{O})_n\text{H}$ , and the like.

“Heteroalkyl” has essentially the meaning given above for alkyl except that one or more heteroatoms (i.e. oxygen, sulfur, and/or nitrogen) may be present in the alkyl chain, these heteroatoms being separated from each other by at least one carbon, e.g.,  $\text{CH}_3\text{CH}_2\text{OCH}_2\text{CH}_2-$ ,  $\text{CH}_3\text{CH}_2\text{OCH}_2\text{CH}_2\text{OCH}(\text{CH}_3)\text{CH}_2-$ ,  $\text{C}_4\text{F}_9\text{CH}_2\text{CH}_2\text{SCH}_2\text{CH}_2-$ , and the like.

“Heteroalkylene” has essentially the meaning given above for alkylene except that one or more heteroatoms (i.e. oxygen, sulfur, and/or nitrogen) may be present in the alkylene chain, these heteroatoms being separated from each other by at least one carbon, e.g.,  $-\text{CH}_2\text{OCH}_2\text{O}-$ ,  $-\text{CH}_2\text{CH}_2\text{OCH}_2\text{CH}_2-$ ,  $-\text{CH}_2\text{CH}_2\text{N}(\text{CH}_3)\text{CH}_2\text{CH}_2-$ ,  $-\text{CH}_2\text{CH}_2\text{SCH}_2\text{CH}_2-$ , and the like.

“Heteroaralkylene” means an aralkylene radical defined above except that catenated oxygen, sulfur, and/or nitrogen atoms may be present, e.g., phenyleneoxymethyl, phenyleneoxyethyl, benzyleneoxymethyl, and the like.

“Halo” means fluoro, chloro, bromo, or iodo, preferably fluoro and chloro.

“Long-chain hydrocarbon monoalcohol” means a compound having one hydroxyl group and a long chain hydrocarbon group having 10 to 18 carbons which may be saturated, unsaturated, or aromatic, and may optionally be substituted with one or more chlorine, bromine, trifluoromethyl, or phenyl groups, e.g.  $\text{CH}_3(\text{CH}_2)_{10}\text{CH}_2\text{OH}$ ,  $\text{CH}_3(\text{CH}_2)_{14}\text{CH}_2\text{OH}$ , and the like.

“Oligomer” means a polymer molecule consisting of only a few (for example, from 2 to about 20) repeat (polymerized) units.

“Perfluoroalkyl” has essentially the meaning given above for “alkyl” except that all or essentially all of the hydrogen atoms of the alkyl radical are replaced by fluorine atoms and the number of carbon atoms is from 3 to about 8, e.g. perfluoropropyl, perfluorobutyl, perfluorooctyl, and the like.

“Perfluoroalkylene” has essentially the meaning given above for “alkylene” except that all or essentially all of the hydrogen atoms of the alkylene radical are replaced by fluorine atoms, e.g., perfluoropropylene, perfluorobutylene, perfluorooctylene, and the like.

“Perfluoroheteroalkyl” has essentially the meaning given above for “heteroalkyl” except that all or essentially all of the hydrogen atoms of the heteroalkyl radical are

replaced by fluorine atoms and the number of carbon atoms is from 3 to about 100, e.g.  $\text{CF}_3\text{CF}_2\text{OCF}_2\text{CF}_2-$ ,  $\text{CF}_3\text{CF}_2\text{O}(\text{CF}_2\text{CF}_2\text{O})_3\text{CF}_2\text{CF}_2-$ ,  $\text{C}_3\text{F}_7\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_m\text{CF}(\text{CF}_3)\text{CF}_2-$  where m is from about 10 to about 30, and the like.

“Perfluoroheteroalkylene” has essentially the meaning given above for “heteroalkylene” except that all or essentially all of the hydrogen atoms of the heteroalkylene radical are replaced by fluorine atoms, and the number of carbon atoms is from 3 to about 100, e.g.,  $-\text{CF}_2\text{OCF}_2-$ ,  $-\text{CF}_2\text{O}(\text{CF}_2\text{O})_n(\text{CF}_2\text{CF}_2\text{O})_m\text{CF}_2-$ , and the like.

“Perfluorinated group” means an organic group wherein all or essentially all of the carbon bonded hydrogen atoms are replaced with fluorine atoms, e.g. perfluoroalkyl, perfluoroheteroalkyl, and the like.

“Polyfunctional isocyanate compound” means a compound containing two or more isocyanate radicals,  $-\text{NCO}$ , attached to a multivalent organic group, e.g. hexamethylene diisocyanate, the biuret and iscyanurate of hexamethylene diisocyanate, and the like.

“Polyol” means an organic compound or polymer with an average of at least about 2 primary or secondary hydroxyl groups per molecule, e.g. ethylene glycol, propylene glycol, 1,6-hexanediol, and the like.

“Porous” means capable of imbibing a liquid.

“Polyalkylsiloxane diol” means a molecule having two hydroxyl groups and a repeating unit with the structure,  $-(\text{Si}(\text{R})_2\text{O})-$ , e.g.  $\text{HOR}[\text{Si}(\text{CH}_3)_2\text{O}]_n\text{SiROH}$ , wherein each R is independently straight or branched chain alkyl.

“Polyarylsiloxane diol” means a molecule having two hydroxyl groups and a repeating unit with the structure,  $-(\text{Si}(\text{Ar})_2\text{O})-$ , e.g.  $\text{HOR}[\text{Si}(\text{C}_6\text{H}_5)_2\text{O}]\text{SiROH}$ , wherein each R is independently straight or branched chain alkyl.


“Silane group” means a group comprising silicon to which at least one hydrolyzable group is bonded, e.g.  $-\text{Si}(\text{OCH}_3)_3$ ,  $-\text{Si}(\text{OOCCH}_3)_2\text{CH}_3$ ,  $-\text{Si}(\text{Cl})_3$ , and the like.

### **Detailed Description of the Invention**

The chemical compositions of the present invention comprise one or more urethane oligomers having at least two repeating units selected from the group consisting of fluorine-containing urethane oligomers and long-chain hydrocarbon-containing urethane oligomers. This oligomer comprises the reaction product of (a) one or more polyfunctional isocyanate compounds; (b) one or more polyols; (c) one or more

monoalcohols selected from the group consisting of fluorochemical monoalcohols, optionally substituted long-chain hydrocarbon monoalcohols, and mixtures thereof; (d) one or more silanes; and optionally (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

The silanes are of the following formula (I):



wherein:

X is  $-\text{NH}_2$ ;  $-\text{SH}$ ;  $-\text{OH}$ ;  $-\text{N}=\text{C}=\text{O}$ ; or  $-\text{NRH}$  where R is a phenyl, straight or branched aliphatic, alicyclic, or aliphatic ester group;

$\text{R}^1$  is an alkylene, heteroalkylene, aralkylene, or heteroaralkylene group; and

each Y is independently a hydroxyl; a hydrolyzable moiety selected from the group consisting of alkoxy, acyloxy, heteroalkoxy, heteroacyloxy, halo, and oxime; or a non-hydrolyzable moiety selected from the group consisting of phenyl, alicyclic, straight-chain aliphatic, and branched-chain aliphatic, wherein at least one Y is a hydrolyzable moiety.

The oligomer comprises at least two repeating (polymerized) units. Each repeating unit comprises a urethane group that is derived or derivable from the reaction of at least one polyfunctional isocyanate compound and at least one polyol. The oligomer is terminated with (i) one or more perfluoroalkyl groups, one or more perfluoroheteroalkyl groups, or one or more long-chain hydrocarbyl groups; and (ii) one or more silyl groups. The oligomer can further comprise one or more water-solubilizing groups, these solubilizing groups independently being pendant from the repeating unit or terminal. The oligomer also can further comprise one or more fluorine-containing groups pendant from the repeating unit, these fluorine-containing groups independently being perfluoroalkyl or perfluoroheteroalkyl groups. Additionally, the oligomer can comprise one or more perfluoroheteroalkylene groups within the backbone of the repeating unit.

In one preferred embodiment, the composition of the present invention comprises a mixture of urethane molecules arising from the reaction of (a) one or more polyfunctional isocyanate compounds, (b) one or more polyols, (c) one or more fluorochemical monoalcohols, and (d) one or more silanes as described above.



In another preferred embodiment, the composition of the present invention comprises a mixture of urethane molecules arising from the reaction of (a) one or more

polyfunctional isocyanate compounds, (b) one or more polyols, (c) one or more fluorochemical monoalcohols, (d) one or more silanes as described above, and (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group. The water-solubilizing compounds of the present invention can be represented in general by "W-H", wherein W represents the residue of the water-solubilizing compound comprising one or more water-solubilizing groups and H represents the active hydrogen(s).

In a further preferred embodiment, the composition of the present invention comprises a mixture of urethane molecules arising from the reaction of (a) one or more polyfunctional isocyanate compounds, (b) one or more polyols, (c) one or more optionally substituted long-chain hydrocarbon monoalcohols, (d) one or more silanes as described above, and (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

The composition can further contain fluorine-containing and or long-chain hydrocarbon-containing urethane compounds having fewer than two repeating or repeatable units. The mixture of urethane molecules preferably comprises urethane molecules having a varying number of repeating units, including zero, one, two, and more repeating units. This mixture of urethane molecules comprising a varying number of repeating units allows simple blending of the above components in preparing the fluorochemical composition.

Preferred classes of urethane oligomers that may be present are represented by the following formulas (III) through (VI):



wherein:

$R_fZR^2-$  is a residue of at least one of the fluorochemical monoalcohols;

$R_f$  is a perfluoroalkyl group having 3 to about 8 carbon atoms, or a perfluoroheteroalkyl group having 3 to about 50 carbon atoms;

Z is a covalent bond, sulfonamido ( $-SO_2NR-$ ), or carboxamido ( $-CONR-$ ) where R is hydrogen or alkyl;

$R^1$  is an alkylene, heteroalkylene, aralkylene, or heteroaralkylene group;

$R^2$  is a divalent straight or branched chain alkylene, cycloalkylene, or heteroalkylene group of 1 to 14 carbon atoms, preferably 1 to 8 carbon atoms, more preferably 1 to 4 carbon atoms, and most preferably two carbon atoms, and preferably  $R^2$  is alkylene or heteroalkylene of 1 to 14 carbon atoms;

Q is a multi-valent organic group which is a residue of the polyfunctional isocyanate compound;

$R^3$  is a divalent organic group which is a residue of the polyol and may be substituted with or contain (i) water-solubilizing groups selected from the group consisting of carboxylate, sulfate, sulfonate, phosphonate, ammonium, quaternary ammonium, and mixtures thereof and (ii) perfluorinated groups;

$X'$  is  $-O-$ ,  $-S-$ , or  $-N(R)-$ , wherein R is hydrogen or alkyl;

$R^4$  is an optionally substituted long-chain hydrocarbon derived from the long-chain hydrocarbon monoalcohol;

each Y is independently a hydroxy; a hydrolyzable moiety selected from the group consisting of alkoxy, acyloxy, heteroalkoxy, heteroacyloxy, halo, and oxime; or a non-hydrolyzable moiety selected from the group consisting of phenyl, alicyclic, straight-chain aliphatic, and branched-chain aliphatic, wherein at least one Y is a hydrolyzable moiety.

A is selected from the group consisting of  $R_fZR^2-OCONH-$ ,  $(Y)_3SiR^1XCONH-$ ,  $(Y)_3SiR^1NHCOOR^3OCONH-$ , and  $W-CONH-$ , wherein W is a residue of the water-solubilizing compound comprising one or more water-solubilizing groups;

m is an integer from 0 to 2; and

n, which is the number of repeating units, is an integer from 2 to 10.

Polyfunctional isocyanate compounds useful in the present invention comprise isocyanate radicals attached to the multivalent organic group, Q, which can comprise a multivalent aliphatic, alicyclic, or aromatic moiety; or a multivalent aliphatic, alicyclic or aromatic moiety attached to a biuret, an isocyanurate, or a uretdione, or mixtures thereof. Preferred polyfunctional isocyanate compounds contain two or three  $-NCO$  radicals. Compounds containing two  $-NCO$  radicals are comprised of divalent aliphatic, alicyclic, araliphatic, or aromatic moieties to which the  $-NCO$  radicals are attached. Preferred compounds containing three  $-NCO$  radicals are comprised of isocyanatoaliphatic,

isocyanatoalicyclic, or isocyanatoaromatic, monovalent moieties, which are attached to a biuret or an isocyanurate.

Representative examples of suitable polyfunctional isocyanate compounds include isocyanate functional derivatives of the polyfunctional isocyanate compounds as defined herein. Examples of derivatives include, but are not limited to, those selected from the group consisting of ureas, biurets, allophanates, dimers and trimers (such as uretdiones and isocyanurates) of isocyanate compounds, and mixtures thereof. Any suitable organic polyisocyanate, such as an aliphatic, alicyclic, araliphatic, or aromatic polyisocyanate, may be used either singly or in mixtures of two or more. The aliphatic polyfunctional isocyanate compounds generally provide better light stability than the aromatic compounds. Aromatic polyfunctional isocyanate compounds, on the other hand, are generally more economical and reactive toward polyols and other poly(active hydrogen) compounds than are aliphatic polyfunctional isocyanate compounds. Suitable aromatic polyfunctional isocyanate compounds include, but are not limited to, those selected from the group consisting of 2,4-toluene diisocyanate (TDI), 2,6-toluene diisocyanate, an adduct of TDI with trimethylolpropane (available as Desmodur™ CB from Bayer Corporation, Pittsburgh, PA), the isocyanurate trimer of TDI (available as Desmodur™ IL from Bayer Corporation, Pittsburgh, PA), diphenylmethane 4,4'-diisocyanate (MDI), diphenylmethane 2,4'-diisocyanate, 1,5-diisocyanato-naphthalene, 1,4-phenylene diisocyanate, 1,3-phenylene diisocyanate, 1-methoxy-2,4-phenylene diisocyanate, 1-chlorophenyl-2,4-diisocyanate, and mixtures thereof.

Examples of useful alicyclic polyfunctional isocyanate compounds include, but are not limited to, those selected from the group consisting of dicyclohexylmethane diisocyanate (H<sub>12</sub>MDI, commercially available as Desmodur™W, available from Bayer Corporation, Pittsburgh, PA), 4,4'-isopropyl-bis(cyclohexylisocyanate), isophorone diisocyanate (IPDI), cyclobutane-1,3-diisocyanate, cyclohexane 1,3-diisocyanate, cyclohexane 1,4-diisocyanate (CHDI), 1,4-cyclohexanebis(methylene isocyanate) (BDI), 1,3-bis(isocyanatomethyl)cyclohexane (H<sub>6</sub>XDI), 3-isocyanatomethyl-3,5,5-trimethylcyclohexyl isocyanate, and mixtures thereof.

Examples of useful aliphatic polyfunctional isocyanate compounds include, but are not limited to, those selected from the group consisting of 1,4-tetramethylene diisocyanate, hexamethylene 1,4-diisocyanate, hexamethylene 1,6-diisocyanate (HDI), 1,12-dodecane

diisocyanate, 2,2,4-trimethyl-hexamethylene diisocyanate (TMDI), 2,4,4-trimethyl-hexamethylene diisocyanate (TMDI), 2-methyl-1,5-pentamethylene diisocyanate, dimer diisocyanate, the urea of hexamethylene diisocyanate, the biuret of hexamethylene 1,6-diisocyanate (HDI) (available as Desmodur<sup>TM</sup> N-100 and N-3200 from Bayer Corporation, Pittsburgh, PA), the isocyanurate of HDI (available as Demodur<sup>TM</sup> N-3300 and Desmodur<sup>TM</sup> N-3600 from Bayer Corporation, Pittsburgh, PA), a blend of the isocyanurate of HDI and the uretdione of HDI (available as Desmodur<sup>TM</sup> N-3400 available from Bayer Corporation, Pittsburgh, PA), and mixtures thereof.

Examples of useful araliphatic polyisocyanates include, but are not limited to, those selected from the group consisting of m-tetramethyl xylylene diisocyanate (m-TMXDI), p-tetramethyl xylylene diisocyanate (p-TMXDI), 1,4-xylylene diisocyanate (XDI), 1,3-xylylene diisocyanate, p-(1-isocyanatoethyl)-phenyl isocyanate, m-(3-isocyanatobutyl)-phenyl isocyanate, 4-(2-isocyanatocyclohexyl-methyl)-phenyl isocyanate, and mixtures thereof.

Preferred polyisocyanates, in general, include those selected from the group consisting of hexamethylene 1,6-diisocyanate (HDI), 1,12-dodecane diisocyanate isophorone diisocyanate, toluene diisocyanate, dicyclohexylmethane 4,4'-diisocyanate, MDI, derivatives of all the aforementioned, including Desmodur<sup>TM</sup> N-100, N-3200, N-3300, N-3400, N-3600, and mixtures thereof.

Suitable commercially available polyfunctional isocyanates are exemplified by Desmodur<sup>TM</sup> N-3200, Desmodur<sup>TM</sup> N-3300, Desmodur<sup>TM</sup> N-3400, Desmodur<sup>TM</sup> N-3600, Desmodur<sup>TM</sup> H (HDI), Desmodur<sup>TM</sup> W (bis[4-isocyanatocyclohexyl]methane), Mondur<sup>TM</sup> M (4,4'-diisocyanatodiphenylmethane), Mondur<sup>TM</sup> TDS (98% toluene 2,4-diisocyanate), Mondur<sup>TM</sup> TD-80 (a mixture of 80% 2,4 and 20% 2,6-toluene diisocyanate isomers), and Desmodur<sup>TM</sup> N-100, each available from Bayer Corporation, Pittsburgh, PA.

Other useful triisocyanates are those obtained by reacting three moles of a diisocyanate with one mole of a triol. For example, toluene diisocyanate, 3-isocyanatomethyl-3,4,4-trimethylcyclohexyl isocyanate, or m-tetramethylxylylene diisocyanate can be reacted with 1,1,1-tris(hydroxymethyl)propane to form triisocyanates. The product from the reaction with m-tetramethylxylylene diisocyanate is commercially available as CYTHANE 3160 (American Cyanamid, Stamford, Conn.).

Polyols suitable for use in preparing the chemical compositions of the present invention include those organic polyols that have an average hydroxyl functionality of at least about 2 (preferably, about 2 to 5; more preferably, about 2 to 3; most preferably, about 2, as diols are most preferred). The hydroxyl groups can be primary or secondary, with primary hydroxyl groups being preferred for their greater reactivity. Mixtures of diols with polyols that have an average hydroxyl functionality of about 2.5 to 5 (preferably about 3 to 4; more preferably, about 3) can also be used. It is preferred that such mixtures contain no more than about 20 percent by weight of such polyols, more preferably no more than about 10 percent, and most preferably no more than about 5 percent. Preferred mixtures are mixtures of diols and triols.

Suitable polyols include those that comprise at least one aliphatic, heteroaliphatic, alicyclic, heteroalicyclic, aromatic, heteroaromatic, or polymeric moiety. Preferred polyols are aliphatic or polymeric polyols that contain hydroxyl groups as terminal groups or as groups that are pendant from the backbone chain of the polyol.

The molecular weight (that is, the number average molecular weight) of hydrocarbon polyols can generally vary from about 60 to about 2000, preferably, from about 60 to about 1000, more preferably, from about 60 to about 500, most preferably, from about 60 to about 300. The equivalent weight (that is, the number average equivalent weight) of hydrocarbon polyols generally can be in the range of about 30 to about 1000, preferably, from about 30 to about 500, more preferably, from about 30 to about 250. Polyols of higher equivalent weight can have a tendency to reduce the stain-release properties provided by the chemical compositions of the present invention unless the polyol contains an  $R_f$  group or the polyol comprises a perfluoropolyether. If the polyol comprises a perfluoropolyether, it can have a molecular weight as high as approximately 7000 and can still provide adequate stain-release properties.

When the polyols of the present invention are diols, the diols can be substituted with or contain other groups. Thus, a preferred diol is selected from the group consisting of a branched or straight chain hydrocarbon diol, a diol containing at least one solubilizing group, a fluorinated diol comprising a monovalent or divalent perfluorinated group, a diol comprising a silane group, a polyalkylsiloxane diol, a polyarylsiloxane diol, and mixtures thereof. Solubilizing groups include carboxylate, sulfate, sulfonate, phosphate, phosphonate, ammonium, quaternary ammonium, and the like.



Perfluorinated monovalent groups ( $R_f$ ) may be perfluoroalkyl and perfluoroheteroalkyl, and perfluorinated divalent groups may be perfluoroalkylene and perfluoroheteroalkylene. Perfluoroalkyl groups are preferred, with perfluoroalkyl groups having from 2 to 6 carbon atoms being more preferred and perfluoroalkyl groups having 4  
5 carbon atoms being most preferred. Another embodiment comprises perfluoroheteroalkyl groups having 6 to 50 carbon atoms. Perfluorinated divalent groups are preferably perfluoroheteroalkylene groups. Perfluoroheteroalkylene groups are preferably perfluoropolyether groups having from about 3 to about 50 carbon atoms.

The silane groups of the diol may contain one, two, or three hydrolyzable groups  
10 on the silicon atom. Hydrolyzable groups are as defined below. Polyalkylsiloxane diols include, but are not limited to, hydroxyalkyl terminated polydimethyl siloxanes, polymethyloctadecylsiloxane, polydimethylmethyloctadecylsiloxane, polydimethyldodecyltetradecylsiloxane, polymethylhexadecylsiloxane, polymethyloctylsiloxane, polymethyl-3,3,3-trifluoropropylsiloxane, and the like.

Polyarylsiloxane diols are essentially the same as the polyalkylsiloxanes with some or all  
15 of the methyl groups replaced with phenyl groups, such as hydroxyalkyl terminated polydiphenylsiloxane and hydroxyalkyl terminated dimethyl-diphenylsiloxane copolymer.

Representative examples of suitable non-polymeric polyols include alkylene glycols, polyhydroxyalkanes, and other polyhydroxy compounds. The alkylene glycols  
20 include, for example, 1,2-ethanediol; 1,2-propanediol; 3-chloro-1,2-propanediol; 1,3-propanediol; 1,3-butanediol; 1,4-butanediol; 2-methyl-1,3-propanediol; 2,2-dimethyl-1,3-propanediol (neopentylglycol); 2-ethyl-1,3-propanediol; 2,2-diethyl-1,3-propanediol; 1,5-pentanediol; 2-ethyl-1,3-pentanediol; 2,2,4-trimethyl-1,3-pentanediol; 3-methyl-1,5-pentanediol; 1,2-, 1,5-, and 1,6-hexanediol; 2-ethyl-1,6-hexanediol;  
25 bis(hydroxymethyl)cyclohexane; 1,8-octanediol; bicyclo-octanediol; 1,10-decanediol; tricyclo-decanediol; norbornanediol; and 1,18-dihydroxyoctadecane.

The polyhydroxyalkanes include, for example, glycerine; trimethylolethane; trimethylolpropane; 2-ethyl-2-(hydroxymethyl)-1,3-propanediol; 1,2,6-hexanetriol; pentaerythritol; quinitol; mannitol; and sorbitol.

The other polyhydroxy compounds include, for example, such as di(ethylene glycol); tri(ethylene glycol); tetra(ethylene glycol); tetramethylene glycol; dipropylene  
30

glycol; diisopropylene glycol; tripropylene glycol; bis(hydroxymethyl)propionic acid; N,N-bis(2-hydroxyethyl)-3-aminopropyltriethoxysilane; bicine; N-bis(2-hydroxyethyl)perfluorobutylsulfonamide; 1,11-(3,6-dioxaundecane)diol; 1,14-(3,6,9,12-tetraoxatetradecane)diol; 1,8-(3,6-dioxa-2,5,8-trimethyloctane)diol; 1,14-(5,10-dioxatetradecane)diol; castor oil; 2-butyne-1,4-diol; N,N-bis(hydroxyethyl)benzamide; 4,4'-bis(hydroxymethyl)diphenylsulfone; 1,4-benzenedimethanol; 1,3-bis(2-hydroxyethoxy)benzene; 1,2-dihydroxybenzene; resorcinol; 1,4-dihydroxybenzene; 3,5-, 2,6-, 2,5-, and 2,4-dihydroxybenzoic acid; 1,6-, 2,6-, 2,5-, and 2,7-dihydroxynaphthalene; 2,2'- and 4,4'-biphenol; 1,8-dihydroxybiphenyl; 2,4-dihydroxy-6-methyl-pyrimidine; 4,6-dihydroxypyrimidine; 3,6-dihydroxypyridazine; bisphenol A; 4,4'-ethylidenebisphenol; 4,4'-isopropylidenebis(2,6-dimethylphenol); bis(4-hydroxyphenyl)methane; 1,1-bis(4-hydroxyphenyl)-1-phenylethane (bisphenol C); 1,4-bis(2-hydroxyethyl)piperazine; bis(4-hydroxyphenyl) ether; 1,4-bis(1-hydroxy-1,1-dihydroperfluoroethoxyethoxy)perfluoro-n-butane ( $\text{HOCH}_2\text{CF}_2\text{OC}_2\text{F}_4\text{O}(\text{CF}_2)_4\text{OC}_2\text{F}_4\text{OCF}_2\text{CH}_2\text{OH}$ ); 1,4-bis(1-hydroxy-1,1-dihydroperfluoropropoxy)perfluoro-n-butane ( $\text{HOCH}_2\text{CF}_2\text{CF}_2\text{O}(\text{CF}_2)_4\text{OCF}_2\text{CF}_2\text{CH}_2\text{OH}$ ); as well as other aliphatic, heteroaliphatic, saturated alicyclic, aromatic, saturated heteroalicyclic, and heteroaromatic polyols; and the like, and mixtures thereof.

Representative examples of useful polymeric polyols include polyoxyethylene, polyoxypropylene, and ethylene oxide-terminated polypropylene glycols and triols of molecular weights from about 200 to about 2000, corresponding to equivalent weights of about 100 to about 1000 for the diols or about 70 to about 700 for triols; polytetramethylene glycols of varying molecular weight; polydialkylsiloxane diols of varying molecular weight; hydroxy-terminated polyesters and hydroxy-terminated polylactones (e.g., polycaprolactone polyols); hydroxy-terminated polyalkadienes (e.g., hydroxyl-terminated polybutadienes); and the like. Mixtures of polymeric polyols can be used if desired.

Useful commercially available polymeric polyols include Carbowax™ poly(ethylene glycol) materials in the number average molecular weight ( $M_n$ ) range of from about 200 to about 2000 (available from Union Carbide Corp.); poly(propylene glycol) materials such as PPG-425 (available from Lyondell Chemicals); block copolymers of poly(ethylene glycol) and poly(propylene glycol) such as Pluronic™ L31 (available from BASF Corporation); fluorinated oxetane polyols made by the ring-opening

polymerization of fluorinated oxetane such as Poly-3-Fox™ (available from Omnova Solutions, Inc., Akron Ohio); polyetheralcohols prepared by ring opening addition polymerization of a fluorinated organic group substituted epoxide with a compound containing at least two hydroxyl groups as described in U.S. Pat. No. 4,508,916 (Newell et al); perfluoropolyether diols such as Fomblin™ ZDOL ( $\text{HOCH}_2\text{CF}_2\text{O}(\text{CF}_2\text{O})_{8-12}(\text{CF}_2\text{CF}_2\text{O})_{8-12}\text{CF}_2\text{CH}_2\text{OH}$ , available from Ausimont); Bisphenol A ethoxylate, Bisphenol A propyloxylate, and Bisphenol A propoxylate/ethoxylate (available from Sigma-Aldrich); polytetramethylene ether glycols such as Polymeg™ 650 and 1000 (available from Quaker Oats Company) and the Terathane™ polyols (available from DuPont); hydroxyl-terminated polybutadiene resins such as the Poly bd™ materials (available from Elf Atochem); the "PeP" series (available from Wyandotte Chemicals Corporation) of polyoxyalkylene tetrols having secondary hydroxyl groups, for example, "PeP" 450, 550, and 650; polycaprolactone polyols with  $M_n$  in the range of about 200 to about 2000 such as Tone™ 0201, 0210, 0301, and 0310 (available from Union Carbide); "Paraplex™ U-148" (available from Rohm and Haas), an aliphatic polyester diol; polyester polyols such as the Multron™ poly(ethyleneadipate)polyols (available from Mobay Chemical Co.); polycarbonate diols such as Duracarb™ 120, a hexanediol carbonate with  $M_n = 900$  (available from PPG Industries Inc.); and the like; and mixtures thereof.

Preferred polyols include 2,2-bis(hydroxymethyl)propionic acid; N,N-bis(2-hydroxyethyl)-3-aminopropyltriethoxysilane; bicine; 3,5-dihydroxybenzoic acid; 2,4-dihydroxybenzoic acid; N-bis(2-hydroxyethyl)perfluorobutylsulfonamide; 1,2-ethanediol; 1,2- and 1,3-propanediol; 1,3- and 1,4-butanediol; neopentylglycol; 1,5-pentanediol; 3-methyl-1,5-pentanediol; 1,2-, 1,5-, and 1,6-hexanediol; bis(hydroxymethyl)cyclohexane; 1,8-octanediol; 1,10-decanediol; di(ethylene glycol); tri(ethylene glycol); tetra(ethylene glycol); di(propylene glycol); di(isopropylene glycol); tri(propylene glycol); poly(ethylene glycol) diols (number average molecular weight of about 200 to about 1500); poly(di(ethylene glycol) phthalate) diol (having number average molecular weights of, for example, about 350 or about 575); poly(propylene glycols) diols (number average molecular weight of about 200 to about 500); block copolymers of poly(ethylene glycol) and poly(propylene glycol) such as Pluronic™ L31 (available from BASF Corporation); polydimethylsiloxane diol; fluorinated oxetane polyols made by the ring-opening


polymerization of fluorinated oxetane such as Poly-3-Fox™ (available from Omnova Solutions, Inc., Akron Ohio); polyetheralcohols prepared by ring opening addition polymerization of a fluorinated organic group substituted epoxide with a compound containing at least two hydroxyl groups as described in U.S. Pat. No. 4,508,916 (Newell et al); perfluoropolyether diols such as Fomblin™ ZDOL (HOCH<sub>2</sub>CF<sub>2</sub>O(CF<sub>2</sub>O)<sub>8-12</sub>(CF<sub>2</sub>CF<sub>2</sub>O)<sub>8-12</sub>CF<sub>2</sub>CH<sub>2</sub>OH, available from Ausimont); 1,4-bis(1-hydroxy-1,1-dihydroperfluoroethoxyethoxy)perfluoro-n-butane (HOCH<sub>2</sub>CF<sub>2</sub>OC<sub>2</sub>F<sub>4</sub>O(CF<sub>2</sub>)<sub>4</sub>OC<sub>2</sub>F<sub>4</sub>OCF<sub>2</sub>CH<sub>2</sub>OH); 1,4-bis(1-hydroxy-1,1-dihydroperfluoropropoxy)perfluoro-n-butane (HOCH<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>O(CF<sub>2</sub>)<sub>4</sub>OCF<sub>2</sub>CF<sub>2</sub>CH<sub>2</sub>OH); polycaprolactone diols (number average molecular weight of about 200 to about 600); resorcinol; hydroquinone; 1,6-, 2,5-, 2,6-, and 2,7-dihydroxynaphthalene; 4,4'-biphenol; bisphenol A; bis(4-hydroxyphenyl)methane; and the like; and mixtures thereof.

More preferred polyols include bis(hydroxymethyl)propionic acid; bicine; N-bis(2-hydroxyethyl)perfluorobutylsulfonamide; 1,2-ethanediol; 1,2- and 1,3-propanediol; 1,4-butanediol; neopentylglycol; 1,2- and 1,6-hexanediol; di(ethylene glycol); tri(ethylene glycol); 1,4-bis(1-hydroxy-1,1-dihydroperfluoropropoxy)perfluoro-n-butane (HOCH<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>O(CF<sub>2</sub>)<sub>4</sub>OCF<sub>2</sub>CF<sub>2</sub>CH<sub>2</sub>OH); fluorinated oxetane polyols made by the ring-opening polymerization of fluorinated oxetane such as Poly-3-Fox™ (available from Omnova Solutions, Inc., Akron Ohio); poly(di(ethylene glycol) phthalate) diol (having number average molecular weights of, for example, about 350 or about 575); poly(ethylene glycol) diols (having number average molecular weights of, for example, about 200, 300, 400); polydimethylsiloxane diol; polypropylene glycol (having a number average molecular weight of, for example, about 425); dimer diol; polycaprolactone diol (having a number average molecular weight of, for example, about 530); 3,5-dihydroxybenzene; bisphenol A; resorcinol; hydroquinone; and mixtures thereof.

Fluorochemical monoalcohols suitable for use in preparing the chemical compositions of the present invention include those that comprise at least one R<sub>f</sub> group. The R<sub>f</sub> groups can contain straight chain, branched chain, or cyclic fluorinated alkylene groups or any combination thereof. The R<sub>f</sub> groups can optionally contain one or more heteroatoms (i.e. oxygen, sulfur, and/or nitrogen) in the carbon-carbon chain so as to form a carbon-heteroatom-carbon chain (i.e. a heteroalkylene group). Fully-fluorinated groups are generally preferred, but hydrogen or chlorine atoms can also be

present as substituents, provided that no more than one atom of either is present for every two carbon atoms. It is additionally preferred that any  $R_f$  group contain at least about 40% fluorine by weight, more preferably at least about 50% fluorine by weight. The terminal portion of the group is generally fully-fluorinated, preferably containing at least three fluorine atoms, e.g.,  $CF_3O-$ ,  $CF_3CF_2-$ ,  $CF_3CF_2CF_2-$ ,  $(CF_3)_2N-$ ,  $(CF_3)_2CF-$ ,  $SF_5CF_2-$ . Perfluorinated aliphatic groups (i.e., those of the formula  $C_nF_{2n+1}-$ ) wherein n is 2 to 6 inclusive are the preferred  $R_f$  groups, with n = 3 to 5 being more preferred and with n = 4 being the most preferred.


Useful fluorine-containing monoalcohols include compounds of the following formula II:



wherein:



$R_f$  is a perfluoroalkyl group or a perfluoroheteroalkyl group as defined above;  
 $Z$  is a connecting group selected from a covalent bond, a sulfonamido group, a carboxamido group, a carboxyl group, or a sulfinyl group; and  
 $R^2$  is a divalent straight or branched chain alkylene, cycloalkylene, or heteroalkylene group of 1 to 14 carbon atoms, preferably 1 to 8 carbon atoms, more preferably 1 to 4 carbon atoms, and most preferably two carbon atoms.

Representative examples of useful fluorine-containing monoalcohols include the following:

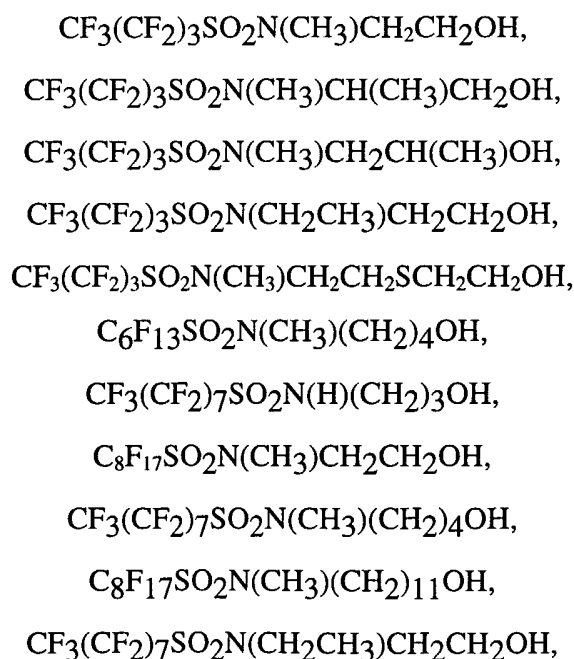

- $\text{CF}_3(\text{CF}_2)_7\text{SO}_2\text{N}(\text{C}_2\text{H}_5)(\text{CH}_2)_6\text{OH}$ ,  
 $\text{CF}_3(\text{CF}_2)_7\text{SO}_2\text{N}(\text{C}_2\text{H}_5)(\text{CH}_2)_{11}\text{OH}$ ,  
 $\text{CF}_3(\text{CF}_2)_6\text{SO}_2\text{N}(\text{C}_3\text{H}_7)\text{CH}_2\text{OCH}_2\text{CH}_2\text{CH}_2\text{OH}$ ,  
 $\text{CF}_3(\text{CF}_2)_7\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH}$ ,  
5  $\text{CF}_3(\text{CF}_2)_9\text{SO}_2\text{N}(\text{CH}_2\text{CH}_2\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH}$ ,  
 $\text{CF}_3(\text{CF}_2)_7\text{SO}_2\text{N}(\text{C}_4\text{H}_9)\text{CH}_2\text{CH}_2\text{OH}$ ,  
 $\text{CF}_3(\text{CF}_2)_7\text{SO}_2\text{N}(\text{C}_4\text{H}_9)(\text{CH}_2)_4\text{OH}$ ,  
2-(N-methyl-2-(4-perfluoro-(2,6-diethylmorpholinyl))perfluoroethylsulfonamido)ethanol,  
 $\text{C}_3\text{F}_7\text{CONHCH}_2\text{CH}_2\text{OH}$ ,  
10  $\text{C}_7\text{F}_{15}\text{CON}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH}$ ,  
 $\text{C}_7\text{F}_{15}\text{CON}(\text{C}_2\text{H}_5)\text{CH}_2\text{CH}_2\text{OH}$ ,  
 $\text{C}_8\text{F}_{17}\text{CON}(\text{C}_2\text{H}_5)\text{CH}_2\text{CH}_2\text{OH}$ ,  
 $\text{C}_8\text{F}_{17}\text{CON}(\text{CH}_3)(\text{CH}_2)_{11}\text{OH}$ ,  
 $\text{C}_4\text{F}_9\text{CF}(\text{CF}_3)\text{CON}(\text{H})\text{CH}_2\text{CH}_2\text{OH}$   
15  $\text{C}_6\text{F}_{13}\text{CF}(\text{CF}_3)\text{CON}(\text{H})\text{CH}_2\text{CH}_2\text{OH}$   
 $\text{C}_7\text{F}_{15}\text{CF}(\text{CF}_3)\text{CON}(\text{H})\text{CH}_2\text{CH}_2\text{OH}$   
 $\text{C}_2\text{F}_5\text{O}(\text{C}_2\text{F}_4\text{O})_3\text{CF}_2\text{CONHC}_2\text{H}_4\text{OH}$ ,  
 $\text{CF}_3\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_{1-36}\text{CF}(\text{CF}_3)\text{CH}_2\text{OH}$ ,  
 $\text{C}_2\text{F}_5\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_{1-36}\text{CF}(\text{CF}_3)\text{CH}_2\text{OH}$ ,  
20  $\text{C}_3\text{F}_7\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_{1-36}\text{CF}(\text{CF}_3)\text{CH}_2\text{OH}$ ,  
 $\text{C}_4\text{F}_9\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_{1-36}\text{CF}(\text{CF}_3)\text{CH}_2\text{OH}$ ,  
 $\text{C}_3\text{F}_7\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_{12}\text{CF}(\text{CF}_3)\text{CH}_2\text{OH}$ ,  
 $\text{CF}_3\text{O}(\text{CF}_2\text{CF}_2\text{O})_{1-36}\text{CF}_2\text{CH}_2\text{OH}$ ,  
 $\text{C}_2\text{F}_5\text{O}(\text{CF}_2\text{CF}_2\text{O})_{1-36}\text{CF}_2\text{CH}_2\text{OH}$ ,  
25  $\text{C}_3\text{F}_7\text{O}(\text{CF}_2\text{CF}_2\text{O})_{1-36}\text{CF}_2\text{CH}_2\text{OH}$ ,  
 $\text{C}_4\text{F}_9\text{O}(\text{CF}_2\text{CF}_2\text{O})_{1-36}\text{CF}_2\text{CH}_2\text{OH}$ ,  
n-C<sub>4</sub>F<sub>9</sub>OC<sub>2</sub>F<sub>4</sub>OCF<sub>2</sub>CH<sub>2</sub>OCH<sub>2</sub>CH<sub>2</sub>OH  
 $\text{CF}_3\text{O}(\text{CF}_2\text{CF}_2\text{O})_{11}\text{CF}_2\text{CH}_2\text{OH}$ ,  
 $\text{CF}_3\text{CF}(\text{CF}_2\text{Cl})(\text{CF}_2\text{CF}_2)_6\text{CF}_2\text{CON}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH}$ ,  
30  $\text{CF}_3(\text{CF}_2)_6\text{SO}_2\text{CH}_2\text{CH}_2\text{OH}$ ,

- $\text{CF}_3(\text{CF}_2)_7\text{SO}_2\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{C}_5\text{F}_{11}\text{COOCH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_6\text{COOCH}_2\text{CH}_2\text{OH},$   
 $\text{C}_6\text{F}_{13}\text{CF}(\text{CF}_3)\text{COOCH}_2\text{CH}_2\text{CH}(\text{CH}_3)\text{OH}$   
5  $\text{C}_8\text{F}_{17}\text{COOCH}_2\text{CH}_2\text{OH},$   
 $\text{C}_8\text{F}_{17}(\text{CH}_2)_{11}\text{N}(\text{C}_2\text{H}_5)\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{C}_3\text{F}_7\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_6\text{CH}_2\text{OH},$   
Perfluoro(cyclohexyl)methanol  
10  $\text{C}_4\text{F}_9\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_5\text{CH}_2\text{CH}_2\text{OH}$   
 $\text{CF}_3(\text{CF}_2)_6\text{CH}_2\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_7\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_7\text{CH}_2\text{CH}_2\text{SO}_2\text{N}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH},$   
15  $\text{CF}_3(\text{CF}_2)_5\text{CH}_2\text{CH}_2\text{SO}_2\text{N}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_3\text{CH}_2\text{CH}_2\text{SO}_2\text{N}(\text{CH}_3)\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3(\text{CF}_2)_7\text{CH}_2\text{CH}_2\text{CH}_2\text{OH},$   
 $\text{CF}_3\text{C F}(\text{CF}_2\text{H})(\text{CF}_2)_{10}(\text{CH}_2)_2\text{OH},$   
 $\text{CF}_3\text{C F}(\text{CF}_2\text{Cl})(\text{CF}_2)_{10}(\text{CH}_2)_2\text{OH},$   
20  $\text{R}_f(\text{CH}_2)_2\text{S}(\text{CH}_2)_2\text{OH},$   
 $\text{C}_4\text{F}_9(\text{CH}_2)_2\text{S}(\text{CH}_2)_2\text{OH},$   
 $\text{R}_f(\text{CH}_2)_4\text{S}(\text{CH}_2)_2\text{OH},$   
 $\text{R}_f(\text{CH}_2)_2\text{S}(\text{CH}_2)_3\text{OH},$   
 $\text{R}_f(\text{CH}_2)_2\text{SCH}(\text{CH}_3)\text{CH}_2\text{OH},$   
25  $\text{R}_f(\text{CH}_2)_4\text{SCH}(\text{CH}_3)\text{CH}_2\text{OH},$   
 $\text{R}_f\text{CH}_2\text{CH}(\text{CH}_3)\text{S}(\text{CH}_2)_2\text{OH},$   
 $\text{R}_f(\text{CH}_2)_2\text{S}(\text{CH}_2)_{11}\text{OH},$




and the like, and mixtures thereof, wherein  $R_f$  is a perfluoroalkyl group of 2 to 16 carbon atoms. If desired, rather than using such alcohols, similar thiols can be utilized.

Preferred fluorine-containing monoalcohols include 2-(N-methylperfluorobutanesulfonamido)ethanol; 2-(N-ethylperfluorobutanesulfonamido)ethanol; 2-(N-methylperfluorobutanesulfonamido)propanol; N-methyl-N-(4-hydroxybutyl)perfluorohexanesulfonamide; 1,1,2,2-tetrahydroperfluorooctanol; 1,1-dihydroperfluorooctanol;  $\text{C}_6\text{F}_{13}\text{CF}(\text{CF}_3)\text{CO}_2\text{C}_2\text{H}_4\text{CH}(\text{CH}_3)\text{OH}$ ; n- $\text{C}_6\text{F}_{13}\text{CF}(\text{CF}_3)\text{CON}(\text{H})\text{CH}_2\text{CH}_2\text{OH}$ ;  $\text{C}_4\text{F}_9\text{OC}_2\text{F}_4\text{OCF}_2\text{CH}_2\text{OCH}_2\text{CH}_2\text{OH}$ ;  $\text{C}_3\text{F}_7\text{CON}(\text{H})\text{CH}_2\text{CH}_2\text{OH}$ ; 1,1,2,2,3,3-hexahydroperfluorodecanol;  $\text{C}_3\text{F}_7\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_{1-36}\text{CF}(\text{CF}_3)\text{CH}_2\text{OH}$ ;  $\text{CF}_3\text{O}(\text{CF}_2\text{CF}_2\text{O})_{1-36}\text{CF}_2\text{CH}_2\text{OH}$ ; and the like; and mixtures thereof.

Long-chain hydrocarbon monoalcohols suitable for use in the chemical compositions of the present invention comprise at least one, essentially unbranched, hydrocarbon chain having from 10 to about 18 carbon atoms which may be saturated, unsaturated, or aromatic. These long-chain hydrocarbon monoalcohols can be optionally substituted, for example, with groups such as one or more chlorine, bromine, trifluoromethyl, or phenyl groups. Representative long-chain hydrocarbon monoalcohols include 1-octanol, 1-decanol, 1-dodecanol, 1-tetradecanol, 1-hexadecanol, 1-octadecanol, and the like, and mixtures thereof. Preferred long-chain hydrocarbon monoalcohols have 12 to 16 carbon atoms, with 12 to 14 carbon atoms being more preferred and 12 carbon atoms being most preferred for water solubility and performance.

Silane compounds suitable for use in the chemical compositions of the present invention are those of the following formula (I):



wherein X,  $\text{R}^1$ , and Y are as defined previously. Therefore, these silane compounds contain one, two, or three hydrolyzable groups (Y) on the silicon and one organic group including an isocyanate-reactive or an active hydrogen reactive radical ( $\text{X}-\text{R}^1$ ). Any of




the conventional hydrolyzable groups, such as those selected from the group consisting of alkoxy, acyloxy, heteroalkoxy, heteroacyloxy, halo, oxime, and the like, can be used as the hydrolyzable group (Y). The hydrolyzable group (Y) is preferably alkoxy or acyloxy and more preferably alkoxy.

5 When Y is halo, the hydrogen halide liberated from the halogen-containing silane can cause polymer degradation when cellulose substrates are used. When Y is an oxime group, lower oxime groups of the formula  $-N=CR^5R^6$ , wherein  $R^5$  and  $R^6$  are monovalent lower alkyl groups comprising about 1 to about 12 carbon atoms, which can be the same or different, preferably selected from the group consisting of methyl, ethyl, propyl, and  
10 butyl, are preferred.

Representative divalent bridging radicals ( $R^1$ ) include, but are not limited to, those selected from the group consisting of  $-CH_2CH_2-$ ,  $-CH_2CH_2CH_2-$ ,  $-CH_2CH_2CH_2OCH_2CH_2-$ ,  $-CH_2CH_2C_6H_4CH_2CH_2-$ , and  $-CH_2CH_2O(C_2H_4O)_2CH_2CH_2N(CH_3)CH_2CH_2CH_2-$ .






Other preferred silane compounds are those which contain one or two hydrolyzable  
15 groups, such as those having the structures  $R^2OSi(R^7)_2R^1XH$  and  $(R^8O)_2Si(R^7)R^1XH$ , wherein  $R^1$  is as previously defined, and  $R^7$  and  $R^8$  are selected from the group consisting of a phenyl group, an alicyclic group, or a straight or branched aliphatic group having from about 1 to about 12 carbon atoms. Preferably,  $R^7$  and  $R^8$  are a lower alkyl group comprising 1 to 4 carbon atoms.

20 Following the hydrolysis of some of these terminal silyl groups, inter-reaction with a substrate surface comprising  $-SiOH$  groups or other metal hydroxide groups to form siloxane or metal-oxane linkages, e.g.,



25 can occur. Bonds thus formed, particularly Si-O-Si bonds, are water resistant and can provide enhanced durability of the stain-release properties imparted by the chemical compositions of the present invention.

Such silane compounds are well known in the art and many are commercially available or are readily prepared. Representative isocyanate-reactive silane compounds include, but are not limited to, those selected from the group consisting of:



and mixtures thereof.

Representative examples of hydroxyl-reactive silane compounds include, but are not limited to, 3-isocyanatopropyltriethoxysilane, 3-isocyanatopropyltrimethoxysilane, and the like.

The chemical compositions of the present invention optionally may contain water-solubilizing compounds (W-H) comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group. These water solubilizing compounds include, for example, diols and monoalcohols comprising one or more water-solubilizing groups, added in addition to the one or more polyols and one or more monoalcohols as described above.

The solubilizing groups of the water solubilizing compounds include, for example, carboxylate, sulfate, sulfonate, phosphate, phosphonate, ammonium, and quaternary ammonium groups. Such groups may be represented as  $-\text{CO}_2\text{M}$ ,  $-\text{OSO}_3\text{M}$ ,  $-\text{SO}_3\text{M}$ ,  $-$

OPO<sub>3</sub>M, -PO(OM)<sub>2</sub>, -NR<sub>2</sub>HX, -NR<sub>3</sub>X, -NRH<sub>2</sub>X, and -NH<sub>3</sub>X, respectively, wherein M is H or one equivalent of a monovalent or divalent soluble cation such as sodium, potassium, calcium, and NR<sub>3</sub>H<sup>+</sup>; X is a soluble anion such as those selected from the group consisting of halide, hydroxide, carboxylate, sulfonates, and the like; and R is selected from the group consisting of a phenyl group, a cycloaliphatic group, or a straight or branched aliphatic group having from about 1 to about 12 carbon atoms. Preferably, R is a lower alkyl group having from 1 to 4 carbon atoms. The group -NR<sub>3</sub>X is a salt of a water-soluble acid, for example trimethyl ammonium chloride, pyridinium sulfate, etc. or an ammonium substituent. The group -NR<sub>2</sub>HX is the salt of a water-soluble acid, such as dimethyl ammonium acetate or propionate. The group -NRH<sub>2</sub>X is the salt of a water-soluble acid, such as methyl ammonium acetate or propionate. The group -NH<sub>3</sub>X is the salt of a water-soluble acid, such as ammonium acetate or propionate. The salt form can be made by simple neutralization of the acid group with a base such as an amine, a quaternary ammonium hydroxide, an alkali metal carbonate or hydroxide, or the like; or alternatively by simple reaction of the amino group with a carboxylic acid, a sulfonic acid, a halo acid, or the like. Carboxylic acid groups in salt form are preferred because they have been found to impart water solubility to the chemical compositions of the present invention without causing undue loss of the durable stain-release properties imparted by the chemical composition.

The isocyanate-reactive hydrogen containing group is selected from the group consisting of -OH, -SH, NH<sub>2</sub>, and NRH wherein R is selected from the group consisting of a phenyl group, a cycloaliphatic group, or a straight or branched aliphatic group having from about 1 to about 12 carbon atoms. Preferably, R is a lower alkyl group having from 1 to 4 carbon atoms.. A representative suitable diol with a solubilizing group is 1,1-bis(hydroxymethyl)propionic acid and its salts such as its ammonium salt. A representative suitable monoalcohol with a solubilizing group is glycolic acid (HOCH<sub>2</sub>COOH) and its salts. The amount of water-solubilizing group should be sufficient to solubilize the chemical composition. Typically, the isocyanate:solubilizing group ratio should be from about 3:1 to about 16:1, preferably from about 5:1 to about 11:1. Illustrative water-solubilizing compounds having suitable water-solubilizing groups include, but are not limited to, those independently selected from the group consisting of HOCH<sub>2</sub>COOH; HSCH<sub>2</sub>COOH; (HOCH<sub>2</sub>CH<sub>2</sub>)<sub>2</sub>NCH<sub>2</sub>COOH; HOC(CO<sub>2</sub>H)(CH<sub>2</sub>CO<sub>2</sub>H)<sub>2</sub>;

$(\text{H}_2\text{N}(\text{CH}_2)_n\text{CH}_2)_2\text{NCH}_3$  wherein  $n$  is an integer of 1 to 3;  $(\text{HOCH}_2)_2\text{C}(\text{CH}_3)\text{COOH}$ ;  
 $(\text{HO}(\text{CH}_2)_n\text{CH}_2)_2\text{NCH}_3$  wherein  $n$  is an integer of 1 to 3;  $\text{HOCH}_2\text{CH}(\text{OH})\text{CO}_2\text{Na}$ ; N-(2-  
hydroxyethyl)iminodiacetic acid  $(\text{HOCH}_2\text{CH}_2\text{N}(\text{CH}_2\text{COOH})_2)$ ; L-glutamic acid  
 $(\text{H}_2\text{NCH}(\text{COOH})(\text{CH}_2\text{CH}_2\text{COOH}))$ ; aspartic acid  $(\text{H}_2\text{NCH}(\text{COOH})(\text{CH}_2\text{COOH}))$ ; glycine  
5  $(\text{H}_2\text{NCH}_2\text{COOH})$ ; 1,3-diamino-2-propanol-N,N,N',N'-tetraacetic acid  
 $(\text{HOCH}(\text{CH}_2\text{N}(\text{CH}_2\text{COOH})_2)_2)$ ; iminodiacetic acid  $(\text{HN}(\text{CH}_2\text{COOH})_2)$ ; mercaptosuccinic  
acid  $(\text{HSCH}(\text{COOH})(\text{CH}_2\text{COOH}))$ ;  $\text{H}_2\text{N}(\text{CH}_2)_4\text{CH}(\text{COOH})\text{N}(\text{CH}_2\text{COOH})_2$ ;  
 $\text{HOCH}(\text{COOH})\text{CH}(\text{COOH})\text{CH}_2\text{COOH}$ ;  $(\text{HOCH}_2)_2\text{CHCH}_2\text{COO}^-(\text{NH}(\text{CH}_3)_3)^+$ ;  
 $\text{CH}_3(\text{CH}_2)_2\text{CH}(\text{OH})\text{CH}(\text{OH})(\text{CH}_2)_3\text{CO}_2\text{K}$ ;  $\text{H}_2\text{NCH}_2\text{CH}_2\text{OSO}_3\text{Na}$ ;  $\text{H}_2\text{NC}_2\text{H}_4\text{NHC}_2\text{H}_4\text{SO}_3\text{H}$ ;  
10  $\text{H}_2\text{NC}_3\text{H}_6\text{NH}(\text{CH}_3)\text{C}_3\text{H}_6\text{SO}_3\text{H}$ ;  $(\text{HOC}_2\text{H}_4)_2\text{NC}_3\text{H}_6\text{OSO}_3\text{Na}$ ;  
 $(\text{HOCH}_2\text{CH}_2)_2\text{NC}_6\text{H}_4\text{OCH}_2\text{CH}_2\text{OSO}_2\text{OH}$ ; N-methyl-4-(2,3-dihydroxypropoxy)pyridinium  
chloride,  $((\text{H}_2\text{N})_2\text{C}_6\text{H}_3\text{SO}_3)^-(\text{NH}(\text{C}_2\text{H}_5)_3)^+$ ; dihydroxybenzoic acid; 3,4-dihydroxybenzylic  
acid; 3-(3,5-dihydroxyphenyl)propionic acid; salts of the above amines, carboxylic acids,  
and sulfonic acids; and mixtures thereof.

15 The chemical compositions of the present invention can be made according to the  
following step-wise synthesis. As one skilled in the art would understand, the order of the  
steps is non-limiting and can be modified so as to produce a desired chemical composition.  
In the synthesis, the polyfunctional isocyanate compound and the polyol are dissolved  
together under dry conditions, preferably in a solvent, and then heating the resulting  
20 solution at approximately 40 to 80 °C, preferably approximately 60 to 70 °C, with mixing  
in the presence of a catalyst for one-half to two hours, preferably one hour. Depending on  
reaction conditions (e.g., reaction temperature and/or polyfunctional isocyanate used), a  
catalyst level of up to about 0.5 percent by weight of the polyfunctional isocyanate/polyol  
mixture may be used, but typically about 0.00005 to about 0.5 percent by weight is  
25 required, 0.02 to 0.1 percent by weight being preferred. Suitable catalysts include, but are  
not limited to, tertiary amine and tin compounds. Examples of useful tin compounds  
include tin II and tin IV salts such as stannous octoate, dibutyltin dilaurate, dibutyltin  
diacetate, dibutyltin di-2-ethylhexanoate, and dibutyltin oxide. Examples of useful tertiary  
amine compounds include triethylamine, tributylamine, triethylenediamine,  
30 tripropylamine, bis(dimethylaminoethyl) ether, morpholine compounds such as ethyl  
morpholine, and 2,2'-dimorpholinodiethyl ether, 1,4-diazabicyclo[2.2.2]octane (DABCO,

Aldrich Chemical Co., Milwaukee, Wis.), and 1,8-diazabicyclo[5.4.0.]undec-7-ene (DBU, Aldrich Chemical Co., Milwaukee, Wis.). Tin compounds are preferred.

A mixture of polyols can be used instead of a single polyol. For example, in a preferred embodiment a polyol mixture comprising a polyol with a water-solubilizing group and a polyol with an  $R_f$  group is used. When the polyfunctional isocyanate compound is a triisocyanate, the polyol is preferably a diol to prevent undesired gelation, which can occur when polyols having three or more hydroxyl groups are reacted with a triisocyanate.

The resulting isocyanate functional urethane oligomers and compounds are then further reacted with one or more of the monoalcohols described above. The monoalcohol(s) is (are) added to the above reaction mixture, and react(s) with a substantial portion of the remaining NCO groups. The above temperatures, dry conditions, and mixing are continued one-half to two hours, preferably one hour. Terminal fluorine-containing and/or long-chain hydrocarbon groups are thereby bonded to the isocyanate functional urethane oligomers and compounds. These oligomers and compounds are further functionalized with silane groups described above by reacting any of the remaining NCO groups in the resulting mixture with one or more of the reactive hydrogen-containing silane compounds described above. Thus, the silane compound(s) is (are) added to the reaction mixture, using the same conditions as with the previous additions. Aminosilanes are preferred, because of the rapid and complete reaction that occurs between the remaining NCO groups and the silane compound's amino groups. Isocyanato functional silane compounds may be used and are preferred when the ratio of polyfunctional isocyanate compound to the polyol and monoalcohol is such that the resulting oligomer has a terminal hydroxyl group.

Water-solubilizing compounds can be added and reacted with NCO groups under the conditions described above in any of the steps described above. For example, as mentioned above, the water-solubilizing compound can be added as a mixture with the polyol. Alternatively, the water-solubilizing compound can be added (a) after reaction of the polyol with the polyfunctional isocyanate, (b) as a mixture with the monoalcohol(s), (c) after reaction of the polyol and monoalcohol with the polyfunctional isocyanate, (d) as a mixture with the silane, and (e) after the reaction of the polyol, monoalcohol, and silane with the polyfunctional isocyanate. When the water-solubilizing compound is a

monoalcohol, it is preferably added as a mixture with the fluorine-containing monoalcohol or the long-chain hydrocarbon monoalcohol. When the water-solubilizing compound is a diol, it is preferably added as a mixture with the polyol.

When the chemical composition of the present invention contains a urethane oligomer having one or more carboxylic acid groups, solubility of the composition in water can be further increased by forming a salt of the carboxylic acid group(s). Basic salt-forming compounds, such as tertiary amines, quaternary ammonium hydroxides, and inorganic bases, including, but not limited to, those selected from the group consisting of sodium hydroxide, potassium hydroxide, cesium hydroxide, lithium hydroxide, calcium hydroxide, magnesium hydroxide, zinc hydroxide, and barium hydroxide, may be used in a sufficient amount (i.e., in an amount to maintain a pH of greater than about 6). These basic salt-forming compounds preferably can be added in the water phase, but optionally in the preparation of the urethane oligomers, to form salts with the incorporated, pendant and/or terminal carboxylic acid groups on the urethane oligomer. Examples of useful amine salt-forming compounds include, but are not limited to, those selected from the group consisting of ammonia, trimethylamine, triethylamine, tripropylamine, triisopropylamine, tributylamine, triethanolamine, diethanolamine, methyldiethanolamine, morpholine, N-methylmorpholine, dimethylethanolamine, and mixtures thereof. Preferred salt forming compounds include those selected from the group consisting of ammonia, trimethylamine, dimethylethanolamine, methyldiethanolamine, triethylamine, tripropylamine, and triisopropylamine, since the chemical compositions prepared therefrom are not excessively hydrophilic upon coating and curing. Since certain salts formed by the reaction of salt forming compounds, such as potassium hydroxide in combination with a carboxylic acid group, could result in undesired reaction with NCO groups, it is preferred to add the salt forming compound in a water phase after all of the diols, alcohol, and silane compounds have been reacted with the NCO groups of the polyfunctional isocyanate compound.

The coating composition of the present invention comprises a solution comprising the chemical compositions of the present invention and at least one solvent. When applied as coatings, the chemical compositions of the present invention, comprising one or more urethane oligomers, impart stain-release characteristics and exhibit durability (i.e. they

resist being worn-off) when exposed to wear and abrasion from use, cleaning, and the elements.

The chemical compositions of the present invention can be dissolved in a variety of solvents to form coating compositions suitable for use in coating the chemical compositions of the present invention onto a substrate. Coating compositions preferably contain from about 0.1 to about 10 percent chemical composition, based on the weight of the coating composition. Preferably the chemical composition is used in the coating composition at about 1 to about 5 weight percent, most preferably from about 2 to about 3 weight percent. It has been found that the best stain-release properties are obtained when the coating composition is a visually clear solution. Suitable solvents include water, alcohols, esters, glycol ethers, amides, ketones, hydrocarbons, chlorohydrocarbons, chlorocarbons, and mixtures thereof. Depending upon the substrate to which the composition is being applied, water is the preferred solvent because it does not raise any environmental concerns and is accepted as safe and non-toxic.

Useful alcohol solvents include, but are not limited to, amyl alcohol, n-butanol, diisobutyl carbinol, ethanol, 2-ethylhexanol, hexylene glycol, isobutanol, isopropanol, amyl alcohol, 2-methyl butanol, n-pentanol, n-propanol, and mixtures thereof.

Useful ester solvents include, but are not limited to, amyl acetate, n-butyl acetate, t-butyl acetate, Butyl CARBITOL™ Acetate ( $C_4H_9O(C_2H_4O)_2C(O)CH_3$ ), Butyl CELLOSOLVE™ Acetate ( $C_4H_9OCH_2CH_2OC(O)CH_3$ ), CELLOSOLVE™ Acetate ( $C_2H_5OCH_2CH_2OC(O)CH_3$ ), methyl acetate, ethyl acetate, isopropyl acetate, isobutyl acetate, Methyl PROPASOL™ Acetate ( $CH_3OCH_2CH(CH_3)OC(O)CH_3$ ), n-propyl acetate, n-butyl propionate, UCAR™ Ester EEP ( $C_2H_5OC_2H_4OC(O)CH_2CH_3$ ), UCAR™ Filmer IBT ( $((CH_3)_2CHCH(OH)C(CH_3)_2CH_2OC(O)CH(CH_3)_2$ ), n-pentyl propionate, and dibasic esters such as dimethyl succinate, dimethyl glutarate, dimethyl adipate, and mixtures thereof.

Useful glycol ether solvents include, but are not limited to, butoxytriglycol ( $C_4H_9O(C_2H_4O)_3H$ ), Butyl CARBITOL™ ( $C_4H_9O(C_2H_4O)_2H$ ), Butyl CELLOSOLVE™ ( $C_4H_9OCH_2CH_2OH$ ), CARBITOL™ ( $C_2H_5O(C_2H_4O)_2H$ ), CELLOSOLVE™ ( $C_2H_5OCH_2CH_2OH$ ), poly(ethylene glycol) butyl ether (ECOSOFT™ Solvent PB,  $C_4H_9O(C_2H_4O)_xH$ ), poly(ethylene glycol) ethyl ether (ECOSOFT™ Solvent PE,  $C_2H_5O(C_2H_4O)_xH$ ), poly(ethylene glycol) hexyl ether (ECOSOFT™ Solvent PH

$C_6H_{11}O(C_2H_4O)_xH$ ), ethoxytriglycol ( $C_2H_5O(C_2H_4O)_3H$ ), Hexyl CARBITOL™ ( $C_6H_{13}O(C_2H_4O)_2H$ ), Hexyl CELLOSOLVE™ ( $C_6H_{13}OCH_2CH_2OH$ ), methoxytriglycol ( $CH_3O(C_2H_4O)_3H$ ), Methyl CARBITOL™ ( $CH_3O(C_2H_4O)_2H$ ), Methyl CELLOSOLVE™ ( $CH_3OCH_2CH_2OH$ ), Propyl CELLOSOLVE™ ( $C_3H_7OCH_2CH_2OH$ ), and mixtures thereof.

Useful amide solvents include, but are not limited to, dimethyl acetamide, N-methylpyrrolidone, mixtures thereof, and the like. Useful ketone solvents include, but are not limited to, acetone, diacetone alcohol ( $(CH_3)_2C(OH)CH_2C(O)CH_3$ ), diisobutyl ketone, isobutyl heptyl ketone (ECOSOFT™ Solvent IK,  $(CH_3)_2CHCH_2C(O)CH_2CH(CH_3)CH_2CH(CH_3)_2$ ), isophorone, methyl ethyl ketone, methyl n-amyl ketone, methyl isobutyl ketone, mixtures thereof, and the like.

Useful hydrocarbon solvents include, but are not limited to, toluene, xylene, mixtures thereof, and the like. Useful chlorohydrocarbon solvents include, but are not limited to, 4-chlorotrifluoromethylbenzene, 3,4-bis(dichloro)trifluoromethylbenzene, mixtures thereof, and the like. The preceding trademarked solvents are trademarked by Union Carbide, and are available from Union Carbide (Danbury, CT) or Sigma-Aldrich (Milwaukee, WI).

The coating compositions of the present invention can be applied as to a wide variety of substrates resulting in an article that displays durable stain-release properties.

The article of the present invention comprises a substrate having one or more surfaces and on the one or more surfaces of this substrate is a cured coating derived from at least one solvent and a chemical composition of the present invention. After application and curing of the coating composition, the substrate displays durable stain-release properties.

The coating compositions of the present invention can be applied to a wide variety of substrates, including, but not limited to, hard substrates and fibrous substrates. Hard substrates include, but are not limited to, glass, ceramic, masonry, concrete, natural stone, man-made stone, metals, wood, plastics, and painted surfaces. Fibrous substrates include woven, knit, and nonwoven fabrics, textiles, carpets, leather, and paper. Substrates can have flat or curved surfaces and may be particulate and fibrous in nature, as well.

Preferred substrates are capable of imbibing a liquid and are therefore porous. Such substrates are particularly subject to staining and soiling, but also benefit greatly from the chemical compositions of the present invention because the coating composition can



penetrate into the porous substrate surface. Substrates comprising nucleophilic groups selected from the group consisting of  $-OH$  and  $-NHR$ , wherein R is H or lower alkyl are also preferred because they can bond to the silane groups of the chemical compositions of the present invention increasing durability. Substrates of this type include those having  
5 siliceous and metallic surfaces.

Representative examples of substrates that can be coated with the coating composition include lenses used in ophthalmic spectacles, sunglasses, optical instruments, illuminators, watch crystals, and the like; plastic window glazing; signs; decorative surfaces such as wallpaper and vinyl flooring; composite or laminated substrates such as  
10 FORMICA brand sheeting or laminated flooring (e.g., PERGO brand flooring); ceramic tile and fixtures (sinks, showers, toilets); natural and man-made stones; decorative and paving stones; cement and stone sidewalks and driveways; particles that comprise grout or the finished surface of applied grout; wood furniture surface (desktops, tabletops); cabinet surfaces; wood flooring, decking, and fencing; leather; paper; fiber glass fabric and other  
15 fiber-containing fabrics; textiles; carpeting; and the like.

Since coatings prepared from the coating compositions can render metal surfaces resistant to soils, the optical properties of metal surfaces like those on decorative metal strips and mirrors can be preserved longer. The coating compositions can make wood surfaces more resistant to food and beverage stains while helping to maintain a lustrous  
20 appearance. In addition, the coating compositions can be applied as a protective coating on aircraft wings, boat hulls, fishing line, medical surfaces, and siding, and can be used in food release, mold release, adhesive release applications, and the like. Decorative stones include, for example, marble, granite, limestone, slate, and the like.

Preferred substrates that can be coated with the coating composition of the present  
25 invention are hard, porous substrates, such as decorative and paving stones; cement and stone sidewalks and driveways; particles that comprise grout or the finished surface of applied grout, wood furniture surface (desktops, tabletops); cabinet surfaces; wood flooring, decking, and fencing; and the like.

To impart stain-release characteristics to a substrate, having of one or more  
30 surfaces, (a) the coating composition of the present invention is applied onto one or more surfaces of the substrate and (b) the coating composition is allowed to cure (i.e. dry), preferably at ambient temperature.

Any method of application that produces a thin coating of the coating composition on the substrate surface may be used. Examples of useful application methods include, but are not limited to, spraying, padding, dipping (immersing the substrate in the coating composition), spin-coating, flow coating, and painting. When coating flat substrates of appropriate size, knife-coating or bar-coating may be used to ensure uniform coatings of the substrate.

The coating compositions can be applied to a substrate in any desired thickness. Coatings as thin as a few microns can offer excellent low surface energy, stain-resistance, and stain-release. However, thicker coatings (e.g., up to about 20 microns or more) can also be used. Thicker coatings can be obtained by applying to the substrate a single thicker layer of a coating composition that contains a relatively high concentration of the chemical composition of the present invention. Thicker coatings can also be obtained by applying successive layers to the substrate of a coating composition that contains a relatively low concentration of the chemical composition of the present invention. The latter can be done by applying a layer of the coating composition to the substrate and then drying prior to application of a successive layer. Successive layers of the coating can then be applied to dried layers. This procedure can be repeated until the desired coating thickness is achieved.

After the substrate is coated with the coating composition, the coated substrate is dried, preferably at ambient temperature or at an elevated temperature, more preferably at ambient temperature, to provide a cured coating. The coating composition is "cured" when dried and the solvent is evaporated and a cured coating is provided. This cure preferably takes place at approximately 15 to 35 °C (i.e. ambient temperature) until dryness is achieved, up to approximately 24 hours. During this time and over a subsequent period of time, the chemical composition can also form chemical bonds with the substrate and between molecules of the chemical composition.

The resulting coated substrates coated with a cured coating, derived from at least one solvent and a chemical composition of the present invention, have been found to be non-staining and/or to release stains with simple washing methods. The cured coating of the chemical compositions of the present invention have also been found to be durable and hence to resist being worn-off due to wear and abrasion from use, cleaning, and the elements.

Objects and advantages of this invention are further illustrated by the following examples and evaluations, but the particular materials and amounts thereof recited in these examples, as well as other conditions and details, should not be construed to unduly limit this invention. In the examples, where weight percent or parts by weight are indicated, these are based on the weight of the entire composition unless specified otherwise.

### Examples

#### Glossary

**APTES** – 3-Aminopropyltriethoxysilane, available from Sigma-Aldrich, Milwaukee, WI.

**APTMS** – 3-Aminopropyltrimethoxysilane, available from Sigma-Aldrich, Milwaukee, WI.

**Bicine** - (HOCH<sub>2</sub>CH<sub>2</sub>)<sub>2</sub>NCH<sub>2</sub>COOH, available from Sigma-Aldrich, Milwaukee, WI.

**CA** - Citric acid, HOC(CO<sub>2</sub>H)(CH<sub>2</sub>CO<sub>2</sub>H)<sub>2</sub>, available from Sigma-Aldrich, Milwaukee, WI.

**n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CO<sub>2</sub>CH<sub>2</sub>CH<sub>2</sub>CH(CH<sub>3</sub>)OH** – Prepared by reaction of n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)COF (U.S. Pat. No. 6,013,795, Example A6 (Manzara et al.)) with HOCH<sub>2</sub>CH<sub>2</sub>CH(CH<sub>3</sub>)OH essentially as described in Example D13 of Manzara.

**n-C<sub>6</sub>F<sub>13</sub>CH<sub>2</sub>CH<sub>2</sub>OH** – Available from Sigma-Aldrich, Milwaukee, WI.

**C<sub>7</sub>F<sub>15</sub>CH<sub>2</sub>OH** – Available from Sigma-Aldrich, Milwaukee, WI.

**C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CONHCH<sub>2</sub>CH<sub>2</sub>OH** – Prepared from n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CO<sub>2</sub>CH<sub>3</sub> (U.S. Patent No. 6,013,795, Example C3 (Manzara et al)) and 2-aminoethanol essentially as described in Joullie, M. M., *JACS*, **77**, 6662 (1955).

**n-C<sub>4</sub>F<sub>9</sub>OC<sub>2</sub>F<sub>4</sub>OCF<sub>2</sub>CH<sub>2</sub>OCH<sub>2</sub>CH<sub>2</sub>OH** – Prepared from 1,1-dihydroperfluoro-2-(butoxyethoxy)ethanol (Example 3 of U.S. Pat. No. 5,437,812) (Janulis et al.) according to Example 23 of Janulis.

**n-C<sub>3</sub>F<sub>7</sub>CONHCH<sub>2</sub>CH<sub>2</sub>OH** – Prepared as in Hauptschein, M. et al, *JACS*, **77**, 4930 (1955).

**Dawn™ Detergent** - A dishwashing product available from Procter & Gamble, Cincinnati, OH.

**1-Decanol** – C<sub>10</sub>H<sub>21</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

**DHBA** - 3,5-Dihydroxybenzoic acid, available from Sigma-Aldrich, Milwaukee, WI.

**1-Dodecanol** -C<sub>12</sub>H<sub>25</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

5 **DS-10** – Rhodacal™ DS-10, dodecylbenzenesulfonic acid sodium salt, available from Rhone-Poulenc Surf. & Spec., Rhone-Poulenc, France.

**FBSEE** – C<sub>4</sub>F<sub>9</sub>SO<sub>2</sub>N(CH<sub>2</sub>CH<sub>2</sub>OH)<sub>2</sub>, having an equivalent weight of 185.5, can be made in two stages by reacting PBSF with ammonia and ethylenechlorohydrin, using a procedure essentially as described in Example 1 of U.S. Pat. No. 2,803,656 (Ahlbrecht, et al.).

10 **GA** – Glycolic acid, HOCH<sub>2</sub>COOH, available from Sigma-Aldrich, Milwaukee, WI.

**HDI** – Hexamethylene-1,6-diisocyanate, Desmodur™ H, available from Bayer Corporation, Pittsburgh, PA.

15 **2,2,3,3,4,4,4-Heptafluorobutanol** -CF<sub>3</sub>C<sub>2</sub>F<sub>4</sub>CH<sub>2</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

**1-Hexadecanol** - C<sub>16</sub>H<sub>33</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

**HMP** – 2,2-bis(hydroxymethyl)propionic acid, available from Sigma-Aldrich, Milwaukee, WI.

20 **HMPEPB** –1,4-Bis(hydroxymethoxyperfluoroethoxy)perfluorobutane, HOCH<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>OCF<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>OCF<sub>2</sub>CF<sub>2</sub>CH<sub>2</sub>OH, was made as follows:

Acid fluoride –terminated di(perfluorotetramethylene oxide)  
(FCO(CF<sub>2</sub>)<sub>2</sub>O(CF<sub>2</sub>)<sub>4</sub>O(CF<sub>2</sub>)<sub>2</sub>COF) (1100 g, 22 % purity by GLC) was added dropwise to well-stirred methanol (250 ml), and the resulting mixture was stirred for one hour at room temperature and then poured over 1 L of cracked ice. The oily layer that separated was  
25 extracted with 200 ml of diethyl ether, and the resulting ether extract was washed three times with water and dried with magnesium sulfate. After removal of the ether by rotary evaporation, the resulting material was subjected to distillation at 10 mm Hg until the temperature of distilling material reached 85 °C. The remaining undistilled, crude dimethyl ester (667 g) was reduced to the dialcohol with sodium borohydride. Thus,  
30 sodium borohydride (54.5 g) was slurried in 400 ml of THF and brought to reflux, and maintained at reflux while the dimethyl ester (333.5 g) was added, followed by three hours of refluxing. The resulting mixture was cautiously poured over 2 L of cracked ice

containing 125 ml concentrated sulfuric acid, forming an oily layer. This reduction procedure was repeated on the remaining dimethyl ester, and the resulting oily layers were combined, washed with aqueous sodium carbonate solution, dried over anhydrous calcium sulfate and distilled. The fraction which distilled at 77-120 °C (1-3.7 mm Hg) crystallized at room temperature. Recrystallization of the resulting crystals from benzene containing a small amount of methylene chloride yielded 167.4 g of the expected diol.

The acid fluoride –terminated di(perfluorotetramethylene oxide was prepared by photolysis of perfluorooxydipropionyl fluoride as described in Zollinger, J. L. et al, J. Macromol. Sci.-Chem., A3(7), pp. 1443-1464 (1969). The perfluorooxydipropionyl fluoride was made by electrochemical fluorination of oxydipropionyl fluoride as described in U.S. Pat. No. 858,671.

**MA** – Malic acid, available from Sigma-Aldrich, Milwaukee, WI.

**MDI** – Diphenylmethane 4,4'-diisocyanate, available as Desmodure M from Bayer Corporation, Pittsburgh, PA

**MeFBSE** –  $C_4F_9SO_2N(CH_3)CH_2CH_2OH$ , having an equivalent weight of 357, can be made in two stages by reacting PBSF with methylamine and ethylenechlorohydrin, using a procedure essentially as described in Example 1 of U.S. Pat. No. 2,803,656 (Ahlbrecht, et al.).

**MeFOSE** –  $C_8F_{17}SO_2N(CH_3)CH_2CH_2OH$ , having an equivalent weight of 557, can be made in two stages by reacting POSF with methylamine and ethylenechlorohydrin, using a procedure essentially as described in Example 1 of U.S. Pat. No. 2,803,656 (Ahlbrecht et al.), or alternatively by reacting N-methylperfluorooctylsulfonamide with ethylene glycol carbonate, using the procedure essentially as described in Example 7 of U.S. Pat. No. 3,734,962 (Niederprum et al.).

**MPTMS** – 3-Mercaptopropyltrimethoxysilane, available from Sigma-Aldrich, Milwaukee, WI.

**MSA** - Mercaptosuccinic acid, available from Sigma-Aldrich, Milwaukee, WI.

**N100** – Desmodur™ N-100, a hexamethylene-1,6-diisocyanate based polyfunctional isocyanate compound containing biuret groups, available from Bayer Corporation, Pittsburgh, PA.

**N3300** - Desmodur<sup>TM</sup> N-3300, a hexamethylene-1,6-diisocyanate based polyfunctional isocyanate compound with an NCO equivalent weight of 195 and containing 21.3 –21.8 weight % NCO, available from Bayer Corporation, Pittsburgh , PA.

5 **N3600** – Desmodur<sup>TM</sup> N-3600, a hexamethylene-1,6-diisocyanate based polyfunctional isocyanate compound with an NCO equivalent weight of 183, available from Bayer Corporation, Pittsburgh, PA.

**1-Octadecanol** - C<sub>18</sub>H<sub>37</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

**1-Octanol** - C<sub>8</sub>H<sub>17</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

10 **PBSF** – C<sub>4</sub>F<sub>9</sub>SO<sub>2</sub>F, perfluorobutanesulfonyl fluoride, available from Sigma-Aldrich, Milwaukee, Wi.

**Perfluorocyclohexylmethanol** - cyc-C<sub>6</sub>F<sub>11</sub>CH<sub>2</sub>OH, available from ABCR GmbH and Co., Karlsruhe, Germany.

**Poly-3-Fox<sup>TM</sup> diol** – H(OCH<sub>2</sub>C(CH<sub>3</sub>)(CH<sub>2</sub>OCH<sub>2</sub>CF<sub>3</sub>)CH<sub>2</sub>)<sub>x</sub>OH, available from Omnova Solutions Inc., Akron, OH.

15 **POSF** - C<sub>8</sub>F<sub>17</sub>SO<sub>2</sub>F, perfluorooctanesulfonyl fluoride, commercially available as Fluorad<sup>TM</sup> FX-8 fluorochemical intermediate from 3M Company.

**TEOS** – Tetraethylorthosilicate, available from Sigma-Aldrich, Milwaukee, WI.

**1-Tetradecanol** - C<sub>14</sub>H<sub>29</sub>OH, available from Sigma-Aldrich, Milwaukee, WI.

## **Test Methods**

### **Test Method I - Stain Test**

Zanger Blue limestone tiles (available from Color Tile, Maplewood, MN) (30.5 cm by 30.5 cm by 1.0 cm thick) were divided into 6 sections (10.2 cm by 15.2 cm) and washed with water thoroughly and allowed to dry at room temperature overnight. A 3% aqueous solution of the chemical composition to be evaluated was coated onto the surface by wiping twice with a paper towel saturated with the chemical composition. Each of the resulting treated tile sections was then allowed to dry at ambient laboratory temperature for at least 12 hours before testing. Slate and marble tile, concrete brick, and clear pine wood were similarly treated and tested.

A spot test was used to visually rate the ability of the treated tile sections to prevent a test fluid drop from staining the tile after a given exposure period. The following test fluids were used:

- (1) Grape juice fluid (GF)
- (2) Pennzoil™ ATF Automatic transmission fluid (TF)
- (3) Used 10W30 motor oil (MO)
- (4) Paul Masson™ Burgundy wine (WIN)
- (5) Water saturated with Taster's Choice coffee (COF)
- (6) STP™ heavy duty brake fluid (BF)
- (7) Mazola™ corn oil (CO)

A drop of each of the test fluids was place on each of the treated tile sections. After 20 – 24 hours, the drops were removed by wiping with a clean, dry, paper towel, and the tile was washed and scrubbed with Dawn™ liquid dishwashing soap mixed at 6 weight percent with tap water and rinsed with tap water. The visual appearance of the spot where each drop of test fluid had been place was rated on a scale of 0 – 5 as shown below. A rating of 0 represented the best stain-release performance of a chemical composition treatment of the tile surface.

0 = no visible stain

1 = trace of stain visible

2 = outline of drop barely visible

3 = outline of drop visible

5 4 = dark outline of drop

5 = dark stain which has spread

#### Test Method II - Scrubbing Test to Measure Durability

To determine the chemical composition treatment's durability, the following scrubbing test was used. A detergent solution was prepared consisting of 6% (w/w) Dawn™ liquid dishwashing soap in water. Each chemical composition treated limestone tile was contacted with the detergent solution. The resulting wet surface was scrubbed back and forth 10,000 times with a 12 cm by 3 cm stiff nylon bristle brush held lengthwise, using a Washability & Wear Tester from Paul N. Gardner Company, Inc., Pompano Beach, FL. After rinsing with water, the tile was allowed to dry under ambient conditions for 24 hours before spot testing using Test Method I.

#### Test Method III – GPC Molecular Weight Determination

Sufficient solution was weighed to give 50 mg of solids which was then diluted with 10.0 ml of THF. The solution was run through a 0.45 micron syringe filter and its molecular weight determined using Size Exclusion Chromatography (SEC). The SEC system was operated under the following conditions:

Sample Injection: 200 microliters

Mobile Phase: Tetrahydrofuran-UV Grade; Burdick & Jackson or equivalent grade

25 Flow Rate: 1.0 ml/min.

Detector: Waters 410 Refractive Index; 40 °C; Sensitivity = 1

Columns: UltraStyrigel –6 Columns; 30 cm x 7.8 mm each ( $10^7$ ,  $10^6$ ,  $10^5$ ,  $10^4$ , 500, 100 angstroms) Columns were held at 40 °C.

Standards: Polystyrene, narrow dispersity; ranging 7.50e6 – 580 Mp; (3<sup>rd</sup> order polynomial fit)

The samples were run and effective molecular weight distribution plots were calculated using narrow molecular weight polystyrene standards for calibration. A lower molecular



weight cut-off of 500 Dalton was used in processing the data. Number average ( $M_n$ ), weight average ( $M_w$ ), and polydispersity ( $M_w/M_n$ ) values were obtained for each sample run.

5     Water-Soluble Fluorocarbon-Containing Chemical Compositions With N-Methylpyrrolidone:

Example 1 N3300/HMP/MeFBSE/GA/APTES (2/1/4/0.5/0.33)

      To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692  
10     equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 30.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. MeFBSE (14.5 grams, 0.0406 mole, 0.0406 equivalent) and 0.41 grams  
15     (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155  
20     equivalent) methyldiethanolamine in 98.5 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). The hot clear solution was poured into 161 grams deionized water to make a 10 % by weight chemical composition solution. This solution was further diluted with deionized water to a 3 % by weight chemical composition solution which was tested according to Test Method I. Results are  
25     shown in Table 1.

Example 2 N3300/FBSEE/MeFBSE/GA/APTES (2/1/2.8/1.6/0.33)

      To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692  
30     equivalent) of Desmodur™ N-3300 (N3300), 3.77 grams (0.010 mole, 0.020 equivalent) FBSEE and 29.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added,

and the mixture was heated to 70°C and allowed to react for 1 hour. MeFBSE (10.0 grams, 0.028 mole, 0.028 equivalent) and 1.21 grams (0.0159 mole, 0.0159 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.91 grams (0.016 equivalent) methyldiethanolamine in 60.0 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (26.3 % by weight chemical composition solids). The hot clear solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 1.

Example 3 N3300/DEG/MeFBSE/GA/APTES (2/0.85/2.8/1.6/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 0.90 grams (0.00848 mole, 0.0167 equivalent) diethylene glycol (DEG), and 28.0 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. MeFBSE (10.0 grams, 0.028 mole, 0.028 equivalent) and 1.21 grams (0.0159 mole, 0.0159 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.91 grams (0.016 equivalent) methyldiethanolamine in 60.0 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (23.0 % by weight chemical composition solids). The hot clear solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 1.

Example 4 N3300/BDO/MeFBSE/GA/APTES (2/0.89/2.8/1.6/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 0.80 grams (0.00888 mole, 0.0177 equivalent) 1,4-butanediol (BDO), and 28.0 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. MeFBSE (10.0 grams, 0.028 mole, 0.028 equivalent) and 1.21 grams (0.0159 mole, 0.0159 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.91 grams (0.016 equivalent) methyldiethanolamine in 60.0 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (22.9 % by weight chemical composition solids). The hot clear solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 1.

Example 5 N3300/TEG/MeFBSE/GA/APTES (2/1/3.1/1.6/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.50 grams (0.01 mole, 0.02 equivalent) triethylene glycol (TEG), and 28.0 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. MeFBSE (14.5 grams, 0.0406 mole, 0.0406 equivalent) and 1.21 grams (0.0159 mole, 0.0159 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.91 grams (0.016 equivalent) methyldiethanolamine in 60 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~25 % by weight chemical composition solids). This solution was then diluted with deionized

water to a 3 % by weight chemical composition solution, which was tested according to Test Methods I. Results are shown in Table 1.

Example 6 N3300/HMP/MeFBSE/GA/APTES (2/1/3.1/1.4/0.33)

5 To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 28.0 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin  
10 dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. MeFBSE (11.0 grams, 0.0308 mole, 0.0308 equivalent) and 1.10 grams (0.01446 mole, 0.01446 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction  
15 mixture and allowed to react for an additional 3 hours. A solution of 3.09 grams (0.0259 equivalent) methyldiethanolamine in 56 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (25.3 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which  
20 was tested according to Test Method I. Results are shown in Table 1.

Comparative Examples C1-C3

Untreated limestone tile and limestone tile treated with FC-759 (available from 3M Performance Materials, St. Paul, MN) and Tile Lab Grout and Tile Sealer ( available from  
25 Custom Building Products, Seal Beach, CA) were evaluated using Test Method I. The results are shown Table 1.

Table 1. Stain-Release Ratings of Chemical Compositions, Comprising Reaction Products from Various Diols, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
1	N3300/HMP/MeFBSE/GA/	1	0	0	1	0	1	0	3

	APTES (2/1/4/0.5/0.33)								
2	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33)	0	0	0	1	0	0	0	1
3	N3300/DEG/MeFBSE/GA/APTES (2/0.85/2.8/1.6/0.33)	2	0	0	2	0	3	0	7
4	N3300/BDO/MeFBSE/GA/APTES (2/0.89/2.8/1.6/0.33)	1	0	0	1	0	5	0	7
5	N3300/TEG/MeFBSE/GA/APTES (2/1/3.1/1.6/0.33)	1	0	0	0	0	5	0	6
6	N3300/HMP/MeFBSE/GA/ APTES (2/1/3.1/1.4/0.33)	1	0	0	0	0	4	0	5
C1	None	5	5	5	5	5	5	5	35
C2	FC-759	4	0	0	4	2	0	0	10
C3	Tile Lab Grout & Tile Sealer	4	4	2	3	3	0	0	16

The results in Table 1 show that very good stain-release was provided by chemical compositions with a) a wide range of diols, b) pendant Rf groups replacing some terminal Rf groups (Example 1 compared with Example 2), and c) an increased ratio of water-solubilizing groups to Rf groups (Example 1 compared with Example 6). Coatings made with commercial sealers (Comparative Examples C1-C3) did not perform as well as the chemical compositions.

Example 7 N3300/HMP/CF<sub>3</sub>C<sub>2</sub>F<sub>4</sub>CH<sub>2</sub>OH/GA/APTES (2/1/4/0.54/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 24.0 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. 2,2,3,3,4,4,4-Heptafluorobutanol (CF<sub>3</sub>C<sub>2</sub>F<sub>4</sub>CH<sub>2</sub>OH)(8.0 grams, 0.040 mole, 0.040 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3

hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 70 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 8 N3300/HMP/n-C<sub>6</sub>F<sub>13</sub>CH<sub>2</sub>CH<sub>2</sub>OH/GA/APTES (2/1/4.3/0.54/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, n-C<sub>6</sub>F<sub>13</sub>CH<sub>2</sub>CH<sub>2</sub>OH, (15.6 grams, 0.0429 mole, 0.0429 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 99 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 9 N3300/HMP/C<sub>7</sub>F<sub>15</sub>CH<sub>2</sub>CH<sub>2</sub>OH/GA/APTES (2/1/4/0.54/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 32.0 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin

dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, C<sub>7</sub>F<sub>15</sub>CH<sub>2</sub>OH, (16.0 grams, 0.040 mole, 0.040 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 103 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 10 N3300/HMP/n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CONHCH<sub>2</sub>CH<sub>2</sub>OH/GA/APTES

(2/1/4/0.54/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CONHCH<sub>2</sub>CH<sub>2</sub>OH, (20.3 grams, 0.040 mole, 0.40 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 117 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 11 N3300/HMP/n-C<sub>4</sub>F<sub>9</sub>OC<sub>2</sub>F<sub>4</sub>OCF<sub>2</sub>CH<sub>2</sub>OCH<sub>2</sub>CH<sub>2</sub>OH/GA/APTES

(2/1/4/0.54/0/33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, n-C<sub>4</sub>F<sub>9</sub>OC<sub>2</sub>F<sub>4</sub>OCF<sub>2</sub>CH<sub>2</sub>OCH<sub>2</sub>CH<sub>2</sub>OH, (19.0 grams, 0.040 mole, 0.040 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 118 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 12 N3300/HMP/MeFOSE/GA/APTES (2/1/3.5/0.54/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, MeFOSE, (C<sub>8</sub>F<sub>17</sub>SO<sub>2</sub>N(Me)CH<sub>2</sub>CH<sub>2</sub>OH), (19.5 grams, 0.035 mole, 0.035 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole,



0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 118 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 13 N3300/HMP/ cyc-C<sub>6</sub>F<sub>11</sub>CH<sub>2</sub>OH/GA/APTES (2/1/6.2/0.54/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Perfluorocyclohexylmethanol (cyc-C<sub>6</sub>F<sub>11</sub>CH<sub>2</sub>OH) (19.5 grams, 0.0589 mole, 0.0598 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 90 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 14 N3300/HMP/n-C<sub>3</sub>F<sub>7</sub>CONHCH<sub>2</sub>CH<sub>2</sub>OH/GA/APTES (2/1/3.1/1.6/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone.

While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, n-C<sub>3</sub>F<sub>7</sub>CONHCH<sub>2</sub>CH<sub>2</sub>OH, (10.3 grams, 0.040 mole, 0.040 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 80 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Example 15 N3300/HMP/n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CO<sub>2</sub>C<sub>2</sub>H<sub>4</sub>CH(CH<sub>3</sub>)OH/GA/APTES  
(2/1/3.1/1.4/0.33)

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and 31.5 grams of N-methyl pyrrolidone. While still at room temperature the mixture became a homogeneous solution. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1 hour. Fluorochemical alcohol, n-C<sub>6</sub>F<sub>13</sub>CF(CF<sub>3</sub>)CO<sub>2</sub>CH<sub>2</sub>CH<sub>2</sub>CH(CH<sub>3</sub>)OH, (21.5 grams, 0.040 mole, 0.040 equivalent) and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 120 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). This solution was then diluted with deionized water to a 3

% by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 2.

Table 2. Stain-Release Ratings of Chemical Compositions, Comprising Reaction Products from Various Fluorine-Containing Monoalcohols, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
1	N3300/HMP/MeFBSE/GA/APTES (2/1/4/0.54/0.33)	1	0	0	1	0	1	0	3
7	N3300/HMP/CF <sub>3</sub> C <sub>2</sub> F <sub>4</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/4/0.54/0.33)	4	5	5	4	2	4	4	28
8	N3300/HMP/n-C <sub>6</sub> F <sub>13</sub> CH <sub>2</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/4.3/0.54/0.33)	3	0	0	3	4	0	0	10
9	N3300/HMP/C <sub>7</sub> F <sub>15</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/4/0.54/0.33)	2	1	0	4	3	3	0	13
10	N3300/HMP/ n-C <sub>6</sub> F <sub>13</sub> CF(CF <sub>3</sub> )CONHCH <sub>2</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/4/0.54/0.33)	3	3	1	4	3	5	0	19
11	N3300/HMP/n- C <sub>4</sub> F <sub>9</sub> OC <sub>2</sub> F <sub>4</sub> OCF <sub>2</sub> CH <sub>2</sub> OCH <sub>2</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/4/0.54/0.33)	2	0	0	2	1	4	0	9
12	N3300/HMP/MeFOSE/GA/APTES (2/1/3.5/0.54/0.33)	2	0	0	3	0	0	0	5
13	N3300/HMP/ cyc-C <sub>6</sub> F <sub>11</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/6.2/0.54/0.33)	4	5	5	4	3	4	3	28
14	N3300/HMP/n- C <sub>3</sub> F <sub>7</sub> CONHCH <sub>2</sub> CH <sub>2</sub> OH/ GA/APTES (2/1/3.1/1.6/0.33)	3	2	1	4	4	3	1	18
15	N3300/HMP/n- C <sub>6</sub> F <sub>13</sub> CF(CF <sub>3</sub> )CO <sub>2</sub> C <sub>2</sub> H <sub>4</sub> CH(CH <sub>3</sub> )OH/ GA/APTES (2/1/3.1/1.4/0.33)	2	0	0	3	1	4	0	10

The results in Table 2 show that stain-release was imparted by chemical compositions made from a variety of fluorine-containing monoalcohols comprised of various  $R_f$  groups, with excellent stain-release surprisingly imparted even with the short perfluorocarbon  $C_4F_9$ -containing  $R_f$  groups.

5

Example 16 N3300/Bicine/FBSEE/MeFBSE/GA/APTMS (2/0.5/0.5/2.8/1.8/0.25)

In a 250 ml bottle equipped with a magnetic stirrer, heating mantel, temperature controller, and dry nitrogen purge, was added Desmodur™ N-3300 (N3300) (13.19 g, 0.020 mole, 0.068 equivalent), FBSEE (1.885 g, 0.00487 mole, 0.00974 equivalent),  
10 bicine ( $HOCH_2CH_2)_2NCH_2COOH$ ) (0.815 g, 0.0050 mole, 0.010 equivalent -OH, 0.0050 equivalent -COOH), 4 drops of dibutyltin dilaurate, and 30 g N-methylpyrrolidone. The resulting mixture was stirred and heated at 70 °C for one hour, followed by addition of MeFBSE (9.996 g, 0.028 mole, 0.028 equivalent), and glycolic acid (1.368 g, 0.018 mole, 0.018 equivalent). The resulting reaction mixture was heated for another hour at 70 °C,  
15 followed by addition of APTMS (0.442 g, 0.0025 mole, 0.0025 equivalent) and heated with stirring at 70 °C for an additional two hours. A 5 g portion of the resulting unneutralized chemical composition was taken for GPC analysis, and the remaining composition was cooled to 60 °C and then neutralized by adding to the composition an amount of methyldiethanolamine equivalent to the number of equivalents of carboxylic  
20 acid groups present. After 10 minutes at 60 °C the mixture was cooled and a portion of the resulting neutralized chemical composition was diluted with water to form an aqueous solution containing 3 % by weight of the chemical composition. The 3 % aqueous solution was evaluated for performance using Test Method I, and the results are shown in Table 3. The GPC analysis, conducted according to Test Method III, showed that the  
25 unneutralized chemical composition was comprised of components having a weight average molecular weight ( $M_w$ ) of 22,183, a number average molecular weight ( $M_n$ ) of 4,553, and a polydispersity ( $M_w/M_n$ ) of 4.872, thus indicating the presence of both high and low molecular weight components.

30

Example 17 N3300/Bicine/MeFBSE/GA/APTES (2/1/3.2/1.4/0.2)

An unneutralized chemical composition was prepared essentially as in Example 16 except that 13.54 g (0.0204 mole, 0.0694 equivalent) N3300, 1.63 g (0.010 mole, 0.020 equivalent -OH, 0.020 equivalent -COOH ) bicine, 1.06 g (0.0139 mole, 0.0139 equivalent) glycolic acid (GA), 11.42 g (0.032 mole, 0.032 equivalent) MeFBSE, and 0.44 g (0.0020 mole, 0.0020 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. A small portion of the resulting unneutralized chemical composition was taken for GPC analysis, and the remaining composition was neutralized, made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 3. The GPC analysis, conducted according to Test Method III, showed that the unneutralized chemical composition was comprised of components having a Mw of 3,739, a Mn of 14,928, and a Mw/Mn of 3.992, thus indicating the presence of both high and low molecular weight components.

Example 18 N3300/FBSEE/MeFBSE/CA/APTES (2/1/3.1/1.5/0.2)

An unneutralized chemical composition was prepared essentially as in Example 16 except that 6.63 g (0.010 mole, 0.034 equivalent) N3300, 1.885 g (0.00487 mole, 0.00974 equivalent) FBSEE, 15 g N-methylpyrrolidone, 0.684 g (0.00356 mole, 0.00356 equivalent -OH, 0.0107 equivalent -COOH) citric acid (CA), 4.998 g (0.014 mole, 0.014 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. A small portion of the resulting unneutralized chemical composition was taken for GPC analysis, and the remaining composition was neutralized, made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 3. The GPC analysis, conducted according to Test Method III, showed that the unneutralized chemical composition was comprised of components having a Mw of 4,043, a Mn of 12,385, and a Mw/Mn of 3.063, thus indicating the presence of both high and low molecular weight components.

Example 19 N3300/Bicine/MeFBSE/CA/APTES (2/1/3.1/1.5/0.2)

An unneutralized chemical composition was prepared essentially as in Example 16 except that 6.63 g (0.010 mole, 0.034 equivalent) N3300, 0.815 g (0.0050 mole, 0.010 equivalent -OH, 0.0050 equivalent -COOH) bicine, 15 g N-methylpyrrolidone, 1.44 g (0.0075 mole, 0.0075 equivalent -OH, 0.0225 equivalent -COOH) citric acid (CA), 5.53 g (0.0155 mole, 0.0155 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. A small portion of the resulting unneutralized chemical composition was taken for GPC analysis, and the remaining composition was neutralized, made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 3. The GPC analysis, conducted according to Test Method III, showed that the unneutralized chemical composition was comprised of components having a Mw of 4,325, a Mn of 15,016, and a Mw/Mn of 3.472, thus indicating the presence of both high and low molecular weight components.

Example 20 N3300/Bicine/MeFBSE/MSA/APTES (2/1/3.1/1.5/0.2)

An unneutralized chemical composition was prepared essentially as in Example 16 except that 6.63 g (0.010 mole, 0.034 equivalent) N3300, 0.815 g (0.0050 mole, 0.010 equivalent -OH, 0.0050 equivalent -COOH) bicine, 15 g N-methylpyrrolidone, 1.2 g (0.0080 mole, 0.0080 equivalent -SH, 0.016 equivalent -COOH) mercaptosuccinic acid (MSA), 5.355 g (0.015 mole, 0.015 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. A small portion of the resulting unneutralized chemical composition was taken for GPC analysis, and the remaining composition was neutralized, made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 3. The GPC analysis, conducted according to Test Method III, showed that the unneutralized chemical composition was comprised of components having a Mw of 4,553, a Mn of 22,183, and a Mw/Mn of 4.872, thus indicating the presence of both high and low molecular weight components.

Example 21 N3300/Bicine/MeFBSE/MA/APTES (2/1/3.6/1/0.2)

A chemical composition was prepared essentially as in Example 16 except that 6.63 g (0.010 mole, 0.034 equivalent) N3300, 0.815 g (0.0050 mole, 0.010 equivalent –OH, 0.0050 equivalent –COOH) bicine, 15 g N-methylpyrrolidone, 0.67 g (0.0050 mole, 0.0050 equivalent –OH, 0.010 equivalent –COOH) malic acid (MA), 6.426 g (0.018 mole, 0.018 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. The resulting chemical composition was neutralized, and made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 3.

Example 22 N3300/HMP/MeFBSE/MA/APTES (2/1/3.6/1/0.2)

A chemical composition was prepared essentially as in Example 16 except that 6.63 g (0.010 mole, 0.034 equivalent) N3300, 0.67 g (0.0050 mole, 0.010 equivalent –OH, 0.0050 equivalent –COOH) HMP, 15 g N-methylpyrrolidone, 0.67 g (0.0050 mole, 0.0050 equivalent –OH, 0.010 equivalent –COOH) malic acid (MA), 6.426 g (0.018 mole, 0.018 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. The resulting chemical composition was neutralized, and made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 3.



Table 3. Stain-Release Ratings of Chemical Compositions, Comprising Reaction Products from Various Water-Solubilizing Compounds, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
16	N3300/Bicine/FBSEE/MeFBSE/GA/APTMS (2/0.5/0.5/2.8/1.8/0.25)	1	0	0	1	0	4	0	6
17	N3300/Bicine/MeFBSE/GA/APTES (2/1/3.2/1.4/0.2)	3	1	1	4	3	1	0	13
18	N3300/FBSEE/MeFBSE/CA/APTES (2/1/3.1/1.5/0.2)	4	0	0	4	0	0	0	8
19	N3300/Bicine/MeFBSE/CA/APTES (2/1/3.1/1.5/0.2)	1	0	0	0	0	4	0	5
20	N3300/Bicine/MeFBSE/MSA/APTES (2/1/3.1/1.5/0.2)	1	0	0	1	0	5	0	7
21	N3300/Bicine/MeFBSE/MA/APTES (2/1/3.6/1/0.2)	2	0	0	3	0	3	0	8
22	N3300/HMP/MeFBSE/MA/APTES (2/1/3.6/1/0.2)	1	0	0	1	0	1	0	3

- 5 The results in Table 3 show that chemical compositions made with various water-solubilizing compounds imparted very good stain-release properties.

Example 23 N3600/Bicine/MeFBSE/GA/APTES (2/1/3.2/1.4/0.2)

- 10 A chemical composition was prepared essentially as in Example 16 except that 6.222 g (0.010 mole, 0.0340 equivalent) N3600, 0.815 g (0.0050 mole, 0.010 equivalent - OH, 0.0050 equivalent -COOH ) bicine, 20 g N-methylpyrrolidone, 0.532 g (0.0070 mole, 0.0070 equivalent) glycolic acid (GA), 5.712 g (0.016 mole, 0.016 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. The resulting chemical composition was neutralized, and made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 4.
- 15

Example 24 N3600/Bicine/MeFBSE/CA/APTES (2/1/3.1/1.5/0.2)

A chemical composition was prepared essentially as in Example 16 except that 6.222 g (0.010 mole, 0.0340 equivalent) N3600, 0.815 g (0.0050 mole, 0.010 equivalent -OH, 0.0050 equivalent -COOH ) bicine, 14 g N-methylpyrrolidone, 1.2 g (0.0062 mole, 0.0062 equivalent -OH, 0.0187 equivalent -COOH) citric acid (CA), 5.355 g (0.015 mole, 0.015 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. The resulting chemical composition was neutralized, and made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 4.

Example 25 N3600/Bicine/MeFBSE/MSA/APTES (2/1/3.2/1.4/0.2)

A chemical composition was prepared essentially as in Example 16 except that 6.222 g (0.010 mole, 0.0340 equivalent) N3600, 0.815 g (0.0050 mole, 0.010 equivalent -OH, 0.0050 equivalent -COOH ) bicine, 14 g N-methylpyrrolidone, 1.2 g (0.0080 mole, 0.0080 equivalent -SH, 0.016 equivalent -COOH) mercaptosuccinic acid (MSA), 5.355 g (0.015 mole, 0.015 equivalent) MeFBSE, and 0.221 g (0.0010 mole, 0.0010 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. The resulting chemical composition was neutralized, and made into a 3 weight % aqueous solution for evaluation and tested essentially as in Example 16. Stain-release test results are shown in Table 4.

Table 4. Stain-Release Ratings of Chemical Compositions, Comprising Reaction Products from Various Water-Solubilizing Compounds and Desmodur™ N-3600, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
23	N3600/Bicine/MeFBSE/GA/APTES (2/1/3.2/1.4/0.2)	0	0	0	1	1	1	0	3
24	N3600/Bicine/MeFBSE/CA/APTES (2/1/3.1/1.5/0.2)	2	0	0	1	0	5	0	8
25	N3600/Bicine/MeFBSE/MSA/APTES (2/1/3.2/1.4/0.2)	1	0	0	3	0	4	0	8

- 5 The results in Table 4 show that chemical compositions made with various water-solubilizing compounds and Desmodur™ 3600 imparted very good stain-release properties.

Water-Soluble Hydrocarbon-Containing Chemical Compositions:

10 Example 26 N3300/HMP/C<sub>12</sub>H<sub>25</sub>OH/GA/APTES (2/1/3.1/1.5/0.2)

- A chemical composition was prepared essentially as in Example 16 except that 13.26 g (0.020 mole, 0.068 equivalent) N3300, 1.34 g (0.010 mole, 0.020 equivalent -OH, 0.010 equivalent -COOH ) HMP, 66 g ethyl acetate, 5.766 g (0.031 mole, 0.031 equivalent) 1-dodecanol (C<sub>12</sub>H<sub>25</sub>OH), 1.14 g (0.015 mole, 0.015 equivalent) glycolic acid, and 0.442 g (0.0020 mole, 0.0020 equivalent) APTES were used instead of the corresponding reactants and amounts in Example 16. After the resulting chemical composition was neutralized essentially as in Example 16, a portion (46 g) of the neutralized chemical composition was mixed with 110 g water, and the ethyl acetate was stripped from the solution using a rotary evaporator. The resulting clear solution (98 g) contained about 14 weight % of the chemical composition and was diluted with water to form a 3 weight % solution of the chemical composition. The resulting solution was tested according to Test Method I, and the results are shown in Table 5.

Example 27 N3300/HMP/C<sub>16</sub>H<sub>33</sub>OH/GA/APTMS (2/1/2.6/2/0.2)

A chemical composition was prepared essentially as in Example 16 except that 13.26 g (0.020 mole, 0.068 equivalent) N3300, 1.34 g (0.010 mole, 0.020 equivalent -OH, 0.010 equivalent -COOH ) HMP, 54 g ethyl acetate, 6.32 g (0.026 mole, 0.026 equivalent) 1-hexadecanol (C<sub>16</sub>H<sub>33</sub>OH), 1.52 g (0.020 mole, 0.020 equivalent) glycolic acid, and 0.358 g (0.0020 mole, 0.0020 equivalent) APTMS were used instead of the corresponding reactants and amounts in Example 16. After the resulting chemical composition was neutralized essentially as in Example 16, a portion (32 g) of the neutralized chemical composition was mixed with 55 g water containing 0.45 g DS-10, and the ethyl acetate was stripped from the solution using a rotary evaporator. The resulting mixture (53 g) contained about 18 weight % of the chemical composition and was diluted with water to form a 5 weight % aqueous emulsion solution of the chemical composition. The resulting aqueous emulsion solution was tested according to Test Method I, and the results are shown in Table 5.

Table 5. Stain-Release Ratings of Chemical Compositions, Comprising Reaction Products from Hydrocarbon Monoalcohols, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
26	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/3.1/1.5/0.2)	3	0	1	2	0	2	0	8
27	N3300/HMP/C <sub>16</sub> H <sub>33</sub> OH/GA/APTMS (2/1/2.6/2/0.2)	5	2	1	4	1	4	3	20

The results in Table 5 show that chemical compositions made with hydrocarbon monoalcohols imparted stain-release properties, and surprisingly the composition made with C<sub>12</sub>H<sub>25</sub>OH (Example 26) produced significantly greater stain-release than the corresponding composition made with C<sub>16</sub>H<sub>33</sub>OH (Example 27).

Water-Soluble Hydrocarbon-Containing Chemical Compositions With N-Methylpyrrolidone:

Examples 28-36

To a 250 ml flask equipped with a heating mantel, magnetic stirring bar, nitrogen inlet, and temperature controller was added with stirring 13.5 grams (0.0204 mole, 0.0692 equivalent) of Desmodur™ N-3300 (N3300), 1.35 grams (0.010 mole, 0.020 equivalent) 2,2-bis(hydroxymethyl)propionic acid (HMP), and N-methyl pyrrolidone (NMP). While still at room temperature the mixture was stirred until a homogeneous solution was obtained. Dry nitrogen was bubbled through the solution for 2 minutes. Dibutyltin dilaurate (4 drops) was then added, and the mixture was heated to 70°C and allowed to react for 1-2 hours. The hydrocarbon monoalcohol and 0.41 grams (0.00539 mole, 0.00539 equivalent) of glycolic acid (GA) were added to the reaction mixture, and reaction was continued for another hour. 3-Aminopropyltriethoxysilane (APTES) (0.74 grams, 0.00334 mole, 0.00334 equivalent) was then added to the reaction mixture and allowed to react for an additional 3 hours. A solution of 1.85 grams (0.0155 equivalent) methyldiethanolamine in 77 grams deionized water was then added to the reaction mixture still at 70°C, and the mixture was stirred at 60 – 70°C until it became a clear solution (~20 % by weight chemical composition solids). The hot clear solution was diluted with deionized water to a 5 % by weight chemical composition solution, which was tested according to Test Method I. Results are shown in Table 7.

Table 6. Amounts of NMP and Hydrocarbon Monoalcohol Used in Examples 28-36.

Example	Chemical Composition Components	NMP (g)	Hydrocarbon Monoalcohol (g, mole, equivalent)
28	N3300/HMP/C <sub>8</sub> H <sub>17</sub> OH/GA/APTES (2/1/4/0.54/0.33)	21.2	1-octanol (10.8, 0.040, 0.040)
29	N3300/HMP/C <sub>10</sub> H <sub>21</sub> OH/GA/APTES (2/1/4.1/0.54/0.33)	22.3	1-decanol (6.33, 0.041, 0.041)
30	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/4/0.54/0.33)	23.5	1-dodecanol (7.5, 0.040, 0.40)
31	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/4/0.54/0.33)	19.2	1-dodecanol (7.5, 0.040, 0.40)
32*	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/3.8/0.78/0.33)	23.2	1-dodecanol (7.0, 0.0376, 0.0376)
33	N3300/HMP/C <sub>14</sub> H <sub>29</sub> OH/GA/APTES (2/1/4/0.54/0.33)	24.7	1-tetradecanol (8.58, 0.040, 0.040)
34	N3300/HMP/C <sub>16</sub> H <sub>33</sub> OH/GA/APTES (2/1/4/0.54/0.33)	25.5	1-hexadecanol (9.70, 0.040, 0.040)
35**	N3300/HMP/C <sub>16</sub> H <sub>33</sub> OH/GA/APTES (2/1/3.5/1.05/0.33)	24.6	1-hexadecanol (8.5, 0.035, 0.035)
36	N3300/HMP/C <sub>18</sub> H <sub>37</sub> OH/GA/APTES (2/1/4/0.54/0.33)	26.8	1-octadecanol (10.8, 0.040, 0.040)

\* The amount of glycolic acid used was 0.59 g (0.0078 mole, 0.0078 equivalent), and the amount of methyldiethanolamine used was 2.10 g.

\*\* The amount of glycolic acid used was 0.80 g (0.0105 mole, 0.0105 equivalent), and the amount of methyldiethanolamine used was 2.46 g.

#### Example 37 N3300/DHBA/C<sub>12</sub>H<sub>25</sub>OH/GA/APTES (2/1/4/0.54/0.33)

A chemical composition was prepared and tested essentially as in Example 30 except that 1.55 g (0.010 mole, 0.010 equivalent) 3,5-dihydroxybenzoic acid (DHBA) was used instead of HMP and 24.0 g of N-methylpyrrolidone was used. Results are shown in Table 7.

Table 7. Stain-Release Ratings of Chemical Compositions, Comprising Reaction Products from Hydrocarbon Monoalcohols, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
28	N3300/HMP/C <sub>8</sub> H <sub>17</sub> OH/GA/APTES (2/1/4/0.54/0.33)	4	4	5	4	4	5	3	29
29	N3300/HMP/C <sub>10</sub> H <sub>21</sub> OH/GA/APTES (2/1/4.1/0.54/0.33)	1	4	4	0	0	4	3	16
30	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/4/0.54/0.33)	0	1	1	2	0	1	0	5
31	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/4/0.54/0.33)	0	3	1	0	0	1	1	6
32	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/3.8/0.78/0.33)	1	2	0	3	1	1	1	9
33	N3300/HMP/C <sub>14</sub> H <sub>29</sub> OH/GA/APTES (2/1/4/0.54/0.33)	1	1	1	3	2	1	1	10
34	N3300/HMP/C <sub>16</sub> H <sub>33</sub> OH/GA/APTES (2/1/4/0.54/0.33)	3	5	1	4	2	3	4	22
35	N3300/HMP/C <sub>16</sub> H <sub>33</sub> OH/GA/APTES (2/1/3.5/1.05/0.33)	0	4	1	0	0	1	3	9
36	N3300/HMP/C <sub>18</sub> H <sub>37</sub> OH/GA/APTES (2/1/4/0.54/0.33)	1	2	2	2	1	2	1	11
37	N3300/DHBA/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/4/0.54/0.33)	1	2	1	2	2	2	1	11

5 The results in Table 7 show that chemical compositions made with a wide range of hydrocarbon monoalcohols imparted stain-release properties, that the use of C<sub>10</sub>–C<sub>18</sub> monoalcohols produced better stain-release properties than the C<sub>8</sub>, and that the use of the C<sub>12</sub> monoalcohol gave the best stain-release properties.

10 Fluorine-Containing Chemical Compositions in Organic Solvent:  
Example 38 N3300/FBSEE/MeFBSE/APTMS (1.8/0.97/3/1)

In a 250 ml bottle equipped with a magnetic stirrer, heating mantel, temperature controller, and dry nitrogen purge, was added Desmodur™ N-3300 (N3300) (11.64 g, 0.018 mole, 0.060 equivalent), FBSEE (3.77 g, 0.00974 mole, 0.0195 equivalent), 50 g ethyl acetate, and 3 drops of dibutyltin dilaurate. The resulting mixture was stirred and heated at 60 °C for one hour. The mixture was then cooled to room temperature, and MeFBSE (10.71 g, 0.030 mole, 0.030 equivalent) and APTMS (1.79 g, 0.010 mole, 0.010 equivalent) were added under nitrogen purge. The resulting reaction mixture was heated for 4 hours at 60 °C. Fourier Transform Infrared analysis of the resulting chemical composition showed that no detectable level of the NCO group remained. Sufficient ethyl acetate was then added to the chemical composition to form a 3 % by weight solution of the chemical composition in ethyl acetate. The 3 % solution was evaluated for performance using Test Method I, and the results are shown in Table 8.

Example 39 N3300/FBSEE/MeFBSE/APTMS (1.8/0.97/3/1) with TEOS

Sufficient tetraethylorthosilicate (TEOS) was added to a portion of the 3% solution prepared in Example 38 to make the solution 5 percent by weight TEOS. The resulting solution was evaluated for performance using Test Methods I and II, and the results are shown in Table 8.

Example 40 N3300/FBSEE/MeFBSE/MPTMS (2/1/3/1)

A chemical composition was prepared and evaluated essentially as in Example 38 except that 3.899 g (0.00588 mole, 0.020 equivalent) N3300, 1.261 g (0.00326 mole, 0.0065 equivalent) FBSEE, 22 g ethyl acetate, 3.565 g (0.010 mole, 0.010 equivalent) MeFBSE, and 0.66 g (0.0033 mole, 0.0033 equivalent) MPTMS were used instead of the amounts in Example 38. The results are shown in Table 8.

Example 41 N3300/FBSEE/MeFBSE/APTMS (3/2/4/1)

A chemical composition was prepared and evaluated essentially as in Example 38 except that 8.73 g (0.0132 mole, 0.0448 equivalent) N3300, 3.77 g (0.00974 mole, 0.0195 equivalent) FBSEE, 82.2 g ethyl acetate, 7.14 g (0.020 mole, 0.020 equivalent) MeFBSE, and 0.895 g (0.0050 mole, 0.0050 equivalent) APTMS were used instead of the amounts in Example 38. The results are shown in Table 8.



Example 42 N100/FBSEE/MeFBSE/APTMS (3/2/4/1)

A chemical composition was prepared and evaluated essentially as in Example 38 except that 8.595 g (0.015 mole, 0.045 equivalent) Desmodur™ N-100 (N100), 3.77 g (0.00974 mole, 0.0195 equivalent) FBSEE, 81.6 g ethyl acetate, 7.14 g (0.020 mole, 0.020 equivalent) MeFBSE, and 0.895 g (0.0050 mole, 0.0050 equivalent) APTMS were used instead of the reactants and amounts in Example 38. The results are shown in Table 8.

Example 43 HDI/FBSEE/MeFBSE/APTMS (3/2/1.6/0.4)

A chemical composition was prepared and evaluated essentially as in Example 38 except that 2.52 g (0.015 mole, 0.030 equivalent) hexamethylene-1,6-diisocyanate (HDI), 3.77 g (0.00974 mole, 0.0195 equivalent) FBSEE, 22.5 g ethyl acetate, 2.859 g (0.0080 mole, 0.0080 equivalent) MeFBSE, and 0.479 g (0.0027 mole, 0.0027 equivalent) APTMS were used instead of the amounts in Example 38. The results are shown in Table 8.

Example 44 HDI/FBSEE/MeFBSE/APTMS (3/4/1/1)

A chemical composition was prepared and evaluated essentially as in Example 38 except that 3.366 g (0.020 mole, 0.040 equivalent) hexamethylene-1,6-diisocyanate (HDI), 5.41 g (0.014 mole, 0.028 equivalent) FBSEE, 26.9 g ethyl acetate, 1.84 g (0.0052 mole, 0.0052 equivalent) MeFBSE, and 0.925 g (0.0052 mole, 0.0052 equivalent) APTMS were used instead of the amounts in Example 38. The results are shown in Table 8.

Comparative Example C4

Limestone tile was treated with AquaMix Sealer Choice (available from AquaMix, Santa Fe, CA) and tested using Test Method I. The results are shown in Table 8.

Table 8. Stain-Release Ratings of Chemical Compositions in Organic Solvent on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids						
		GF	TF	MO	WIN	COF	BF	Total
38	N3300/FBSEE/MeFBSE/APTMS (1.8/0.97/3/1)	0	0	0	3	0	0	3
39	N3300/FBSEE/MeFBSE/APTMS (1.8/0.97/3/1) with TEOS Test Method I	0	0	0	0	0	0	0
	Test Method II	0	0	0	0	0	0	0
40	N3300/FBSEE/MeFBSE/MPTMS (2/1/3/1)	0	0	0	1	0	5	6
41	N3300/FBSEE/MeFBSE/APTMS (3/2/4/1)	0	0	0	0	0	0	0
42	N100/FBSEE/MeFBSE/APTMS (3/2/4/1)	0	0	0	0	0	1	1
43	HDI/FBSEE/MeFBSE/APTMS (3/2/1.6/0.4)	0	0	0	4	0	0	4
44	HDI/FBSEE/MeFBSE/APTMS (3/4/1/1)	3	0	0	4	0	5	12
C4	AquaMix Sealer Choice	4	0	1	4	2	0	11

The results in Table 8 show that chemical compositions made with various polyfunctional isocyanates and without water solubilizing groups and coated in organic solvent imparted good to excellent stain-release properties, approximately equal to or much better than a commercially available solvent-borne sealer (Comparative Example C4). In addition, the chemical composition of Example 39 demonstrated excellent durability.

Example 45 N3300/HMPEPB/MeFBSE/APTES (2/1/4.3/0.5)

A chemical composition was prepared and evaluated essentially as in Example 38 except that 6.63 g (0.010 mole, 0.034 equivalent) N3300, 2.47 g (0.0047 mole, 0.0094 equivalent) 1,4-bis(hydroxymethoxyperfluoroethoxy)perfluorobutane (HMPEPB), 40 g ethyl acetate, 7.67 g (0.021 mole, 0.021 equivalent) MeFBSE, and 0.55 g (0.0025 mole, 0.0025 equivalent) APTES were used instead of the reactants and amounts in Example 38. The results are shown in Table 9.

Table 9. Stain-Release Ratings of Fluorocarbon-Containing Chemical Compositions in Organic Solvent on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
45	N3300/HMPEPB/ MeFBSE/APTES (2/1/4.3/0.5)	0	0	0	1	0	2	0	3

The results in Table 9 show that the chemical composition made with an in-chain fluorine-containing polyether diol (1,4-bis(hydroxymethoxyperfluoroethoxy)perfluorobutane, HOCH<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>OCF<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>CF<sub>2</sub>OCF<sub>2</sub>CF<sub>2</sub>CH<sub>2</sub>OH) imparted excellent stain-release properties.

#### Hydrocarbon-Containing Chemical Compositions in Organic Solvent:

##### Example 46 N3300/HMP/C<sub>16</sub>H<sub>33</sub>OH/GA/APTMS (2/1/2.6/2/0.2)

A chemical composition was made and tested essentially as Example 27 except that no neutralization was done. The resulting chemical composition (10 g) was diluted with more ethyl acetate to form a 3 percent by weight solution of the chemical composition in ethyl acetate. The results are shown in Table 10.

##### Example 47 N3300/HMP/C<sub>12</sub>H<sub>25</sub>OH/GA/APTES (2/1/3.1/1.5/0.2)

A chemical composition was made and tested essentially as Example 26 except that no neutralization was done. The resulting chemical composition (10 g) was diluted with more ethyl acetate to form a 3 percent by weight solution of the chemical composition in ethyl acetate. The results are shown in Table 10.

Table 10. Stain-Release Ratings of Chemical Compositions in Organic Solvent, Comprising Reaction Products from Hydrocarbon Monoalcohols, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	Win	COF	BF	VO	Tot
46	N3300/HMP/C <sub>16</sub> H <sub>33</sub> OH/GA/APTM S (2/1/2.6/2/0.2)	3	1	1	3	2	1	2	13
47	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/APTES (2/1/3.1/1.5/0.2)	2	4	3	3	0	3	0	15

The results in Table 10 show that hydrocarbon-containing chemical compositions coated from organic solvent solutions imparted stain-release properties, and surprisingly the C<sub>12</sub> composition (Example 47) was less effective than the corresponding C<sub>12</sub> aqueous composition (Example 26), while the C<sub>16</sub> composition (Example 46) was more effective than the corresponding C<sub>16</sub> aqueous composition (Example 27).

#### 10 Example 48

The 3 % by weight chemical composition solution of Example 2 was evaluated using Test Methods I and II except that only one coating of the solution was applied to the limestone tile. The results are shown in Table 11.

#### 15 Example 49

The 5 % by weight chemical composition solution of Example 30 was evaluated using Test Methods I and II except that only one coating of the solution was applied to the limestone tile. The results are shown in Table 11.

#### 20 Comparative Example C5 N3300/HMP/C<sub>12</sub>H<sub>25</sub>OH/GA (2/1/4/0.9)

A chemical composition was prepared essentially as in Example 30 except that 0.67 g (0.0088 mole, 0.0088 equivalent) GA and 23.0 g NMP were used, and no APTES was added. A 5 % by weight aqueous chemical composition solution was prepared as in Example 30 and evaluated according to Test Methods I and II except that only one coating of the solution was applied to the limestone tile. The results are shown in Table 11.

Table 11. Initial Stain-Release and Durability of Stain Release of Chemical Compositions on Limestone Tile.

Example	Chemical Composition Components and Test Method	Stain Ratings with Test Fluids							
		GF	TF	MO	Win	COF	BF	VO	Tot
48	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) Test Method I	3	0	0	3	1	0	0	7
	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) Test Method II (Durability)	3	0	1	3	2	0	0	9
49	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/ APTES (2/1/4/0.54/0.33) (Ex. 30) Test Method I	3	3	2	3	3	3	2	19
	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/ APTES (2/1/4/0.54/0.33) (Ex. 30) Test Method II (Durability)	3	4	3	3	4	3	3	23
C5	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA (2/1/4/0.9) Test Method I	1	4	4	0	0	3	4	16
	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA (2/1/4/0.9) Test Method II (Durability)	4	5	5	5	4	5	5	33

The results in Table 11 show that the chemical compositions of the present invention comprising hydrolyzable silane groups imparted stain-release properties which were essentially retained after repeated scrubbing, and which exhibited superior durability compared with the stain-release properties provided by chemical compositions without the silane groups.

#### Examples 50-62 and Comparative Examples C6-C19

The 3 % by weight chemical solutions of Examples 1, 2, and 41, as well as commercially available sealers FC-759 (available from 3M Performance Materials, St. Paul, MN) and Tile Lab Grout and Tile Sealer (available from Custom Building Products, Seal Beach, CA), were evaluated according to Test Method I on slate tile (Autumn Slate and Multi Class Slate, both available from Minnesota Tile, Woodbury, MN), marble tile (white Marble Piel Serpentine (available from Minnesota Tile, Woodbury, MN), concrete

brick (available from Home Depot, Woodbury, MN), and clear pine wood (available from Home Depot, Woodbury MN). The results are tabulated in Tables 12–16.

Table 12. Stain-Release Properties of Chemical Compositions and Commercial Sealers on Autumn Slate.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
50	N3300/HMP/MeFBSE/GA/ APTES (2/1/4/0.5/0.33) (Ex. 1)	0	0	0	0	0	2	0	2
51	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) (Ex. 2)	0	0	0	0	0	0	0	0
52	N3300/FBSEE/MeFBSE/ APTMS (3/2/4/1) (Ex. 41)	0	0	0	0	0	0	0	0
C6	FC-759	1	0	0	1	0	0	0	2
C7	Tile Lab Grout and Tile Sealer	3	0	0	1	1	3	0	8
C8	None	5	5	5	2	2	5	3	27

Table 13. Stain-Release Properties of Chemical Compositions and Commercial Sealers on Multi Class Slate.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
53	N3300/HMP/MeFBSE/GA/ APTES (2/1/4/0.5/0.33) (Ex. 1)	0	0	0	0	0	1	0	1
54	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) (Ex. 2)	0	0	0	0	0	0	0	0
55	N3300/FBSEE/MeFBSE/ APTMS (3/2/4/1) (Ex. 41)	0	0	0	0	0	0	0	0
C9	FC-759	0	0	0	0	0	0	0	0
C10	Tile Lab Grout and Tile Sealer	1	0	1	0	1	3	0	6
C11	None	4	5	5	2	1	5	5	27

Table 14. Stain-Release Properties of Chemical Compositions and Commercial Sealers on Marble Piel Serpentine.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
56	N3300/HMP/MeFBSE/GA/ APTES (2/1/4/0.5/0.33) (Ex. 1)	0	0	0	0	1	0	0	1
57	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) (Ex. 2)	0	0	0	0	0	0	0	0
58	N3300/FBSEE/MeFBSE/ APTMS (3/2/4/1) (Ex. 41)	0	0	0	0	0	0	0	0
C12	FC-759	2	0	0	1	2	1	0	6
C13	Tile Lab Grout and Tile Sealer	3	0	0	2	2	3	0	10
C14	None	2	5	5	4	5	5	5	31

Table 15. Stain-Release Properties of Chemical Compositions and Commercial Sealers on Concrete Brick.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
59	N3300/HMP/MeFBSE/GA/ APTES (2/1/4/0.5/0.33) (Ex. 1)	3	1	2	1	1	0	0	8
60	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) (Ex. 2)	4	1	2	2	1	0	1	11
C15	FC-759	4	1	4	4	4	2	3	22
C16	Tile Lab Grout and Tile Sealer	3	3	5	3	4	1	1	20
C17	None	5	5	5	5	5	5	5	35

Table 16. Stain-Release Properties of Chemical Compositions and a Commercial Sealer on Clear Pine Wood.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	WIN	COF	BF	CO	Tot
61	N3300/HMP/MeFBSE/GA/ APTES (2/1/4/0.5/0.33) (Ex. 1)	0	0	1	1	0	4	0	6
62	N3300/FBSEE/MeFBSE/GA/ APTES (2/1/2.8/1.6/0.33) (Ex. 2)	0	0	1	1	0	3	0	5
C18	FC-759	1	0	2	2	1	3	0	9
C19	None	5	5	5	5	5	5	5	35

Example 63 – A chemical composition was prepared essentially as in Example 30 except no GA was added to the formulation. A 4% by weight aqueous solution of this composition was prepared as in Example 30 and evaluated according to Test Method I. The resulting test values are shown in Table 17.

Example 64 – A chemical composition was prepared essentially as in Example 30 except that 51.0 g (0.087 mole) of N-3300, 6.50 g (0.0485 mole) HMP, 28.3 g (0.152 mole) 1-dodecanol, 0.40 g (.005 mole) GA, 1.74 g (0.079 mole) APTES, 32 g NMP and 53 g ethyl acetate were substituted for the corresponding amounts in Example 30. A 4% by weight aqueous solution of this composition was prepared as in Example 30 and evaluated according to Test Method I. The resulting test values are shown in table 17.

Table 17. Stain-Release Ratings of Chemical Compositions in Organic Solvent, Comprising Reaction Products from Hydrocarbon Monoalcohols, on Limestone Tile.

Example	Chemical Composition Components	Stain Ratings with Test Fluids							
		GF	TF	MO	Win	COF	BF	VO	Tot
63	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/APTES (1.9/1/3.3/0.4)	1	1	1	1	0	1	0	5
64	N3300/HMP/C <sub>12</sub> H <sub>25</sub> OH/GA/ APTES (2/1.2/3.5/0.1/0.17)	0	1	1	1	0	1	0	5



The results in Table 12-17 show that the chemical compositions of the present invention are effective, and even more effective than the commercial sealers tested, in imparting stain-release properties to many substrates.

5           Various modifications and alterations to this invention will become apparent to those skilled in the art without departing from the scope and spirit of this invention. It should be understood that this invention is not intended to be unduly limited by the illustrative embodiments and examples set forth herein and that such examples and  
10           embodiments are presented by way of example only with the scope of the invention intended to be limited only by the claims as set forth herein as follows.

What is claimed is:

1. A chemical composition comprising:


one or more urethane oligomers of at least two repeating units selected from the group consisting of fluorine-containing urethane oligomers and long-chain hydrocarbon-containing urethane oligomers, wherein said oligomers comprise the reaction product of:

(a) one or more polyfunctional isocyanate compounds;

(b) one or more polyols;

(c) one or more monoalcohols selected from the group consisting of fluorocarbon monoalcohols, optionally substituted long-chain hydrocarbon monoalcohols, and mixtures thereof;

(d) one or more silanes of the following formula (I):



wherein

X is  $-\text{NH}_2$ ;  $-\text{SH}$ ;  $-\text{OH}$ ;  $-\text{N}=\text{C}=\text{O}$ ; or  $-\text{NRH}$  where R is selected from the group consisting of phenyl, straight and branched aliphatic, alicyclic, and aliphatic ester groups;  $\text{R}^1$  is an alkylene, heteroalkylene, aralkylene, or heteroaralkylene group; and

each Y is independently a hydroxyl; a hydrolyzable moiety selected from the group consisting of alkoxy, acyloxy, heteroalkoxy, heteroacyloxy, halo, and oxime; or a non-hydrolyzable moiety selected from the group consisting of phenyl, alicyclic, straight-chain aliphatic, and branched-chain aliphatic, wherein at least one Y is a hydrolyzable moiety; and

optionally (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

2. The chemical composition of claim 1 wherein the one or more urethane oligomers comprise the reaction product of (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

5

3. The chemical composition of claim 2 wherein the polyfunctional isocyanate compound is a diisocyanate or triisocyanate.

10

4. The chemical composition of claim 2 wherein the polyfunctional isocyanate compound is a diisocyanate and the polyol is a mixture of diol and triol.


5. The chemical composition of claim 2 wherein the polyfunctional isocyanate compound is a triisocyanate and the polyol is a diol.

15

6. The chemical composition of claim 5 wherein the diol is selected from the group consisting of a branched or straight chain hydrocarbon diol, a diol containing at least one solubilizing group, a fluorinated diol comprising a monovalent or divalent perfluorinated group, a diol comprising a silane group, a polyalkylsiloxane diol, a polyarylsiloxane diol, and mixtures thereof.

20

7. The chemical composition of claim 2 wherein the fluorochemical monoalcohol is a compound of the following formula II:



wherein:

25

$R_f$  is a perfluoroalkyl group or a perfluoroheteroalkyl group;

$Z$  is a connecting group selected from a covalent bond, a sulfonamido group, a carboxamido group, a carboxyl group, or a sulfinyl group; and

$R^2$  is a divalent straight or branched chain alkylene, cycloalkylene, or heteroalkylene group of 1 to 14 carbon atoms.

30

8. The chemical composition of claim 7 wherein  $R_f$  is a perfluoroalkyl group of 2 to 6 carbons.

9. The chemical composition of claim 8 wherein  $R_f$  is a perfluoroalkyl group of 4 carbons.

10. The chemical composition of claim 2 wherein the monoalcohol is an unsubstituted long-chain hydrocarbon monoalcohol.

11. The chemical composition of claim 10 wherein the monoalcohol is an unsubstituted long-chain hydrocarbon monoalcohol having 10 to 18 carbons.

12. The chemical composition of claim 11 wherein the monoalcohol is an unsubstituted long-chain hydrocarbon monoalcohol having 12 carbons.

13. The chemical composition of claim 2 wherein the water-solubilizing compound is a diol or a monoalcohol.

14. The chemical composition of claim 2 wherein the water-solubilizing groups of the water solubilizing compounds are selected from the group consisting of carboxylate, sulfate, sulfonate, phosphate, phosphonate, ammonium, and quaternary ammonium groups.

15. The chemical composition of claim 2 wherein the isocyanate-reactive hydrogen containing group is selected from the group consisting of  $-OH$ ,  $-SH$ ,  $-NH_2$ , and  $-NRH$  wherein  $R$  is selected from the group consisting of a phenyl group, a cycloaliphatic group, and a straight or branched aliphatic group of 1 to 12 carbons.

16. A coating composition comprising a solution comprising the chemical composition of claim 1 and a solvent.

17. The coating composition of claim 16 wherein the solvent is selected from the group consisting of water, an organic solvent, and mixtures thereof.

18. A coating composition comprising a solution comprising the chemical composition of claim 2 and water.


19. An article comprising:

- (a) a substrate having one or more surfaces; and
- (b) a cured coating derived from at least one solvent and a chemical

composition comprising:

one or more urethane oligomers of at least two repeating units selected from the group consisting of fluorine-containing urethane oligomers and long-chain hydrocarbon-containing urethane oligomers, wherein said oligomers comprise the reaction product of:

- (a) one or more polyfunctional isocyanate compounds;
- (b) one or more polyols;
- (c) one or more monoalcohols selected from the group consisting of fluorocarbon monoalcohols, optionally substituted long-chain hydrocarbon monoalcohols, and mixtures thereof; and
- (d) one or more silanes of the following formula (I):



wherein

X is  $-\text{NH}_2$ ;  $-\text{SH}$ ;  $-\text{OH}$ ;  $-\text{N}=\text{C}=\text{O}$ ; or  $-\text{NRH}$  where R is selected from the group consisting of phenyl, straight and branched aliphatic, alicyclic, and aliphatic ester groups;

$\text{R}^1$  is an alkylene, heteroalkylene, aralkylene, or heteroaralkylene group; and

each Y is independently a hydroxyl; a hydrolyzable moiety selected from the group consisting of alkoxy, acyloxy, heteroalkoxy, heteroacyloxy, halo, and oxime; or a non-hydrolyzable moiety selected from the group consisting of phenyl, alicyclic, straight-chain aliphatic, and branched-

chain aliphatic, wherein at least one Y is a hydrolyzable moiety; and

optionally (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group,

wherein the one or more surfaces of the substrate is coated with the cured coating.

20. The article of claim 19 wherein the chemical composition comprising one or more urethane oligomers comprises the reaction product of (e) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

21. The article of claim 20 wherein the substrate is selected from the group consisting of hard substrates and fibrous substrates.

22. The article of claim 21 wherein the hard substrate is selected from the group consisting of glass, ceramic, masonry, concrete, natural stone, man-made stone, and wood.

23. The article of claim 22 wherein the hard substrate is porous.

24. The article of claim 23 wherein the monoalcohol is a fluorochemical monoalcohols.

25. A fluorochemical composition comprising an oligomer comprising at least two repeating units and two or more terminal groups, each repeating unit comprising a urethane group, and said oligomer being terminated with (i) one or more perfluoroalkyl groups or one or more perfluoroheteroalkyl groups, and (ii) one or more silyl groups.

26. The fluorochemical composition of claim 25 wherein the oligomer further comprises one or more water-solubilizing groups, the solubilizing groups independently being pendant from the repeating unit or terminal.

27. The fluorochemical composition of claim 26 wherein the solubilizing groups are carboxylate groups.

28. The fluorochemical composition of claim 26 wherein the oligomer further comprises one or more fluorine-containing groups pendant from the repeating unit, wherein the fluorine-containing groups independently are perfluoroalkyl groups or perfluoroheteroalkyl groups.

29. The fluorochemical composition of claim 26 wherein the oligomer is terminated with one or more perfluoroalkyl groups of 2 to 6 carbons.

30. The fluorochemical composition of claim 29 wherein the oligomer is terminated with one or more perfluoroalkyl groups of 4 carbons.

31. The fluorochemical composition of claim 30 wherein the oligomer further comprises one or more perfluoroheteroalkylene groups within the backbone of the repeating unit.

32. A method for imparting stain-release characteristics to a substrate, having one or more surfaces, comprising the steps of:

(a) applying a coating composition onto the one of more surfaces of the substrate, wherein the coating composition comprises:

(i) at least one solvent; and


(ii) one or more urethane oligomers of at least two repeating units selected from the group consisting of fluorine-containing urethane oligomers and long-chain hydrocarbon-containing urethane oligomers, wherein said oligomers comprise the reaction product of:

(aa) one or more polyfunctional isocyanate compounds;

(bb) one or more polyols;

(cc) one or more monoalcohols selected from the group consisting of fluorocarbon monoalcohols, optionally substituted long-chain hydrocarbon monoalcohols, and mixtures thereof; and

(dd) one or more silanes of the following formula (I):



wherein:

X is  $-\text{NH}_2$ ;  $-\text{SH}$ ;  $-\text{OH}$ ;  $-\text{N}=\text{C}=\text{O}$ ; or  $-\text{NRH}$  where R is

selected from the group consisting of phenyl, straight and branched aliphatic, alicyclic, and aliphatic ester groups;

$\text{R}^1$  is an alkylene, heteroalkylene, aralkylene, or heteroaralkylene group; and

each Y is independently a hydroxyl; a hydrolyzable moiety

selected from the group consisting of alkoxy, acyloxy,

heteroalkoxy, heteroacyloxy, halo, and oxime; or a non-

hydrolyzable moiety selected from the group consisting of phenyl, alicyclic, straight-chain aliphatic, and branched-chain aliphatic, wherein at least one Y is a hydrolyzable

moiety; and

optionally (ee) one or more water-solubilizing compounds

comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.

(b) allowing the coating composition to cure.

33. The method of claim 32 wherein the coating composition comprises one or more urethane oligomers comprising the reaction product of (ee) one or more water-solubilizing compounds comprising one or more water-solubilizing groups and at least one isocyanate-reactive hydrogen containing group.



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/03215

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 C09D175/04 C08G18/28 C08G18/08 C08G18/34 C08G18/73  
C08G18/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09D C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02 14443 A (3M INNOVATIVE PROPERTIES CO) 21 February 2002 (2002-02-21) the whole document ---	1-33
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 11, 26 December 1995 (1995-12-26) & JP 07 216047 A (DAINICHISEIKA COLOR & CHEM MFG CO LTD; OTHERS: 01), 15 August 1995 (1995-08-15) abstract; example 2 -----	1, 16, 19, 25, 32



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

6 May 2003

Date of mailing of the international search report

15/05/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lanz, S

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/03215

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 0214443	A	21-02-2002	AU	7342801 A		25-02-2002
			WO	0214443 A2		21-02-2002
JP 07216047	A	15-08-1995	JP	3042956 B2		22-05-2000