



US 20240284963A1

(19) **United States**

(12) **Patent Application Publication**
HEPWORTH et al.

(10) **Pub. No.: US 2024/0284963 A1**

(43) **Pub. Date: Aug. 29, 2024**

(54) **A BODY OF AEROSOL-GENERATING MATERIAL FOR USE WITH A NON-COMBUSTIBLE AEROSOL PROVISION DEVICE**

Publication Classification

(51) **Int. Cl.**
A24D 1/20 (2006.01)
A24C 5/01 (2006.01)
A24C 5/39 (2006.01)
(52) **U.S. Cl.**
CPC *A24D 1/20* (2020.01); *A24C 5/01* (2020.01); *A24C 5/39* (2013.01)

(71) Applicant: **Nicoventures Trading Limited,**
London (GB)

(72) Inventors: **Richard HEPWORTH**, London (GB);
Jeremy CAMPBELL, London (GB);
Benjamin TAYLOR, London (GB);
Mathew HODGSON, London (GB)

(21) Appl. No.: **18/571,602**

(22) PCT Filed: **Jun. 17, 2022**

(86) PCT No.: **PCT/GB2022/051544**

§ 371 (c)(1),

(2) Date: **Dec. 18, 2023**


(30) **Foreign Application Priority Data**

Jun. 18, 2021 (GB) 2108823.2

Nov. 22, 2021 (GB) 2116803.4

ABSTRACT

A body of aerosol-generating material for use in a non-combustible aerosol provision system. The body of aerosol-generating material includes an aerosol-generating material and a recess or cavity in the aerosol-generating material at least partially bounded by a material layer. Also described is a body of aerosol-generating material for use in a non-combustible aerosol provision system, the body including one or more channels extending at least partially or completely through the body. Articles including the body are also described, as well as an article for use with a non-combustible aerosol provision device, the article including a body of aerosol-generating material and a downstream portion downstream of the body, the downstream portion comprising a main path for mainstream aerosol emitted from the body of aerosol-generating material and an airflow path arranged laterally of the main path, the airflow path allowing air to flow through the article in a direction opposite to that of mainstream aerosol. Methods of manufacture are also described.

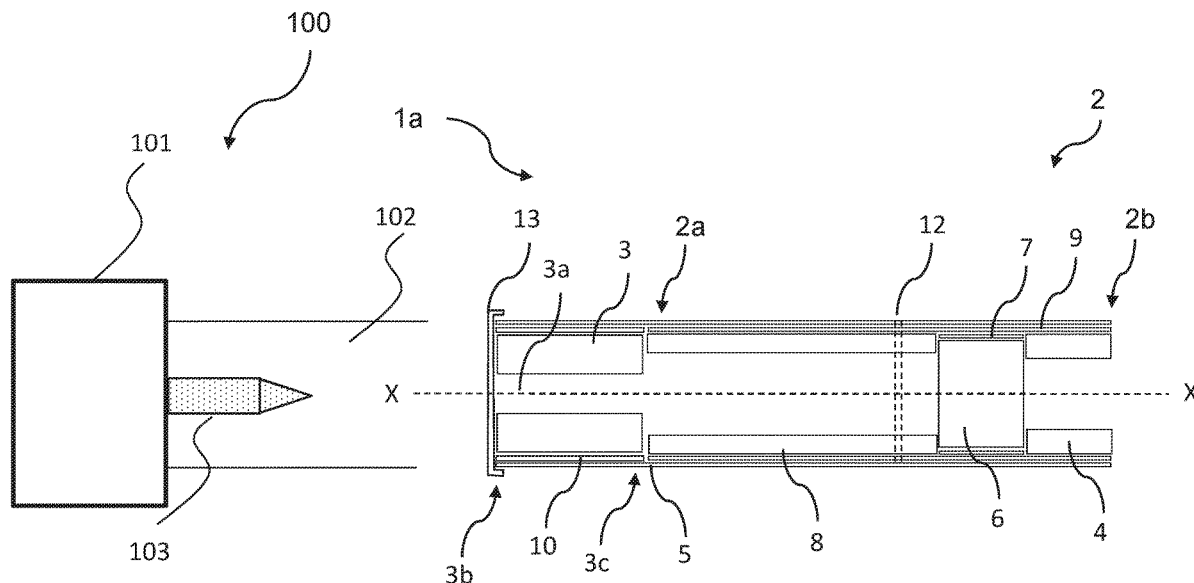

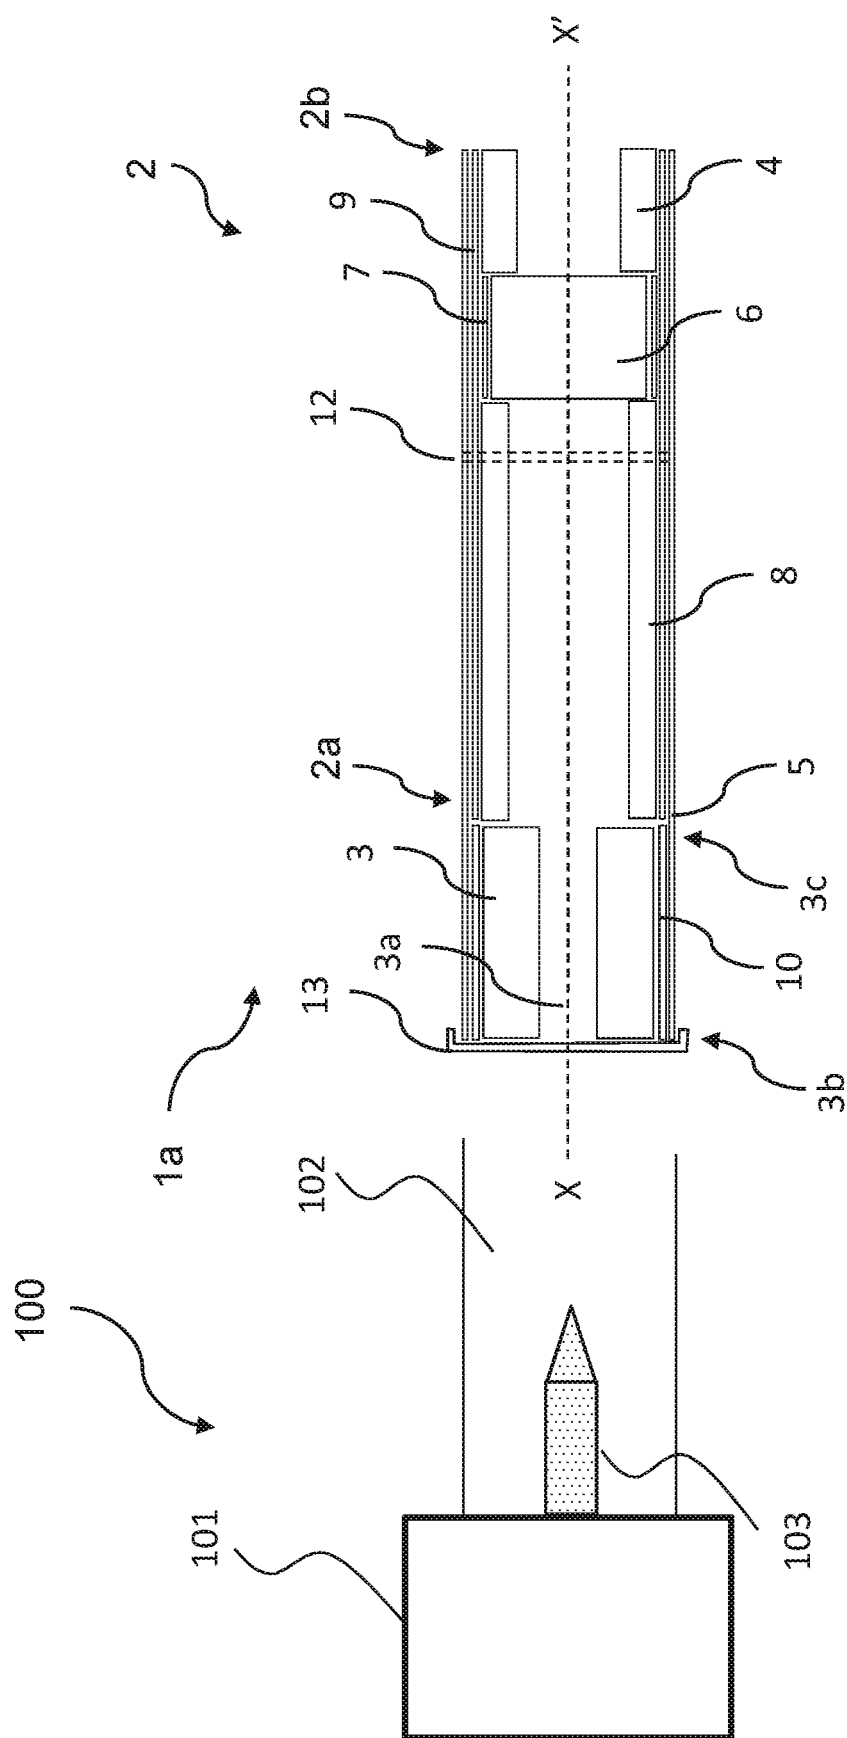


Figure 1

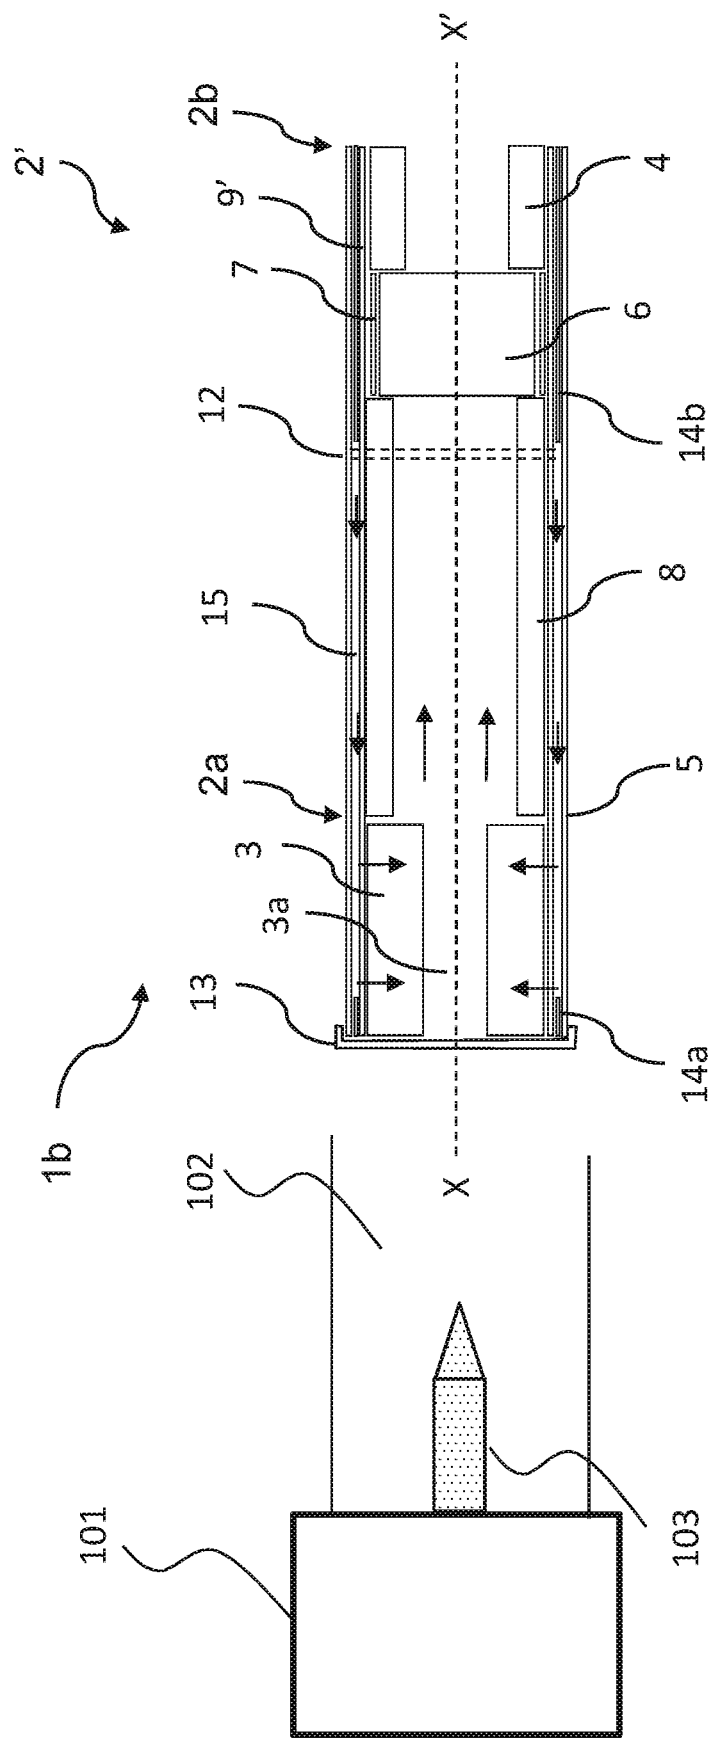


Figure 2

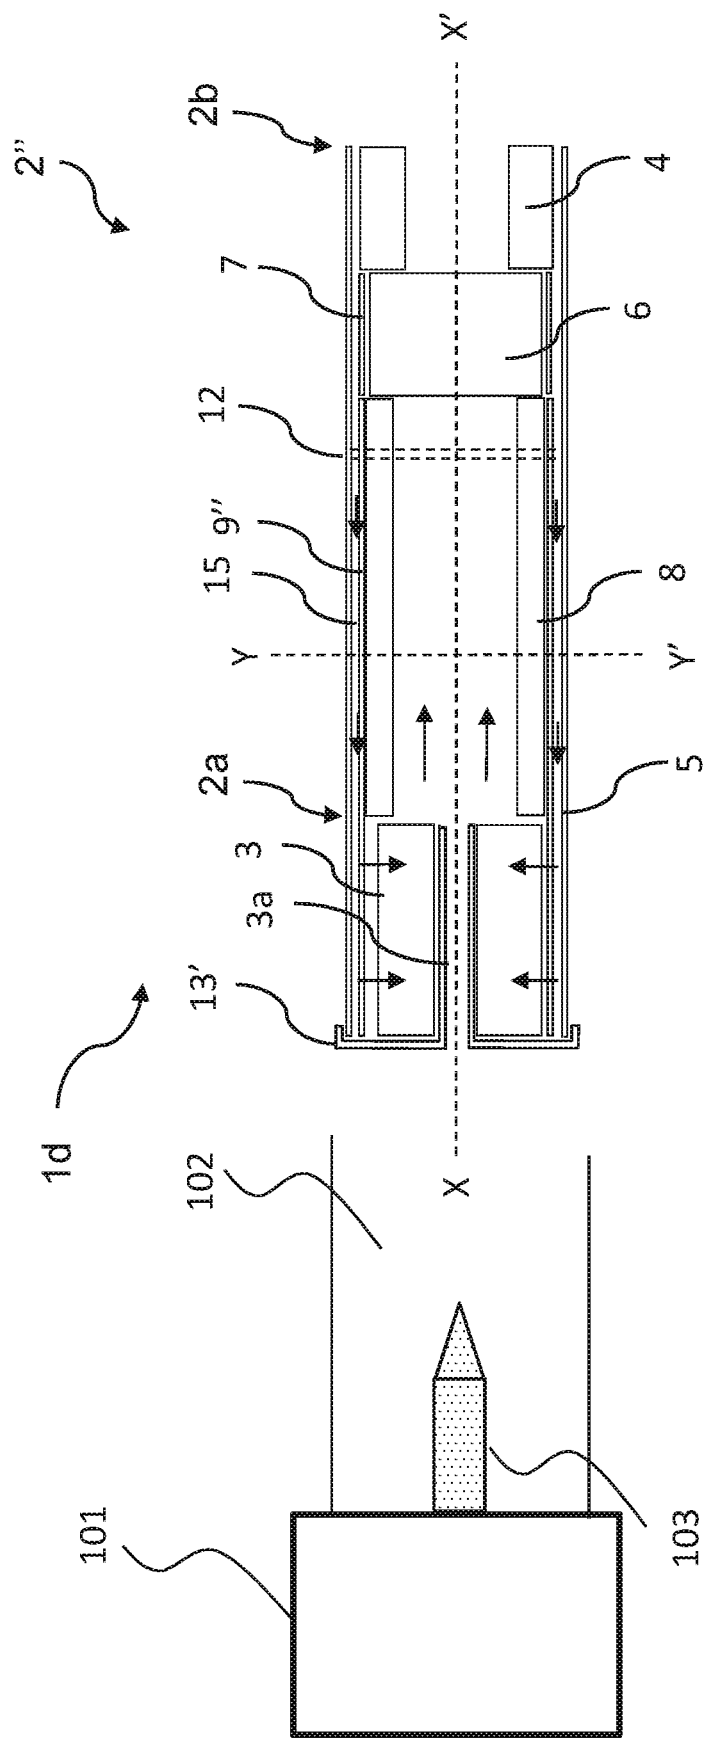


Figure 4a

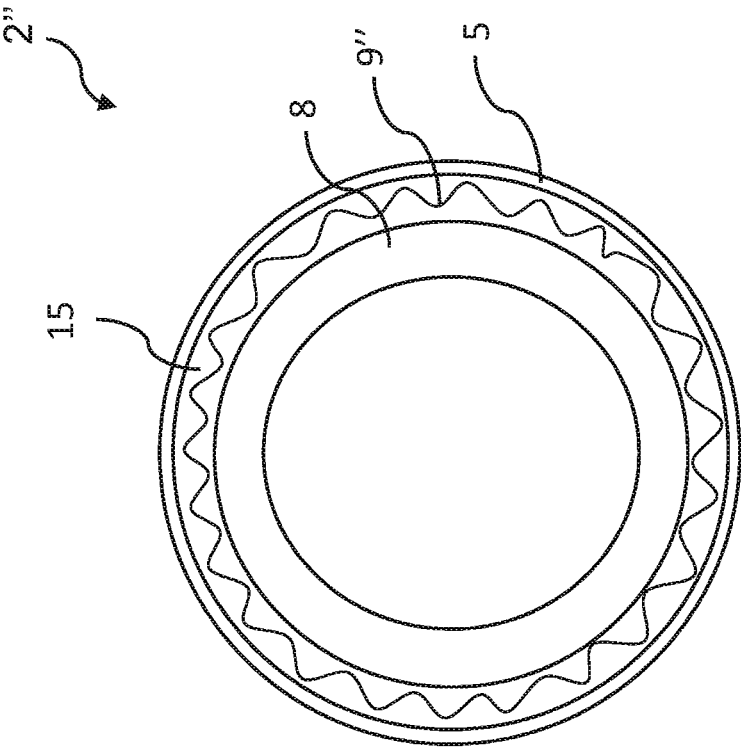


Figure 4b

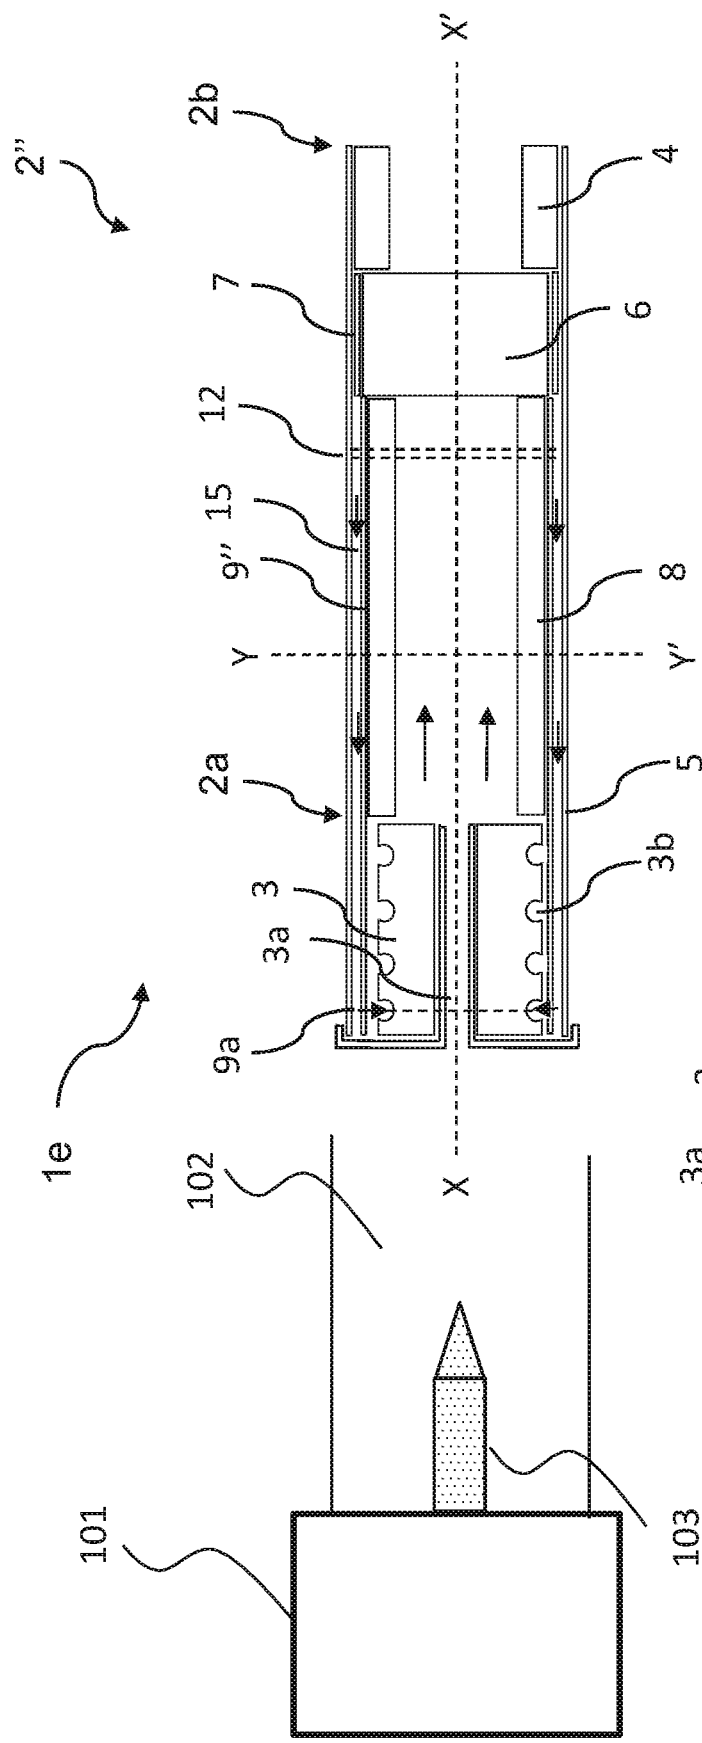


Figure 5a

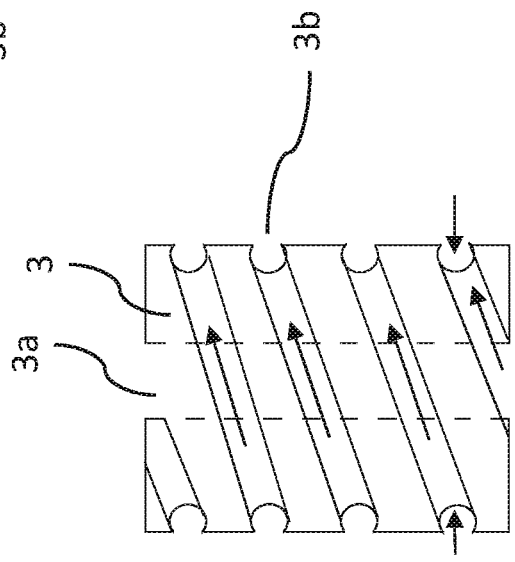


Figure 5b

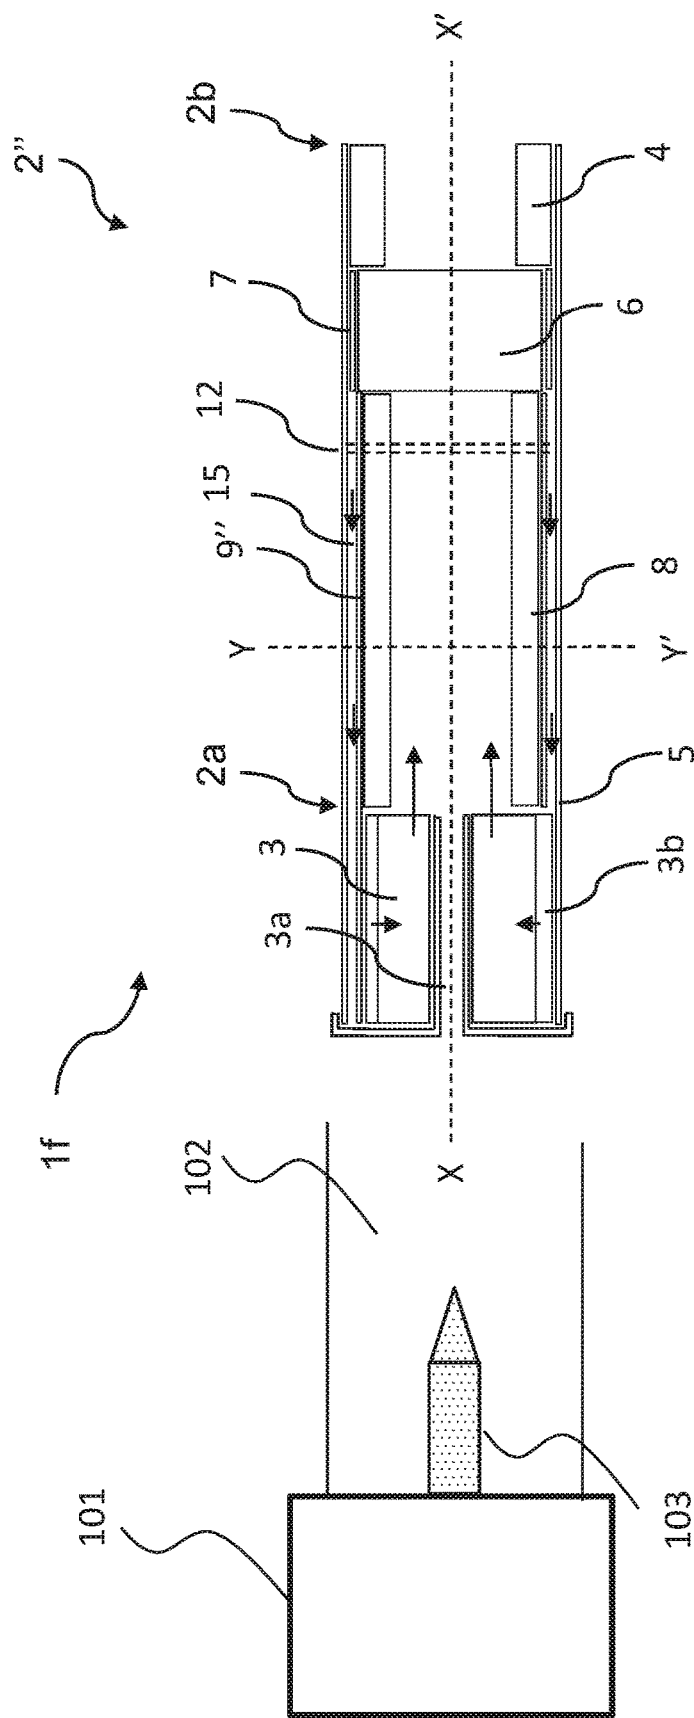


Figure 6a

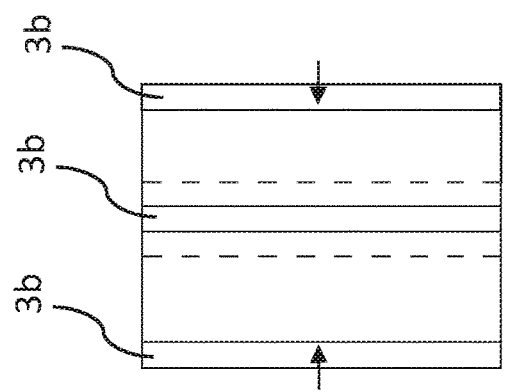


Figure 6b

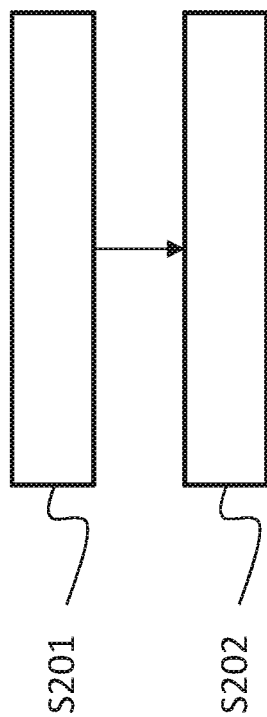


Figure 7

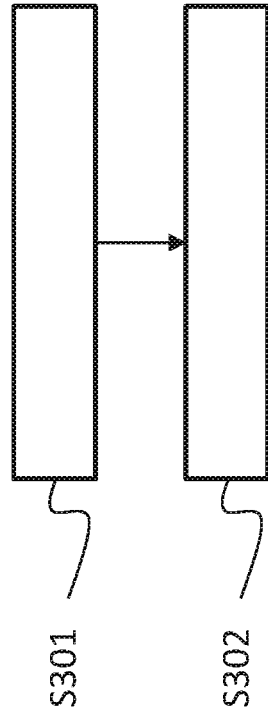


Figure 8

A BODY OF AEROSOL-GENERATING MATERIAL FOR USE WITH A NON-COMBUSTIBLE AEROSOL PROVISION DEVICE

PRIORITY CLAIM

[0001] The present application claims priority to PCT Application No. PCT/GB2022/051544 filed Jun. 17, 2022, which claims priority to Great Britain Application Nos. 2108823.2, filed Jun. 18, 2021, and 2116803.4, filed Nov. 22, 2021, which are hereby incorporated by reference in their entirety.

TECHNICAL Field

[0002] The present invention relates to a body of aerosol-generating material for use with a non-combustible aerosol provision device, an article for use in a non-combustible aerosol provision system, an aerosol provision system and a method of forming a body of aerosol-generating material.

BACKGROUND

[0003] Certain tobacco industry products produce an aerosol during use, which is inhaled by a user. For example, tobacco heating devices heat an aerosol generating substrate such as tobacco to form an aerosol by heating, but not burning, the substrate. Such tobacco industry products commonly include mouthpieces through which the aerosol passes to reach the user's mouth.

SUMMARY

[0004] In accordance with embodiments described herein, in a first aspect, there is provided a body of aerosol-generating material for use in a non-combustible aerosol provision system, the body comprising aerosol-generating material and a recess or cavity in the aerosol-generating material at least partially bounded by a material layer.

[0005] In accordance with embodiments described herein, in a second aspect, there is provided a body of aerosol-generating material for use in a non-combustible aerosol provision system, the body comprising one or more channels extending at least partially or completely through the body.

[0006] In accordance with embodiments described herein, in a third aspect, there is provided an article for use with a non-combustible aerosol provision device, the article comprising a body of aerosol-generating material according to the first or second aspects above and a downstream portion downstream of the body.

[0007] In accordance with embodiments described herein, in a fourth aspect, there is provided an article for use with a non-combustible aerosol provision device, the article comprising a body of aerosol-generating material and a downstream portion downstream of the body, the downstream portion comprising a main path for mainstream aerosol emitted from the body of aerosol-generating material and an airflow path arranged laterally of the main path, the airflow path allowing air to flow through the article in a direction opposite to that of mainstream aerosol.

[0008] In accordance with embodiments described herein, in a fifth aspect, there is provided a non-combustible aerosol provision system comprising an article according to the fourth aspect and a non-combustible aerosol provision device.

[0009] In accordance with embodiments described herein, in a sixth aspect, there is provided a method of forming a body of aerosol-generating material, the method comprising:

[0010] providing a body of aerosol-generating material having a recess or cavity in the aerosol-generating material; and

[0011] applying a material layer to the aerosol-generating material such that the recess or cavity is at least partially bounded by the material layer.

[0012] In accordance with embodiments described herein, in a seventh aspect, there is provided a method of forming an article for use in a non-combustible aerosol provision system, the method comprising:

[0013] providing a body of aerosol-generating material having one or more channels extending at least partially or completely through the body of aerosol-generating material; and

[0014] aligning the one or more channels with an air flow path to allow external air to flow into the one or more channels.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Embodiments of the invention will now be described, by way of example only, with reference to accompanying drawings, in which:

[0016] FIG. 1 is a side-on cross sectional view of a first article for use in a non-combustible aerosol provision system, the article including a recess or cavity in the aerosol-generating material at least partially bounded by a material layer, and an aerosol provision device;

[0017] FIG. 2 is a side-on cross sectional view of a second article for use in a non-combustible aerosol provision system, the second article including an airflow path lateral to the path of mainstream aerosol;

[0018] FIG. 3 is a side-on cross sectional view of a third article for use in a non-combustible aerosol provision system, the third article including a material layer in the form of a fibrous body;

[0019] FIG. 4a is a side-on cross sectional view of a fourth article for use in a non-combustible aerosol provision system, the fourth article including a material layer which lines an inner surface of a recess or cavity in a body of aerosol-generating material;

[0020] FIG. 4b is a side-on cross sectional view of a section through the article of FIG. 4a along line Y-Y' thereof;

[0021] FIG. 5a is a side-on cross sectional view of a fifth article for use in a non-combustible aerosol provision system, the fifth article including a body of aerosol-generating material including one or more angled channels extending at least partially or completely through the body;

[0022] FIG. 5b is a side-on view of the body of aerosol-generating material of FIG. 5a;

[0023] FIG. 6a is a side-on cross sectional view of a sixth article for use in a non-combustible aerosol provision system, the sixth article including a body of aerosol-generating material including one or more longitudinal channels extending at least partially or completely through the body;

[0024] FIG. 6b is a side-on view of the body of aerosol-generating material of FIG. 6a; and

[0025] FIGS. 7 and 8 are flow diagrams illustrating respective methods of forming bodies of aerosol-generating material.

DETAILED DESCRIPTION

[0026] As used herein, the term “delivery system” is intended to encompass systems that deliver at least one substance to a user, and includes:

[0027] combustible aerosol provision systems, such as cigarettes, cigarillos, cigars, and tobacco for pipes or for roll-your-own or for make-your-own cigarettes (whether based on tobacco, tobacco derivatives, expanded tobacco, reconstituted tobacco, tobacco substitutes or other smokable material);

[0028] non-combustible aerosol provision systems that release compounds from an aerosol-generating material without combusting the aerosol-generating material, such as electronic cigarettes, tobacco heating products, and hybrid systems to generate aerosol using a combination of aerosol-generating materials; and

[0029] aerosol-free delivery systems that deliver the at least one substance to a user orally, nasally, transdermally or in another way without forming an aerosol, including but not limited to, lozenges, gums, patches, articles comprising inhalable powders, and oral products such as oral tobacco which includes snus or moist snuff, wherein the at least one substance may or may not comprise nicotine.

[0030] According to the present disclosure, a “non-combustible” aerosol provision system is one where a constituent aerosol-generating material of the aerosol provision system (or component thereof) is not combusted or burned in order to facilitate delivery of at least one substance to a user.

[0031] In some embodiments, the delivery system is a non-combustible aerosol provision system, such as a powered non-combustible aerosol provision system.

[0032] In some embodiments, the non-combustible aerosol provision system is an electronic cigarette, also known as a vaping device or electronic nicotine delivery system (END), although it is noted that the presence of nicotine in the aerosol-generating material is not a requirement.

[0033] In some embodiments, the non-combustible aerosol provision system is an aerosol-generating material heating system, also known as a heat-not-burn system. An example of such a system is a tobacco heating system.

[0034] In some embodiments, the non-combustible aerosol provision system is a hybrid system to generate aerosol using a combination of aerosol-generating materials, one or a plurality of which may be heated. Each of the aerosol-generating materials may be, for example, in the form of a solid, liquid or gel and may or may not contain nicotine. In some embodiments, the hybrid system comprises a liquid or gel aerosol-generating material and a solid aerosol-generating material. The solid aerosol-generating material may comprise, for example, tobacco or a non-tobacco product.

[0035] Typically, the non-combustible aerosol provision system may comprise a non-combustible aerosol provision device and a consumable for use with the non-combustible aerosol provision device.

[0036] In some embodiments, the disclosure relates to consumables comprising aerosol-generating material and configured to be used with non-combustible aerosol provision devices. These consumables are sometimes referred to as articles throughout the disclosure.

[0037] The terms ‘upstream’ and ‘downstream’ used herein are relative terms defined in relation to the direction of mainstream aerosol drawn through an article or device in use.

[0038] In some embodiments, the non-combustible aerosol provision system, such as a non-combustible aerosol provision device thereof, may comprise a power source and a controller. The power source may, for example, be an electric power source or an exothermic power source. In some embodiments, the exothermic power source comprises a carbon substrate which may be energized so as to distribute power in the form of heat to an aerosol-generating material or to a heat transfer material in proximity to the exothermic power source.

[0039] In some embodiments, the non-combustible aerosol provision system comprises an area for receiving the consumable, an aerosol generator, an aerosol generation area, a housing, a mouthpiece, a filter and/or an aerosol-modifying agent.

[0040] In some embodiments, the consumable for use with the non-combustible aerosol provision device may comprise aerosol-generating material, an aerosol-generating material storage area, an aerosol-generating material transfer component, an aerosol generator, an aerosol generation area, a housing, a wrapper, a filter, a mouthpiece, and/or an aerosol-modifying agent.

[0041] In some embodiments, the consumable comprises a substance to be delivered. The substance to be delivered may be an aerosol-generating material or a material that is not intended to be aerosolized. As appropriate, either material may comprise one or more active constituents, one or more flavors, one or more aerosol-former materials, and/or one or more other functional materials.

[0042] In some embodiments, the substance to be delivered comprises an active substance.

[0043] The active substance as used herein may be a physiologically active material, which is a material intended to achieve or enhance a physiological response. The active substance may for example be selected from nutraceuticals, nootropics, psychoactives. The active substance may be naturally occurring or synthetically obtained. The active substance may comprise for example nicotine, caffeine, taurine, theine, vitamins such as B6 or B12 or C, melatonin, cannabinoids, or constituents, derivatives, or combinations thereof. The active substance may comprise one or more constituents, derivatives or extracts of tobacco, cannabis or another botanical.

[0044] In some embodiments, the active substance comprises nicotine. In some embodiments, the active substance comprises caffeine, melatonin or vitamin B12.

[0045] As noted herein, the active substance may comprise or be derived from one or more botanicals or constituents, derivatives or extracts thereof. As used herein, the term “botanical” includes any material derived from plants including, but not limited to, extracts, leaves, bark, fibers, stems, roots, seeds, flowers, fruits, pollen, husk, shells or the like. Alternatively, the material may comprise an active compound naturally existing in a botanical, obtained synthetically. The material may be in the form of liquid, gas, solid, powder, dust, crushed particles, granules, pellets, shreds, strips, sheets, or the like. Example botanicals are tobacco, eucalyptus, star anise, hemp, cocoa, cannabis, fennel, lemongrass, peppermint, spearmint, rooibos, chamomile, flax, ginger, ginkgo biloba, hazel, hibiscus, laurel,

licorice (liquorice), matcha, mate, orange skin, papaya, rose, sage, tea such as green tea or black tea, thyme, clove, cinnamon, coffee, aniseed (anise), basil, bay leaves, cardamom, coriander, cumin, nutmeg, oregano, paprika, rosemary, saffron, lavender, lemon peel, mint, juniper, elderflower, vanilla, wintergreen, beefsteak plant, curcuma, turmeric, sandalwood, cilantro, bergamot, orange blossom, myrtle, cassia, valerian, pimento, mace, damien, marjoram, olive, lemon balm, lemon basil, chive, carvi, verbena, tarragon, geranium, mulberry, ginseng, theanine, theacrine, maca, ashwagandha, damiana, guarana, chlorophyll, baobab or any combination thereof. The mint may be chosen from the following mint varieties: *Mentha Arvensis*, *Mentha c.v.*, *Mentha niliaca*, *Mentha piperita*, *Mentha piperita citrata c.v.*, *Mentha piperita c.v.*, *Mentha spicata crispa*, *Mentha cardiifolia*, *Mentha longifolia*, *Mentha suaveolens variegata*, *Mentha pulegium*, *Mentha spicata c.v.* and *Mentha suaveolens*.

[0046] In some embodiments, the active substance comprises or is derived from one or more botanicals or constituents, derivatives or extracts thereof and the botanical is tobacco.

[0047] In some embodiments, the active substance comprises or is derived from one or more botanicals or constituents, derivatives or extracts thereof and the botanical is selected from eucalyptus, star anise, cocoa and hemp.

[0048] In some embodiments, the active substance comprises or is derived from one or more botanicals or constituents, derivatives or extracts thereof and the botanical is selected from rooibos and fennel.

[0049] In some embodiments, the substance to be delivered comprises a flavor.

[0050] As used herein, the terms “flavor” and “flavorant” refer to materials which, where local regulations permit, may be used to create a desired taste, aroma or other somatosensorial sensation in a product for adult consumers. They may include naturally occurring flavor materials, botanicals, extracts of botanicals, synthetically obtained materials, or combinations thereof (e.g., tobacco, cannabis, licorice (liquorice), hydrangea, eugenol, Japanese white bark magnolia leaf, chamomile, fenugreek, clove, maple, matcha, menthol, Japanese mint, aniseed (anise), cinnamon, turmeric, Indian spices, Asian spices, herb, wintergreen, cherry, berry, red berry, cranberry, peach, apple, orange, mango, clementine, lemon, lime, tropical fruit, papaya, rhubarb, grape, durian, dragon fruit, cucumber, blueberry, mulberry, citrus fruits, Drambuie, bourbon, scotch, whiskey, gin, tequila, rum, spearmint, peppermint, lavender, aloe vera, cardamom, celery, cascarrilla, nutmeg, sandalwood, bergamot, geranium, khat, naswar, betel, shisha, pine, honey essence, rose oil, vanilla, lemon oil, orange oil, orange blossom, cherry blossom, cassia, caraway, cognac, jasmine, ylang-ylang, sage, fennel, wasabi, piment, ginger, coriander, coffee, hemp, a mint oil from any species of the genus *Mentha*, eucalyptus, star anise, cocoa, lemongrass, rooibos, flax, ginkgo biloba, hazel, hibiscus, laurel, mate, orange skin, rose, tea such as green tea or black tea, thyme, juniper, elderflower, basil, bay leaves, cumin, oregano, paprika, rosemary, saffron, lemon peel, mint, beefsteak plant, curcuma, cilantro, myrtle, cassia, valerian, pimento, mace, damien, marjoram, olive, lemon balm, lemon basil, chive, carvi, verbena, tarragon, limonene, thymol, camphene), flavor enhancers, bitterness receptor site blockers, sensorial receptor site activators or stimulators, sugars and/or sugar

substitutes (e.g., sucralose, acesulfame potassium, aspartame, saccharine, cyclamates, lactose, sucrose, glucose, fructose, sorbitol, or mannitol), and other additives such as charcoal, chlorophyll, minerals, botanicals, or breath freshening agents. They may be imitation, synthetic or natural ingredients or blends thereof. They may be in any suitable form, for example, liquid such as an oil, solid such as a powder, or gas.

[0051] In some embodiments, the flavor comprises menthol, spearmint and/or peppermint. In some embodiments, the flavor comprises flavor components of cucumber, blueberry, citrus fruits and/or redberry. In some embodiments, the flavor comprises eugenol. In some embodiments, the flavor comprises flavor components extracted from tobacco. In some embodiments, the flavor comprises flavor components extracted from cannabis.

[0052] In some embodiments, the flavor may comprise a sensate, which is intended to achieve a somatosensorial sensation which are usually chemically induced and perceived by the stimulation of the fifth cranial nerve (trigeminal nerve), in addition to or in place of aroma or taste nerves, and these may include agents providing heating, cooling, tingling, numbing effect. A suitable heat effect agent may be, but is not limited to, vanillyl ethyl ether and a suitable cooling agent may be, but not limited to eucalyptol, WS-3.

[0053] An aerosol-generating material is a material that is capable of generating aerosol, for example when heated, irradiated or energized in any other way. An aerosol-generating material may be in the form of a solid, liquid or gel which may or may not contain an active substance and/or flavorants. The aerosol-generating material may be incorporated into an article for use in the aerosol-generating system.

[0054] As used herein, the term “tobacco material” refers to any material comprising tobacco or derivatives or substitutes thereof. The tobacco material may be in any suitable form. The term “tobacco material” may include one or more of tobacco, tobacco derivatives, expanded tobacco, reconstituted tobacco or tobacco substitutes. The tobacco material may comprise one or more of ground tobacco, tobacco fiber, cut tobacco, extruded tobacco, tobacco stem, tobacco lamina, reconstituted tobacco and/or tobacco extract.

[0055] A consumable is an article comprising or consisting of aerosol-generating material, part or all of which is intended to be consumed during use by a user. A consumable may comprise one or more other components, such as an aerosol-generating material storage area, an aerosol-generating material transfer component, an aerosol generation area, a housing, a wrapper, a mouthpiece, a filter and/or an aerosol-modifying agent. A consumable may also comprise an aerosol generator, such as a heater, that emits heat to cause the aerosol-generating material to generate aerosol in use. The heater may, for example, comprise combustible material, a material heatable by electrical conduction, or a susceptor.

[0056] A susceptor is a material that is heatable by penetration with a varying magnetic field, such as an alternating magnetic field. The susceptor may be an electrically-conductive material, so that penetration thereof with a varying magnetic field causes induction heating of the heating material. The heating material may be magnetic material, so that penetration thereof with a varying magnetic field causes magnetic hysteresis heating of the heating material. The susceptor may be both electrically-conductive and magnetic, so that the susceptor is heatable by both heating mecha-

nisms. The device that is configured to generate the varying magnetic field is referred to as a magnetic field generator, herein.

[0057] An aerosol-modifying agent is a substance, typically located downstream of the aerosol generation area, that is configured to modify the aerosol generated, for example by changing the taste, flavor, acidity or another characteristic of the aerosol. The aerosol-modifying agent may be provided in an aerosol-modifying agent release component, that is operable to selectively release the aerosol-modifying agent.

[0058] The aerosol-modifying agent may, for example, be an additive or a sorbent. The aerosol-modifying agent may, for example, comprise one or more of a flavorant, a colorant, water, and a carbon adsorbent. The aerosol-modifying agent may, for example, be a solid, a liquid, or a gel. The aerosol-modifying agent may be in powder, thread or granule form. The aerosol-modifying agent may be free from filtration material.

[0059] An aerosol generator is an apparatus configured to cause aerosol to be generated from the aerosol-generating material. In some embodiments, the aerosol generator is a heater configured to subject the aerosol-generating material to heat energy, so as to release one or more volatiles from the aerosol-generating material to form an aerosol. In some embodiments, the aerosol generator is configured to cause an aerosol to be generated from the aerosol-generating material without heating. For example, the aerosol generator may be configured to subject the aerosol-generating material to one or more of vibration, increased pressure, or electrostatic energy.

[0060] The filamentary tow material described herein can comprise cellulose acetate fiber tow. The filamentary tow can also be formed using other materials used to form fibers, such as polyvinyl alcohol (PVOH), polylactic acid (PLA), polycaprolactone (PCL), poly(1-4 butanediol succinate) (PBS), poly(butylene adipate-co-terephthalate)(PBAT), starch based materials, cotton, aliphatic polyester materials and polysaccharide polymers or a combination thereof. The filamentary tow may be plasticized with a suitable plasticizer for the tow, such as triacetin where the material is cellulose acetate tow, or the tow may be non-plasticized. The tow can have any suitable specification, such as fibers having a 'Y' shaped or other cross section such as 'X' shaped, filamentary denier values between 2.5 and 15 denier per filament, for example between 8.0 and 11.0 denier per filament and total denier values of 5,000 to 50,000, for example between 10,000 and 40,000.

[0061] FIG. 1 is a side-on cross sectional view of a first article 1a for use in a non-combustible aerosol provision system, the article 1a including a recess or cavity 3a in an aerosol-generating material 3a, where the recess or cavity 3a is at least partially bounded by a material layer 13. FIG. 1 also schematically illustrates an aerosol provision device 100.

[0062] The article 1a includes a mouthpiece 2, and an aerosol-generating section, connected to the mouthpiece 2. In the present example, the aerosol generating section comprises a body of aerosol-generating material in the form of a cylindrical rod of aerosol-generating material 3. The body of aerosol-generating material 3 includes a recess or cavity 3a extending into the aerosol-generating material 3. The article 1a is generally rod-shaped and has a longitudinal axis shown as the dotted line X-X'. In the present example, the

recess or cavity 3a in the aerosol-generating material 3 is at least partially bounded by a material layer 13. The body 3 has a first longitudinal end 3b and a second longitudinal end 3c, and the material layer covers or at least partially covers the first longitudinal end 3b, the present example forming an upstream end of the article 1a. In the present example, the material layer 13 spans the upstream end 3b of the recess or cavity 3a in the aerosol-generating material 3. In the present example, the material layer 13 also extends around the circumferential periphery of the article 1a, forming a lip which extends over the tipping paper 5 at the upstream end of the article 1a. For instance, the material layer 13 can extend between 2 mm and 8 mm over the end of the article 1a from the upstream end thereof. In the present example, the material layer extends 5 mm over the upstream end portion.

[0063] The recess or cavity 3a, in the present example extends all of the way through the body of aerosol-generating material 3. However, in other examples the recess or cavity 3a can extend only partially through the body of aerosol-generating material 3. The length of the recess or cavity 3a in the direction of the longitudinal axis can be less than the length of the body 3 along the longitudinal axis.

[0064] The device 100 includes a housing 101 and a region 102 for receiving the article 1a. The region 102 includes an aerosol-generating element 103, in the present case a heatable element, which generates an aerosol from the aerosol-generating material of the article 1a. The recess or cavity 3a is arranged to receive at least a part of the aerosol generating element. In order to do this, the aerosol-generating element 103 is arranged to pass through the material layer 13. For instance, the aerosol-generating element 103 can have a shape enabling it to pierce through the material layer 13.

[0065] The material layer 13 can comprise an amorphous solid, and/or a sheet material. For instance, the material layer 13 can comprise a sheet material, for instance a sheet material including an aerosol-modifying agent, such as a flavorant, as defined herein. The sheet material can be adhered to the article 1a, for instance adhered to the tipping paper 5 in the portion which overlaps the tipping paper 5. The material layer 13 can alternatively be a layer which is sprayed onto the article 1a, or applied in other ways such as by dipping the end of the article 1 into a reservoir of a liquid material which is to form the material layer 13, for instance dried or cooled.

[0066] The material layer 13 can substantially prevent the flow of air into the aerosol-generating material 3 though the material layer 13. For instance, the material layer can have a permeability below 100 Coresta Units, or be an impervious membrane, a cap, a varnished paper, or a gasket seal. In this way, the downstream end 3b of the aerosol-generating material 3 is sealed until the aerosol-generating element 103 of the aerosol provision device 100 pierces the material layer 13. The aperture thus formed in the material layer 13 corresponds to the outer periphery of the aerosol-generating element 103.

[0067] In use, the article 1a is pushed onto the aerosol-generating element 103 such that the aerosol-generating element 103 of the aerosol provision device 100 pierces the material layer 13. The article 1a is consumed by drawing mainstream aerosol through the downstream portion 2, in the present case the mouthpiece 2, of the article 1a. The aerosol-generating element 103 of the aerosol provision

device **100** can be provided with an aperture through which external air can be drawn through the device **100** and through the aerosol-generating element **103**, to assist with air flow through the article **1a**. Once the smoking session is complete, the aerosol-generating element **103** is removed from the aerosol-generating material **3**. The material layer **13** assists with preventing aerosol-generating material **3** from remaining on the aerosol-generating element **103** as it is removed from the article **1a**. This can address known issues with the contamination of aerosol-generating elements **103** such as blade or pin heaters by aerosol-generating material **3**, which can limit the effective lifespan of the aerosol-generating element **103**.

[0068] In the present example, the rod of aerosol-generating material **3** has a circumference of about 22.7 mm. In alternative embodiments, the rod of aerosol-generating material **3** may have any suitable circumference, for example between about 20 mm and about 26 mm.

[0069] The body of aerosol-generating material **3** has a length, for instance, of between about 5 mm and about 20 mm, or between about 8 mm and about 15 mm. The recess or cavity **3a** extends through at least 25%, 50% or 75% of the length of the body of aerosol-generating material **3**. For instance, for a body of aerosol-generating material **3** having a length of 12 mm, the recess **3a** can extend 9 mm or more into the body.

[0070] The maximum diameter of the recess or cavity **3a** can be greater than 10%, or greater than 15%, or greater than 20% of the diameter of the body of aerosol generating material **3**.

[0071] The maximum diameter of the recess **3a** can be less than 60%, or less than 50%, or less than 40% of the diameter of the body of aerosol generating material **3**, for instance from 10% to 40% of the diameter of the body of aerosol-generating material **3** or from 15% to 30% of the diameter of the aerosol-generating material **3**.

[0072] The aerosol-generating material **3** in any of the embodiments described herein can comprise aerosol-generating material in sheet form or in an extruded form or in a molded form. The aerosol-generating material **3** can, for instance, comprise plant based material which is extruded and/or molded to form the body of aerosol-generating material **3**. In one example, the aerosol-generating material **3** is formed from a reconstituted tobacco material which is extruded into a rod shape and then shaped using a mandrel to include the recess **3a** described herein. In other examples, the aerosol-generating material **3** is formed from a reconstituted plant based material which is extruded into a rod shape and then shaped using a mandrel to include the recess **3a** described herein. In other examples, the aerosol-generating material **3** is formed from a reconstituted plant or tobacco based material which is formed in a mold to the desired shape, for instance including the recess **3a** described herein. Extruded or molded tobacco can be produced by a process such as that described in international patent publication no. WO2020148538, the contents of which are incorporated herein by reference.

[0073] The recess or cavity **3a** in the aerosol-generating material body **3** can be at least partially filled with a second aerosol-generating material, which could be the same or different from the aerosol-generating material forming the body, in this case referred to as the first aerosol-generating material.

[0074] The mouthpiece **2** includes a cooling section **8**, also referred to as a cooling element, positioned immediately downstream of and adjacent to the source of aerosol-generating material **3**. In the present example, the cooling section **8** is in an abutting relationship with the source of aerosol-generating material. The mouthpiece **2** also includes, in the present example, a body of material **6** downstream of the cooling section **8**, and a hollow tubular element **4** downstream of the body of material **6**, at the mouth end of the article **1**.

[0075] The cooling section **8** comprises a hollow channel, having an internal diameter of between about 1 mm and about 4 mm, for example between about 2 mm and about 4 mm. In the present example, the hollow channel has an internal diameter of about 3 mm. The hollow channel extends along the full length of the cooling section **8**. In the present example, the cooling section **8** comprises a single hollow channel. In alternative embodiments, the cooling section can comprise multiple channels, for example, 2, 3 or 4 channels. In the present example, the single hollow channel is substantially cylindrical, although in alternative embodiments, other channel geometries/cross-sections may be used. The hollow channel can provide a space into which aerosol drawn into the cooling section **8** can expand and cool down.

[0076] The cooling section **8** may have a wall thickness in a radial direction, which can be measured, for example, using a calliper. The wall thickness of the cooling section **8**, for a given outer diameter of cooling section, defines the internal diameter for the cavity surrounded by the walls of the cooling section **8**. The cooling section **8** can have a wall thickness of at least about 1.5 mm and up to about 2 mm. In the present example, the cooling section **8** has a wall thickness of about 2 mm. Providing a cooling section **8** having a wall thickness within this range improves the retention of the source of aerosol-generating material in the aerosol generating section, in use, by reducing the longitudinal displacement of strands and/or strips of aerosol-generating material when the aerosol generator is inserted into the article.

[0077] The cooling section **8** is formed from filamentary tow. Other constructions can be used, such as a plurality of layers of paper which are parallel wound, with butted seams, to form the cooling section **8**; or spirally wound layers of paper, cardboard tubes, tubes formed using a papier-mâché type process, molded or extruded plastic tubes or similar. The cooling section **8** is manufactured to have a rigidity that is sufficient to withstand the axial compressive forces and bending moments that might arise during manufacture and while the article **1** is in use.

[0078] The wall material of the cooling section **8** can be relatively non-porous, such that at least 90% of the aerosol generated by the aerosol generating material **3** passes longitudinally through the one or more hollow channels rather than through the wall material of the cooling section **8**. For instance, at least 92% or at least 95% of the aerosol generated by the aerosol generating material **3** can pass longitudinally through the one or more hollow channels.

[0079] In some examples, the density of the material forming the cooling section **8** is at least about 0.20 grams per cubic centimeter (g/cc), at least about 0.25 g/cc. In some examples, the density of the material forming the cooling section **8** is less than about 0.80 grams per cubic centimeter (g/cc), more preferably less than 0.6 g/cc. In some embodi-

ments, the density of the material forming the cooling section **8** is between 0.20 and 0.8 g/cc, more preferably between 0.3 and 0.6 g/cc, or between 0.4 g/cc and 0.6 g/cc or about 0.5 g/cc. These densities have been found to provide a good balance between improved firmness afforded by denser material and minimising the overall weight of the article. For the purposes of the present invention, the “density” of the material forming the cooling section **8** refers to the density of any filamentary tow forming the element with any plasticizer incorporated. The density may be determined by dividing the total weight of the material forming the cooling section **8** by the total volume of the material forming the cooling section **8**, wherein the total volume can be calculated using appropriate measurements of the material forming the cooling section **8** taken, for example, using callipers. Where necessary, the appropriate dimensions may be measured using a microscope.

[0080] Preferably, the length of the cooling section **8** is less than about 30 mm. More preferably, the length of the cooling section **8** is less than about 25 mm. Still more preferably, the length of the cooling section **8** is less than about 20 mm. In addition, or as an alternative, the length of the cooling section **8** is preferably at least about 10 mm. Preferably, the length of the cooling section **8** is at least about 15 mm. In some preferred embodiments, the length of the cooling section **8** is from about 15 mm to about 20 mm, more preferably from about 16 mm to about 19 mm. In the present example, the length of the cooling section **8** is 19 mm.

[0081] The cooling section **8** is located around and defines an air gap within the mouthpiece **2** which acts as a cooling section. The air gap provides a chamber through which heated volatilized components generated by the rod of aerosol-generating material **3** flow. The cooling section **8** is hollow to provide a chamber for aerosol accumulation yet rigid enough to withstand axial compressive forces and bending moments that might arise during manufacture and while the article **1** is in use. The cooling section **8** provides a physical displacement between the aerosol-generating material **3** and the body of material **6**. The physical displacement provided by the cooling section **8** can provide a thermal gradient across the length of the cooling section **8**.

[0082] Preferably, the mouthpiece **2** comprises a cavity having an internal volume greater than 110 mm³. Providing a cavity of at least this volume has been found to enable the formation of an improved aerosol. More preferably, the mouthpiece **2** comprises a cavity, for instance formed within the cooling section **8**, having an internal volume greater than 120 mm³, and still more preferably greater than 130 mm³, allowing further improvement of the aerosol. In some examples, the internal cavity comprises a volume of between about 130 mm³ and about 230 mm³, for instance about 134 mm³ or 227 mm³.

[0083] The cooling section **8** can be configured to provide a temperature differential of at least 40 degrees Celsius between a heated volatilized component entering a first, upstream end of the cooling section **8** and a heated volatilized component exiting a second, downstream end of the cooling section **8**. The cooling section **8** is preferably configured to provide a temperature differential of at least 60 degrees Celsius, preferably at least 80 degrees Celsius and more preferably at least 100 degrees Celsius between a heated volatilized component entering a first, upstream end of the cooling section **8** and a heated volatilized component

exiting a second, downstream end of the cooling section **8**. This temperature differential across the length of the cooling section **8** protects the temperature sensitive body of material **6** from the high temperatures of the aerosol-generating material **3** when it is heated.

[0084] When in use, the aerosol-generating section may exhibit a pressure drop of from about 15 to about 40 mm H₂O. In some embodiments, the aerosol-generating section exhibits a pressure drop across the aerosol-generating section of from about 15 to about 30 mm H₂O.

[0085] The aerosol-generating material may have a packing density of between about 400 mg/cm³ and about 900 mg/cm³ within the aerosol-generating section.

[0086] In the present embodiment, a moisture impermeable wrapper **10** circumscribes the rod of aerosol-generating material and comprises aluminium foil. In other embodiments, the wrapper **10** comprises a paper wrapper, optionally comprising a barrier coating to make the material of the wrapper substantially moisture impermeable. Aluminium foil has been found to be particularly effective at enhancing the formation of aerosol within the aerosol-generating material **3**. In the present example, the aluminium foil has a metal layer having a thickness of about 6 µm. In the present example, the aluminium foil has a paper backing. However, in alternative arrangements, the aluminium foil can be other thicknesses, for instance between 4 µm and 16 µm in thickness. The aluminium foil also need not have a paper backing, but could have a backing formed from other materials, for instance to help provide an appropriate tensile strength to the foil, or it could have no backing material. Metallic layers or foils other than aluminium can also be used. The total thickness of the wrapper is preferably between 20 µm and 60 µm, more preferably between 30 µm and 50 µm, which can provide a wrapper having appropriate structural integrity and heat transfer characteristics.

[0087] In the present example, the moisture impermeable wrapper **10** is also substantially impermeable to air. In alternative embodiments, the wrapper **10** preferably has a permeability of less than 100 Coresta Units, more preferably less than 60 Coresta Units. It has been found that low permeability wrappers, for instance having a permeability of less than 100 Coresta Units, more preferably less than 60 Coresta Units, result in an improvement in the aerosol formation in the aerosol-generating material **3**. The permeability of the wrapper **10** can be measured in accordance with ISO 2965:2009 concerning the determination of air permeability for materials used as cigarette papers, filter plug wrap and filter joining paper.

[0088] The body of material **6** and hollow tubular element **4** each define a substantially cylindrical overall outer shape and share a common longitudinal axis. The body of material **6** is wrapped in a first plug wrap **7**. Preferably, the first plug wrap **7** has a basis weight of less than 50 gsm, more preferably between about 20 gsm and 40 gsm. Preferably, the first plug wrap **7** has a thickness of between 30 µm and 60 µm, more preferably between 35 µm and 45 µm. Preferably, the first plug wrap **7** is a non-porous plug wrap, for instance having a permeability of less than 100 Coresta units, for instance less than 50 Coresta units. However, in other embodiments, the first plug wrap **7** can be a porous plug wrap, for instance having a permeability of greater than 200 Coresta Units.

[0089] Preferably, the length of the body of material **6** is less than about 15 mm. More preferably, the length of the

body of material 6 is less than about 12 mm. In addition, or as an alternative, the length of the body of material 6 is at least about 5 mm. Preferably, the length of the body of material 6 is at least about 8 mm. In some preferred embodiments, the length of the body of material 6 is from about 5 mm to about 15 mm, more preferably from about 6 mm to about 12 mm, even more preferably from about 6 mm to about 12 mm, most preferably about 6 mm, 7 mm, 8 mm, 9 mm or 10 mm. In the present example, the length of the body of material 6 is 10 mm.

[0090] In the present example, the body of material 6 is formed from filamentary tow. In the present example, the tow used in the body of material 6 has a denier per filament (d.p.f.) of 5 and a total denier of 25,000. In the present example, the tow comprises plasticized cellulose acetate tow. The plasticizer used in the tow comprises about 9% by weight of the tow. In the present example, the plasticizer is triacetin. In other examples, different materials can be used to form the body of material 6. For instance, rather than tow, the body 6 can be formed from paper, for instance in a similar way to paper filters known for use in cigarettes. For instance, the paper, or other cellulose-based material, can be provided as one or more portions of sheet material which is folded and/or crimped to form body 6. The sheet material can have a basis weight of from 15 gsm to 60 gsm, for instance between 20 and 50 gsm. The sheet material can, for instance, have a basis weight in any of the ranges between 15 and 25 gsm, between 25 and 30 gsm, between 30 and 40 gsm, between 40 and 45 gsm and between 45 and 50 gsm. Additionally or alternatively, the sheet material can have a width of between 50 mm and 200 mm, for instance between 60 mm and 150 mm, or between 80 mm and 150 mm. For instance, the sheet material can have a basis weight of between 20 and 50 gsm and a width between 80 mm and 150 mm. This can, for instance, enable the cellulose-based bodies to have appropriate pressure drops for an article having dimensions as described herein.

[0091] Alternatively, the body 6 can be formed from tows other than cellulose acetate, for instance polylactic acid (PLA), other materials described herein for filamentary tow or similar materials. The tow is preferably formed from cellulose acetate. The tow, whether formed from cellulose acetate or other materials, preferably has a d.p.f. of at least 5. Preferably, to achieve a sufficiently uniform body of material 6, the tow has a denier per filament of no more than 12 d.p.f., preferably no more than 11 d.p.f. and still more preferably no more than 10 d.p.f.

[0092] The total denier of the tow forming the body of material 6 is preferably at most 30,000, more preferably at most 28,000 and still more preferably at most 25,000. These values of total denier provide a tow which takes up a reduced proportion of the cross sectional area of the mouthpiece 2 which results in a lower pressure drop across the mouthpiece 2 than tows having higher total denier values. For appropriate firmness of the body of material 6, the tow preferably has a total denier of at least 8,000 and more preferably at least 10,000. Preferably, the denier per filament is between 5 and 12 while the total denier is between 10,000 and 25,000. Preferably the cross-sectional shape of the filaments of tow are 'Y' shaped, although in other embodiments other shapes such as 'X' shaped filaments can be used, with the same d.p.f. and total denier values as provided herein.

[0093] Irrespective of the material used to form the body 6, the pressure drop across body 6, can, for instance, be

between 0.3 and 5 mmWG per mm of length of the body 6, for instance between 0.5 mmWG and 2 mmWG per mm of length of the body 6. The pressure drop can, for instance, be between 0.5 and 1 mmWG/mm of length, between 1 and 1.5 mmWG/mm of length or between 1.5 and 2 mmWG/mm of length. The total pressure drop across body 6 can, for instance, be between 3 mmWG and 8 mmWG, or between 4 mmWG and 7 mmWG. The total pressure drop across body 6 can be about 5, 6 or 7 mmWG.

[0094] As shown in FIG. 1, the mouthpiece 2 of the article 1 comprises an upstream end 2a adjacent to the rod of aerosol-generating material 3 and a downstream end 2b distal from the rod of aerosol-generating material 3. At the downstream end 2b, the mouthpiece 2 has a hollow tubular element 4 formed from filamentary tow. This has advantageously been found to significantly reduce the temperature of the outer surface of the mouthpiece 2 at the downstream end 2b of the mouthpiece which comes into contact with a consumer's mouth when the article 1 is in use. In addition, the use of the tubular element 4 has also been found to significantly reduce the temperature of the outer surface of the mouthpiece 2 even upstream of the tubular element 4. Without wishing to be bound by theory, it is hypothesized that this is due to the tubular element 4 channelling aerosol closer to the centre of the mouthpiece 2, and therefore reducing the transfer of heat from the aerosol to the outer surface of the mouthpiece 2.

[0095] The "wall thickness" of the hollow tubular element 4 corresponds to the thickness of the wall of the tube 4 in a radial direction. This may be measured, for example, using a calliper. The wall thickness is advantageously greater than 0.9 mm, and more preferably 1.0 mm or greater. Preferably, the wall thickness is substantially constant around the entire wall of the hollow tubular element 4. However, where the wall thickness is not substantially constant, the wall thickness is preferably greater than 0.9 mm at any point around the hollow tubular element 4, more preferably 1.0 mm or greater. In the present example, the wall thickness of the hollow tubular element 4 is about 1.3 mm.

[0096] Preferably, the length of the hollow tubular element 4 is less than about 20 mm. More preferably, the length of the hollow tubular element 4 is less than about 15 mm. Still more preferably, the length of the hollow tubular element 4 is less than about 10 mm. In addition, or as an alternative, the length of the hollow tubular element 4 is at least about 5 mm. Preferably, the length of the hollow tubular element 4 is at least about 6 mm. In some preferred embodiments, the length of the hollow tubular element 4 is from about 5 mm to about 20 mm, more preferably from about 6 mm to about 10 mm, even more preferably from about 6 mm to about 8 mm, most preferably about 6 mm, 7 mm or about 8 mm. In the present example, the length of the hollow tubular element 4 is 7 mm.

[0097] Preferably, the density of the hollow tubular element 4 is at least about 0.25 grams per cubic centimeter (g/cc), more preferably at least about 0.3 g/cc. Preferably, the density of the hollow tubular element 4 is less than about 0.75 grams per cubic centimeter (g/cc), more preferably less than 0.6 g/cc. In some embodiments, the density of the hollow tubular element 4 is between 0.25 and 0.75 g/cc, more preferably between 0.3 and 0.6 g/cc, and more preferably between 0.4 g/cc and 0.6 g/cc or about 0.5 g/cc. These densities have been found to provide a good balance between improved firmness afforded by denser material and

the lower heat transfer properties of lower density material. For the purposes of the present invention, the “density” of the hollow tubular element 4 refers to the density of the filamentary tow forming the element with any plasticizer incorporated. The density may be determined by dividing the total weight of the hollow tubular element 4 by the total volume of the hollow tubular element 4, wherein the total volume can be calculated using appropriate measurements of the hollow tubular element 4 taken, for example, using callipers. Where necessary, the appropriate dimensions may be measured using a microscope.

[0098] The filamentary tow forming the hollow tubular element 4 preferably has a total denier of less than 45,000, more preferably less than 42,000. This total denier has been found to allow the formation of a tubular element 4 which is not too dense. Preferably, the total denier is at least 20,000, more preferably at least 25,000. In preferred embodiments, the filamentary tow forming the hollow tubular element 4 has a total denier between 25,000 and 45,000, more preferably between 35,000 and 45,000.

[0099] Preferably the cross-sectional shape of the filaments of tow are ‘Y’ shaped, although in other embodiments other shapes such as ‘X’ shaped filaments can be used.

[0100] The filamentary tow forming the hollow tubular element 4 preferably has a denier per filament of greater than 3. This denier per filament has been found to allow the formation of a tubular element 4 which is not too dense. Preferably, the denier per filament is at least 4, more preferably at least 5. In preferred embodiments, the filamentary tow forming the hollow tubular element 4 has a denier per filament between 4 and 10, more preferably between 4 and 9. In one example, the filamentary tow forming the hollow tubular element 4 has an 7.3Y36,000 tow formed from cellulose acetate and comprising 18% plasticizer, for instance triacetin.

[0101] The hollow tubular element 4 preferably has an internal diameter of greater than 3.0 mm. Smaller diameters than this can result in increasing the velocity of aerosol passing through the mouthpiece 2 to the consumers mouth more than is desirable, such that the aerosol becomes too warm, for instance reaching temperatures greater than 40° C. or greater than 45° C. More preferably, the hollow tubular element 4 has an internal diameter of greater than 3.1 mm, and still more preferably greater than 3.5 mm or 3.6 mm. In one embodiment, the internal diameter of the hollow tubular element 4 is about 4.7 mm.

[0102] The hollow tubular element 4 preferably comprises from 15% to 22% by weight of plasticizer. For cellulose acetate tow, the plasticizer is preferably triacetin, although other plasticizers such as polyethylene glycol (PEG) can be used. More preferably, the hollow tubular element 4 comprises from 16% to 20% by weight of plasticizer, for instance about 17%, about 18% or about 19% plasticizer.

[0103] In the present example, the first hollow tubular element 4, body of material 6 and cooling section 8 are combined using a second plug wrap 9 which is wrapped around all three sections. Preferably, the second plug wrap 9 has a basis weight of less than 50 gsm, more preferably between about 20 gsm and 45 gsm. Preferably, the second plug wrap 9 has a thickness of between 30 µm and 60 µm, more preferably between 35 µm and 45 µm. The second plug wrap 9 is preferably a non-porous plug wrap having a permeability of less than 100 Coresta Units, for instance less than 50 Coresta Units. However, in alternative embodi-

ments, the second plug wrap 9 can be a porous plug wrap, for instance having a permeability of greater than 200 Coresta Units.

[0104] A tipping paper 5 is wrapped around the full length of the mouthpiece 2 and in the present example over the full length of the rod of aerosol-generating material 3 and has an adhesive on its inner surface to connect the mouthpiece 2 and rod 3. In the present example, the rod of aerosol-generating material 3 is wrapped in wrapper 10, which forms a first wrapping material, and the tipping paper 5 forms an outer wrapping material which extends at least partially over the rod of aerosol-generating material 3 to connect the mouthpiece 2 and rod 3. In some examples, the tipping paper can extend only partially over the rod of aerosol-generating material.

[0105] The tipping paper 5 can extend 5 mm over the rod of aerosol-generating material 3 or it can alternatively extend between 3 mm and 10 mm over the rod 3, or more preferably between 4 mm and 6 mm, to provide a secure attachment between the mouthpiece 2 and rod 3. The tipping paper can have a basis weight greater than 20 gsm, for instance greater than 25 gsm, or preferably greater than 30 gsm, for example 37 gsm.

[0106] The article has a ventilation level of about 10% of the aerosol drawn through the article. In alternative embodiments, the article can have a ventilation level of between 1% and 20% of aerosol drawn through the article, for instance between 1% and 12%. Ventilation at these levels helps to increase the consistency of the aerosol inhaled by the user at the mouth end 2b, while assisting the aerosol cooling process. The ventilation is provided directly into the mouthpiece 2 of the article 1. In the present example, the ventilation is provided into the cooling section 8, which has been found to be particularly beneficial in assisting with the aerosol generation process. The ventilation is provided via perforations 12, in the present case formed as a single row of laser perforations, positioned 13 mm from the downstream, mouth-end 2b of the mouthpiece 2. In alternative embodiments, two or more rows of ventilation perforations may be provided. These perforations pass through the tipping paper 5, second plug wrap 9 and cooling section 8. In alternative embodiments, the ventilation can be provided into the mouthpiece at other locations, for instance into the body of material 6 or first tubular element 4. Preferably, the article is configured such that the perforations are provided about 28 mm or less from the upstream end of the article 1, preferably between 20 mm and 28 mm from the upstream end of the article 1. In the present example, the apertures are provided about 25 mm from the upstream end of the article.

[0107] FIG. 2 is a side-on cross sectional view of a second article 1b for use in a non-combustible aerosol provision system, the second article including an airflow path 15 lateral to the path of mainstream aerosol. In the present example, the second plug wrap 9' extends the full length of the mouthpiece 2' and body of aerosol-generating material 3 and spacing elements 14a and 14b are provided between the second plug wrap 9' and tipping paper 5. A first spacing element 14a is provided between the second plug wrap 9' and tipping paper 5 at the upstream end of the article 1b and a second spacing element 14b is provided between the second plug wrap 9' and tipping paper 5 at the downstream end of the article 1b. This creates a gap between the second plug wrap 9' and tipping paper 5 creating an airflow path 15 lateral to the path of mainstream aerosol. The airflow path 15

allows air to flow through the article 1b in a direction opposite to that of mainstream aerosol.

[0108] In the present example, the airflow path 15 begins at the ventilation area 12 on an outer surface of the article 1b and extends through the gap between the second plug wrap 9' and tipping paper 5 and joins the main path for mainstream aerosol via the aerosol-generating material 3. For instance, perforations can be provided in the second plug wrap 9 where it surrounds the aerosol-generating material 3 to allow airflow from the airflow path 15 to enter the aerosol-generating material 3. Alternatively, the second plug 9' can be provided as a porous plug wrap.

[0109] As a result of the airflow path 15, when the second article 1b is used with the aerosol provision device 100, airflow need not pass through the device 100 but can flow entirely through the article 1b. This enables the article 1b to form a complete system which is isolated from the device 100, restricting or preventing the migration of unwanted components of the aerosol-generating material 3 into the device 100 and increasing the cleanliness and lifespan of the device 100.

[0110] FIG. 3 is a side-on cross sectional view of a third article 1c for use in a non-combustible aerosol provision system, the third article 1c including a first material layer 13a in the form of a fibrous body and a second material layer 13b similar to the material layer 13 described with reference to FIG. 1. The fibrous body 13a provides a further mechanism for preventing material deposits from the aerosol-generating material 3 from remaining on the aerosol-generating element 103 once the article 1c has been consumed. In particular, the fibrous body 13a can include a channel 13a' through the axial region thereof for receiving the aerosol-generating element 103 of the device. The fibrous body 13a can provide an improved seal around the aerosol-generating element 103 and/or assist with 'wiping' material deposits from the surface of the aerosol-generating element 103 as it is removed from the article 1c. The fibrous body 13a can be formed from any of the materials used for filamentary tow as described herein, or can be formed from paper or similar material, such as a material formed using a molded pulp or molded fiber process.

[0111] FIG. 4a is a side-on cross sectional view of a fourth article 1d for use in a non-combustible aerosol provision system, the fourth article 1d including a material layer 13' which lines an inner surface of a recess or cavity 3a in a body of aerosol-generating material 3. FIG. 4b is a side-on cross sectional view of a section through line Y-Y' of the article 1d of FIG. 4a.

[0112] Referring to FIG. 4a, the material layer 13' extends over the upstream end of the body of aerosol-generating material and also lines the inner surface of the recess or cavity 3a in the body of aerosol-generating material 3. Alternatively, separate material layers can be used to cover the upstream end of the body of aerosol-generating material 3 and the inner surface of the recess or cavity 3a, where the material layers are either the same or different. The downstream end and/or upstream end of the body of aerosol-generating material 3 can be free of the material layer 13'. In the case that both the downstream end and upstream end of the body of aerosol-generating material 3 are free of the material layer 13', the material layer 13' is not used to seal the ends of the aerosol-generating material 3 but prevents or restricts the unwanted transfer of aerosol-generating material 3 to the aerosol generating element 103. The material

layer 13' can be formed from the same materials and using the same techniques as the material layers 13 described with reference to FIGS. 1 to 3. In use, the aerosol-generating element 103 can be separated from the aerosol-generating material 3 by the material layer 13'. The material layer 13' of this example or any of the examples described herein can be formed from a heat-conducting material, so that it improves the consistency of heating of the aerosol-generating material 3 and so that the aerosol-generating material will be heated more uniformly. The material layer of any of the examples herein can, for instance, have a density of greater than 1.2 grams/cm³, greater than 1.5 grams/cm³ or greater than 2.0 grams/cm³. Hygiene is also improved, as the element 103 does not come into direct contact with the aerosol-generating material 3 and so cannot stick to the aerosol-generating material 3. Disruption of the aerosol-generating material 3 is also minimized or prevented. Particular examples of thermally conductive materials that are considered suitable for the material layer include a metal or metal alloy, polymer ceramic or graphite. For instance, the material layer can be formed from a metal foil such as aluminium foil. The material layer can alternatively be flexible ceramic sheet material or flexible graphite sheet material. A coating or extruded element of metal, ceramic or graphite material can also be used.

[0113] In the present example, the second plug wrap 9" is not a flat sheet wrapped around the components of the article 1d, but instead has a corrugated surface forming a series of ridges and troughs around the article 1d inside the tipping paper 5. As shown in FIG. 4b, the result is that a series of channels are formed between the second plug wrap 9" and the tipping paper 5. Ventilating air passes into these channels via the perforations 12 and flows upstream through the channels and into the body of aerosol-generating material 3. In the aerosol-generating material 3 mainstream aerosol is formed and passes back in the downstream direction through the downstream portion 2" and to reach the consumer's mouth.

[0114] FIG. 5a is a side-on cross sectional view of a fifth article 1e for use in a non-combustible aerosol provision system, the fifth article 1e including a body of aerosol-generating material including a recess or cavity 3a and one or more angled channels 3b extending at least partially or completely through the body 3. FIG. 5b is a side-on view of the body of aerosol-generating material 3 of FIG. 5a.

[0115] As illustrated in FIGS. 5a and 5b, the body of aerosol-generating material 3 includes a channel 3b which extends around the outer periphery of the body 3. Air can enter the channel via the airflow paths 15 between the second plug wrap 9" and the tipping 5. In the case that the second plug wrap 9" is substantially air impermeable, perforations 9a can be applied to the second plug wrap 9" to align with the channel 3b in the aerosol-generating material body 3. As a result, in use, air is drawn through the channel 3b and passes over the outer surface of the aerosol-generating material. This can increase the surface area of the body 3 exposed to the airflow and assist with the formation of an aerosol. The air can, for instance, partially pass into and through the aerosol-generating material 3 and partially pass along the channel 3b. The inner surface of the channel 3b can include an aerosol-modifying agent as described herein to provide an alternative sensory experience to the consumer.

[0116] In the present example the one or more channels 3b form a helix around an outer region of the body 3. However, in other examples the one or more channels can follow an alternative path, such as a path which changes in depth as well as passing longitudinally along the body 3.

[0117] FIG. 6a is a side-on cross sectional view of a sixth article 1f for use in a non-combustible aerosol provision system, the sixth article 1f including a body of aerosol-generating material 3 including a recess or cavity 3a and one or more longitudinal channels extending at least partially or completely through the body 3. FIG. 6b is a side-on view of the body of aerosol-generating material of FIG. 6a. In the present example, the one or more channels 3b are arranged on the outer surface of the body of aerosol-generating material 3. There are four channels 3b in the present example spaced circumferentially around the body 3 and extending in a direction substantially parallel to the longitudinal axis X-X' of the body 3. The channels 3b receive air via the airflow paths 15 and some of the air enters the aerosol-generating material 3 while some passes along the channels.

[0118] While the embodiments of FIGS. 5a, 5b, 6a and 6b include one or more channels arranged on the outer surface of the body of aerosol-generating material 3, similar channel (s) can be formed around the inner surface of the recess or cavity 3a, in addition to or in place of the outer channels 3b.

[0119] FIG. 7 is a flow diagram illustrating a method of forming a body of aerosol-generating material 3 as illustrated in FIG. 1. At step S201 a body of aerosol generating material is provided having a recess or cavity in the aerosol-generating material, for instance following manufacture using an extrusion or molding process as described herein. At step S202 a material layer is applied to the aerosol-generating material such that the recess or cavity is at least partially bounded by the material layer.

[0120] FIG. 8 is a flow diagram illustrating a method of forming an article as illustrated in FIG. 5a. At step S301 a body of aerosol-generating material having one or more channels extending at least partially or completely through the body of aerosol-generating material is provided. At step S302 the one or more channels are aligned with an air flow path to allow external air to flow into the one or more channels.

[0121] The aerosol-generating material 3 according to some of the embodiments described herein can be provided in the form of a sheet or shredded sheet which comprises a first surface and a second surface opposite the first surface. The dimensions of the first and second surfaces are congruent. The first and second surfaces of the sheet or shredded sheet may have any shape. For example, the first and second surfaces may be square, rectangular, oblong or circular. Irregular shapes are also envisaged.

[0122] The first and/or second surfaces of the sheet or shredded sheet may be relatively uniform (e.g. they may be relatively smooth) or they may be uneven or irregular. For example, the first and/or second surfaces of the sheet may be textured or patterned to define a relatively coarse surface. In some embodiments, the first and/or second surfaces are relatively rough.

[0123] The smoothness of the first and second surfaces may be influenced by a number of factors, such as the area density of the sheet or shredded sheet, the nature of the components that make up the aerosol-generating material or whether the surfaces of the material have been manipulated,

for example embossed, scored or otherwise altered to confer them with a pattern or texture.

[0124] The areas of the first and second surfaces are each defined by a first dimension (e.g. a width) and a second dimension (e.g. a length). The measurements of the first and second dimensions may have a ratio of 1:1 or greater than 1:1 and thus the sheet or shredded sheet may have an “aspect ratio” of 1:1 or greater than 1:1. As used herein, the term “aspect ratio” is the ratio of a measurement of a first dimension of the first or second surface to a measurement of a second dimension of the first or second surface. An “aspect ratio of 1:1” means that a measurement of the first dimension (e.g. width) and a measurement of the second dimension (e.g. length) are identical. An “aspect ratio of greater than 1:1” a measurement of the first dimension (e.g. width) and a measurement of the second dimension (e.g. length) are different. In some embodiments, the first and second surfaces of the sheet or shredded sheet have an aspect ratio of greater than 1:1, such as 1:2, 1:3, 1:4, 1:5, 1:6, 1:7 or more.

[0125] The shredded sheet may comprise one or more strands or strips of the aerosol-generating material. In some embodiments, the shredded sheet comprises a plurality (e.g. two or more) strands or strips of the aerosol-generating material. The strands or strips of aerosol-generating material may have an aspect ratio of 1:1. In an embodiment, the strands or strips of aerosol-generating material have an aspect ratio of greater than 1:1. In some embodiments, the strands or strips of aerosol-generating material have an aspect ratio of from about 1:5 to about 1:16, or about 1:5, 1:6, 1:7, 1:8, 1:9, 1:10, 1:11 or 1:12. Where the aspect ratio of the strands or strips is greater than 1:1, the strands or strips comprises a longitudinal dimension, or length, extending between a first end of the strand or strip and a second end of the strand or strip.

[0126] Where the shredded sheet comprises a plurality of strands or strips of material, the dimensions of each strand or strip may vary between different strands or strips. For example, the shredded sheet may comprise a first population of strands or strips and a second population of strands or strips, wherein the dimensions of the strands or strips of the first population are different to the dimensions of the strands or strips of the second population. In other words, the plurality of strands or strips may comprise a first population of strands or strips having a first aspect ratio and a second population of strands or strips having a second aspect ratio that is different to the first aspect ratio.

[0127] A first dimension, or cut width, of the strands or strips of aerosol-generating material is between 0.9 mm and 1.5 mm. When strands or strips of aerosol-generating material having a cut width of below 0.9 mm are incorporated into an article for use in a non-combustible aerosol provision system, the pressure drop across the article may be increased to a level that renders the article unsuitable for use in a non-combustible aerosol-provision device. However, if the strands or strips have a cut width above 2 mm (e.g. greater than 2 mm), then it may be challenging to insert the strands or strips of aerosol-generating material into the article during its manufacture. In a preferred embodiment, the cut width of the strands or strips of aerosol-generating material is between about 1 mm and 1.5 mm.

[0128] The strands or strips of material are formed by shredding the sheet of aerosol-generating material. The sheet of aerosol-generating material may be cut width-wise, for example in a cross-cut type shredding process, to define

a cut length for the strands or strips of aerosol-generating material, in addition to a cut width. The cut length of the shredded aerosol-generating material is preferably at least 5 mm, for instance at least 10 mm, or at least 20 mm. The cut length of the shredded aerosol-generating material can be less than 60 mm, less than 50 mm, or less than 40 mm.

[0129] In some embodiments, a plurality of strands or strips of aerosol-generating material is provided and at least one of the plurality of strands or strips of aerosol-generating material has a length greater than about 10 mm. At least one of the plurality of strands or strips of aerosol-generating material can alternatively or in addition have a length between about 10 mm and about 60 mm, or between about 20 mm and about 50 mm. Each of the plurality of strands or strips of aerosol-generating material can have a length between about 10 mm and about 60 mm, or between about 20 mm and about 50 mm.

[0130] The sheet or shredded sheet of aerosol-generating material has a thickness of at least about 100 μm . The sheet or the shredded sheet may have a thickness of at least about 120 μm , 140 μm , 160 μm , 180 μm or 200 μm . In some embodiments, the sheet or shredded sheet has a thickness of from about 150 μm to about 300 μm , from about 151 μm to about 299 μm , from about 152 μm to about 298 μm , from about 153 μm to about 297 μm , from about 154 μm to about 296 μm , from about 155 μm to about 295 μm , from about 156 μm to about 294 μm , from about 157 μm to about 293 μm , from about 158 μm to about 292 μm , from about 159 μm to about 291 μm or from about 160 μm to about 290 μm . In some embodiments, the sheet or shredded sheet has a thickness of from about 170 μm to about 280 μm , from about 180 to about 270 μm , from about 190 to about 260 μm , from about 200 μm to about 250 μm or from about 210 μm to about 240 μm .

[0131] The thickness of the sheet or shredded sheet may vary between the first and second surfaces. In some embodiments, an individual strip or piece of the aerosol-generating material has a minimum thickness over its area of about 100 μm . In some cases, an individual strip or piece of the aerosol-generating material has a minimum thickness over its area of about 0.05 mm or about 0.1 mm. In some cases, an individual strip, strand or piece of the aerosol-generating material has a maximum thickness over its area of about 1.0 mm. In some cases, an individual strip or piece of the aerosol-generating material has a maximum thickness over its area of about 0.5 mm or about 0.3 mm.

[0132] The thickness of the sheet can be determined using ISO 534:2011 "Paper and Board-Determination of Thickness".

[0133] If the sheet or shredded sheet of aerosol-generating material is too thick, then heating efficiency can be compromised. This can adversely affect power consumption in use, for instance the power consumption for release of flavor from the aerosol-generating material. Conversely, if the aerosol-generating material is too thin, it can be difficult to manufacture and handle; a very thin material can be harder to cast and may be fragile, compromising aerosol formation in use.

[0134] It is postulated that if the sheet or shredded sheet of aerosol-generating material is too thin (e.g. less than 100 μm), then it may be necessary to increase the cut width of the shredded sheet to achieve sufficient packing of the aerosol-generating material when it is incorporated into the article.

As discussed previously, increasing the cut width of the shredded sheet can increase the pressure drop, which is undesirable.

[0135] It has been postulated that a sheet or shredded sheet having a thickness of at least about 100 μm , along with an area density of from about 100 g/m^2 to about 250 g/m^2 is less liable to tear, split or become otherwise deformed during its manufacture. A thickness of at least about 100 μm may have a positive effect on the overall structural integrity and strength of sheet or shredded sheet. For example, it may have a good tensile strength and thus be relatively easy to process.

[0136] The thickness of the sheet or shredded sheet is also thought to have a bearing on its area density. That is to say, increasing the thickness of the sheet or shredded sheet may increase the area density of the sheet or shredded sheet.

[0137] Conversely, decreasing the thickness of the sheet or shredded sheet may decrease the area density of the sheet or shredded sheet. For the avoidance of doubt, where reference is made herein to area density, this refers to an average area density calculated for a given strip, strand, piece or sheet of the aerosol-generating material, the area density calculated by measuring the surface area and weight of the given strip, strand, piece or sheet of aerosol-generating material.

[0138] The sheet or shredded sheet of aerosol-generating material has an area density of from about 100 g/m^2 to about 250 g/m^2 . The sheet or shredded sheet may have an area density of from about 110 g/m^2 to about 240 g/m^2 , from about 120 g/m^2 to about 230 g/m^2 , from about 130 g/m^2 to about 220 g/m^2 or from about 140 g/m^2 to about 210 g/m^2 . In some embodiments, the sheet or shredded sheet has an area density of from about 130 g/m^2 to about 190 g/m^2 , from about 140 g/m^2 to about 180 g/m^2 , from about 150 g/m^2 to about 170 g/m^2 . In a preferred embodiment, the sheet or shredded sheet has an area density of about 160 g/m^2 .

[0139] The area density of about 100 g/m^2 to about 250 g/m^2 is thought to contribute to the strength and flexibility of sheet or shredded sheet. A rod comprising a shredded sheet of aerosol-generating material having an area density of around 180 gsm and a minimum thickness of 220-230 μm can be packed such that the aerosol-generating material stays in place within the rod while maintaining a desired weight of tobacco material within the rod (e.g. around 300 mg) and delivering acceptable organoleptic properties (e.g. taste and smell) when heated in a non-combustible aerosol provision device.

[0140] The flexibility of the sheet or shredded sheet is considered to be dependent, at least in part, upon the thickness and area density of the sheet or shredded sheet. A thicker sheet or shredded sheet may be less flexible than a thinner sheet or shredded sheet. Also, the greater the area density of the sheet, the less flexible the sheet or shredded sheet is. It is thought that the combined thickness and area density of the aerosol-generating material described herein provides a sheet or shredded sheet that is relatively flexible. When the aerosol-generating material is incorporated into an article for use in a non-combustible aerosol-provision device, this flexibility, may give rise to various advantages. For example, the strands or strips are able to readily deform and flex when an aerosol generator is inserted into the aerosol generating material, thus facilitating insertion of an aerosol generator (e.g. a heater) into the material and also improving retention of the aerosol generator by the aerosol-generating material.

[0141] The area density of the sheet or shredded sheet of aerosol-generating material influences the roughness of the first and second surfaces of the sheet or shredded sheet. By changing the area density, the roughness of the first and/or second surfaces can be tailored.

[0142] The average volume density of the sheet or shredded sheet of aerosol-generating material may be calculated from the thickness of the sheet and the area density of the sheet. The average volume density may be greater than about 0.2 g/cm³, about 0.3 g/cm³ or about 0.4 g/cm³. In some embodiments, the average volume density is from about 0.2 g/cm³ to about 1 g/cm³, from about 0.3 g/cm³ to about 0.9 g/cm³, from about 0.4 g/cm³ to about 0.9 g/cm³, from about 0.5 g/cm³ to about 0.9 g/cm³ or from about 0.6 g/cm³ to about 0.9 g/cm³.

[0143] According to an aspect of the disclosure, there is provided an aerosol-generating material comprising a sheet or shredded sheet of aerosol-generating material comprising plant-based material, such as tobacco material, an aerosol-former material and a binder, wherein the sheet or shredded sheet has a density of greater than about 0.4 g/cm³. In some embodiments, the density is from about 0.4 g/cm³ to about 2.9 g/cm³, from about 0.4 g/cm³ to about 1 g/cm³, from about 0.6 g/cm³ to about 1.6 g/cm³ or from about 1.6 g/cm³ to about 2.9 g/cm³.

[0144] The sheet or shredded sheet may have a tensile strength of at least 4 N/15 mm. Where the sheet or shredded sheet has a tensile strength below 4 N/15 mm, the sheet or shredded sheet is likely to tear, break or otherwise deform during its manufacture and/or subsequent incorporation into an article for use in a non-combustible aerosol provision system. Tensile strength may be measured using ISO 1924:2008.

[0145] The aerosol-generating material comprises a plant-based material, such as tobacco material. The sheet or shredded sheet of aerosol-generating material comprises a plant-based material, such as tobacco material.

[0146] The plant-based material may be a particulate or granular material. In some embodiments, the tobacco material is a powder. Alternatively or in addition, the plant-based material may comprise strips, strands or fibers of tobacco. For example, the tobacco material may comprise particles, granules, fibers, strips and/or strands of tobacco. In some embodiments, the tobacco material consists of particles or granules of tobacco material.

[0147] The density of the tobacco material has an impact on the speed at which heat conducts through the material, with lower densities, for instance those below 900 mg/cc, conducting heat more slowly through the material, and therefore enabling a more sustained release of aerosol.

[0148] The tobacco material can comprise reconstituted tobacco material having a density of less than about 900 mg/cc, for instance paper reconstituted tobacco material. For instance, the aerosol-generating material comprises reconstituted tobacco material having a density of less than about 800 mg/cc. Alternatively or in addition, the aerosol-generating material can comprise reconstituted tobacco material having a density of at least 350 mg/cc.

[0149] The reconstituted tobacco material can be provided in the form of a shredded sheet. The sheet of reconstituted tobacco material may have any suitable thickness. The reconstituted tobacco material may have a thickness of at least about 0.145 mm, for instance at least about 0.15 mm, or at least about 0.16 mm. The reconstituted tobacco mate-

rial may have a maximum thickness of about 0.30 mm or 0.25 mm, for instance the thickness of the reconstituted tobacco material may be less than about 0.22 mm, or less than about 0.2 mm. In some embodiments, the reconstituted tobacco material may have an average thickness in the range 0.175 mm to 0.195 mm.

[0150] In some embodiments, the tobacco is a particulate tobacco material. Each particle of the particulate tobacco material may have a maximum dimension. As used herein, the term "maximum dimension" refers to the longest straight line distance from any point on the surface of a particle of tobacco, or on a particle surface, to any other surface point on the same particle of tobacco, or particle surface. The maximum dimension of a particle of particulate tobacco material may be measured using scanning electron microscopy (SEM).

[0151] The maximum dimension of each particle of tobacco material can be up to about 200 µm. In some embodiments, the maximum dimension of each particle of tobacco material is up to about 150 µm.

[0152] A population of particles of the tobacco material may have a particle size distribution (D90) of at least about 100 µm. In some embodiments, a population of particles of the tobacco material has a particle size distribution (D90) of about 110 µm, at least about 120 µm, at least about 130 µm, at least about 140 µm or at least about 150 µm. In an embodiment, a population of particles of the tobacco material has a particle size distribution (D90) of about 150 µm. Sieve analysis can also be used to determine the particle size distribution of the particles of tobacco material.

[0153] A particle size distribution (D90) of at least about 100 µm is thought to contribute to the tensile strength of the sheet or shredded sheet of aerosol-generating material.

[0154] A particle size distribution (D90) of less than 100 µm can provide a sheet or shredded sheet of aerosol-generating material having good tensile strength. However, the inclusion of such fine particles of tobacco material in the sheet or shredded sheet can increase its density. When the sheet or shredded sheet is incorporated into an article for use in a non-combustible aerosol provision system, this higher density may decrease the fill-value of the tobacco material. Advantageously, a balance between a satisfactory tensile strength and suitable density (and thus fill-value) may be achieved where the particle size distribution (D90) is at least about 100 µm.

[0155] The particle size of the particulate tobacco material can also influence the roughness of the sheet or shredded sheet of aerosol generating material. It is postulated that forming the sheet or shredded sheet of aerosol-generating material by incorporating relatively large particles of tobacco material decreases the density of the sheet or shredded sheet of aerosol generating material.

[0156] The tobacco material may comprise tobacco obtained from any part of the tobacco plant. In some embodiments, the tobacco material comprises tobacco leaf.

[0157] The sheet or shredded sheet can comprise from 5% to about 90% by weight tobacco leaf.

[0158] The tobacco material may comprise lamina tobacco and/or tobacco stem, such as midrib stem. The lamina tobacco can be present in an amount of from 0% to about 100%, from about 20% to about 100%, from about 40% to about 100%, from about 40% to about 95%, from about 45% to about 90%, from about 50% to about 85% or from about 55% to about 80% by weight of the sheet or

shredded sheet and/or tobacco material. In some embodiments, tobacco material consists or consists essentially of lamina tobacco material.

[0159] The tobacco material may comprise tobacco stem in an amount of from 0% to about 100%, from about 0% to about 50%, from about 0 to about 25%, from about 0 to about 20%, from about 5 to about 15% by weight of the sheet or shredded sheet.

[0160] In some embodiments, the tobacco material comprises a combination of lamina and tobacco stem. In some embodiments, the tobacco material can comprise lamina in an amount of from about 40% to about 95% and stem in an amount of from about 5% to about 60%, or lamina in an amount of from about 60% to about 95% and stem in an amount of from about 5% to about 40%, or lamina in an amount of from about 80% to about 95% and stem in an amount of from about 5% to about 20% by weight of the sheet or shredded sheet of aerosol-generating material.

[0161] The incorporation of stem may decrease the tackiness of the aerosol-generating material. Incorporating tobacco material comprising stem tobacco into the aerosol-generating material may increase its burst strength.

[0162] The sheet or the shredded sheet of aerosol-generating material may have a burst strength of at least about 75 g, at least about 100 g or at least about 200 g.

[0163] If the burst strength is too low the sheet or shredded sheet may be relatively brittle. As a consequence, breakages in the sheet or shredded sheet may occur during the process of manufacturing the aerosol-generating material. For example, when the sheet is shredded to form a shredded sheet by a cutting process, the sheet may shatter or break into pieces or shards when cut.

[0164] The tobacco material described herein contains nicotine. The nicotine content is from 0.1 to 3% by weight of the tobacco material, and may be, for example, from 0.5 to 2.5% by weight of the tobacco material. Additionally or alternatively, the tobacco material contains between 10% and 90% by weight tobacco leaf having a nicotine content of greater than about 1% or about 1.5% by weight of the tobacco leaf. The tobacco leaf, for instance cut rag tobacco, can, for instance, have a nicotine content of between 1% and 5% by weight of the tobacco leaf.

[0165] The sheet or shredded sheet of aerosol-generating material may comprise nicotine in an amount of between about 0.1% to about 3% by weight of the sheet or shredded sheet.

[0166] Paper reconstituted tobacco may also be present in the aerosol-generating material described herein. Paper reconstituted tobacco refers to tobacco material formed by a process in which tobacco feedstock is extracted with a solvent to afford an extract of solubles and a residue comprising fibrous material, and then the extract (usually after concentration, and optionally after further processing) is recombined with fibrous material from the residue (usually after refining of the fibrous material, and optionally with the addition of a portion of non-tobacco fibers) by deposition of the extract onto the fibrous material. The process of recombination resembles the process for making paper.

[0167] The paper reconstituted tobacco may be any type of paper reconstituted tobacco that is known in the art. In a particular embodiment, the paper reconstituted tobacco is made from a feedstock comprising one or more of tobacco strips, tobacco stems, and whole leaf tobacco. In a further embodiment, the paper reconstituted tobacco is made from

a feedstock consisting of tobacco strips and/or whole leaf tobacco, and tobacco stems. However, in other embodiments, scraps, fines and winnowings can alternatively or additionally be employed in the feedstock.

[0168] The paper reconstituted tobacco for use in the tobacco material described herein may be prepared by methods which are known to those skilled in the art for preparing paper reconstituted tobacco.

[0169] In embodiments, the paper reconstituted tobacco is present in an amount of from 5% to 90% by weight, 10% to 80% by weight, or 20% to 70% by weight, of the aerosol-generating material.

[0170] The aerosol-generating material comprises an aerosol-former material. The aerosol-former material comprises one or more constituents capable of forming an aerosol. The aerosol-former material comprises one or more of glycerine, glycerol, propylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, 1,3-butylene glycol, erythritol, meso-Erythritol, ethyl vanillate, ethyl laurate, a diethyl suberate, triethyl citrate, triacetin, a diacetin mixture, benzyl benzoate, benzyl phenyl acetate, tributyrin, lauryl acetate, lauric acid, myristic acid, and propylene carbonate. Preferably, the aerosol-former material is glycerol or propylene glycol.

[0171] The sheet or shredded sheet of aerosol-generating material comprises an aerosol-former material. The aerosol-former material is provided in an amount of up to about 50% on a dry weight base by weight of the sheet or shredded sheet. In some embodiments, the aerosol former material is provided in an amount of from about 5% to about 40% on a dry weight base by weight of the sheet or shredded sheet, from about 10% to about 30% on a dry weight base by weight of the sheet or shredded sheet or from about 10% to about 20% on a dry weight base by weight of the sheet or shredded sheet.

[0172] The sheet or shredded sheet may also comprise water. The sheet or shredded sheet of aerosol-generating material may comprise water in an amount of less than about 15%, less than about 10% or less than about 5% by weight of the aerosol-generating material. In some embodiments, the aerosol-generating material comprises water in an amount of between about 0% and about 15% or between about 5% and about 15% by weight of the aerosol-generating material.

[0173] The sheet or shredded sheet of aerosol-generating material may comprise water and an aerosol-former material, in a total amount, of less than about 30% by weight of the sheet or shredded sheet of aerosol-generating material or less than about 25% by weight of the sheet or shredded sheet of aerosol-generating material. It is thought that incorporating water and aerosol-former material in the sheet or shredded sheet of aerosol-generating material in an amount of less than about 30% by weight of the sheet or shredded sheet of aerosol-generating material may advantageously reduce the tackiness of the sheet. This may improve the ease by which the aerosol-generating material can be handled during processing. For example, it may be easier to roll a sheet of aerosol-generating material to form a bobbin of material and then unroll the bobbin without the layers of sheet sticking together. Reducing the tackiness may also decrease the propensity for strands or strips of shredded material to clump or stick together, thus further improving processing efficiency and the quality of the final product.

[0174] The sheet or shredded sheet comprises a binder. The binder is arranged to bind the components of the aerosol-generating material to form the sheet or shredded sheet. The binder may at least partially coat the surface of the tobacco material. Where the tobacco material is in a particulate form, the binder may at least partially coat the surface of the particles of tobacco and bind them together.

[0175] The binder may be selected from one or more compounds selected from the group comprising alginates, pectins, starches (and derivatives), celluloses (and derivatives), gums, silica or silicones compounds, clays, polyvinyl alcohol and combinations thereof. For example, in some embodiments, the binder comprises one or more of alginates, pectins, hydroxyethyl cellulose, hydroxypropyl cellulose, carboxymethylcellulose, pullulan, xanthan gum, guar gum, carrageenan, agarose, acacia gum, fumed silica, PDMS, sodium silicate, kaolin and polyvinyl alcohol. In some cases, the binder comprises alginate and/or pectin or carrageenan. In a preferred embodiment, the binder comprises guar gum.

[0176] The binder may be present in an amount of from about 1 to about 20% by weight of the sheet or shredded sheet, or in an amount of from 1 to about 10% by weight of the sheet or shredded sheet of aerosol-generating material. For example, the binder may be present in an amount of about 1%, 2%, 3%, 4%, 5%, 6%, 7%, 8%, 9% or 10% by weight of the sheet or shredded sheet of aerosol-generating material.

[0177] The aerosol-generating material may comprise a filler. In some embodiments, the sheet or shredded sheet comprises the filler. The filler is generally a non-tobacco component, that is, a component that does not include ingredients originating from tobacco. The filler may comprise one or more inorganic filler materials, such as calcium carbonate, perlite, vermiculite, diatomaceous earth, colloidal silica, magnesium oxide, magnesium sulphate, magnesium carbonate, and suitable inorganic sorbents, such as molecular sieves. The filler may be a non-tobacco fiber such as wood fiber or pulp or wheat fiber. The filler can be a material comprising cellulose or a material comprises a derivative of cellulose. The filler component may also be a non-tobacco cast material or a non-tobacco extruded material.

[0178] In particular embodiments which include filler, the filler is fibrous. For example, the filler may be a fibrous organic filler material such as wood, wood pulp, hemp fiber, cellulose or cellulose derivatives. Without wishing to be bound by theory, it is believed that including fibrous filler may increase the tensile strength of the material.

[0179] The filler may also contribute to the texture of the sheet or shredded sheet of the aerosol-generating material. For example, a fibrous filler, such as wood or wood pulp, may provide a sheet or shredded sheet of aerosol-generating material having relatively rough first and second surfaces. Conversely, a non-fibrous, particulate filler, such as powdered chalk, may provide a sheet or shredded sheet of aerosol-generating material having relatively smooth first and second surfaces. In some embodiments, the aerosol-generating material comprises a combination of different filler materials.

[0180] The filler component may be present in an amount of 0 to 20% by weight of the sheet or shredded sheet, or in an amount of from 1 to 10% by weight of the sheet or shredded sheet. In some embodiments, the filler component is absent.

[0181] The filler may help to improve the general structural properties of the aerosol-generating material, such as its tensile strength and burst strength.

[0182] In the compositions described herein, where amounts are given in % by weight, for the avoidance of doubt this refers to a dry weight basis, unless specifically indicated to the contrary. Thus, any water that may be present in the aerosol-generating material, or in any component thereof, is entirely disregarded for the purposes of the determination of the weight %. The water content of the aerosol-generating material described herein may vary and may be, for example, from 5 to 15% by weight. The water content of the aerosol-generating material described herein may vary according to, for example, the temperature, pressure and humidity conditions at which the compositions are maintained. The water content can be determined by Karl-Fisher analysis, as known to those skilled in the art. On the other hand, for the avoidance of doubt, even when the aerosol-former material is a component that is in liquid phase, such as glycerol or propylene glycol, any component other than water is included in the weight of the aerosol-generating material. However, when the aerosol-former material is provided in the tobacco component of the aerosol-generating material, or in the filler component (if present) of the aerosol-generating material, instead of or in addition to being added separately to the aerosol-generating material, the aerosol-former material is not included in the weight of the tobacco component or filler component, but is included in the weight of the “aerosol-former material” in the weight % as defined herein. All other ingredients present in the tobacco component are included in the weight of the tobacco component, even if of non-tobacco origin (for example non-tobacco fibers in the case of paper reconstituted tobacco).

[0183] The aerosol-generating material herein can comprise an aerosol-modifying agent, such as any of the flavors described herein. In one embodiment, the aerosol-generating material comprises menthol. When the aerosol-generating material is incorporated into an article for use in an aerosol-provision system, the article may be referred to as a mentholated article. The aerosol-generating material can comprise from 0.5 mg to 20 mg of menthol, from 0.7 mg to 20 mg of menthol, between 1 mg and 18 mg or between 8 mg and 16 mg of menthol. In the present example, the aerosol-generating material comprises 16 mg of menthol. The aerosol-generating material can comprise between 1% and 8% by weight of menthol, preferably between 3% and 7% by weight of menthol and more preferably between 4% and 5.5% by weight of menthol. In one embodiment, the aerosol-generating material comprises 4.7% by weight of menthol. Such high levels of menthol loading can be achieved using a high percentage of reconstituted tobacco material, for instance greater than 50% of the tobacco material by weight. Alternatively or additionally, the use of a high volume of, for instance tobacco material, can increase the level of menthol loading that can be achieved, for instance where greater than about 500 mm³ or suitably more than about 1000 mm³ of aerosol-generating material, such as tobacco material, are used.

[0184] In some embodiments, the composition comprises an aerosol-forming “amorphous solid”, which may alternatively be referred to as a “monolithic solid” (i.e. non-fibrous). In some embodiments, the amorphous solid may

comprise a dried gel. The amorphous solid is a solid material that may retain some fluid, such as liquid, within it.

[0185] In some examples, the amorphous solid comprises:

[0186] 1-60 wt % of a gelling agent;

[0187] 0.1-50 wt % of an aerosol-former material; and

[0188] 0.1-80 wt % of a flavor;

[0189] wherein these weights are calculated on a dry weight basis.

[0190] In some further embodiments, the amorphous solid comprises:

[0191] 1-50 wt % of a gelling agent;

[0192] 0.1-50 wt % of an aerosol-former material; and

[0193] 30-60 wt % of a flavor;

[0194] wherein these weights are calculated on a dry weight basis.

[0195] The amorphous solid material may be provided in sheet or in shredded sheet form. The amorphous solid material may take the same form as the sheet or shredded sheet of aerosol-generating material described previously.

[0196] Suitably, the amorphous solid may comprise from about 1 wt %, 5 wt %, 10 wt %, 15 wt %, 20 wt % or 25 wt % to about 60 wt %, 50 wt %, 45 wt %, 40 wt % or 35 wt % of a gelling agent (all calculated on a dry weight basis). For example, the amorphous solid may comprise 1-50 wt %, 5-45 wt %, 10-40 wt % or 20-35 wt % of a gelling agent. In some embodiments, the gelling agent comprises a hydrocolloid. In some embodiments, the gelling agent comprises one or more compounds selected from the group comprising alginates, pectins, starches (and derivatives), celluloses (and derivatives), gums, silica or silicones compounds, clays, polyvinyl alcohol and combinations thereof. For example, in some embodiments, the gelling agent comprises one or more of alginates, pectins, hydroxyethyl cellulose, hydroxypropyl cellulose, carboxymethylcellulose, pullulan, xanthan gum, guar gum, carrageenan, agarose, acacia gum, fumed silica, PDMS, sodium silicate, kaolin and polyvinyl alcohol. In some cases, the gelling agent comprises alginate and/or pectin, and may be combined with a setting agent (such as a calcium source) during formation of the amorphous solid. In some cases, the amorphous solid may comprise a calcium-crosslinked alginate and/or a calcium-crosslinked pectin.

[0197] In some embodiments, the gelling agent comprises alginate, and the alginate is present in the amorphous solid in an amount of from 10-30 wt % of the amorphous solid (calculated on a dry weight basis). In some embodiments, alginate is the only gelling agent present in the amorphous solid. In other embodiments, the gelling agent comprises alginate and at least one further gelling agent, such as pectin.

[0198] In some embodiments the amorphous solid may include gelling agent comprising carrageenan.

[0199] Suitably, the amorphous solid may comprise from about 0.1 wt %, 0.5 wt %, 1 wt %, 3 wt %, 5 wt %, 7 wt % or 10% to about 50 wt %, 45 wt %, 40 wt %, 35 wt %, 30 wt % or 25 wt % of an aerosol-former material (all calculated on a dry weight basis). The aerosol-former material may act as a plasticizer. For example, the amorphous solid may comprise 0.5-40 wt %, 3-35 wt % or 10-25 wt % of an aerosol-former material. In some cases, the aerosol-former material comprises one or more compound selected from erythritol, propylene glycol, glycerol, triacetin, sorbitol and xylitol. In some cases, the aerosol-former material comprises, consists essentially of or consists of glycerol.

[0200] The amorphous solid comprises a flavor. Suitably, the amorphous solid may comprise up to about 80 wt %, 70 wt %, 60 wt %, 55 wt %, 50 wt % or 45 wt % of a flavor.

[0201] In some cases, the amorphous solid may comprise at least about 0.1 wt %, 1 wt %, 10 wt %, 20 wt %, 30 wt %, 35 wt % or 40 wt % of a flavor (all calculated on a dry weight basis).

[0202] For example, the amorphous solid may comprise 1-80 wt %, 10-80 wt %, 20-70 wt %, 30-60 wt %, 35-55 wt % or 30-45 wt % of a flavor. In some cases, the flavor comprises, consists essentially of or consists of menthol.

[0203] In some cases, the amorphous solid may additionally comprise an emulsifying agent, which emulsified molten flavor during manufacture. For example, the amorphous solid may comprise from about 5 wt % to about 15 wt % of an emulsifying agent (calculated on a dry weight basis), suitably about 10 wt %. The emulsifying agent may comprise acacia gum.

[0204] In some embodiments, the amorphous solid is a hydrogel and comprises less than about 20 wt % of water calculated on a wet weight basis. In some cases, the hydrogel may comprise less than about 15 wt %, 12 wt % or 10 wt % of water calculated on a wet weight basis. In some cases, the hydrogel may comprise at least about 1 wt %, 2 wt % or at least about 5 wt % of water (WWB).

[0205] In some embodiments, the amorphous solid additionally comprises an active substance. For example, in some cases, the amorphous solid additionally comprises a tobacco material and/or nicotine. In some cases, the amorphous solid may comprise 5-60 wt % (calculated on a dry weight basis) of a tobacco material and/or nicotine. In some cases, the amorphous solid may comprise from about 1 wt %, 5 wt %, 10 wt %, 15 wt %, 20 wt % or 25 wt % to about 70 wt %, 60 wt %, 50 wt %, 45 wt %, 40 wt %, 35 wt %, or 30 wt % (calculated on a dry weight basis) of an active substance. In some cases, the amorphous solid may comprise from about 1 wt %, 5 wt %, 10 wt %, 15 wt %, 20 wt % or 25 wt % to about 70 wt %, 60 wt %, 50 wt %, 45 wt %, 40 wt %, 35 wt %, or 30 wt % (calculated on a dry weight basis) of a tobacco material. For example, the amorphous solid may comprise 10-50 wt %, 15-40 wt % or 20-35 wt % of a tobacco material. In some cases, the amorphous solid may comprise from about 1 wt %, 2 wt %, 3 wt % or 4 wt % to about 20 wt %, 18 wt %, 15 wt % or 12 wt % (calculated on a dry weight basis) of nicotine. For example, the amorphous solid may comprise 1-20 wt %, 2-18 wt % or 3-12 wt % of nicotine.

[0206] In some cases, the amorphous solid comprises an active substance such as tobacco extract. In some cases, the amorphous solid may comprise 5-60 wt % (calculated on a dry weight basis) of tobacco extract. In some cases, the amorphous solid may comprise from about 5 wt %, 10 wt %, 15 wt %, 20 wt % or 25 wt % to about 60 wt %, 50 wt %, 45 wt %, 40 wt %, 35 wt %, or 30 wt % (calculated on a dry weight basis) tobacco extract. For example, the amorphous solid may comprise 10-50 wt %, 15-40 wt % or 20-35 wt % of tobacco extract. The tobacco extract may contain nicotine at a concentration such that the amorphous solid comprises 1 wt % 1.5 wt %, 2 wt % or 2.5 wt % to about 6 wt %, 5 wt %, 4.5 wt % or 4 wt % (calculated on a dry weight basis) of nicotine.

[0207] In some cases, there may be no nicotine in the amorphous solid other than that which results from the tobacco extract.

[0208] In some embodiments the amorphous solid comprises no tobacco material but does comprise nicotine. In some such cases, the amorphous solid may comprise from about 1 wt %, 2 wt %, 3 wt % or 4 wt % to about 20 wt %, 18 wt %, 15 wt % or 12 wt % (calculated on a dry weight basis) of nicotine. For example, the amorphous solid may comprise 1-20 wt %, 2-18 wt % or 3-12 wt % of nicotine.

[0209] In some cases, the total content of active substance and/or flavor may be at least about 0.1 wt %, 1 wt %, 5 wt %, 10 wt %, 20 wt %, 25 wt % or 30 wt %. In some cases, the total content of active substance and/or flavor may be less than about 90 wt %, 80 wt %, 70 wt %, 60 wt %, 50 wt % or 40 wt % (all calculated on a dry weight basis).

[0210] In some cases, the total content of tobacco material, nicotine and flavor may be at least about 0.1 wt %, 1 wt %, 5 wt %, 10 wt %, 20 wt %, 25 wt % or 30 wt %. In some cases, the total content of active substance and/or flavor may be less than about 90 wt %, 80 wt %, 70 wt %, 60 wt %, 50 wt % or 40 wt % (all calculated on a dry weight basis).

[0211] The amorphous solid may be made from a gel, and this gel may additionally comprise a solvent, included at 0.1-50 wt %. However, the inclusion of a solvent in which the flavor is soluble may reduce the gel stability and the flavor may crystallize out of the gel. As such, in some cases, the gel does not include a solvent in which the flavor is soluble.

[0212] In some embodiments, the amorphous solid comprises less than 60 wt % of a filler, such as from 1 wt % to 60 wt %, or 5 wt % to 50 wt %, or 5 wt % to 30 wt %, or 10 wt % to 20 wt %.

[0213] In other embodiments, the amorphous solid comprises less than 20 wt %, suitably less than 10 wt % or less than 5 wt % of a filler. In some cases, the amorphous solid comprises less than 1 wt % of a filler, and in some cases, comprises no filler.

[0214] The filler, if present, may comprise one or more inorganic filler materials, such as calcium carbonate, perlite, vermiculite, diatomaceous earth, colloidal silica, magnesium oxide, magnesium sulphate, magnesium carbonate, and suitable inorganic sorbents, such as molecular sieves. The filler may comprise one or more organic filler materials such as wood pulp, cellulose and cellulose derivatives. In particular cases, the amorphous solid comprises no calcium carbonate such as chalk.

[0215] In particular embodiments which include filler, the filler is fibrous. For example, the filler may be a fibrous organic filler material such as wood pulp, hemp fiber, cellulose or cellulose derivatives. Without wishing to be bound by theory, it is believed that including fibrous filler in an amorphous solid may increase the tensile strength of the material.

[0216] In some embodiments, the amorphous solid does not comprise tobacco fibers.

[0217] In some examples, the amorphous solid in sheet form may have a tensile strength of from around 200 N/m to around 1500 N/m. In some examples, such as where the amorphous solid does not comprise a filler, the amorphous solid may have a tensile strength of from 200 N/m to 400 N/m, or 200 N/m to 300 N/m, or about 250 N/m. Such tensile strengths may be particularly suitable for embodiments wherein the amorphous solid material is formed as a sheet and then shredded and incorporated into an aerosol-generating article.

[0218] In some examples, such as where the amorphous solid comprises a filler, the amorphous solid may have a tensile strength of from 600 N/m to 1500 N/m, or from 700 N/m to 900 N/m, or around 800 N/m. Such tensile strengths may be particularly suitable for embodiments wherein the amorphous solid material is included in an aerosol-generating article as a rolled sheet, suitably in the form of a tube.

[0219] In some cases, the amorphous solid may consist essentially of, or consist of a gelling agent, water, an aerosol-former material, a flavor, and optionally an active substance.

[0220] In some cases, the amorphous solid may consist essentially of, or consist of a gelling agent, water, an aerosol-former material, a flavor, and optionally a tobacco material and/or a nicotine source.

[0221] The amorphous solid may comprise one or more active substances and/or flavors, one or more aerosol-former materials, and optionally one or more other functional material.

[0222] The aerosol-generating material can comprise a paper reconstituted tobacco material. The composition can alternatively or additionally comprise any of the forms of tobacco described herein. The aerosol generating material can comprise a sheet or shredded sheet comprising tobacco material comprising between 10% and 90% by weight tobacco leaf, wherein an aerosol-former material is provided in an amount of up to about 20% by weight of the sheet or shredded sheet, and the remainder of the tobacco material comprises paper reconstituted tobacco.

[0223] Where the aerosol-generating material comprises an amorphous solid material, the amorphous solid material may be a dried gel comprising menthol. In alternative embodiments, the amorphous solid may have any composition as described herein.

[0224] An improved article may be produced comprising aerosol-generating material comprising a first component comprising a sheet or shredded sheet of aerosol-generating material and a second component comprising amorphous solid, wherein the material properties (e.g. density) and specification (e.g. thickness, length, and cut width) fall within the ranges set out herein.

[0225] In some cases, the amorphous solid may have a thickness of about 0.015 mm to about 1.0 mm. Suitably, the thickness may be in the range of about 0.05 mm, 0.1 mm or 0.15 mm to about 0.5 mm or 0.3 mm. A material having a thickness of about 0.09 mm can be used. The amorphous solid may comprise more than one layer, and the thickness described herein refers to the aggregate thickness of those layers.

[0226] The thickness of the amorphous solid material may be measured using a calliper or a microscope such as a scanning electron microscope (SEM), as known to those skilled in the art, or any other suitable technique known to those skilled in the art.

[0227] If the amorphous solid is too thick, then heating efficiency can be compromised. This can adversely affect power consumption in use, for instance the power consumption for release of flavor from the amorphous solid. Conversely, if the aerosol-forming amorphous solid is too thin, it can be difficult to manufacture and handle; a very thin material can be harder to cast and may be fragile, compromising aerosol formation in use. In some cases, an individual strip or piece of the amorphous solid has a minimum thickness over its area of about 0.015. In some cases, an

individual strip or piece of the amorphous solid has a minimum thickness over its area of about 0.05 mm or about 0.1 mm. In some cases, an individual strip or piece of the amorphous solid has a maximum thickness over its area of about 1.0 mm. In some cases, an individual strip or piece of the amorphous solid has a maximum thickness over its area of about 0.5 mm or about 0.3 mm.

[0228] In some cases, the amorphous solid thickness may vary by no more than 25%, 20%, 15%, 10%, 5% or 1% across its area.

[0229] Providing amorphous solid material and sheet or shredded sheet of aerosol-generating material having area density values that differ from each other by less than a given percentage results in less separation in a mixture of these materials. In some examples, the area density of the amorphous solid material may be between 50% and 150% of the area density of the aerosol-generating material. For instance, the area density of the amorphous solid material may be between 60% and 140% of the density of the aerosol-generating material, or between 70% and 110% of the area density of the aerosol-generating material, or between 80% and 120% of the area density of the aerosol-generating material.

[0230] In embodiments described herein, the amorphous solid material may be incorporated into the article in sheet form. The amorphous solid material in sheet form may be shredded and then incorporated into the article, suitably mixed into with an aerosol-generating material, such as the sheet or shredded sheet of aerosol-generating material described herein.

[0231] In further embodiments the amorphous solid sheet may additionally be incorporated as a planar sheet, as a gathered or bunched sheet, as a crimped sheet, or as a rolled sheet (i.e. in the form of a tube). In some such cases, the amorphous solid of these embodiments may be included in an aerosol-generating article as a sheet, such as a sheet circumscribing a rod comprising aerosol-generating material. For example, the amorphous solid sheet may be formed on a wrapping paper which circumscribes an aerosol-generating material such as tobacco.

[0232] The amorphous solid in sheet form may have any suitable area density, such as from about 30 g/m² to about 150 g/m². In some cases, the sheet may have a mass per unit area of about 55 g/m² to about 135 g/m², or about 80 to about 120 g/m², or from about 70 to about 110 g/m², or particularly from about 90 to about 110 g/m², or suitably about 100 g/m². These ranges can provide a density which is similar to the density of cut rag tobacco and as a result a mixture of these substances can be provided which will not readily separate. Such area densities may be particularly suitable where the amorphous solid material is included in an aerosol-generating article as a shredded sheet (described further hereinbelow). In some cases, the sheet may have a mass per unit area of about 30 to 70 g/m², 40 to 60 g/m², or 25 to 60 g/m² and may be used to wrap an aerosol-generating material, such as the aerosol-generating material described herein.

[0233] The aerosol-generating material may comprise a blend of the aerosol-generating material and the amorphous solid material as described herein. Such aerosol-generating material can provide an aerosol, in use, with a desirable flavor profile, since additional flavor may be introduced to the aerosol-generating material by inclusion in the amorphous solid material component. Flavor provided in the amorphous solid material may be more stably retained

within the amorphous solid material compared to flavor added directly to the tobacco material, resulting in a more consistent flavor profile between articles produced according to this disclosure.

[0234] As described above, tobacco material having a density of at least 350 mg/cc and less than about 900 mg/cc, preferably between about 600 mg/cc and about 900 mg/cc, has been advantageously found to result in a more sustained release of aerosol. To provide an aerosol having a consistent flavor profile the amorphous solid material component of the aerosol-generating material should be evenly distributed throughout the rod. This can be achieved by casting the amorphous solid material to have a thickness as described herein, to provide an amorphous solid material having an area density which is similar to the area density of the tobacco material, and processing the amorphous solid material as described hereinbelow to ensure an even distribution throughout the aerosol-generating material.

[0235] As noted above, optionally, the aerosol-generating material comprises a plurality of strips of amorphous solid material. Where the aerosol generating section comprises a plurality of strands and/or strips of the sheet of aerosol-generating material and a plurality of strips of amorphous solid material, the material properties and/or dimensions of the at least two components may be suitably selected in other ways, to ensure a relatively uniform mix of the components is possible, and to reduce separation or un-mixing of the components during or after manufacture of the rod of aerosol-generating material.

[0236] The longitudinal dimension of the plurality of strands or strips may be substantially the same as a length of the aerosol generating section. The plurality of strands and/or strips may have a length of at least about 5 mm.

[0237] The various embodiments described herein are presented only to assist in understanding and teaching the claimed features. These embodiments are provided as a representative sample of embodiments only, and are not exhaustive and/or exclusive. It is to be understood that advantages, embodiments, examples, functions, features, structures, and/or other aspects described herein are not to be considered limitations on the scope of the invention as defined by the claims or limitations on equivalents to the claims, and that other embodiments may be utilized and modifications may be made without departing from the scope of the claimed invention. Various embodiments of the invention may suitably comprise, consist of, or consist essentially of, appropriate combinations of the disclosed elements, components, features, parts, steps, means, etc., other than those specifically described herein. In addition, this disclosure may include other inventions not presently claimed, but which may be claimed in future."

1. A body of aerosol-generating material for use in a non-combustible aerosol provision system, the body comprising aerosol-generating material and a recess or cavity in the aerosol-generating material at least partially bounded by a material layer.

2. A body of aerosol-generating material according to claim 1, wherein the material layer lines an inner surface of the recess or cavity.

3. A body of aerosol-generating material according to claim 1, wherein the aerosol-generating material comprises a first aerosol-generating material and the recess or cavity is at least partially filled with a second aerosol-generating material.

4. A body of aerosol-generating material according to claim 1, wherein the material layer comprises an amorphous solid, and/or a sheet material, and/or wherein the material layer comprises a density of greater than 1.2 grams/cm³.

5. A body of aerosol-generating material according to claim 1, wherein the body comprises a longitudinal axis and the length of the recess or cavity is less than the length of the body along the longitudinal axis.

6. A body of aerosol-generating material according to claim 1, wherein the body comprises a first longitudinal end and a second longitudinal end, and the material layer covers or at least partially covers the first longitudinal end.

7. A body of aerosol-generating material according to claim 6, wherein the material layer comprises a first material layer and further comprising a second material layer which lines an inner surface of the recess or cavity.

8. A body of aerosol-generating material according to claim 1, wherein the body comprises a first longitudinal end and a second longitudinal end, and first and second longitudinal ends are free of the material layer.

9. A body of aerosol-generating material according to claim 1, wherein the material layer, first material layer and/or second material layer substantially prevent the flow of air into the aerosol-generating material through the respective material layer.

10. A body of aerosol-generating material according to claim 9, wherein, the first material layer and/or the second material layer comprises a sealing element comprising at least one of a material having a permeability below 100 Coresta Units, an impervious membrane, a cap, a varnished paper, or a gasket seal.

11. A body of aerosol-generating material according to claim 1, wherein the material layer comprises a body of fibrous material.

12. A body of aerosol-generating material according to claim 11, wherein the material layer comprises a first material layer and further comprising a second material layer covering at least a portion of the first material layer.

13. A body of aerosol-generating material according to claim 11, wherein the body of fibrous material comprises a recess or cavity for receiving a heating element of the non-combustible aerosol provision device.

14. A body of aerosol-generating material according to claim 1, comprising one or more channels extending at least partially or completely through the body.

15. A body of aerosol-generating material according to claim 14, wherein said one or more channels pass longitudinally through the body.

16. A body of aerosol-generating material according to claim 14, wherein said body comprises a longitudinal axis and said one or more channels pass through said body at an angle to the longitudinal axis.

17. A body of aerosol-generating material according to claim 16, wherein said one or more channels form a helix around an outer region of the body.

18. A body of aerosol-generating material according to claim 14, wherein said one or more channels are defined between said aerosol-generating material and a wrapper surrounding the aerosol-generating material.

19. A body of aerosol-generating material according to claim 1, wherein said aerosol-generating material comprises a plant-based material, such as a tobacco material, and/or extruded or molded material.

20. A body of aerosol-generating material for use in a non-combustible aerosol provision system, the body comprising one or more channels extending at least partially or completely through the body.

21. A body of aerosol-generating material according to claim 20, wherein:

said one or more channels pass longitudinally through the body; or

said body comprises a longitudinal axis and said one or more channels pass through said body at an angle to the longitudinal axis; or

wherein said one or more channels form a helix around an outer region of the body; or

wherein said one or more channels are defined between said aerosol-generating material and a wrapper surrounding the aerosol-generating material.

22. An article for use with a non-combustible aerosol provision device, the article comprising a body of aerosol-generating material according to claim 1 and a downstream portion downstream of said body.

23. An article for use with a non-combustible aerosol provision device, the article comprising a body of aerosol-generating material and a downstream portion downstream of the body, the downstream portion comprising a main path for mainstream aerosol emitted from the body of aerosol-generating material and an airflow path arranged laterally of the main path, the airflow path allowing air to flow through the article in a direction opposite to that of mainstream aerosol.

24. An article according to claim 23, wherein:

the airflow path begins at a ventilation area on an outer surface of the article; and/or

the airflow path extends through and/or adjacent to the body of aerosol-generating material; and/or

the airflow path joins the main path for mainstream aerosol.

25. An article according to claim 23, wherein the body of aerosol-generating material comprises a body according to claim 1.

26. A non-combustible aerosol provision system comprising an article according to claim 22 and a non-combustible aerosol provision device.

27. A non-combustible aerosol provision system according to claim 26, wherein said device comprises a heating element arranged to penetrate the material layer in use.

28. A method of forming a body of aerosol-generating material, the method comprising:

providing a body of aerosol-generating material having a recess or cavity in the aerosol-generating material; and

applying a material layer to said aerosol-generating material such that the recess or cavity is at least partially bounded by the material layer.

29. A method according to claim 23, wherein providing the body of aerosol-generating material comprises extruding aerosol-generating material over a die head, and wherein applying the material layer comprises feeding a central sleeve through said aerosol-generating material.

30. A method of forming an article for use in a non-combustible aerosol provision system, the method comprising:

providing a body of aerosol-generating material having one or more channels extending at least partially or completely through the body of aerosol-generating

material; and aligning the one or more channels with an air flow path to allow external air to flow into the one or more channels.

* * * * *