

600035

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

LODGED AT SUB-OFFICE

7 OCT 1987

Melbourne

CONVENTION APPLICATION FOR A PATENT

We, ELTECH SYSTEMS CORPORATION., a corporation of the State of Delaware, United States of America., domiciled at Town Executive Center, 6100 Glades Road, Suite 305, Boca Raton, Florida, 33434, United States of America., hereby apply for the grant of a patent for an invention entitled, "EFFICIENT ELECTRICAL POWER GENERATION SYSTEM", which is described in the accompanying complete specification.

This application is a Convention Application and is based on the application for a patent or similar protection made in the United States of America on 5 March 1987 numbered 017,806.


Our address for service is: Care of JAMES M. LAWRIE & CO., Patent Attorneys of 72 Willsmere Road, Kew, 3101, Victoria, Australia.

APPLICATION ACCEPTED AND AMENDMENTS
ALLOWED 25.5.90



DATED this 30 day of September 1987.

JAMES M. LAWRIE & CO

BY:

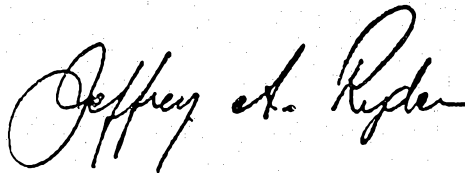

Patent Attorneys for
ELTECH SYSTEMS CORPORATION

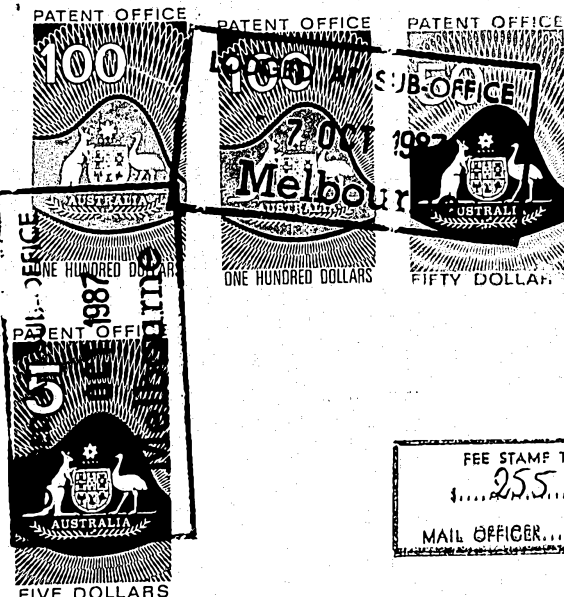

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952
DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT

In support of the Convention Application for a patent for an invention entitled, EFFICIENT ELECTRICAL POWER GENERATION SYSTEM.

I, Sheryl Kinley-Alligood, Patent and Trademark Administrator, of and on behalf of ELTECH Systems Corporation, do solemnly and sincerely declare as follows:-

1. I am authorized by ELTECH Systems Corporation, the applicant for the patent to make this declaration on its behalf.
2. The basic application as defined by Section 141 of the Act was made in the United States of America, on March 5, 1987, numbered 017,806, by Marilyn J. Niksa, Kenneth J. Branchick and Thomas R. Turk.
3. Marilyn J. Niksa, 7437 Trotwood Drive, Concord, Ohio 44077, Kenneth J. Branchick, 108 Doncaster Court, Concord Commons, Mentor, Ohio 44060, and Thomas R. Turk, 6345 S. Cedarwood, Mentor, Ohio 44060, all residing in the United States of America, are the actual inventors and the facts upon which the said Corporation is entitled to make the application are as follows:-

The said Corporation is the assignee of the invention and of the priority right from the said actual inventors.

4. The basic applications referred to in paragraph 2 of this Declaration were the first applications made in a Convention country in respect of the invention the subject of the application.

DECLARED AT FAIRPORT HARBOR, OHIO
this 11th day of August, 1987

ELTECH SYSTEMS CORPORATION

Sheryl Kinley-Alligood
Sheryl Kinley-Alligood
Patent and Trademark Administrator

To: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-79426/87
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 600035

(54) Title
ELECTRICAL POWER GENERATION BATTERY

International Patent Classification(s)
(51)⁴ **H01M 012/06**

(21) Application No. : **79426/87**

(22) Application Date : **07.10.87**

(30) Priority Data

(31) Number	(32) Date	(33) Country
017806	05.03.87	US UNITED STATES OF AMERICA

(43) Publication Date : **08.09.88**

(44) Publication Date of Accepted Application : **02.08.90**

(71) Applicant(s)
ELTECH SYSTEMS CORPORATION

(72) Inventor(s)
MARILYN J. NIKSA; KENNETH J. BRANCHICK; THOMAS R. TURK

(74) Attorney or Agent
CALLINAN LAWRIE

(56) Prior Art Documents
US 4147839
US 3708345
US 3666561

(57) Claim

1. A method for improving the efficiency of electrical power generation from at least one battery comprising at least one metal electrode and a liquid electrolyte wherein solid particulate is produced and suspended in said liquid electrolyte during the operation of said battery, comprising:

feeding said liquid electrolyte containing solid particulate from said battery to a solid separation means;

said solid separation means comprising a container having an axis ^{with} and an impeller ^{in alignment with said axis}; wherein said impeller is operated at a speed sufficient to concentrate said solid particulate in an annulus zone of fluid within said container opposite to the zone containing said impeller;

withdrawing liquid electrolyte depleted of solid particulate from said container; and,

recirculating said liquid electrolyte depleted of solid particulate to said battery.

(11) AU-B-79426/87
(10) 600035

-2-

12. An efficient, electrical power source comprising:

at least one battery comprising a metal electrode and a liquid electrolyte containing solid particulate;

a solid separation means comprising a container having an axis with an impeller in alignment with said axis; wherein said impeller is operated at a speed sufficient to concentrate said solid particulate in an annulus zone of fluid within said container opposite to the end containing said impeller;

means for conveying said liquid electrolyte to container;

means for withdrawing solids concentrated effluent from an annulus zone of fluid within said container opposite from the end of said container containing said impeller;

and means for withdrawing supernatant liquids from said container from a zone removed from said annulus zone, coupled with means for recycling withdrawn supernatant liquid to said battery.



P/00/011
600035

Form 10

PATENTS ACT 1952-1973

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE


Class:

Int. Cl:

Application Number:
Lodged:

Complete Specification—Lodged:
Accepted:
Published:

Priority:

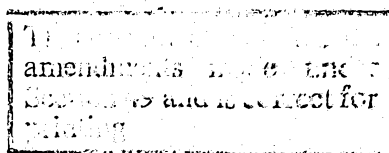

Related Art:

TO BE COMPLETED BY APPLICANT

Name of Applicant: ELTECH SYSTEMS CORPORATION., a corporation of the
State of Delaware, United States of America., domiciled

Address of Applicant: at Town Executive Center, 6100 Glades Road, Suite 305
Boca Raton, Florida, 33434, United States of America.

Actual Inventor: Marilyn J. NIKSA, Kenneth J. BRANCHICK and
Thomas R. TURK.

Address for Service: Care of JAMES M. LAWRIE & CO., Patent Attorneys of
72 Willsmere Road, Kew, 3101, Victoria, Australia.

Complete Specification for the invention entitled: EFFICIENT ELECTRICAL POWER GENERATION
SYSTEM.

The following statement is a full description of this invention, including the best method of performing it known to me:—

*Note: The description is to be typed in double spacing, pica type face, in an area not exceeding 250 mm in depth and 160 mm in width, on tough white paper of good quality and it is to be inserted inside this form.

EFFICIENT ELECTRICAL POWER GENERATION SYSTEM

BACKGROUND OF THE INVENTION

Field of the Invention

5 This invention relates to a method for improving the efficiency of an electrical power generation system. More specifically, a power source, which includes at least one battery comprising an anode and a liquid electrolyte that contains solid particulate, is integrated with a solids separation means. The solid separation means comprises an
10 impeller, a container having an axis and inlet and outlet means. This system provides for the highly effective continuous separation of solid particulate from the electrolyte resulting in high efficiency in electrical power generation.

15 State of the Art

The operation of certain energy or power generation systems commonly utilized a recirculating liquid.

Inherent in some of these systems is the possibility of a build up of solid discharge products. Thus, in metal/air batteries, which typically use a recirculating alkaline electrolyte, a metal oxide discharge product accumulates in the electrolyte. One such system is taught in U.S. Patent No. 4,246,324, wherein spent electrolyte containing precipitated oxides may simply be removed from the battery container through a draining nozzle.

It has been recognized, such as in U.S. Patent No. 3,359,136, that complete energy conversion systems may employ means for separating the metal oxide from the recirculating electrolyte. As discussed in this patent, oxide removal can maintain the concentration of the oxide reaction product in the electrolyte at a sufficiently low level for recirculation of electrolyte to a power source, such as a cell stack. As also disclosed in the patent, a separator can be useful to treat a portion of recirculating electrolyte. Such separator can constitute a self-cleaning filter, although the filter may require periodic scraping.

It is disclosed in U.S. Patent No. 3,708,345, that the mechanically separated oxide reaction product may be conveniently stored near a mechanical separator apparatus for eventual removal. As more fully discussed therein, the suspended zinc oxide reaction product which is separated, can find use as in recharging the zinc electrodes.

Impeller-fluidizers have been proposed for mixing and separating, e.g., separating at least one liquid of different densities. In U.S. Patent No. 3,129,066 such an apparatus, containing a perforate, generally cone-shaped, solids accumulating barrier within the fluidizer container, is taught as useful for the separation of at least one solid of different density from an entraining

liquid.

~~U.S. Patent Application No. 7051187~~

Also, as in ~~U.S. Patent Application Serial No. 843,055 of M. A. Petrick et al~~, there is described an impeller-fluidizer apparatus that can be useful for separating an entrained solid in a slurry fed to the apparatus. A product high in particulate concentration as well as one of very low particulate concentration may be produced, particularly in a cascading series of discrete fluidizer elements.

It would nevertheless be desirable if an entire power source and solids discharge separation system could be integrated to handle the continuous separation of solid particulate from the electrolyte to provide enhanced and efficient energy generation from metal/air batteries. It would also be desirable if such separator system for solids removal could operate most economically at low power requirements while integrated into such a continuous flow operation system that is operating with copious amounts of recirculating electrolyte. It would furthermore be advantageous if the system could not only operate on a continuous basis, but could do so without frequent interchange of critical elements, e.g., without interchange of used filters.

SUMMARY OF THE INVENTION

A novel method and system for improving the efficiency of electrical power generation, particularly from batteries comprising a consumable anode and a liquid electrolyte containing solid particulate, has been discovered.

In accordance with the present invention, there has now been devised an efficient solids separation system



useful, e.g., with metal/air batteries, which may provide for the continuous and efficient removal of solid particulate discharge products so as to maintain such products at desirably low levels in circulating electrolyte.

Further in accordance with the present invention, solids removal may be accomplished economically while providing for removal of even extremely finely divided particles.

Still further in accordance with the present invention, the system may be operated on a continuous basis while exhibiting freedom from plugging. Thus, the system does not rely on the need for interchange of critical parts, such as filters, during operation.

Still further in accordance with the present invention, the solids separation means is largely unaffected by changes in flow rate, changes in solids concentration and relatively minor changes in the specific gravity of the liquid phase.

Still further in accordance with the present invention, the solids separation means may operate with a differential pressure between the high solids concentration outlet means and the separated low solids concentration outlet means, and may further operate without a break in system pressure.

Still further in accordance with the present invention, a highly efficient electrical power generation system has been developed that is relatively small in size, light weight, operates with minimal input power requirements and is self-pumping.

Still further in accordance with the present invention, a system is provided comprising: a battery stack producing an unstable precursor material of an oxide solid in a liquid electrolyte withdrawn from the battery

stack as battery effluent; an impeller-equipped container having an axis; means for conveying the battery effluent to the container; means for withdrawing solids-concentrated effluent from an annulus zone of the container; and means for withdrawing supernatant liquid from the container from a zone removed from
5 such annulus zone, coupled with means for recycling withdrawn supernatant liquid to the battery stack.

According to a first embodiment of this invention there is provided a method for improving the efficiency of electrical power generation from at least one battery comprising at least one metal electrode and a liquid electrolyte wherein solid particulate is produced and suspended in said liquid electrolyte during the operation of said battery, comprising:

feeding said liquid electrolyte containing solid particulate from said battery to a solid separation means;

said solid separation means comprising a container having an axis with an impeller in alignment with said axis; wherein said impeller is operated at a speed sufficient to concentrate said solid particulate in an annulus zone of fluid within said container opposite to the zone containing said impeller;


withdrawing liquid electrolyte depleted of solid particulate from said container; and

recirculating said liquid electrolyte depleted of solid particulate to said battery.

According to a second embodiment of this invention there is provided an efficient, electrical power source comprising:

at least one battery comprising a metal electrode and a liquid electrolyte containing solid particulate;

a solid separation means comprising a container having an axis with an impeller in alignment with said axis; wherein said impeller is operated at a



speed sufficient to concentrate said solid particulate in an annulus zone of fluid within said container opposite to the end containing said impeller; means for conveying said liquid electrolyte to container;

means for withdrawing solids concentrated effluent from an annulus zone of fluid within said container opposite from the end of said container containing said impeller;

and means for withdrawing supernatant liquids from said container from a zone removed from said annulus zone, coupled with means for recycling withdrawn supernatant liquid to said battery.

These and other aspects of the invention will become clear to those skilled in the art upon the reading and understanding of the specification.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic flow diagram of an electrical power generation system according to the present invention including cell units and solids discharge removal means integrated therewith.

Figure 2 is a side elevational view, partly in section, of a preferred apparatus useful in the invention solids separation system.

Figure 3 is a graph illustrating how the electrolyte conductivity is reduced as a function of solids concentration.

The invention will be further described in connection with the attached drawing figures showing preferred embodiments of the invention including specific parts and arrangements of parts. It is intended that the drawings included as a part of this specification be illustrative of the preferred embodiments of the invention and should in no way be considered as a limitation on the scope of the invention.



DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A highly effective system has been developed that enhances electrical power generated and improves the efficiency of the operation of batteries or electrochemical cells.


The terms electrochemical cells, or batteries, as used herein, refer to those cells for generating electrical power comprising an anode, a cathode and an electrolyte. For such cells numerous anodes and cathodes have been used. An air cathode and a metal anode, however, has been found to be particularly useful for the purposes of the present invention. Thus for convenience, such cells are often referred to herein as metal/air batteries.

It is to be understood there can be used in addition to air as the cathode such alternative sources as are known to those skilled in the art, e.g., oxygen, ammonia, chlorine and carbon dioxide.

Materials useful for the anode may be any electroconductor used in such electrochemical cells which includes metals, metalloids, alloys and heavy metal salts. It is preferred for the purposes of the present invention that the anode is a consumable material. Such metals as zinc, aluminum, lead, lithium and the like are preferred. Aluminum is the most preferred for the purposes of the present invention which includes the alloys, metalloids and intermetallic mixtures thereof. During cell operation, i.e., power generation, a solids discharge product will accumulate in the electrolyte as a by-product of the electrical power generation. As used herein, the term "solids discharge product", is intended to include any such solids as will be contained in the electrolyte upon consumption of the anode. Usually this

product will consist mostly of a metal oxide. Where zinc is included in the anode metal, the solids contained in the electrolyte may be referred to as zinc oxide or zinc hydroxy complex. In the case of anodes containing
5 aluminum, the solids discharge product will contain hydrargillite, i.e., $\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$ and similar oxide complexes.

This discharge product is formed from the unstable precursor material $\text{MAl}(\text{OH})_4$ where M is usually K or Na
10 depending on the electrolyte used. This precursor is produced by the electrochemical reaction at the anode. This anode reaction product is unstable and breaks down to the solids discharge product $\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$ and the electrolyte MOH. This reaction is further illustrated
15 below.



The cathode will be of a porous sheet type
20 construction. Useful cathodes include those prepared typically as a carbon/polymeric binder matrix of a lipophobic (e.g., hydrophobic) polymer. Generally, this structure will be a catalyzed carbon matrixed with particles of halocarbon polymer binders. The hydrophobic
25 polymer will generally contribute from about 10 to about 50 weight percent of the matrix. The carbon typically is very finely divided, e.g., particles are within the range of from about 0.01 to about 0.1 micron. The halocarbon polymer binder, i.e., a fluorocarbon polymer, may be
30 combined with other polymeric materials which also may be finely divided. The carbon in the matrixed material may be activated such as by a platinum catalyst. Such cathodes have been disclosed for example in U.S. Patent No. 4,354,958 which is incorporated herein by reference

for such disclosure.

More specifically, the internal surface of the activated porous cathode wall, that is, the surface towards the interior of the porous sheet, is impregnated with a lipophobic resin such as a polyethylene, polypropylene, polytetrafluorethylene, polychlorofluoroethylene, various vinyl resins, and the like, in such a way as to let the resin penetrate inside the pores for a certain depth from the surface but without reaching through the entire thickness of the porous cathode. The resin partially coats the surface of the pores near the internal surface of the cathode and imparts hydrophobic properties to the gas side layer of the porous cathode.

Electrolytes that are useful in the electrochemical cells of the present invention include any material or medium capable of passing electrical current, i.e., ionically conductive, and is compatible with the respective anode and cathode materials of the present invention. In other words, the electrolyte not only must be capable of passing electrical current but also must be electrochemically reactive with the anode material while being more electropositive than the cathode.

In a preferred embodiment of the present invention, the electrolyte is an alkaline solution of an alkali or alkaline earth hydroxide. Alkali metal hydroxides are the most preferred. Although the use of a particular hydroxide or blend of hydroxides may depend upon the metal constituency of the anode if the anode contains aluminum, the hydroxide of choice making up the electrolyte is KOH or NaOH.

With respect to the solids separation means, a simple means of producing locally confined fluidized beds of fine particles is used. The particles are held dynamically

within a cylindrical vessel by the interaction of centrifugal force and convection, both produced by impeller-driven swirling flow. The fluidized bed is maintained in a zone adjacent to clear fluid with or
5 without mechanical barriers such as screens. Centrifugal force, due to swirling flow, moves particles radially outward, and secondary flow sweeps them along the walls from the impeller into a rotating, torroidal bed. Clear fluid passes through the fluidized zone. Upon leaving the
10 fluidized zone, the fluid is stripped of particles by centrifugal force. At high impeller rotation rates, the fluidized bed becomes small and sharply defined. This phenomenon may handle, without entrainment losses, particles of at least 10 times smaller than the lower
15 limit in conventional fluidization. Mass transfer controlled processes may possibly be reduced in volume by a factor of up to 100, the gain coming from the higher surface area of the smaller particles and their more favorable mass transfer coefficients.

20 A very important feature of the present invention is that the solids separation means not only serves to separate the solids discharge product but also may serve as a pump to draw electrolyte into the container for separation. Therefore, the entire system may operate
25 without any additional pumps. This is a major advantage since pumps generally require monitoring and are obviously an additional cost factor. Furthermore, this solids separation means has the additional advantage of being
30 substantially unaffected by changes in flow rate, changes in solids concentration and relatively minor changes in the specific gravity of the liquid phase when in operation.

Figure 1 illustrates a flow chart of a power generation system within the scope of the present invention. Cell stack 12, which comprises at least one

aluminum/air battery, has air inlet 11 and outlet 13. Cell stack 12 also has electrolyte inlet 21 and outlet 22 for the continuous circulation of electrolyte within the cell stack and to the solids separation means.

5 While the system is operating valve 14 is open and electrolyte liquid fills sump 15. Valve 16 is open to allow electrolyte to be drawn into solids separator 17 (e.g., as illustrated in Figure 2). The electrolyte depleted of solids at 18 may be recirculated to cell stack 10 12. The solids containing liquid is taken off at 19 and fed to de-watering means 20. Fresh electrolyte may then be recirculated to cell stack 12 from outlet 23.

Figure 2 illustrates an impeller fluidizer, shown generally at 2, has a cylindrical container or canister 3 15 equipped with an impeller 4 at the bottom of the canister 3. The impeller 4 is connected by a drive shaft 5 with a power source, not shown. A slurry inlet 6 feeds battery electrolyte effluent containing solids discharge product, from a battery stack, not shown (see Fig. 1). Within the 20 canister 3 the solids entering through the slurry inlet 6 concentrate at the end of the canister 3 forming an annulus opposite from the impeller 4. The solids form a concentrated solids-containing zone 7 at such end. From this solids-containing zone 7 a concentrate product can be 25 removed from the canister 3 through a solids product outlet 8. Nearer the impeller 4, supernatant electrolyte can be removed from an electrolyte product outlet 9. The electrolyte product from this outlet 9 can then be recycled to the battery stack, not shown.

30 The invention is further illustrated in the following examples. While these examples will show one skilled in the art how to operate within the scope of this invention, they are not to serve as a limitation on the scope of the invention where such scope is defined only in the claims.

EXAMPLE 1

For this Example, the electrolyte used was a five molar aqueous electrolyte of potassium hydroxide. The electrolyte was circulated in the system. Upon initiation of the test the electrolyte contained hydrargillite ($\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$) particulate. This solid, in crystal form, has virtually all particles more finely divided, i.e., finer than 10 microns with the major portion of the particles, i.e., greater than 50 weight percent, being more finely divided than 5 microns.

The separator used consisted of an 8 inch long by 2 inch diameter polysulfone cylinder with polysulfone end plates. The cylinder had two tangential outlet ports. One of these ports, located at the cylinder end opposite the impeller, was for the removal of concentrated slurry product. The other outlet port, adjacent the impeller was for removal of cleaned, supernatant liquid. The container also had an inlet port, at the container mid-section for introducing the test electrolyte to the separator. The impeller was 1 3/4 inch by 1/2 inch by 1/16 inch nickel 200 sheet attached to a nickel shaft using nickel pins. A Hastelloytm C high strength, corrosion resistant, nickel-based alloy face seal was used to seal the shaft in the polysulfone seal housing. Such impeller-fluidizer has been more particularly described in the AU Patent Application No. 70511/87.

The impeller-fluidizer was operated at 7000 rpm. Under these conditions approximately 86.4 percent by weight of the heavy particles (greater than 10 microns) and 13.6 percent by weight of the lighter particles (less than 10 microns) concentrated at the end of the fluidizer away from the impeller. The balance of the mass of particles remained fluidizer throughout the electrolyte, but as such, were judged to be sufficiently suppressed for



recirculation of the electrolyte for use in an aluminum/air battery cell stack.

5

EXAMPLE II

For this Example, the same solids-separator device as described in Example I was employed. The electrolyte employed was 5 M KOH and contained over 0.7 percent by weight solids. This electrolyte was circulated at a rate of 2.5 gallons per minute with 320 ml/min. discharge of solids.

The impeller-fluidizer was operated at 5000 rpm and under such conditions approximately .66 percent by weight of light solid particles (less than 10 microns) and 1.48 percent by weight of heavy solid particles concentrated at the end of the fluidizer away from the impeller. The balance of the mass of particles remained fluidized throughout the electrolyte, but as such, were judged to be sufficiently suppressed for recirculation of the electrolyte for use in an aluminum/air battery cell stack.

EXAMPLE III

25

In this Example several trials were run with an electrolyte that contained $\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$ having a particle size in the range of 44-150 microns and another set of trials were conducted with an electrolyte that contained $\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$ having an average particle size of 3.48 microns. The same solids-separator device as described in Example I was employed for this Example. The solids-separator device functioned as both a system pump and as a solids separation device. The results from these

trials and the operation conditions are reported below in Table I. Excellent solids separation was obtained for the larger particles. Poorer separation of the smaller particles was obtained, however this may be improved by
5 operating the device at a higher rpm.

TABLE I

	<u>Particle</u>	<u>Test</u>	<u>% Solids Conc Stream</u>	<u>Flowrate Conc Stream</u>
	<u>Size</u>	<u>No.</u>	<u>% Solids Dilute Stream</u>	<u>Flowrate Dilute Stream</u>
5	44-150	1	17.9 ¹ : 1	0.36 : 1
	microns			
		1(repeat)	16.1 ¹ : 1	0.37 : 1
	"	2	48.9 ¹ : 1	0.17 : 1
10	3.48	3	1.7 ² : 1	0.41 : 1
	microns			
	"	4	2.3 ² : 1	0.17 : 1

1. Weight % of heavier particles (i.e., larger particles) removed.
2. Weight % of lighter particles (i.e., smaller particles) remaining in electrolyte after separation.

15 The ratios shown illustrate the efficiency at which the device is separating (i.e., concentrating) the solids. The ratio of the concentrated to dilute flowrates has a large effect on the separation efficiency. At lower flowrates, the heavier particles have a longer residence time in the solids separator and, in turn, the efficiency is enhanced.

EXAMPLE IV

An aluminum/air battery was tested to illustrate the reduction in operating voltage with increasing solids content in the electrolyte. The initial trial was conducted using 5M KOH electrolyte having no dissolved aluminum or solid alumina. Solid alumina ($\text{Al}_2\text{O}_3 \cdot 3\text{H}_2\text{O}$) particles of approximately 3.48 micron size were slurried with the electrolyte at 60 degrees centigrade.

Conductivity measurements were taken with a Foxboro conductivity meter at different solids concentration levels. From the conductivity values, an electrolyte i.r. drop based on a 2 mm anode/cathode gap was calculated. The graph of Figure 3 shows how the electrolyte conductivity is reduced as a function of solids concentration. This is represented as an electrolyte i.r. drop. Voltage is the sum of the cathode potential, anode potential, and electrolyte i.r.

In addition to reduction of the electrolyte conductivity, some other practical problems arising from high solids content in an electrical power generation system are:

1. Scaling of the process equipment, especially the heat exchanger thus reducing heat exchanger efficiency.
2. Destruction of the valve seats, etc. by the abrasive action of the alumina.
3. Physical damage to the air cathodes due to the abrasiveness of the alumina.
4. Plugging of all the electrolyte inlet orifices.
5. Increased pumping energy required by the increased viscosity of electrolyte.

While the invention has been described and

illustrated with reference to certain preferred
embodiments thereof, those skilled in the art will
appreciate that various changes, modifications and
substitutions can be made therein without departing from
5 the spirit of the invention. For example, the system and
process may be utilized with most means that produce solid
particulate in a circulating liquid medium and that
requires the solid particulate be removed from the liquid
medium. It is intended, therefore, that the invention be
10 limited only by the scope of the claims which follow.

The claims defining the invention are as follows:-

1. A method for improving the efficiency of electrical power generation from at least one battery comprising at least one metal electrode and a liquid electrolyte wherein solid particulate is produced and
5 suspended in said liquid electrolyte during the operation of said battery, comprising:

feeding said liquid electrolyte containing solid particulate from said battery to a solid separation means;

10 said solid separation means comprising a container having an axis ^{with} ~~and~~ ^{in alignment with said axis} and an impeller; wherein said impeller is operated at a speed sufficient to concentrate said solid particulate in an annulus zone of fluid within said container opposite to the zone containing said
15 impeller;

withdrawing liquid electrolyte depleted of solid particulate from said container; and,

recirculating said liquid electrolyte depleted of solid particulate to said battery.

20 2. The method according to claim 1, wherein said solid particulate comprises a metal hydroxy complex.

3. The method according to claim 2, wherein liquid electrolyte comprises an unstable precursor of said complex and said solids separation means accelerates the
25 instability of said precursor.

4. The method according to claim 3, wherein said battery comprises an aluminum anode and an air cathode and said electrolyte is alkaline and further comprises hydrargillite from the operation of said battery.

30 5. The method according to claim 1, wherein said



impeller is operated at a speed sufficient to concentrate said solid particulate in a zone in said container opposite from the end of said container containing said impeller.

5

6. The method according to claim 1, wherein concentrated solids removed from said container are processed for further solids concentration.

10

7. The method according to claim 1, wherein said solids depleted liquid electrolyte is blended with fresh electrolyte and the resulting blend is circulated to said battery.

15

8. The method according to claim 1, wherein said liquid electrolyte is recirculated continuously wherein only a portion of said electrolyte is fed to said container whereby said solids depleted electrolyte from said container is returned to said recirculating electrolyte.

20

9. The method according to claim 1, wherein said electrical power is generated by a stack of multiple batteries.

25

10. The method according to claim 1, wherein said solid separation is self-pumping whereby the system may operate without any additional pumps.

30

11. The method according to claim 1, wherein said solids separation means is substantially unaffected by changes in flow rate, changes in solids concentration and relatively minor changes in the specific gravity of the liquid phase.

12. An efficient, electrical power source comprising:

at least one battery comprising a metal electrode and a liquid electrolyte containing solid particulate;

a solid separation means comprising a container having an axis with an impeller in alignment with said axis; wherein said impeller is operated at a speed sufficient to concentrate said solid particulate in an annulus zone of fluid within said container opposite to the end containing said impeller;

means for conveying said liquid electrolyte to container;

means for withdrawing solids concentrated effluent from an annulus zone of fluid within said container opposite from the end of said container containing said impeller;

and means for withdrawing supernatant liquids from said container from a zone removed from said annulus zone, coupled with means for recycling withdrawn supernatant liquid to said battery.

13. The power source according to claim 12, wherein said metal electrode is aluminium and the cathode is an air cathode, and said solid particulate comprises a metal hydroxy complex.

14. The power source according to claim 13, wherein said electrolyte comprises an unstable precursor to said complex and said solid separation means accelerates the instability of said precursor.

15. The power source according to claim 13, wherein said electrolyte is alkaline and comprises hydrargillite for separation by said solid separation means.

16. The power source according to claim 12, wherein said source comprises a stack of multiple batteries.

17. The power source according to claim 12, wherein said solid separation means is self-pumping whereby the system may operate without any additional pumps.

18. The power source according to claim 12, wherein said solids separation means is substantially unaffected by changes in flow rate, changes in solids concentration and relatively minor changes in the specific gravity of the liquid phase.

5 19. A method for improving the efficiency of electrical power generation according to claim 1, substantially as herein described with reference to the Examples.

20. A product whenever prepared by the method according to any one of claims 1 to 11.

10 21. An efficient electrical power source, substantially as hereinbefore described with reference to the Examples and/or drawings.

15 DATED this 22nd day of May 1990.

ELTECH SYSTEMS CORPORATION

By their Patent Attorneys:

CALLINAN LAWRIE



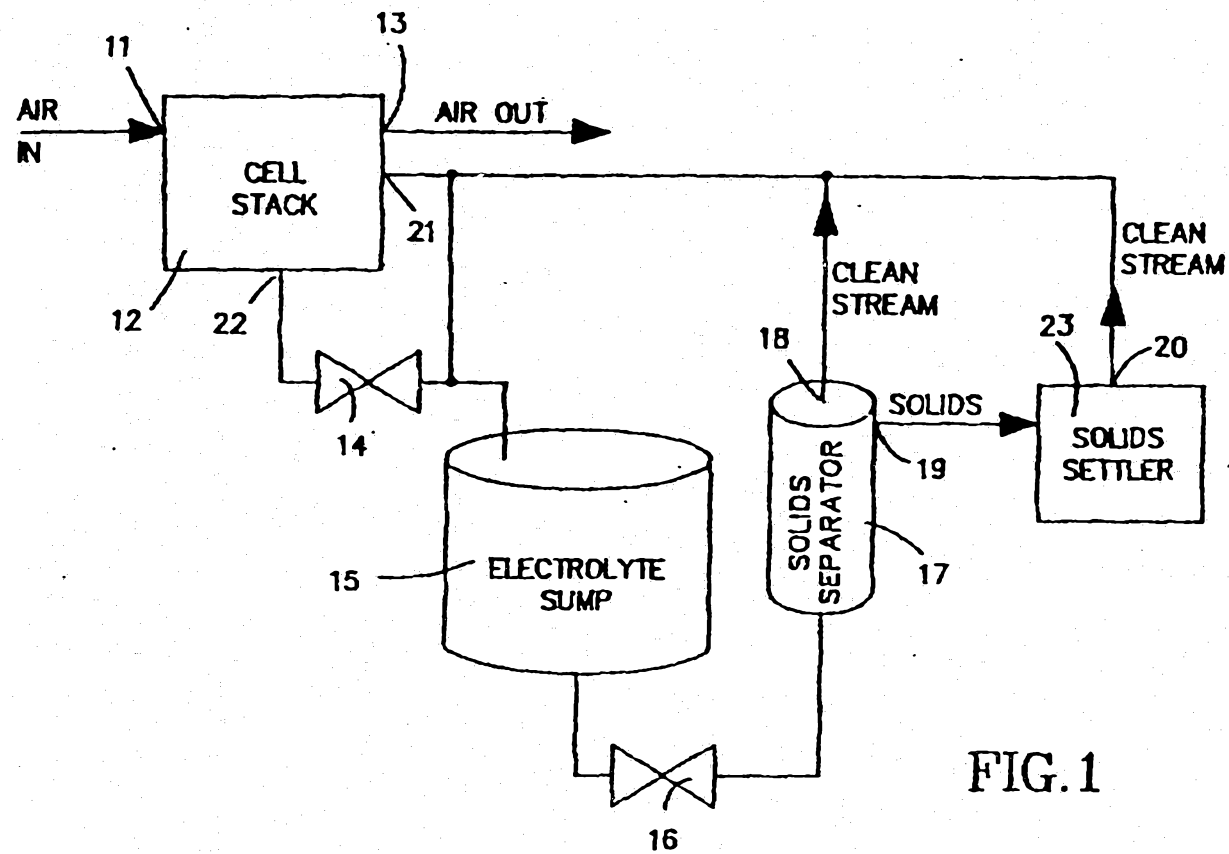



FIG. 1

ORIGINAL

ELTECH SYSTEMS CORPORATION

79 426/87

FIG. 2

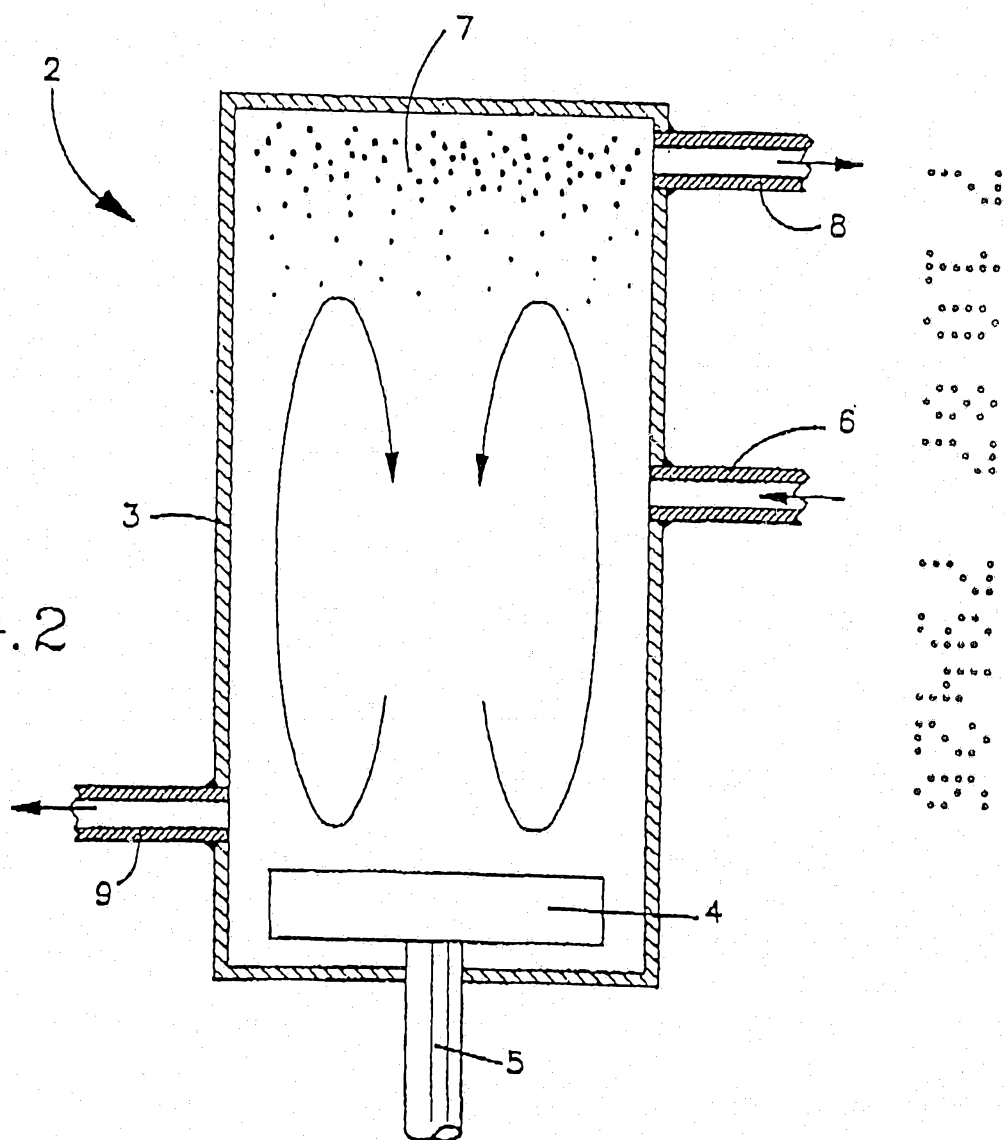

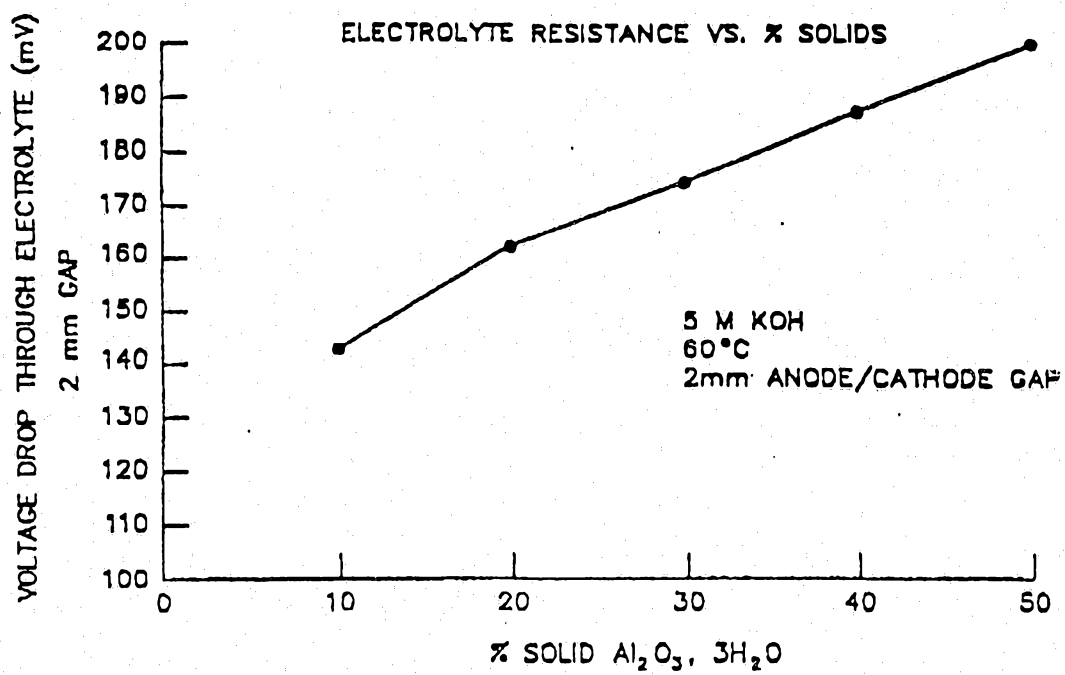


FIG. 3