

CONVENTION

AUSTRALIA

Patents Act 1990

Notice of Entitlement

682014

We, The Procter & Gamble Company, of 5299 Spring Grove Avenue, Cincinnati, Ohio 45217-1087, United States of America, state the following in connection with Australian Application No. 54099/94.

1. We are the nominated person.
2. The nominated person is the assignee of the actual inventors.
3. The nominated person is the assignee of the applicants of the basic application listed in the declaration under Article 8 of the PCT.
4. The basic application is the application first made in a Convention country in respect of the invention.

Dated: 7 July, 1997

By PHILLIPS ORMONDE & FITZPATRICK
Patent Attorneys for the Applicant

By:

David B Fitzpatrick

To: The Commissioner of Patents

Phillips Ormonde & Fitzpatrick
367 Collins Street
Melbourne Victoria 3000

Reference: 406317



AU9454099

(12) PATENT ABRIDGMENT (11) Document No. AU-B-54099/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 682014

- (54) Title
NONDIGESTIBLE FAT COMPOSITIONS CONTAINING SOLID POLYOL POLYESTER POLYMER FOR PASSIVE OIL LOSS CONTROL
- (51)⁵ International Patent Classification(s)
A23D 009/00 A23L 001/217 A23L 001/308
- (21) Application No. : 54099/94 (22) Application Date : 21.10.93
- (87) PCT Publication Number : WO94/09637
- (30) Priority Data
- (31) Number (32) Date (33) Country
968791 30.10.92 US UNITED STATES OF AMERICA
- (43) Publication Date : 24.05.94
- (44) Publication Date of Accepted Application : 18.09.97
- (71) Applicant(s)
THE PROCTER & GAMBLE COMPANY
- (72) Inventor(s)
PATRICK JOSEPH O'BRIEN; JOHN KEENEY HOWE
- (74) Attorney or Agent
PHILLIPS ORMONDE & FITZPATRICK, 367 Collins Street, MELBOURNE VIC 3000
- (57) Claim

1. A nondigestible fat composition useful as a replacement for triglyceride fats or oils in foods, which composition has a Solid Fat Content profile slope between 70°F and 98.6°F of from 0 to -0.75 %solids/°F, and which composition comprises:

- A. a liquid nondigestible oil having a complete melting point below 98.6°F; and
- B. nondigestible solid particles of polyol polyester material dispersed in said oil in an amount sufficient to control passive oil loss upon ingestion of said composition, said nondigestible solid particles having a complete melting point above 98.6°F, wherein said polyol polyester material comprises at least 1% of a polyol polyester polymer component and a polyol polyester monomer component in an amount up to 99%, wherein at least 15% of the hydroxyl groups of the polyol polyester material are esterified with C₂₀ and higher long chain saturated fatty acid radicals.


19. A thickened digestible oil product comprising:
 - A. from 85% to 98% of a digestible edible oil; and
 - B. from 2% to 15% of nondigestible solid particles of polyol polyester material, said nondigestible solid particles having a complete melting point above 98.6°F, wherein said polyol polyester material comprises at least 1% of a polyol polyester polymer component and a polyol polyester monomer component in an amount up to 99%, and wherein at least 15% of the hydroxyl groups of the polyol polyester material are esterified with long chain saturated fatty acid radicals.



(51) International Patent Classification 5 : A23D 9/00, A23L 1/308, 1/217		A1	(11) International Publication Number: WO 94/09637 (43) International Publication Date: 11 May 1994 (11.05.94)
(21) International Application Number: PCT/US93/10108 (22) International Filing Date: 21 October 1993 (21.10.93) (30) Priority data: 07/968,791 30 October 1992 (30.10.92) US (71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors: CORRIGAN, Patrick, Joseph ; 33 Dexter Park Boulevard, Cincinnati, OH 45241 (US). HOWIE, John, Keeney ; 5958 Olive Branch Road, Oregonia, OH 45054 (US).		(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US). (81) Designated States: AU, CA, FI, JP, KR, NO, NZ, Euro- pean patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	

682014

(54) Title: NONDIGESTIBLE FAT COMPOSITIONS CONTAINING SOLID POLYOL POLYESTER POLYMER FOR PASSIVE OIL LOSS CONTROL

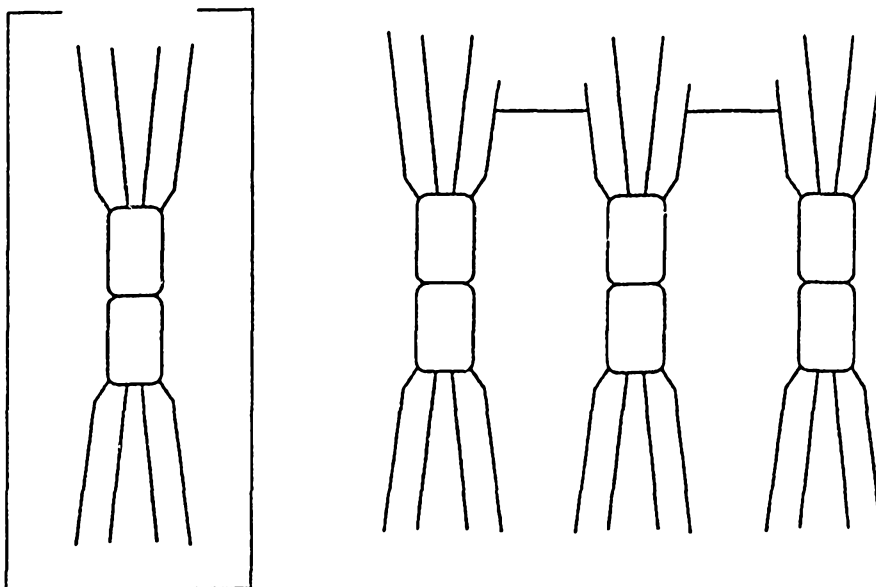

(57) Abstract

Nondigestible fat compositions useful as replacements for triglyceride fats or oils in foods are disclosed. These compositions have relatively flat Solid Fat Content (SFC) profile slopes between typical room temperature and body temperature. The nondigestible fat compositions comprise a liquid nondigestible oil and nondigestible solid polyol polyester particles dispersed in the oil in an amount sufficient to control passive oil loss. The solid polyol polyester particles of the composition herein comprise from about 1 % to 100 % polyol polyester polymer and from 0 % to about 99 % polyol polyester monomer. The polyol polyester material which forms these solid particles must contain a relatively high proportion of long chain saturated fatty acid ester groups. Edible fat-containing products comprising these nondigestible fats can be less waxy tasting due to the lower level of solids required for passive oil loss control.

NONDIGESTIBLE FAT COMPOSITIONS CONTAINING SOLID
POLYOL POLYESTER POLYMER FOR PASSIVE OIL LOSS CONTROL

TECHNICAL FIELD

The present invention relates to nondigestible fat compositions that are useful as full or partial replacers for triglyceride fats or oils in foods. More particularly, the present invention provides such nondigestible fat compositions that provide passive oil loss control without being excessively waxy tasting.

BACKGROUND OF THE INVENTION

Certain polyol fatty acid polyesters have been suggested as low or reduced calorie substitutes for triglyceride fats and oils used in foods. For example, nonabsorbable, nondigestible sugar fatty acid esters or sugar alcohol fatty acid esters having at least 4 fatty acid ester groups with each fatty acid having from 8 to 22 carbon atoms have been used as partial or full fat replacers in low calorie food compositions. (See Mattson & Volpenhein, U.S. Patent 3,600,186; Issued August 17, 1971.) Foods in which these polyol polyesters are particularly useful as partial or complete replacements for triglyceride fats or oils include products suitable for use in frying. Unfortunately, regular ingestion of moderate to high levels of completely liquid forms of these polyol polyesters can produce undesirable passive oil loss, namely, leakage of the polyesters through the anal sphincter. By contrast, completely solid versions of these polyesters provide a sufficiently high solids content at mouth temperatures (e.g., 92°F, 33.3°C) such that they give a waxy taste or impression in the mouth when ingested.

As an alternative to these completely liquid or completely solid nondigestible/nonabsorbable polyol polyesters, certain intermediate melting polyol fatty acid polyesters have been developed that provide passive oil loss control, while at the same time reducing waxiness in

the mouth. (See Bernhardt; European Patent Application Nos. 236,288 and 233,856; Published September 9, and August 26, 1987, respectively.) These intermediate melting polyol polyesters exhibit a unique rheology at body temperature by virtue of their having a matrix which involves a minimal level of solids (e.g. about 12% or lower) that bind the remaining liquid portion. As a result, these intermediate melting polyol polyesters are sufficiently viscous and have a sufficiently high liquid/solid stability at body temperature to provide passive oil loss control. An example of such intermediate melting polyol polyesters are those obtained by substantially completely esterifying sucrose with a 55:45 mixture of fully hydrogenated (hardstock) and partially hydrogenated soybean oil fatty acid methyl esters. (See Examples 1 and 2 of the above European patent applications.)

These intermediate melting polyol polyesters can be used as total or partial replacements for other fats and oils in various food products, including cooking and frying oils. However, it has been found that certain foods such as potato chips fried in frying fats containing substantial levels of these nondigestible intermediate melting polyol polyesters, particularly at levels in excess of about 40%, can give a significantly increased waxiness impression compared to potato chips that have been fried in the digestible triglyceride fat or oil that the nondigestible polyol polyester has partially replaced. (In terms of physical properties, "waxiness" relates to how the fat composition is sensed in the mouth, and specifically relates in part to the sensation of the product having a relatively high level of solids.) Indeed, this increased waxiness impression with regard to these intermediate melting polyol polyesters is recognized in the aforementioned European Patent Application No. 233,856 in as much as that application discloses fat compositions which contain digestible food materials, such as triglycerides and substituted mono- and diglycerides, that act as solvents for the intermediate melting polyol polyesters. However, as the proportion of triglycerides is increased relative to the intermediate melting polyol polyesters so as to impart less waxiness, the caloric content of the frying fat also increases accordingly. In addition, it has been found that frying fats containing greater than about 40% of these intermediate melting polyol

polyesters can adversely affect the flavor display of the resulting fried food, in particular potato chips.

The waxiness impression imparted by intermediate melting polyol polyesters such as those of the aforementioned European '288 and '856 applications is believed to be due at least in part to their change in Solid Fat Content (SFC), particularly between typical room temperature (i.e. 70°F., 21.1°C.) and body temperature (i.e. 98.6°F, 37°C.). For example, the intermediate melting sucrose polyester of Example 2 of European Patent Application Nos. 233,856 and 236,128 has an SFC profile slope (as hereinafter defined) between room temperature and body temperature of about -1.3. In other words, the SFC profile slope of these intermediate melting polyol polyesters is relatively steep. Given this relatively steep SFC profile slope, the change in solids content of these intermediate melting polyol polyesters can be sufficiently great such that a high level of solids will be sensed when such room temperature materials are first placed in the mouth, thereby leading to an increased waxiness sensation.

Blends of completely liquid polyol polyesters with completely solid polyol polyester hardstocks, preferably esterified with C₁₀ - C₂₂ saturated fatty acids (e.g. sucrose octastearate), have also been proposed in order to provide passive oil loss control. (See, for example, Jandacek; U.S. Patent 4,005,195; and Jandacek/Mattson; U.S. Patent 4,005,196; Both issued January 25, 1977.) Blends of these liquid polyol polyesters and solid polyol polyesters hardstocks have relatively flat SFC profile slopes between typical room temperature and body temperature, i.e. slopes of from 0 to about -0.3, and more typically from 0 to about -0.1. In other words, there is little or no change in the solids content of these blends between room temperature and body temperature.

Although providing at least temporary passive oil loss control, blends of liquid polyol polyesters and solid polyol polyester hardstocks according to the aforementioned U.S. '195 and '196 patents do not necessarily provide passive oil loss control over an extended period of time. It has been found that these solid polyol polyester hardstocks normally tend to form large spherulitic particles (typically from about 3 to about 32 microns in size) in the liquid polyol polyesters. These large spherulitic particles may tend to phase

separate from the liquid polyol polyesters during storage of such blends. As a result, a two-phase system can develop with the liquid portion thereof providing minimal or no passive oil loss control.

In addition, blends of liquid polyol polyesters and solid polyol polyester hardstocks according to the aforementioned U.S. Patents 4,005,195 and 4,005,196 do not necessarily lead to less waxy tasting products. As taught in these patents, a relatively high level of solid polyol polyester hardstock is required to provide passive oil loss control. For example, hardstock is preferably used in an amount of from about 20% to about 50% by weight of the liquid polyol polyester. (See Column 9, lines 65-68, of U.S. Patent 4,005,195.) Such a level of solid polyol polyester hardstock used for passive oil loss control at body temperature can lead to a waxy tasting product due to the relatively high level of solids that will also be present at mouth temperature.

In view of the foregoing, it would be desirable to provide nondigestible fat compositions comprising blends of liquid polyol polyesters and solid polyol polyester hardstock particles with such blends exhibiting little or no phase separation of the hardstock particles from the liquid polyol polyesters. In addition, it would be desirable to be able to reduce the level of solid polyol polyester hardstock required for effective passive oil loss control so as to provide less waxy tasting products.

In addition to being useful as passive oil loss control agents when combined with liquid nondigestible oils, certain polyol polyesters which are solid at temperatures of about 25°C and higher have also been used as thickening agents for conventional digestible triglyceride oils. For example, these solid polyol polyesters have been used as "thickening agents" for blending with liquid digestible or nondigestible oils in formulations such as shortening, as well as in other food products which contain a combination of fat and non-fat ingredients, e.g., margarines, mayonnaise, frozen dairy desserts and the like. (See, for example, Jandacek and Letton; U.S. Patent 4,797,300; Is-

sued January 10, 1989.) However, these prior art thickening agents had to be used at levels of 10 to 25%. Accordingly, it would be desirable to reduce the level of thickening agents of this type in order to provide less waxy tasting products.

SUMMARY OF THE INVENTION

The present invention relates to a nondigestible fat composition useful as a replacement for triglyceride fats or oils in foods, which composition has a Solid Fat Content profile slope between 70°F and 98.6°F of from 0 to -0.75 %solids/°F, and which composition comprises:

- A. a liquid nondigestible oil having a complete melting point below 98.6°F; and
- B. nondigestible solid particles of polyol polyester material dispersed in said oil in an amount sufficient to control passive oil loss upon ingestion of said composition, said nondigestible solid particles having a complete melting point above 98.6°F, wherein said polyol polyester material comprises at least 1% of a polyol polyester polymer component and a polyol polyester monomer component in an amount up to 99%, wherein at least 15% of the hydroxyl groups of the polyol polyester material are esterified with C₂₀ and higher long chain saturated fatty acid radicals.

The nondigestible fat compositions of the present invention provide significant advantages over known intermediate melting polyol polyesters, as well as prior art blends of liquid polyol polyester and solid polyol polyester hardstocks.

The relatively small nondigestible particles provide especially efficient passive oil loss control. As a result, the level of solids at body temperature required for passive oil loss control can be reduced to relatively low levels, (e.g., to less than 20%, preferably to less than 15% of the nondigestible fat). In addition, the nondigestible fats of the present invention have relative flat SFC profile slopes, thus leading to minimal or no change in solids content between typical room and body temperature. This combination of relatively low solids levels required for passive oil loss control, with minimal/no solids content change between room and body temperatures, can result in less waxy tasting products containing these nondigestible fats.

The present invention also relates to digestible fat compositions which utilize particles of the hereinbefore described nondigestible polyol polyester material as thickening agents. Such compositions



comprise from about 85% to about 98 of a digestible edible oil and from about 2% to about 15% of the nondigestible solid polyol polyester particles.

BRIEF DESCRIPTION OF THE DRAWING

Figure 1a through 1c represent is a depictions of sucrose octaester monomer, dimer and trimer, respectively.

Figure 2 is a photomicrograph (magnification 1000x) depicting particles of solid sucrose polyester polymer/monomer blends dispersed in a liquid sucrose polyester.

DETAILED DESCRIPTION OF THE INVENTION

A. Definitions

By "nondigestible" is meant that only about 70% or less of the material is digested by the body. Preferably, only about 20% or less of such materials are digested. More preferably, only about 1% or less of such materials are digested.

As used herein, the term "thickness" of a particle is used in its conventional sense of the smallest of the three dimensions (length, width, height) of any given particle.

As used herein, the term "spherulitic" refers to substantially spherical or round, essentially three-dimensional particles.

As used herein, the term "platelet-like" refers to a substantially flat, essentially two-dimensional type of particle having length and width in the unfolded planar configuration that is substantially greater in dimension than its thickness.

As used herein, the terms "filament-like" and "rod-like" refer to elongated, essentially one-dimensional particles.

As used herein, the term "complete melting point" refers to the temperature at which all solid components have melted. All melting points referred to herein are measured by Differential Scanning Calorimetry (DSC) as described hereinafter.

~~As used herein, the term "comprising" means various components, or steps, can be conjointly employed in the nondigestible fat compositions and processes of the present invention. Accordingly, the term "comprising" encompasses the more restrictive terms "consisting essentially of" and "consisting of".~~

By "polyol" is meant a polyhydric alcohol containing at least 4, preferably from 4 to 12, more preferably from 4 to 8, most preferably



As used herein, the term "comprising" means various components, or steps, can be conjointly employed in the nondigestible fat compositions and processes of the present invention. Accordingly, the term "comprising" encompasses the more restrictive terms "consisting essentially of" and "consisting of". Use of the term "comprising" is not intended to exclude other additives, components, integers or steps.

By "polyol" is meant a polyhydric alcohol containing at least 4, preferably from 4 to 12, more preferably from 4 to 8, most preferably

8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
22

from 6 to 8, hydroxyl groups. Polyols thus include sugars (i.e., monosaccharides, disaccharides and trisaccharides), sugar alcohols (i.e., the reduction product of sugars wherein the aldehyde or ketone group has been reduced to an alcohol), other sugar derivatives (e.g., alkyl glycosides), polyglycerols such as diglycerol and triglycerol, pentaerythritol, and polyvinyl alcohols. Specific examples of suitable sugars, sugar alcohols and sugar derivatives include xylose, arabinose, ribose, xylitol, erythritol, glucose, methyl glucoside, mannose, galactose, fructose, sorbitol, maltose, lactose, sucrose, raffinose, and maltotriose. Preferred polyols include erythritol, xylitol, sorbitol, and glucose, with sucrose being an especially preferred polyol.

By "polyol polyester" is meant a polyol as hereinbefore described having at least 4 ester groups, i.e., at least 4 of the hydroxyl groups are esterified with fatty or other organic acids. Polyol esters that contain 3 or less ester groups are digested in (and the products of digestion are absorbed from) the intestinal tract much in the manner of ordinary triglyceride fats or oils, whereas those polyol esters which contain 4 or more ester groups are generally substantially nondigestible and consequently nonabsorbable by the human body. It is not necessary that all of the hydroxyl groups of the polyol be esterified, but it is preferable that disaccharide molecules contain no more than 3 unesterified hydroxyl groups, and more preferably no more than 2 unesterified hydroxyl groups, so that they are rendered nondigestible. Typically, substantially all (e.g., at least about 85%) of the hydroxyl groups of the polyol are esterified. For liquid polyol polyesters, preferably at least about 95% of the hydroxyl groups of the polyol are esterified. In the case of sucrose polyesters, typically from about 7 to 8 of the hydroxyl groups of the polyol are esterified.

By "ester group" is meant a moiety formed from the reaction of a hydroxyl group with an organic acid or acid derivative which moiety contains fatty acid and/or other organic radicals having at least 2 carbon atoms, typically at least 8 carbon atoms, more typically at least 12 carbon atoms, and most typically at least 16 carbon atoms. Representative examples of such fatty acid and other organic acid radicals include acetic, propionic, butyric, caprylic, capric, lauric,

myristic, myristoleic, palmitic, palmitoleic, stearic, oleic, elaidic, ricinoleic, linoleic, linolenic, eleostearic, arachidic, arachidonic, behenic, lignoceric, erucic, and cerotic fatty acid radicals and other organic acid radicals including aromatic esters-forming radicals such as benzoic or toluic; branched chain radicals such as isobutyric, neooctanoic or methyl stearic; ultra-long chain saturated or unsaturated fatty acid radicals such as tricosanoic or triconsenoic; cyclic aliphatics such as cyclohexane carboxylic; and polymeric acid ester-forming radicals such as polyacrylic and dimer fatty acid. The fatty or other organic acid radicals can be derived from naturally occurring or synthetic fatty acids. The acid radicals can be saturated or unsaturated, including positional or geometric isomers, e.g. cis- or trans-isomers, straight chain or branched aromatic or aliphatic, and can be the same for all ester groups, or can be mixtures of different acid radicals.

All percentages, ratios and proportions used herein are by weight unless otherwise specified.

B. Liquid Nondigestible Oil

A key component of the nondigestible fat compositions herein is a liquid nondigestible oil having a complete melting point below about 37°C. Suitable liquid nondigestible edible oils for use herein include liquid polyol polyesters (see Jandacek; U.S. Patent 4,005,195; Issued January 25, 1977); liquid esters of tricarballic acids (see Hamm; U.S. Patent 4,508,746; Issued April 2, 1985); liquid diesters of dicarboxylic acids such as derivatives of malonic and succinic acid (see Fulcher; U.S. Patent 4,582,927; Issued April 15, 1986); liquid triglycerides of alpha-branched chain carboxylic acids (see Whyte; U.S. Patent 3,579,548; Issued May 18, 1971); liquid ethers and ether esters containing the neopentyl moiety (see Minich; U.S. Patent 2,962,419; Issued Nov. 29, 1960); liquid fatty polyethers of polyglycerol (See Hunter et al; U.S. Patent 3,932,532; Issued Jan. 13, 1976); liquid alkyl glycoside fatty acid polyesters (see Meyer et al; U.S. Patent 4,840,815; Issued June 20, 1989); liquid polyesters of two ether linked hydroxypolycarboxylic acids (e.g., citric or isocitric acid) (see Huhn et al; U.S. Patent 4,888,195; Issued December 19, 1988); liquid esters of epoxide-extended polyols (see White et al; U.S. Patent 4,861,613; Issued August 29, 1989); as well as liquid

polydimethyl siloxanes (e.g., Fluid Silicones available from Dow Corning). All of the foregoing patents relating to liquid nondigestible oils are incorporated herein by reference.

Preferred liquid nondigestible oils are the liquid polyol polyesters that comprise liquid sugar polyesters, liquid sugar alcohol polyesters, and mixtures thereof. The preferred sugars and sugar alcohols for preparing these liquid polyol polyesters include erythritol, xylitol, sorbitol, and glucose, with sucrose being especially preferred. The sugar or sugar alcohol starting materials for these liquid polyol polyesters are preferably esterified with fatty acids containing from 8 to 22 carbon atoms, and most preferably from 8 to 18 carbon atoms. Suitable naturally occurring sources of such fatty acids include corn oil fatty acids, cottonseed oil fatty acids, peanut oil fatty acids, soybean oil fatty acids, canola oil fatty acids (i.e. fatty acids derived from low erucic acid rapeseed oil), sunflower seed oil fatty acids, sesame seed oil fatty acids, safflower oil fatty acids, fractionated palm oil fatty acids, palm kernel oil fatty acids, coconut oil fatty acids, tallow fatty acids and lard fatty acids.

The nondigestible polyol polyesters that are liquid are those which have minimal or no solids at body temperatures (i.e., 98.6°F, 37°C). These liquid polyol polyesters typically contain ester groups having a high proportion of C₁₂ or lower fatty acid radicals or else a high proportion of C₁₈ or higher unsaturated fatty acid radicals. In the case of those liquid polyol polyesters having high proportions of unsaturated C₁₈ or higher fatty acid radicals, at least about half of the fatty acids incorporated into the polyester molecule are typically unsaturated. Preferred unsaturated fatty acids in such liquid polyol polyesters are oleic acid, linoleic acid, and mixtures thereof.

The following are nonlimiting examples of specific liquid polyol polyesters suitable for use in the present invention: sucrose tetraoleate, sucrose pentaoleate, sucrose hexaoleate, sucrose heptaoleate, sucrose octaoleate, sucrose hepta- and octaesters of unsaturated soybean oil fatty acids, canola oil fatty acids, cottonseed oil fatty acids, corn oil fatty acids, peanut oil fatty acids, palm kernel oil fatty acids, or coconut oil fatty acids, glucose tetraoleate, the glucose tetraesters of coconut oil or unsaturated soybean oil fatty acids, the mannose tetraesters of mixed soybean oil fatty acids, the

galactose tetraesters of oleic acid, the arabinose tetraesters of linoleic acid, xylose tetralinoleate, galactose pentaoleate, sorbitol tetraoleate, the sorbitol hexaesters of unsaturated soybean oil fatty acids, xylitol pentaoleate, and mixtures thereof.

The liquid polyol polyesters suitable for use herein can be prepared by a variety of methods known to those skilled in the art. These methods include: transesterification of the polyol (i.e. sugar or sugar alcohol) with methyl, ethyl or glycerol esters containing the desired acid radicals using a variety of catalysts; acylation of the polyol with an acid chloride; acylation of the polyol with an acid anhydride; and acylation of the polyol with the desired acid, per se. (See, for example, U.S. Patent Nos. 2,831,854, 3,600,186, 3,963,699, 4,517,360 and 4,518,772, all of which are incorporated by reference. These patents all disclose suitable methods for preparing polyol polyesters.)

C. Solid Polyol Polyester Component

A second key component of the nondigestible fat compositions of this invention comprises relatively small nondigestible solid particles of certain polyol polyester material that are dispersed in the liquid nondigestible oil to control or prevent passive oil loss. These particles can be in a variety of forms and shapes, including spherulitic, platelet-like, filament-like, or rod-like, or combinations of these various shapes, but are typically spherulitic or platelet-like. The thickness of these particles is typically about 1 micron or less. Thinner particles, however, are preferred from a standpoint of providing more efficient passive oil loss control of the liquid nondigestible oil component of the compositions herein. Accordingly, these particles preferably have a thickness of 0.1 micron or less, more preferably 0.05 micron or less. These particles also have a complete melting point above about 37°C, preferably above about 50°C, more preferably above about 60°C.

The polyol polyester material which forms these nondigestible particles should have a complete melting point as measured by the Differential Scanning Calorimetry (DSC) described hereinafter in the Analytical Methods section which is sufficiently high such that the nondigestible particles themselves will have the hereinbefore specified melting point characteristics when such particles are dispersed

in the liquid nondigestible oil. For example, a polyol polyester material having a complete melting point right at 37°C may not form solid particles having a complete melting point above about 37°C when such particles are dispersed in the liquid nondigestible oil. Thus, in some cases, the complete melting point of the neat polyol polyester material may have to be slightly higher than 37°C, e.g., about 40°C or higher, in order to form solid particles having a complete melting point of 37°C when such particles are combined with the liquid nondigestible oil.

These nondigestible particles can generally be dispersed as discrete, unaggregated entities in the liquid nondigestible oil. However, these nondigestible particles can also cluster together to form much larger aggregates which are dispersed in the liquid nondigestible oil. This is particularly true of those nondigestible particles that are platelet-like in form. Aggregates of platelet-like nondigestible particles typically assume a spherulitic shape that is porous in character and thus capable of entrapping significant amounts of liquid nondigestible oil. It is believed that this porous structure and its concomitant ability to entrap large amounts of liquid nondigestible oil is why these aggregated, platelet-like particles, while not as efficient as the particles in unaggregated form, can provide very effective and efficient passive oil loss control.

The polyol polyester material which forms the solid particles used in the fat compositions herein essentially comprises at least some material in the form of polymerized polyol polyesters, i.e., polyol polyester polymers. Polyol polyester polymers for purposes of this invention are those polyol polyester materials formed by polymerizing a polyol polyester monomer to provide a molecule having at least two separate esterified polyol moieties linked by covalent bonds between ester groups of these different polyol moieties. For example, two sucrose octabehenate monomers could be cross-linked between fatty acids to form a polymer. Repeating units of such polyol polyester polymers can be the same or different such that the generic term "polymer" in this context includes the specific term "copolymer". The number of repeating monomer (or co-monomer) units which make up such polyol polyester polymers can range from about 2 to 20, preferably from about 2 to about 12. Depending on the method of preparing them,

the polyol polyester polymers are frequently oligimers containing from about 2 to 4 monomeric units, i.e., are dimers, trimers, or tetramers. The most typical type of polyol polyester polymer for use herein is dimer.

As with the liquid nondigestible oil component of the compositions herein, the most preferred polyol for forming the polyol polyester polymer component comprises sucrose. When sucrose is used, furthermore, it is preferably completely esterified with fatty acid or other ester group-forming acid radicals. Using sucrose as the polyol, completely esterified sucrose polyester monomer, dimer, and trimer are shown schematically in Figures 1a, 1b, and 1c, respectively. When sucrose is the polyol and the fatty acid ester-forming radicals are selected as hereinafter described in greater detail, the sucrose polyester polymers used in the nondigestible fat compositions herein can advantageously have a number average molecular weight of from about 4000 to 60,000, preferably from about 4000 to 36,000, more preferably from about 5000 to 12,000.

The nature of the ester-forming radicals which form the polyol polyester polymer materials is also important in determining the suitability of such polyol polyester polymer materials for use in the fat compositions herein. For purposes of this invention, at least about 15%, preferably at least about 45%, more preferably at least about 75%, and most preferably at least about 90% of the hydroxyl groups of the polyol polyester polymer material should be esterified with long chain (C₂₀ or higher) saturated fatty acid radicals,

The polymer-containing polyol polyester material which forms the solid particles for use in the fat compositions herein may also comprise unpolymerized polyol polyester monomer material. Such monomers are those which contain only one polyol moiety per molecule, which polyol contains 4 to 8 hydroxyl groups, at least 4 of which are esterified. The ester-forming acid radicals on such polyol polyester monomers are, like the ester groups on the polymer materials, also preferably formed from long chain (C₂₀ or higher) saturated fatty acid radicals in the amounts hereinbefore specified for the polymer materials. Further, some of the ester groups of the polyol polyester monomer material may be formed by esterifying the single polyol moiety with polymerized (e.g., dimerized) fatty acid radicals.

Suitable long chain saturated fatty acid radicals for use in preparing the polyol polyester polymers and monomers used herein are those which contain at least 20, preferably from 20 to 26, most preferably 22, carbon atoms. The long chain saturated fatty acid radicals can be used singly, or in mixtures with each other, in all proportions. In addition, straight chain (i.e., normal) fatty acid radicals are typical for the long chain saturated fatty acid radicals. Examples of suitable long chain saturated fatty acid radicals are eicosanoate (arachidate), docosanoate (behenate), tetracosanate (lignocerate), and hexacosanoate (cerotate).

Mixed fatty acid radicals from oils which contain substantial amounts of the desired long chain fatty acids can be used as sources of acid radicals in preparing the polyol polyester materials used to form the solid particles used in the present invention. The mixed fatty acids from such source oils should preferably contain at least about 30% (more preferably at least about 50%, most preferably at least about 80%) of the desired long chain saturated fatty acids. For example, hardened (i.e., hydrogenated) high erucic acid rapeseed oil fatty acids can be used in place of a mixture of the respective long chain saturated fatty acids having from 20 to 26 carbon atoms. Preferably, the C₂₀ or higher saturated fatty acids (or their derivatives, i.e., methyl esters) are concentrated, for example, by distillation.

Suitable polyol polyester material which forms the solid nondigestible particles used in the fat compositions herein will generally comprise from about 1% to about 100% of the polyol polyester polymer component and from 0% to about 99% of the unpolymerized polyol polyester monomer component. Preferably, this solid polyol polyester material comprises from about 10% to about 100% of the polyol polyester polymer component and from about 0% to about 90% of the monomer component. More preferably such material comprises from about 30% to 100% of the polymer component and from 0% to about 70% of the monomer component. Most preferably such material comprises from about 50% to 100% of the polymer component and from 0% to about 50% of the monomer component.

The solid polyol polyester material suitable for forming the solid particles used herein must contain at least some polyol


polyester polymer. One way to prepare this material is by synthesizing monomeric polyol polyester according to known polyol esterification, transesterification and/or interesterification methods and by then polymerizing these monomers. The polymerization step can be initiated and promoted by any of a number of well known methods, including, but not limited to, photochemical reactions and reactions with transition metal ions, heat or free radical initiators such as di-tert-butyl peroxide.

Alternatively, polyol polyester polymers can be prepared directly by esterifying and/or interesterifying the polyol material with polybasic polymerized fatty acids or their derivatives. Since the sucrose polyesters are preferred materials for use in the present invention, the various types of suitable solid polyol polyester preparation methods will be exemplified by describing sucrose polyester synthesis. One such synthesis method involves reacting the acid chlorides or acid anhydrides of the desired esterifying acids with sucrose, preferably using a sequential esterification process to produce sucrose containing two different types of ester groups. In this sequential esterification process, sucrose is initially partially esterified with one type of fatty acid chloride, for example, dimer fatty acid chlorides, followed by complete or substantially complete esterification of this initial reaction product with another acid chloride type, e.g., with a long chain unpolymerized saturated fatty acid chloride, in that order, or in reverse order. (See Letton; European Patent 311,154; Published April 12, 1989, incorporated herein by reference).

Another method for preparing the solid polyol polyester material is by the process of reacting the methyl esters of the desired acids with sucrose in the presence of a fatty acid soap and a basic catalyst such as potassium carbonate. (See, for example, Rizzi et al; U.S. Patent 3,963,699; Issued June 15, 1976, Volpenhein; U.S. 4,518,772; Issued May 21, 1985, and Volpenhein; U.S. Patent 4,517,360; Issued May 14, 1985, all of which are incorporated by reference.) When using this methyl ester route to prepare, for example, diversely esterified sucrose polyesters, the octaester of one of the types of acids (e.g., dimer fatty acids, or long chain saturated fatty acids) can be prepared first, followed by partially interesterifying this initial

reaction product with the methyl ester of the other type of acid. In another preferred way of preparing solid polyol polyester material using methyl ester derivatives, the methyl esters of long chain saturated fatty acids are reacted with sucrose in a first stage at about 135°C to obtain partial esters of sucrose. The methyl esters of dimer fatty acids or other polybasic fatty acids are then added to the reaction and the temperature is dropped to 90°-120°C, as necessary, (and reflux, if required, as with adipic acid methyl esters, for example) to obtain the desired degree of esterification, is maintained by adjusting pressure and/or temperature.

When using the acid chloride or methyl ester procedures herein described to esterify the polyol with already polymerized fatty acids, a wide variety of pre-polymerized fatty acid materials can be used. One such class of suitable polymerized fatty acids comprises long-chain, aliphatic, dibasic acids having from about 28 to about 44 carbon atoms in the molecule. They are generally formed from unsaturated fatty acids having from about 14 to about 22 carbon atoms which can be polymerized. For example, linoleic acid can be polymerized by heating to form linoleic acid dimer as follows:

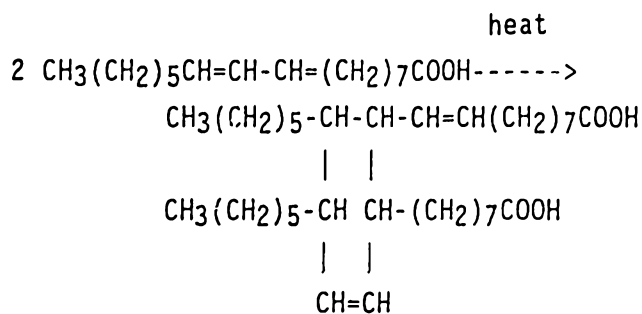

Common examples of such polymerizable acids are those containing two or more double bonds (polyunsaturated acids) such as the octadecadienoic acids containing two double bonds, for example, the above-mentioned linoleic acid, and the octadecatrienoic acids containing 3 double bonds, for example, linolenic and eleostearic acids. Other common polymerizable polyunsaturated acids having from about 14 to about 22 carbon which can be used to prepare the polyol polyester polymers herein are other octadecatrienoic acids (e.g., licanic acid), actadectetraenoic acid (e.g., parinaric acid), eicosadienoic acid, eicostetraenoic acid (e.g., arachidonic acid), 5,13-docosadienoic acid and clupanodonic acid. Monounsaturated fatty acids, such as oleic.

elaidic and erucic acids, can also be used in preparing suitable long chain fatty acid dimers used to form the solid particles used in the present invention.

Mixed fatty acid radicals from source oils which contain substantial amounts of the desired polyunsaturated or monounsaturated fatty acids can be used as sources of acid radicals in preparing the polyol polyester materials used to form the solid particles used in the present invention. The mixed fatty acids from such source oils should preferably contain at least about 30% (more preferably at least about 50%, most preferably at least about 80%) of the desired polyunsaturated or monounsaturated fatty acids.

Illustrative of natural sources which are rich in linoleic acid are soybean oil, cottonseed oil, peanut oil, corn oil, sesame seed oil, sunflower seed oil, safflower oil, linseed oil and perrilla oil. Oiticica oil is a particularly good source of licanic acid and tung oil contains a high concentration of eleostearic acid. Fish oils, such as herring, manhaden, pilchard, salmon and sardine oil are also suitable sources of polymerizable acids, particularly the higher fatty acids such as arachidonic and clupanodonic acids. Other oils such as tall oil, dehydrated castor oil, olive oil and rapeseed oil also contain significant proportions of suitable unsaturated acids. For example, olive oil is rich in oleic acid and rapeseed oil is rich in erucic acid.

Preferred polybasic polymerized fatty acids and fatty acid derivatives include dibasic acids produced by dimerization of the fatty acids or fatty acid lower esters derived from polyunsaturated vegetable oils such as soybean oil or cottonseed oil or from animal fats such as tallow.

These polybasic polymerized fatty acids may be made by a variety of methods known to those skilled in the art. (See Lutton; U.S. Patent 3,353,967; Issued November 21, 1967, Goebel; U.S. Patent 2,482,761; Issued September 27, 1949, Harrison et al; U.S. Patent 2,731,481; Issued January 17, 1956 and Barrett et al; U.S. Patent 2,793,219; Issued May 21, 1957, all of which are incorporated herein by reference.)

As noted, a mixture of both polymerized and unpolymerized polyol polyester material can be prepared by reacting the polyol with both

polymerized and unpolymerized esterifying fatty acids or fatty acid derivatives. In a preferred method for preparing particularly desirable solid sucrose polyester material comprising sucrose polyester polymers, fractionated or unfractionated high erucic acid rapeseed (HEAR) methyl esters are partially polymerized, hardened and then reacted with sucrose. Another method of making these especially desirable solid sucrose polyesters is to make liquid sucrose polyester material esterified with fatty acid groups of high erucic acid rapeseed oil by a conventional process, to then partially polymerize the resulting liquid sucrose polyester material, and to then harden the resulting polymerized material.

D. Preparation of Nondigestible Fat Compositions Which Exhibit Minimal Passive Oil Loss

To prepare the nondigestible fat compositions herein which exhibit passive oil loss control, the liquid nondigestible oil is combined with the particles of the at least partially polymerized solid polyol polyester material hereinbefore described. The polyol polyester particles are used in an amount sufficient to control or prevent passive oil loss. What constitutes "an amount sufficient to control or prevent passive oil loss" for any given fat composition depends on the particular solid polyol polyester utilized therein, the particular passive oil loss control benefits desired, and the level of waxiness mouth impression which can be tolerated for the particular nondigestible fat composition which is formulated. Typically, the fat composition so formed will comprise from about 60% to about 99% of the liquid nondigestible oil and from about 1% to about 40% of the solid polyol polyester particles. Preferably, this mixture comprises from about 85% to about 99% liquid nondigestible oil and from about 1% to about 15% solid polyol polyester particles, more preferably from about 90% to about 99% liquid nondigestible oil and from about 1% to about 10% solid polyol polyester particles, and most preferably from about 95% to about 99% liquid nondigestible oil and from about 1% to about 5% solid polyol polyester particles. The use of higher levels of liquid nondigestible oil (i.e., lower levels of solid polyol polyester particles) may be desirable from the standpoint of reducing the waxiness impression left by the solid components of the nondigestible fat composition herein. However, higher levels of solid polyol

polyester particles (i.e., lower levels of liquid nondigestible oil) are desirable from the standpoint of controlling or preventing passive oil loss associated with the ingestion of compositions containing such liquid nondigestible oils.

The combination of liquid nondigestible oil and solid polyol polyester particles is typically formed by simply mixing the liquid and solid components together, by heating the mixture until the solid polyol polyester material melts or dissolves in the oil and then by cooling the mixture to a suitable crystallization temperature, e.g., room temperature, which causes polyol polyester particles to form.

The specific size of the polyol polyester particles formed in the fat compositions herein will be dependent upon the rate at which the heated combination of oil and dissolved solid is cooled. As used herein, cooling rate is defined as the temperature differential between (a) the heated oil/dissolved solid combination and (b) the cooled crystallized liquid/solid particle combination, divided by the time taken to create this temperature differential. Generally the greater the cooling rate employed in forming the fat compositions herein, the smaller will be the particles of solid polyol polyester material dispersed in such compositions. Desirable cooling rates for use in forming the fat compositions herein are typically greater than 1.8°C/min (1°F/min), preferably greater than 9°C/min (5°F/min), more preferably greater than 18°C/min (10°F/min), and most preferably greater than 90°C/min (50°F/min). When the nondigestible fat compositions herein are to be formed in situ, for example, within a food product of which they form a part, then the type and concentration of the fat composition components should be selected so that the cooling profile experienced by the food product will result in formulation of the desired amount and size of the solid polyol polyester particles within the food product.

The formation of thin nondigestible particles according to the present invention provides especially efficient passive oil loss control for the resulting fat composition. Such efficiency permits a reduction in solids content of the nondigestible fat to relatively low levels (e.g., to from about 1% to about 15%). This reduction in solids levels required for passive oil loss control, together with the minimal/no change in solids between typical room and body

temperatures, leads to nondigestible fats having a less waxy tasting impression.

Both the liquid nondigestible oil and the solid nondigestible polyol polyester components, as well as the respective concentrations, are selected in order to provide nondigestible fat compositions having a certain set of physical characteristics. In particular, the nondigestible fats of the present invention should exhibit a relatively flat Solid Fat Content (SFC) profile slope across the temperature range of from room temperature to body temperature, i.e., from 70°F to 98.6°F. The SFC profile slope between these two temperatures should be from 0 to about -0.75 %solids/°F, preferably from 0 to -0.5 %solids/°F, more preferably from 0 to about -0.3 %solids/°F, and most preferably from 0 to about -0.1 %solids/°F. The method for determining SFC profile slope of the fat compositions herein is described hereinafter in the Analytical Methods section.

E. Food Products with Nondigestible Fat Compositions

The nondigestible fat compositions of the present invention can be used in various edible fat-containing products including foods, beverages, and pharmaceuticals, either alone or in combination with digestible fats and oils. In particular, the nondigestible fats of the present invention can be optionally formulated with a digestible triglyceride fat or oil. Generally, these formulations can comprise from about 10% to 100% nondigestible fat and from 0% to about 90% digestible triglyceride fat or oil. Preferably, these formulations comprise from 35% to 100%, more preferably from about 50% to about 100% and most preferably from about 75% to about 100% nondigestible fat, and from 0% to about 65%, more preferably from 0% to about 50%, and most preferably from 0% to about 25%, digestible triglyceride fat or oil. Because of the potential caloric impact of these triglyceride fats or oils, it is desirable to minimize the level at which they are combined with the nondigestible fat compositions of the present invention.

As used herein, the term "triglyceride oil" refers to those triglyceride compositions which are fluid or liquid above about 25°C. Although not a requirement, the triglyceride oils useful in the present invention can include those which are fluid or liquid below 25°C. These triglyceride oils consist primarily of triglyceride

materials, but can also include residual levels of other components such as mono- and diglycerides. To remain fluid or liquid at temperatures below 25°C, the triglyceride oil contains a minimal amount of glycerides having melting points higher than about 25°C so as to limit the solids increase when the triglyceride oil is cooled. It is desirable that the triglyceride oil be chemically stable and resistant to oxidation.

Suitable triglyceride oils can be derived from naturally occurring liquid vegetable oils such as cottonseed oil, soybean oil, safflower oil, corn oil, olive oil, coconut oil, palm kernel oil, peanut oil, rapeseed oil, canola oil (i.e., rapeseed oil low in erucic acid), sesame seed oil, sunflower seed oil, and mixtures thereof. Also suitable are liquid oil fractions obtained from palm oil, lard and tallow by, for example, graining or directed interesterification, followed by separation of the oils. Oils predominating in glycerides of unsaturated acids can need some hydrogenation to maintain flavor, but care should be taken not to greatly increase the amount of glycerides melting above 25°C. When oils are selected which have a larger amount of solids melting between 25° and 40°C than are desirable, it can be necessary to separate out the solids. For example, refined and slightly hydrogenated soybean oil is suitable, as well as refined cottonseed oil.

As used herein, the term "triglyceride fat" refers to those triglyceride compositions which are solid or plastic above about 25°C. These solid or plastic fats can be derived from plants or animals or can be edible synthetic fats or oils. For example, animal fats such as lard, tallow, oleo oil, oleo stock, oleo stearin and the like which are solid at room temperature can be utilized. Also, triglyceride oils, e.g. unsaturated vegetable oils, can be converted into plastic fats by partial hydrogenation of the unsaturated double bonds of fatty acid constituents of the oil followed by conventional chilling and crystallization techniques or by proper mixture with sufficient triglycerides which are solid at room temperature to form a rigid interlocking crystalline structure which interferes with the free-flowing properties of the liquid oil. See Purves et al; U.S. Patent 3,355,302; Issued November 28, 1967, and Darragh et al; U.S. Patent 3,867,556; Issued February 18, 1975 (both incorporated herein by

reference), for further examples of solid or plastic fats. Because the solid or plastic fats add an appreciable level of solids, their inclusion can cause adverse effects on the organoleptic properties, in particular waxiness, of the edible compositions of the present invention.

Triglyceride fats and oils useful in the nondigestible fat compositions of the present invention can include certain triglycerides in which one, two or three of the OH groups of the glycerol molecule have been substituted with acetyl, propionyl, butyryl, caproyl, caproyl, or capryl radicals, and the remaining OH groups of the glycerol molecule (if any) have been substituted with acyl radicals of saturated or unsaturated fatty acids having from 12 to 24 carbon atoms.

The nondigestible fat materials of this invention can also be used in combination with reduced calorie medium chain and mixed medium/long chain triglycerides such as are disclosed in Ehrman et al; U.S. Pat. 4,888,196; Issued December 19, 1989 and Seiden; European Patent 322,027; Published June 28, 1989, both incorporated herein by reference.

The nondigestible fat compositions according to the present invention can be used in or as shortening and oil products. The shortening and oil products can be used in frying applications such as the preparation of french fried potatoes, potato chips from potato slices or fabricated potato pieces, potato sticks, corn chips, tortilla chips, donuts, chicken, fish, and fried pies (e.g. turnovers). The shortening and oil products can also be used in preparing baked goods in any form, such as mixes, shelf-stable baked goods, and frozen baked goods, including, but not limited to, cakes, granola bars, brownies, muffins, bar cookies, wafers, biscuits, pastries, pies, pie crusts, and cookies, including sandwich cookies, chocolate chip cookies, particularly storage stable dual-texture cookies as disclosed in Hong et al.; U.S. Patent 4,455,333; Issued June 19, 1984. These baked goods can contain fruit, cream, or other fillings. Other baked goods uses include breads and rolls, crackers, pretzels, pancakes, waffles, ice cream cones and cups, yeast-raised bake goods, pizza and pizza crust, and baked farinaceous snack products and other baked salted snacks.

Other edible fat-containing products which contain the nondigestible fat compositions of this invention include ice cream, frozen desserts, cheese, cheese spreads, meats, meat analogs, chocolate confections, salad dressings, mayonnaise, margarine, spreads, sour cream, yogurt, coffee creamer, peanut butter, extruded snacks such as corn curls, corn puffs, pellet snacks, half products and other extruded snacks based on corn or other cereal grains such as wheat, rice and the like, roasted nuts and beverages such as milkshakes.

Edible fat-containing products which contain the fat compositions of the present invention can also include noncaloric or reduced calorie sweeteners alone or in combination with bulking agents. These noncaloric or reduced calorie sweeteners include, but are not limited to, aspartame, saccharin, alitame, thaumatin, dihydrochalcones, acesulfame, and cyclamates.

Bulking or bodying agents which can also be useful in edible fat-containing products containing the nondigestible fat compositions herein include partially or wholly nondigestible carbohydrates, for example, polydextrose and cellulose or cellulose derivatives, such as D, L-sugars, carboxymethylcellulose, carboxymethylcellulose, hydroxypropylcellulose, methylcellulose, hydroxypropyl methylcellulose, and microcrystalline cellulose. Other suitable bulking agents include gums (hydrocolloids), starches, dextrans, fermented whey, tofu, maltodextrins, polyols, including sugar alcohols, e.g., sorbitol and mannitol, and carbohydrates, e.g., lactose.

The edible fat-containing products containing the nondigestible fat compositions herein can also include dietary fibers. By "dietary fiber" is meant complex carbohydrates resistant to digestion by mammalian enzymes, such as the carbohydrates found in plant cell walls and seaweed, and those produced by microbial fermentation. Examples of these complex carbohydrates are brans, celluloses, hemicelluloses, pectins, gums and mucilages, seaweed extract, and biosynthetic gums. Sources of the cellulosic fiber include vegetables, fruits, seeds, cereals, and man-made fibers (for example, by bacterial synthesis). Commercial fibers such as purified plant cellulose, or cellulose flour, can also be used. Naturally occurring fibers can be used, such as psyllium and fibers from whole citrus peel, citrus albedo, sugar

beets, citrus pulp and vesicle solids, apples, apricots, and watermelon rinds.

These dietary fibers can be in a crude or purified form. The dietary fiber used can be of a single type (e.g., cellulose), a composite dietary fiber (e.g., citrus albedo fiber containing cellulose and pectin), or some combination of fibers (e.g., cellulose and a gum). The fibers can be processed by methods known to the art.

The nondigestible fat compositions of the present invention can be fortified with vitamins and minerals, particularly the fat-soluble vitamins. The fat-soluble vitamins include vitamin A, vitamin D, and vitamin E and their precursors. (See Mattson; U.S. Patent 4,034,083; Issued July 5, 1977, herein incorporated by reference, which discloses fat-soluble vitamins useful in fortifying polyol fatty acid polyesters.)

Various other ingredients typically present in fat products can also be included in the nondigestible fat compositions of the present invention. These other ingredients include stabilizers to help protect against oxidative deterioration at high temperatures. Silicone oils, particularly methyl and ethyl silicone oils, are useful for this purpose. Methyl silicones have also proven effective in reducing the rate of polymerization during frying. Other additives typically included in fat products such as minor amounts of optional flavorings, emulsifiers, anti-spattering agents, anti-sticking agents, antioxidants or the like can also be present.

F. Alternative Utility for the Polymer-Containing Solid Polyol Polyester Particles

It has been found that the solid polymer-containing polyol polyester particles useful as oil loss control agents in the nondigestible fat composition herein are also effective for use as thickening agents in conventional digestible triglyceride oils and oil containing products. Accordingly, these solid polyol polyesters particles can be used as "thickening agents" or "hardstocks" by blending them in amounts of about 2% to about 20% (preferably from about 2% to about 15%, most preferably from about 2% to about 8%) with liquid digestible oils in the formulation of cooking and salad oils or semi-solid food products such as shortenings, as well as other food products which contain a combination of fat and non-fat ingredients, e.g.,

margarines, mayonnaise, frozen dairy desserts and the like. The oils for these compositions can comprise conventional digestible triglyceride oils such as cottonseed, corn, canola or soybean, or medium or medium and long chain triglycerides.

G. Analytical Methods

A number of parameters used to characterize elements of the present invention are to be quantified by particular experimental analytical procedures. Each of these procedures is described in detail as follows:

1. Fatty Acid Composition of Polyol Polyesters

The fatty acid composition (FAC) of the polyol polyesters can be determined by gas chromatography, using a Hewlett-Packard Model S712A gas chromatograph equipped with a flame ionization detector and a Hewlett-Packard Mode 17671A automatic sampler. The chromatographic method used is described in Official Methods and Recommended Practices of the American Oil Chemists Society, 4th Ed., 1989, Procedure 1-Ce62 (incorporated herein by reference).

2. Ester Distribution of Sucrose Polyesters

The relative distribution of the individual octa-, hepta-, hexa- and penta- esters, as well as collectively the tetra- through mono- esters, of the sucrose polyesters can be determined using normal-phase high performance liquid chromatography (HPLC). A silica gel-packed column is used in this method to separate the polyester sample into the respective ester groupings noted above. Hexane and methyl-t-butyl ether are used as the mobile phase solvents. The ester groupings are quantitated using a mass detector (i.e. an evaporative light-scattering detector). The detector response is measured and then normalized to 100%. The individual ester groups are expressed as a relative percentage.

3. Slope of Solid Fat Content (SFC) Profile of Nondigestible Fat Measured in °F

Before determining the SFC values, a sample of the nondigestible fat is heated to a temperature of 140°F (60°C) or higher for at least

30 minutes or until the sample is completely melted. The melted sample is then tempered as follows: at 80°F (26.7°C) for 15 minutes; at 32°F (0°C) for 15 minutes; at 80°F (26.7°C) for 30 minutes; at 32°F (0°C) for 15 minutes. After tempering, the SFC values of the sample at temperatures of 50°F (10°C), 70°F (21.1°C), 80°F (26.7°C), 92°F (33.3°C), and 98.6°F (37°C) are determined by pulsed nuclear magnetic resonance (PNMR) after equilibration for 30 minutes at each temperature. The slope of the SFC profile is calculated by subtracting the SFC value at 70°F (21.1°C) from the SFC value at 98.6°F (37°C) and then dividing by 28.6. The method for determining SFC values by PNMR is described in J. Amer. Oil Chem. Soc., Vol. 55 (1978), pp. 328-31 (herein incorporated by reference, and A.O.C.S. Official Method Cd. 16-81, Official Methods and Recommended Practices of The American Oil Chemists Society, 4th. Ed., 1989, (herein incorporated by reference).

4. Complete Melting Point of Polyol Polyesters by Differential Scanning Calorimetry (DSC)

The complete melting point of the polyol polyester material or polyol polyester-containing particles used in this invention can be determined by DSC as follows:

Equipment:

Perkin-Elmer 7 Series Thermal Analysis System, Model DSC7, manufactured by Perkin-Elmer, Norwalk, CT.

Procedure:

1. Sample of polyol polyester material or polyol polyester-containing blend is heated to at least 10°C above the temperature at which all visible solids are melted and mixed thoroughly.
2. 10 ± 2 mg of sample is weighed into sample pan.
3. A scan is performed from about 10°C above the temperature at which all visible solids are melted to -60°C at 5°C per minute.
4. The temperature of the sample is maintained at -60°C for 3 minutes and scanned from -60°C to the original starting temperature at 5°C per minute (i.e., from about 10°C above the temperature at which all visible solids are melted).
5. The complete melt point is the temperature at the intersection of the base line (i.e. specific heat line) with the line tangent to

the trailing edge of the last (e.g., highest temperature) endothermic peak.

5. Thickness of Solid Polyol Polyester Particles (Light Microscopy)

The thickness of the solid polyol polyester particles formed in the nondigestible fat compositions herein may be estimated at room temperature with a Nikon Microphot video-enhanced light microscope (VELM) using Hoffman Modulation Contrast (HMC) optics according to the following method:

1. A small portion (i.e., 1-10mg) of the nondigestible fat sample with the solid polyol polyester particles dispersed therein is placed on a microscope slide and covered. The slide is placed under the microscope.
2. The sample is examined using a HMC 100X oil objective as the standard lens in conjunction with a 10X eyepiece lens.
3. A microscope-mounted video camera and associated controller are used for video enhancement to facilitate differentiation between the sample and the background.
4. The thickness of the solid polyol polyester particles is measured in μm .

This method permits differentiation of particles having thicknesses just within the resolution of the VELM (approximately 0.2 - 0.5 μm). Particle thickness of particles having smaller dimensions can be determined by the Freeze Fracture Method described hereinafter.

(Note: No special sample preparation is required, other than obtaining a representative sample. The samples should be melted and cooled ambiently.)

Reference: Robert Hoffman, "The Modulation Contrast Microscope: Principles and Performances", Journal of Microscopy, Vol. 110, Pt 3, August 1977, pp. 205-222.

6. Thickness of Solid Polyol Polyester Particles (Freeze Fracture Transmission Electron Microscopy)

The three-dimensional topography of polyol polyester particles and their size can be determined by a freeze-fracture transmission electron microscopy method.

This freeze-fracture method is carried out as follows:

1. The outside cavity of a freezing container is filled with liquid N₂ and the inner dewar of the freezing container is filled with liquid ethane (normal melting temperature of -172°C). The ethane is allowed to freeze.
2. A small amount (1-2 ul) of the nondigestible fat sample with the solid polyol polyester particles dispersed therein is placed in the well of a gold-plated Balzers specimen holder. (Note: for very fluid samples, 1-2 ul of sample is placed on a gold planchet (Balzers) and another planchet is placed on top of the first to form a sandwich.)
3. Most of the frozen ethane in the dewar is melted by inserting a metal heat sink (e.g., tweezers) into the dewar.
4. Immediately after melting the ethane, the specimen holder containing the nondigestible fat sample is picked up using a pair of tweezers and rapidly plunged into the liquid ethane.
5. After a few seconds, the specimen holder is removed from the ethane, quickly touched to the tip of a camel's hair brush to remove excess ethane, and immediately immersed in the liquid N₂ to keep the sample cold.
6. The sample is transferred under liquid N₂ to a JEOL JFD-9000C sample holder and then transferred into the chamber of a JEOL JFD-9000C freeze-fracture unit. The temperature of the unit should be about -175°C. Vacuum should be at least 8×10^{-7} torr.
7. A knife is cooled to a temperature of about -165°C.
8. The sample is fractured in the JEOL chamber using the pre-cooled knife.
9. Platinum-carbon is deposited onto the fractured sample at a 45° angle for 4.5 seconds, followed by carbon deposition at a 90° angle for 25 seconds to form a replica of the fractured sample. The high voltage is 2500 V and the current is 70 mA.
10. The samples are removed from the freeze fracture unit and cleaned using 3 washes of chloroform.
11. The replica is picked up on a 300 mesh copper EM grid and examined in a transmission electron microscope.
12. Images are recorded on negative film and positive prints are made from the negatives.

13. The thickness of the polyol polyester particles is measured in nm.

References:

Rash, J.E. and Hudson, C.S., Freeze Fracture: Methods, Artifacts, and Interpretations, New Haven Press, New York, 1979.

Stolinski and Breathnach, Freeze Fracture Replication of Biological Tissues, Academic Press, London, 1975.

Steinbrecht and Zierold, Cryotechniques in Biological Electron Microscopy, Springer-Verlag, Berlin, 1987.

7. Saponification Value of Solid Polyol Polyester

The solid polyol polyester sample can be saponified with refluxing alcoholic KOH according to the procedure described in Official Methods and Recommended Practices of the American Oil Chemists Society, 4th Ed., 1989, Procedure Cd 3-25. The resulting fatty acid soaps are titrated with standardized HCl to a phenolphthalein endpoint. A blank (no sample added) is also run through the procedure and titrated.

The Saponification Value can then be calculated according to the following equation:

$$SV = ((B - S) \times N \times 56.1) / W$$

Where B = vol. (mls) HCl required to titrate blank

S = vol. (mls) HCl required to titrate sample

N = normality of the HCl

W = sample weight in grams

8. Acid Value of Solid Polyol Polyester

The solid polyol polyester sample can be titrated with standardized KOH to a phenolphthalein endpoint. The procedure is described in Official Methods and Recommended practices of the American Oil Chemists Society, 4th Ed., 1989, Procedure Cd 3a-63. A blank (no sample added) is titrated also.

The Acid Value can then be calculated according to the following equation:

$$AV = ((A - B) \times N \times 56.1) / W$$

where A = volume in mls of KOH required to titrate sample

B= volume in mls of KOH required to titrate blank

N= normality of the KOH

W= sample weight in grams

9. Hydroxyl Value of Solid Polyol Polyester

The free hydroxyl groups of the sample can be quantitatively acetylated with acetic anhydride in pyridine. After acetylation, residual acetic anhydride is hydrolyzed with excess water and the acetic acid remaining is titrated with standardized ethanolic KOH to a phenolphthalein endpoint. A blank (no sample added) is run through the procedure and titrated also. The procedure is described in Official Methods and Recommended Practices of the American Oil Chemists Society, 4th Ed., 1989, Procedure Cd 13-60.

The Hydroxyl Value can then be calculated according to the following equation:

$$HV = (((B-S) \times N \times 56.1) / W) + AV$$

where B= volume in mls of KOH required to titrate the blank

S= volume in mls of KOH required to titrate the sample

N= normality of the KOH

AV= acid value of the sample (described hereinabove)

10. Polymer Content of Solid Polyol Polyester Material

The relative amounts of monomer and total polymer material (e.g., sucrose polyester dimer, trimer, tetramer, etc.) in the solid polyol polyester particle material can be determined using size exclusion chromatography. This method uses a Hewlett-Packard HP-1090 liquid chromatography system (LC) in combination with a Polymer Laboratories 60 cm x 7.5 mm, 500A porosity 5 um column. The LC is set up to run under the following conditions:

Injection Volume	20 uL/min
Flow Rate	1.0 uL/min
Mobile Phase	Filtered & Degassed tetrahydrofuran (THF)
Detector Attenuation	32 X
Detector Temperature	40°C
Chart Speed	5.0 mm/min

A solid polyol polyester sample (0.75 grams) is dissolved in 25cc of THF, and then 20 microliters of this solution is injected into the LC system. The column separates the sample into monomer and polymer. The fractions are analyzed by a refractive index detector (Erma Optical Works ERC-7512). The detector response is then measured by an integrator. Relative peak areas eluting earlier than polyol polyester monomer are manually summed to report % polymer.

The various fractions (e.g., monomer, dimer, trimer and tetramer and higher) are resolved into individual peaks on a strip chart. The monomer peak is identified by comparison with a previously run monomer standard. The elution order (increasing time) is tetramer and higher, trimer, dimer, and monomer. The instrument calculates the area under each peak. The weight percent of an individual polymeric species is the area under the species peak, divided by the sum of the areas under all the peaks.

H. Specific Examples

Preparation of the nondigestible fat compositions of the present invention is illustrated by the following examples:

Example I

Solid Sucrose Polyester Preparation

Solid sucrose polyester material for use in a nondigestible fat composition is prepared by reacting sucrose with the methyl esters of both behenic acid and dimerized distilled tallow fatty acids.

Behenic Methyl Ester Preparation

Behenic methyl esters are prepared from hydrogenated high erucic rapeseed oil. About 870 grams of hydrogenated high erucic rapeseed oil, about 174 grams of methanol, and about 12.2 grams of sodium methoxide solution (25% in methanol) are added to a spherical 3-liter glass reactor. The reactor has a heating mantle, thermometer, temperature controller, reflux condenser, variable speed agitator, vacuum take-off, and bottom outlet. The mixture is reacted at about 65°C for approximately 1.5 hours, while refluxing the methanol. The agitation is stopped, and the glycerin by-product of the rapeseed oil is allowed to settle for about 30 minutes. The glycerin settles to the bottom of the reactor, and is removed through the bottom outlet. About 30 additional grams of methanol, and about 5.2 grams of sodium methoxide solution (25% in methanol) are added to the glass reactor, and the

mixture is reacted at about 65°C for about 30 minutes. The agitation is stopped, the glycerin is settled for about 30 minutes, and removed through the bottom outlet. About 100 grams of water are added to the mixture, stirred, allowed to settle, and removed through the bottom outlet. The water-washing procedure is repeated two more times. The reflux condenser is removed, and vacuum is applied to the reactor, and the residual water and methanol are evaporated. The vacuum is broken, and a glass fractionation column is added to the reactor. The reactor is heated to about 170°-200°C under a vacuum of about 0.3-1.0 mm Hg. Approximately 50% of the first material to evaporate from the column is collected and discarded. The next 40% (approximately) of material to evaporate from the column is collected a product. This product is approximately 92% by weight methyl behenate and has the composition set forth hereinafter in Table I.

Dimer Methyl Ester Preparation

About 100 grams of dimer fatty acids prepared from fractionated, distilled tallow fatty acids (Henkel 1008 dimer fatty acid) are added to a 1-liter glass reactor along with about 300 ml of Supelco BF₃ (boron trifluoride)/methanol solution. The reactor is agitated with a paddle stirrer, has a heating mantle with temperature controller, a thermometer, an addition funnel, and a water-cooled reflux condenser. The temperature of the reactor is raised to about 65°-70°C, and kept there for about 2 hours. At the end of about 2 hours, an additional 100 ml of BF₃/methanol is added to the mixture, dropwise, through the addition funnel over the course of about an hour. The mixture is transferred to a large separation funnel and the phases are allowed to separate. The methanol layer is removed, then about 50 grams of hexane is added to the mixture in the separation funnel and mixed thoroughly. This mixture is washed with about 50 grams of distilled water, the water layer is allowed to separate, and then removed. The water-washing procedure is repeated two more times. The mixture in the separatory funnel is transferred to a rotary evaporator, and the hexane is evaporated from the methyl esters. A base titration of the dried methyl esters is performed to ensure that the free fatty acid level is less than about 5%. The methyl esters are then run through a silica column to remove the remaining free fatty acid. The fractionated distilled tallow fatty acids from which the dimer fatty acids

and, subsequently, the dimer methyl esters, are prepared typically have the compositions set forth hereinafter in Table I.

Sucrose Esterification

About 72.8 grams of the dimer methyl esters are mixed with about 306.3 grams of the behenic methyl esters. The molar ratio of dimer fatty acids:C₂₂ is about 1:7. About 189.5 grams of this methyl ester mixture are added to a 1-liter spherical glass reactor along with about 34.4 grams of powdered sucrose, about 24 grams of powdered potassium stearate and about 1.4 grams of powdered potassium carbonate. The reactor has a heating mantle, thermometer, temperature controller, variable speed agitator, vacuum take-off, and bottom outlet. The mixture is agitated and heated at about 135°C at about 15 mm Hg vacuum for about 1.5 hours. The vacuum is then broken with nitrogen, and the remaining 189.6 grams (approximately) of the methyl ester mixture, along with about 1.4 grams of potassium carbonate are added to the reaction mixture. This mixture is reacted at about 135°C under about 0.5-5.1 mm Hg vacuum for about 5 hours. The mixture is cooled to about 75°C, and about 30 grams of water are added to the mixture. The mixture is transferred to jars and centrifuged (Fischer Scientific Model Marathon 10K Centrifuge) at about 2500 RPM for about 2 minutes. The liquid in the jars is then decanted from the soap layer at the bottom. About 5 grams of silica are added to the decanted liquid, and the mixture is stirred for about 30 minutes at about 75°C. The mixture is then filtered through filter paper using a Buchner funnel. The filtrate is then fed through a Pope 2-inch diameter wiped film evaporator at approximately 30 grams/hour to distill the unreacted methyl esters. The evaporator operates at about 235°C under about 0.04-0.05 mm Hg. The product is then collected from the evaporator and cooled to ambient temperature.

The resulting solid sucrose polyester product is about 53.0% polymer and about 47% monomer. The polymer material comprises about 19.8% dimer, about 11.8% trimer and about 21.4% tetramer and higher. 16.8% of the product is octaester.

Fat Composition Preparation

Four grams of this solid sucrose polyester product and 96 grams of liquid sucrose polyester, in which the sucrose is substantially completely esterified with fatty acid groups of cottonseed oil, are

mixed and heated until all the solids are dissolved. The mixture is then cooled back to room temperature at a rate of 33.3°F/min. The cooling brings about crystallization of the solid sucrose polyester material in the form of small, platelet-like particles which are dispersed in the liquid nondigestible oil. Figure 2 is a photomicrograph depicting the two-dimensional, platelet-like structure of these solid sucrose polyester particles dispersed in the liquid sucrose polyester material. The particles have a thickness of less than 25 nm as measured by Freeze Fracture TEM described hereinbefore in the Analytical Methods section.

The nondigestible fat composition of this Example I comprising the solid particles of sucrose polyester dispersed in the liquid sucrose polyester has an SFC profile slope of -0.1 as determined by the method described hereinbefore in the Analytical Methods section. This Example I composition is suitable for use as a food fat, and does not present the passive oil loss problem which would otherwise result if only the liquid sucrose polyester were to be used as a food fat. Also, as a result of the low solids levels used to prepare the Example I fat composition, food products made from this fat composition are not unacceptably waxy tasting.

The liquid sucrose polyester, the solid sucrose polyester and the starting materials for the solid sucrose polyesters have the attributes shown in Table I.

TABLE I

<u>FATTY ACID CONTENT</u>	<u>BEHENIC METHYL ESTERS (%)</u>	<u>TALLOW</u>	<u>SOLID SUCROSE POLYESTER</u>	<u>LIQUID SUCROSE POLYESTER (%)</u>
C ₁₄	----	6.0	----	0.2
C ₁₆	0.88	11.0	0.45	17.0
C ₁₈	1.4	<1.0	1.65	5.3
C _{18:1}	----	73.0	----	36.8
C _{18:2}	----	8.0	----	38.4
C _{18:3}	----	1.0	----	0.4
C ₂₀	4.37	----	6.61	----
C ₂₂	91.66	----	82.54	----
C ₂₄	1.53	----	0.08	----
Dimer Fatty Acid	----	----	8.30	----
Other	----	1.0	0.20	0.1

ESTER DISTRIBUTION

% Octa	****	****	****	78.8
% Hepta	****	****	****	20.8
% Hexa	****	****	****	<0.1
% Lower	****	****	****	0.3

**** = not applicable

Example IISolid Sucrose Polyester Preparation

Solid sucrose polyester material for use in a nondigestible fat composition is prepared by reacting sucrose with the methyl esters of behenic acid and dimerized distilled tallow fatty acids.

Behenic acid methyl esters are prepared from hydrogenated high erucic acid rapeseed oil (HEAR) in a procedure similar to that described in Example I, except that no fractionation column is used. At the end of the final water wash step, the reflux condenser is removed, vacuum is applied to the reactor, and the residual water and methanol are evaporated. The methyl esters are heated to about 170-200°C under

about 0.4-1.4 mm Hg vacuum and flash distilled. During distillation, only about 2% of the first material to distill is collected and discarded, while the next 90% is collected as product. About 36.4 grams of dimer methyl esters described in Example I are mixed with about 300 grams of these hydrogenated HEAR methyl esters. The molar ratio of dimer fatty acid to hardened HEAR is 0.5:7.5. About 168.2 grams of this methyl ester mixture are added to a 1-liter spherical glass reactor along with about 34.4 grams of powdered sucrose, about 24 grams of powdered potassium stearate and about 1.4 grams of powdered potassium carbonate. The mixture is agitated and heated at about 135°C at about 15 mm Hg vacuum for about 1.5 hours. After about 1.5 hours, the vacuum is broken with nitrogen, and the remaining 168.2 grams (approximately) of the methyl ester mixture, along with about 1.4 grams of potassium carbonate are added to the reaction mixture. This mixture is reacted at about 135°C under about 0.4-5.2 mm Hg vacuum for about 5 hours. The reaction product is finished and refined in a manner described in Example I.

The resulting solid sucrose polyester product is about 36.8% polymer and about 63.2% monomer. The polymer material comprises about 21.2% dimer, about 8.8% trimer, and about 6.9% tetramer and higher. The solid sucrose polyester also has the following properties: 44.3% octaester, Saponification Value 177.6, Hydroxyl Value 16.6, Acid Value 0. The fatty acid composition of the solid sucrose polyester is shown in Table II.

TABLE II

<u>FATTY ACID COMPOSITION</u>	<u>SOLID SUCROSE POLYESTER %</u>
C14	0.04
C16	3.55
C18	45.57
C20	10.71
C22	36.39
C24	0.46
Dimer Fatty Acid	3.07
Other	0.31

Fat Composition Preparation

Four grams of this solid polyol polyester are added to 96 grams of a liquid sucrose polyester of the type described in Example I. The mixture is heated until all of the solids are dissolved, and then cooled back to room temperature at a rate of 33.3°F/min to form a plastic fat composition consisting of 4% solid sucrose polyester and 96% liquid sucrose polyester. This composition is suitable for use as a food fat and does not present the passive oil loss problem which would otherwise result if only the liquid sucrose polyester were to be used as a food fat. Also, as a result of the low solids levels used to prepare the Example II fat composition, food products made from this fat composition are not unacceptably waxy tasting.

Example IIISolid Sucrose Polyester Preparation

Solid sucrose polyester material for use in a nondigestible fat composition is prepared by reacting the HEAR oil methyl esters with sucrose, polymerizing them, and hardening them.

HEAR oil methyl esters are prepared from (non-hardened) high erucic acid rapeseed oil (HEAR) in a procedure similar to that described in Example I, except that during the distillation, only about 2% of the first material to distill is collected and discarded, while

the remaining 90% is collected as product. The methyl esters have the compositions set forth in Table III.

About 320 grams of these HEAR methyl esters are added to a 3-liter glass reactor along with about 68.8 grams of powdered sucrose, about 48 grams of powdered potassium stearate and about 2.8 grams of powdered potassium carbonate. The reactor has a heating mantle, thermometer, temperature controller, variable speed agitator, vacuum take-off, and bottom outlet. The mixture is agitated and heated at about 135°C at about 15 mm Hg vacuum for about 1.5 hours. After about 1.5 hours, the vacuum is broken with nitrogen, an additional 320 grams (approximately) of HEAR methyl esters, along with about 1.4 grams of potassium carbonate are added to the reaction mixture. This mixture is reacted at about 135°C under about 1.2-7.4 mm Hg vacuum for about 5 hours. The reaction product is finished and refined in a manner similar to that described in Example I.

The refined HEAR sucrose polyester is added to a glass, stirred reactor, and stirred at atmospheric pressure and 185°C for 10 hours to partially polymerize the material. Some of the partially polymerized sucrose polyester is then added to a 600ml Parr stainless steel stirred autoclave along with about 2% supported nickel catalyst (United Catalyst). The reactor is pressurized with hydrogen to about 250 psig, and mixture is stirred at this pressure and about 400°C for about 3 hours. The reactor is then de-pressurized, the mixture removed and filtered (to remove the catalyst), and cooled to ambient temperature. The resulting product is polymer/C18-22 sucrose polyester solid.

This solid sucrose polyester product is about 14.6% polymer material and about 85.4% monomer. The polymer material comprises about 10.8% dimer and about 3.8% trimer. The solid polyol polyester product has an octaester content of 67.4%. The Hydroxyl Value of the solid sucrose polyester product is 14.2, the Saponification Value is 167.1, and the Acid Value is 1.9. The fatty acid composition of the solid sucrose polyester is shown in Table III.

Fat Composition Preparation

Four grams of this solid polyol polyester are added to 96 grams of the liquid sucrose polyester described in Example I. The mixture is heated until all of the solids are dissolved, and then cooled back

to room temperature at a rate of 33.3°F to form a plastic fat composition consisting of 4% solid sucrose polyester and 96% liquid sucrose polyester. This composition is suitable for use as a food fat and does not present the passive oil loss problem which would otherwise result if only the liquid sucrose polyester were to be used as a food fat. Also, as a result of the low solids levels used to prepare the Example III fat composition, food products made from this fat composition are not unacceptably waxy tasting.

TABLE III	
<u>HEAR Oil Methyl Ester Components</u>	Solid Sucrose Polyester

C8	----	----
C10	----	----
C12	----	0.24
C14	----	2.12
C16	3.1	3.08
C18:0	1.1	38.26
C18:1	13.0	----
C18:2	14.7	----
C18:3	7.2	----
C20	7.8	7.90
C22	47.9	43.48
C24	1.6	0.79
Dimer Fatty Acid	----	3.62
Other	0.6	0.57

Example IV

Norchip potatoes are used which have been sliced to a thickness of about 0.052 inches (0.13cm). The sliced potatoes are fried in a 5 pound batch fryer at a temperature of 365°F (185°C) for 3 minutes. Approximately 225 potato chips are fried in each of the fat compositions of Examples I, II, and III.

Ingestion of these potato chips which contain the nondigestible fat compositions will not result in passive oil loss, and the potato chips are not unacceptably waxy tasting.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A nondigestible fat composition useful as a replacement for triglyceride fats or oils in foods, which composition has a Solid Fat Content profile slope between 70°F and 98.6°F of from 0 to -0.75 %solids/°F, and which composition comprises:
 - 5 A. a liquid nondigestible oil having a complete melting point below 98.6°F; and
 - B. nondigestible solid particles of polyol polyester material dispersed in said oil in an amount sufficient to control passive oil loss upon ingestion of said composition, said nondigestible solid particles having a complete melting point above 98.6°F, wherein said polyol polyester material comprises at least 1% of a polyol polyester polymer component and a polyol polyester monomer component in an amount up to 99%, wherein at least 15% of the hydroxyl groups of the polyol polyester material are esterified with C₂₀ and higher long chain saturated fatty acid radicals.
- 10 2. A nondigestible fat composition according to Claim 1 which comprises from about 60% to about 99% liquid nondigestible oil and from about 1% to about 40% solid polyol polyester.
- 15 3. A nondigestible fat composition according to Claim 2 wherein in the solid nondigestible particles the polyol polyester material comprises from at least 10% of a polyol polyester polymer component and up to 90% of a polyol polyester monomer component.
- 20 4. A nondigestible fat composition according to any one of the preceding claims wherein in the solid nondigestible particles the polyol polyester polymer component comprises an average of from 2 to 12 monomeric units.
- 25 5. A nondigestible fat composition according to any one of the preceding claims wherein in the solid nondigestible particles at least about 45% of the
- 30



hydroxyl groups of the polyol polyester material are esterified with C₂₀ and higher long chain saturated fatty acid radicals.

6. A nondigestible fat composition according to any one of the preceding
5 claims wherein in the solid nondigestible particles the polyol moiety of the solid polyol polyester particles is derived from a sugar or sugar alcohol having from 6 to 8 hydroxyl groups and wherein the particles have a thickness of less than 1 micron.
- 10 7. A nondigestible fat composition according to any one of the preceding claims wherein the solid nondigestible particles comprise from about 40% to about 60% of a polyol polyester polymer component and from about 40% to about 60% of a polyol polyester monomer component.
- 15 8. A nondigestible fat composition according to any one of the preceding claims wherein in the solid nondigestible particles the polyol moiety of the solid polyol polyester particles is derived from sucrose and wherein at least about 75% of the hydroxyl groups of the polyol polyester material are esterified with long chain saturated fatty acid radicals.
- 20 9. A nondigestible fat composition according to any one of the preceding claims wherein in the solid nondigestible particles the polyol polyester polymer component has a number average molecular weight of from about 4,000 to about 36,000.
- 25 10. A nondigestible fat composition according to any one of the preceding claims wherein the liquid nondigestible oil is a liquid sucrose fatty acid polyester.
- 30 11. A nondigestible fat composition according to any one of the preceding claims having a Solid Fat Content profile slope between 70°F and 98.6°F of from 0 to about -0.5% %solids/°F.



12. A nondigestible fat composition according to any one of the preceding claims wherein in the solid nondigestible particles the saturated fatty acid group of the solid polyol polyester material consists essentially of behenic acid radicals and the polyol polyester polymer component comprises an average of from 2 to 4
5 monomeric units and has a number average molecular weight of from about 5000 to about 12,000.

13. A nondigestible fat composition useful as a replacement for triglyceride fats or oils in foods, which composition has a Solid Fat Content between 70°F and
10 98.6°F of from 0 to -0.3%solids/°F, and which composition comprises:

A. from 80% to 99% of a liquid sucrose fatty acid polyester having a complete melting point below 98.6°F; and

B. from 1% to 20% nondigestible solid particles of sucrose fatty acid
15 polyester material dispersed in said liquid sucrose fatty acid polyester, said nondigestible solid particles having a complete melting point above 122°F, wherein said sucrose fatty acid polyester material comprises at least 50% of a sucrose fatty acid polymer component and up to 50% of a sucrose fatty acid polyester monomer component, wherein at least 90% of the hydroxyl groups
20 of the solid sucrose fatty acid material are esterified with C₂₀-C₂₆ saturated fatty acid radicals.

14. A nondigestible fat composition according to Claim 13 wherein in the solid nondigestible particles the solid sucrose fatty acid material is esterified with
25 dimerized oleic fatty acid radicals and behenic acid radicals.

15. A nondigestible fat composition according to Claim 13 or 14 wherein the solid nondigestible particles have a thickness of less than 0.1 micron.

30 16. A nondigestible fat composition according to any one of Claims 13 to 15 having a Solid Fat Content profile slope between 70°F and 98.6°F of from 0 to about -0.1%solids/°F.



17. A food composition comprising an edible substrate and from about 10% to 100% of the nondigestible fat composition of Claim 1.

5 18. A food composition according to Claim 17 wherein the edible substrate is a potato chip.

19. A thickened digestible oil product comprising:

A. from 85% to 98% of a digestible edible oil; and

10 B. from 2% to 15% of nondigestible solid particles of polyol polyester material, said nondigestible solid particles having a complete melting point above 98.6°F, wherein said polyol polyester material comprises at least 1% of a polyol polyester polymer component and a polyol polyester monomer component in an amount up to 99%,
15 and wherein at least 15% of the hydroxyl groups of the polyol polyester material are esterified with long chain saturated fatty acid radicals.

20. A nondigestible fat composition according to Claims 1 or 13 as
20 substantially hereinbefore described with reference to any one of the examples.

21. A food composition according to Claim 17 as substantially hereinbefore described with reference to any one of the Examples.

25 DATED: 7 July, 1997

PHILLIPS, ORMONDE & FITZPATRICK

Attorneys for:

THE PROCTER & GAMBLE COMPANY



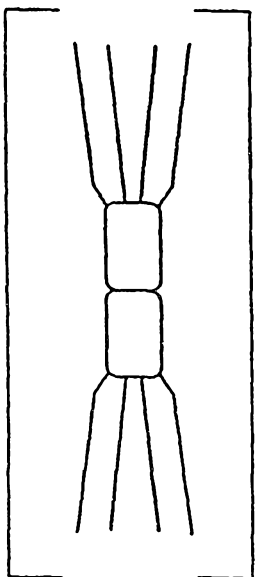


Fig. 1A

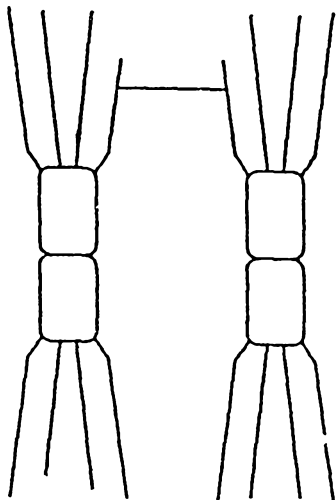


Fig. 1B

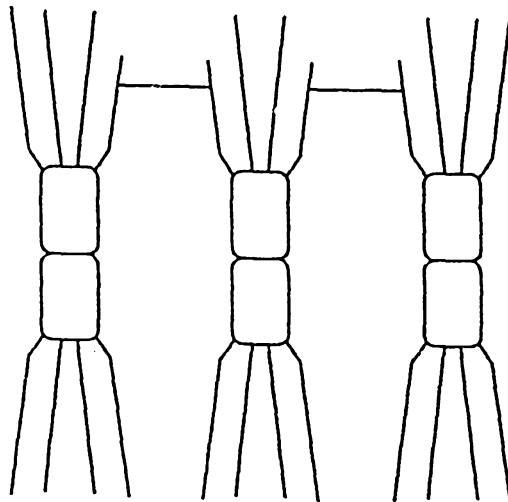


Fig. 1C

SUBSTITUTE SHEET

2 / 2

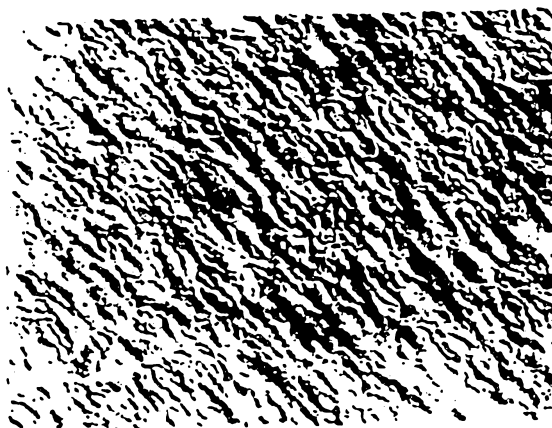


Fig. 2

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

Int. onal Application No
PCT/US 93/10108

A. CLASSIFICATION OF SUBJECT MATTER
IPC 5 A23D9/00 A23L1/308 A23L1/217

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 5 A23D A23L C11C C07H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,3 353 967 (EDWIN S. LUTTON) 21 November 1967 cited in the application see column 1, line 43 - column 3, line 55 see examples 1-9	1-4, 13-19
A	--- PATENT ABSTRACTS OF JAPAN vol. 6, no. 177 (C-124)(1055) 11 September 1982 & JP,A,57 094 246 (TAIYOU KAGAKU KOGYO K.K.) 11 June 1982 see abstract --- -/--	1,13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 February 1994

Date of mailing of the international search report

22

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Dekeirel, M

INTERNATIONAL SEARCH REPORT

Inter. Appl. No.
PCT/US 93/10108

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JOURNAL OF THE AMERICAN OIL CHEMISTS' SOCIETY. vol. 67, no. 11 , 1990 , CHAMPAIGN US pages 788 - 796 DALE R. GARDNER ET AL. 'Isolation and characterization of polymers in heated olestra and an olestra/triglyceride blend' see page 788, column 2, paragraph 2 - page 789, column 1, paragraph 2 see page 789, column 1, paragraph 4 - paragraph 5 see page 794; figure 7 see page 794, column 2, last paragraph - page 795, column 2, paragraph 1 ----	1-4, 13-19
A	EP,A,0 384 508 (UNILEVER NV) 29 August 1990 see page 2, line 38 - line 55 see examples 1-14 ----	1-4, 13-19
A	EP,A,0 430 683 (THE DOW CHEMICAL COMPANY) 5 June 1991 see the whole document -----	1,13, 17-19

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 93/ 10108

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 5-12
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Claims 5 and 6 are lacking. Claims 7-12 are dependent claims.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 93/10108

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3353967		NONE	
EP-A-0384508	29-08-90	AU-B- 631846	10-12-92
		AU-A- 4999390	21-02-90
		CA-A- 2010576	24-08-90
		JP-A- 3004750	10-01-91
		AU-B- 620893	27-02-92
		AU-A- 3857089	23-01-90
		WO-A- 9000013	11-01-90
		EP-A, B 0350987	17-01-90
EP-A-0430683	05-06-91	US-A- 4980191	25-12-90
		CA-A- 2031117	31-05-91
		JP-A- 3187363	15-08-91