




(86) Date de dépôt PCT/PCT Filing Date: 2007/04/05
 (87) Date publication PCT/PCT Publication Date: 2007/10/11
 (45) Date de délivrance/Issue Date: 2015/03/31
 (85) Entrée phase nationale/National Entry: 2008/10/28
 (86) N° demande PCT/PCT Application No.: US 2007/008617
 (87) N° publication PCT/PCT Publication No.: 2007/114950
 (30) Priorité/Priority: 2006/04/05 (DE102006016355.9)

(51) Cl.Int./Int.Cl. *H01F 7/06* (2006.01),
H01F 5/00 (2006.01), *G01N 11/16* (2006.01),
G01N 9/34 (2006.01), *G10K 9/13* (2006.01)
 (72) Inventeurs/Inventors:
 ALVAREZ, MANUEL S., US;
 WOLF, HENRY ALAN, US;
 FEHRENBACH, JOSEF, DE;
 MELLERT, MARTIN, DE
 (73) Propriétaires/Owners:
 EXXONMOBIL RESEARCH AND ENGINEERING
 COMPANY, US;
 VEGA GRIESHABER KG, DE
 (74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : COMMANDE MAGNETIQUE POUR OSCILLATEURS MECANIQUES A HAUTE ET BASSE
 TEMPERATURES, UTILISES DANS LES APPLICATIONS DE CAPTEURS
 (54) Title: MAGNETIC DRIVE FOR HIGH AND LOW TEMPERATURE MECHANICAL OSCILLATORS USED IN SENSOR
 APPLICATIONS

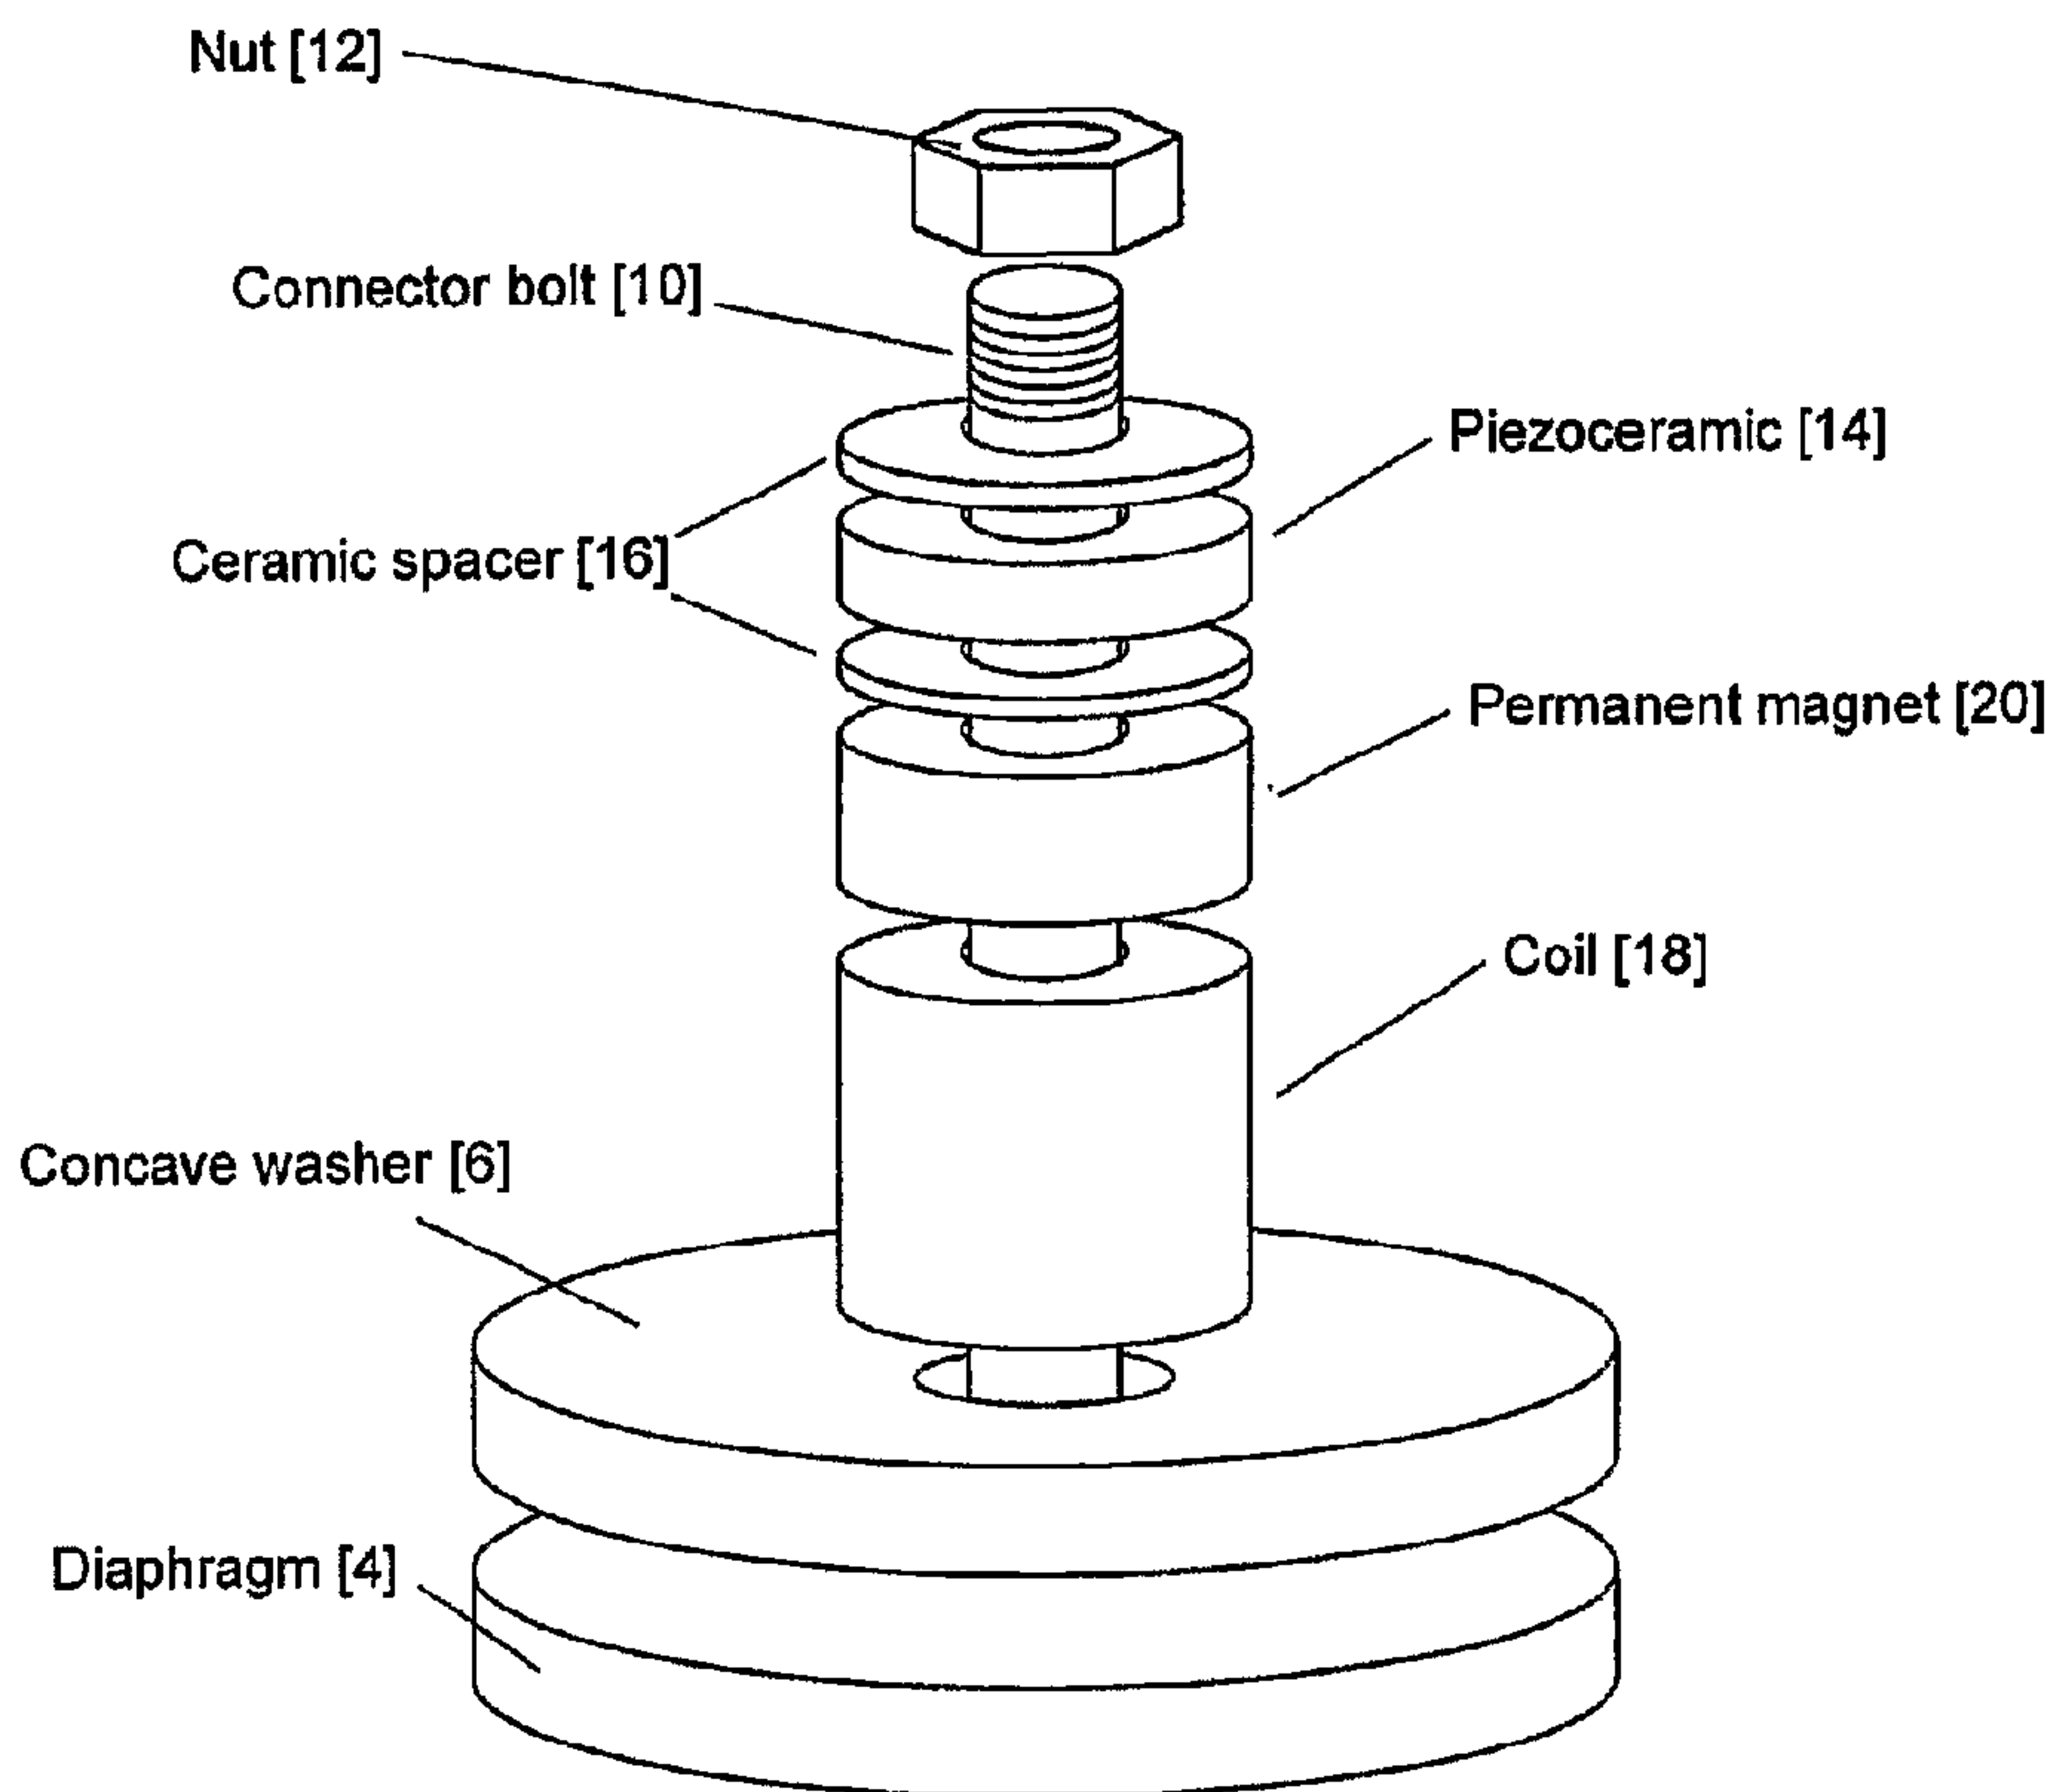

(57) Abrégé/Abstract:

A magnetic drive and mechanical oscillator system comprising a mechanical oscillator, a coil, a means for providing alternating current to said coil thereby creating a magnetic field within and about the coil, said means including an on-off means and a ferromagnetic material in communication with the diaphragm of the mechanical oscillator and the coil.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 October 2007 (11.10.2007)

PCT

(10) International Publication Number
WO 2007/114950 A3(51) International Patent Classification:
H03B 5/30 (2006.01)(DE). MELLERT, Martin [DE/DE]; Katzenmatt 9a,
77790 Steinach (DE).(21) International Application Number:
PCT/US2007/008617(74) Agents: CARTER, Larry, E. et al.; Exxonmobil Research
And Engineering Company, 1545 Route 22 East, P.O.Box
900, Annandale, NJ 08801-0900 (US).

(22) International Filing Date: 5 April 2007 (05.04.2007)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
102006016355.9 5 April 2006 (05.04.2006) DE(71) Applicants (for all designated States except US):
**EXXONMOBIL RESEARCH AND ENGINEERING
COMPANY** [US/US]; 1545 Route 22 East, P.O.Box 900,
Annandale, NJ 08801-0900 (US). **VEGA GRIESHABER
KG** [DE/DE]; Hauptstrasse 1-5, 77709 Wolfach (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALVAREZ, Man-
ual, S.** [US/US]; 6316 York Court, Warrenton, VA
20187-4435 (US). **WOLF, Henry, Alan** [US/US]; 145
Lake Road, Morristown, NJ 07960 (US). **FEHREN-
BACH, Josef** [DE/DE]; Schlattstrasse 1, 77712 Haslach(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,
FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN,
IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR,
LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS,
RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

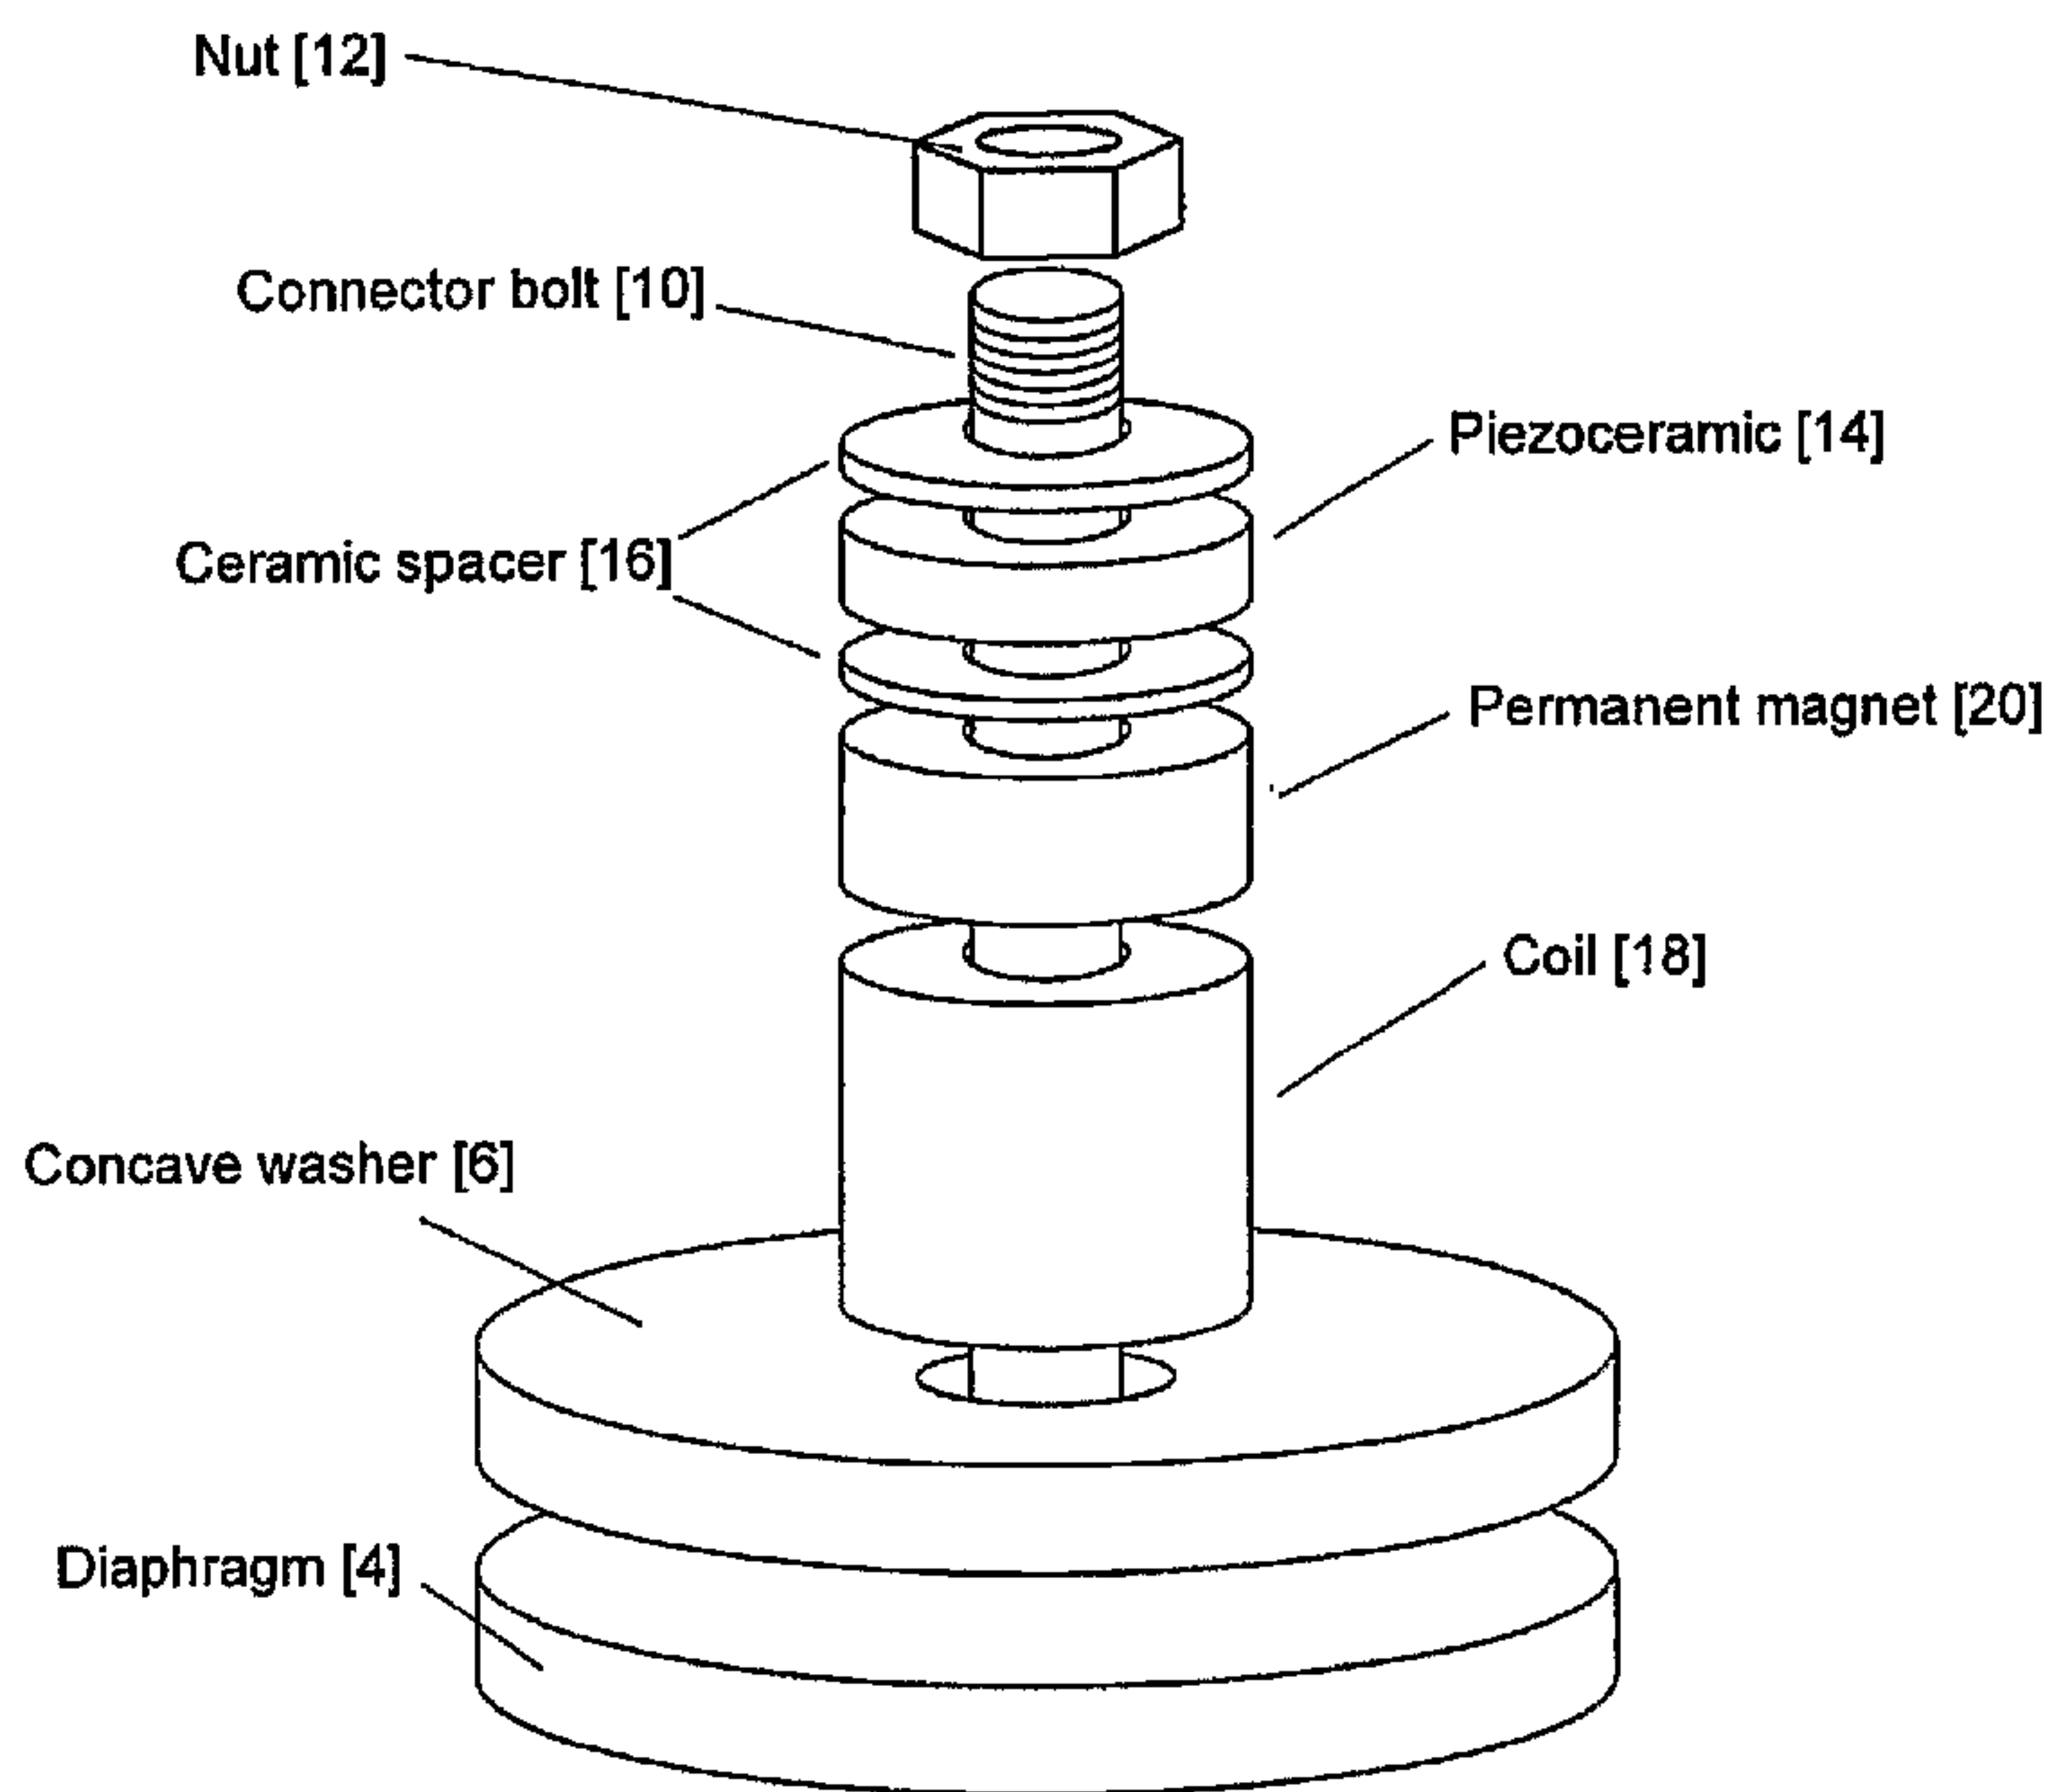(54) Title: MAGNETIC DRIVE FOR HIGH AND LOW TEMPERATURE MECHANICAL OSCILLATORS USED IN SENOR
APPLICATIONS(57) Abstract: A magnetic drive and mechanical oscillator system comprising a mechanical oscillator, a coil, a means for providing
alternating current to said coil thereby creating a magnetic field within and about the coil, said means including an on-off means and
a ferromagnetic material in communication with the diaphragm of the mechanical oscillator and the coil.

WO 2007/114950 A3

WO 2007/114950 A3



Published:

— *with international search report*

(88) Date of publication of the international search report:
10 July 2008

- 1 -

**MAGNETIC DRIVE FOR HIGH AND LOW TEMPERATURE
MECHANICAL OSCILLATORS USED IN SENSOR APPLICATIONS**

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a drive for high and low temperature mechanical oscillators. In particular, the present invention relates to a magnetic drive for mechanical oscillators.

[0002] The present invention provides a reliable method and mechanically robust components to excite a mechanical oscillator to operate at high temperature to develop commercial sensor applications based on these devices. These devices have numerous applications including but not limited to: Level sensors; corrosion/erosion monitoring; density/viscosity measurements.

[0003] The current available sensors are driven by piezoelectric crystals that typically have low temperature Curie points. The piezoelectric crystal Curie point limits the device operating temperature. In addition, the devices have variable performance depending on temperature cycles due to mechanical changes in the mounting that occur during thermal expansion. Further, the piezoelectric technology is based mostly on ceramic materials that can crack and may be difficult to make electrical connections that survive temperature cycling and/or high temperature. Inductively driven tuning fork resonator devices of the present invention may operate at high temperature, substantially reducing the limitations associated with piezoelectric crystal drivers.

SUMMARY OF THE INVENTION

[0004] The present invention is a magnetic drive for mechanical oscillator systems. The systems include a mechanical oscillator, and driving elements comprising a coil with an optional core, a means for providing current to the coil, and a ferromagnetic material. All of the elements are in communication

- 2 -

[0005] with each other directly or through one of the other elements. The means for providing current to the coil includes an on-off switch so that when no current is flowing, the coil is unused or may operate as a passive receiver.

[0006] In a preferred embodiment, a permanent magnet replaces at least some of the ferromagnetic material and is fixed to the mechanical oscillator. The Curie point of these materials should be higher than the service temperature.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Figure 1 shows the mechanical tuning fork part of the oscillator.

[0008] Figure 2 shows an embodiment of the present invention

[0009] Figure 3 shows a schematic diagram of a second embodiment of the present invention.

[0010] Figure 4 shows a schematic diagram of a third embodiment of the present invention.

[0011] Figure 5 shows a schematic diagram of a fourth embodiment of the present invention.

[0012] Figure 6 shows a schematic diagram of a fifth embodiment of the present invention.

[0013] Figure 7 shows an embodiment based on the schematic diagram of Figure 4.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] In the present invention, a coil is driven by an alternating current. The strength of the generated magnetic field is related to the current and other geometric parameters associated with the coil driving the system. The well-known Biot-Savart Law from physics establishes this relationship regarding magnetic field generation. When used as an electric current generator, the signal

- 3 -

results from a time varying magnetic field produced by relative motion between the magnet and coil, which generates a current in the coil. The well-known Farady's Law of induction from physics establishes this relationship regarding electric field generation. To maximize oscillator output, the coil and mechanical oscillator must be driven at or near the resonance frequency of the mechanical oscillator. A circuit may be included that searches for the mechanical resonance frequency of the mechanical oscillator it is to drive.

[0015] The coil communicates, e.g. is coupled, to the system through a permanent magnet that, in a preferred embodiment, is attached to the oscillator. The magnetic force generated by the system is small, but since it is at or near resonance with the oscillator sufficient gain is experienced by the system to effectively drive the oscillator. Once in motion, the applied current to the coil can be stopped and the permanent magnet (now in motion) will generate a current in the coil that now operates as receiver that can be used to determine other parameters relevant to applications of interest, such as frequency and Q (quality factor related to damping), and, harmonics. The current commercial devices are driven with piezoelectric crystals which are less robust and have high temperature operating limits below those possible with a coil driven device.

[0016] The coil is a magnetic drive that generates a magnetic field that exerts a force on a permanent magnet attached to the mechanical oscillator. The forces generated by this method may be weaker than those possible from a piezoelectric drive, but when the mechanical system is driven at or near resonance, very little force is required to gain vibration amplitude because the force is synchronous with the motion. The currently employed circuits used with piezoelectric driven devices can be modified to a) supply a current instead of a voltage, b) search for the resonance frequency (as they currently do) and c) operate in a passive mode that can be used to provide a signal that can be analyzed for the sensor applications of interest in high temperature

- 4 -

environments. In some configurations, the use of an inductive drive may provide a greater range of motion than available with the piezoceramic devices.

[0017] Detailed examples of the invention follow below. There are many geometric configurations that will enable communication between the coil, magnet, and the mechanical part of the tuning fork. For clarity, the external housing of the device is not shown. The external housing protects all of the components of the magnetic drive/receive mechanism from the environment. Moreover, a ferromagnetic external housing provides shielding from stray electromagnetic fields.

[0018] Figure 1 shows the mechanics of the tuning fork including the tines [2], diaphragm [4], the drive and/or receive mechanism [8], the concave washer [6], and the connector [10]. Nut [12] attaches to the threaded end of the connector bolt [10]. The connector bolt [10] is essentially a bolt that, in general, may provide a rigid connection between the diaphragm [4] and either the coil or the magnet of the inductive driver/receiver. The concave washer [6] provides a physical offset (gap) between drive/receive mechanism [8] and the diaphragm [4].

[0019] Figure 2 shows an embodiment of the present invention which shows a view of the inductive driver/receiver. The elements of the inductive drive are the coil [18] and the permanent magnet [20]. In this embodiment, the connector [10] passes unobstructed through the coil [18] but is not affixed to said coil. Nut [12] is applied in a fashion to provide a compression force securing the ceramic spacers [16], optional piezoceramic [14], and permanent magnet [20]. The permanent magnet [20] is affixed to the connector [10], thereby providing the rigid connection to the diaphragm [4]. An optional piezoceramic device [14] may be included in the stack if it is desired to provide an independent means to monitor or drive the fork. The ceramic spacers [16] provide electrical isolation of the piezoceramic crystal [14]. The coil [18] is

- 5 -

fixed to the concave washer [6] or secured using a structure not shown. The concave washer [6] moves independently of the diaphragm [4]. For clarity, the components in Figure 2 between the concave washer [6] and the nut [12] are separated by spaces. For construction purposes, there are generally no spaces. The exception is that there is a space between coil [18] and permanent magnet [20]. That space facilitates the relative movement between the coil and magnet. Based on this arrangement, the diaphragm [4] and permanent magnet [20] can move freely with respect to coil [18]. An optional resilient spacer (not shown) can be physically employed to maintain that spacing.

[0020] Figure 3 is a schematic representation of another embodiment of the present invention. In this configuration a permanent magnet [20] is attached to a post/connector to the diaphragm [4] which connects to the tines [2]. An optional core [22] may be used in the coil [18] to enhance the magnetic field properties.

[0021] Figure 4 is a schematic of another embodiment, similar to Figure 3, but includes a cupped-shaped ferromagnetic backing material [24] surrounding the permanent magnet. This ferromagnetic backing improves the response by directing the magnetic field between the coil and the permanent magnet. All of the other parts remain the same.

[0022] Figure 5 shows a schematic embodiment where the permanent magnet [20] of Figure 3 has been replaced with ferromagnetic material. All other parts remain the same. Although this configuration may be simpler to fabricate, it will have lower sensitivity compared to the Figure 3 embodiment.

[0023] Figure 6 shows a schematic embodiment that employs a hollow cylindrical permanent magnet [20] encircling coil [18] while ferromagnetic material [26] serves to direct the magnetic field. The ferromagnetic material also serves as the core of the coil. Connector [10] attaches ferromagnetic material [26] to diaphragm [4].


- 6 -

[0024] Figure 7 shows an embodiment operable at least to 400°C based on a schematic similar to that shown in Figure 4. In this embodiment, permanent magnet [20] is inserted into the coil on the same axis as the coil [18]. The permanent magnet [20] is connected to the housing [28] which, in turn, connects to diaphragm [4] by the connector/bolt [10].


CLAIMS:

1. A magnetic drive and mechanical oscillator system comprising:
 - a) a mechanical oscillator having a diaphragm;
 - b) a coil;
 - c) a means for providing alternating current to said coil thereby creating a magnetic field within and about the coil; and
 - d) a ferromagnetic material fixed to said mechanical oscillator and in communication with the diaphragm of the oscillator and the coil.
2. The magnetic drive of claim 1 wherein the ferromagnetic material includes a permanent magnet.
3. The magnetic drive of claim 2 wherein the permanent magnet is located external to the coil.
4. The magnetic drive of claim 1 wherein the coil has a ferromagnetic core.
5. The magnetic drive of claim 1 wherein the current to the coil has a frequency equal to the resonance frequency of the mechanical oscillator.
6. The magnetic drive of claim 1 wherein a circuit searches for the resonance frequency.
7. The magnetic drive of claim 1 wherein a circuit sweeps through the mechanical resonance to compute Q.


1/7
Figure 1

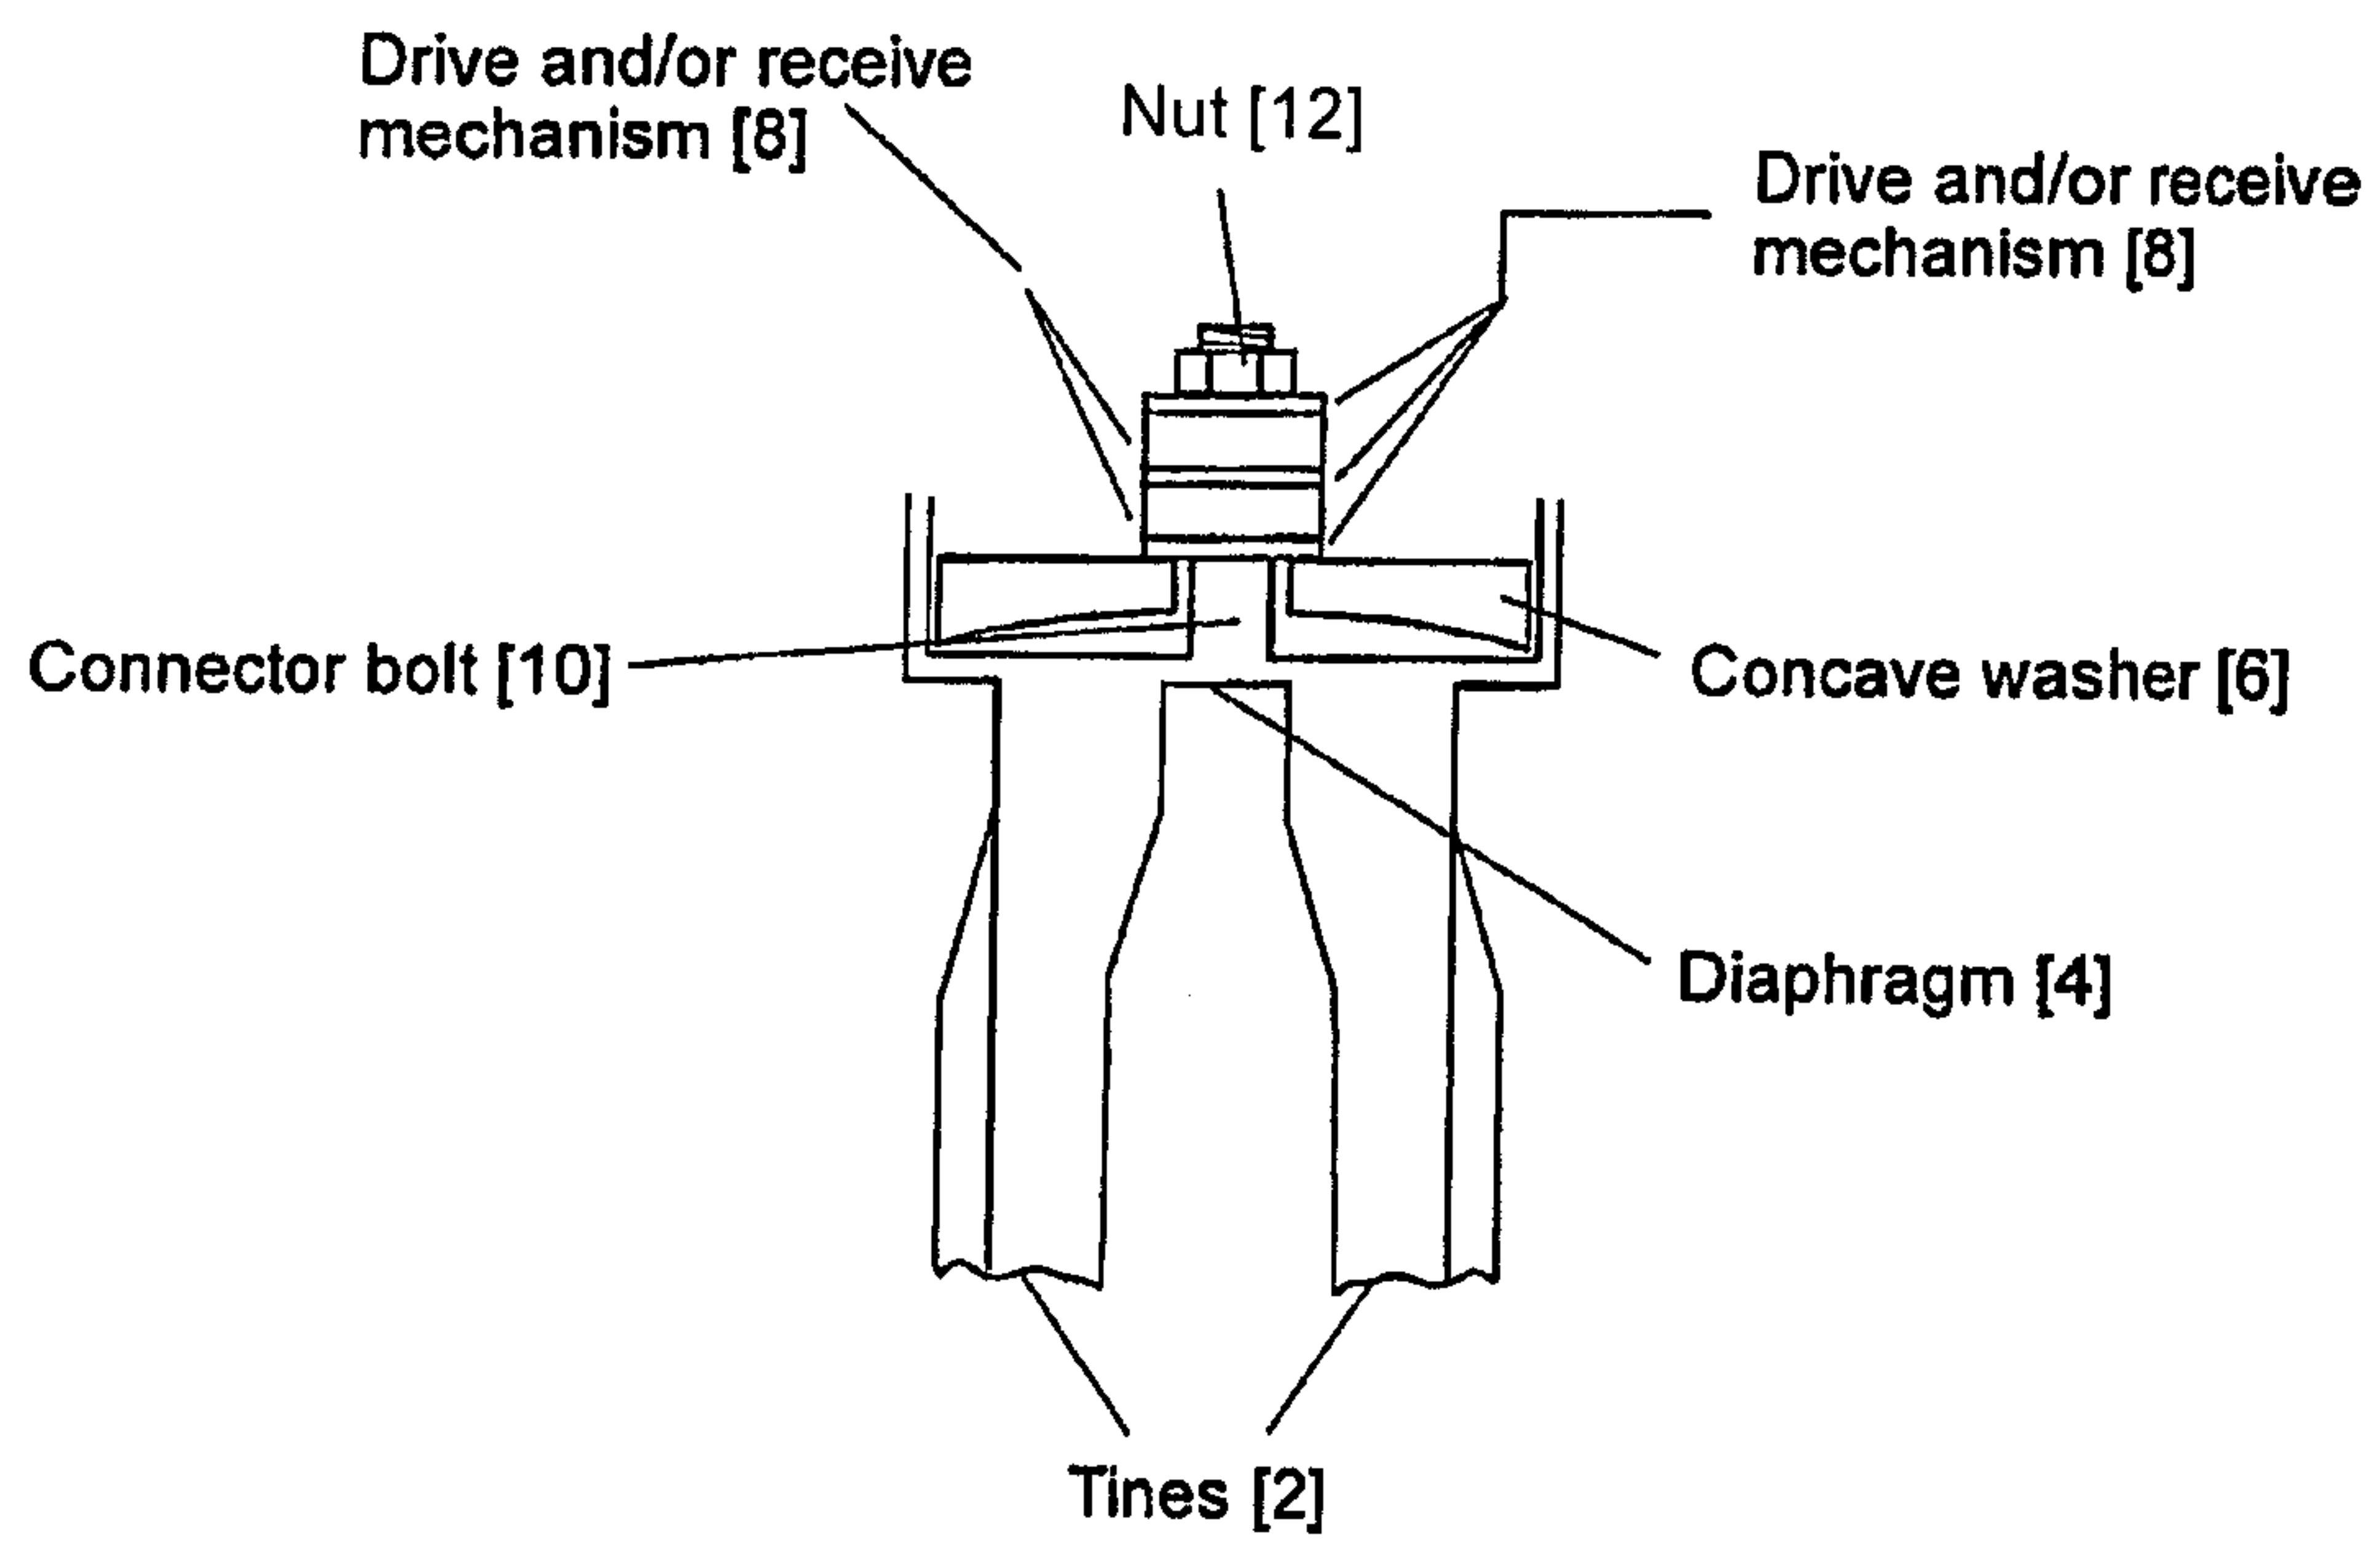


2/7
Figure 2

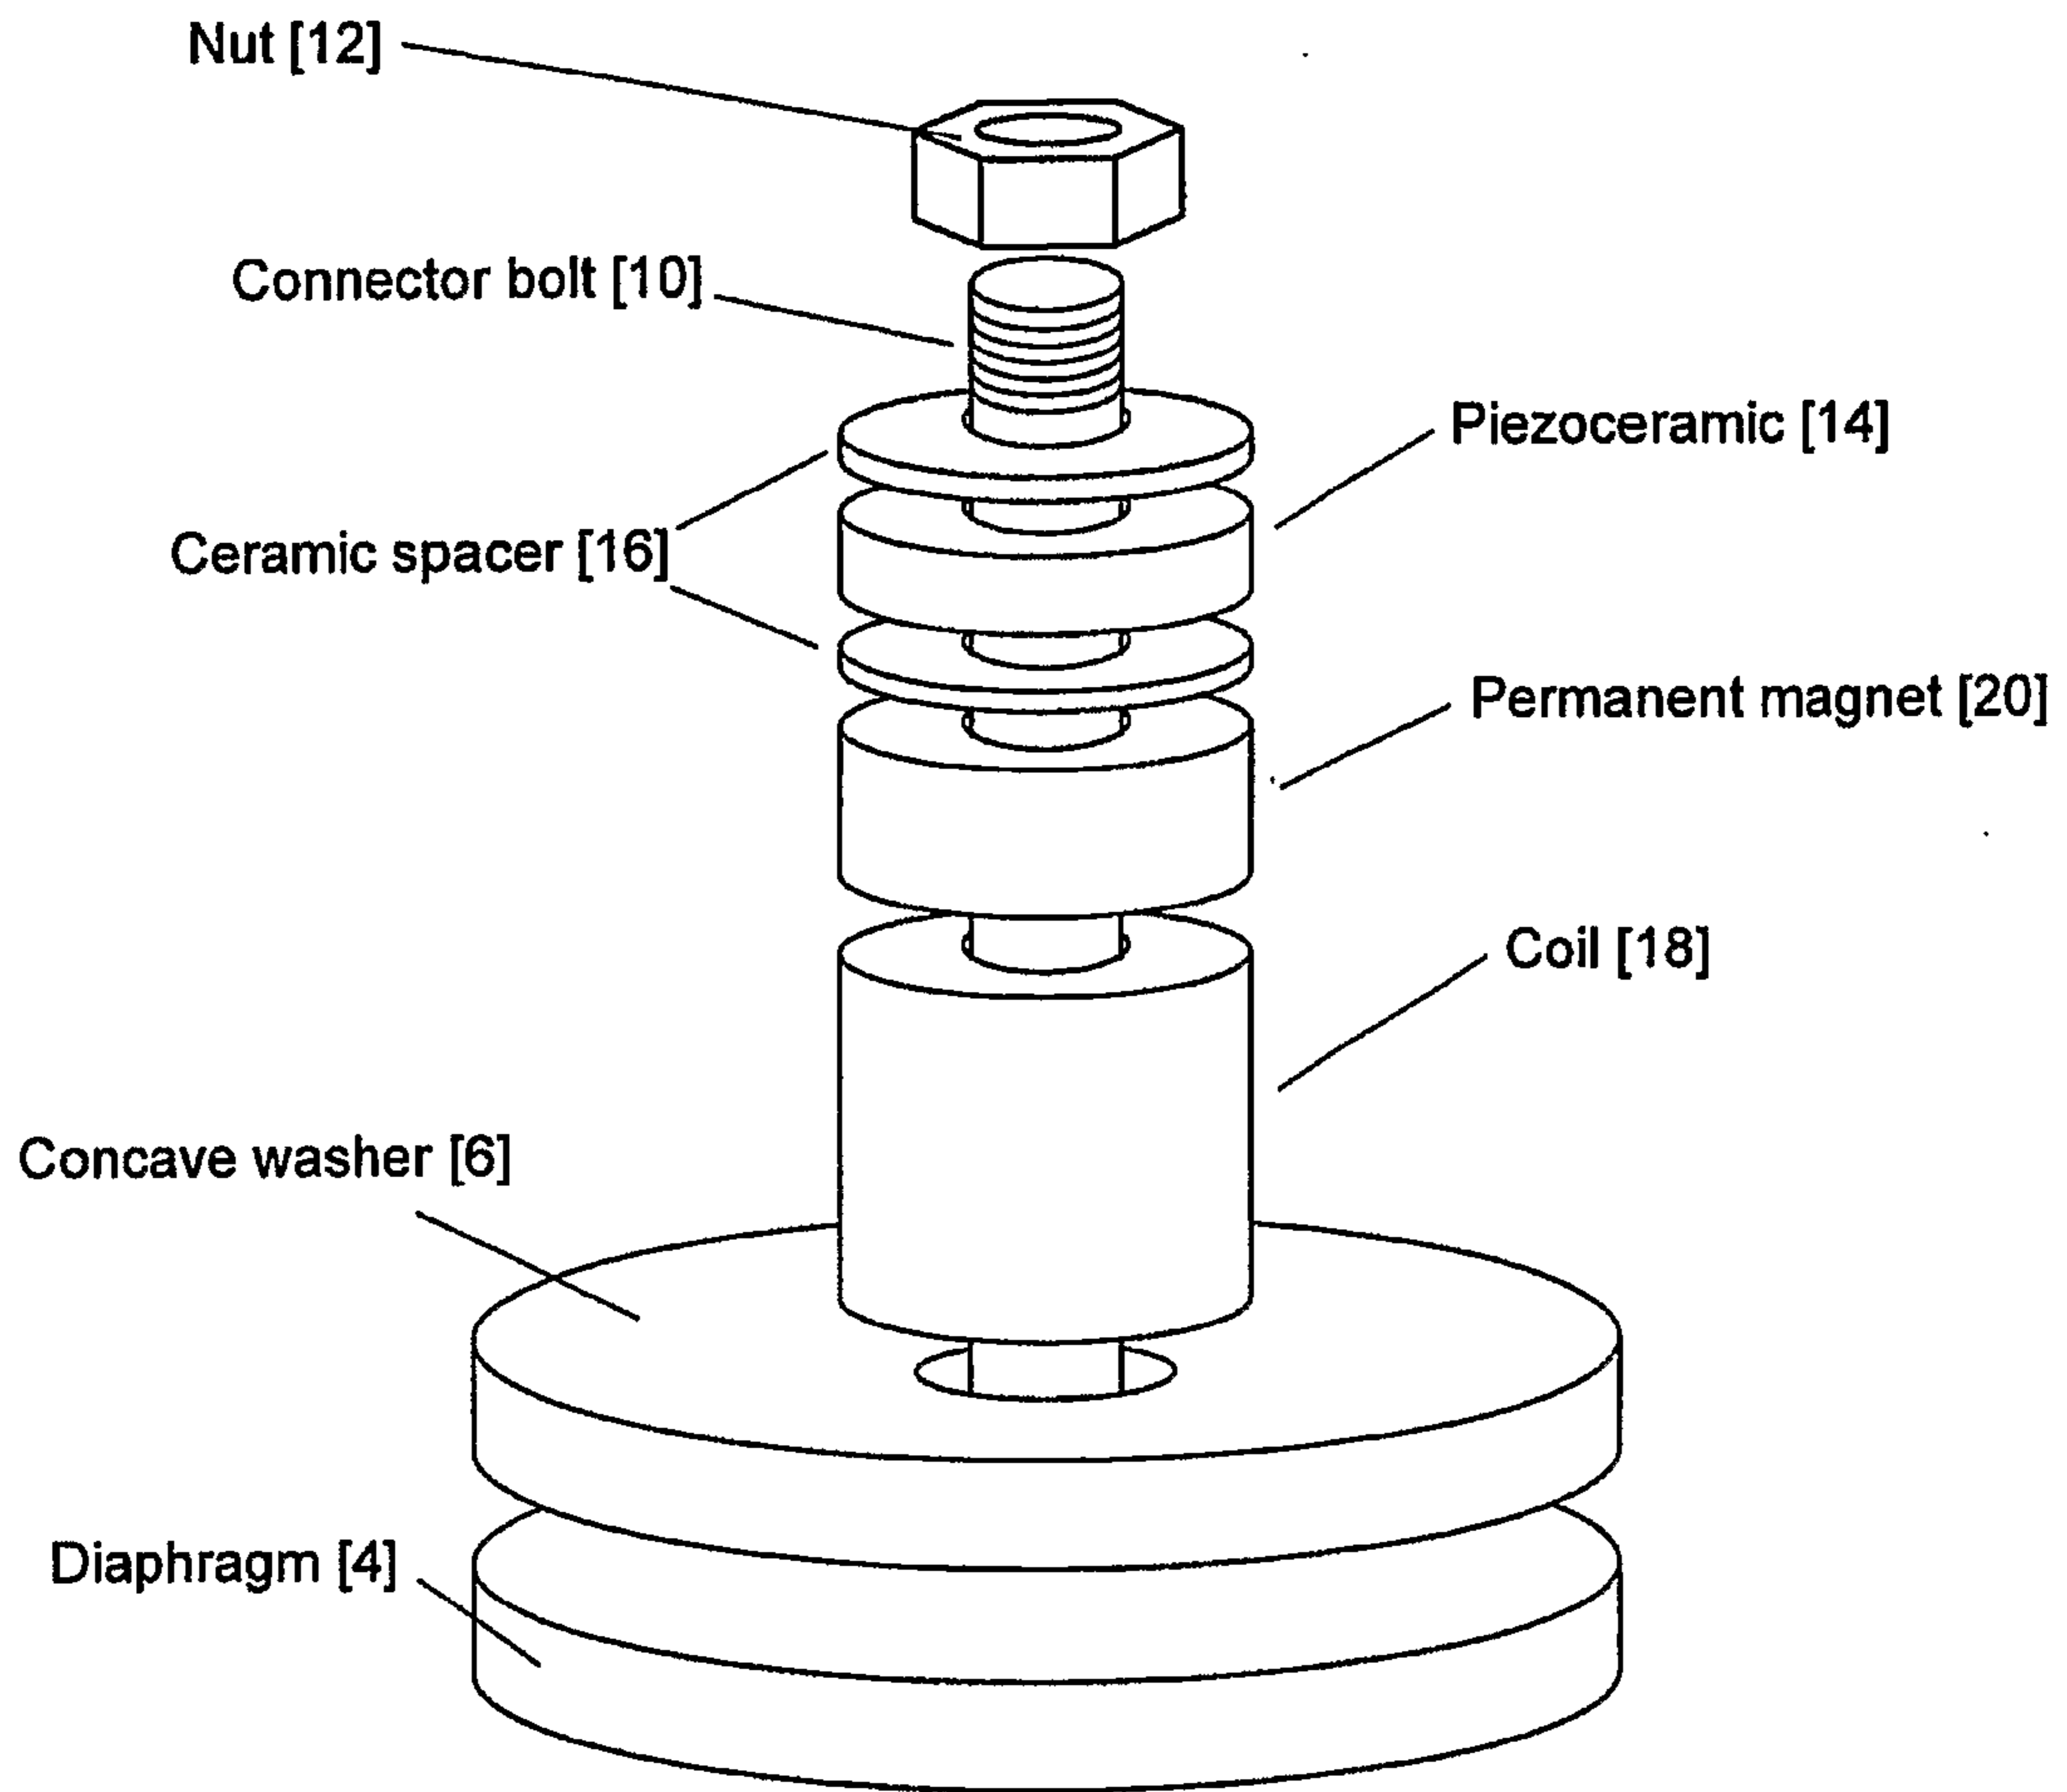


3/7
Figure 3

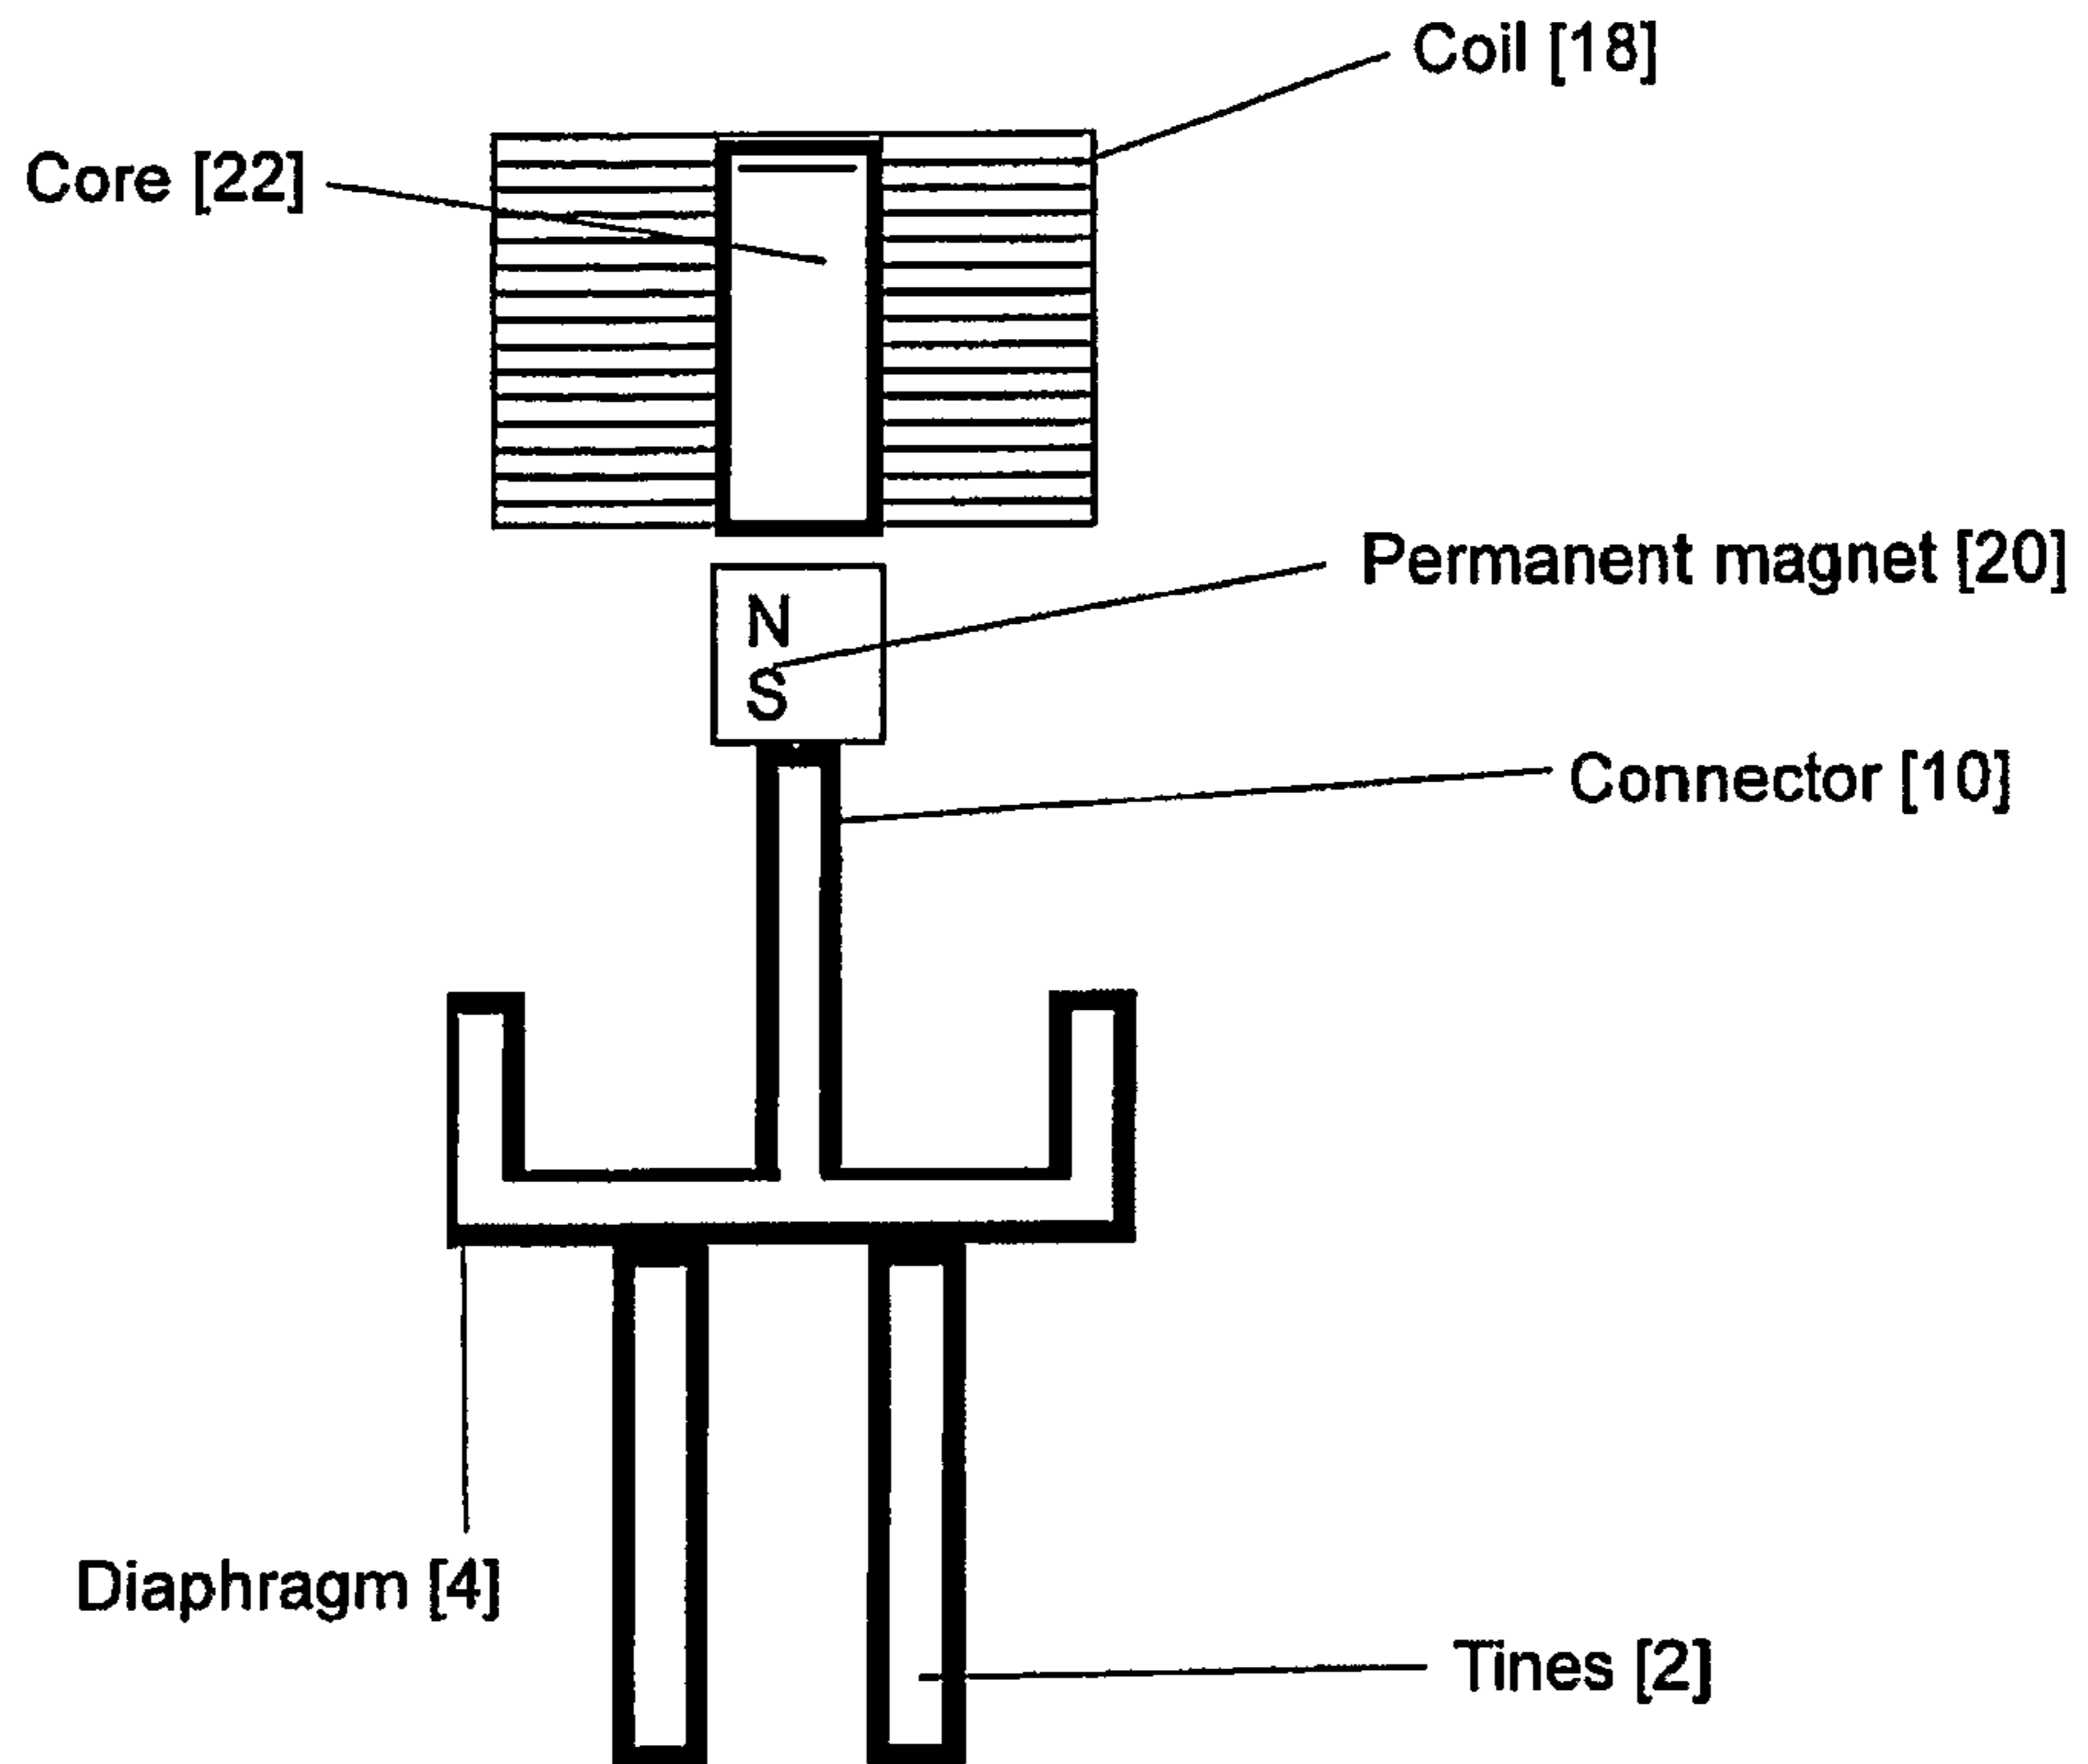


4/7
Figure 4

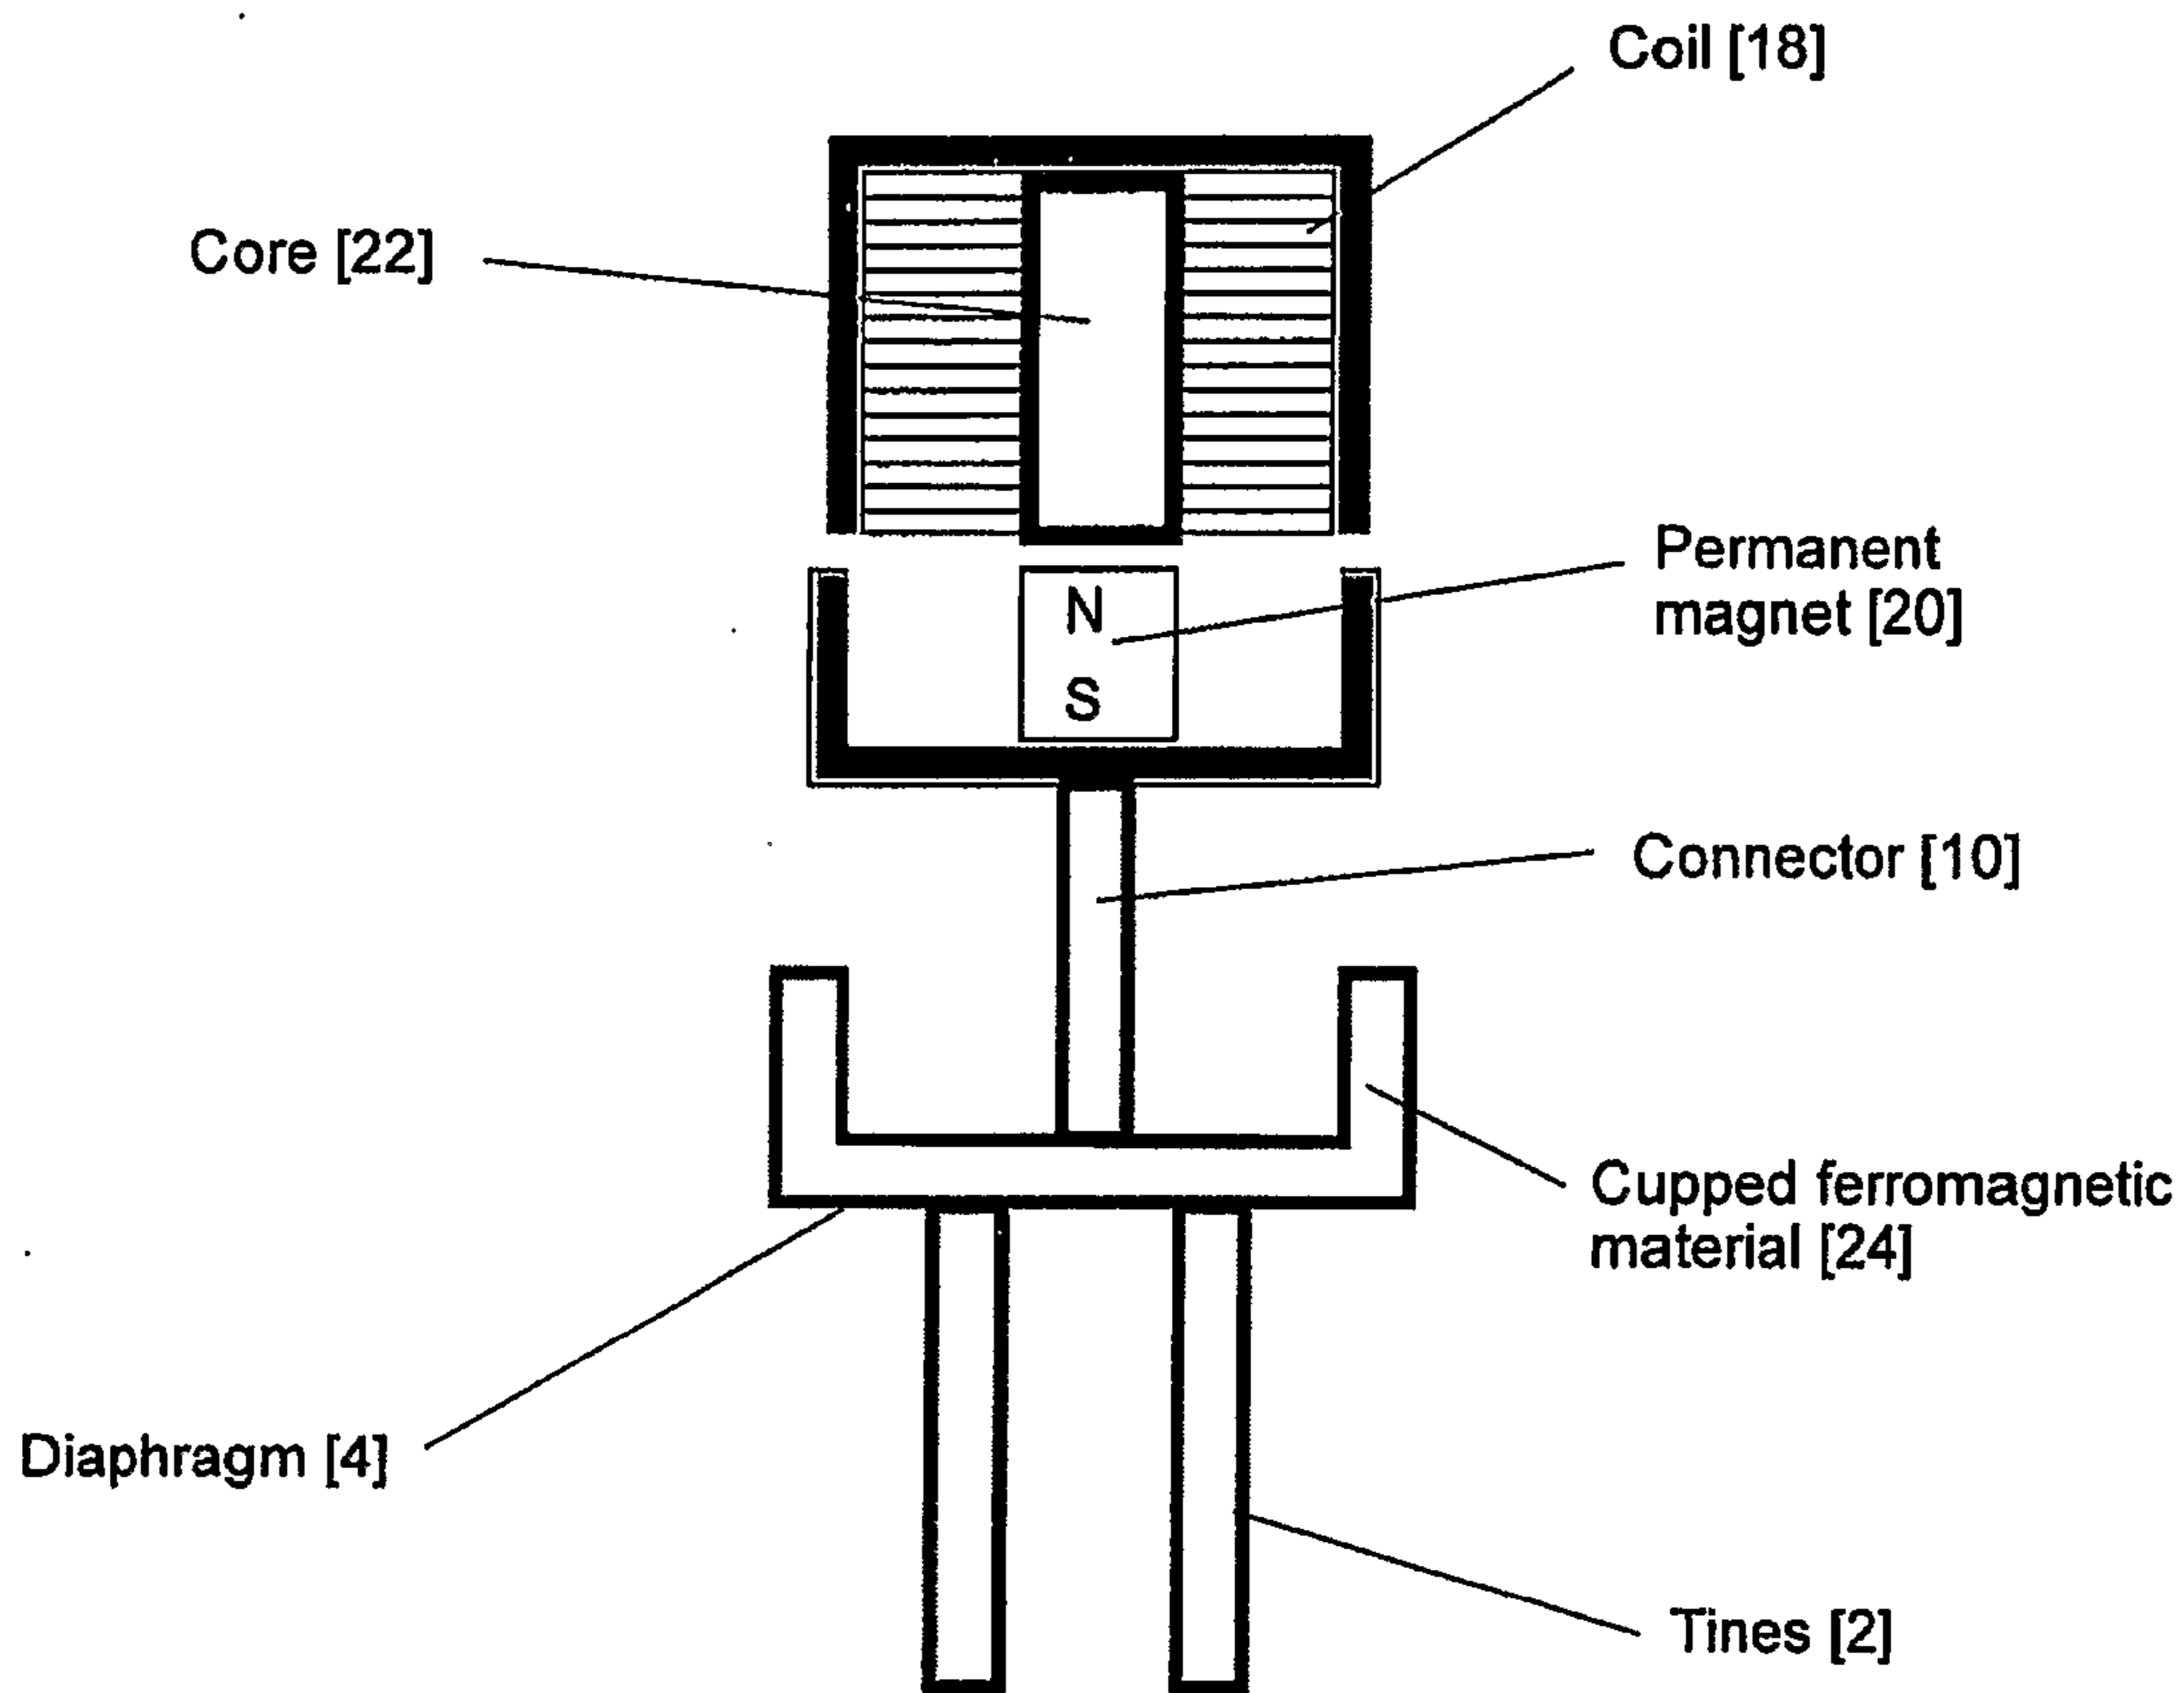

5/7 Figure 5

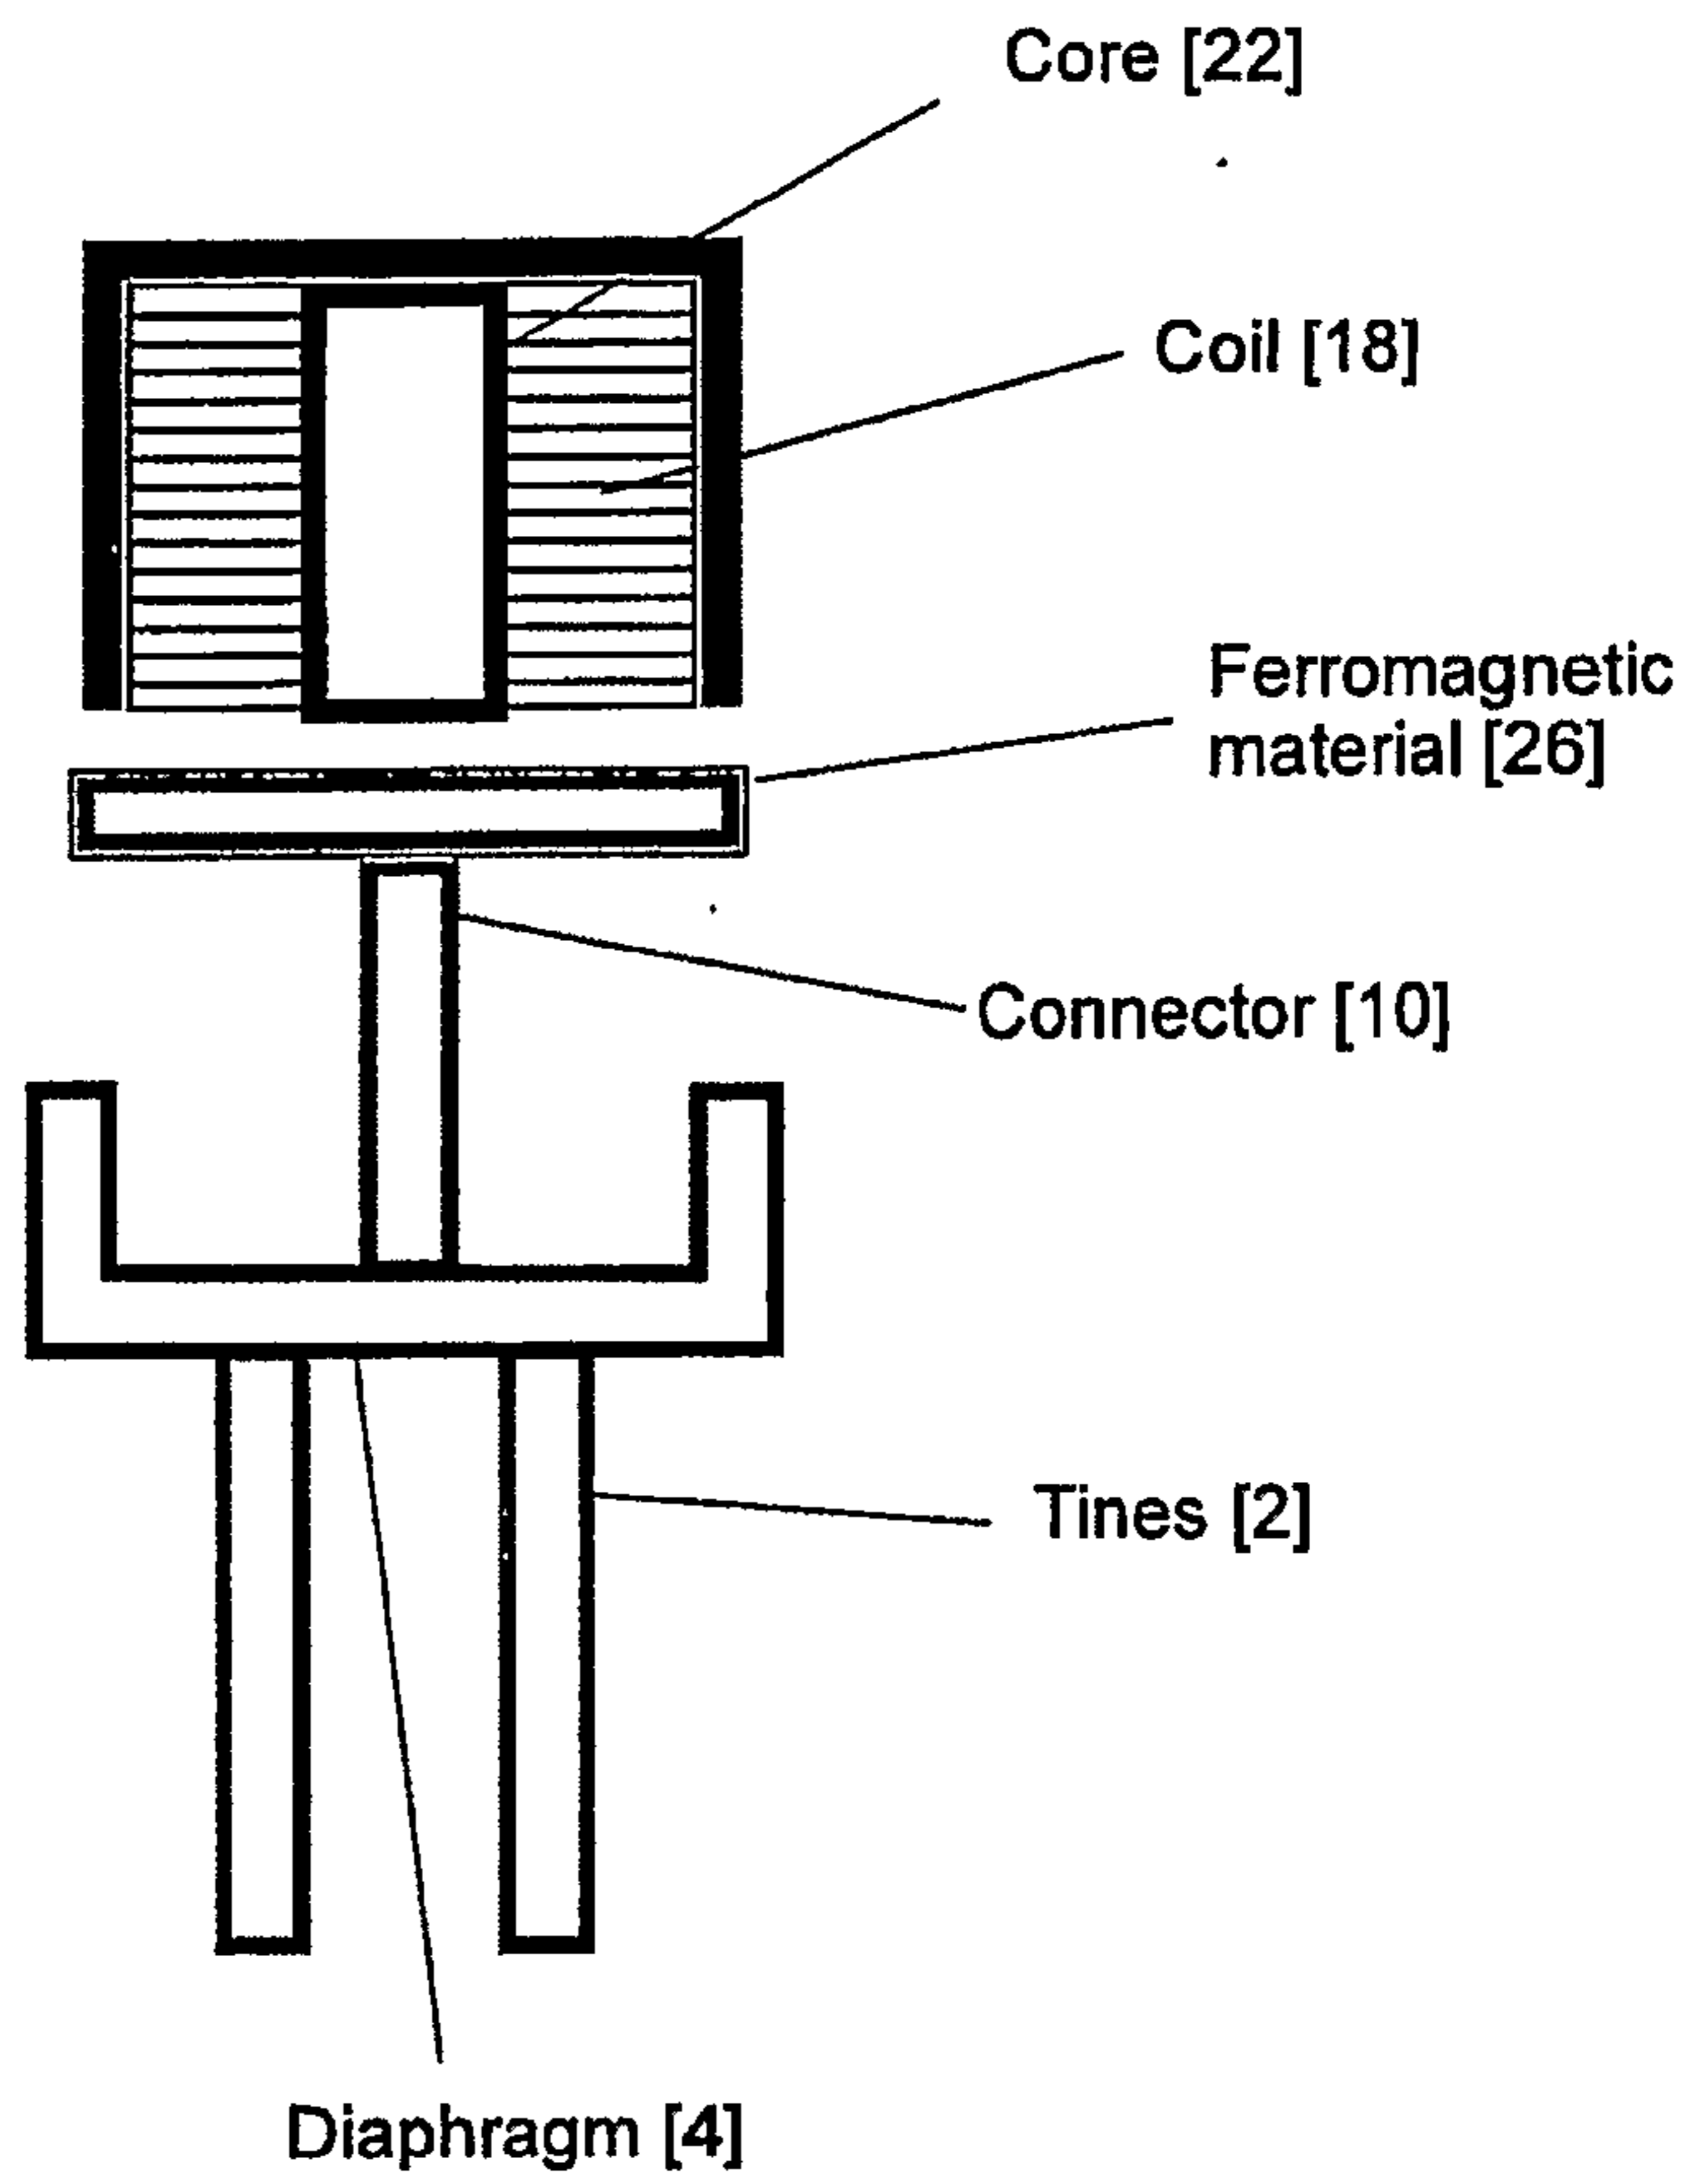

6/7
Figure 6

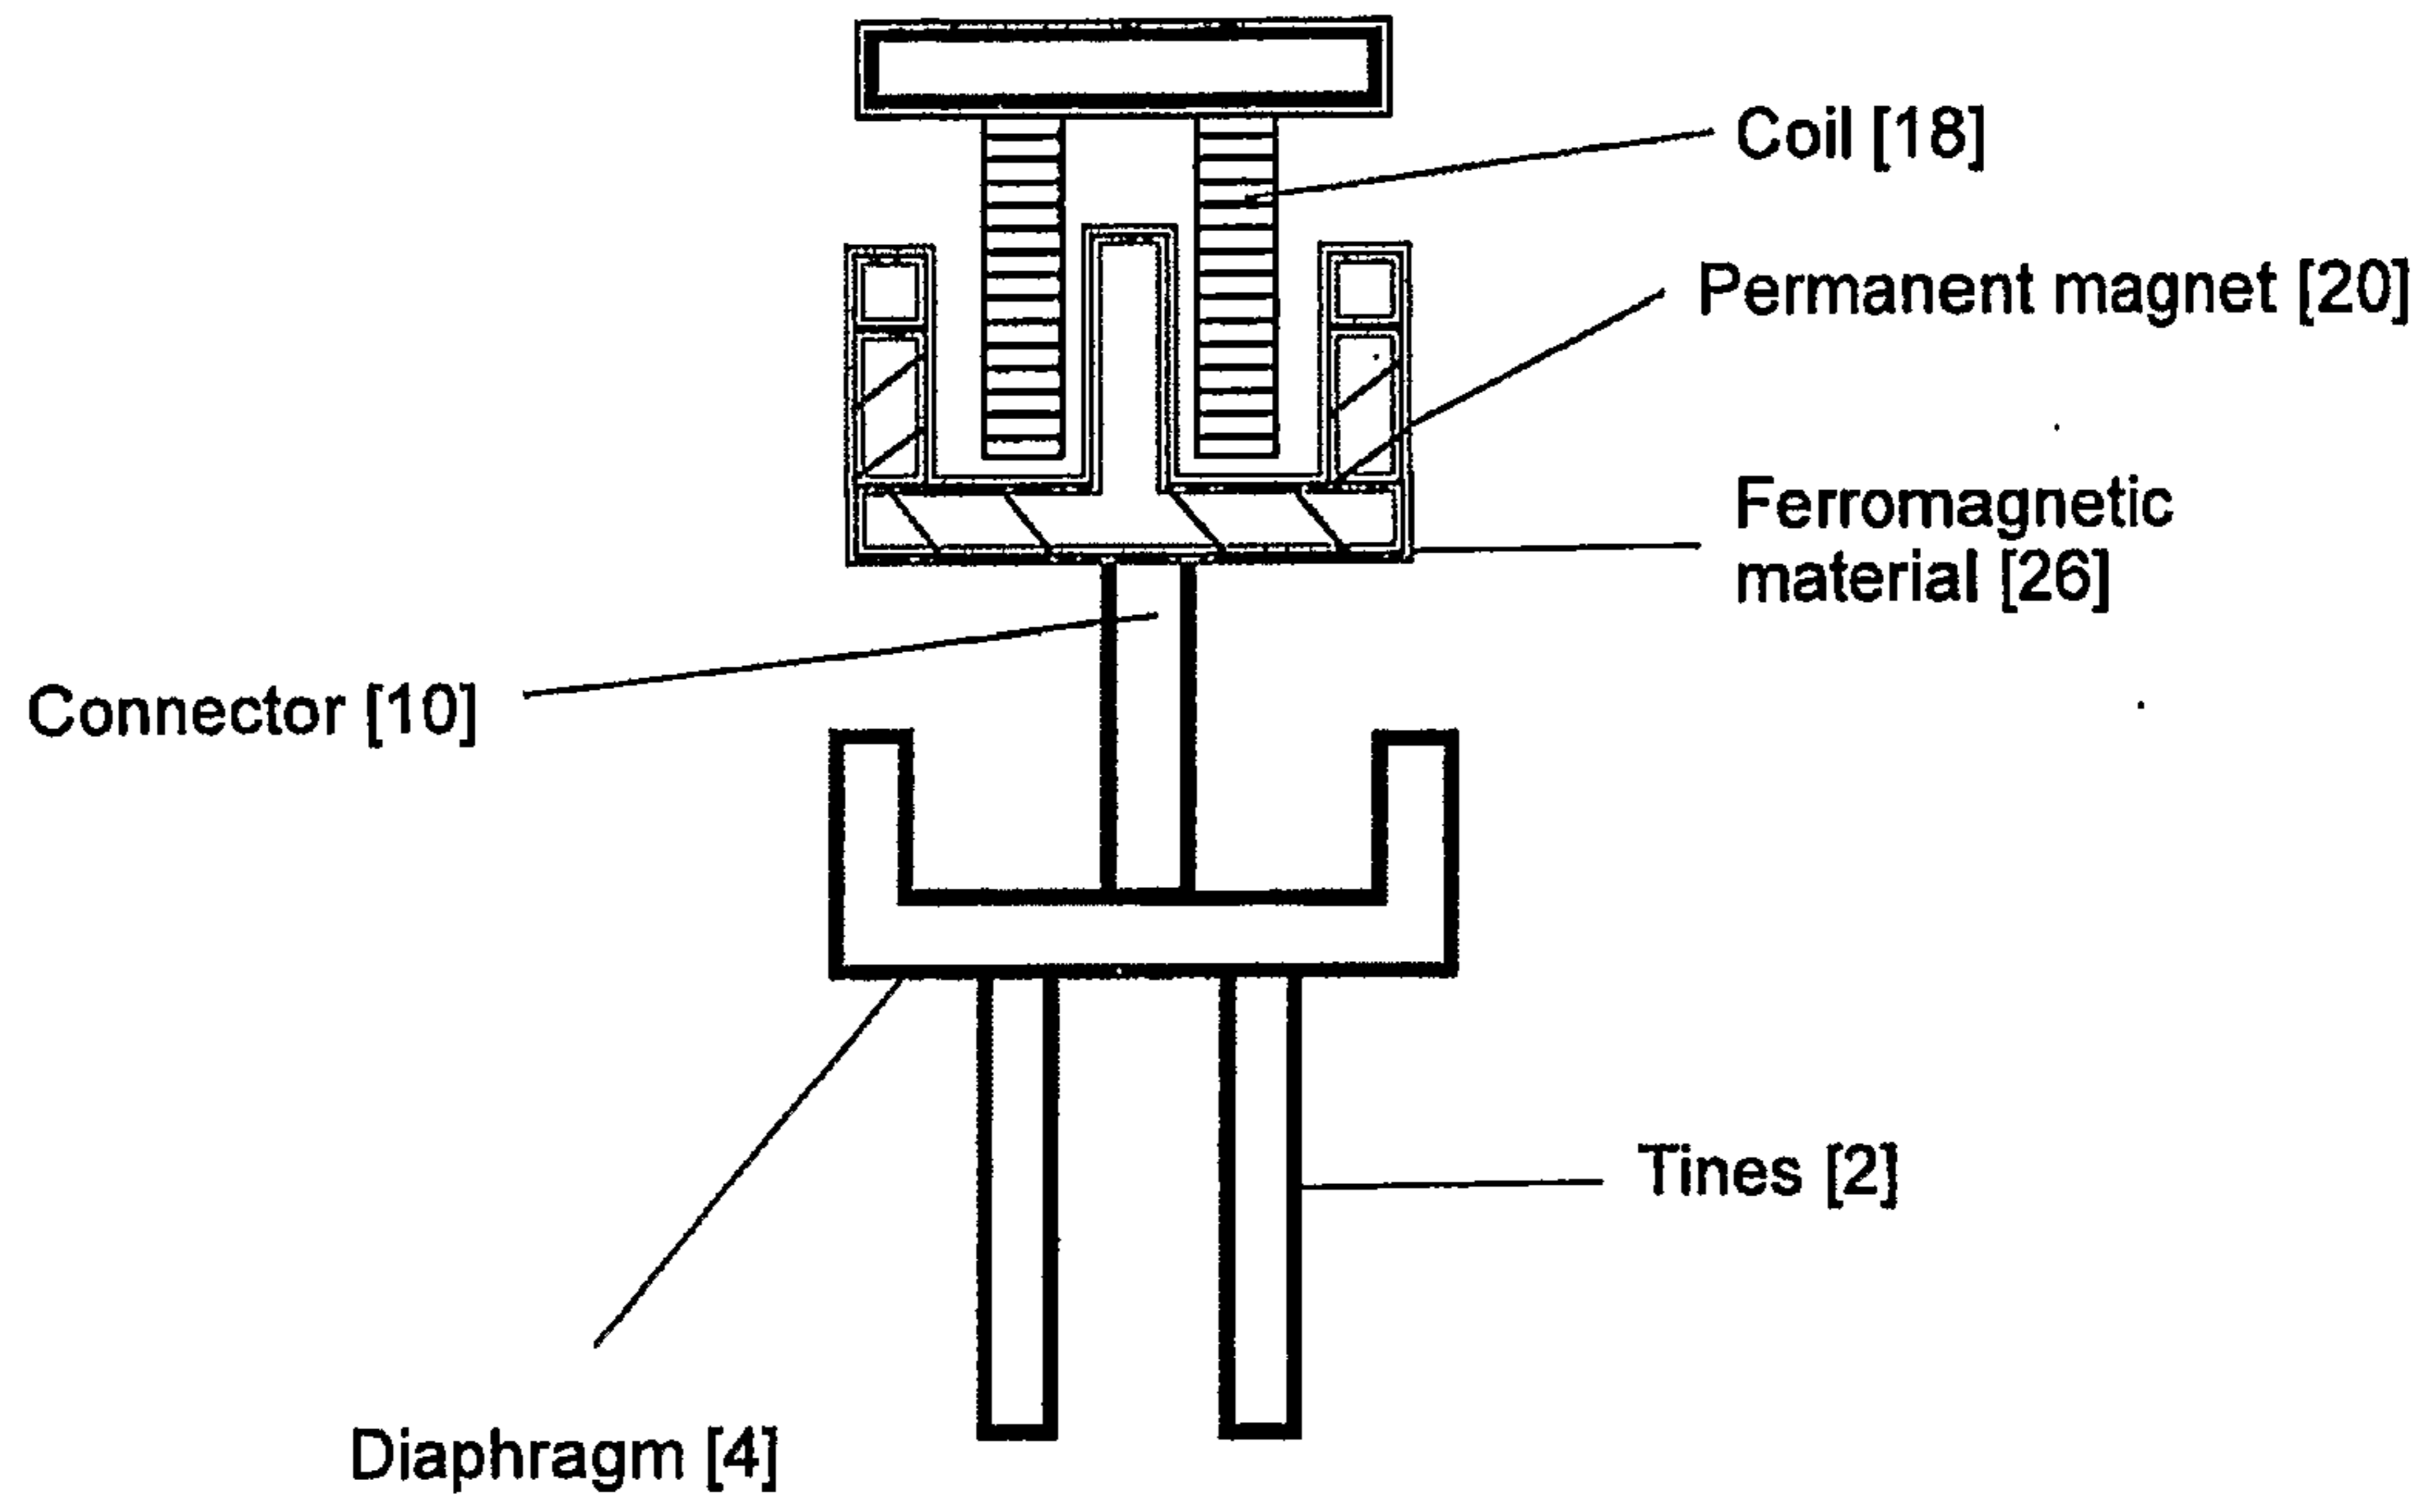

7/7 Figure 7

