



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C01B 17/00, C07D 251/04, C07C 211/09	A1	(11) International Publication Number: WO 99/01376 (43) International Publication Date: 14 January 1999 (14.01.99)
(21) International Application Number: PCT/US98/13724 (22) International Filing Date: 1 July 1998 (01.07.98) (30) Priority Data: 08/886,868 2 July 1997 (02.07.97) US (71) Applicant: QUAKER CHEMICAL CORPORATION [US/US]; Elm and Lee Streets, Conshohocken, PA 19428-0809 (US). (72) Inventors: TRAUFFER, Edward, A.; 1446 Noble Road, Rydal, PA 19046 (US). CAGLAR, Muge; 804 Cricket Avenue, Ardmore, PA 19003 (US). (74) Agents: BEARDELL, Louis, W., Jr. et al.; Ratner & Prestia, One Westlakes, Berwyn, Suite 301, P.O. Box 980, Valley Forge, PA 19482-0980 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: METHOD AND COMPOSITION FOR THE REGENERATION OF AN AMINAL COMPOUND (57) Abstract The present invention provides a method and composition regeneration of an aminor that has previously been reacted with a sulfide selected from hydrogen sulfide and mercaptans. The method includes contacting a scavenging mixture which includes an aminor, and an oxidation catalyst with a gas such as air, oxygen enriched air, oxygen, ozone enriched air and ozone. The composition includes an aminor, and an oxidation catalyst. The method and composition are useful for the regeneration of an aminor base sulfur scavenging compound.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

- 1 -

METHOD AND COMPOSITION FOR THE REGNERATION OF AN AMINAL COMPOUND

Field of the Invention

The present inventions relates to a method and composition for the
5 regeneration of an aminor that had previously been at least partially reacted with a
sulfide. The method is particularly useful because it allows for economic *in situ*
regeneration of the at least partially reacted aminor.

Background of the Invention

Hydrogen sulfide is a toxic, corrosive and malodorous compound. It may be
10 found in a variety of liquid and gaseous media such as natural gas, petroleum,
refinery gas streams, carbon dioxide, hydrogen, coal gas streams, gas streams
from viscose rayon production, tars and asphalt, shale gas, coke oven gases,
ammonia synthesis gas, rubber vulcanization streams, gases from sulfurization
plants, turpentine production, pulp and paper mill effluent, sewage, brine drilling
15 mud, land fills, phosphoric acid production gas streams, and other industrial gas
streams and effluents. It is also found in the tail gases and liquids of some
hydrogen sulfide scrubbing processes such as Claus plants and amine scrubbing
units.

Hydrogen sulfide is an undesirable contaminant and its release into the
20 environment is strictly controlled by the Environmental Protection Agency, the
Department of Environmental Resources, as well as by other regulatory agencies
throughout the world. Hydrogen sulfide not only has an offensive odor, but it has
also been linked to the formation of acid rain.

Methods for removing hydrogen sulfide may be generally classified as
25 regenerative and non-regenerative. Regenerative processes are generally more
desirable because waste products are recycled. By regenerating sulfur
scavenging compounds and thereby recycling the waste products, the cost, both
economically and environmentally, of replenishing spent chemicals in the process
and disposing of the waste products is lessened or eliminated. It is even more

- 2 -

desirable to recover the sulfur scavenged during the hydrogen sulfide scavenging reaction in a useful form.

Various amines and alkanolamines, which may be regenerated, have been used to remove acids, such as hydrogen sulfide from gas streams. U.S. Patent
5 No. 2,776,870 discloses that aqueous amines and alkanolamines are useful for removing acids from a gaseous mixture. Hydrogen sulfide may be selectively removed from gas streams containing carbon dioxide by use of triethanolamine or methyldiethanolamine.

British Published Patent Specification No. 2103645 discloses that hydrogen
10 sulfide and carbon dioxide may be removed from a gas mixture by contacting the mixture with a solvent comprising a tertiary amine and a physical absorbent. Suitable physical adsorbents include N-methylpyrrolidone and sulfolane.

U.S. Patent No. 4,112,051 discloses a process for removing acidic gases from a gaseous mixture with an amine-solvent liquid absorbent comprising (1) an
15 amine comprised of at least about 50 mole percent of a steric hindered amine; and (2) a solvent for the amine mixture which is also a physical absorbent for the acid gases. Suitable steric hindered amines include various piperidine compounds. Suitable solvents include sulfones and pyrrolidone and piperidone compounds, to name a few.

20 U.S. Patent No. 4,978,512 discloses methods for reducing the levels of hydrogen sulfide and organic sulfides in a hydrocarbon stream by contacting the stream with a composition comprising the reaction products of a lower alkanolamine with a lower aldehyde. Suitable reaction products include mixtures of triazine and bisoxazolidine compounds.

25 U.S. Patent No. 4,647,397 discloses a process and composition for removing hydrogen sulfide and similar sulfides from a gas stream. The gas stream is contacted with a substituted aromatic nitrile having an electron-attracting substituent on the aromatic ring at least as strong as a halogen and an organic tertiary amine in an inert organic solvent, such as N-methyl-2-pyrrolidone. The
30 spent contacting solution may be regenerated by heating the solution above the

- 3 -

decomposition temperature of the reaction products to separate the sulfides from the liquid phase absorbent solution.

U.S. Patent No. 4,775,519 discloses a continuous process for removing acid gas components from a gas stream by counter-currently contacting the stream with an aqueous solution of a mixture of N-methyldiethanolamine (MDEA) with
5 imidazole or a methyl substituted imidazole. The gas is de-absorbed from the MDEA and the imidazole by reducing the pressure and causing the gas to flash.

U.S. Patent No. 4,624,838 discloses a process for removing acid gases from a gaseous stream by contacting the stream with an aqueous scrubbing solution
10 containing a hetero amine comprising either a five- or six- membered ring having a pKa no greater than about 8. Preferred hetero amines include imidazole and piperazine compounds.

U.S. Patent No. 5,128,049 discloses a method for reducing the hydrogen sulfide content of hydrocarbon-containing fluids and aqueous solutions by
15 injections of a dilute solution of a scavenging agent. Suitable scavenging agents include hexahydro-1,3,5-tris(2-hydroxyethyl)-s-triazine and various other compounds.

U.S. Patent 5,347,003 describes a regenerative method where an N-C-N compound is regenerated from a product of a sulfur scavenging reaction, in which
20 said N-C-N compound removes a sulfur atom from a sulfur compound to form the original N-C-N compound.

U.S. Patent 3,622,273 discloses a regenerative method for the removal of hydrogen sulfide from a gaseous stream wherein the gaseous stream is contacted with a solution containing, by weight, from 0.005 to 20 percent of a ferric ion
25 complex, from 25.0 to 99.945 percent of water and from 0.05 to 10.0 percent of a buffering agent selected from the group consisting of alkali metal carbonate.

There are numerous patents dealing with the removal of hydrogen sulfide from liquid or gas streams with various metal chelates through redox reactions with a higher oxidation state of the metal followed by oxidative regeneration through the

- 4 -

use of air. As a sampling: U.S. Patent 4,076,621 deals with iron chelates for the removal of hydrogen sulfide from water; U.S. 4,414,194 deals with iron chelates with alcohol as a crystal modifier; 4,436,714 deals with the use of metal chelates followed by electrolytic regeneration. All of the patents related to the use of metal
5 chelates have in common the use of the metal ion to directly oxidize hydrogen sulfide to a higher oxidation state. A draw back of this technology is the long contact time required in order to achieve efficient removal of hydrogen sulfide from the gas streams and the cost of the reactants. Another drawback is the tendency of the metal chelates to precipitate out of solution with pH changes or over time
10 due to the relative instability of the chelated metal ions.

U.S. Patent 4,455,287 describes a method of oxidizing hydrogen sulfide in gases to elemental sulfur by a continuous polyvalent metal catalytic liquid phase oxidation with catalysts such as iron chelate solutions in which the solution is stabilized by incorporating a general purpose biocide at a level below the kill
15 concentration of the biocide. Typical biocide concentrations were in the range of low parts per million by weight of solution. This is different from the present invention in that the amination compounds are not general purpose biocides, although at least one has been used as a fungicide. None of the biocides described are known to reduce the levels of hydrogen sulfide. Additionally, the levels of biocide
20 used were far too low to achieve a measurable reduction of hydrogen sulfide, even if they were reactive.

There is a long-felt need in the art for improved, economic methods for regenerating sulfur scavenging compounds. Regenerating such compounds is not only environmentally desirable, but is also cost efficient and may reduce or
25 eliminate the need for expensive processing equipment. In addition, since the scavenging compounds are regenerated, the need for purchasing replacement scavenging compound is greatly reduced.

An even greater benefit may be realized when the scavenged compounds are converted to a commercially useful form. The regeneration of sulfur
30 compounds in such form provides a further financial incentive for the scavenging of

- 5 -

such compounds and even further reduces the burden on waste disposal systems.

Definitions

As used herein the term "sulfides" is defined to mean compounds selected from the group including hydrogen sulfide and mercaptans.

5 As used herein the term "spent" is defined to mean at least partially reacted with a sulfide for the formation of at least some hetero compound.

As used herein the term "vessel" is defined to mean any scrubber, tank or pipe in which gas may be contained or through which it may be passed.

Summary of the Invention

10 The present invention provides a method and composition for the regeneration of an aminal. The method includes contacting a scavenging mixture which includes an aminal, and an oxidation catalyst with a gas such as air, oxygen enriched air, oxygen, ozone enriched air and ozone. The composition includes an aminal, and an oxidation catalyst.


15 An aminal is a reaction product between an aldehyde and a nitrogen containing compound selected from the group consisting of primary amines, secondary amines and ammonia. Typical aldehydes include formaldehyde, paraformaldehyde, glyoxal, acetaldehyde, butyraldehyde, benzaldehyde, N-(2-hydroxyethyl)dioxazine and oleyl aldehyde. Typical nitrogen containing
20 compounds include ammonia, methylamine, ethylamine, propylamine, isopropyl amine, oleylamine, ethylene diamine, diethylene triamine, dimethylamine, diethylamine, monoethanolamine, diethanolamine, morpholine, piperazine, 3-ethoxypropylamine, 1-methoxyisopropylamine, 2-methoxyethylamine, thiomonoethanolamine and chlorooleylamine. The oxidation catalyst is an
25 oxidizing agent with at least mild oxidation properties. Typical oxidation catalysts are selected from the group consisting of halides, quinones, organic peroxides, organic peroxyacids, inorganic peroxides, organic oxides, hydrazines, amino acids, amides, carbamates, carbazides, perchlorates, polyvalent metals and compounds thereof, inorganic oxidizers and organic dyes. It is preferred that the catalysts be

- 6 -

water soluble in order to better facilitate the regeneration step.

Description of the Preferred Embodiments

The present method describes a means for the removal of hydrogen sulfide from a gaseous stream with subsequent regeneration of the reaction mixture. E. A. Trauffer and R. D. Evans in U.S. Patent 5,347,003, incorporated herein by reference, describe a method for regenerating a sulfur scavenging compound from a product of a sulfur scavenging reaction wherein the sulfur scavenging compound is represented by an aminor of the formula (I):



(I)

Each of R^1 , R^2 , R^3 , R^4 , and R^5 is independently selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons; (iii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons comprising at least one heteroatom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; and (v) a direct bond to any other of R^1 , R^2 , R^3 , R^4 , and R^5 .

Examples of amines which are useful as the initial scavenging step include various triazines, such as 1,3,5-tris(2-hydroxyethyl)hexahydro-s-triazine, and trimethyl triazine, bisoxazolidines, such as N,N'-methylene bisoxazolidine, bis(dibutylamino)methane and bis(di-2-hydroxyethylamino)methane, bis(morpholino)methane, and 1,3,6,8-tricyclotetraaza[4,4,1,1^{3,8}]-dodecane.

At least part of the amine is first reacted with hydrogen sulfide from the hydrogen sulfide containing stream forming a hetero compound. The hetero compound is then reacted with an alkaline compound to regenerate the spent amine.

- 7 -

While efficient, the regenerative method described requires the addition of an alkaline material in a quantity that is proportional to the amount of hydrogen sulfide that has been reacted.

Our co-pending application number 08/587,837, incorporated herein by
5 reference, discloses a superior method and composition for the removal of sulfides from gaseous streams. The method includes contacting the sulfide-containing gas stream with an aqueous scavenging mixture which includes an aminal, an inorganic ion and an oxidation catalyst; regenerating at least a portion of the aminal with a gas such as air, oxygen enriched air, oxygen, ozone enriched air and
10 ozone; and returning at least a portion of the aqueous scavenging mixture to the contacting zone.

While effective, the method and composition still requires the addition of an inorganic ion to the scavenging mixture, similar to that used in 5,347,003. The use of an inorganic ion adds a level of complexity to the manufacture.

15 We have discovered that sulfur can be directly oxidized from a hetero compound without the addition of an inorganic base. This is particularly surprising since analogous thioethers do not react with oxidizing agents to form elemental sulfur, but rather normally react to form sulfones and sulfoxides in which the sulfur atom remains in the organic molecule and is oxidized to a higher oxidation state.
20 In the present method, sulfur is eliminated in the form of elemental sulfur and is subsequently replaced by a nitrogen containing compound. It is possible that this unusual reaction occurs due to a stabilized transition state as discussed below. It is therefor likely that the presence of nitrogen in the beta position with respect to sulfur in the hetero compound plays a significant role in the regeneration reaction.

25 The present method allows for the direct oxidation of the hetero compound resulting in the formation of elemental sulfur and the regenerated aminal. This is achieved by preparing a composition containing the aminal, the oxidation catalyst, and optionally, diluent water. Improved economy is achieved by providing a method in which a sub-stoichiometric quantity of oxidation catalyst may be used.

30 The composition may also contain a variety of other components that may impart

- 8 -

additional desirable properties, including but not limited to, defoamers, crystal modifiers, antifreeze compounds and scents.

In the present method, the aminal is a reaction product between

(a) a hydrous or anhydrous aldehyde of formula (II):



Where R is selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons; (iii) a substituted or unsubstituted, saturated or
 10 unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons comprising at least one heteroatom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; (v) a substituted or unsubstituted dimer (vi) a mono or polyaldehyde; and
 (b) a nitrogen containing compound of formula (III)



Wherein R¹ and R² are independently selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons; (iii) a substituted or
 20 unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons comprising at least one heteroatom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; and (v) a direct bond to any other of R¹ and R².

Examples of aldehydes suitable for the present invention include
 25 formaldehyde, paraformaldehyde, glyoxal, acetaldehyde, butyraldehyde, benzaldehyde, N-(2-hydroxyethyl)dioxazine and oleyl aldehyde. Examples of



- 9 -

nitrogen containing compounds suitable for the present invention include, but are not limited to: ammonia, methylamine, ethylamine, propylamine, isopropyl amine, oléylamine, ethylene diamine, diethylene triamine, dimethylamine, diethylamine, monoethanolamine, diethanolamine, morpholine, piperazine, 3-ethoxypropylamine, 5 1-methoxyisopropylamine, 2-methoxyethylamine, thiomonoethanolamine and chlorooleylamine.


The nitrogen containing compound and the aldehyde of the present invention may be reacted in any molar ratio with a preferred ratio being from 1 mole aldehyde to 10 moles nitrogen containing compound to 10 moles aldehyde to 10 1 mole nitrogen containing compound, a more preferred ratio being from 1 mole aldehyde to 5 moles nitrogen containing compound to 5 moles aldehyde to 1 mole nitrogen containing compound, an even more preferred ratio being 1 mole aldehyde to 3 moles nitrogen containing compound to 3 moles aldehyde to 1 mole nitrogen containing compound and a most preferred ratio being 1 mole aldehyde to 15 1 mole nitrogen containing compound.

The aminal formed from the reaction of the aldehyde and nitrogen containing compound are dependent upon the selected nitrogen containing compound, the selected aldehyde and the ratios of each selected, as is self evident to those of ordinary skill in the art. Similarly, mixtures of the above 20 aldehydes and nitrogen containing compounds may also be reacted in order to form singular, or mixtures of, various aminals as is also evident to one of ordinary skill in the art.

The reaction of the nitrogen containing compound and the aldehyde listed above will typically result in the formation of an aminal. Aminals typical of those 25 formed in the described reaction are of the type as in formula I, IV, formula V, or mixtures thereof as is evident to one of ordinary skill in the art where formula I, IV and formula V are represented by:



- 10 -



I

IV

V

Where n is an integer from 1 to 1000 and each of R¹, R², R³, R⁴, and R is independently selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons; (iii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons comprising at least one heteroatom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; and (v) a direct bond to any other of R¹, R², R³, R⁴, and R.


Non-limiting examples of aminals which are useful for the present invention include various triazines, such as 1,3,5-tris(2-hydroxyethyl)hexahydro-s-triazine, and trimethyl triazine, bisoxazolidines, such as N,N'-methylene bisoxazolidine, bis(morpholino)methane, 1,3,6,8-tricyclotetraaza[4,4,1,1^{3,8}]-dodecane, non-generic aminals such as 2,7-dioxa-5,10 diazabicyclo[4.4.0]dodecane, methylaminomethanol, ethylmethyleimine, isopropylmethyleimine, and hexamethylenetetramine.

Suitable oxidation catalysts include, but are not limited to: halides, quinones, organic peroxides, organic peroxyacids, inorganic peroxides, organic oxides, hydrazines, amino acids, amides, carbamates, carbazides, perchlorates, polyvalent metals and compounds thereof, inorganic oxidizers and organic dyes. Specific examples of oxidation catalysts include 1,2,Naphthaquinone-4-sulfonic acid sodium salt, 4-amino-3-hydrazino-5-mercapto-1,2,4-triazole, 2-hydroxy-1,4-naphthaquinone, and metachloroperbenzoic acid.

The oxidation step of the present invention can be accomplished through the use of very mild oxidation catalysts. It is believed that the ease of oxidation of the sulfur from the spent amina is due to stabilization of the transition state due to

- 11 -

imine formation. A specific, non-limiting representation can be seen in scheme (I).

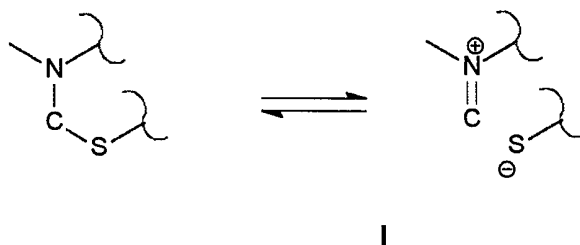

As a result, virtually any chemical compound with even mild oxidative ability is
 5 suitable to act as an oxidation catalyst in the present invention.

An example of a typical spent aminor, 5,6-dihydro-5-(2-hydroxyethyl)-
 -4H-1,3,5-dithiazine shows an irreversible oxidation wave with a peak potential of
 about 0.6 volts vs. NHE (standard hydrogen electrode) as determined by cyclic
 voltammetry at a scan rate of 10 millivolts/second. A second irreversible oxidation
 10 wave appears at about 1.5 volts. Oxidation reactions of the solvent are significant
 at this potential, and the second wave is fully resolved only after a passivating film
 covers the electrode. This second wave likely corresponds to the oxidation of the
 1,3,5-(2-hydroxyethyl)-hexahydro-s-triazine that is formed from the oxidation of the
 dithiazine. Chronopotentiometry experiments demonstrated a slight oxidizing
 15 current could be achieved at a potential of 0.18 volts. The reaction rate is slow at
 such low potentials, but it increases significantly at a potential of about 0.3 volts.
 Zero current was maintained at a potential of about 0.02 volts. This indicates that
 any compound with a standard reduction potential greater 0.02 volts is suitable for
 the conversion of spent aminor to aminor.

20 Oxygen is well suited to drive the oxidation of the spent aminor since the half
 reaction $O_2 + 4 e^- \rightarrow 4 OH^-$ has a standard reduction potential of 0.4 volts.
 However, the reaction between oxygen by itself and the spent aminor is not fast
 enough to drive the reaction at an acceptable rate. The use of a catalytic amount
 of an oxidizing agent in the present invention produces a suitable reaction rate.

25 Virtually any oxidizing agent that can be regenerated by oxygen will catalyze the
 reaction to accelerate regeneration of the aminor. There is no need for the
 oxidizing agent to have a standard reduction potential greater than 0.18 volts. As


- 12 -

an example, anthraquinone-2,6-disulfonate, which has a formal potential of -0.325 volts in alkaline solutions, is quite effective in catalyzing the conversion of 5,6-dihydro-5-(2-hydroxyethyl)-4H-1,3,5-dithiazine to the 1,3,5-(2-hydroxyethyl)-hexahydro-s-triazine. It is preferred that the selected oxidation catalyst has a standard reduction potential of at least -0.4 volts. It is more preferred that the selected oxidation catalyst has a standard reduction potential from 0.0 to 0.9 volts. It is most preferred that the selected oxidation catalyst has a standard reduction potential between 0.3 and 0.8 volts.

The overall reaction method involves contacting the composition which contains the aminal and the oxidation catalyst with a gas containing a sulfide selected from hydrogen sulfide and mercaptans, in order to react at least some of the aminal with the sulfide, and forming at least some spent aminal in the form of a sulfur containing compound. The sulfur containing compound is then reacted with the oxidation catalyst and an oxidation source selected from gases containing air, oxygen, ozone, or mixtures thereof, to oxidize the sulfur from the sulfur containing compound in the form of elemental sulfur or some higher oxidation state of sulfur. The oxidation is carried out through the aid of the oxidation catalyst in solution to better facilitate oxidation.

The reaction is believed to proceed as in the following specific, non limiting example:

- 13 -

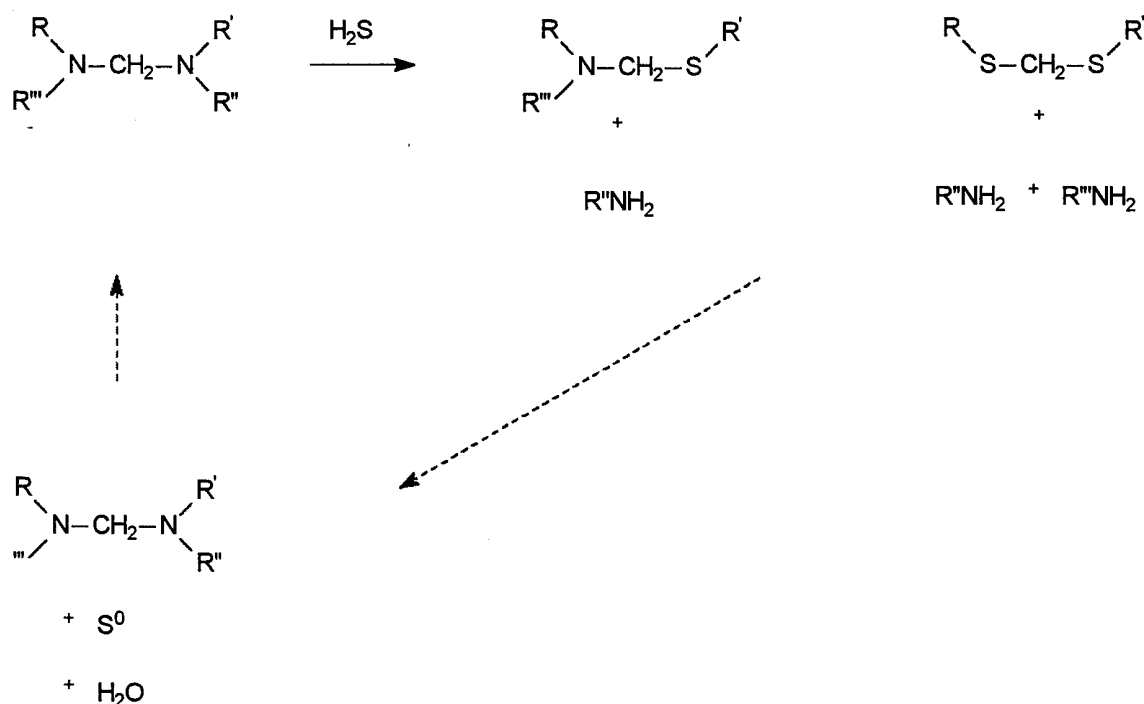

It is important to note that each of the components of the mixture may be added in either their initially reactive, or reacted form since all of the reactants in solution are regenerated in at least one step of the process. The oxidation catalyst maybe added in either an oxidized or reduced form. Similarly, the aminal may be added in spent or fresh form.

Upon regeneration, the identical aminal that was used in the starting composition is not necessarily formed. The regenerated compound may be of a different chemical structure due to rearrangement, disproportionation or other chemical transformations. However, whatever the structure, the regenerated compound will react in the desired manner to scavenge hydrogen sulfide and mercaptans.

The present method provides for a superior regenerative sulfide scavenging system due to the rapid reaction of the aminal with hydrogen sulfide. The rapid reaction time allows for the design of relatively small contact equipment for low capital cost. Additionally the process may be carried out in virtually any existing equipment that has been designed for the removal of hydrogen sulfide from gasses by metal chelates. Such processes include, but are not limited to: Stretford, Lo-Cat and Sulferox equipment. Existing non-regenerative scrubber equipment may also

- 14 -

be utilized by adding a regeneration loop in which the at least partially spent aminal is drained from the scrubber, directed to the regeneration equipment, and then returned to either a storage tank or directly to the contact scrubber.

Regeneration and scavenging can also be accomplished in one vessel where the
5 oxygen content of the gas stream passing through the liquid is at least as high as the concentration of hydrogen sulfide in the gas stream.

The method and composition of the present invention offer several distinct advantages over common metal-chelate systems. Metal-chelates remove hydrogen sulfide through a redox reaction between the oxidized form of the metal
10 and the hydrogen sulfide in a contacting vessel. Elemental sulfur is formed in the contacting vessel as a result of this reaction. Sulfur fouling is a common problem that plagues these systems. By contrast, elemental sulfur is not formed upon contact with the scavenging composition of the present invention when the oxidation catalyst is in a reduced state. This allows for a much more controlled
15 precipitation of the sulfur, upon contact with oxygen. The sulfur can therefore be formed in a separate vessel, or even at a distant time, if so desired.

Metal-chelates also rely heavily on the chelant to keep the metal in solution. The system is pH dependent and subject to degradation due to free radical reactions, both of which may render it less efficient or inoperable. This problem is
20 avoided in the present invention by allowing for the selection of a water soluble oxidation catalyst that will not separate out from the system. The present invention also does not rely on heavy dilution of the scavenging system. This allows for the use of significantly smaller equipment with increased efficiency.

In a typical application fresh, or fully or partially regenerated aminal is
25 contacted with a hydrogen sulfide or mercaptan containing gas stream for a time sufficient to lower the levels of hydrogen sulfide or mercaptans to the desired amount. Some or all of the resultant at least partially spent aminal is removed from the scrubber and transferred to an oxidation zone. The solution is contacted with an oxidizing gas such as air, oxygen, ozone, or mixtures thereof, in the presence of
30 an oxidation catalyst for a period of time to allow for the partial or complete

- 15 -

regeneration of the aminal. In the oxidation tank, the sulfur in the spent aminal is oxidized to elemental sulfur and other higher oxidation states of sulfur. The resultant slurry containing elemental sulfur and at least partially regenerated aminal is optionally passed through a solids separation stage where at least a
5 portion of the solid elemental sulfur is removed. Solid separation may be achieved by any means known in the art including, but not limited to, settling, gravity filtration, vacuum filtration, centrifugation, filter pressing, or combinations thereof. The solution is then passed to a storage tank or returned to the scrubber. The process may be carried out either continuously or in a batch operation. A certain
10 amount of volume of the liquid is lost in the solid separation stage. Make-up product may be added at any point in the process to replace the lost volume. A preferred injection point of make-up material is prior to the scrubber. This will allow for the highest concentration of aminal in the gas contacting stage. Equipment or other considerations may require addition of make-up at other points.

15

As with virtually all catalytic processes, there will be some depletion or deactivation of the oxidation catalyst in the process of the present invention. The replacement of the depleted catalyst is most conveniently added as part of the make-up system described. It may optionally be added at a different point in the
20 process as a matter of convenience.

20

The solution may also be applied in an auto circulation type equipment in which scrubbing and oxidation are carried out in the same vessel as described in U.S. Patent 5,160,714, incorporated herein by reference. Similar effects may be achieved where the sulfide containing gas stream contains a sufficient amount of
25 oxygen to allow for scrubbing and oxidation in the same vessel. The oxygen may be already present, or may be combined with the sulfide containing gas stream through the introduction of air, or an alternate source of oxygen gas.

25

It is recognized that in a continuous process, there will always be at least some spent aminal present at all points in the system if the equipment is optimized
30 for capital cost and material cost. The presence of spent aminal will have no

30

- 16 -

deleterious effect on the reactions in the system. Under these conditions the solution will also contain the reduced form of the oxidation catalyst. The presence of the reduced form of the oxidation catalyst will not result in a reduction in the amount of hydrogen sulfide in the scrubber section of the apparatus since it is
5 unreactive with hydrogen sulfide in this state.

The ratios of amination to oxidation catalyst may vary dependent on the physical parameters of the installed equipment. In general the quantity of oxidation catalyst should be minimized due to its relatively higher cost. Ratios to be utilized are best determined on a molar basis. The effective equivalent weight
10 of the amination can most easily be determined by reacting it to completion with a measured quantity of hydrogen sulfide and then dividing the weight of the amination utilized by the moles of hydrogen sulfide consumed. Ideally the hydrogen sulfide source should be the gas stream to be treated. The equivalent weights of the oxidation catalysts are well known in the art.

15 It is preferred that from 1 to 10000 molar equivalents of amination is utilized with from 1 to 10000 equivalents of oxidation catalyst. In a more preferred method, from 1 to 10000 molar equivalents of amination is utilized with from 1 to 100 molar equivalents of oxidation catalyst. In a most preferred method from 1 to 10000 molar equivalents of amination is utilized with from 1 to 10 molar equivalents of
20 oxidation catalyst.

Water is optionally present in the composition of the present method as a diluent. The presence of water will also serve to aid in the separation of elemental sulfur by lowering the viscosity of the solution. Water may be present in any quantity, with a preferred quantity being up to 99.5% by weight, a more preferred
25 quantity being from 25% by weight to 99.5% by weight and a most preferred being from 50% by weight to 95% by weight.

The present method will now be illustrated in more detail by reference to the following, specific, non-limiting examples.

EXAMPLE 1

- 17 -

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.2 grams of 4-amino-3-hydrazino-5-mercapto-1,2,4-triazole (99%), available commercially from Aldrich Chemical of Milwaukee WI. Ten grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture at room temperature (approx. 20°C) at a flow rate of 33 ml/sec for two days. After two days the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was completely regenerated. The solution was then reacted with 0.7 grams of 99.5% hydrogen sulfide gas, available commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The aeration cycle was repeated and the solid precipitate (0.4 grams) was vacuum filtered with a 25 micron glass filter.

EXAMPLE 2

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.2 grams of Maleic acid (99%), available commercially from Aldrich Chemical of Milwaukee WI. Ten grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 2 days at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 58% regenerated.

EXAMPLE 3

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of

- 18 -

Milwaukee WI, to completion, was mixed with 1.1 grams of Potassium Permanganate (15.804%), available commercially from Fisher Scientific Company of Fair Lawn, New Jersey. Ten grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air through the mixture at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. After two days the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was completely regenerated. The solution was then reacted with 0.9 grams of 99.5% hydrogen sulfide gas, available commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The aeration cycle was repeated and the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 28% regenerated.

EXAMPLE 4

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.2 grams of 5-amino valeric acid (97%), available commercially from ACROS Organics of Pittsburgh PA. Fifteen grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 12 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 68% regenerated.

EXAMPLE 5

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.15 grams of hydrazine dihydrochloride (99.9%), available commercially from Aldrich Chemical of

- 19 -

Milwaukee WI. Ten grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 12 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 59% regenerated.

EXAMPLE 6

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.26 grams of 2,4,6-trihydroxybenzoic acid monohydrate (90%), available commercially from Aldrich Chemical of Milwaukee WI. Ten grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 12 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 10% regenerated.

EXAMPLE 7

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.20 grams of 2-hydroxy-1,4-naphthoquinone (97%), available commercially from Aldrich Chemical of Milwaukee WI. Fifteen grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 2.5 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 43% regenerated.

EXAMPLE 8

Five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine,

- 20 -

available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.5 grams of anthraquinone-2, 6-disulfonic acid disodium salt, available commercially from Aldrich Chemical of Milwaukee WI. Fifteen grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 4 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 74% regenerated.

10 EXAMPLE 9

Seven and a half grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.17 grams of 1,4-benzoquinone (98%), available commercially from Aldrich Chemical of Milwaukee WI. Twenty-three grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 2 days at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 91% regenerated. The solution was then reacted with 0.7 grams of 99.5% hydrogen sulfide gas, available commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The aeration cycle was repeated and the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was completely regenerated. The solution was then reacted with 0.6 grams of 99.5% hydrogen sulfide gas by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector.

- 21 -

EXAMPLE 10

Twenty-five grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. was mixed with 1.3 grams of 1,4-benzoquinone (98%), available commercially from Aldrich Chemical of Milwaukee WI. Twenty three grams of distilled water was added to this mixture. The solution was then reacted with 7.4 grams of 99.5% hydrogen sulfide gas, available commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 7 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 80% regenerated. The solution was then reacted with 2.3 grams of 99.5% hydrogen sulfide gas, available commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. Two grams of sodium bicarbonate, available commercially from ARM & HAMMER of Princeton NJ, and two grams of 50% sodium hydroxide solution, available commercially from Aldrich Chemical of Milwaukee WI, were added to the solution and the aeration cycle was repeated for 21 hours. The 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 93% regenerated. The solution was then reacted with 1.3 grams of 99.5% hydrogen sulfide gas by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The aeration cycle was repeated for 2 days and 90% of the 1,3,5-tri(2-hydroxyethyl) hexahydro-s-triazine solution was regenerated. The solution was then reacted with 2.3 grams of 99.5% hydrogen sulfide gas by bubbling the

- 22 -

hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The aeration cycle was repeated for 33 hours and 63% of the 1,3,5-tri(2-hydroxyethyl) hexahydro-s-triazine solution was regenerated.

EXAMPLE 11

Seven and a half grams of a 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. that had been previously reacted with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, to completion, was mixed with 0.17 grams of 1,2-naphthaquinone-4-sulfonic acid sodium salt (97%), available commercially from Aldrich Chemical of Milwaukee WI. 23 grams of distilled water was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 6 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine solution was 75% regenerated.

EXAMPLE 12

An aqueous solution of 1,3,6,8-tricyclotetraaza[4,4,1,1^{3,8}]-dodecane was prepared by reacting 50.1 grams of 37 percent formaldehyde available from Borden Chemical of Sheboigan, WI in an ice bath with the slow addition of 20.1 grams of 99% ethylenediamine, available from Aldrich Chemical of Milwaukee WI with an addition funnel over a period of two hours. The solution was allowed to warm to room temperature (approx. 22°C) at the end of the two hour addition period.

Once synthesized, 34.5 grams of 1,3,6,8-tricyclotetraaza[4,4,1,1^{3,8}]-dodecane, was diluted with 120 grams of distilled water and the solution was then reacted with 3.3 grams of 99.5% hydrogen sulfide gas by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. 2.6 grams of 1,2-naphthaquinone-4-sulfonic acid sodium salt (97%), available commercially

- 23 -

from Aldrich Chemical of Milwaukee WI, was added to this mixture. The solution was then stirred and aerated in a 500 ml bottle by bubbling air into the mixture for 2 days at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. The solution was then reacted with 2.6 grams of 99.5% hydrogen sulfide gas, available

5 commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector.

The aeration cycle was repeated for 1 day before the next scrubbing cycle. The

10 solution was then reacted with 1.8 grams of 99.5% hydrogen sulfide gas by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector.

15 Example 13

Approximately five grams of iodine, available from Aldrich Chemical, Milwaukee, WI was added to 50 ml of a 43% solution of 1,3,5-(2-hydroxyethyl)hexahydro-s-triazine that had previously been reacted to completion with 99.5% hydrogen

sulfide, available from Aldrich Chemical, Milwaukee, WI. The mixture was stirred

20 and aerated at room temperature (approx. 20°C) by bubbling air into the mixture for eight hours at a flow rate of 33 ml/sec. At the end of the eight hour period, the liquid was analyzed on a Varian 200 MHz NMR and found to contain 1,3,5-(2-hydroxyethyl)hexahydro-s-triazine and no detectable level of the spent triazine.

Example 14.

25 A 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. was placed in a 500ml glass bottle and reacted to completion with 99.5% hydrogen sulfide, commercially from Aldrich

Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was

30 continued until the presence of hydrogen sulfide was detected in the gas exiting

- 24 -

the bottle with a portable hydrogen sulfide gas detector. The spent solution was then diluted to 25% by weight with tap water. A solution of 25.6 grams of the diluted spent triazine and 0.26 grams of V_2O_5 , available commercially from Aldrich Chemical of Milwaukee WI., was placed in a separate 500 ml bottle. The solution
5 was then stirred and aerated in the 500 ml bottle by bubbling air into the mixture for 15 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine was 79% regenerated.

Example 15

10 A 43% solution of 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine, available commercially from Quaker Chemical Corp. was placed in a 500ml glass bottle and reacted to completion with 99.5% hydrogen sulfide, commercially from Aldrich Chemical of Milwaukee WI, by bubbling the hydrogen sulfide into the solution at room temperature (approx. 20°C) at a flow rate of 4.8 ml/min. The bubbling was
15 continued until the presence of hydrogen sulfide was detected in the gas exiting the bottle with a portable hydrogen sulfide gas detector. The spent solution was then diluted to 25% by weight with tap water. A solution of 25.0 grams of the diluted spent triazine and 0.20 grams of copper (II) sulfate, available commercially from Aldrich Chemical of Milwaukee WI., was placed in a separate
20 500 ml bottle. The solution was then stirred and aerated in the 500 ml bottle by bubbling air into the mixture for 15 hours at room temperature (approx. 20°C) at a flow rate of 33 ml/sec. At the end of the aeration process the 1,3,5-tri(2-hydroxyethyl)hexahydro-s-triazine was 97% regenerated.

The present invention may be embodied in other specific forms without
25 departing from the spirit or essential attributes thereof and, accordingly, reference should be made to the appended claims rather than to the foregoing specification as indicated scope of the invention.


- 25 -

We claim:

1. A method for regenerating an at least partially spent aminal comprising, reacting said at least partially spent aminal with: a gas containing an oxidation source selected from the group consisting of air, oxygen, ozone, and mixtures thereof, in the presence of an oxidation catalyst.


2. A method as in claim 1 wherein, said aminal is a reaction product of a) an aldehyde and b) a nitrogen containing compound selected from the group consisting of ammonia, primary amines and secondary amines.

3. A method as in claim 2 wherein, said aldehyde is selected from the group consisting of hydrous and anhydrous forms of formula II



II

where R is selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons; (iii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons comprising at least one hetero atom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; (v) a substituted or unsubstituted dimer; and (vi) a mono or polyaldehyde; and wherein said nitrogen containing compound has the formula III



III

wherein R¹ and R² are independently selected from the group consisting of (i)

- 26 -

18 hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear,
19 branched or cyclic hydrocarbon chain of 1 to 50 carbons; (iii) a substituted or
20 unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon
21 chain of 1 to 50 carbons comprising at least one hetero atom selected from the
22 group consisting of nitrogen, oxygen, sulfur and halogen; and (iv) a substituted or
23 unsubstituted polymeric chain; wherein R¹ and R² may be bonded to one another.

1 4. A method as in claim 3 wherein,

2 said aldehyde is selected from the group consisting of formaldehyde,
3 paraformaldehyde, glyoxal, acetaldehyde, butyraldehyde, benzaldehyde, N-(2-
4 hydroxyethyl)dioxazine and oleyl aldehyde.

1 5. A method as in claim 4 wherein, said aldehyde is formaldehyde.

1 6. A method as in claim 3 wherein, said nitrogen containing compound is
2 selected from the group consisting of ammonia, methylamine, ethylamine,
3 propylamine, isopropyl amine, oleylamine, ethylene diamine, diethylene triamine,
4 dimethylamine, diethylamine, monoethanolamine, diethanolamine, morpholine,
5 piperazine, 3-ethoxypropylamine, 1-methoxyisopropylamine, 2-methoxyethylamine,
6 thiomonoethanolamine and chlorooleylamine.

1 7. A method as in claim 6 wherein, said nitrogen containing compound is
2 selected from the group consisting of ethylene diamine and monoethanolamine.




1 8. A method as in claim 1 wherein, said oxidation catalyst has a standard
2 reduction potential of at least -0.4 volts.

1 9. A method as in claim 8 wherein, said oxidation catalyst has a standard
2 reduction potential from 0.0 volts to 0.9 volts.

1 10. A method as in claim 9 wherein, said oxidation catalyst has a standard
2 reduction potential from 0.3 volts to 0.8 volts.

1 11. A method as in claim 1 wherein, said amination comprises at least one of
2 the compounds selected from the group consisting of compounds of formula I,
3 formula IV and formula V

- 27 -



I

IV

V

where n is an integer from 1 to 1000 and each of R^1 , R^2 , R^3 , R^4 , and R is independently selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons; (iii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons comprising at least one heteroatom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; and (iv) a substituted or unsubstituted polymeric chain; and wherein R^1 , R^2 , R^3 , R^4 , and R may be individually bonded to one another.

12. A method as in claim 1 wherein, said oxidation catalyst is selected from the group consisting of halides, quinones, organic peroxides, organic peroxyacids, inorganic peroxides, organic oxides, hydrazines, amino acids, amides, carbamates, carbazides, perchlorates, polyvalent metals and compounds thereof, inorganic oxidizers, and organic dyes.

13. A method as in claim 12 wherein, said oxidation catalyst is selected from the group consisting of quinones, organic peroxyacids, hydrazines and organic dyes.

14. A method as in claim 12 wherein said oxidation catalyst is selected from the group consisting of 1,2,Naphthaquinone-4-sulfonic acid sodium salt, 4-amino-3-hydrazino-5-mercapto-1,2,4-triazole, 2-hydroxy-1,4-naphthaquinone, and metachloroperbenzoic acid.

15. A method as in claim 1 wherein, said at least partially spent animal is formed through the reaction of an animal with a sulfide containing gas in a first

- 28 -

3 vessel.

1 16. A method as in claim 15 wherein, said oxidation source is contacted
2 with said at least partially spent aminal compound in a second vessel separate
3 from said first vessel in which said at least partially spent aminal is reacted with
4 said sulfide containing gas.


1 17. A method as in claim 15 wherein, said oxidation source is contacted
2 with said at least partially spent aminal compound in said first vessel.

1 18. A method as in claim 1, further comprising reacting said at least
2 partially spent animal with said oxidation source and up to 99.5% by weight water,
3 in the presence of said oxidation catalyst.

1 19. A composition for removing hydrogen sulfide from gases comprising an
2 aminal and an oxidation catalyst, wherein said aminal is capable of being
3 regenerated.

1 20. A composition as in claim 19 wherein,
2 said aminal is a reaction product formed from the reaction between
3 a)an aldehyde and
4 b) a nitrogen containing compound selected from the group consisting of
5 ammonia, primary amines and secondary amines.

1 21. A composition as in claim 20 wherein,
2 said aldehyde is selected from the group consisting of hydrous and
3 anhydrous forms of formula II




II

6 where R is selected from the group consisting of (i) hydrogen; (ii) a substituted or
7 unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon
8 chain of 1 to 50 carbons; (iii) a substituted or unsubstituted, saturated or

- 29 -

unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons comprising at least one hetero atom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; (v) a substituted or unsubstituted dimer; and (vi) a mono or polyaldehyde; and wherein said nitrogen containing compound has the formula III



III

wherein R^1 and R^2 are independently selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons; (iii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 50 carbons comprising at least one hetero atom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; (iv) a substituted or unsubstituted polymeric chain; and wherein R^1 and R^2 may be bonded to one another.

22. A composition as in claim 21 wherein, said aldehyde is selected from the group consisting of formaldehyde, paraformaldehyde, glyoxal, acetaldehyde, butyraldehyde, benzaldehyde, N-(2-hydroxyethyl)dioxazine and oleyl aldehyde.

23. A composition as in claim 22 wherein, said aldehyde is formaldehyde.

24. A composition as in claim 21 wherein, said nitrogen containing compound is selected from the group consisting of ammonia, methylamine, ethylamine, propylamine, isopropyl amine, oleylamine, ethylene diamine, diethylene triamine, dimethylamine, diethylamine, monoethanolamine, diethanolamine, morpholine, piperazine, 3-ethoxypropylamine, 1-methoxyisopropylamine, 2-methoxyethylamine, thiomonoethanolamine and chlorooleylamine.

25. A composition as in claim 24 wherein, said amine is selected from the group consisting of ethylene diamine and monoethanolamine.




- 30 -

26. A composition as in claim 19 wherein, said oxidation catalyst has a standard reduction potential of at least -0.4 volts.

27. A composition as in claim 26 wherein, said oxidation catalyst has a standard reduction potential from 0.0 volts to 0.9 volts.

28. A composition as in claim 27 wherein, said oxidation catalyst has a standard reduction potential from 0.3 volts to 0.8 volts.

29. A composition as in claim 24 wherein, said reaction product comprises at least one of the compounds selected from the group consisting of compounds of formula I, formula IV and formula V:



I

IV

V

where n is an integer from 1 to 1000 and each of R¹, R², R³, R⁴, and R is independently selected from the group consisting of (i) hydrogen; (ii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons; (iii) a substituted or unsubstituted, saturated or unsaturated, linear, branched or cyclic hydrocarbon chain of 1 to 20 carbons comprising at least one heteroatom selected from the group consisting of nitrogen, oxygen, sulfur and halogen; and (iv) a substituted or unsubstituted polymeric chain; wherein R¹, R², R³, R⁴, and R may be individually bonded to one another.

30. A composition as in claim 22 wherein, said oxidation catalyst is selected from the group consisting of halides, quinones, organic peroxides, organic peroxyacids, inorganic peroxides, organic oxides, hydrazines, amino acids, amides, carbamates, carbazides, perchlorates, polyvalent metals and compounds thereof, inorganic oxidizers, and organic dyes.

31. A composition as in claim 19 wherein, said oxidation catalyst is selected

- 31 -

2 from the group consisting of quinones, organic peroxyacids, hydrazines and
3 organic dyes.

1 32. A composition as in claim 30 wherein, said oxidation catalyst is selected
2 from the group consisting of 1,2,Napthaquinone-4-sulfonic acid sodium salt, 4-
3 amino-3-hydrazino-5-mercapto-1,2,4-triazole, 2-hydroxy-1,4-naphthaquinone, and
4 metachloroperbenzoic acid.

1 33. A composition as in claim 19, further comprising up to 99.5% by weight
2 water.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/13724

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C01B17/00 C07D251/04 C07C211/09

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C01B C07D C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 347 003 A (EDWARD A. TRAUFFER ET AL.) 13 September 1994 see claims ----	1, 19
A	US 5 508 012 A (EDWARD A. TRAUFFER) 16 April 1996 see claims ----	1, 19
A	US 5 567 213 A (DAVID R. GENTRY ET AL.) 22 October 1996 see claims -----	1, 19



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

1 October 1998

Date of mailing of the international search report

13/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Bijlen, H

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 98/13724

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5347003 A	13-09-1994	AT 159709 T AU 661629 B AU 6241194 A CA 2134445 A DE 69406513 D DE 69406513 T DK 640066 T EP 0640066 A ES 2111915 T GR 3026021 T NO 944209 A SG 43042 A WO 9420451 A US 5508012 A	15-11-1997 27-07-1995 26-09-1994 15-09-1994 04-12-1997 28-05-1998 02-06-1998 01-03-1995 16-03-1998 30-04-1998 04-11-1994 17-10-1997 15-09-1994 16-04-1996
US 5508012 A	16-04-1996	US 5347003 A AU 2959795 A WO 9602461 A AT 159709 T AU 661629 B AU 6241194 A CA 2134445 A DE 69406513 D DE 69406513 T DK 640066 T EP 0640066 A ES 2111915 T GR 3026021 T NO 944209 A SG 43042 A WO 9420451 A	13-09-1994 16-02-1996 01-02-1996 15-11-1997 27-07-1995 26-09-1994 15-09-1994 04-12-1997 28-05-1998 02-06-1998 01-03-1995 16-03-1998 30-04-1998 04-11-1994 17-10-1997 15-09-1994
US 5567213 A	22-10-1996	US 5567212 A CA 2170698 A EP 0739972 A JP 8302361 A NO 961498 A	22-10-1996 28-10-1996 30-10-1996 19-11-1996 28-10-1996