



- (51) International Patent Classification:
E21B 10/42 (2006.01) *E21B 7/02* (2006.01)
- (21) International Application Number:
PCT/US2014/066547
- (22) International Filing Date:
20 November 2014 (20.11.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/085,218 20 November 2013 (20.11.2013) US
- (71) Applicant: **LONGYEAR TM, INC.** [US/US]; 10808 South River Front Parkway, Suite 600, South Jordan, UT 84095 (US).
- (72) Inventors: **PEARCE, Cody, A.**; 472 Waterford Way, Midvale, UT 84047 (US). **RUPP, Michael, D.**; 692 Justin Drive, Murray, UT 84123 (US). **LAMBERT, Christian, M.**; 2167 Featherhill Court, Draper, UT 84020 (US).
- (74) Agents: **ANDERSON, Joseph, P.** et al.; Ballard Spahr LLP, 999 Peachtree Street, Suite 1000, Atlanta, GA 30309 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: DRILL BITS HAVING BLIND-HOLE FLUSHING AND SYSTEMS FOR USING SAME

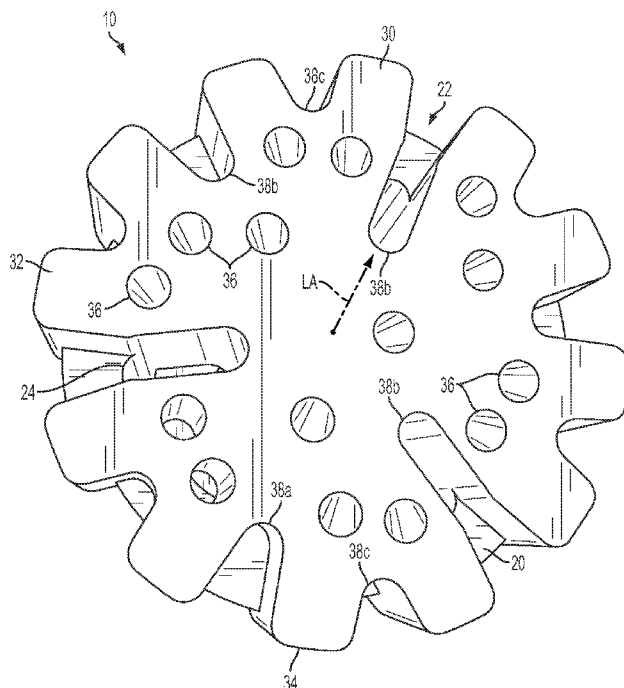


FIG. 1

(57) Abstract: A drill bit for forming a hole in a formation. The drill bit has a shank and a full face crown that cooperate to define an interior space that receives water or other drilling fluid. The full face crown defines a plurality of bores that extend from a cutting face of the full face crown to the interior space. The full face crown completely circumferentially encloses the interior space of the drill bit.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

DRILL BITS HAVING BLIND-HOLE FLUSHING AND SYSTEMS FOR USING SAME

CROSS-REFERENCE TO RELATED PATENT APPLICATION

[0001] This application claims priority to U.S. Patent Application No. 14/085,218, filed November 20, 2013, which is incorporated herein by reference in its entirety.

FIELD

[0002] This invention relates to drill bits for forming a hole in a formation, and, more particularly, to full-face drill bits for forming a hole in a formation.

BACKGROUND

[0003] Existing drill bits typically have a central waterway and a series of channels that provide fluid communication between a side surface of the bit and the central waterway (with no channels positioned directly on the cutting surface of the bit). The central waterway is needed to permit removal of cuttings over the entire face of the drill bit. These existing drill bits do not permit direct flow of water on the cutting surface of the bits. The lack of water on the cutting surface results in a decrease in the rate at which cuttings are removed, thereby leading to an increase in the wear of the cutting surface. Additionally, the lack of water flow can also minimize the removal of heat from the cutting surface during high-rotational operation of the bit. These known drill bit designs are also associated with relatively low penetration rates and reduced contact stress measurements.

[0004] Thus, there is a need in the pertinent art for drill bits that more effectively provide high velocity fluid flow to the cutting surface of the bit and remove heat from the cutting surface. There is a further need in the pertinent art for drill bits that provide increased cutting removal rates and penetration rates in comparison to conventional drill bits.

SUMMARY

[0005] Described herein is a drill bit for forming a hole in a formation. The drill bit has a longitudinal axis, a shank, and a full face crown. The full face crown has a cutting face and an outer surface. The full face crown and the shank cooperate to define an interior space about the longitudinal axis. The interior space can be configured to receive water or other drilling fluid during use of the drill bit.

[0006] In one aspect, the full face crown can define a plurality of bores extending from the cutting face to the interior space. The full face crown can completely circumferentially enclose the interior space. In exemplary aspects, the full face crown does not have waterways extending radially between the outer surface of the full face crown and the interior space. Optionally, the outer surface of the full face crown can define a plurality of channels extending radially inwardly toward the longitudinal axis. Systems for forming a hole in a formation using the drill bit are also described.

[0007] In a further aspect, the full face crown can define a slot extending therein the cutting face of the outer surface of the full face crown that is configured to allow for the fracture and ejection of desired core samples. In an exemplary aspect, a conduit in communication with the interior space and the pressurized drilling fluid can be positioned in communication with a portion of the defined slot such that a desired amount of drilling fluid can be delivered into the slot during a drilling operation.

[0008] Additional advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims. It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed.

DETAILED DESCRIPTION OF THE FIGURES

[0009] These and other features of the preferred embodiments of the invention will become more apparent in the detailed description in which reference is made to the appended drawings wherein:

[0010] Figure 1 is a top perspective view of an exemplary drill bit as disclosed herein.

[0011] Figure 2A is a top perspective view of a second embodiment of an exemplary drill bit as disclosed herein. Figure 2B is a bottom perspective view of the drill bit of Figure 2A.

[0012] Figure 3 is a top plan of the drill bit of Figure 2A as disclosed herein.

[0013] Figure 4 is a cross-sectional view of the drill bit of Figure 3 taken along line 4-4 as disclosed herein.

[0014] Figure 5 is a top perspective view of a second embodiment of an exemplary drill bit as disclosed herein.

[0015] Figure 6 is a perspective view of an exemplary drill bit having a convex cutting face as disclosed herein.

[0016] Figure 7 is a top perspective view of an exemplary drill bit having a center projection extending into a slot as disclosed herein.

[0017] Figure 8 is a top perspective view of a third embodiment of an exemplary drill bit as disclosed herein.

[0018] Figure 9 is a top, partially transparent perspective view of a fourth embodiment of an exemplary drill bit as disclosed herein. As depicted, a plurality of wear-resistant members are partially embedded therein portions of the bottom and side surfaces that define the slot of the drill bit. Portions of the wear-resistant members that are embedded within the bottom and side surfaces are shown in broken line, while portions of the plurality of wear resistant members that extend from the bottom and side surfaces are shown in solid line.

[0019] Figure 10 is a schematic view of a drilling system having a drill bit as disclosed herein.

DETAILED DESCRIPTION

[0020] The present invention can be understood more readily by reference to the following detailed description, examples, drawings, and claims, and their previous and following description. However, before the present devices, systems, and/or methods are disclosed and described, it is to be understood that this invention is not limited to the specific devices, systems, and/or methods disclosed unless otherwise specified, as such can, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular aspects only and is not intended to be limiting.

[0021] The following description of the invention is provided as an enabling teaching of the invention in its best, currently known embodiment. To this end, those skilled in the relevant art will recognize and appreciate that many changes can be made to the various aspects of the invention described herein, while still obtaining the beneficial results of the present invention. It will also be apparent that some of the desired benefits of the present invention can be obtained by selecting some of the features of the present invention without utilizing other features. Accordingly, those who work in the art will recognize that many modifications and adaptations to the present invention are possible and can even be desirable

in certain circumstances and are a part of the present invention. Thus, the following description is provided as illustrative of the principles of the present invention and not in limitation thereof.

[0022] As used throughout, the singular forms “a,” “an” and “the” include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to “a bore” can include two or more such bores unless the context indicates otherwise.

[0023] Ranges can be expressed herein as from “about” one particular value, and/or to “about” another particular value. When such a range is expressed, another aspect includes from the one particular value and/or to the other particular value. Similarly, when values are expressed as approximations, by use of the antecedent “about,” it will be understood that the particular value forms another aspect. It will be further understood that the endpoints of each of the ranges are significant both in relation to the other endpoint, and independently of the other endpoint.

[0024] As used herein, the terms “optional” or “optionally” mean that the subsequently described event or circumstance may or may not occur, and that the description includes instances where said event or circumstance occurs and instances where it does not.

[0025] The word “or” as used herein means any one member of a particular list and also includes any combination of members of that list.

[0026] Described herein with reference to Figure 1 is a drill bit 10 for forming a hole in a formation. The drill bit 10 has a longitudinal axis LA. In exemplary aspects, the drill bit 10 can comprise a shank 20 and a full face crown 30. It is contemplated that the drill bits disclosed herein can provide an improved penetration rate relative to conventional drill bits. It is further contemplated that the drill bits disclosed herein can provide enhanced chip/cutting removal and enhanced cooling of the cutting face of the bit, as measured relative to conventional drill bits. It is still further contemplated that the drill bits disclosed herein can provide improved wear resistance relative to conventional drill bits.

[0027] In exemplary aspects, the drill bits disclosed herein can be full-face bits. In these aspects, it is contemplated that the full face drill bits disclosed herein can be plug and/or non-coring bits. In still further exemplary aspects, it is contemplated that the drill bits disclosed herein can be concave-faced drill bits. In still further exemplary aspects, it is contemplated that the drill bits disclosed herein can be non-concave faced drill bits.

[0028] In one aspect, the full face crown 30 can have a cutting face 32 that adjoins an outer circumferential surface 34. It is contemplated that the full face crown 30 and the shank 20 can cooperate to define an interior space 25 (such as shown in Figure 2B) about the longitudinal axis LA. It is further contemplated that the interior space 25 can be configured to receive water or other drilling fluid during use of the drill bit 10. In one aspect, the water or other drilling fluid can be supplied to the interior space 25 at a desired pressure.

[0029] In another aspect, the full face crown 30 can define a plurality of bores 36 extending from the cutting face 32 to the interior space 25. In this aspect, it is contemplated that the plurality of bores 36 can be configured to direct water (or other drilling fluid) substantially directly to the cutting face 32 from the interior space 25. It is further contemplated that the direct supply of pressurized water (or other drilling fluid) to the cutting face 32 can increase flow velocity across the cutting face, thereby permitting more rapid removal of cuttings and significantly increasing the convective cooling of the cutting face. It is further contemplated that the plurality of bores 36 can reduce the contact area of the cutting face 32 relative to conventional drill bits, thereby improving the penetration rate of the drill bit 10. It is still further contemplated that the plurality of bores 36 can permit novel distribution of water (or other drilling fluid) relative to the cutting face 32, thereby improving the wear resistance of the drill bit 10. It is still further contemplated that the plurality of bores 36 can provide flexibility in the distribution of water (or other drilling fluid) such that the center port of conventional drill bits is unnecessary (and can be eliminated from the drill bit). Optionally, in some aspects, it is contemplated that the cutting face 32 can have a convex profile (See Figure 6). In other aspects, it is contemplated that the cutting face 32 can optionally have a concave profile.

[0030] In exemplary aspects, the plurality of bores 36 can optionally be substantially equally distributed about the cutting face 32. Optionally, in some aspects, the plurality of bores 36 can be randomly spaced from a center point of the drill bit 10. In other aspects, the plurality of bores can optionally be substantially uniformly spaced from the center point of the drill bit 10. In these aspects, it is contemplated that at least two concentric rows of bores can be provided, with the bores in each respective row being substantially uniformly spaced from the center point of the drill bit 10.

[0031] More generally, it is contemplated that the plurality of bores 36 can be provided in any selected configuration. It is further contemplated that the plurality of bores 36 can be

distributed so as to optimize the wear characteristics of the drill bit 10 for a particular application.

[0032] It is contemplated that the each bore 36 of the plurality of bores can be provided in a selected shape. In exemplary aspects, the plurality of bores 36 can have a substantially cylindrical shape (with substantially circular cross-sectional profile). However, it is contemplated that the plurality of bores 36 can have any shape, including, for example and without limitation, a substantially conical (tapered) shape (with a substantially circular cross-sectional profile), a shape having a substantially rectangular cross-sectional profile, a shape having a substantially square cross-sectional profile, an S-shape, and the like.

[0033] In still another aspect, the full face crown 30 can completely circumferentially enclose the interior space 25. In exemplary aspects, the full face crown 30 does not comprise a waterway extending radially between the outer surface 34 of the full face crown and the interior space 25.

[0034] In a further aspect, the outer surface of the full face crown 30 can define a plurality of channels 38 extending radially inwardly toward the longitudinal axis LA. In exemplary aspects, it is contemplated that the full face crown 30 can have an outer diameter that is greater than an outer diameter of the shank 20 such that the full face crown projects radially outwardly relative to the shank. Thus, in these aspects, it is further contemplated that the plurality of channels 38 can expose and be in communication with a junction surface 22 of the shank. It is further contemplated that the junction surface 22 can optionally comprise at least one bore 24 positioned in communication with at least one of the plurality of channels 38 of the full face crown 30. It is still further contemplated that the at least one bore 24 of the junction surface 22 of the shank 20 can be in communication with the interior space 25.

[0035] Optionally, in exemplary aspects, the plurality of channels 38 can be substantially equally circumferentially spaced about the outer surface 34 of the full face crown 30. In one aspect, it is contemplated that the plurality of channels 38 can optionally be substantially equally sized.

[0036] Optionally, in other exemplary aspects, it is contemplated that at least one pair of bores of the plurality of bores 36 can be substantially aligned with a selected channel 38 of the full face crown 30 along an orientation line passing through center points of the bores and the selected channel. In these aspects, it is contemplated that, during drilling operations, as the drill bit 10 rotates, water (or other drilling fluid) that exits the pair of bores can move

substantially along the orientation line and be evacuated through the selected channel.

[0037] Optionally, in some exemplary aspects, the plurality of channels 38 can comprise a first plurality of channels 38a and a second plurality of channels 38b, with each channel of the first plurality of channels having a first size and a second plurality of channels having a second size. As used herein, the “size” of a channel 38 generally refers to the two-dimensional area of the channel, as measured within a plane that is substantially perpendicular to the longitudinal axis of the drill bit 10. In these aspects, it is contemplated that the second size can be larger than the first size. In additional exemplary aspects, at least one channel of the first plurality of channels 38a can optionally be positioned circumferentially between sequential channels of the second plurality of channels 38b. In further exemplary aspects, each channel of the first plurality of channels 38a can have a first radial length, and each channel of the second plurality of channels 38b can have a second radial length. In these aspects, it is contemplated that the second radial length can optionally be greater than the first radial length.

[0038] In further optional aspects, it is contemplated that the plurality of channels 38 can further comprise a third plurality of channels 38c, with each channel of the third plurality of channels having a third size that is different than the first and second sizes (of the first plurality of channels and the second plurality of channels). As shown in Figure 1, it is contemplated that the third size can be smaller than the first and second sizes. However, it is contemplated that, in exemplar aspects, the third size can also be larger than the first and second sizes. In additional exemplary aspects, it is contemplated that at least one channel of the third plurality of channels 38c can optionally be positioned circumferentially between a respective channel of the first plurality of channels 38a and a respective channel of the second plurality of channels 38b. In further exemplary aspects, each channel of the third plurality of channels 38c can have a third radial length. In these aspects, it is contemplated that the third radial length can optionally be less than the first and second radial lengths (of the first plurality of channels and the second plurality of channels). However, in other aspects, it is contemplated that the third radial length can optionally be greater than at least one of the first and second radial lengths.

[0039] More generally, it is contemplated that the plurality of channels 38 can comprise channels having any number of different sizes, such as, for example and without limitation, channels of at least four different sizes, channels of at least five different sizes, channels of at least six different sizes, channels of at least seven different sizes, and channels of at least

eight different sizes. In exemplary aspects, it is contemplated that each channel of the plurality of channels 38 can have a size that differs from a size of at least one additional channel of the plurality of channels.

[0040] In additional aspects, each channel of the plurality of channels 38 can have a width. Optionally, in these aspects, it is contemplated that each channel of the plurality of channels 38 can have a variable width. For example, the width of each channel 38 can optionally decrease from the outer surface of the full face crown moving radially inwardly toward the longitudinal axis. Thus, it is contemplated that each channel 38 of the plurality of channels can be inwardly tapered moving toward the longitudinal axis LA.

[0041] Optionally, as shown in Figure 1, it is contemplated that the radius of the shank 20 (corresponding to the radial distance between the longitudinal axis LA and an outer surface of the shank) can vary about the circumference of the shank. In exemplary aspects, it is contemplated that the outer surface of the shank 20 can be recessed a selected distance from the outer surface 34 of the full face crown 30 within each respective channel 38. In these aspects, it is contemplated that the selected distance by which the outer surface of the shank 20 is recessed from the outer surface 34 of the full face crown 30 can vary from channel to channel. For example, as shown in Figure 1, it is contemplated that the selected distance by which the outer surface of the shank 20 is recessed from the outer surface 34 of the full face crown 30 can generally be greater for smaller channels (38c) than it is for larger channels (38a, 38b). However, it is contemplated that any variation in the selected distance (and the radius of the shank 20) can be employed.

[0042] Optionally, in further exemplary aspects, it is contemplated that an inner surface of the shank 20 can define at least one flute (or extending substantially parallel to the longitudinal axis LA of the bit 10. In these aspects, each flute of the at least one flute can optionally correspond to a rounded grooves extending radially from the inner surface of the shank 20 toward an outer surface of the shank. It is contemplated that the at least one flute can optionally be positioned in fluid communication with at least one of a bore 36 of the full face crown 30 and a bore 24 of the shank 20.

[0043] Referring now to Figures 2A-7, an exemplary drill bit 100 is shown that is configured to channel and fracture a micro-core from the center of the drill bit and direct and/or flush the fractured micro-core to the outer diameter of the drill bit. Complementarily, this exemplary configuration allows for reduced wear of the inner diameter of the drill bit,

which is the typical wear mode of conventional full face bits. Further, the exemplary full face drill bit increases the rate of penetration in comparison to conventional full face bits that, due to their intrinsic design limitations, have a limited ability to cut at the center of the full face bit as a result of the very low surface velocities. As one will appreciate, it is contemplated that the drill bit 100 can also comprise the elements described above with respect to drill bit 10. Similarly, it is contemplated that the drill bit 10 can comprise one or more of the elements described below with respect to drill bit 100.

[0044] One skilled in the art will appreciate that conventional full face bits typically wear from the center of the upper contact face of the drill bit as a result of low cutting velocity and poor chip flushing. This design failure mode is exacerbated as the rock being drilled increases in hardness. The cycle of wear in the center of a full face bit leading to the further reduced flushing in the center, which in-turn causes more wear, drastically limits the potential life of full face bits when compared to coring bits. In the past, bit designs have attempted to overcome this design failure mode by adding one or more of a center port and/or waterways that are distributed on the bit or by reinforcing the center port waterway to reduce the wear rate at the center of the bit.

[0045] In one aspect, the drill bit 100 has a longitudinal axis. In exemplary aspects, the drill bit 100 can comprise a shank 120 and a full face crown 130 that extends along the longitudinal axis. In one aspect, the full face crown has a crown outer diameter and the shank has a shank outer diameter that is less than the outer diameter of the full face crown. Further, it is contemplated that the shank can further define a tapered surface 122 that extends distally from the shank outer diameter to the crown outer diameter. In various aspects, it is contemplated that the tapered surface 122 can be angled with respect to the longitudinal axis at an obtuse angle ρ . For example, the angle ρ can be between about 90.5° and about 150° , and preferably between about 120° and about 140° .

[0046] In a further aspect, the full face crown 130 can define a slot 140 that extends longitudinally therein a portion of the cutting face 132 and the circumferential outer surface 134 of the full face crown. It is contemplated that this slot can be configured to allow for the fracture and ejection of desired core samples. In an exemplary aspect, a conduit 150 can be defined in the drill bit that is in communication with the interior space 25 and the pressurized drilling fluid can be positioned in communication with a portion of the defined slot such that a desired amount of drilling fluid can be delivered into the slot during a drilling operation. Optionally, in some aspects and as shown in Figure 6, it is contemplated that the cutting face

132 can have a convex profile. In other aspects, it is contemplated that the cutting face 132 can optionally have a concave profile.

[0047] In one exemplary aspect, the slot 140 has a bottom surface 142 and a pair of two opposing side walls 144 that are positioned relative to each other at a desired angle β . In one exemplary aspect, the slot is shaped such that the two side walls are positioned substantially parallel to each other such that the angle β is approximately 0° . Optionally, the slot can have a wedge like shape such that the angle β can exemplarily be between about 0° and about 140° , preferably between about 30° and about 110° , preferably between about 55° and about 95° , and most preferred below about 90° .

[0048] In a further aspect, the bottom surface 142 of the slot can be positioned at an angle μ with respect to the adjoining side wall 144. For example, the angle μ can be between about 60° and about 120° , preferably between about 85° and about 110° , and most preferred about 90° . In yet another aspect, the bottom surface 142 of the slot can be angled with respect to the longitudinal axis of the drill bit at a desired angle α . In one exemplary aspect, it is preferred that the bottom surface 142 of the slot be angled proximally to encourage the dispersal of fractured material proximally away from the cutting face 132 of the drill bit. For example, the angle α can be between about 90° and 140° , and preferably between about 90° and about 130° , and about 150° , and most preferred greater than or equal to about 90° .

[0049] In optional contemplated aspects, at least a portion of the bottom surface 142 and the side walls 144 of the slot can be substantially planar; at least one of the bottom surface 142 and the side walls 144 of the slot can be substantially planar; at least a portion of one of the bottom surface 142 and the side walls 144 of the slot can be curved (either distally or proximally for the bottom surface 142 or outwardly for the side walls 144 of the slot; and at least one of the bottom surface 142 and the side walls 144 of the slot can be curved (either distally or proximally for the bottom surface or outwardly for the side walls of the slot.

[0050] The slot 140 further defines an apex 148 that is positioned beyond the center of the cutting face of the drill bit. As one skilled in the art will appreciate, the slot thusly is configured such that the longitudinal axis of the drill bit extends through the bottom surface of the slot and into an interior void area of the slot. In a further aspect, an over-center area is defined on the cutting face of the bit by the position of the apex relative to the defined center C of the cutting face, e.g., the point of the cutting face bisected by the longitudinal axis. As exemplarily shown in Figure 4, the over-center area is the area on the cutting face that

extends from the junction of the base of the side walls 144 and the bottom surface 142 to two imaginary lines that extend through the center C of the cutting face and are parallel to the respective side walls 144. For example, the over-center area, as a percentage of the area of the cutting face, can be between about 5% and about 45%, and preferably between about 10% and about 40%, and about 15% and about 30%, and most preferred about 20%.

[0051] In an exemplary aspect, it is contemplated that a distal end 152 of the conduit 150 is formed in at least a portion of the bottom surface of the slot. Further, it is contemplated that a distal end 152 can be formed in a portion of one side wall 144 of the slot. In another exemplary embodiment, the distal end 152 of the conduit 150 can be positioned such that a portion of the conduit 150 is positioned at a juncture of a portion of the bottom surface and a portion of an adjoining side wall of the slot. Optionally, it is contemplated that at least a portion of the distal end 152 of the conduit can be defined in at least a portion of the defined over-center area. In another aspect, a majority of the distal end 152 of the conduit can be defined in a portion of the defined over-center area.

[0052] In other optional aspects, and as depicted in Figure 7, it is contemplated that the full face crown 130 can comprise a central projection 133 that extends across the center C of the cutting face into the slot 140. In these aspects, it is contemplated that the projection 133 can cooperate with the side walls 144 to define the slot 140. It is further contemplated that a top portion of the central projection 133 of the crown 130 can comprise a matrix material that is configured to wear away (due to at least one of erosion and abrasion) such that, over time, after the central projection 133 is worn down, the profile of the slot 140 corresponds to the exemplary profile disclosed above (defined by surface 142 and the side walls 144, which comprise diamond-infiltrated material as further disclosed herein. In exemplary aspects, the projection 133 can have an arcuate profile, thereby effectively eliminating the apex 148 of the slot 140 (until the projection 133 is worn away).

[0053] In exemplary aspects, when the drill bit 100 comprises both the slot 140 and a plurality of bores 36 (as disclosed with respect to drill bit 10), it is contemplated that the slot can allow core to substantially freely flow from the cutting face to the outer diameter of the crown. It is further contemplated that the non-uniform crown can create an off-balance motion, thereby permitting easier breaking of the core.

[0054] Referring now to Figure 8, an exemplary drill bit 200 is shown that is configured to channel and fracture a micro-core from the center of the drill bit and direct and/or flush the

fractured micro-core to the outer diameter of the drill bit. Complementarily, this exemplary configuration allows for reduced wear of the inner diameter of the drill bit, which is the typical wear mode of conventional full face bits. Further, the exemplary full face drill bit increases the rate of penetration by decreasing the required force output in comparison to conventional full face bits that, due to their intrinsic design limitations, have a limited ability to cut at the center of the full face bit as a result of the very low surface velocities. As one will appreciate, it is contemplated that the drill bit 200 can also comprise the elements described above with respect to drill bits 10 and 100. Similarly, it is contemplated that the drill bits 10 and 100 can comprise one or more of the elements described below with respect to drill bit 200.

[0055] In one aspect, the drill bit 200 can have a full face crown 230 and can define a slot 240 that extends longitudinally therein a portion of a cutting face 232 and the circumferential outer surface 234 of the full face crown. It is contemplated that this slot can be configured to allow for the fracture and ejection of desired core samples. In an exemplary aspect, a conduit 250 can be defined in the bottom surface 142 of the slot 140 of the drill bit and is in communication with the interior space 25 and the pressurized drilling fluid can be positioned in communication with a portion of the defined slot such that a desired amount of drilling fluid can be delivered into the slot during a drilling operation. As shown in Figure 8, it is further contemplated that the drill bit 200 can comprise bores 36 and channels 38 as disclosed above with respect to drill bits 10, 100.

[0056] In exemplary aspects, as shown in Figure 8, the drill bit 200 can have an axially recessed portion 270 positioned radially between first and second cutting portions 260, 280. In these aspects, it is contemplated that the first and second cutting portions can each define a portion of the cutting surface 232, with the recessed portion 270 being recessed relative to the cutting surface. Thus, it is contemplated that the cutting face 232 can be stepped up in the highest-wear areas of the cutting face.

[0057] Optionally, it is contemplated that an interior wall 265 of the first cutting portion 260 can define at least one channel 265, as shown in Figure 8. It is contemplated that each channel 265 can optionally be positioned in fluid communication with a respective bore 36 of the drill bit 200.

[0058] In additional aspects, it is contemplated that the second cutting portion 280 can be substantially centrally positioned relative to the cutting face 232 such that the second

cutting portion cooperates with side walls of the slot to define the apex of the slot (where no central projection is present) or, alternatively, the second cutting portion cooperates with side walls of the slot to define the central projection (when present). In further aspects, it is contemplated that the second cutting portion 280 can optionally define at least one channel 285, as shown in Figure 8. In these aspects, it is further contemplated that each channel 285 can optionally be positioned in fluid communication with a respective bore 36 of the drill bit 200.

[0059] In exemplary aspects, the drill bits 10, 100, 200 disclosed herein can be diamond-impregnated bits, with the diamonds impregnated within a matrix. In these aspects, it is contemplated that each drill bit 10, 100, 200 can comprise a plurality of selected materials, with each material being provided as a selected weight percentage of the drill bit. It is contemplated that each drill bit 10, 100, 200 can comprise carbon (not including diamond) in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 7.00% by weight of the drill bit. In exemplary aspects, the carbon of the drill bits 10, 100, 200 can be provided as at least one of carbon powder and carbon fibers. It is further contemplated that each drill bit 10, 100, 200 can comprise chromium in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 1.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise cobalt in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 1.00% by weight of the drill bit. Optionally, it is further contemplated that each drill bit 10, 100, 200 can comprise copper in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 30.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise iron in any desired amount, such as, for example and without limitation, an amount ranging from about 50.00% to about 90.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise manganese in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 8.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise molybdenum in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 0.20% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise nickel in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 6.00% by weight of the drill bit. It is further contemplated that each drill bit

10, 100, 200 can comprise silicon in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 0.50% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise silicon carbide in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 2.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise silver in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 12.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise tin in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 6.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise tungsten in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 41.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise tungsten carbide in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 35.00% by weight of the drill bit. It is further contemplated that each drill bit 10, 100, 200 can comprise zinc in any desired amount, such as, for example and without limitation, an amount ranging from about 0.00% to about 24.00% by weight of the drill bit. It is further contemplated that the matrix of the full face drill bits disclosed herein can be configured to form supporting structures behind the diamonds within the drill bits, thereby preventing the polishing of the impregnated diamonds during operation.

[0060] In exemplary aspects, and with reference to Figure 9, the drill bits disclosed herein can further optionally comprise a plurality of wear-resistant members 160 that are embedded therein portions of at least one of the bottom surface 142 and/or the side surface(s) 144 of the drill bit. It is contemplated, optionally and without limitation, that the plurality of wear-resistant members 160 can be embedded therein portions of the bottom surface 142 adjacent to the side wall of the slot that serves as the impact wall (e.g., the trailing wall) as a result of the rotation of the drill bit in use. In this aspect, it is contemplated that the plurality of wear-resistant members 160 can be embedded in an area of the bottom surface 142 proximate to the juncture of the bottom surface and the respective side wall. In a further aspect, the plurality of wear-resistant members 160 in the bottom surface can be positioned in a desired, predetermined array. In one example, the array of the plurality of wear-resistant members 160 can comprise a series of rows of wear-resistant members. In this aspect, it is contemplated that each row can comprise a plurality of the wear-resistant members 160

positioned substantially along a common axis. Optionally, the common axis can be substantially parallel to the adjacent side wall. Thus, it is contemplated that the array of the plurality of wear-resistant members 160 can comprise a series of rows of wear-resistant members in which each of the rows are substantially parallel to each other and to the adjacent side wall.

[0061] In a further aspect, optionally and without limitation, that the plurality of wear-resistant members 160 can be embedded therein portions of the side wall 144 that serves as the impact wall (e.g., the trailing wall) as a result of the rotation of the drill bit in use. In this aspect, it is contemplated that the plurality of wear-resistant members 160 can be embedded in an area of the side wall 144 proximate to the juncture of the bottom surface and the side wall. In a further aspect, the plurality of wear-resistant members 160 in the bottom surface can be positioned in a desired, predetermined array. In one example, the array of the plurality of wear-resistant members 160 can comprise a series of rows of wear-resistant members. In this aspect, it is contemplated that each row can comprise a plurality of the wear-resistant members 160 positioned substantially along a common axis. Optionally, the common axis can be substantially parallel to the adjacent bottom surface. Thus, it is contemplated that the array of the plurality of wear-resistant members 160 can comprise a series of rows of wear-resistant members in which each of the rows are substantially parallel to each other and to the adjacent bottom surface. In a further aspect, the array of the plurality of wear-resistant members 160 positioned on the side wall can be spaced away from the cutting face of the drill bit at a desired distance.

[0062] In another aspect, at least a portion of the plurality of wear resistant members 160 can extend proudly from the respective bottom surface 142 and/or side wall 144 in which it is embedded. In one aspect, it is further contemplated that the array can comprise additional rows of wear resistant members that are encapsulated within the drill bit in an underlying relationship with the exposed rows of the wear-resistant members that are positioned in one of the bottom surface 142 and/or the side surface(s) of the 144 of the drill bit. In this fashion, the additional wear-resistant members can be exposed upon the normal wear of the drill bit during operation.

[0063] In one aspect, each wear-resistant member 160 can be an elongated member, for example and without limitation, the elongate member can have a generally rectangular shape having a longitudinal axis. As shown in Figure 9, it is contemplated that the elongate members 160 can be positioned such that the longitudinal axis of each elongate member is

substantially parallel to the adjacent bottom surface and/or side wall. Without limitation, it is contemplated that each wear-resistant member 160 can comprise at least one of Tungsten Carbide, TSD (thermally stable diamond), PDC (polycrystalline diamond compact), CBN (cubic boron nitride), single crystal Aluminum Oxide, Silicon Carbide, wear resistant ceramic materials, synthetic diamond materials, natural diamond, and polycrystalline diamond materials.

[0064] In exemplary aspects, and with reference to Figure 10, the drill bits disclosed herein can be provided as part of a drilling system 500. In these aspects, it is contemplated that the drilling system 500 can comprise a drill head 510, a mast 520, a drill rig 530, and a drill string 550 configured to be secured to and rotated by the drill rig, as are conventionally known in the art. It is further contemplated that a drill bit 560 can be operatively coupled to an end of the drill string 550. For example, it is contemplated that a drill bit 10, 100, 200 as disclosed herein can be coupled to the drill string 550. In operation, as the drill string 550 is rotated and pushed by the drill rig 530, it is contemplated that the drill bit 560 (corresponding to a drill bit 10, 100, 200 as disclosed herein) can grind away materials in a formation 570.

[0065] In use, it is contemplated that the full face drill bits disclosed herein can achieve desired penetration levels at lower levels of thrust than are required with known drill bits. Due to the increased strength and flushing of the full face drill bits disclosed herein, it is contemplated that the disclosed full face drill bits can show less wear and have an increased functional product life compared to known drill bits, with the full face drill bits disclosed herein having a functional product life of up to about 5 times greater than the functional product life of known bits. It is further contemplated that the increased strength and flushing of the disclosed full face drill bits can permit the use of greater depths for diamond impregnation during manufacturing. It is still further contemplated that the disclosed full face drill bits can produce higher fluid velocity at the cutting face, thereby providing faster rock removal and heat transfer and limiting wear of the diamonds within the bit, which are typically worn due to the high heat and friction of the rock.

Experimental Examples

[0066] In one experimental example, a 0.250 inch-diameter core was removed using an exemplary drill bit as depicted in Figures 2A-4. In another experimental example, the exemplary drill bit showed little wear after drilling 12 inches, whereas a known drill bit was substantially worn after drilling 12 inches.

[0067] In additional experimental examples, a computational fluid dynamics (CFD) comparison was performed between an exemplary full face drill bit as depicted in Figures 3-5 and a known full face drill bit. The exemplary drill bit as disclosed herein was found to produce a higher water pressure and higher fluid velocity.

Exemplary Aspects

[0068] In exemplary aspects, a full-face drill bit for forming a hole in a formation is provided, the drill bit having a longitudinal axis and comprising: a shank; a full face crown having a cutting face and an outer surface, the full face crown and the shank cooperating to define an interior space about the longitudinal axis, wherein the full face crown defines a plurality of bores extending from the cutting face to the interior space, and wherein the full face crown completely circumferentially encloses the interior space.

[0069] In one exemplary aspect, the full face crown does not comprise a waterway extending radially between the outer surface of the full face crown and the interior space.

[0070] In another exemplary aspect, the outer surface of the full face crown defines a plurality of channels extending radially inwardly toward the longitudinal axis.

[0071] In another exemplary aspect, the plurality of channels are substantially equally circumferentially spaced about the outer surface of the full face crown.

[0072] In another exemplary aspect, each channel of the plurality of channels has a width, and the width of each channel decreases from the outer surface of the full face crown moving radially inwardly toward the longitudinal axis.

[0073] In another exemplary aspect, the plurality of channels are substantially equally sized.

[0074] In another exemplary aspect, the plurality of channels comprise a first plurality of channels having a first size and a second plurality of channels having a second size, and the second size is larger than the first size.

[0075] In another exemplary aspect, at least one channel of the first plurality of channels is positioned circumferentially between sequential channels of the second plurality of channels.

[0076] In another exemplary aspect, each channel of the first plurality of channels has a first radial length, each channel of the second plurality of channels has a second radial length, and the second radial length is greater than the first radial length.

[0077] In another exemplary aspect, the plurality of bores are substantially equally distributed about the cutting face.

[0078] In other exemplary aspects, a drilling system is provided, the drilling system comprising: a drill rig; a drill string configured to be secured to and rotated by the drill rig; and a full-face drill bit having a longitudinal axis and configured to be secured to the drill string, the drill bit comprising: a shank; a full face crown having a cutting face and an outer surface, the full face crown and the shank cooperating to define an interior space about the longitudinal axis, wherein the full face crown defines a plurality of bores extending from the cutting face to the interior space, and wherein the full face crown of the drill bit completely circumferentially encloses the interior space of the drill bit.

[0079] In another exemplary aspect, the full face crown of the drill bit does not comprise a waterway extending radially between the outer surface of the full face crown and the interior space.

[0080] In another exemplary aspect, the outer surface of the full face crown defines a plurality of channels extending radially inwardly toward the longitudinal axis.

[0081] In another exemplary aspect, the plurality of channels of the drill bit are substantially equally circumferentially spaced about the outer surface of the full face crown.

[0082] In another exemplary aspect, each channel of the plurality of channels of the drill bit has a width, and the width of each channel decreases from the outer surface of the full face crown moving radially inwardly toward the longitudinal axis.

[0083] In another exemplary aspect, the plurality of channels of the drill bit are substantially equally sized.

[0084] In another exemplary aspect, the plurality of channels of the drill bit comprise a first plurality of channels having a first size and a second plurality of channels having a second size, wherein the second size is larger than the first size.

[0085] In another exemplary aspect, at least one channel of the first plurality of channels of the drill bit is positioned circumferentially between sequential channels of the second plurality of channels.

[0086] In another exemplary aspect, each channel of the first plurality of channels of the drill bit has a first radial length, each channel of the second plurality of channels of the drill

bit has a second radial length, and the second radial length is greater than the first radial length.

[0087] In another exemplary aspect, the plurality of bores of the drill bit are substantially equally distributed about the cutting face.

[0088] Although several embodiments of the invention have been disclosed in the foregoing specification, it is understood by those skilled in the art that many modifications and other embodiments of the invention will come to mind to which the invention pertains, having the benefit of the teaching presented in the foregoing description and associated drawings. It is thus understood that the invention is not limited to the specific embodiments disclosed hereinabove, and that many modifications and other embodiments are intended to be included within the scope of the appended claims. Moreover, although specific terms are employed herein, as well as in the claims which follow, they are used only in a generic and descriptive sense, and not for the purposes of limiting the described invention, nor the claims which follow.

CLAIMS

What is claimed is:

1. A full-face drill bit for forming a hole in a formation, the drill bit having a longitudinal axis and comprising:
 - a shank;
 - an full face crown having a cutting face and an outer surface, the full face crown and the shank cooperating to define an interior space about the longitudinal axis,
 - wherein the full face crown defines a plurality of bores extending from the cutting face to the interior space, and
 - wherein the full face crown completely circumferentially encloses the interior space.
2. The drill bit of claim 1, wherein the full face crown does not comprise a waterway extending radially between the outer surface of the full face crown and the interior space.
3. The drill bit of claim 1, wherein the outer surface of the full face crown defines a plurality of channels extending radially inwardly toward the longitudinal axis.
4. The drill bit of claim 3, wherein the plurality of channels are substantially equally circumferentially spaced about the outer surface of the full face crown.
5. The drill bit of claim 3, wherein each channel of the plurality of channels has a width, and wherein the width of each channel decreases from the outer surface of the full face crown moving radially inwardly toward the longitudinal axis.
6. The drill bit of claim 3, wherein the plurality of channels are substantially equally sized.
7. The drill bit of claim 3, wherein the plurality of channels comprise a first plurality of channels having a first size and a second plurality of channels having a second size, wherein the second size is larger than the first size.
8. The drill bit of claim 7, wherein at least one channel of the first plurality of channels is positioned circumferentially between sequential channels of the second plurality of channels.

9. The drill bit of claim 8, wherein each channel of the first plurality of channels has a first radial length, wherein each channel of the second plurality of channels has a second radial length, and wherein the second radial length is greater than the first radial length.
10. The drill bit of claim 3, wherein the plurality of bores are substantially equally distributed about the cutting face.
11. A drilling system comprising:
- a drill rig;
 - a drill string configured to be secured to and rotated by the drill rig; and
 - a full-face drill bit having a longitudinal axis and configured to be secured to the drill string, the drill bit comprising:
 - a shank;
 - a full face crown having a cutting face and an outer surface, the full face crown and the shank cooperating to define an interior space about the longitudinal axis,
 - wherein the full face crown defines a plurality of bores extending from the cutting face to the interior space, and
 - wherein the full face crown of the drill bit completely circumferentially encloses the interior space of the drill bit.
12. The drilling system of claim 11, wherein the full face crown of the drill bit does not comprise a waterway extending radially between the outer surface of the full face crown and the interior space.
13. The drilling system of claim 11, wherein the outer surface of the full face crown defines a plurality of channels extending radially inwardly toward the longitudinal axis.
14. The drilling system of claim 13, wherein the plurality of channels of the drill bit are substantially equally circumferentially spaced about the outer surface of the full face crown.
15. The drilling system of claim 13, wherein each channel of the plurality of channels of the drill bit has a width, and wherein the width of each channel decreases from the outer surface of the full face crown moving radially inwardly toward the longitudinal axis.

16. The drilling system of claim 13, wherein the plurality of channels of the drill bit are substantially equally sized.
17. The drilling system of claim 13, wherein at least one channel of the plurality of channels of the drill bit has a size that is different from a size of at least one other channel of the plurality of channels.
18. The drilling system of claim 13, wherein the plurality of channels of the drill bit comprise a first plurality of channels having a first size and a second plurality of channels having a second size, wherein the second size is larger than the first size, and wherein at least one channel of the first plurality of channels of the drill bit is positioned circumferentially between sequential channels of the second plurality of channels.
19. The drilling system of claim 18, wherein each channel of the first plurality of channels of the drill bit has a first radial length, wherein each channel of the second plurality of channels of the drill bit has a second radial length, and wherein the second radial length is greater than the first radial length.
20. The drilling system of claim 13, wherein the plurality of bores of the drill bit are selectively patterned about the cutting face.

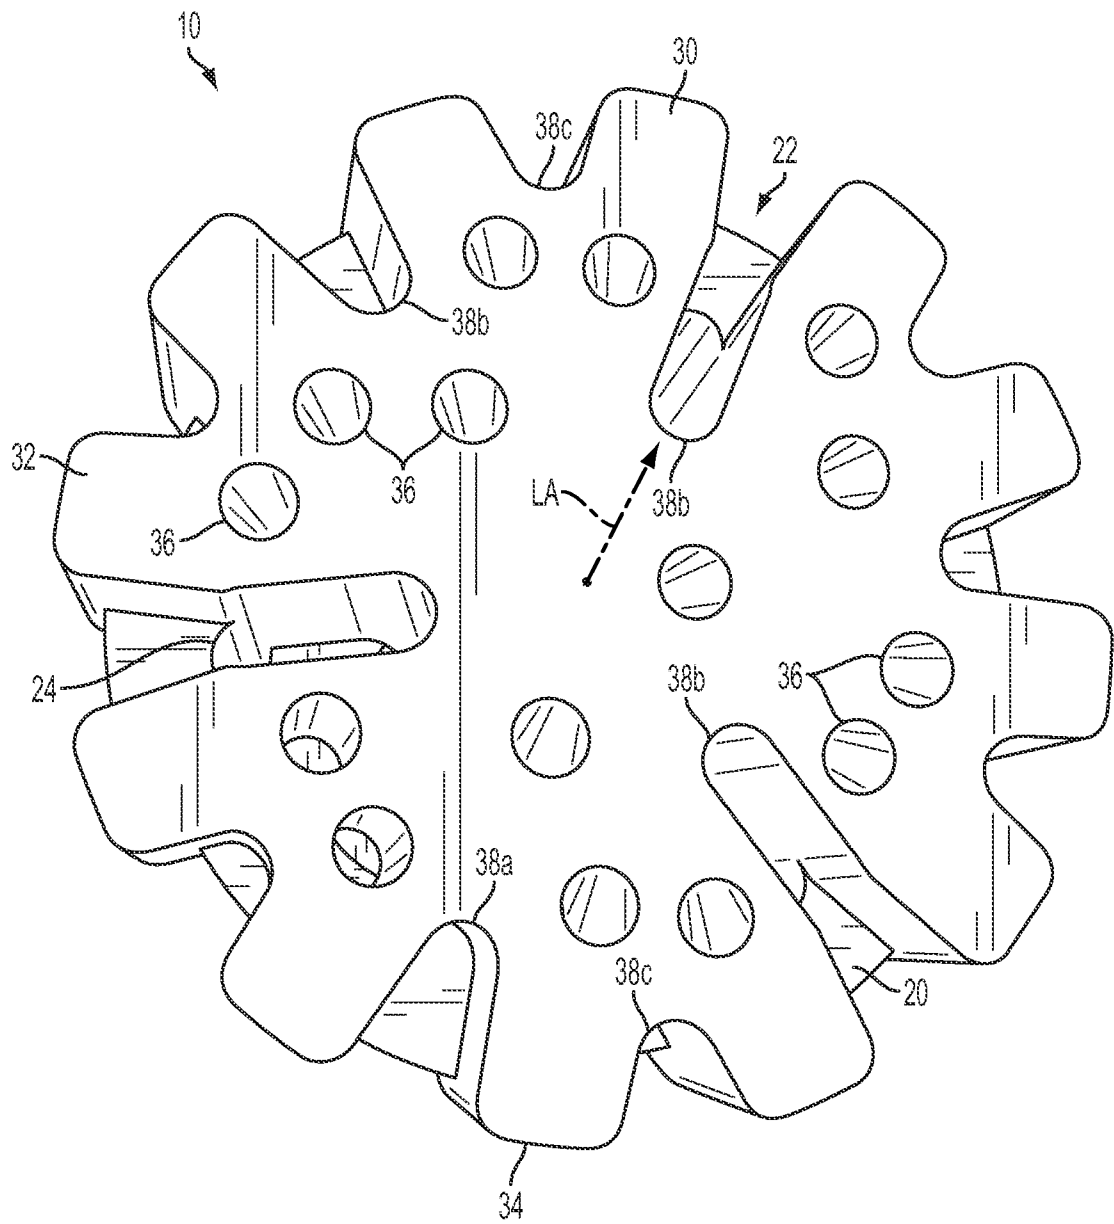


FIG. 1

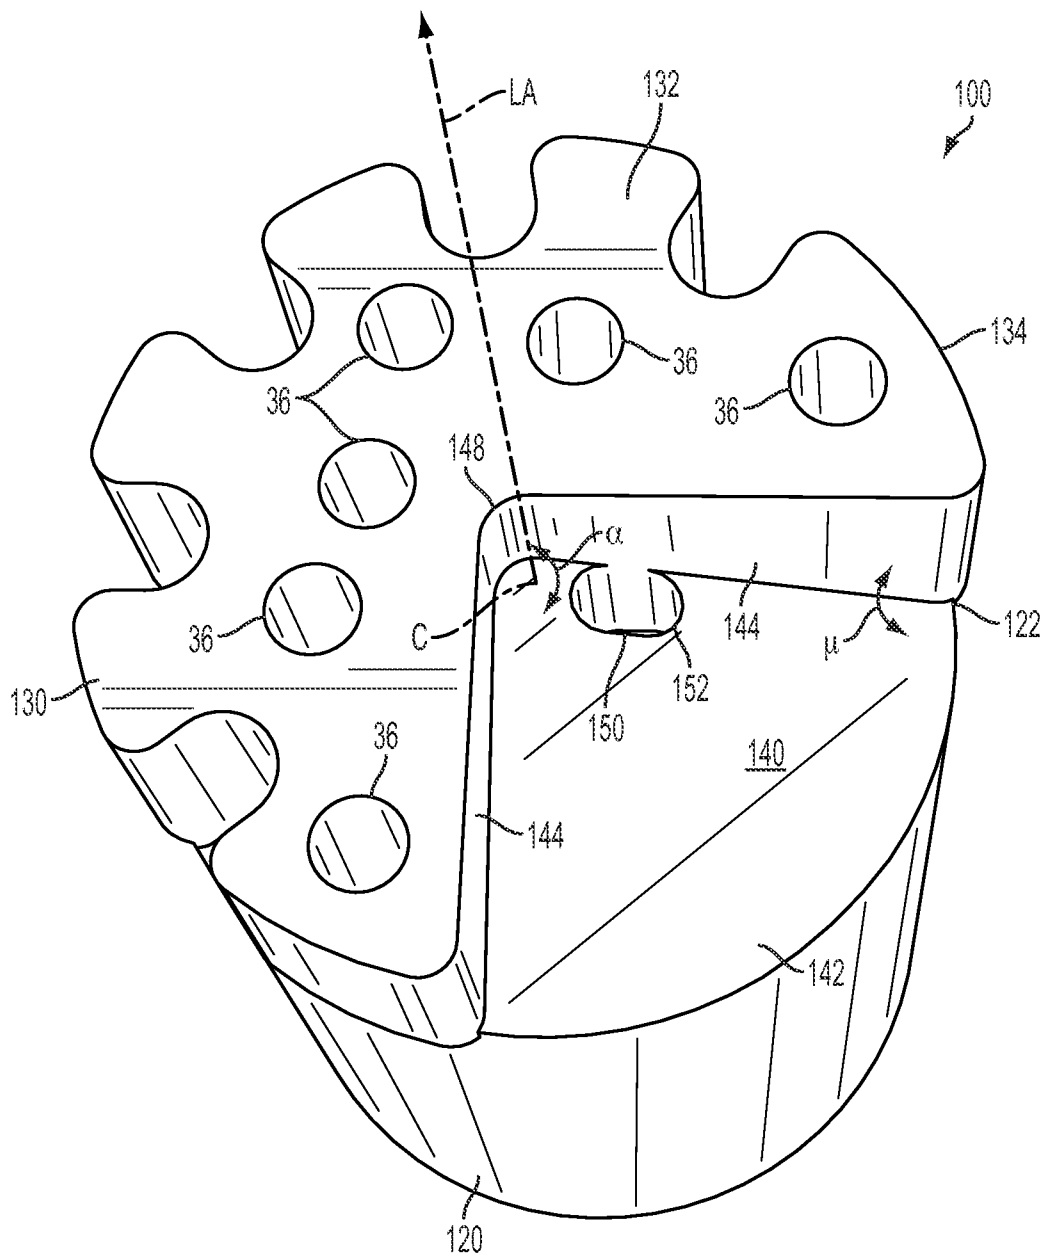


FIG. 2A

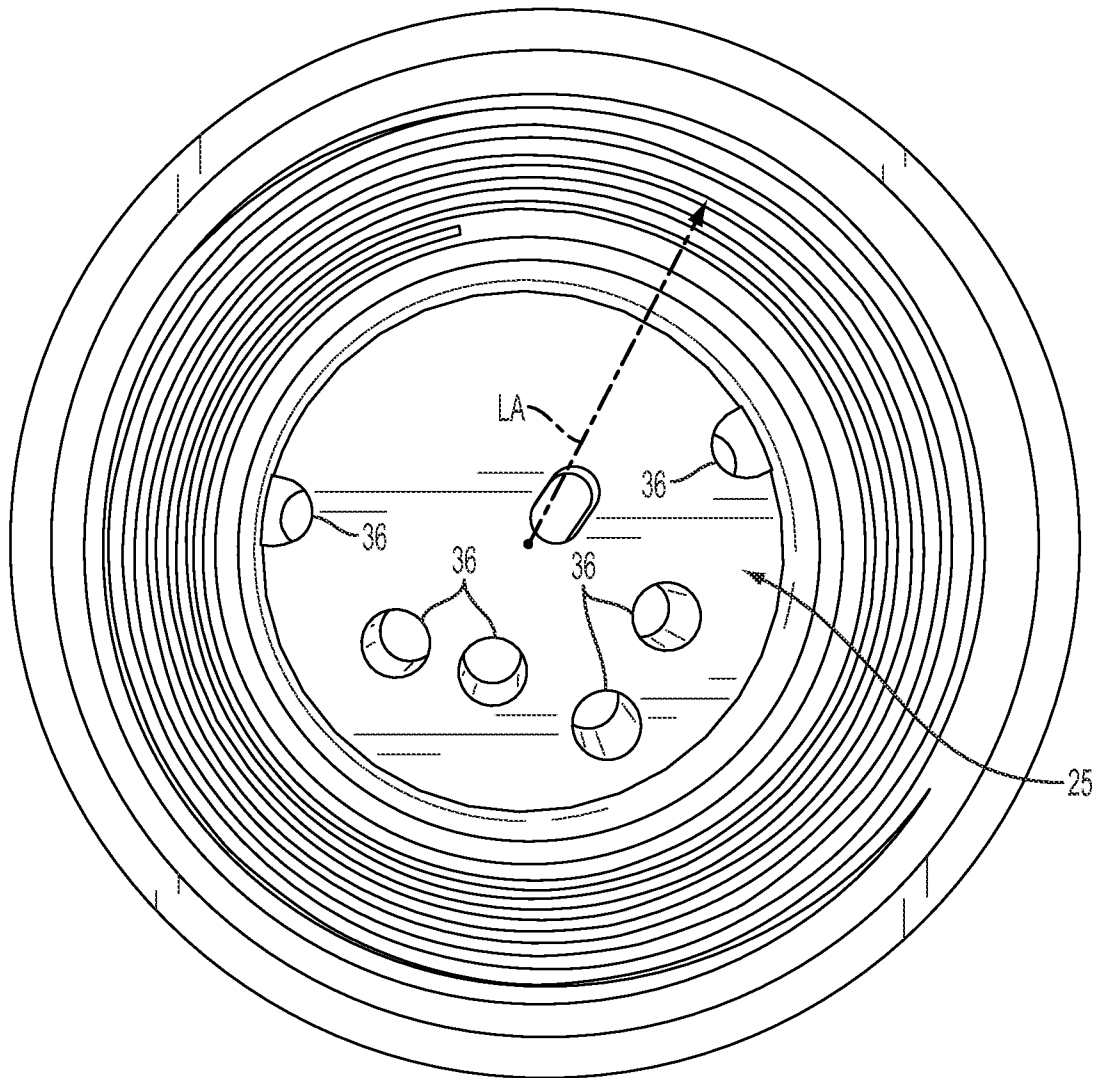


FIG. 2B

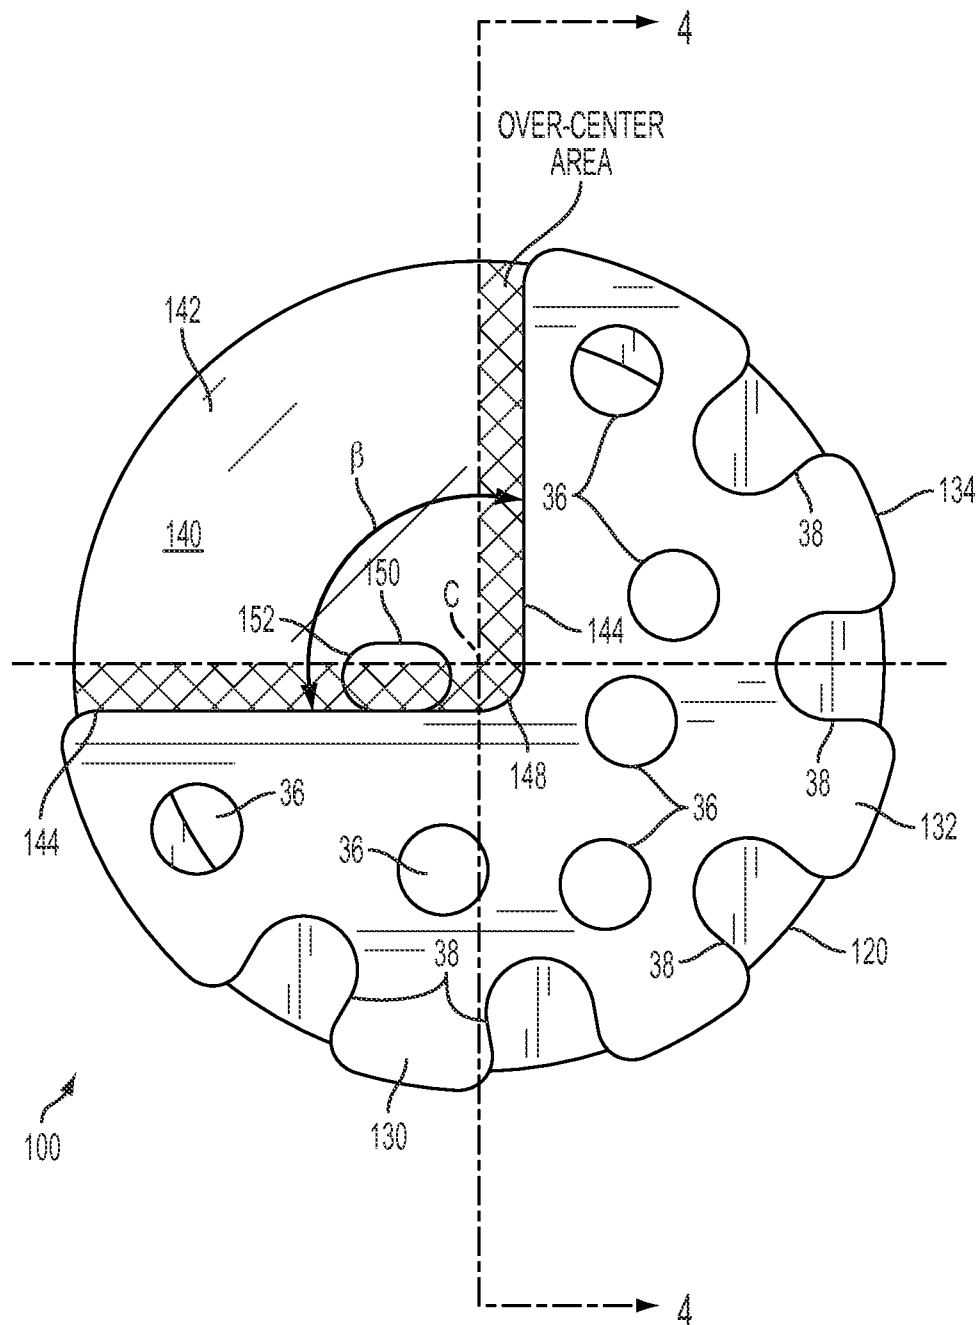


FIG. 3

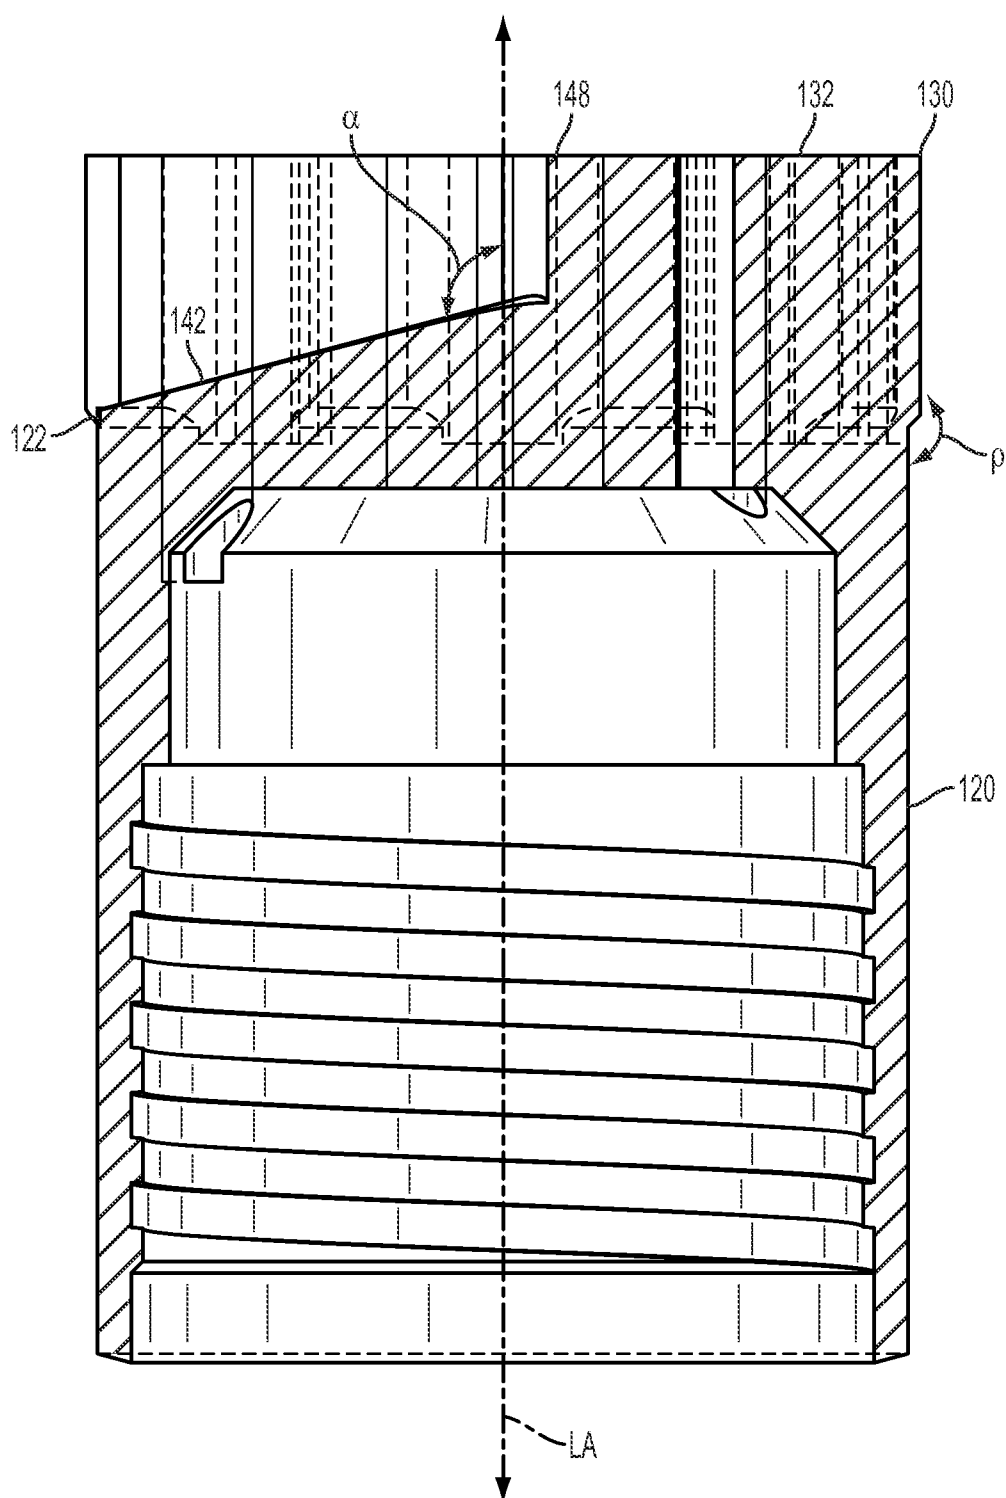


FIG. 4.

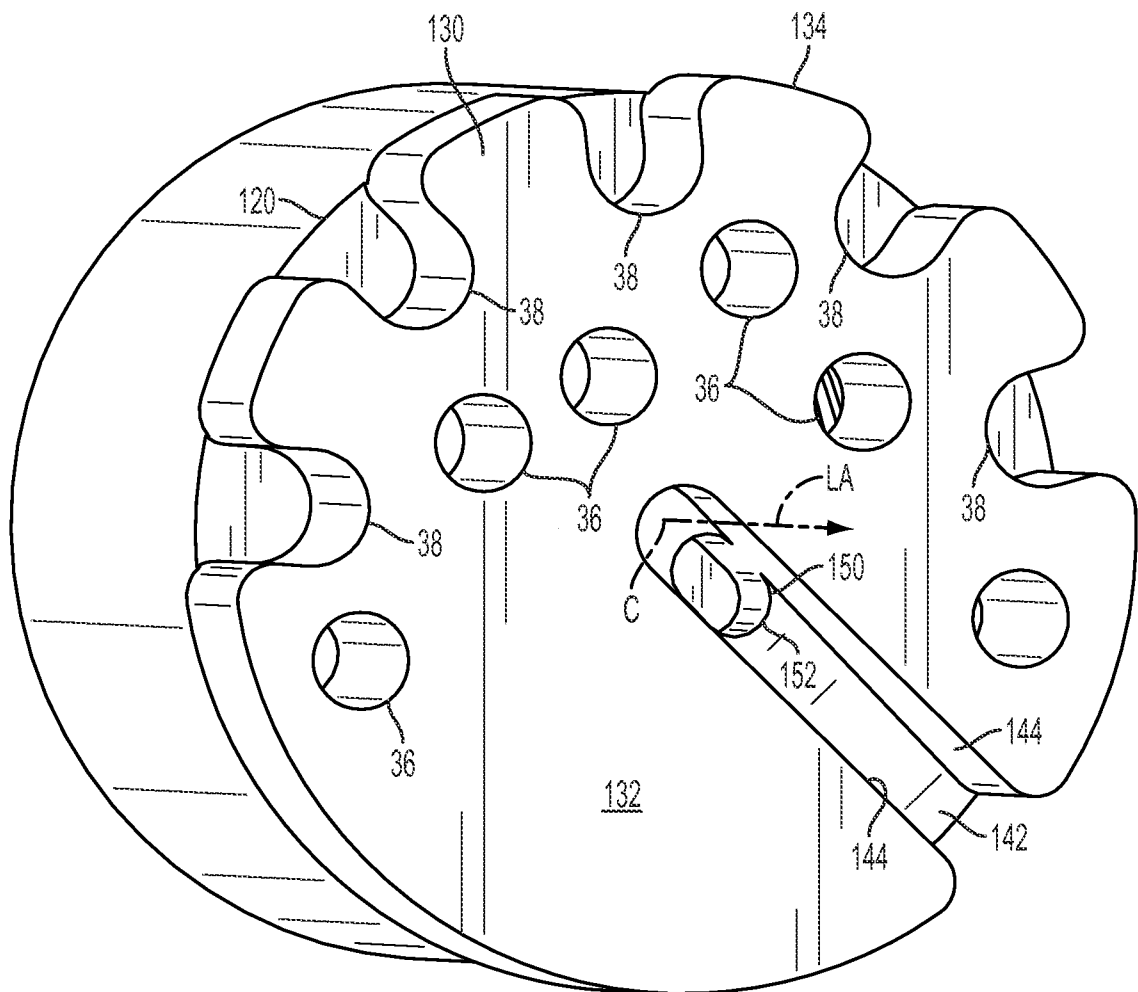


FIG. 5

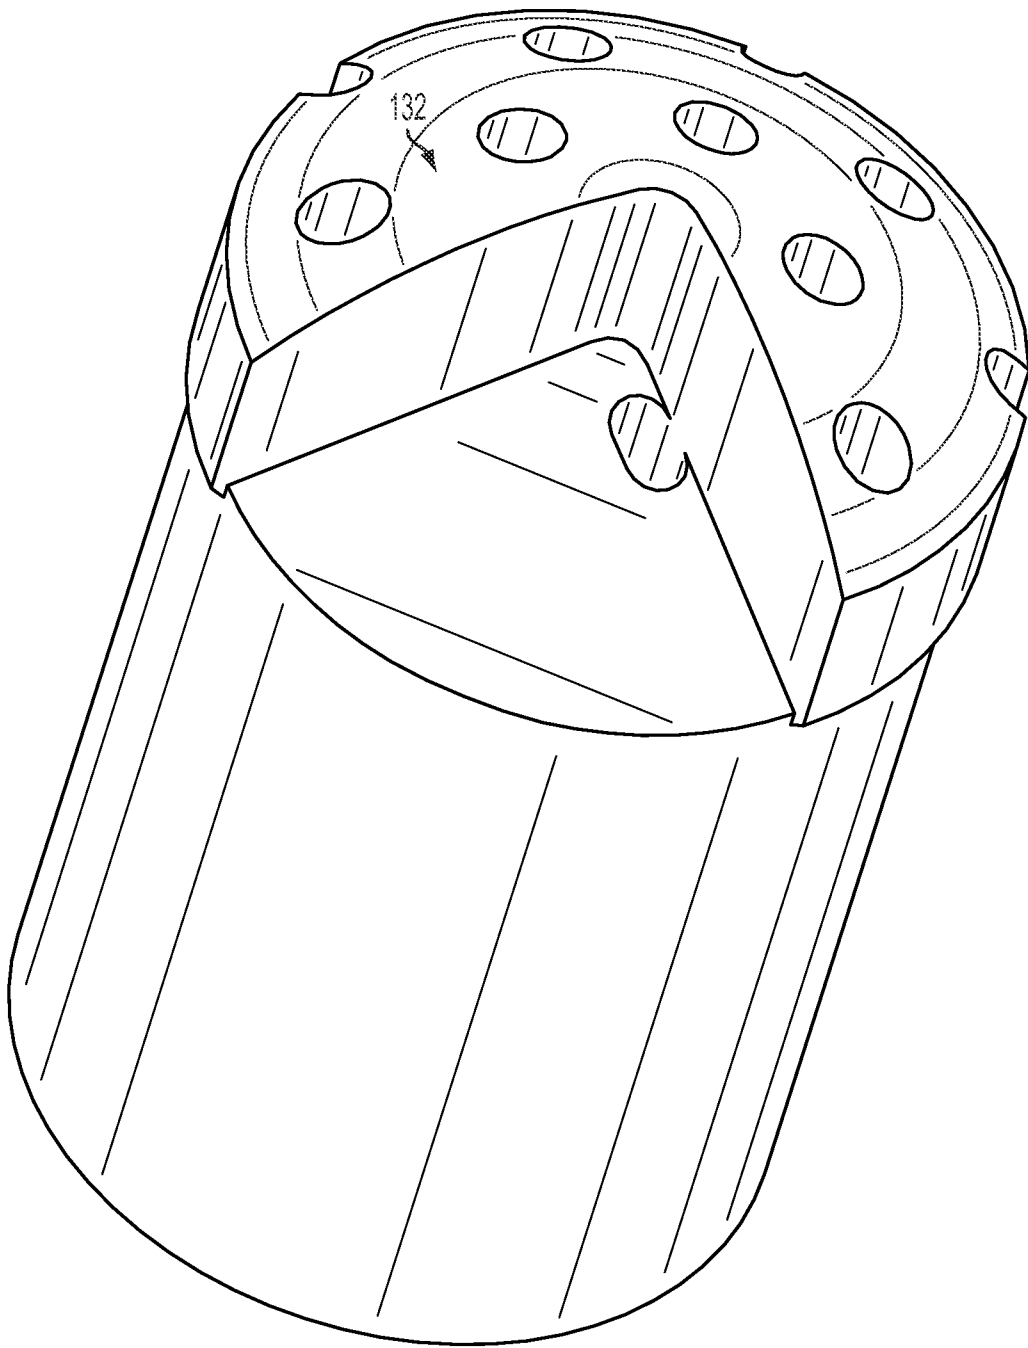


FIG. 6

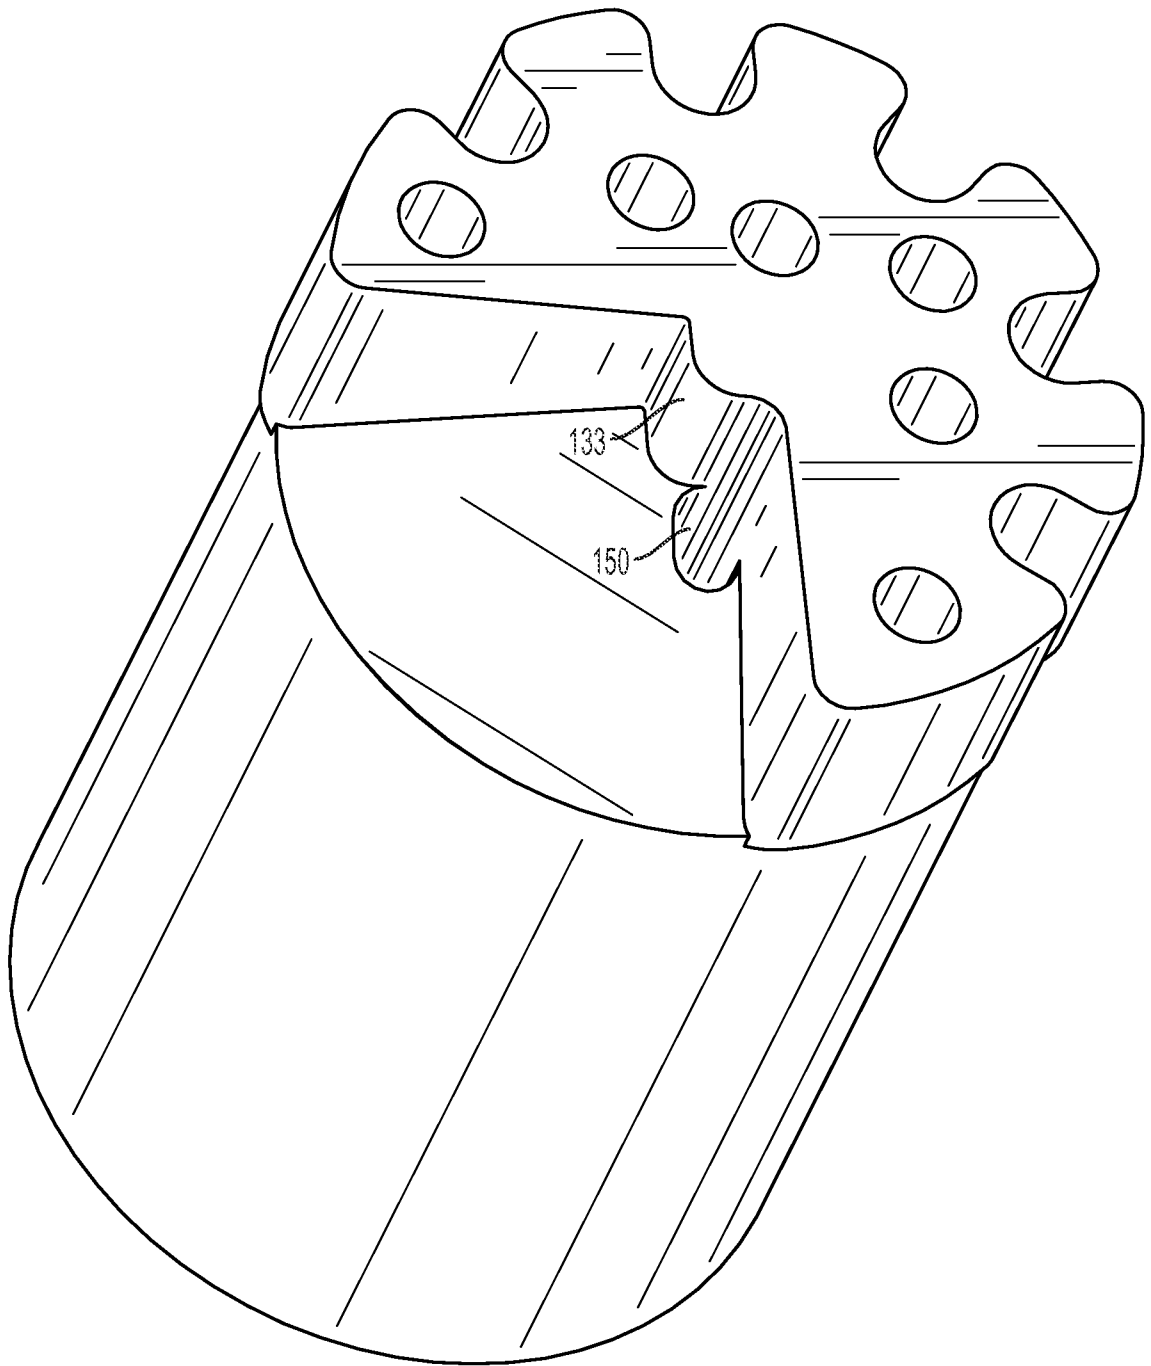


FIG. 7

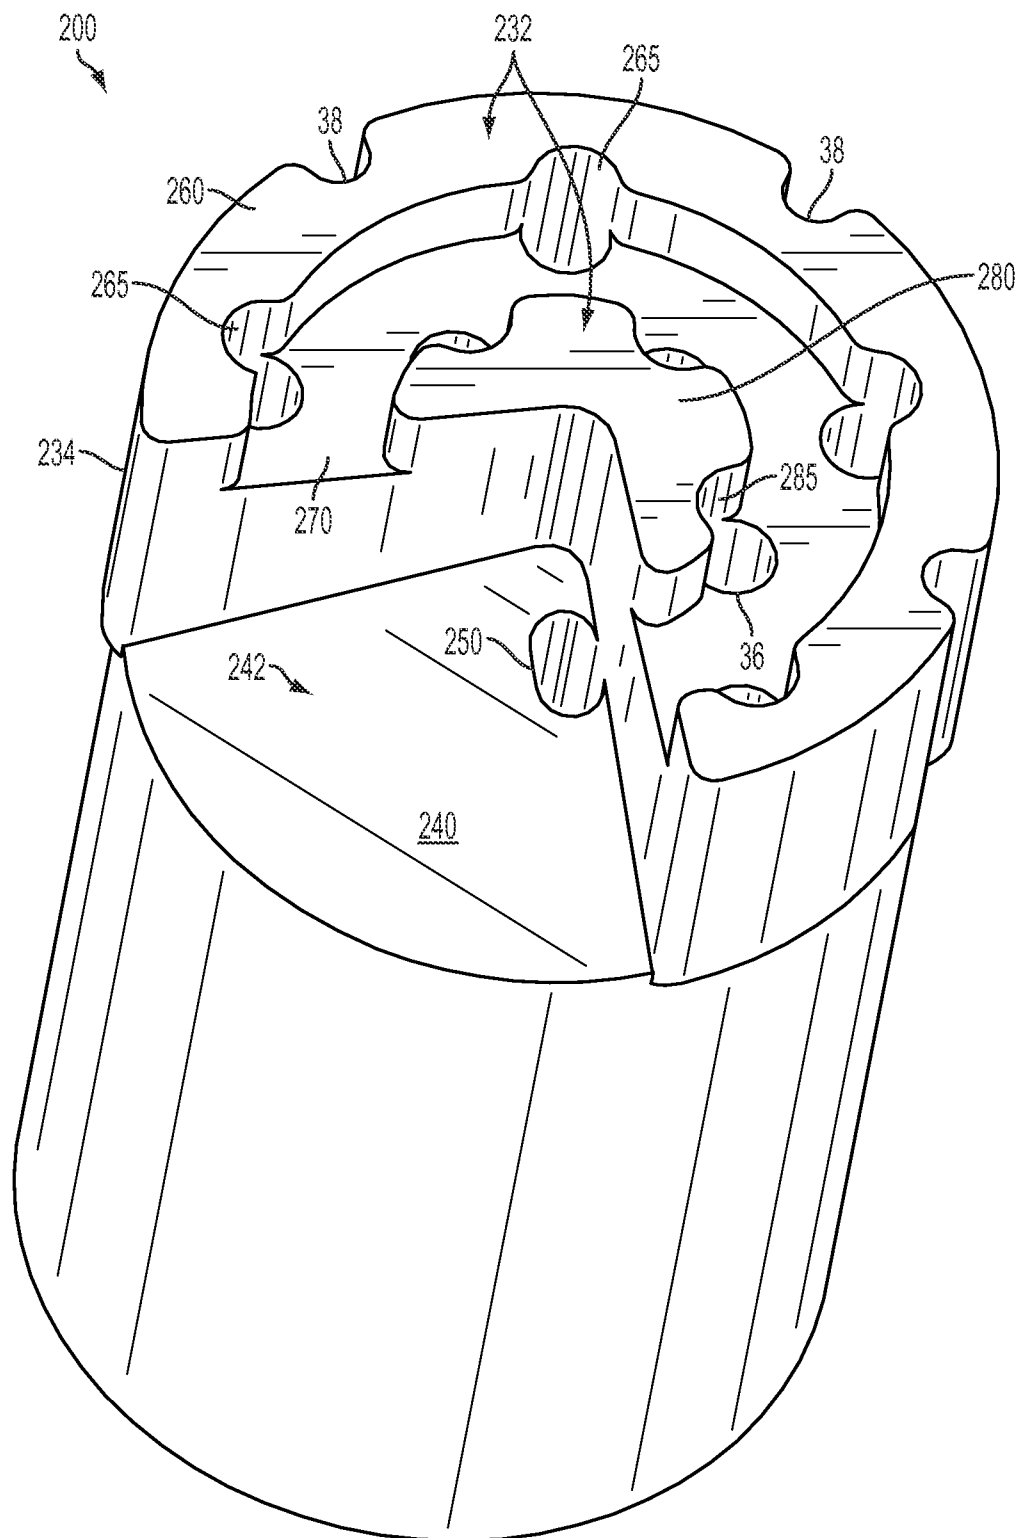


FIG. 8

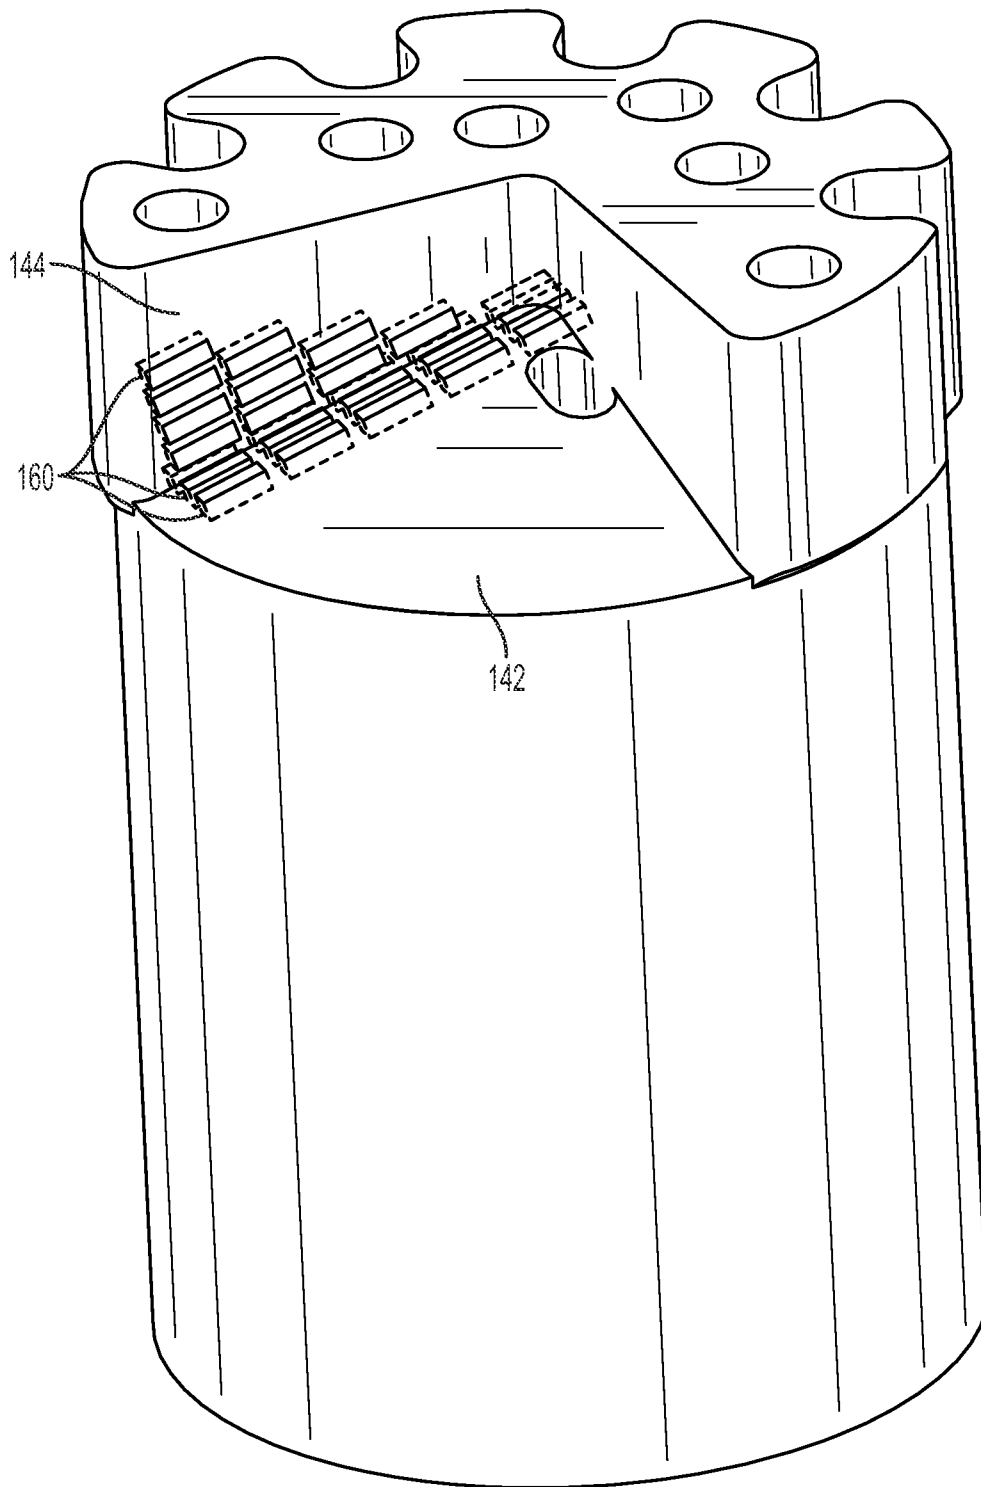


FIG. 9

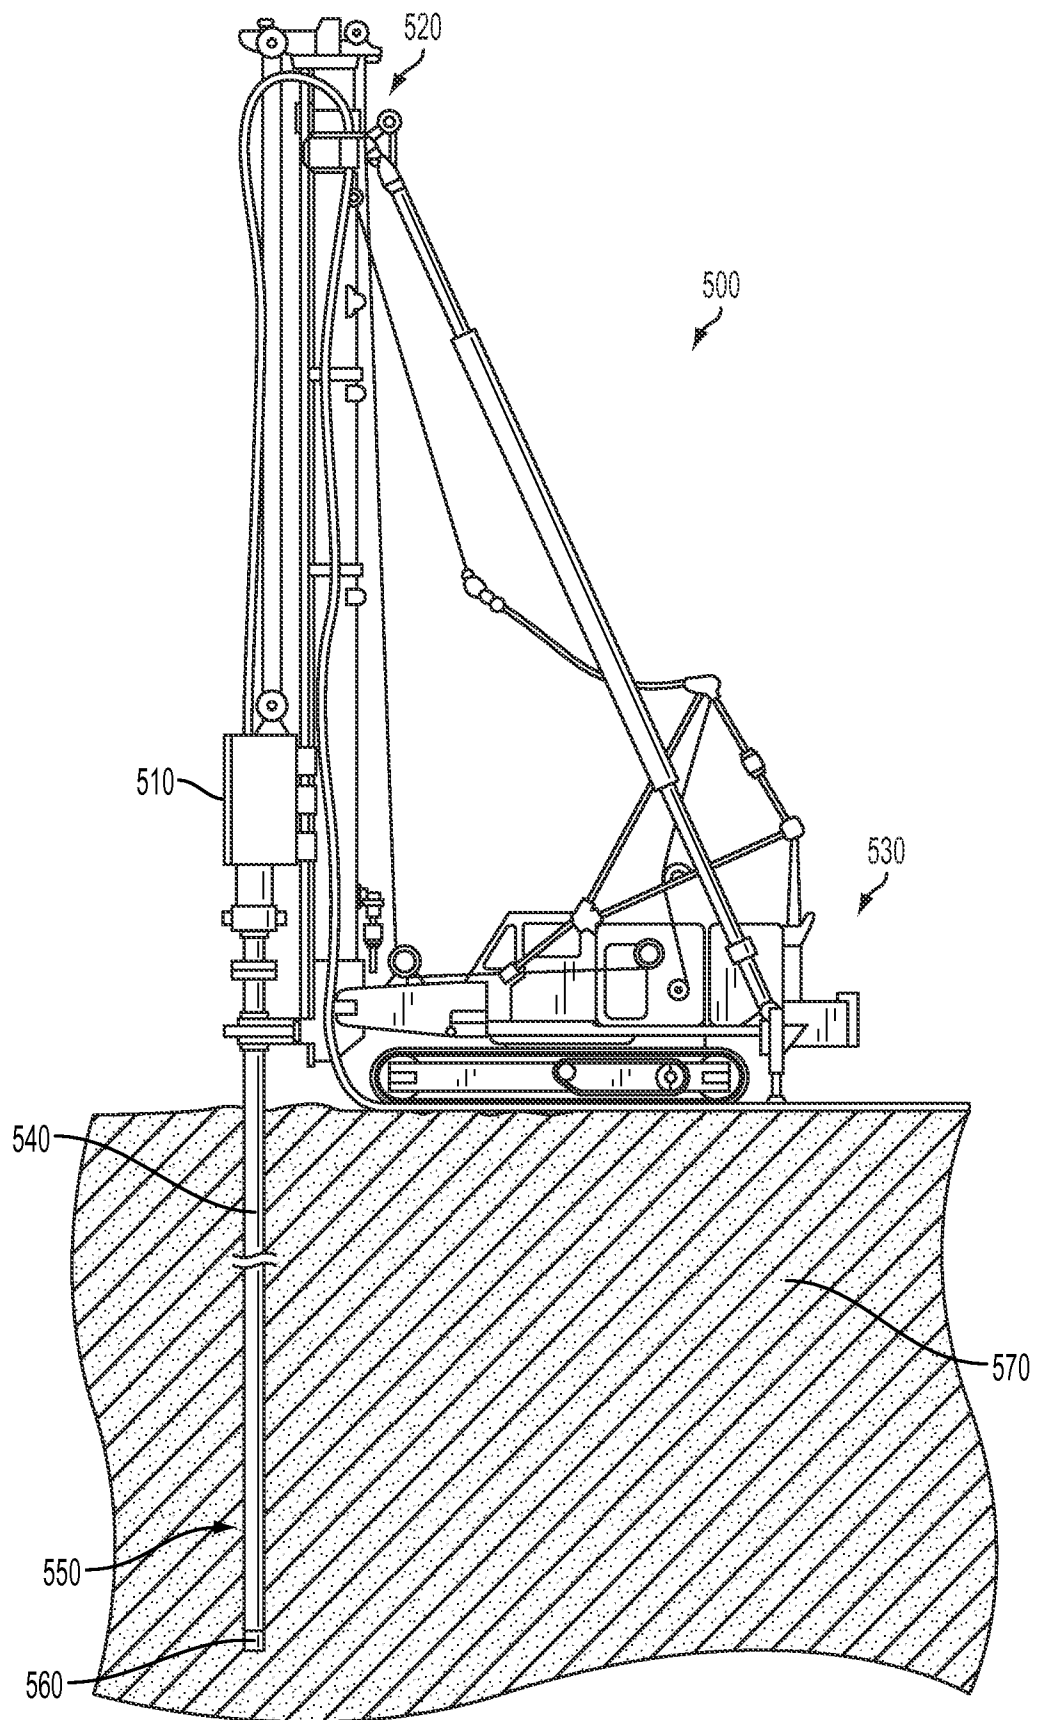


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/066547**A. CLASSIFICATION OF SUBJECT MATTER****E21B 10/42(2006.01)i, E21B 7/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
E21B 10/42; B23B 35/00; E21B 010/36; E21B 10/60; E21B 007/26; E21B 10/02; E21B 7/02Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & keywords: drill bit, flushing, full-face bit, shank, interior space, bore, channel**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005-0105977 A1 (ISHIHARA, MASAMITSU) 19 May 2005 See paragraphs [0040]-[0044] and figures 1,5.	1-20
Y	US 2002-0175006 A1 (FINDLEY et al.) 28 November 2002 See paragraphs [0056]-[0060] and figures 1-3.	1-20
A	US 2011-0031027 A1 (DRIVDAHL et al.) 10 February 2011 See paragraphs [0025]-[0027] and figures 2-4.	1-20
A	US 2010-0170720 A1 (BARIL et al.) 08 July 2010 See paragraphs [0023]-[0025] and figures 3-4.	1-20
A	US 2002-0011355 A1 (WENTWORTH et al.) 31 January 2002 See paragraphs [0088]-[0090] and figures 33-35.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 February 2015 (26.02.2015)

Date of mailing of the international search report

26 February 2015 (26.02.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. ++82 42 472 3473

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/066547

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005-0105977 A1	19/05/2005	EP 1525937 A2 EP 1525937 A3 JP 2005-145041 A	27/04/2005 12/04/2006 09/06/2005
US 2002-0175006 A1	28/11/2002	BE 1014464 A5 GB 2345930 A GB 2345930 B GB 2384262 A GB 2384263 A GB 2384264 A GB 2384265 A IT 1319802 B1 IT T020000066 A1 US 6454030 B1 US 6655481 B2	04/11/2003 26/07/2000 16/07/2003 23/07/2003 23/07/2003 23/07/2003 23/07/2003 03/11/2003 24/07/2001 24/09/2002 02/12/2003
US 2011-0031027 A1	10/02/2011	AU 2007-333850 A1 AU 2011-201706 A1 AU 2011-201707 A1 AU 2011-201709 A1 AU 2011-201710 A1 AU 2011-201713 A1 CA 2671061 A1 CA 2671061 C CA 2784465 A1 CA 2784465 C CA 2826590 A1 CN 101652532 A CN 101652532 B CN 102782243 A EP 2122111 A2 EP 2122111 A4 EP 2513405 A1 US 2008-0142262 A1 US 2010-0006344 A1 US 2010-0012381 A1 US 2010-0012382 A1 US 2010-0012385 A1 US 2010-0012386 A1 US 2010-0089660 A1 US 7628228 B2 US 7828090 B2 US 7874384 B2 US 7909119 B2 US 7918288 B2 US 7958954 B2 US 8051929 B2 US 8459381 B2 WO 2008-076908 A2	26/06/2008 12/05/2011 12/05/2011 12/05/2011 12/05/2011 12/05/2011 26/06/2008 19/11/2013 07/07/2011 07/10/2014 26/06/2008 17/02/2010 07/08/2013 14/11/2012 25/11/2009 09/07/2014 24/10/2012 19/06/2008 14/01/2010 21/01/2010 21/01/2010 21/01/2010 21/01/2010 15/04/2010 08/12/2009 09/11/2010 25/01/2011 22/03/2011 05/04/2011 14/06/2011 08/11/2011 11/06/2013 26/06/2008

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/066547

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0170720 A1	08/07/2010	WO 2008-076908 A3	23/10/2008
		WO 2011-081775 A1	07/07/2011
		ZA 200903801 A	25/08/2010
US 2010-0170720 A1	08/07/2010	AU 2008-295417 A1	12/03/2009
		CA 2698169 A1	12/03/2009
		MX 2010002236 A	25/03/2010
		PE 09092009 A1	02/07/2009
		US 8485283 B2	16/07/2013
		WO 2009-030052 A1	12/03/2009
US 2002-0011355 A1	31/01/2002	CA 2366115 A1	21/09/2000
		EP 1165929 A1	02/01/2002
		US 2002-0043406 A1	18/04/2002
		US 6390207 B2	21/05/2002
		US 6439319 B1	27/08/2002
		US 6516899 B2	11/02/2003
		WO 00-55467 A1	21/09/2000