

(22) **Date de dépôt/Filing Date:** 2012/02/21

(41) Mise à la disp. pub./Open to Public Insp.: 2012/09/01

(45) **Date de délivrance/Issue Date:** 2016/07/19

(30) **Priorité/Priority:** 2011/03/01 (GB1103604.3)

(51) **Cl.Int./Int.Cl. A47L 11/34** (2006.01),
A47L 11/40 (2006.01), **B08B 3/10** (2006.01),
D06B 1/02 (2006.01)


(72) **Inventeurs/Inventors:**
PEARS, BARRY, GB;
ROUNDTREE, DAVID, GB;
RILEY, MARTYN, GB;
HOUGHTON, STEPHEN, GB;
WALKER, ANDREW, GB

(73) **Propriétaire/Owner:**
STANLEY BLACK & DECKER INC., US

(74) **Agent:** SIM & MCBURNEY

(54) Titre : APPAREIL DE NETTOYAGE A LA VAPEUR

(54) Title: STEAM CLEANING APPARATUS

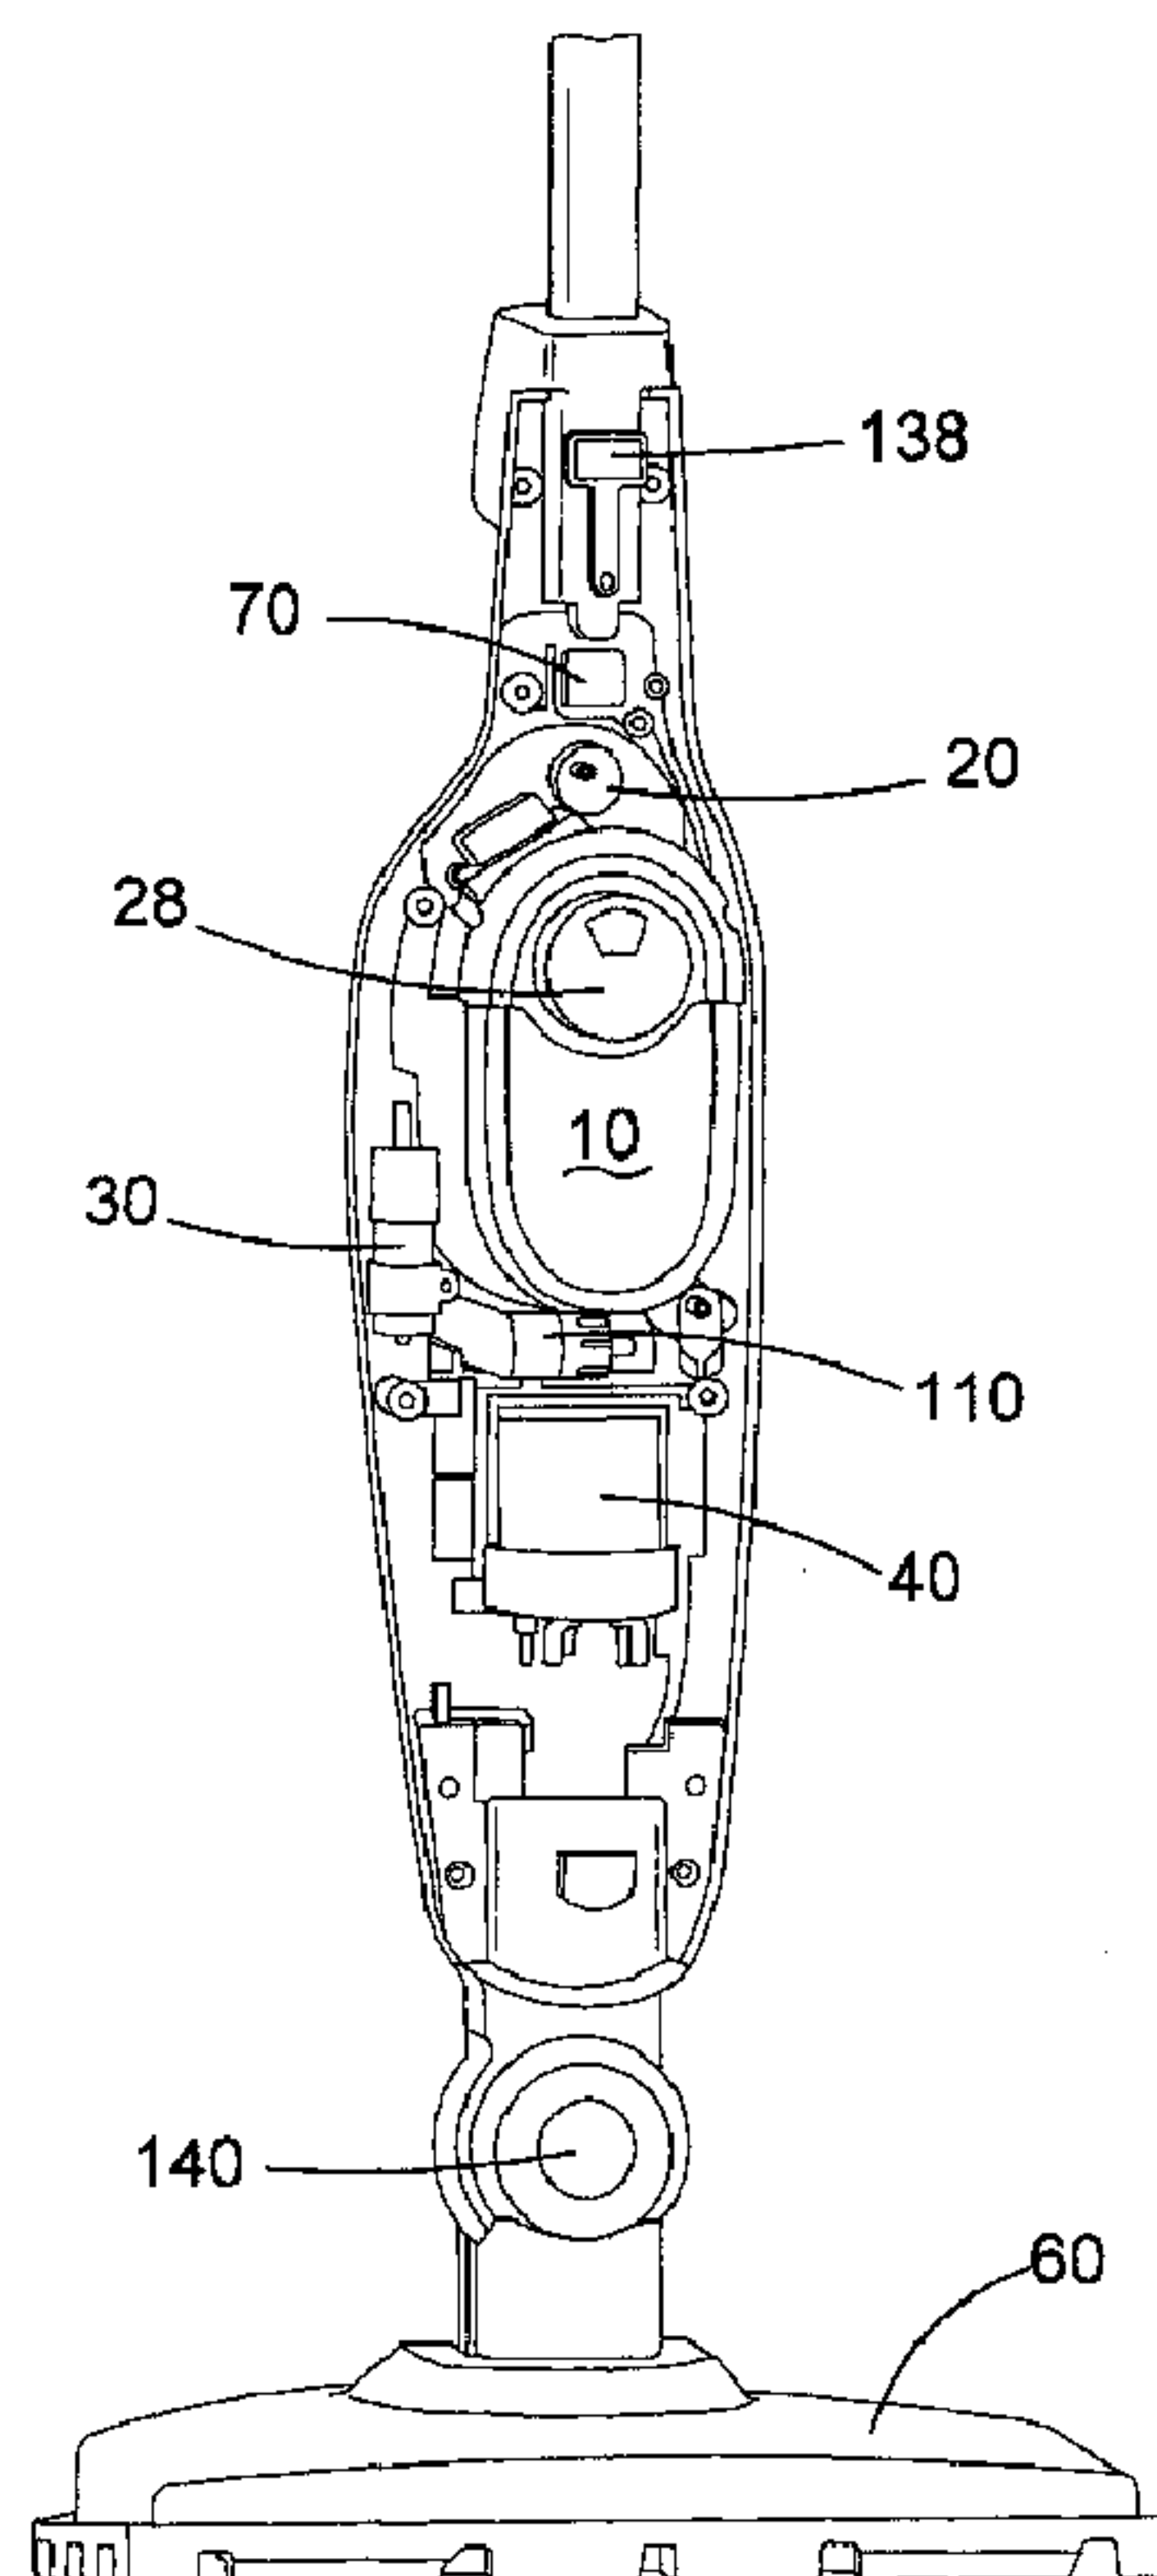

(57) Abrégé/Abstract:

A steam cleaning apparatus comprises a main body; a main ON/OFF switch for supplying electrical power; a steam cleaning head coupled to the main body; and a position sensitive switch having a first state when the steam apparatus is in a substantially vertical

(57) Abrégé(suite)/Abstract(continued):

storage position and a second state when the steam cleaning apparatus is in a tilted, cleaning position. The position sensitive switch is connected in electrical series with the main ON-OFF switch such that when the position- sensitive switch is in the first state, the position-sensitive switch interrupts the flow of electrical current from the main ON/OFF switch and when the position-sensitive switch is in the second state, electrical power is supplied by the main ON/OFF switch.

ABSTRACT

A steam cleaning apparatus comprises a main body; a main ON/OFF switch for supplying electrical power; a steam cleaning head coupled to the main body; and a position sensitive switch having a first state when the steam apparatus is in a substantially vertical storage position and a second state when the steam cleaning
5 apparatus is in a tilted, cleaning position. The position sensitive switch is connected in electrical series with the main ON-OFF switch such that when the position-sensitive switch is in the first state, the position-sensitive switch interrupts the flow of electrical current from the main ON/OFF switch and when the position-sensitive switch is in the second state, electrical power is supplied by the main ON/OFF
10 switch.

STEAM CLEANING APPARATUS

The present invention concerns a steam cleaning apparatus, and more particularly, a steam cleaning apparatus of the type suitable for cleaning floors in a domestic environment. On the other hand, the present invention does not concern vacuum cleaners which also have a steam-generating function, which are a different type of floor cleaning apparatus from those envisaged herein. Steam cleaning apparatuses of the latter type, which do not incorporate a vacuuming function, are also known and examples of them are described in US-A-2010/0126533, WO-A-10/0017657 and US-A-2007/0130719. Other examples of such apparatus can also be found on the market sold under brands such as Euro-ProTM and Simac-VetrellaTM. However, such steam cleaning apparatuses have only been available for a few years, and are still undergoing rapid development, so that it is still possible to provide a steam cleaning apparatus with greatly improved convenience and enhanced functionality for users thereof in comparison to the known examples. It is therefore an object of the present invention to provide a steam cleaning apparatus with improved convenience for users and enhanced functions.

Accordingly, in a first aspect, the present invention provides a steam cleaning apparatus comprising: a water tank having a first inlet for water, a second inlet for air, and an outlet, the first inlet being sealable in an airtight manner; a first valve having an inlet and an outlet, the outlet being in fluid communication with the second inlet of the water tank, the first valve being arranged to allow air to flow into the second inlet of the water tank and to prevent air and/or water from flowing out therefrom; an electrically powered air pump having an inlet in fluid communication with atmospheric air and an outlet in fluid communication with the inlet of the first valve; an electrically powered boiler having an inlet for water in fluid communication with the outlet of the water tank, the boiler being to heat water to generate steam and having an outlet for such steam; a second valve having an inlet and an outlet, the inlet being in fluid communication with the outlet of the water tank, and the outlet being in fluid communication with the inlet of the boiler, the second valve being arranged to allow water above a first predetermined pressure to flow into the inlet of the boiler and to prevent steam from flowing out therefrom; a steam cleaning head in fluid communication with the outlet of the boiler; and an on-off switch having an "on" state for supplying electrical power to the air pump and to the boiler and an "off" state for preventing supply of electrical power to the air pump and to the boiler, whereby if water is introduced into the water tank and the first inlet thereof is sealed in an

airtight manner, when the on-off switch is placed in the "on" state, the air pump pumps air through the first valve into the water tank, pressurising the water therein until the water reaches said first predetermined pressure, whereupon the water flows from the water tank through the second valve into the boiler, where the water is
5 heated to generate steam which emerges from the steam cleaning head.

Such a steam cleaning apparatus has the advantage that it is electrically pumped, in comparison to known examples thereof, which must be manually pumped by a user. This makes it more convenient for the user, who does not have to keep pumping water from the water tank into the boiler in order to ensure that steam is
10 generated by the apparatus. It also helps to maintain a steady and consistent flow of steam, whilst preventing the boiler from overheating, in case the user accidentally stops pumping water from the water tank. The electrical power for the air pump may be supplied from a source of mains electricity. Alternatively or additionally, it may be supplied from an electrical battery mounted on the steam cleaning apparatus.

15 Preferably, the water tank further comprises a second outlet, and the steam cleaning apparatus further comprises a pressure release valve having an inlet in fluid communication with the second outlet of the water tank, and an outlet in fluid communication with atmospheric air, the pressure release valve being arranged to allow water and/or air above a second predetermined pressure greater than said first
20 predetermined pressure to flow from the water tank to atmospheric air. This arrangement provides the steam cleaning apparatus with a safety mechanism to ensure that pressure is released to atmospheric air without being able to reach dangerous levels if steam is prevented from emerging from the steam cleaning head by a blockage or obstruction.

25 In a preferred embodiment, the steam cleaning apparatus further comprises a position-sensitive switch having a first state when the steam cleaning apparatus is in a substantially vertical, storage position and a second state when the steam cleaning apparatus is in a tilted, cleaning position, the position-sensitive switch being operatively connected to the on-off switch such that when the position-sensitive
30 switch is in the first state, the on-off switch is put in the "off" state, and when the position-sensitive switch is in the second state, the on-off switch is put in the "on" state. The provision of such a position-sensitive switch allows the steam cleaning apparatus to be switched from a disabled condition into a usable condition and back again merely by a user moving the apparatus from the substantially vertical, storage
35 position into the tilted, cleaning position, which is very convenient for the user, and also acts as a safety feature by preventing the apparatus from being left on when

stored. Alternatively or additionally, the pressure release valve may preferably be arranged such that it is opened when the steam cleaning apparatus is in a substantially vertical, storage position, whereas when the steam cleaning apparatus is in a tilted, cleaning position, the pressure release valve only allows water and/or air
5 above said second predetermined pressure to flow from the water tank to atmospheric air. This also has the beneficial effect of ensuring that the apparatus cannot be left in a pressurised state when stored.

Preferably, the first valve is a regulator valve further comprising a vent and a pressure adjustor, the pressure adjustor being arranged to divert air from the inlet of
10 the first valve to the vent thereof in preference to the outlet thereof in a ratio dependent upon the condition of the pressure adjustor, whereby adjusting the condition of the pressure adjustor can be used to vary the amount of air supplied by the air pump to the water tank. This has the effect of adjusting the amount of steam
15 cleaning apparatus to be used on different types of floor surfaces for which different amounts of steam are respectively appropriate (such as carpets, wood laminate floorings and tiles), by the user adjusting the condition of the pressure adjustor.

Preferably, the steam cleaning apparatus also comprises a water filter having an inlet in fluid communication with the outlet of the water tank, and an outlet in fluid
20 communication with the inlet of the second valve, the water filter comprising an ion-exchange resin. Such a water filter has the advantage of ensuring that if the water tank of the steam cleaning apparatus is filled with hard water, the apparatus does not become blocked with residue from low solubility salts like calcium carbonate contained in the water, which are instead removed by the ion exchange resin before
25 the water is heated to generate steam.

Preferably, the steam cleaning apparatus further comprises a time-delay circuit operatively connected between the on-off switch and the air pump for introducing a time delay into a supply of electrical power to the air pump, whereby the boiler is able to reach operating temperature during said time delay before the boiler receives
30 water from the water tank as a result of the air pump starting to pump air into said tank. This has the advantage of ensuring that the boiler does not undesirably generate hot water instead of steam during the period in which the boiler has not yet reached operating temperature.

In a preferred embodiment, the steam cleaning apparatus also comprises an
35 indicator light having a first colour for indicating when the steam cleaning apparatus is powered on but is not ready to use and a second colour for indicating when the

steam cleaning apparatus is powered on and is ready to use, the indicator light having a first condition associated with the first colour, a second condition associated with the second colour and a third condition not associated with either the first or the second colour, wherein the first condition of the indicator light is induced by the on-off switch being in the "on" state and the air pump being prevented from receiving a supply of electrical power by the time delay circuit, the second condition is induced by the on-off switch being in the "on" state and the air pump receiving a supply of electrical power unhindered by the time delay circuit, and the third condition is induced by the on-off switch being in the "off" state thereof. The provision of such an indicator light has the advantage of informing the user not only of whether the steam cleaning apparatus is switched on or off, but also whether the steam cleaning apparatus is ready to be used for cleaning.

Preferably, the steam cleaning apparatus further comprises a thermostat for detecting the temperature of steam generated by the boiler and for controlling the temperature of the boiler to remain within a range of temperatures of between 100 and 155 degrees Celsius. This ensures that the temperature of the steam emerging from the steam cleaning head is within the optimum range for cleaning and sterilizing surfaces, without being so hot as to risk damaging them. More prefer still, the thermostat controls the temperature of the boiler to remain within a range of temperatures of between 110 and 145 degrees Celsius, which is the ideal range for the steam emerging from the steam cleaning head to have these effects.

Preferably, if the steam cleaning apparatus does comprise such a thermostat as well as an indicator light as just described, the indicator light is arranged to operate such that the first condition of the indicator light is induced by the on-off switch being in the "on" state and either the air pump being prevented from receiving a supply of electrical power by the time delay circuit or the thermostat detecting that the temperature of steam generated by the boiler is outside said temperature range, and the second condition of the indicator light is induced by the on-off switch being in the "on" state, the air pump receiving a supply of electrical power unhindered by the time delay circuit and the thermostat detecting that the temperature of steam generated by the boiler is within said temperature range. Thus, the indicator light will not show to a user that the steam cleaning apparatus is ready to be used if there is not steam emerging from the steam cleaning head within the optimum range for cleaning and sterilizing surfaces, without being so hot as to risk damaging them.

In a second aspect, the present invention also provides a method of operating a steam cleaning apparatus, said method comprising: introducing water into a water

tank of the steam cleaning apparatus; supplying electrical power to an air pump and to a boiler of the steam cleaning apparatus; thereby causing the air pump to pump air from atmosphere into the water tank via a first valve to pressurise the water in the water tank and cause said water to flow via a second valve into the boiler; and
5 heating the water in said boiler to generate steam; allowing said steam to emerge via an outlet of said boiler into a steam cleaning head of the steam cleaning apparatus. Thus, this has the advantage of allowing water to be pumped to the boiler electrically in a carefully controlled manner in order to generate steam, rather than a user having to pump the water manually, which would otherwise inevitably entail that the amount
10 of water thus pumped would vary erratically according to the specific pumping action of the user.

Greater convenience may also be given to the user if the method preferably also comprises tilting the steam cleaning apparatus from a substantially vertical, storage position into a tilted, cleaning position; detecting the position of the steam
15 cleaning apparatus with a position-sensing switch of the apparatus having a first state corresponding to the substantially vertical, storage position of the apparatus and a second state corresponding to the tilted, cleaning position thereof; and supplying electrical power to at least one of the air pump and the boiler dependent on the respective state of the position-sensing switch. This has the advantage that the
20 user does not need to switch the supply of steam on and off, but that steam will instead be supplied to the floor cleaning head only when the apparatus is in the tilted, cleaning position. It also ensures that if the apparatus is parked in the substantially vertical, storage position, it does not continue to generate steam.

Preferably, the method comprises delaying the step of causing the air pump to
25 pump air from atmosphere into the water tank via the first valve in order to pressurise the water in the water tank and cause said water to flow via the second valve into the boiler until a time when the boiler has reached a temperature above 100 degrees Celsius; and heating the water in said boiler to generate steam at an operating temperature lying in a range of from 100 to 155 degrees Celsius by adjusting the
30 temperature of the boiler with a thermostat of the steam cleaning apparatus to lie within said range. This has the advantage of ensuring that water is converted into steam almost instantaneously upon entry of the water into the boiler, and avoids the risk that the water will instead pass through the boiler without being converted into steam and being merely heated up, thereby causing an undesirable expulsion of hot
35 water from the floor cleaning head of the apparatus, which would otherwise create an

unwanted puddle of hot water on the surface of the floor to be cleaned at the start of each cleaning operation.

If the method also comprises illuminating an indicator light of the apparatus with a first colour to indicate that said apparatus is powered on but is not ready to use and
5 with a second colour to indicate that said apparatus is powered on and is ready to use, the user will also have the increased convenience of knowing that the steam is at the correct temperature of cleaning and sterilization of floors as desired.

In another aspect, the present invention also provides a steam cleaning apparatus comprising: a main body; a main ON/OFF switch for supplying electrical
10 power; a steam cleaning head coupled to the main body; and a position sensitive switch having a first state when the steam apparatus is in a substantially vertical storage position and a second state when the steam cleaning apparatus is in a tilted, cleaning position, the position sensitive switch being connected in electrical series with the main ON-OFF switch such that when the position-sensitive switch is in the first state, the
15 position-sensitive switch interrupts the flow of electrical current from the main ON/OFF switch and when the position-sensitive switch is in the second state, electrical power is supplied by the main ON/OFF switch.

6a

Further features and advantages of the present invention will become apparent from the following detailed description, which is given by way of example and in association with the accompanying drawings, in which:

Fig. 1 is a general view of a steam cleaning apparatus according to an
5 embodiment of the invention;

Fig. 2 an exposed view of a main body portion of the steam cleaning apparatus shown in Fig. 1;

Fig. 3 is a schematic diagram of the layout of the functional components of the steam cleaning apparatus shown in Figs 1 and 2; and

10 Fig. 4 is a close-up, exposed view of where the main body portion of the steam cleaning apparatus shown in Figs. 1 and 2 connects with a steam cleaning head thereof.

Referring firstly to Fig. 1, there is shown a general view of a steam cleaning apparatus 100 having a main body portion 120, to the lower end of which is mounted a
15 floor cleaning head 60. On the front of main body portion 120, there can be seen an electrical power on-off switch 70, an adjustor dial 28, whereby a user can adjust the pressure of steam emerging from steam cleaning head 60, and a water tank 10. The water tank can be filled via a water inlet 12 mounted on the back of main body portion 120, which cannot be seen in Fig. 1. An upper end of main body portion 120 is
20 connected to a handle portion 130, bearing upper 132 and lower 134 hooks for a user to be able to coil an electrical cable of the steam cleaning apparatus around, for storage thereof. At the top end of handle portion 130 is a loop handle 136 for a user to be able to pick up the steam cleaning apparatus 100. The height adjustment button 138 and by sliding handle portion 130 into and out of main body portion 120 as desired until a catch
25 on the interior of height adjustment button 138 engages with a corresponding detent in handle portion 130. A universal joint 140 joins the lower end

of main body portion 120 to the steam cleaning head 60 and allows the steam cleaning apparatus to be pivoted thereabout by the user as desired.

Fig. 2 shows main body portion 120 of the steam cleaning apparatus 100 with a front cover thereof removed in order to expose an interior thereof. As can be seen in
5 Fig. 2, main body portion 120 houses water tank 10, an air pump 30, a valve 20 in fluid communication between the water tank 10 and the air pump 30, and a boiler 40, as the main components thereof, as well as a water filter 110 located in fluid communication between the water tank 10 and the boiler 40.

Fig. 3 schematically shows the layout of the functional components of the steam cleaning apparatus shown in Figs. 1 and 2, the operation of which will now be described. Electrically powered air pump 30 receives atmospheric air via inlet 32 thereof, compresses it, and expels the compressed air via outlet 34 thereof. Air pump 30 is of a conventional type which compresses the incoming atmospheric air via the action of alternating pistons. The compressed air is then passed to inlet 22 of first valve 20. First valve 20 has two outlets 24 and 26. The first outlet 24 is connected to an inlet 14 of water tank 10. The second outlet 26 is a vent which exhausts to atmosphere. Valve 20 acts a regulator valve and is provided with a pressure adjustor 28, the condition of which can be adjusted by a user, in order to vary the amount of air supplied by the air pump 30 to the water tank 10, by diverting air from the inlet 22 to the vent 26 in preference to the outlet 24, in a ratio dependent on the condition of the adjustor 28. The pressure adjustor 28 includes an adjusting rod within valve 20 that acts on a resilient rubber seal of vent 26. According to the amount of pressure which is applied to the resilient rubber seal by the adjusting rod, the resilient rubber seal is opened, in order to allow air to bleed through the seal to atmosphere. The position of the adjusting rod is in turn determined by the condition of pressure adjustor 28 selected by the user.

Water tank 10, which has previously been filled by the user with water via inlet
10 12 is therefore pressurized with air to the same degree. An airtight cap 12a on water inlet 12 prevents the compressed air, as well as water, from escaping via water inlet 12 to atmosphere. On the other hand, water tank 10 is also provided with a second outlet 18 which is connected to an inlet 82 of a pressure release valve 80, which itself has an outlet 84 in fluid communication with atmospheric air. The pressure release
15 valve 80 is arranged to allow water and/or air above a certain predetermined pressure to escape via outlet 84 to atmospheric air, where this certain predetermined pressure is set at a value greater than the value which normally allows water to pass via outlet 16 of water tank 10 to boiler 40. Thus, if pressure in the water tank 10

builds up to a dangerous degree, for example because of a blockage downstream of water tank 10, rather than the pressure being increased still further by the pumping action of air pump 30 until the apparatus risks exploding, the pressure is instead released via outlet 84. This is provided as a safety feature of the apparatus.

Assuming there is no such blockage (which will not be the case under normal operating conditions), water is accordingly pumped from outlet 16 of water tank 10 by the air pressure bearing down on it to the inlet 112 of water filter 110. Here, the water is filtered in order to remove low solubility salts, such as calcium carbonate, via an ion exchange resin, before the water is next passed via outlet 114 of the water filter 110 towards boiler 40. Apart from the ion exchange resin, the water filter 110 may also contain a sponge to filter out any foreign bodies, thereby protecting the boiler 40 still further. Outlet 114 of filter 110 is in fluid communication with inlet 52 of a second valve 50, an outlet 54 of which is in turn in fluid communication with an inlet 42 of boiler 40. The second valve 50 has a certain predetermined pressure, above which it will allow water to flow into boiler 40, but below which it blocks the passage of water into the boiler. This predetermined pressure is set at a value lower than that set for pressure release valve 80, so that a normal range of operating pressures of boiler 40 lies between the predetermined pressure value of second valve 50 and the predetermined pressure value of pressure release valve 80. Exactly where within this range of normal operating pressures the boiler operates at is determined by the setting of regulator valve 20 which has been chosen by the user via pressure adjustor 28. This in turn determines how fast water passes through the boiler 40 and is turned into steam, and therefore how much steam, in terms of volume of steam per unit time, exits outlet 44 of boiler 40. The steam thus generated then passes via connector 46 to pivot connector 48 and thence to nozzle connector 142 of steam cleaning head 60.

- 5 In the illustrated embodiment, the electrical power supplied to air pump 30 includes a time-delay circuit (not shown), so that air pump 30 only starts to pump air through the system after a five second delay, because boiler 40 takes five seconds to heat up from ambient temperature to a temperature of 110 degrees Celsius. A thermostat connected to the boiler (also not shown) then ensures that the
- 10 temperature of boiler 40 is held within a range of from 110 to 145 degrees Celsius once boiler 40 has heated up. Thus water entering boiler 40 is converted into steam almost instantaneously upon its entry into the boiler via inlet 42 and the possibility that water can pass through the boiler and exit the floor cleaning head 60 without being converted into steam is thereby avoided.

Fig. 4 shows in close-up an exposed view of where the main body portion 120 of the steam cleaning apparatus 100 connects with the steam cleaning head 60 thereof. As may be seen in Fig. 4, the universal joint 140 includes a member 150 which acts upon a spring-loaded yoke 152. One arm 152a of yoke 152 engages with pressure release valve 80 and another arm 152b of yoke 152 engages with a position-sensitive microswitch 90. Microswitch 90 is connected in electrical series with main on-off switch 70 of steam cleaning apparatus 100. At the other end of yoke 152 are two prongs 154a, 154b, on each of which is mounted a respective coiled spring (not shown), each such spring also being mounted to an interior surface of the main body 120 of the steam cleaning apparatus 100. Thus, when the steam cleaning apparatus 100 is put in a substantially vertical, storage position, member 150 of universal joint 140 pushes on spring-loaded yoke 152, one arm 152a of which in turn presses on pressure release valve 80 and the other arm 152b of which in turn presses on the position-sensitive microswitch 90. This has the effects firstly of opening the pressure release valve 80, thereby releasing air pressure from the water tank 10 until it returns to atmospheric pressure and secondly of interrupting the flow of electrical current from the main on-off switch 70 to air pump 30 and boiler 40. At the same time, the two coiled springs are placed in tension.

On the other hand, when the steam cleaning apparatus 100 is put in a tilted, cleaning position, member 150 withdraws from spring-loaded yoke 152 and the two arms thereof 152a, 152b are thereby caused to disengage from the pressure release valve 80 and the position-sensitive microswitch 90 by the action of the two springs.

5 Thus, pressure can now build up in the water tank 10 and electrical power can also be supplied to both the pump 30 and the boiler 40. Although in the presently described embodiment, both the main on-off switch 70 and the pressure release valve 80 are affected by whether the steam cleaning apparatus is put in a substantially vertical, storage position or in a tilted, cleaning position, alternative

10 embodiments in which only one or neither of these features are present are also possible. However, both are preferred as safety features, as well as providing increased convenience for the user.

Although not visible in the drawings, an additional feature of the described embodiment is an indicator light connected in series with the main on-off switch 70 of

15 the apparatus. For greater aesthetic appeal, this indicator light is mounted within the interior of main body portion 120 of the apparatus, but water tank 10 is made of a translucent plastics material, so that light from the indicator light is able to shine through the water tank 10 and thus be visible by a user from the exterior of the

apparatus as an apparent illumination of water tank 10. The indicator light has a first colour for indicating when the steam cleaning apparatus 100 is powered on but is not ready to use and a second colour for indicating when the steam cleaning apparatus 100 is powered on and is ready to use. In order to achieve this, the indicator light
 5 has a first condition associated with the first colour, a second condition associated with the second colour and a third condition not associated with either the first or the second colour. These first, second and third conditions of the indicator light are achieved by electrical wiring of the indicator light in the appropriate fashion, as follows.

The first condition of the indicator light is induced by the on-off switch 70 being put in the "on" state by a user and either the air pump 30 being prevented from receiving a supply of electrical power by the time delay circuit or the thermostat detecting that the temperature of steam generated by the boiler 30 is outside the operating temperature range. The second condition is induced by the on-off switch 70 being in the "on" state and the air pump 30 receiving a supply of electrical power unhindered by the time delay circuit and the thermostat detecting that the temperature of steam generated by the boiler 30 is within the desired operating temperature range. The third condition is induced by the on-off switch 70 being in the "off" state thereof. When on-off switch 70 is in an "off" state, the indicator light remains off and no colour is displayed due to the absence of any electrical current flowing therethrough. However, when the on-off switch 70 is put in an "on" state by the user, the indicator light illuminates the water tank 10 with colours as shown in the following Table 1:

10

Colour of indicator light	Temperature of steam detected by thermostat within operating temperature range	Temperature of steam detected by thermostat outside operating temperature range
Air pump on	Blue	Red
Air pump off	Red	Red

Table 1

Thus, in the described embodiment, red is the first colour of the indicator light
 15 and blue is the second colour. However, it may be understood that any other colours

could be chosen instead as the first and second colours, for example yellow and green respectively. It should also be understood that in an alternative embodiment in which the boiler of the steam cleaning apparatus is not provided with a thermostat, the first condition of the indicator light is induced by the on-off switch 70 being put in the “on” state by a user and the air pump 30 being prevented from receiving a supply of electrical power by the time delay circuit, and the second condition is induced by the on-off switch 70 being in the “on” state and the air pump 30 receiving a supply of electrical power unhindered by the time delay circuit. In still yet a further embodiment in which the boiler does include a thermostat but the steam cleaning apparatus is not provided with a time delay circuit, the first condition of the indicator light is instead induced by the on-off switch 70 being put in the “on” state by a user and the thermostat detecting that the temperature of steam generated by the boiler 30 is outside the operating temperature range, whereas the second condition is induced by the on-off switch 70 being in the “on” state and the thermostat detecting that the temperature of steam generated by the boiler 30 is within the desired operating temperature range. In all cases, however, the third condition of the indicator light is always induced by the on-off switch 70 being put in the “off” state by the user.

What is claimed is:

1. A steam cleaning apparatus comprising:
a main body;
a main ON/OFF switch for supplying electrical power;
a steam cleaning head coupled to the main body; and
a position sensitive switch having a first state when the steam apparatus is in a substantially vertical storage position and a second state when the steam cleaning apparatus is in a tilted, cleaning position, the position sensitive switch being connected in electrical series with the main ON-OFF switch such that when the position-sensitive switch is in the first state, the position-sensitive switch interrupts the flow of electrical current from the main ON/OFF switch and when the position-sensitive switch is in the second state, electrical power is supplied by the main ON/OFF switch.
2. A steam cleaning apparatus according to claim 1 further comprising a universal joint joining the steam cleaning head and the main body.
3. A steam cleaning apparatus according to claim 2 wherein the universal joint comprises a member which acts upon a spring loaded yoke.
4. A steam cleaning apparatus according to claim 3 wherein one arm of the yoke engages the position sensitive switch.
5. A steam cleaning apparatus according to any one of claims 1 to 4 wherein the position sensitive switch comprises a microswitch.

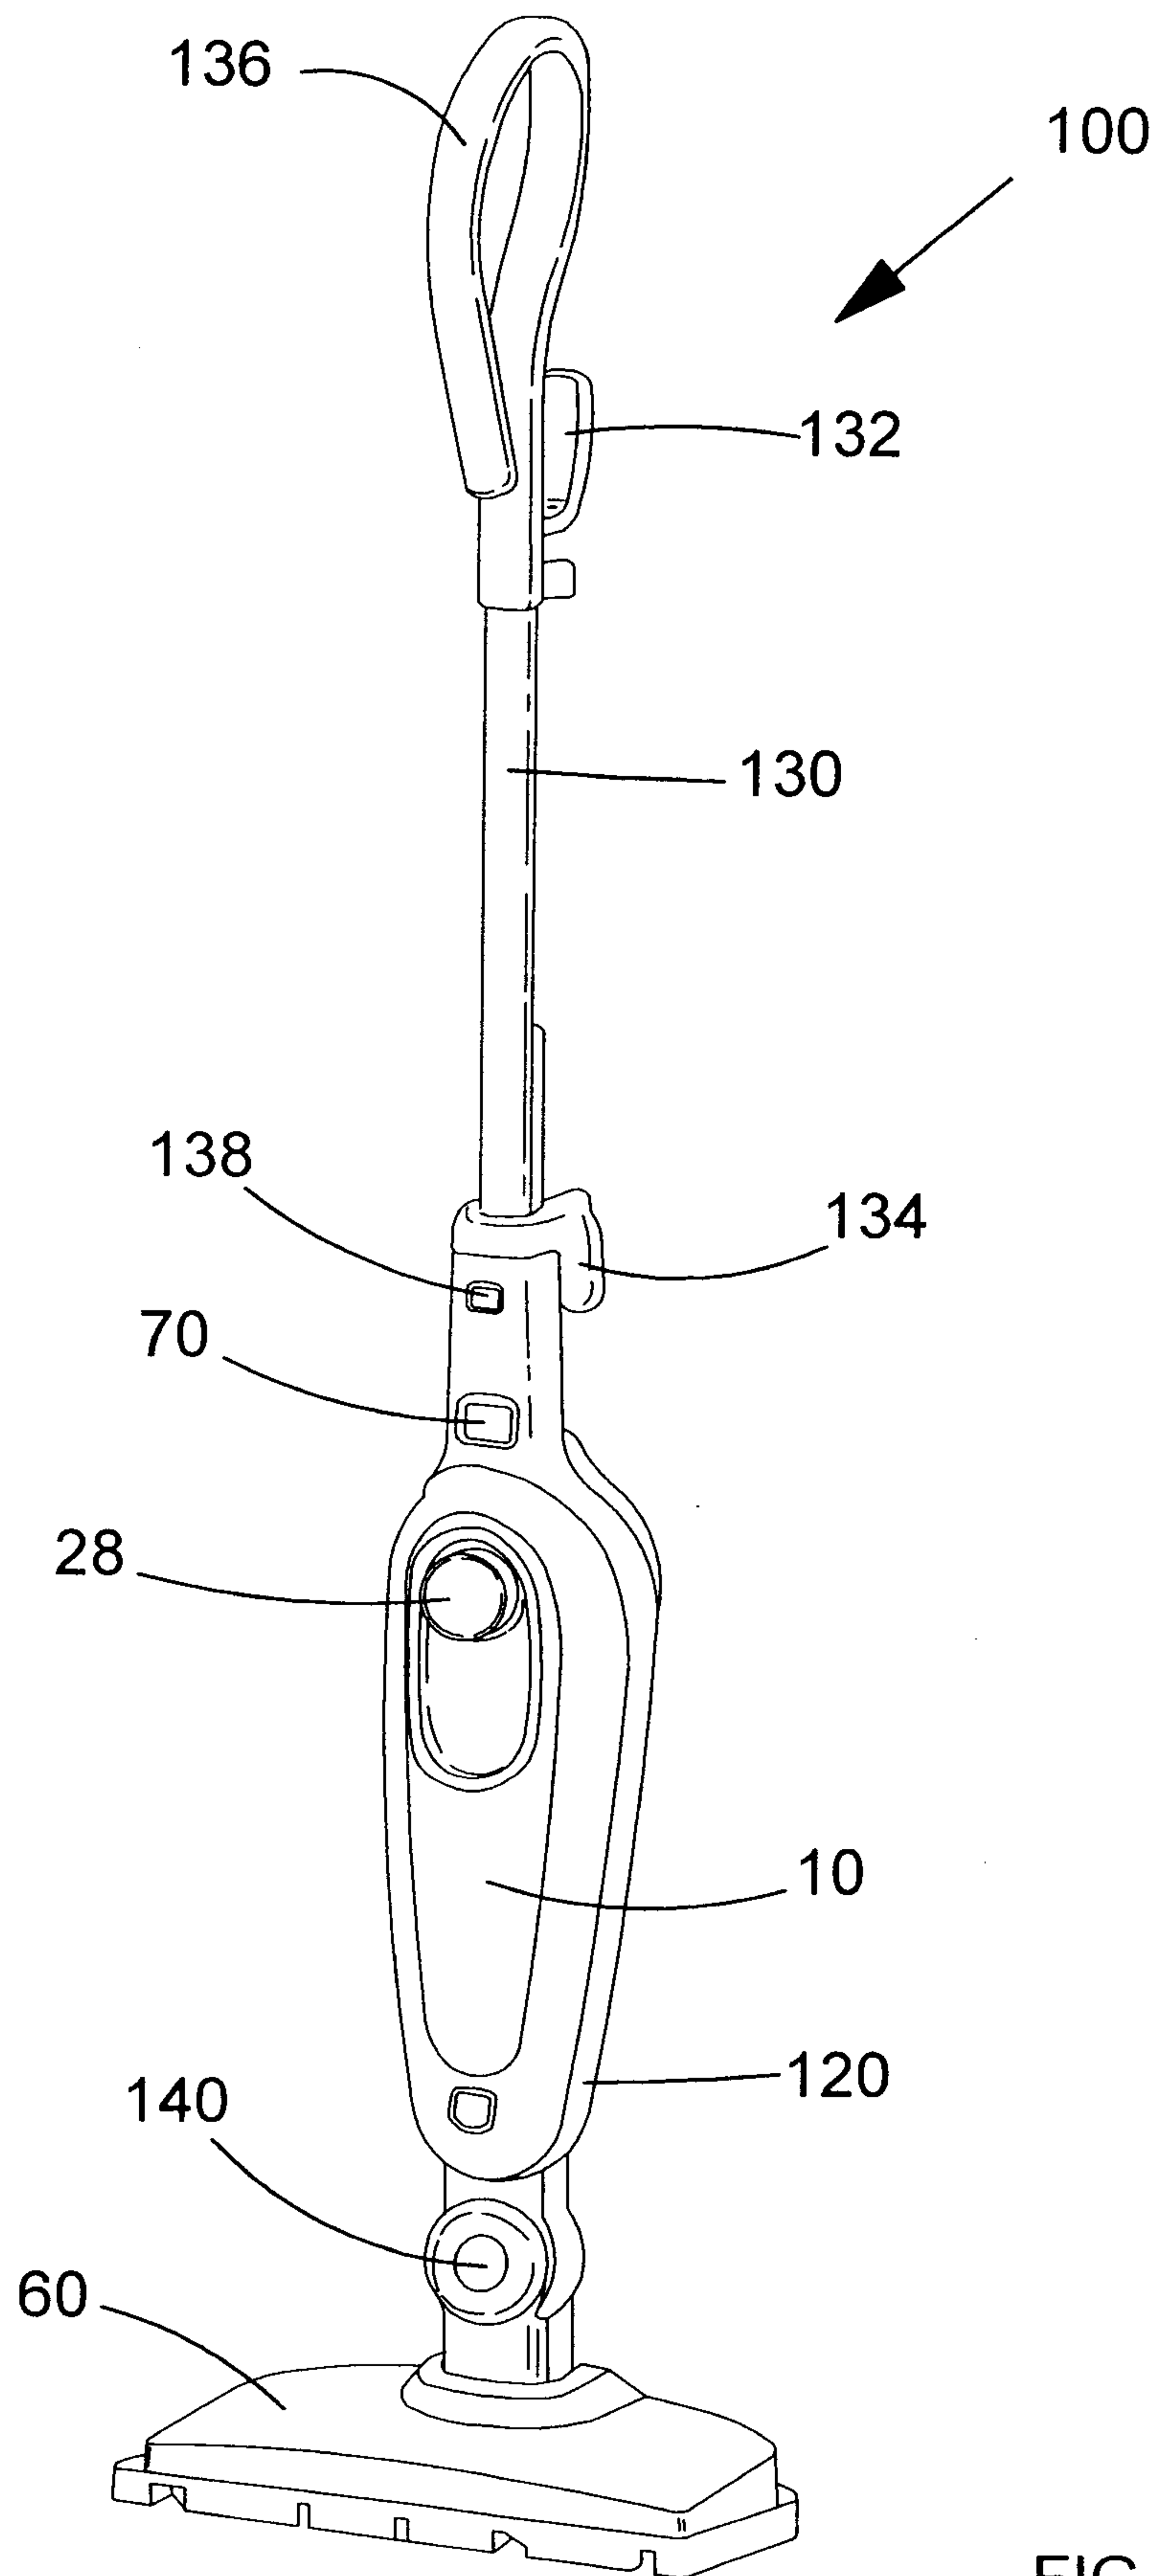


FIG.1

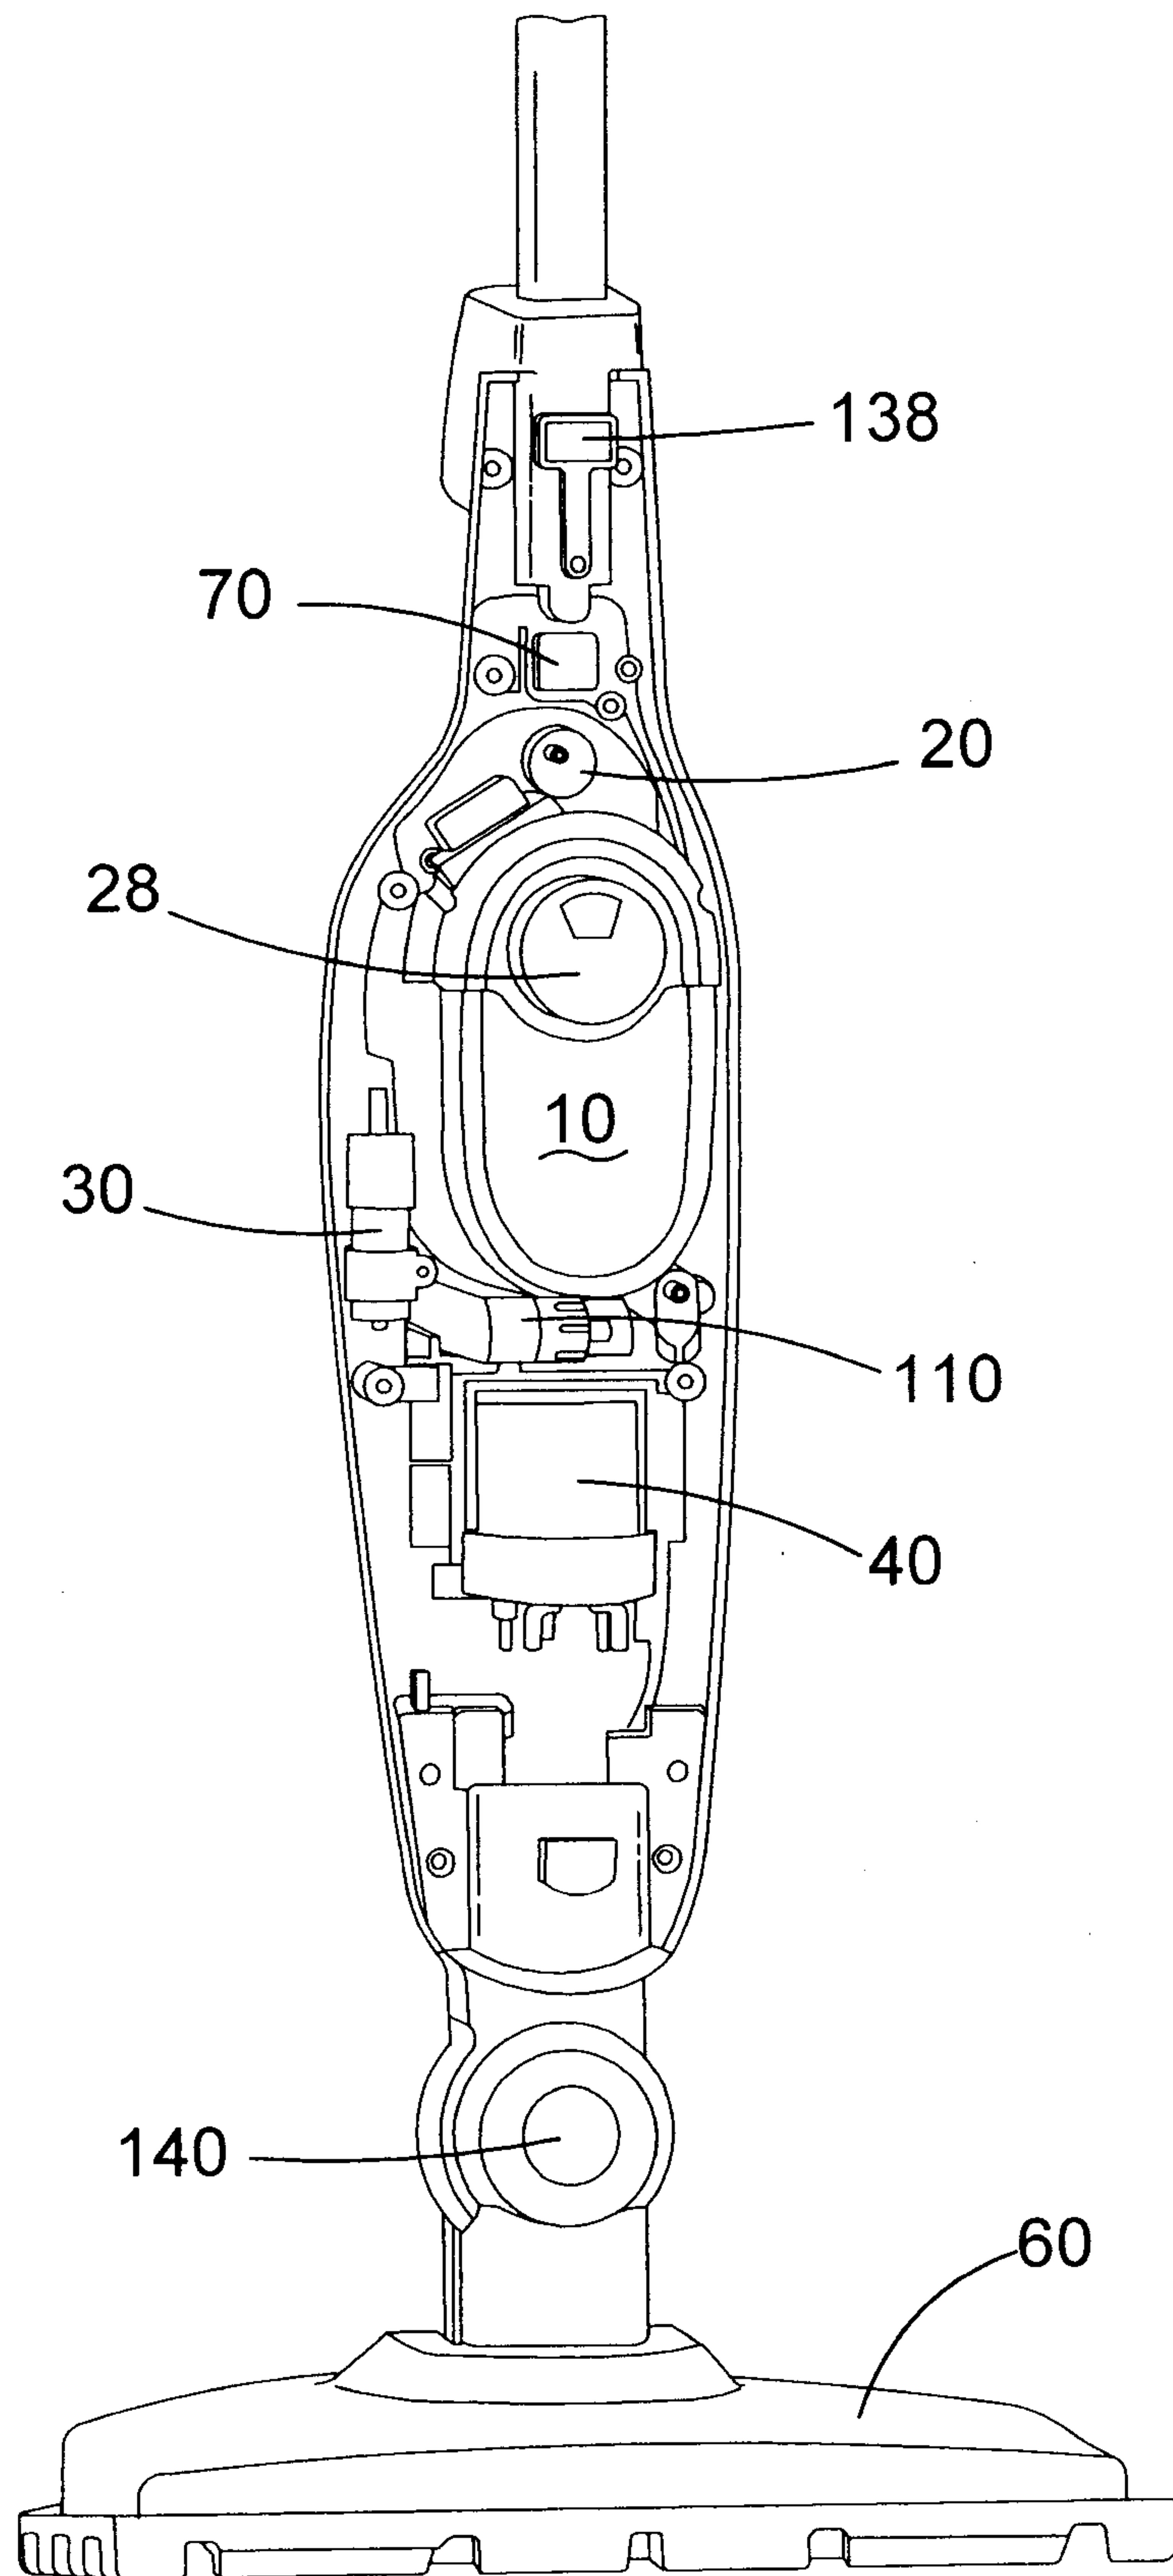
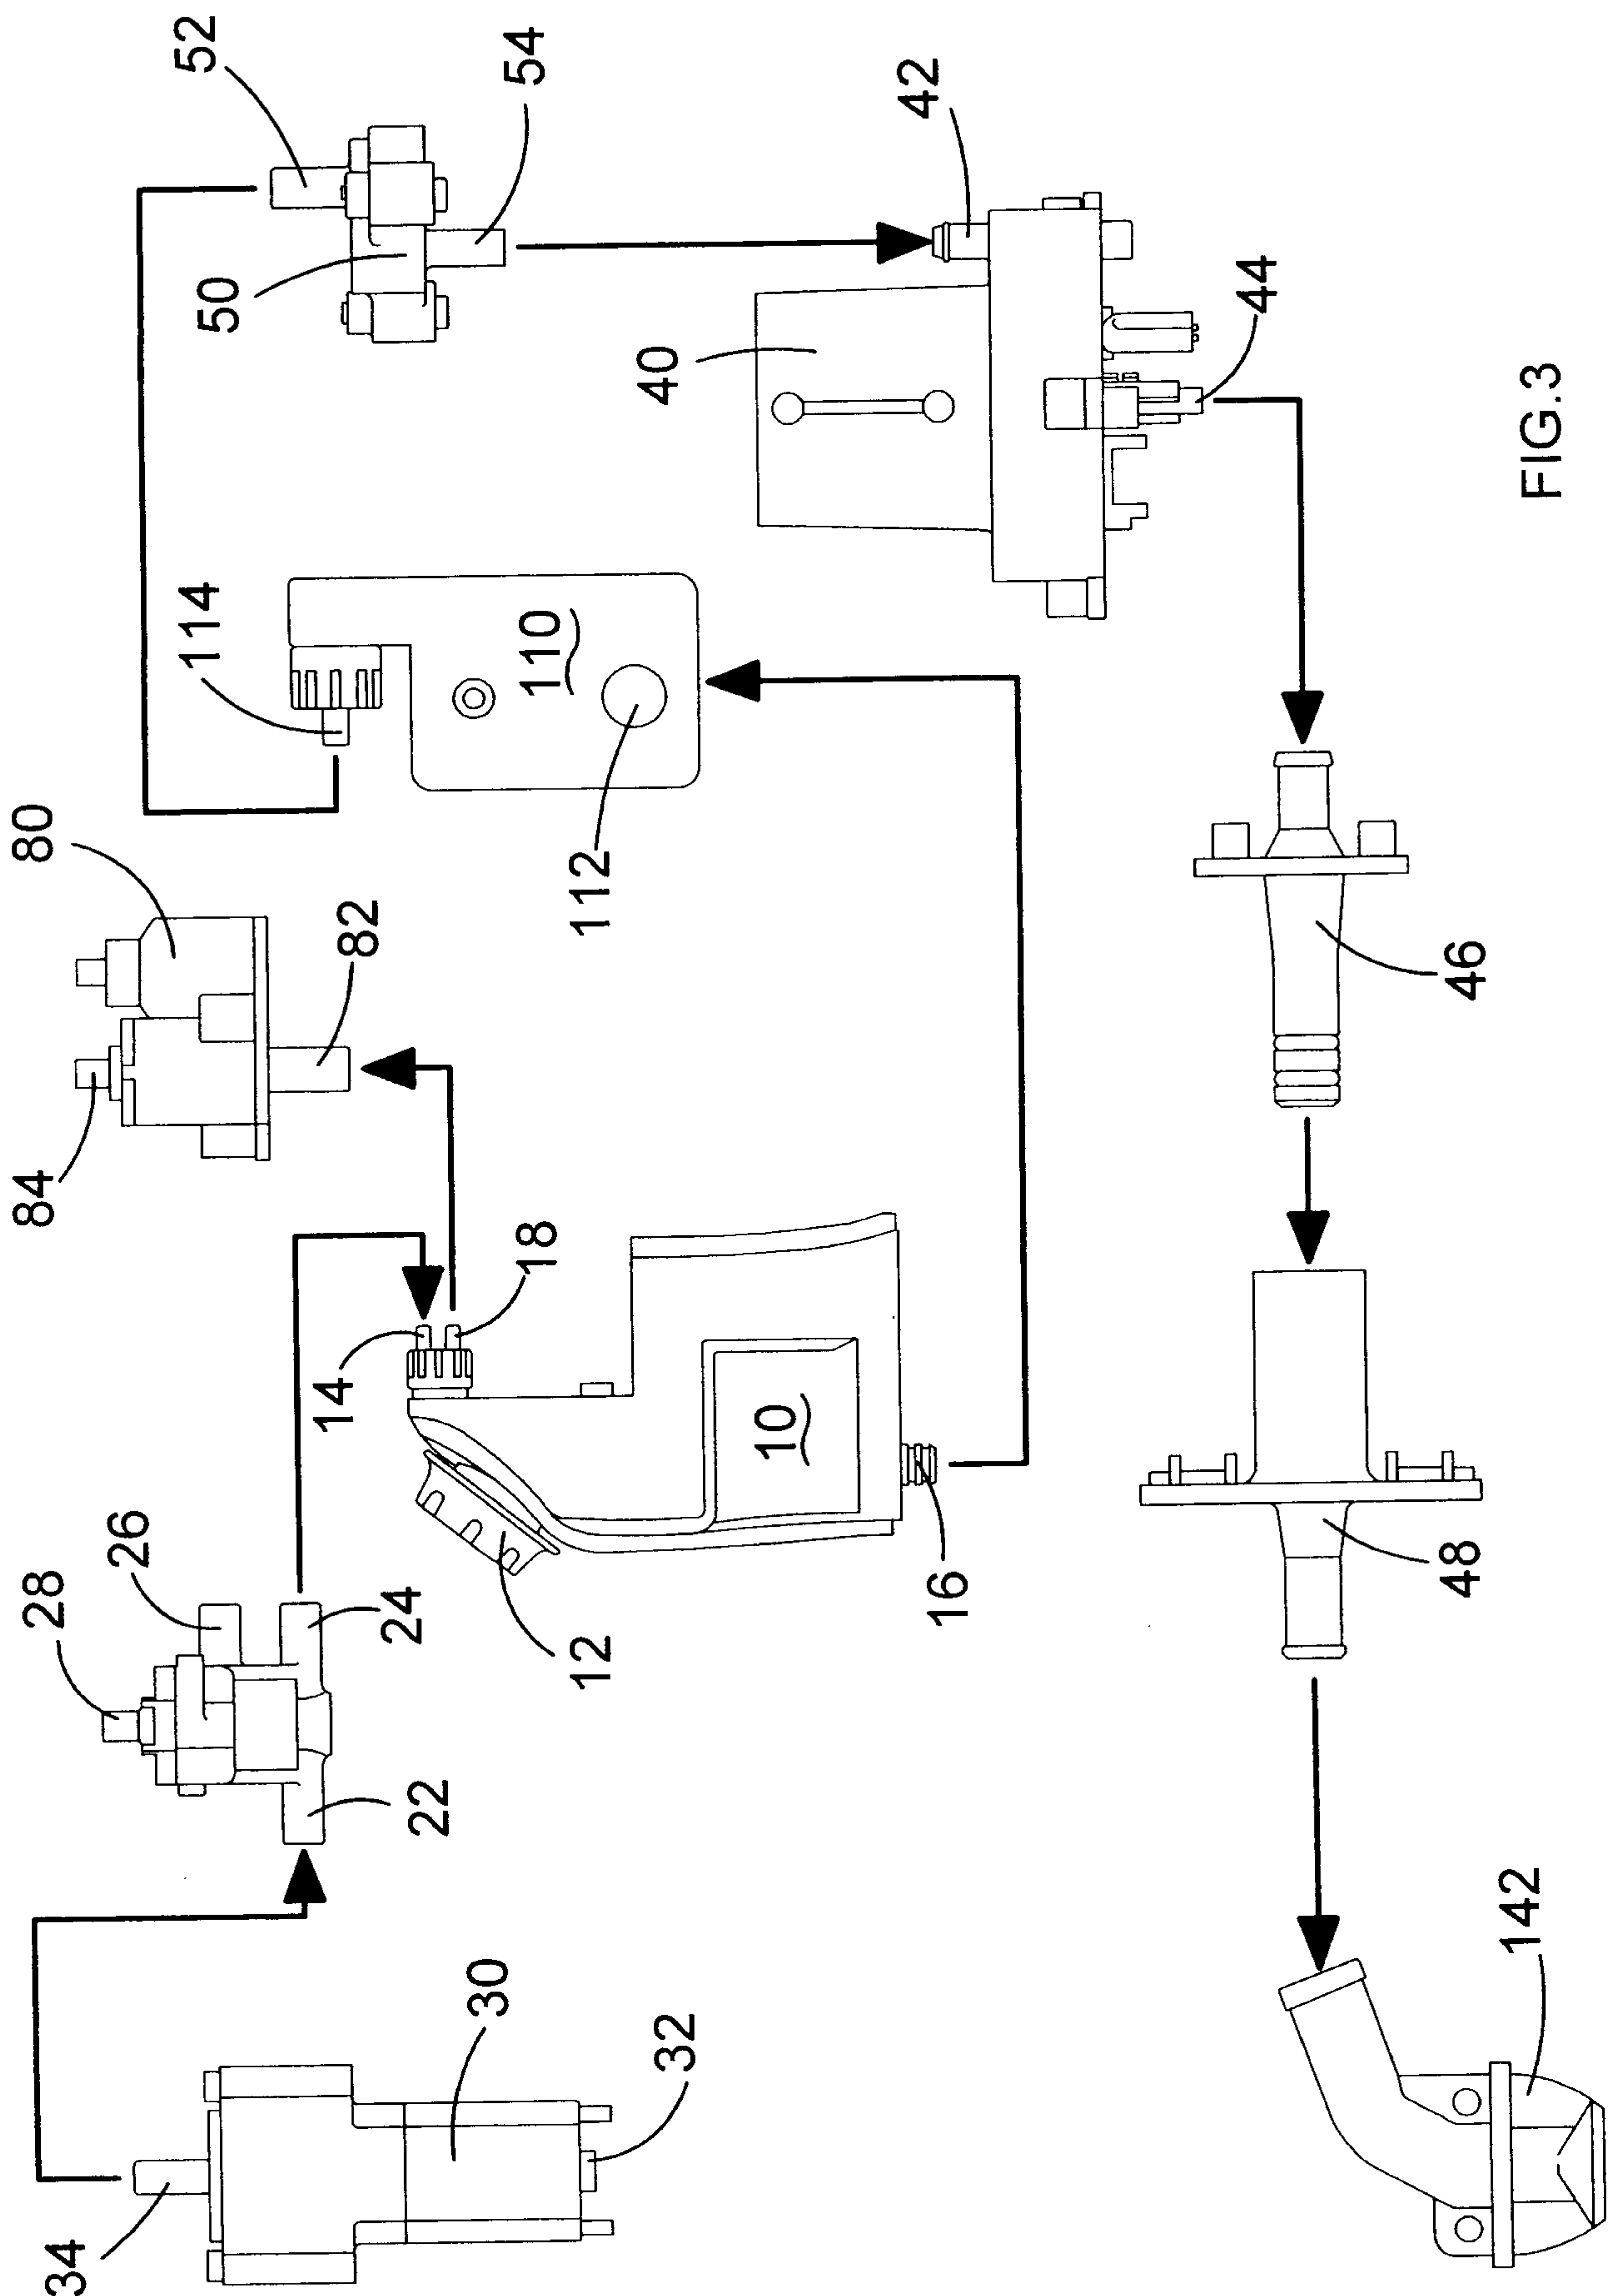


FIG.2



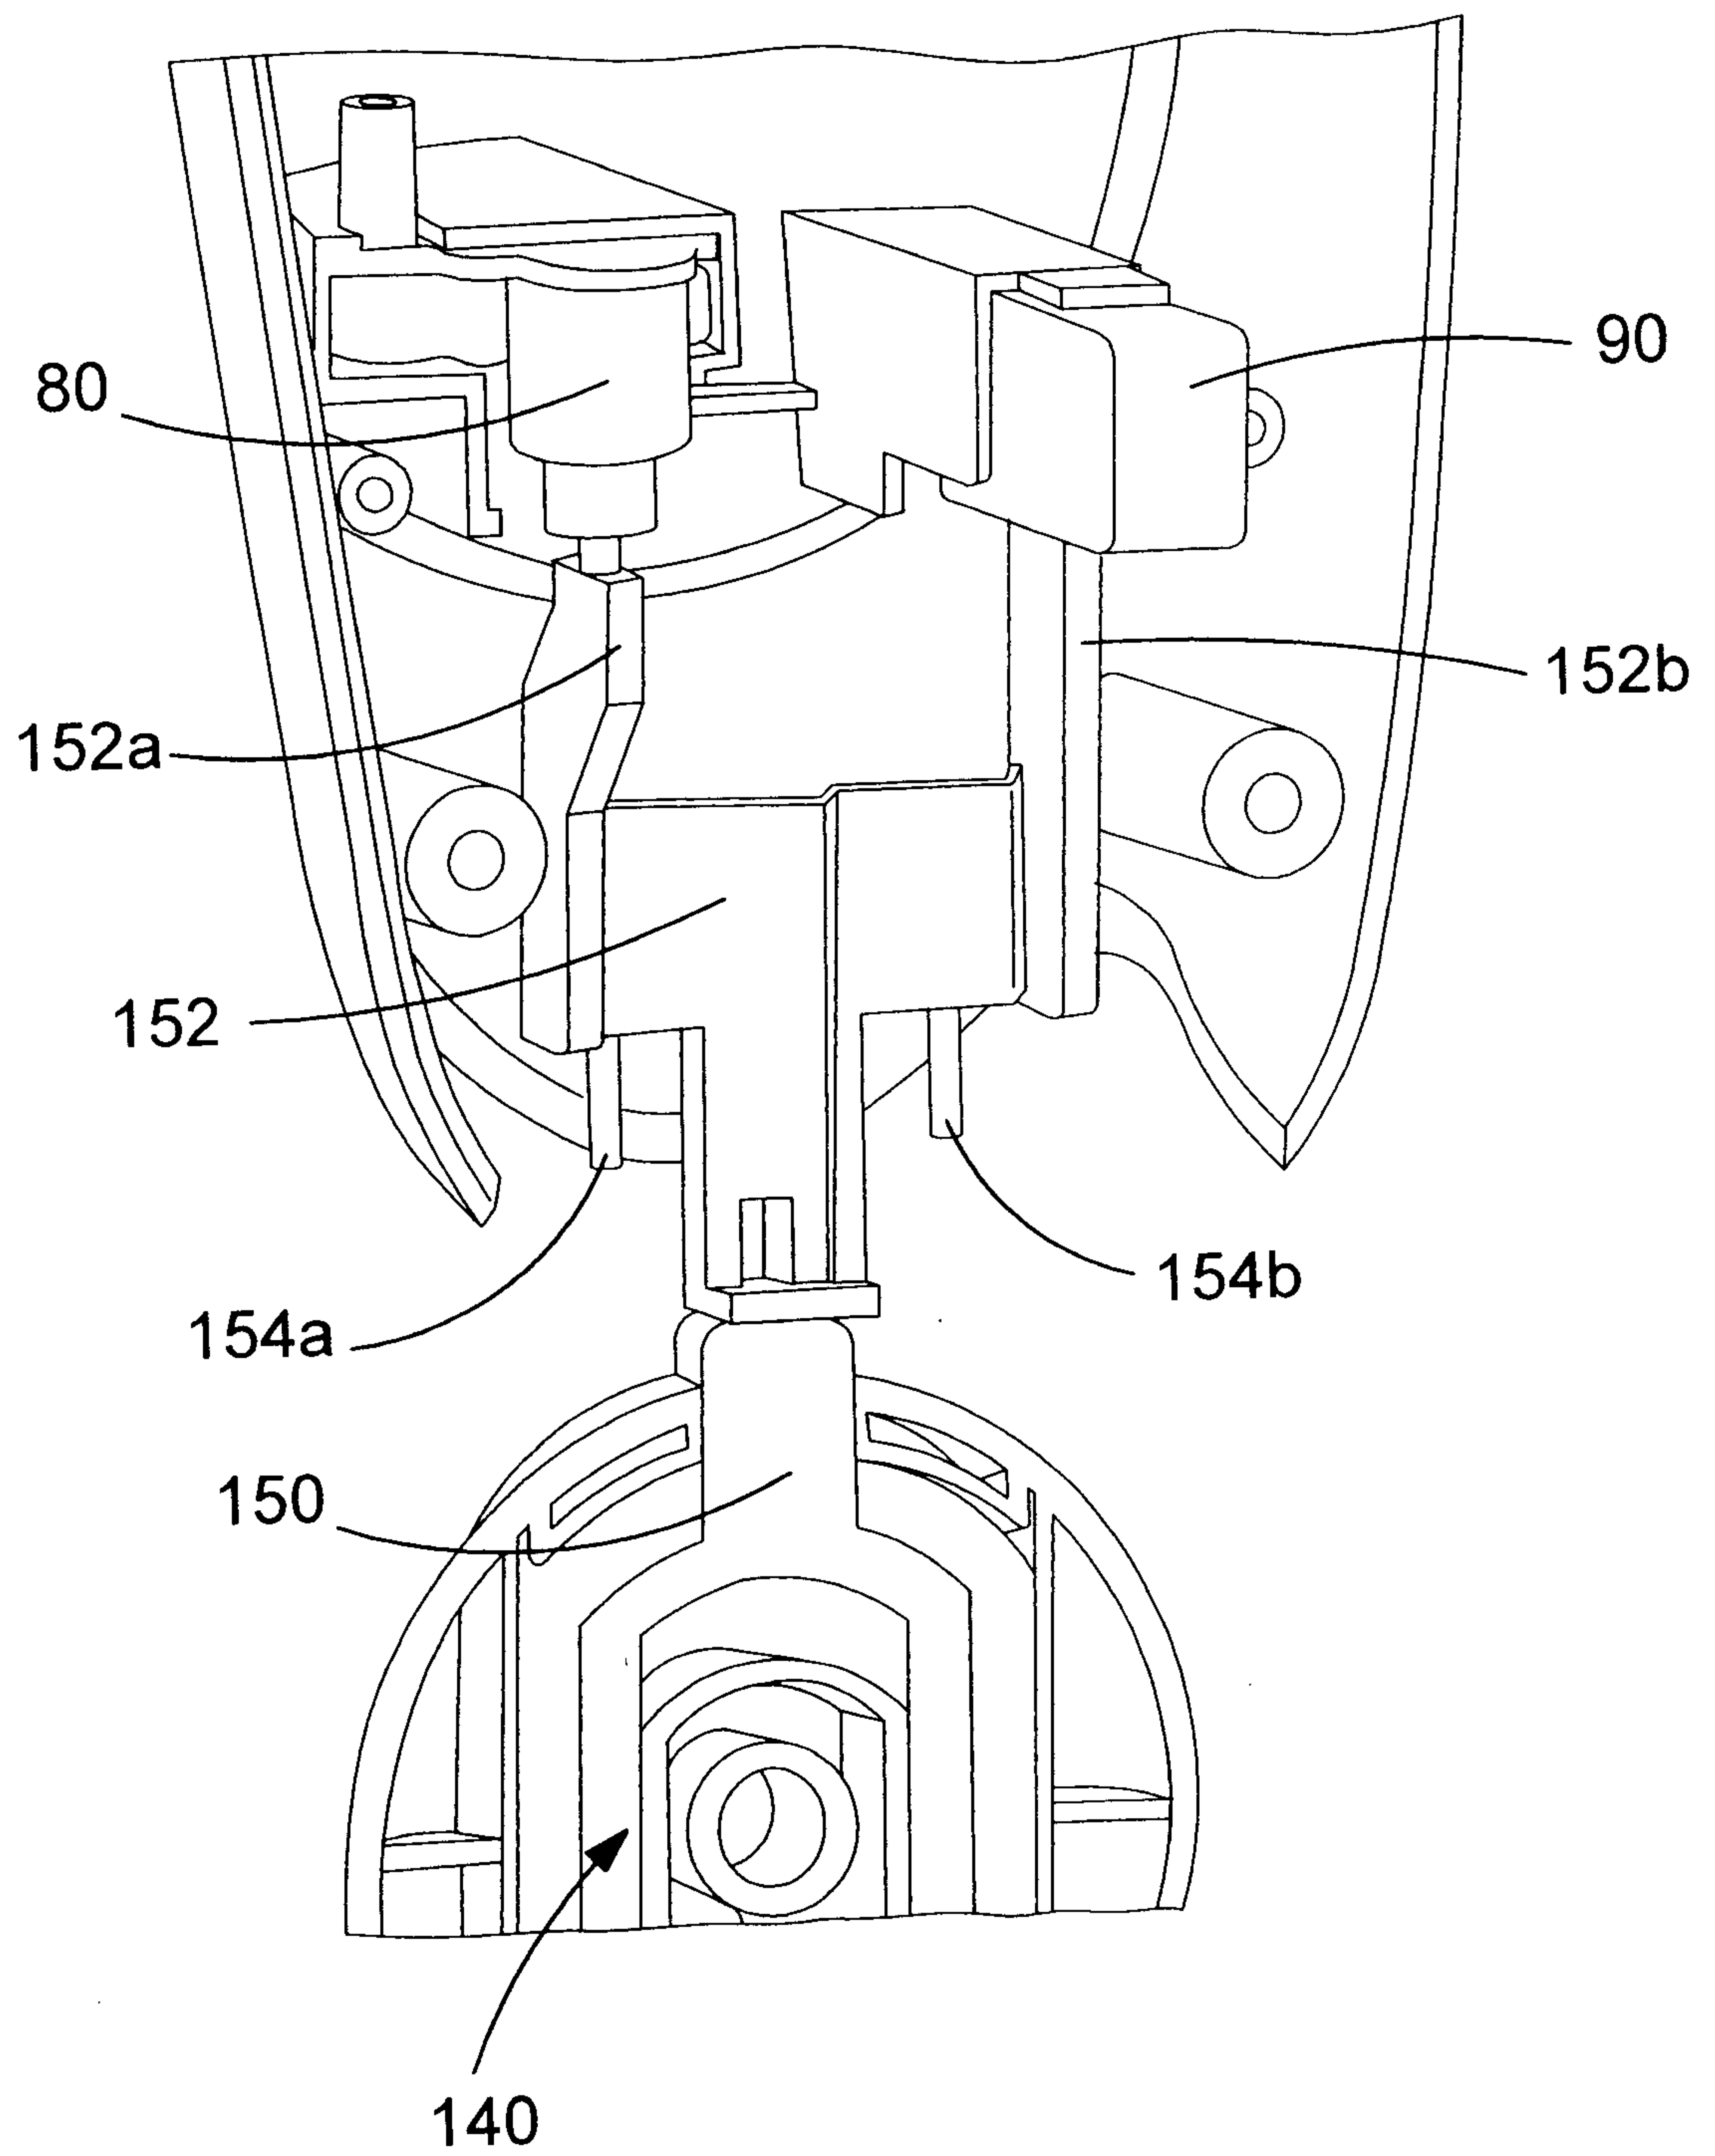


FIG.4

