



(51) International Patent Classification:

H01L 21/677 (2006.01) H01L 21/67 (2006.01)

(21) International Application Number:

PCT/US2018/012413

(22) International Filing Date:

04 January 2018 (04.01.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/426,037 06 February 2017 (06.02.2017) US

(71) Applicant: **APPLIED MATERIALS, INC.** [US/US];
3050 Bowers Avenue, Santa Clara, California 95054 (US).

(72) Inventor: **BLAHNIK, David T.**; 2802 Quannah Drive,
Round Rock, Texas 78681 (US).

(74) Agent: **DUGAN, Brian M.** et al.; Dugan & Dugan, PC,
245 Saw Mill River Road, Suite 309, Hawthorne, New York
10532 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,


KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEMS, APPARATUS, AND METHODS FOR A LOAD PORT DOOR OPENER

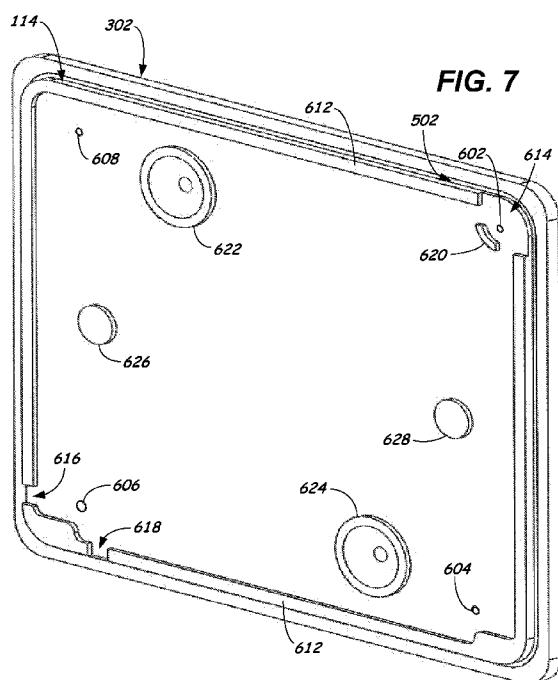

(57) Abstract: Embodiments provide systems, apparatus, and methods for an improved load port operable to purge air trapped between the substrate carrier door and the carrier door opener. Embodiments include a docking tray adapted to receive a substrate carrier including a carrier door; a door opener adjacent the docking tray and adapted to couple to the carrier door and to open the carrier door, wherein the door opener includes a purge gas inlet port; at least one exhaust outlet port, and a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier, wherein the ridge wall includes openings proximate the ports and wherein the door opener further includes a diverter structure disposed to direct purge gas from the inlet port to at least one of the openings in the ridge wall. Numerous additional aspects are disclosed.



**SYSTEMS, APPARATUS, AND METHODS FOR A
LOAD PORT DOOR OPENER**

RELATED APPLICATION

[001] This application claims priority from U.S. Non-Provisional Patent Application No. 15/426,037, filed February 6, 2017, and entitled "SYSTEMS, APPARATUS, AND METHODS FOR A LOAD PORT DOOR OPENER" (Attorney Docket No. 24696/USA), which is hereby incorporated herein by reference in its entirety for all purposes.

FIELD

[002] The present application relates to electronic device manufacturing systems, and more specifically to systems, apparatus, and methods for a load port door opener.

BACKGROUND

[003] Equipment front end modules (EFEMs), sometimes referred to as factory interfaces (FIs), provide a non-reactive environment for transferring substrates from carriers to processing tools. This is achieved by sealing the interior volume of the EFEM as much as is practical and flooding the interior volume with a gas such as nitrogen that is non-reactive with substrate materials. The non-reactive gas forces out any reactive gases such as oxygen from the EFEM. A load port for docking a substrate carrier attaches to the front face of an EFEM. The load port includes a door opener for removing a door from the substrate carrier docked on the load port. Air trapped between the door opener and the carrier door can seep into the EFEM and potentially contaminate substrates. However, using prior art methods and apparatus, it can be difficult, time consuming, and/or expensive to adequately purge the trapped air. Thus, what are

needed are systems, apparatus, and methods for a load port door opener that facilitates purging trapped air.

SUMMARY

[004] In some embodiments, an improved load port operable to purge air trapped between the substrate carrier door and the carrier door opener is provided. Embodiments include a docking tray adapted to receive a substrate carrier including a carrier door; a door opener adjacent the docking tray and adapted to couple to the carrier door and to open the carrier door, wherein the door opener includes a purge gas inlet port; at least one exhaust outlet port, and a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier, wherein the ridge wall includes openings proximate the ports and wherein the door opener further includes a diverter structure disposed to direct purge gas from the inlet port to at least one of the openings in the ridge wall.

[005] In some other embodiments, a load port door opener is provided. The load port door opener includes a purge gas inlet port; at least one exhaust outlet port, and a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier, wherein the ridge wall includes openings proximate the ports and wherein the door opener further includes a diverter structure disposed to direct purge gas from the inlet port to at least one of the openings in the ridge wall.

[006] In yet other embodiments, a method of purging air from a volume between a load port door opener and a substrate carrier door is provided. The method includes providing a load port including a door opener with a purge gas inlet port, at least one exhaust outlet port, and a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier, the ridge wall having openings proximate the ports; docking a substrate carrier against the door opener,

entrapping air in a volume there between including the perimeter channel; injecting purge gas into the volume via the purge gas inlet port; directing the purge gas into the perimeter channel via an opening in the ridge wall proximate the purge gas inlet port; and exhausting the air and the purge gas out of the volume via the at least one exhaust outlet port.

[007] Still other features, aspects, and advantages of embodiments will become more fully apparent from the following detailed description, the appended claims, and the accompanying drawings by illustrating a number of example embodiments and implementations. Embodiments may also be capable of other and different applications, and its several details may be modified in various respects, all without departing from the scope of the disclosed embodiments. Accordingly, the drawings and descriptions are to be regarded as illustrative in nature, and not as restrictive. The drawings are not necessarily drawn to scale.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 illustrates a block diagram depicting an example of an electronic device processing system according to some embodiments.

[0009] FIG. 2 illustrates a front isometric view diagram depicting an example load port according to some embodiments.

[0010] FIG. 3 illustrates an isometric view diagram depicting an example substrate carrier according to some embodiments.

[0011] FIG. 4 illustrates an isometric view diagram depicting an example substrate carrier door against a cross-sectioned portion of a load port door opener according to some embodiments.

[0012] FIG. 5 illustrates a cross-sectional view diagram depicting an interface between a substrate carrier door and a door opener of load port according to some embodiments.

[0013] FIG. 6 illustrates a plan view diagram depicting details of a portion of a load port door opener according to some embodiments.

[0014] FIG. 7 illustrates an isometric view diagram depicting details of a portion of a load port door opener according to some embodiments.

[0015] FIG. 8 illustrates a plan view wire frame diagram depicting details of gas flow between a substrate carrier door and a load port door opener according to some embodiments.

[0016] FIG. 9 illustrates an isometric view wire frame diagram depicting details of gas flow between a substrate carrier door and a load port door opener according to some embodiments.

[0017] FIG. 10 illustrates a flowchart illustrating an example method according to some embodiments.

[0018] FIGs. 11 and 12 illustrate graphs depicting the relative difference in time and purge gas consumption of prior art systems and methods versus embodiments disclosed herein.

DETAILED DESCRIPTION

[0019] As substrate (e.g., silicon wafer) processing technologies improve to higher resolutions with smaller feature dimensions, contamination from particles, moisture, and reactive gasses (e.g., oxygen (O_2)) become more problematic. An equipment front end module (EFEM) (sometimes referred to as a factory interface (FI)) of an electronic device manufacturing system aims to create a relatively inert (i.e., non-reactive) environment for substrates that prevents contamination of the substrates by using a non-reactive gas such as nitrogen (N_2) to force out all other gases (e.g., O_2), moisture, and other particles.

[0020] The EFEM interfaces with load ports (LPs) which facilitate the delivery of substrates from inside a substrate carrier (e.g., a front opening unified pod (FOUP)) to the rest of the system. However, prior art methods of purging the air (e.g., including O_2) out of the substrate carrier and the LP interface of the EFEM do not allow for certain trapped volumes of air to be purged or replaced with N_2 . This unpurged volume of air then contaminates the non-reactive environment, and results in having to use a relatively large amount of N_2 flow and time to reduce O_2 PPM concentrations back down to an acceptable level. High purity N_2 is expensive, and with some EFEMs having multiple LPs and a high throughput level, O_2 is introduced into prior art systems relatively rapidly and is handled with a relative high rate of purging and therefore, at a relatively high cost.

[0021] Further, not only is the cost of prior art methods relatively high due to the excessive use of consumables, but the risk of substrate contamination and downtime are significantly increased using prior art methods. Embodiments disclosed herein provide systems, methods, and apparatus to remove these volumes of trapped air in a simple and cost

effective manner while enabling a higher purity (e.g., a higher level of non-reactiveness) EFEM.

[0022] Embodiments provide systems, methods, and apparatus to purge trapped air volumes (1) in a perimeter channel between the edge of the substrate carrier door and the outer wall of the substrate carrier and (2) between the substrate carrier door and the LP door opener. According to embodiments, nitrogen gas is injected through a purge gas inlet port in the LP door opener and exhausted through three exhaust gas outlet ports in the LP door opener. The ports are located in the corners of the LP door opener. Due to various ridge walls and other structures, the contact face between the carrier door and a prior art LP door opener creates an area of high gas flow resistance wherein an effective flow cannot be developed across the volume to be purged to remove trapped air. By disposing the inlet and outlet ports in the corners of the LP door opener and creating openings into and out of the channel around the perimeter of the substrate carrier door, embodiments allow for the trapped air in the perimeter channel to be purged along with the air in the volume between the carrier door and the LP door opener.

[0023] In some embodiments, the openings into and out of the channel are formed by removing selected portions of the ridge walls on the contact face of the LP door opener to allow N₂ flow into, through, and out of the perimeter channel. Sections of the ridge walls are removed proximate to the purge gas inlet port and proximate to one of the three exhaust gas outlet ports located at a corner diagonally opposite of the inlet port. Further, N₂ flow is partially directed toward the ridge wall opening proximate the inlet port through the use of a diverter structure. The diverter structure partially surrounds the injection inlet port and creates an area of high pressure that pushes the N₂ into regions to be purged.

[0024] In operation, N₂ flows around the perimeter of the substrate carrier door, purging the air/oxygen, as the N₂ makes its way to the low pressure exhaust outlet port. Embodiments provide a balancing of the port sizes and openings in the ridge walls, as well as the port locations, ridge wall opening locations, and diverter structure locations and geometry to optimize the purging of trapped gas in the minimum time using the minimum amount of purge gas. The removal of this volume of trapped air enables efficient and cost-effective achievement of O₂ PPM concentration targets for ultra-high purity N₂ environment applications. Note that what constitutes an "ultra-high purity N₂ environment" is dependent on the operator and the volume of the EFEM environment in conjunction with the size and shape of the substrate carrier used. For example, ultra-high purity can be approximately 1 PPM to approximately 3 PPM O₂ in some applications and less than 1 PPM for others. The prior art alternative where any air that is not purged is allowed to enter the EFEM's N₂ non-reactive environment increases the O₂ concentration and contaminates the environment. Because this O₂ becomes diluted by N₂ in a relatively large volume, it will take an amount of time approximately defined by the equation

$$T_{\text{purge}} = (V/Q) * \ln(C_{\text{init}}/C_{\text{final}})$$

where V represents the volume of the EFEM, Q represents the N₂ purge rate to rid the contamination, C_{init} represents the initial O₂ PPM concentration, and C_{final} represents the resulting target O₂ PPM concentration. From this relationship, the benefit of using a relatively small amount of N₂ (before the O₂ is allowed into the EFEM) to purge the volume of trapped air is clear. From the above equation, relatively large amounts of N₂ flow and time would be expended to rid the same

volume of O₂ once it has been diluted in the much larger volume of the EFEM.

[0025] Turning to FIG. 1, a block diagram of an example electronic device processing system 100 according to some embodiments is shown. The system 100 includes a substrate processing tool 102 coupled to an EFEM 104. The EFEM 104 is coupled to a backplane 106 of a load port 108. A docking tray 110 of the load port 108 is adapted to support a substrate carrier 112 which can be opened by a door opener 114 of the load port 108. FIG. 2 depicts an isometric view of the load port 108 without a substrate carrier present. The contact face of the door opener 114 can be seen facing the docking tray 110 and framed by the backplane 106. FIG. 3 depicts an isometric view of a substrate carrier 112 including a carrier door 302 adapted to be docked against the door opener 114 of FIG. 2. FIG. 4 depicts an isometric inside view of the substrate carrier door 302 (without the remainder of the substrate carrier 112) positioned against a cross-sectioned (along line A--A) portion of the load port door opener 114. FIG. 5 is a magnified detailed cross-section view of a portion of the interface between the substrate carrier door 302 and the door opener 114 taken along line A--A in FIG. 4. Note the volumes such as (1) perimeter channel 502 and (2) the gap 508 between the carrier door 302 and the door opener 114 where air (including O₂) gets trapped when the substrate carrier 112 is docked on the load port 108. Ridge wall 504 of the door opener 114 contacts the surface of the carrier door 302 forming the volume (*i.e.*, perimeter channel 502) defined by the carrier door 302, the ridge wall 504, and the outer wall 506 of the substrate carrier 112. Gap 508 is a volume defined by the major surface of the door opener 114, the major surface of the carrier door 302, and is surrounded on the edges by the ridge wall 504.

[0026] Turning now to FIGs. 6 and 7, detailed plan and isometric views respectively of an example door opener 114 of a load port 108 according to embodiments are depicted. The door opener 114 is shown in contact with a substrate carrier door 302. The door opener 114 includes a purge gas inlet port 602, and three exhaust gas outlet ports 604, 606, 608, each port disposed in a different corner of the door opener 114. The perimeter of the door opener 114 includes a ridge wall 504 that includes three openings 614, 616, 618. To facilitate enhanced flow that effectively purges the air in the perimeter channel 502 and between the major surface of the door opener 114 and the carrier door 302, the openings are located in diagonally opposite corners as shown. A diverter structure 620 proximate to the purge gas inlet port 602 can be shaped like a crescent or arc-shaped and disposed to direct flow toward opening 614 in the ridge wall 504 so that gas is pushed into the perimeter channel 502. Other shapes can be used. The diverter structure 620 also helps improve the flow around other structures on the door opener 114 such as carrier door securing features 622, 624 and carrier door latch key locations 626, 628.

[0027] FIGs. 8 and 9 are wire frame drawings corresponding to FIGs. 6 and 7 respectively, and illustrating an example flow pattern produced by the arrangement of ports 602, 604, 606, 608 and ridge wall openings 614, 616, 618. The multitude of the arrows 802 represents gas flow. The effect of the diverter structure 620 is illustrated by the flow from the purge gas inlet port 602 through ridge wall opening 614 into the perimeter channel 502. The gases are pushed into the perimeter channel 502 by high pressure and pulled out of the perimeter channel 502 by low pressure from the exhaust gas outlet port 606 at the opposite corner of the door opener 114.

[0028] In some embodiments, the total volume to be purged between the door opener 114 and the carrier door 302 is in the

range of approximately 0.1 L to approximately 0.2 L. The rate at which the purge gas (e.g., N₂) is injected into the volume via the purge gas inlet port 602 is in the range of approximately 1.0 LPM to approximately 10.0 LPM. The rate of flow out of each of the exhaust gas outlet ports 604, 606, 608 is in the range of approximately 0.1 LPM to approximately 10.0 LPM. In some embodiments, the time it takes to purge the volume for a load port designed to accommodate substrate carriers capable of holding 13 to 25 substrates is in the range of approximately 5 seconds to approximately 1.5 minutes. In some embodiments, the diameter of the purge gas inlet port 602 is in the range of approximately 0.125 inches to approximately 0.5 inches. In some embodiments, the size of the openings in the ridge wall is in the range of approximately 0.15 inches to approximately 2.0 inches. In some embodiments, the width and depth of the perimeter channel is in the range of approximately 0.1 inches to approximately 1.5 inches. Other rates, sizes, dimensions, times, and values are possible.

[0029] Turning now to FIG. 10, a flowchart depicting an example method 1000 of purging a volume between a load port door opener and a substrate carrier door is depicted. A load port including a door opener with a purge gas inlet port, at least one exhaust outlet port, a diverter structure, and a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier is provided wherein the ridge wall includes openings proximate the ports (1002). Dock a substrate carrier against the door opener, entrapping air in a volume there between including the perimeter channel (1004). Purge gas (e.g., N₂) is then injected into the volume via the purge gas inlet port (1006). The purge gas is directed into the perimeter channel via the opening in the ridge wall proximate the purge gas inlet port by the diverter structure

(1008). The air and purge gas are exhausted out of the volume via the at least one exhaust outlet port (1010).

[0030] The following example calculation is provided to illustrate the benefit of embodiments of the disclosed system over prior art methods and apparatus. Consider a system with three load ports, each with a 0.13 L volume of trapped air to be purged from between the load port door opener and a substrate carrier door. The example system includes an EFEM with a volume of 1700 L.

EFEM volume:

$$V_{FI} := 1700L$$

$$n_{Tot_FI} := \frac{(P \cdot V_{FI})}{R_u \cdot T_{amb}} = 69.571 \text{ mol} \quad \text{Total moles}$$

Trapped air volume:

$$V_{space} := .13L$$

$$n_{space} := \frac{.209 \cdot 3(P \cdot V_{space})}{R_u \cdot T_{amb}} = 3.336 \times 10^{-3} \text{ mol} \quad \text{Moles of O}_2 \text{ in 3X unpurged volume of .13L}$$

$$ppmFI_withspace := \frac{n_{space}}{n_{Tot_FI}} = 47.947 \text{ ppm} \quad \text{PPM effect of O}_2 \text{ from unpurged space}$$

Using the prior art method of handling O₂ contamination by purging out the entire EFEM volume after letting the trapped air seep into the EFEM, to reduce the 47.947 PPM of O₂ from the EFEM volume down to 10 PPM, either 150 LPM of N₂ can be injected for 0.3 hours, for example, which is 2700 L of N₂, or 1000 LPM can be injected for 0.05 hours which is 3000 L of N₂. The relationship between flow rate and time to purge the example EFEM volume is depicted in graph 1100 of FIG. 11. Even assuming perfect diffusion, the variation of purge rate

and time is affected by a logarithmic relationship. However, the diffusion is not going to be perfect, so the above calculations and graph 1100 represent best case consumption scenarios.

[0031] Next consider using the methods and apparatus of embodiments disclosed herein. To remove 0.13 L of air from between each of three substrate carrier doors and carrier door openers of three load ports, only 5 LPM of N₂ is injected into each concurrently for 0.005 hours which is only 1.5 L of N₂ for each load port. The trapped volume of 0.13 L is at a 209,000 PPM O₂ starting concentration (which is the O₂ concentration in standard ATM air). The relationship between flow rate and time to purge the example trapped volume of air is depicted in graph 1200 of FIG. 12. Thus, to eliminate the same volume of oxygen using the methods and apparatus of the present embodiments, a fraction of the time is used and the cost is 99.95% less by purging before the O₂ is allowed to seep into the EFEM.

[0032] Numerous embodiments are described in this disclosure, and are presented for illustrative purposes only. The described embodiments are not, and are not intended to be, limiting in any sense. The presently disclosed embodiments are widely applicable to numerous other embodiments, as is readily apparent from the disclosure. One of ordinary skill in the art will recognize that the disclosed embodiments may be practiced with various modifications and alterations, such as structural, logical, software, and electrical modifications. Although particular features of the disclosed embodiments may be described with reference to one or more particular embodiments and/or drawings, it should be understood that such features are not limited to usage in the one or more particular embodiments or drawings with reference to which they are described, unless expressly specified otherwise.

[0033] The present disclosure is neither a literal description of all embodiments nor a listing of features of the embodiments that must be present in all embodiments. The present disclosure provides, to one of ordinary skill in the art, an enabling description of several embodiments. Some of these embodiments may not be claimed in the present application, but may nevertheless be claimed in one or more continuing applications that claim the benefit of priority of the present application.

[0034] The foregoing description discloses only example embodiments. Modifications of the above-disclosed apparatus, systems and methods which fall within the scope of the claims will be readily apparent to those of ordinary skill in the art. Accordingly, while the embodiments have been disclosed in connection with examples thereof, it should be understood that other embodiments may fall within the intended spirit and scope, as defined by the following claims.

CLAIMS

WHAT IS CLAIMED IS:

1. A load port system, comprising:
 - a docking tray adapted to receive a substrate carrier including a carrier door;
 - a door opener adjacent the docking tray and adapted to couple to the carrier door and to open the carrier door, wherein the door opener includes:
 - a purge gas inlet port;
 - at least one exhaust outlet port, and
 - a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier, wherein the ridge wall includes openings proximate the ports.
2. The load port system of claim 1 wherein the door opener further includes a diverter structure disposed to direct purge gas from the purge gas inlet port to at least one of the openings in the ridge wall.
3. The load port system of claim 2 wherein the diverter structure is a crescent shape.
4. The load port system of claim 2 wherein the diverter structure, the purge gas inlet port, the at least one exhaust outlet port, and the openings in the ridge wall are positioned and sized to create a flow through the perimeter channel.
5. The load port system of claim 1 wherein the door opener includes three exhaust outlet ports.

6. The load port system of claim 5 wherein the purge gas inlet port and the three exhaust outlet ports are each in a different corner of the door opener.
7. The load port system of claim 1 wherein the purge gas inlet port and the exhaust outlet port are disposed in diagonally opposite corners of the door opener.
8. A load port door opener, comprising:
a purge gas inlet port;
at least one exhaust outlet port, and
a ridge wall defining a perimeter channel when coupled to a substrate carrier, wherein the ridge wall includes openings proximate the ports.
9. The load port door opener of claim 8 wherein the load port door opener further includes a diverter structure disposed to direct purge gas from the purge gas inlet port to at least one of the openings in the ridge wall.
10. The load port door opener of claim 9 wherein the diverter structure is a crescent shape.
11. The load port door opener of claim 9 wherein the diverter structure, the purge gas inlet port, the at least one exhaust outlet port, and the openings in the ridge wall are positioned and sized to create a flow through the perimeter channel.
12. The load port door opener of claim 8 wherein the load port door opener includes three exhaust outlet ports.
13. The load port door opener of claim 12 wherein the purge gas inlet port and the three exhaust outlet ports are each in a different corner of the load port door opener.

14. The load port door opener of claim 8 wherein the purge gas inlet port and the exhaust outlet port are disposed in diagonally opposite corners of the load port door opener.

15. A method of purging a volume between a load port door opener and a substrate carrier door, the method comprising:

providing a load port including a door opener with a purge gas inlet port, at least one exhaust outlet port, and a ridge wall defining a perimeter channel in cooperation with a docked substrate carrier, the ridge wall having openings proximate the ports;

docking a substrate carrier against the door opener, entrapping air in a volume there between including the perimeter channel;

injecting purge gas into the volume via the purge gas inlet port;

directing the purge gas into the perimeter channel via an opening in the ridge wall proximate the purge gas inlet port; and

exhausting the air and the purge gas out of the volume via the at least one exhaust outlet port.

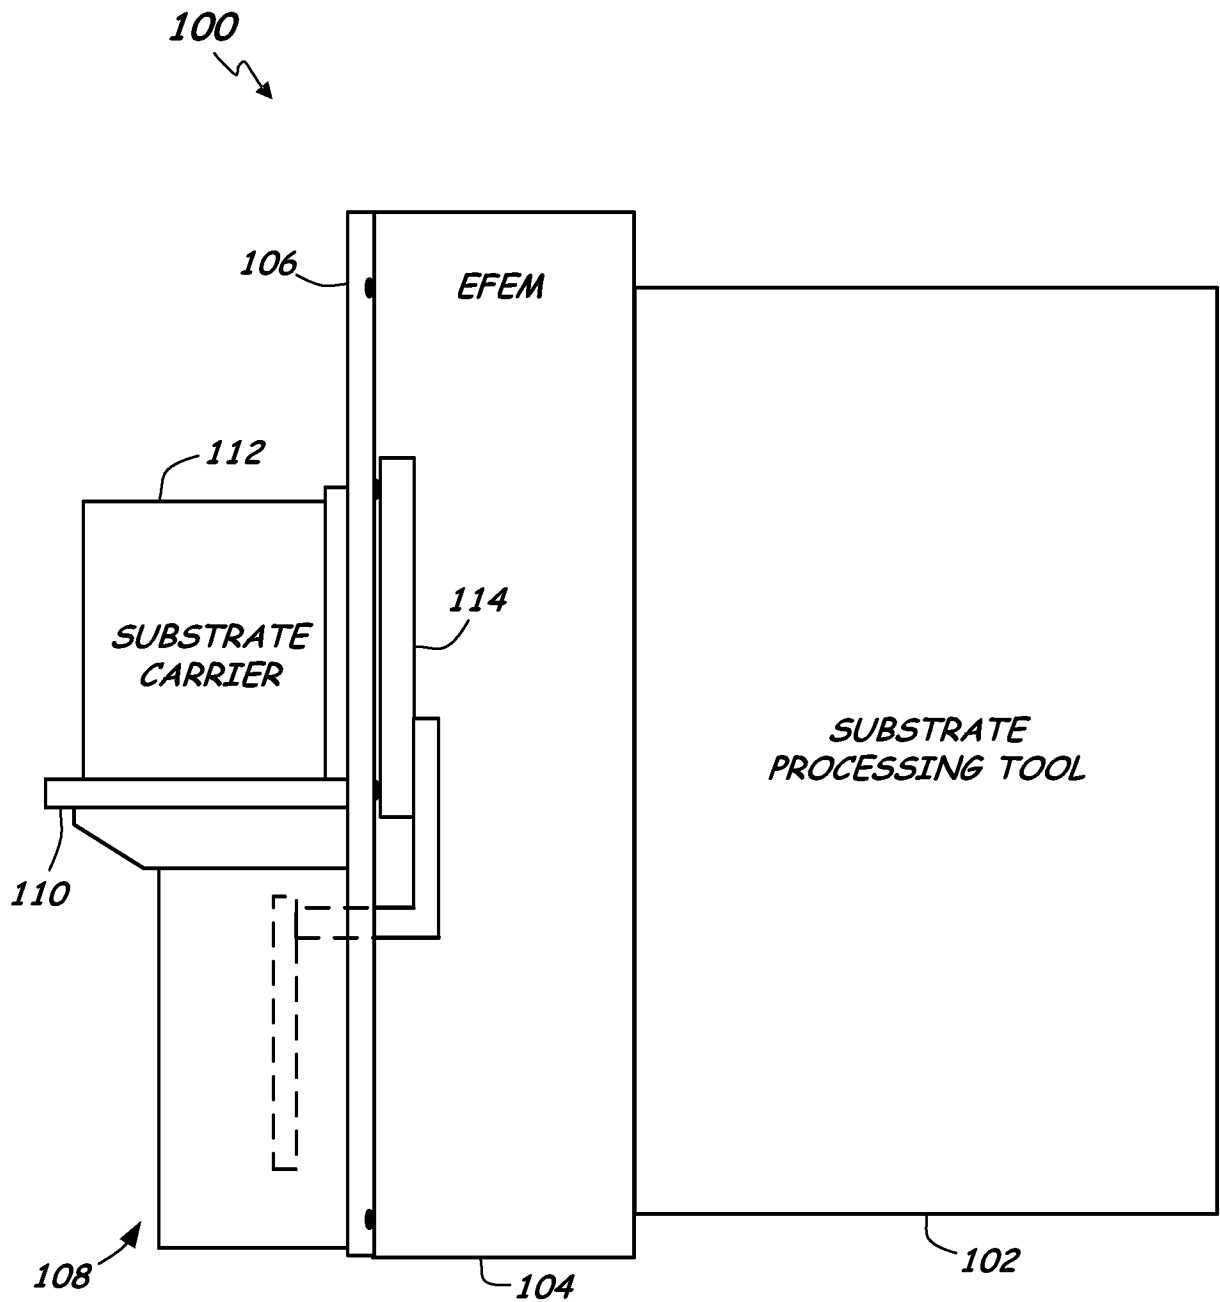


FIG. 1

2/10

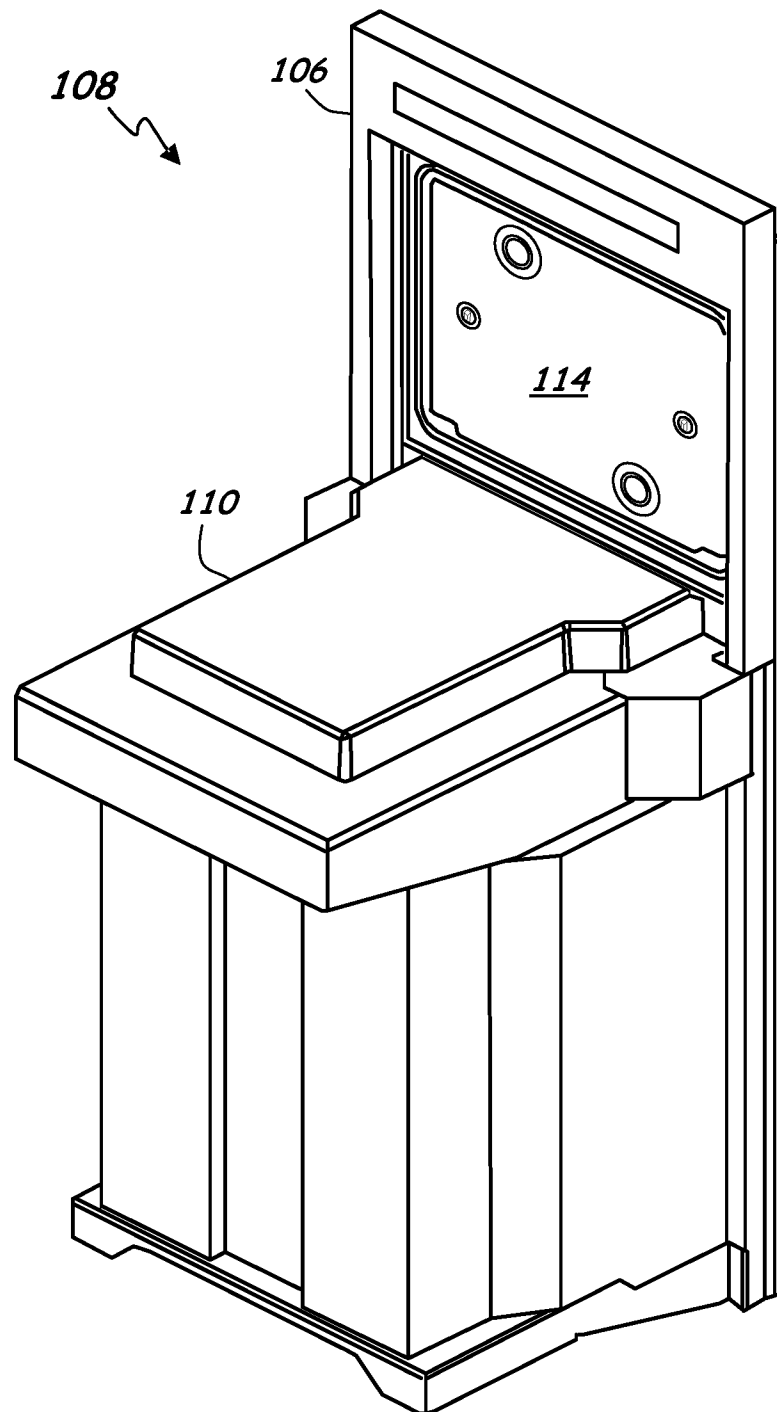


FIG. 2

3/10

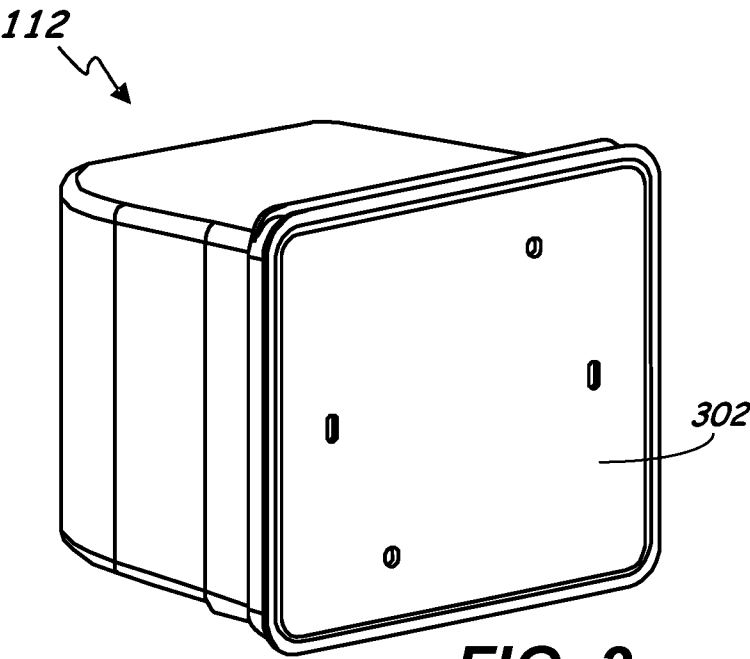


FIG. 3

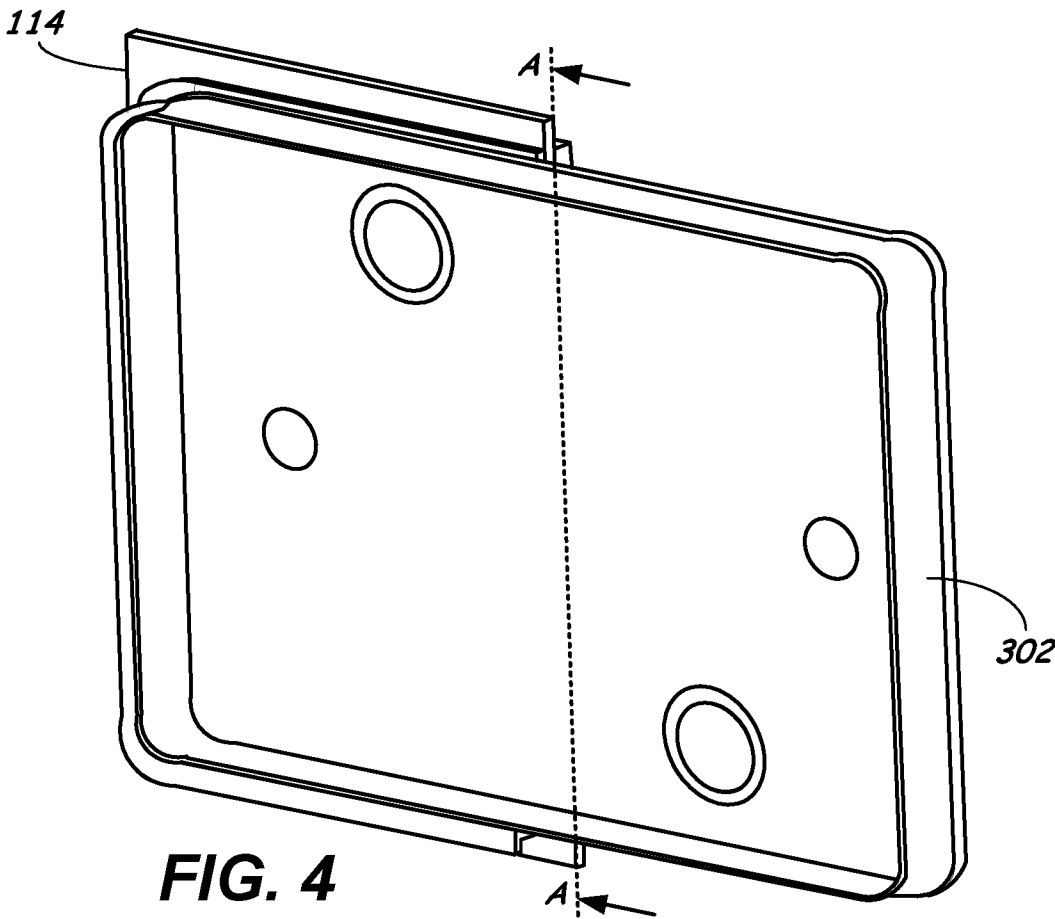


FIG. 4

4/10

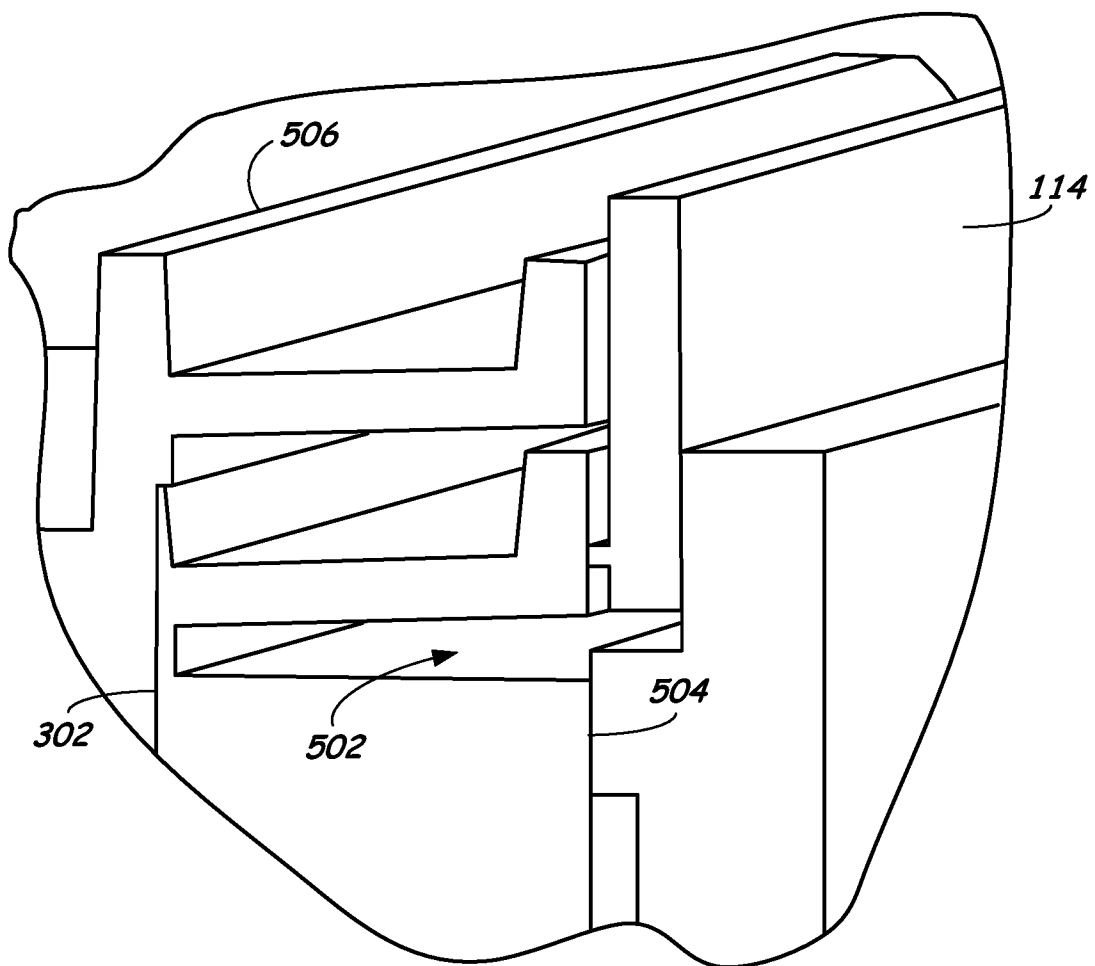
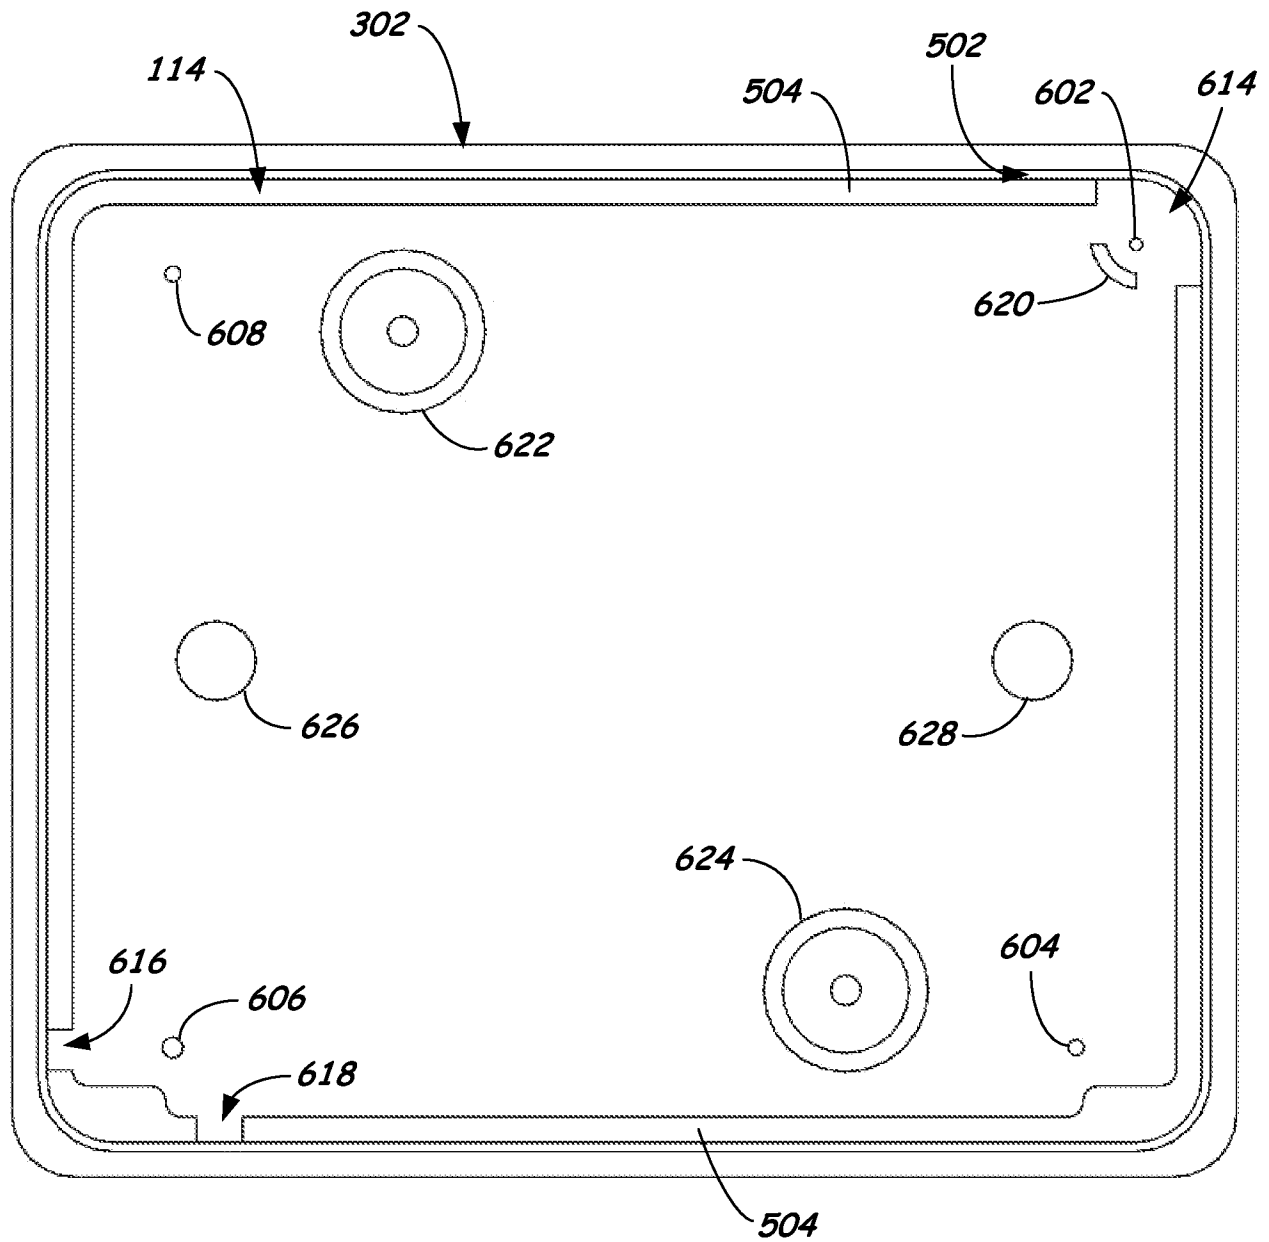
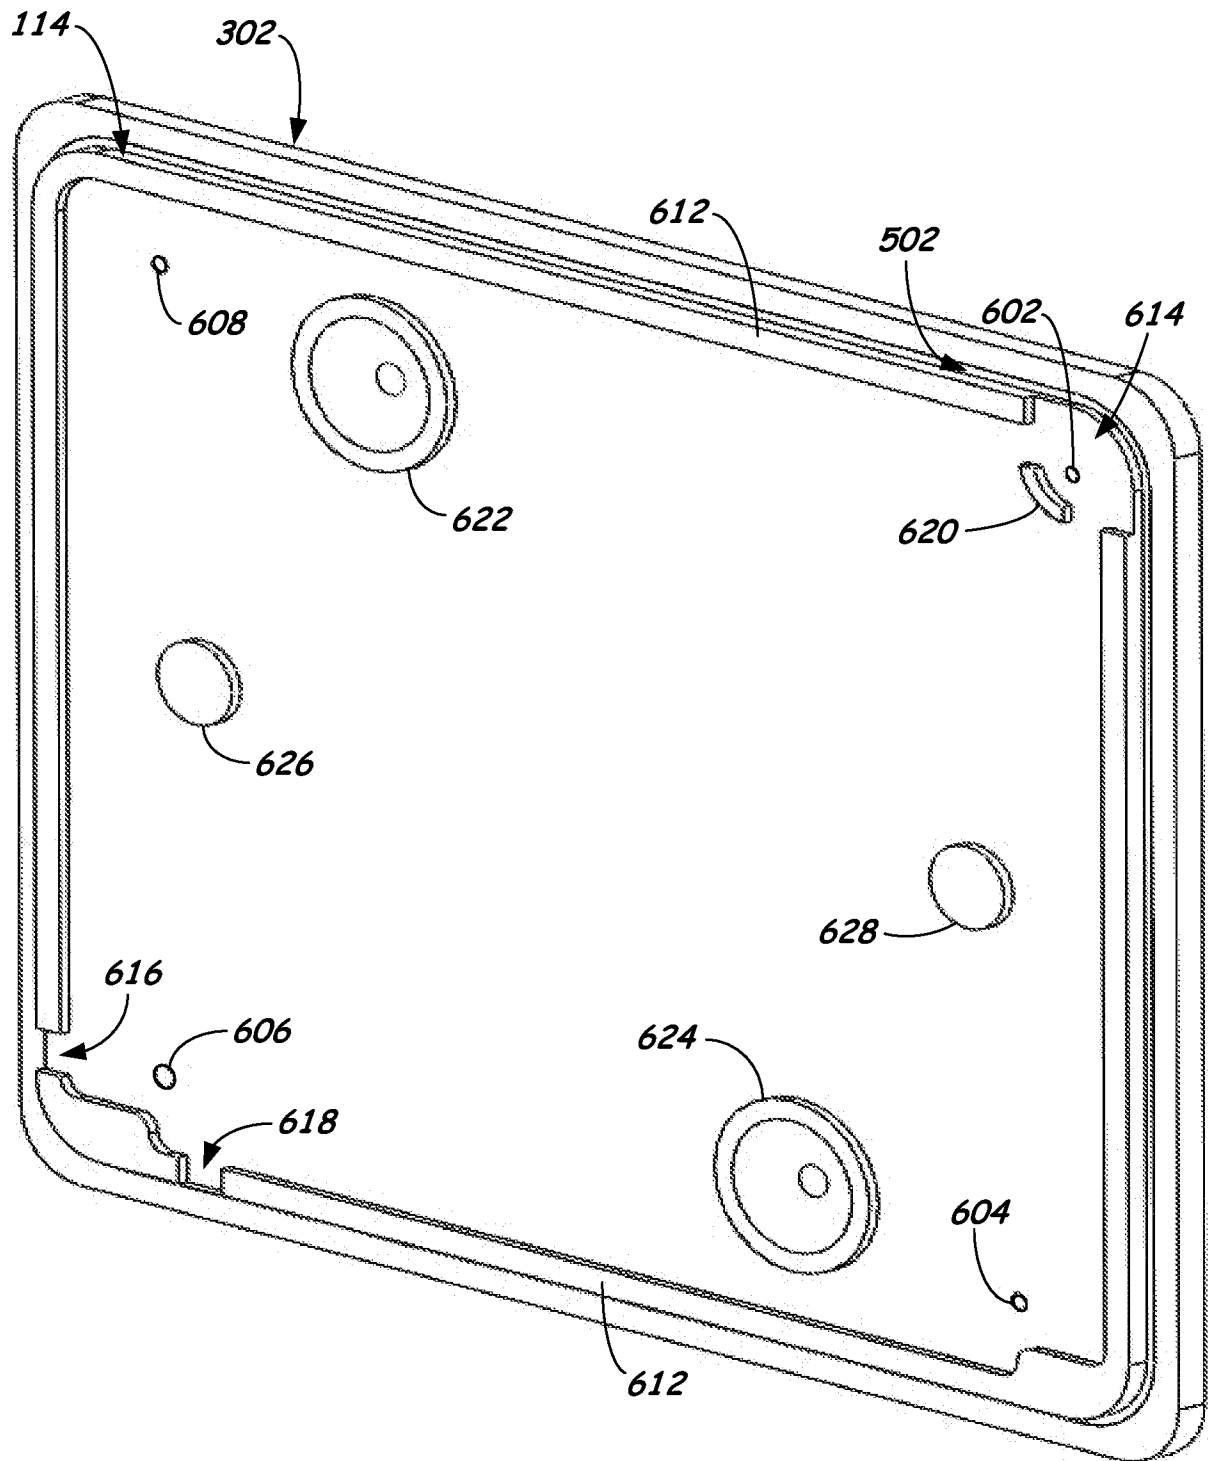


FIG. 5

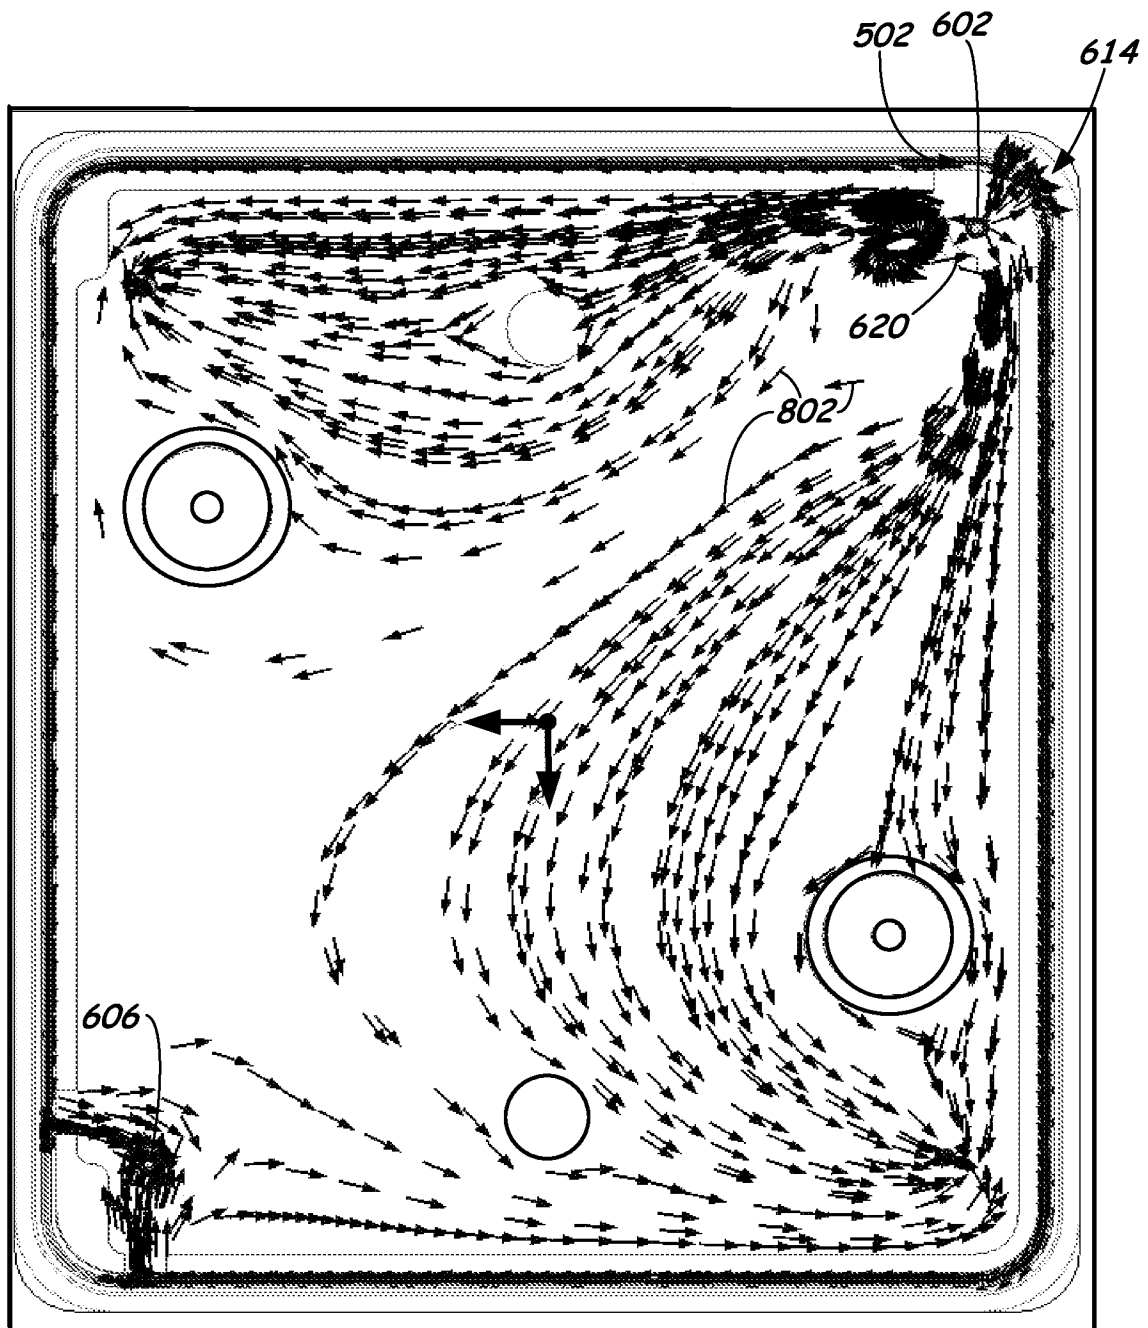
5/10

**FIG. 6**

6/10

**FIG. 7**

7/10

**FIG. 8**




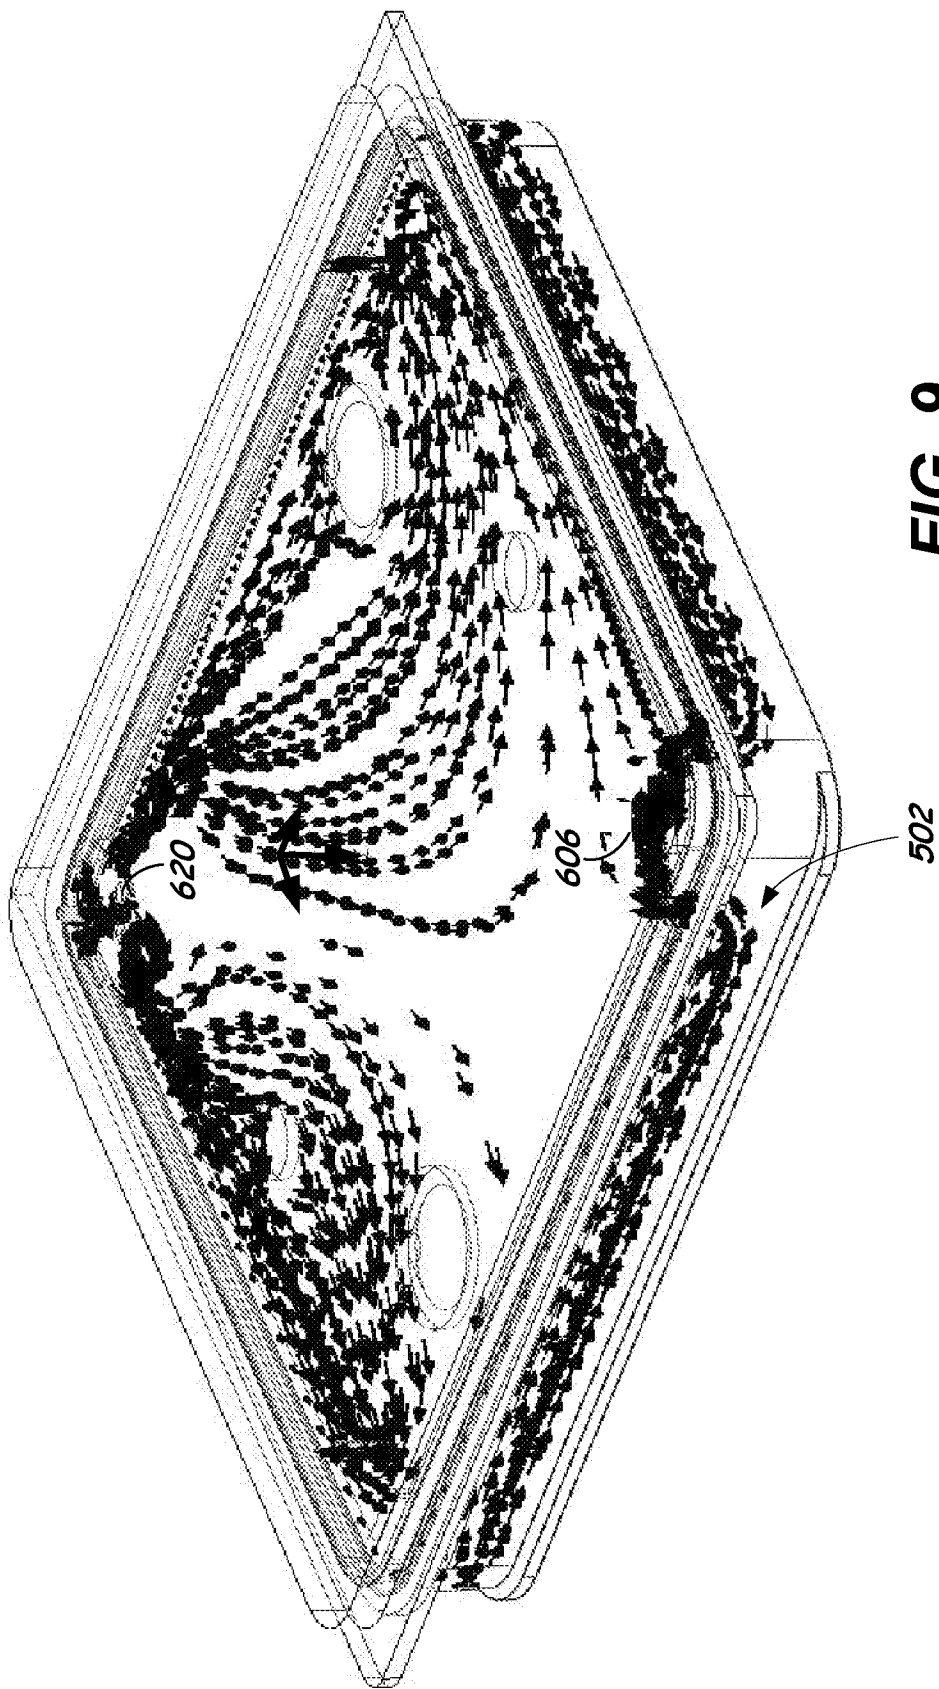


FIG. 9

9/10

**FIG. 10**

10/10

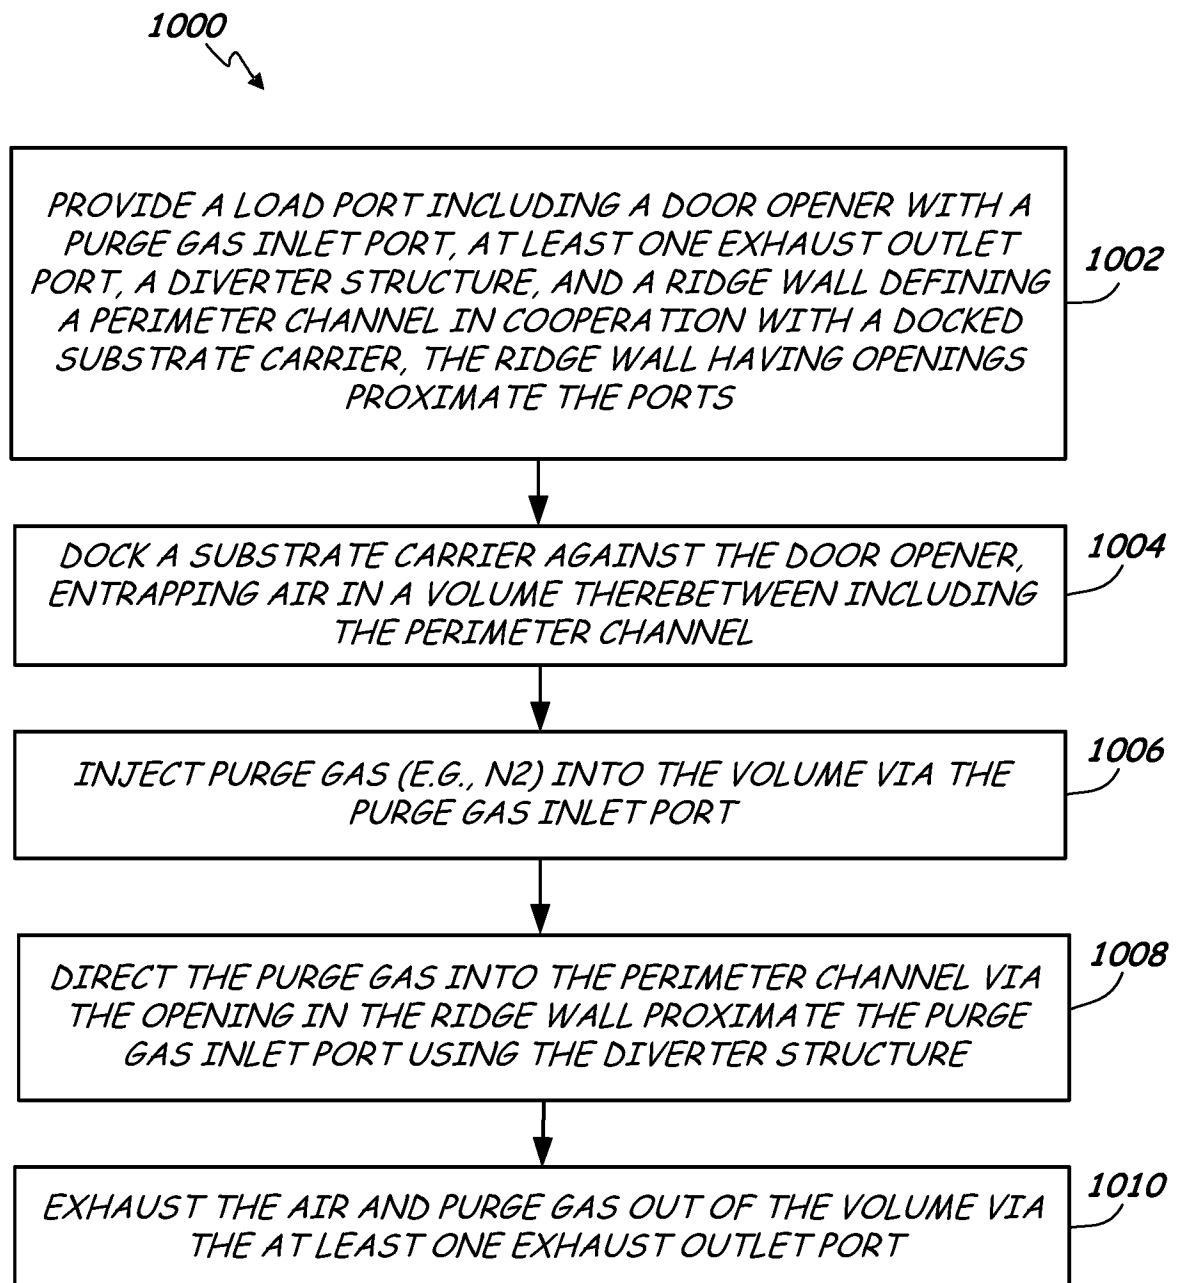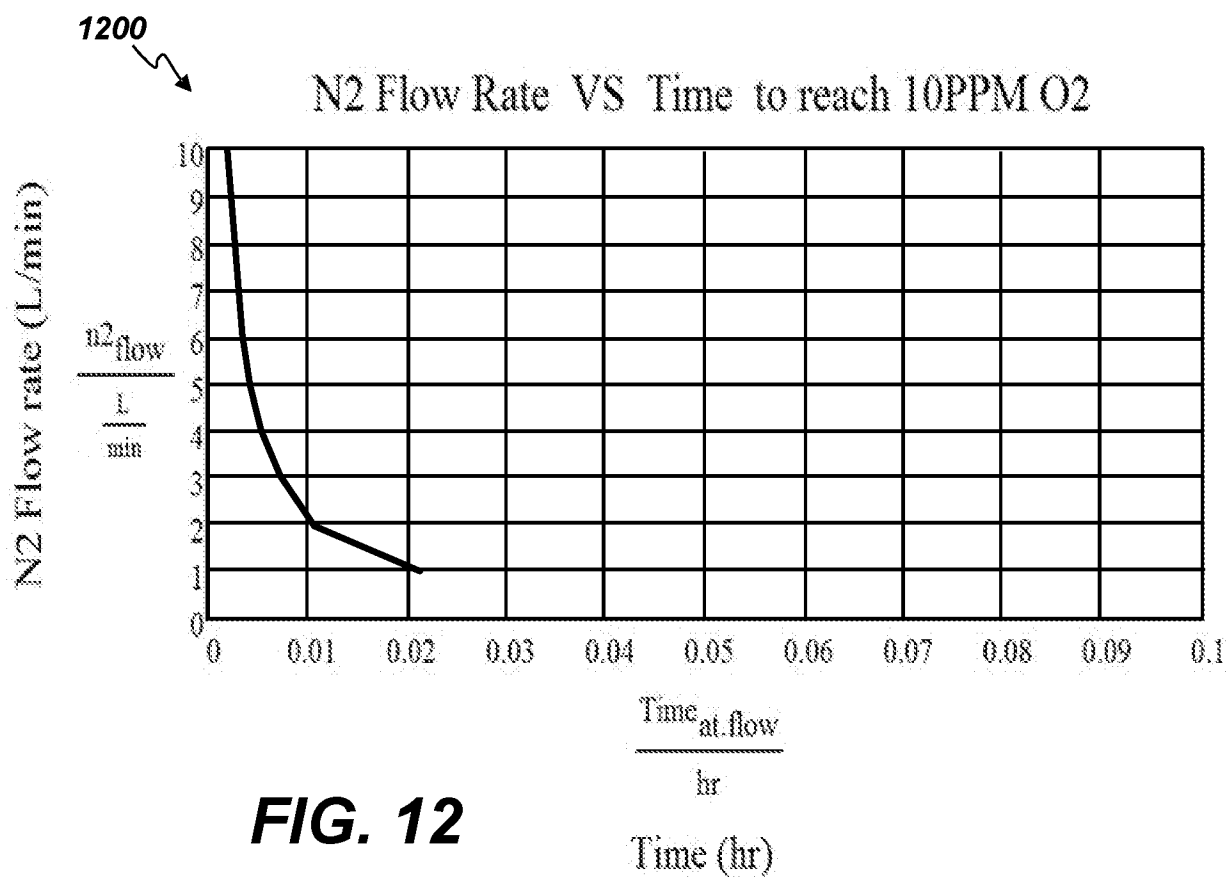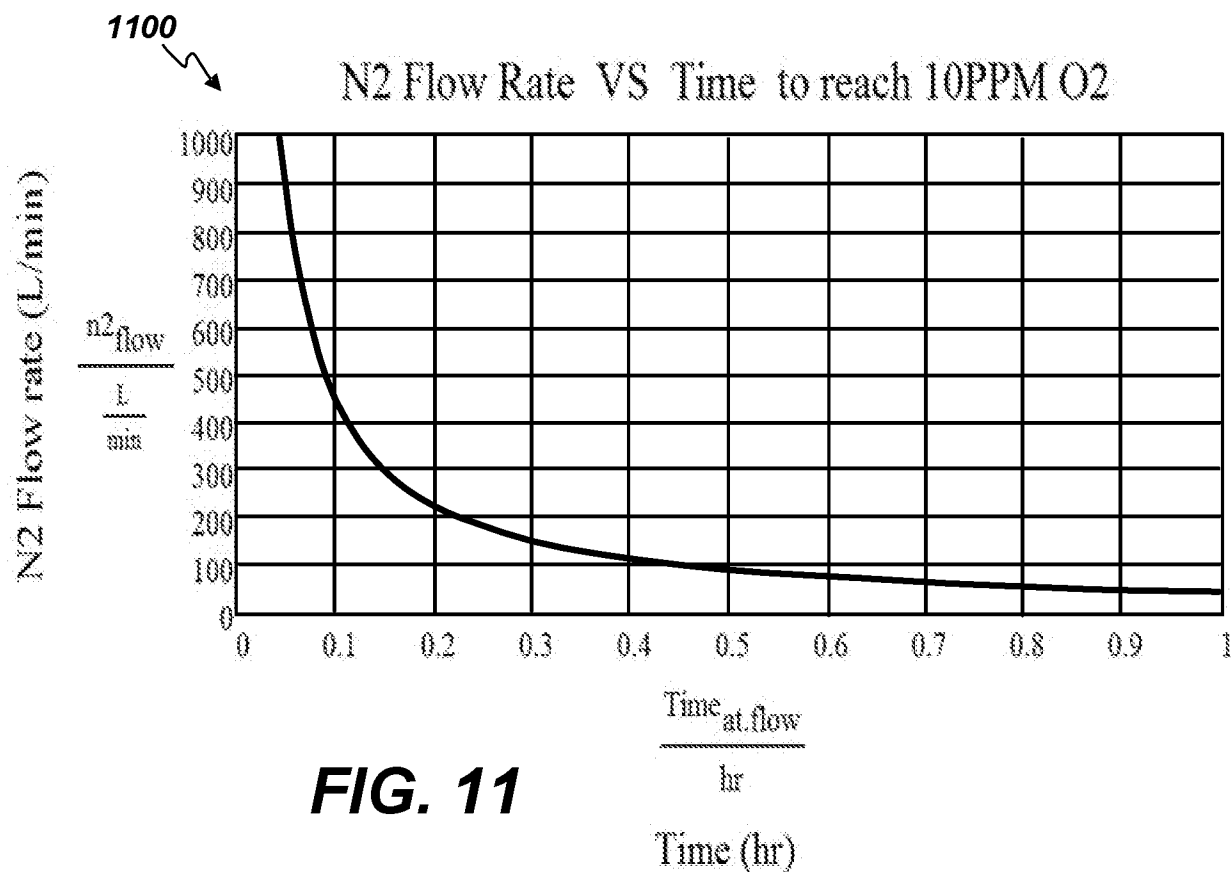

A. CLASSIFICATION OF SUBJECT MATTER**H01L 21/677(2006.01)i, H01L 21/67(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 21/677; A47L 9/00; H01L 2168; G05D 7/06; B65G 65/34; G05B 15/02; B08B 9/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:

load port system, door opener, substrate carrier, purge gas, diverter structure

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016-0147235 A1 (APPLIED MATERIALS, INC.) 26 May 2016 See paragraphs [0002], [0029]-[0081]; claims 1-19; and figures 1-2, 6.	1,5-8,12-15
Y		2-4,9-11
Y	US 2011-0114129 A1 (KISHKOVICH et al.) 19 May 2011 See paragraphs [0043]-[0044]; and figures 7-8.	2-4,9-11
A	US 2005-0111935 A1 (KIM et al.) 26 May 2005 See paragraphs [0017]-[0055]; and figures 1-12.	1-15
A	US 6817822 B2 (TOKUNAGA, KENJI) 16 November 2004 See column 3, line 34 - column 9, line 56; and figures 1-6, 8-11.	1-15
A	KR 10-2009-0013097 A (TDK CORPORATION) 04 February 2009 See paragraphs [0011]-[0058]; and figures 1, 2a-2b, 3, 4a-4b.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 April 2018 (26.04.2018)

Date of mailing of the international search report

26 April 2018 (26.04.2018)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

CHOI, Sang Won

Telephone No. +82-42-481-8291



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2018/012413

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016-0147235 A1	26/05/2016	CN 107004624 A JP 2017-538291 A KR 10-2017-0091661 A TW 201618864 A WO 2016-085622 A1	01/08/2017 21/12/2017 09/08/2017 01/06/2016 02/06/2016
US 2011-0114129 A1	19/05/2011	CN 101970315 A CN 101970315 B JP 2011-507309 A KR 10-2010-0102616 A TW 200948688 A WO 2009-079636 A2 WO 2009-079636 A3 WO 2009-079636 A4	09/02/2011 15/05/2013 03/03/2011 24/09/2010 01/12/2009 25/06/2009 11/09/2009 29/10/2009
US 2005-0111935 A1	26/05/2005	DE 102004054280 A1 JP 2005-150706 A KR 10-0583726 B1 KR 10-2005-0045695 A	23/06/2005 09/06/2005 25/05/2006 17/05/2005
US 6817822 B2	16/11/2004	JP 2003-045933 A JP 3880343 B2 KR 10-2003-0011536 A US 2003-0031537 A1	14/02/2003 14/02/2007 11/02/2003 13/02/2003
KR 10-2009-0013097 A	04/02/2009	JP 2009-038073 A JP 4309935 B2 KR 10-1030884 B1 TW 200917407 A TW I371819 B US 2009-0035099 A1 US 2010-0290888 A1 US 7789609 B2 US 9349627 B2	19/02/2009 05/08/2009 22/04/2011 16/04/2009 01/09/2012 05/02/2009 18/11/2010 07/09/2010 24/05/2016