



(51) International Patent Classification:

H01Q 3/26 (2006.01) H01Q 19/06 (2006.01)
H01Q 1/38 (2006.01) H01Q 3/46 (2006.01)

(21) International Application Number:

PCT/US2017/013845

(22) International Filing Date:

18 January 2017 (18.01.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/280,271 19 January 2016 (19.01.2016) US

(71) Applicant: COMMSCOPE TECHNOLOGIES LLC
[US/US]; 1100 CommScope Place SE, Hickory, North
Carolina 28602 (US).

(72) Inventor: DENG, Gangyi; 1534 Ponds Edge Drive, Allen,
Texas 75013 (US).

(74) Agent: CANNON, James, R.; Myers Bigel, P.A., PO Box
37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MULTI-BEAM ANTENNAS HAVING LENSES FORMED OF A LIGHTWEIGHT DIELECTRIC MATERIAL

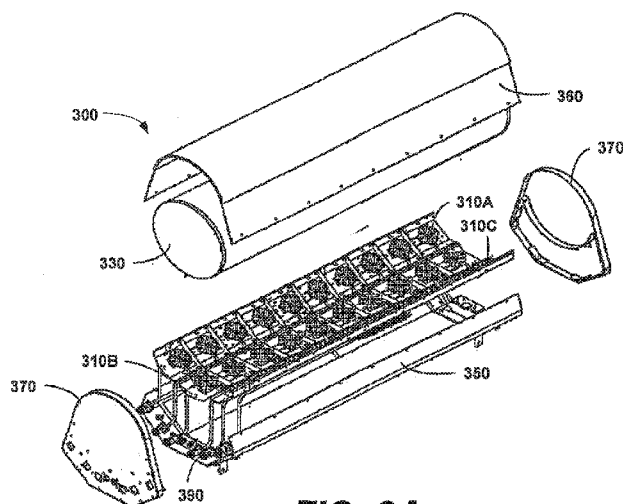


FIG. 3A

(57) Abstract: A multi-beam antenna in-
cludes a plurality of radiating elements and
a lens that is positioned to receive electro-
magnetic radiation from at least one of the
radiating elements, the lens comprising a
composite dielectric material. The compos-
ite dielectric material comprises a foamed
base dielectric material having particles of
a high dielectric constant material embed-
ded therein, the high dielectric constant
material having a dielectric constant that is
at least three times a dielectric constant of
the foamed base dielectric material.

MULTI-BEAM ANTENNAS HAVING LENSES FORMED OF A LIGHTWEIGHT DIELECTRIC MATERIAL

RELATED APPLICATION

[0001] The present application claims priority from and the benefit of U.S. Provisional Patent Application No. 62/280,271, filed January 16, 2016, the disclosure of which is hereby incorporated herein in its entirety.

BACKGROUND

[0002] The present invention generally relates to radio communications and, more particularly, to lensed multi-beam antennas utilized in cellular communications systems.

[0003] Cellular communications systems are well known in the art. In a cellular communications system, a geographic area is divided into a series of regions that are referred to as "cells," and each cell is served by a base station. The base station may include one or more antennas that are configured to provide two-way radio frequency ("RF") communications with mobile subscribers that are geographically positioned within the cells served by the base station. In many cases, each base station provides service to multiple "sectors," and each of a plurality of antennas will provide coverage for a respective one of the sectors. Typically, the sector antennas are mounted on a tower or other raised structure, with the radiation beam(s) that are generated by each antenna directed outwardly to serve the respective sector.

[0004] A common wireless communications network plan involves a base station serving three hexagonal shaped cells using three base station antennas. This is often referred to as a three sector configuration. In a three sector configuration, each base station antenna serves a 120° sector. Typically, a 65° azimuth Half Power Beamwidth (HPBW) antenna provides coverage for a 120° sector. Three of these 120° sectors provide 360° coverage. Other sectorization schemes may also be employed. For example, six, nine, and twelve sector configurations are also used. Six sector sites may involve six directional base station

antennas, each having a 33° azimuth HPBW antenna serving a 60° sector. In other proposed solutions, a single, multi-column array may be driven by a feed network to produce two or more beams from a single phased array antenna. For example, if multi-column array antennas are used that each generate two beams, then only three antennas may be required for a six sector configuration. Antennas that generate multiple beams are disclosed, for example, in U.S. Patent Publication No. 2011/0205119, which is incorporated herein by reference.

[0005] Increasing the number of sectors increases system capacity because each antenna can service a smaller area and therefore provide higher antenna gain throughout the sector. However, dividing a coverage area into smaller sectors has drawbacks because antennas covering narrow sectors generally have more radiating elements that are spaced wider apart than are the radiating elements of antennas covering wider sectors. For example, a typical 33° azimuth HPBW antenna is generally twice as wide as a typical 65° azimuth HPBW antenna. Thus, cost, space and tower loading requirements increase as a cell is divided into a greater number of sectors.

SUMMARY

[0006] As a first aspect, embodiments of the invention are directed to a multi-beam antenna, comprising a plurality of radiating elements and a lens that is positioned to receive electromagnetic radiation from at least one of the radiating elements, the lens comprising a composite dielectric material. The composite dielectric material comprises a foamed base dielectric material having particles of a high dielectric constant material embedded therein, the high dielectric constant material having a dielectric constant that is at least three times a dielectric constant of the foamed base dielectric material.

[0007] As a second aspect, embodiments of the invention are directed to a multi-beam antenna, comprising a plurality of radiating elements and a lens that is positioned to receive electromagnetic radiation from at least one of the radiating elements, the lens comprising a plurality of blocks that are contained within an outer shell of a composite dielectric material. Each block comprises a composite dielectric material that includes a base dielectric material having particles of a high dielectric constant material embedded therein, the high dielectric constant material having a dielectric constant that is at least three times a dielectric constant of the base dielectric material.

[0008] As a third aspect, embodiments of the invention are directed to a method of fabricating a multi-beam antenna, the method comprising: mixing particles of a second dielectric material into a first dielectric material that is in liquid form, the second dielectric

material having a dielectric constant that is at least three times a dielectric constant of the first dielectric material; adding a nucleating agent to the first dielectric material; using a blowing agent to foam the first dielectric material having the particles of the second dielectric material mixed therein; using the foamed first dielectric material for a lens for the multi-beam antenna; and mounting the lens in front of at least one radiating element.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] **FIG. 1A** is a schematic perspective view of a composite dielectric material according to embodiments of the present invention that is suitable for use in fabricating a lens for an antenna.

[0010] **FIG. 1B** is a schematic perspective view of a composite dielectric material according to further embodiments of the present invention that is suitable for use in fabricating a lens for an antenna.

[0011] **FIG. 2** is a schematic perspective view of a composite dielectric material according to additional embodiments of the present invention that is suitable for use in fabricating a lens for an antenna.

[0012] **FIG. 3A** is a perspective view of a lensed multi-beam antenna according to embodiments of the present invention.

[0013] **FIG. 3B** is a cross-sectional view of the lensed multi-beam antenna of **FIG. 3A**.

[0014] **FIG. 4** is a perspective view of a linear array included in the lensed multi-beam antenna of **FIG. 3A**.

[0015] **FIG. 5A** is a plan view of one of the box-style dual polarized radiating elements included in the linear array of **FIG. 4**.

[0016] **FIG. 5B** is a side view of the box-style dual polarized radiating element of **FIG. 5A**.

[0017] **FIG. 5C** is a schematic diagram illustrating the equivalent dipoles of the box-style dual polarized radiating element of **FIGS. 5A-5B**.

[0018] **FIG. 6A** is a schematic perspective view illustrating a first example of a secondary lens that may be included in the lensed multi-beam antenna of **FIGS. 3A-3B**.

[0019] **FIG. 6B** is a schematic perspective view illustrating a second example of a secondary lens that may be included in the lensed multi-beam antenna of **FIGS. 3A-3B**.

[0020] **FIG. 6C** is a schematic perspective view illustrating a third example of a secondary lens that may be included in the lensed multi-beam antenna of **FIGS. 3A-3B**.

[0021] **FIG. 7** is a schematic side view of a modified version of the multi-beam antenna of **FIGS. 3A** and **3B** that uses a cylindrical lens with hemispherical end portions.

[0022] **FIG. 8** is a schematic plan view of a dual band lensed multi-beam antenna according to embodiments of the present invention.

[0023] **FIGS. 9A** and **9B** are a schematic plan view and a schematic side view, respectively, of a lensed multi-beam antenna according to further embodiments of the present invention that includes a plurality of spherical lenses.

[0024] **FIG. 10** is flow chart of a method of manufacturing a lensed antenna according to certain embodiments of the present invention.

[0025] **FIG. 11** is flow chart of a method of manufacturing a lensed antenna according to further embodiments of the present invention.

[0026] **FIG. 12** is flow chart of a method of manufacturing a composite dielectric material according to embodiments of the present invention.

DETAILED DESCRIPTION

[0027] Antennas have been developed that have multi-beam beam forming networks that drive a planar array of radiating elements, such as a Butler matrix. Multi-beam beam forming networks, however, have several potential disadvantages, including non-symmetrical beams and problems associated with port-to-port isolation, gain loss, and/or a narrow bandwidth. Multi-beam antennas have also been proposed that use Luneberg lenses, which are multi-layer cylindrical lenses that have dielectric materials having different dielectric constants in each layer. Unfortunately, the costs of Luneberg lenses is prohibitively high for many applications, and antenna systems that use Luneberg lenses may still have problems in terms of beam width stability over a wide frequency band and/or high cross-polarization levels.

[0028] U.S. Patent Publication No. 2015/0091767 ("the '767 publication") proposes a multi-beam antenna that has linear arrays of radiating elements and a cylindrical RF lens that is formed of a dielectric material. The RF lens is used to focus the azimuth beams of the linear arrays. In an example embodiment, the 3 dB beam width of a linear array may be reduced from 65° without the lens to 23° with the lens. The entire contents of the '767 publication are incorporated herein by reference.

[0029] The lens disclosed in the '767 publication differs from a conventional Luneberg lens in that the dielectric constant of the material used to form the lens may be the same throughout the lens, in contrast with the Luneberg lens design in which multiple layers of dielectric material are provided where each layer has a different dielectric constant. A cylindrical lens having such a homogenous dielectric constant may be easier and less expensive to manufacture, and may also be more compact, having 20-30% less diameter. The lenses of the '767 publication may be made of small blocks of dielectric material. The dielectric material focuses the RF energy that radiates from, and is received by, the linear arrays. The '767 publication teaches that the dielectric material may be an artificial dielectric material of the type described in U.S. Patent No. 8,518,537 ("the '537 patent"), the entire contents of which is incorporated herein by reference. In one example embodiment, small blocks of the dielectric material are provided, each of which includes at least one needle-like conductive fiber embedded therein. The small blocks may be formed into a much larger structure using an adhesive that glues the blocks together. The blocks may have a random orientation within the larger structure. The dielectric material used to form the blocks may be a lightweight material having a density in the range of, for example, 0.005 to 0.1 g/cm³. By varying the number and/or orientation of the conductive fiber(s) that are included inside the small blocks, the dielectric constant of the material can be varied from 1 to 3.

[0030] Unfortunately, the dielectric material used in the lens of the '767 publication may be expensive to manufacture. Moreover, because the dielectric material includes conductive fibers, it may be a source of passive intermodulation distortion that can degrade the quality of the communications. Additionally, the conductive fibers included in adjacent small blocks of material may become electrically connected to each other resulting in larger particle sizes that can negatively impact the performance of the lens.

[0031] Pursuant to embodiments of the present invention lensed multi-beam antennas are provided that include lenses formed of a lightweight, low-loss composite dielectric material. The imaginary part of the complex representation of the permittivity of a dielectric material is related to the rate at which energy is absorbed by the material. The absorbed energy reflects the "loss" of the dielectric material, since absorbed energy is not radiated. Low-loss dielectric materials are desirable for use in lenses for antennas as it is desirable to reduce or minimize the amount of RF energy that is lost in transmitting the signal through the lens.

[0032] A number of low loss dielectric materials are known in the art such as, for example, solid blocks of polystyrene, expanded polystyrene, polyethylene, polypropylene,

expanded polypropylene and the like. Unfortunately, these materials may be relatively heavy in weight and/or may not have an appropriate dielectric constant. For some applications, such as lenses for base station antennas, it may be important that the dielectric material be a very low weight material.

[0033] The multi-beam lensed antennas according to embodiments of the present invention may have lenses that are formed of a composite dielectric material that comprises a mixture of a high dielectric constant material and a low dielectric constant base dielectric material that exhibits a suitable dielectric constant and that is very light weight. By foaming the base dielectric material, a very lightweight matrix can be constructed that the higher dielectric constant material may be embedded into. In some embodiments, the composite dielectric material may comprise a large block of foamed plastic or other foamed base dielectric material that includes particles (e.g., a powder) of a high dielectric constant material embedded therein. In some embodiments, the high dielectric constant material may be a non-conductive material such as, for example, a ceramic or a non-conductive oxide. The particles of high dielectric constant material may have a variety of different shapes and may be distributed throughout the foamed lightweight base dielectric material. In some embodiments, the composite dielectric material may comprise a plurality of small blocks of a base dielectric material, where each block has particles of a high dielectric constant dielectric material embedded therein. The small blocks may be adhered together using, for example, an adhesive such as rubber adhesives or adhesives consisting of polyurethane, epoxy or the like, which have low dielectric losses.

[0034] Embodiments of the present invention will now be discussed in further detail with reference to the drawings, in which example embodiments are shown.

[0035] **FIG. 1A** is a schematic perspective view of a composite dielectric material **100** according to embodiments of the present invention that is suitable for use in fabricating a lens for a multi-beam antenna. As shown in **FIG. 1A**, the composite dielectric material **100** comprises a lightweight base dielectric material **110** that has a plurality of particles **122** of a high dielectric constant material **120** embedded therein. The base dielectric material **110** may have a low dielectric constant. The base dielectric material **110** may comprise, for example, a plastic material such as polyethylene, polystyrene, polytetrafluoroethylene (PTFE), polypropylene, polyurethane silicon or the like.

[0036] The base dielectric material **110** may comprise a foamed material having a very low density. In some embodiments, base dielectric material **110** may be foamed so that in the composite dielectric material **100** the ratio between the dielectric base material **100** and

the foaming gas (e.g., air) is less than 50% by volume (i.e., a foaming percentage that exceeds 50%). The base dielectric material **110** may be foamed, for example, by injecting a gas such as air into the base dielectric material **110** while the base dielectric material **110** is in a liquid form. During the foaming process, a nucleating agent may be included in the liquid base dielectric material **100** that facilitates the foaming process. For example, an agent that reduces the surface tension of the liquid base dielectric material **110** may be added to the base dielectric material **110**. In some embodiments, the foaming percentage of the base dielectric material **110** may exceed 70% or may even exceed 80%. Such high foaming percentages may facilitate reducing the weight of the composite dielectric material **100** and hence the weight of any lens formed thereof. In some embodiments, the base dielectric material **110** may be foamed in such a way to provide an open-cell foamed material comprising thin films of solid material separating regions or "pockets" of gas (e.g., air) that may connect to each other. While closed-cell foamed composite dielectric materials (i.e., a foam in which the gas forms discrete pockets, each completely surrounded by the solid material) may be used in other embodiments, these materials may tend to require more base dielectric material and hence may be heavier and more expensive to produce.

[0037] The high dielectric constant material **120** may comprise, for example, small particles **122** of a non-conductive material such as, for example, a ceramic or a metal oxide. Example ceramic materials that may be used include Mg_2TiO_4 , MgTiO_3 , CaTiO_3 , BaTi_4O_9 , boron nitride and the like. Example non-conductive (or low conductivity) oxides include titanium oxide, aluminium oxide and the like. The high dielectric constant material **120** may preferably have a relatively high ratio of dielectric constant to weight, and also is preferably relatively inexpensive and readily incorporated into the lightweight base dielectric material **110**. The high dielectric constant material **120** may comprise a powder of very fine particles **122** in some embodiments. In some embodiments, the particles **122** of high dielectric constant material **120** may have generally spherical shapes. In other embodiments, the particles **122** may have random shapes, In still other embodiments, the particles **122** may have other shapes such as elongated shapes (e.g., cylinders or rectangular cubes having an aspect ratio of at least two or, in some embodiments, of at least five).

[0038] The density of the composite dielectric material **100** can be, for example, between 0.005 to 0.1 g/cm³ in some embodiments. The particles **122** of high dielectric constant material **120** may be generally uniformly distributed throughout the base dielectric material **110**. Individual particles **122** may be randomly oriented within the base dielectric material **110**. The amount of high dielectric constant material **120** that is included in the

composite dielectric material **100** may be selected so that the composite dielectric material **100** has a dielectric constant within a desired range. In some embodiments, the dielectric constant of the composite dielectric material **100** may be in the range of, for example, 1 to 3.

[0039] In **FIG. 1A**, the composite dielectric material **100** is formed into the shape of a cube. It will be appreciated that the composite dielectric material **100** may have any appropriate shape. As will be discussed in detail herein, in some embodiments, the composite dielectric material **100** may have the shape of a cylinder or of a sphere, or variants thereof. It will also be appreciated that the composite dielectric material **100** may be manufactured to have a first shape and then be cut, ground, machined or otherwise shaped into a desired shape, or may be directly manufactured to have the desired shape.

[0040] **FIG. 1B** is a schematic perspective view of a composite dielectric material **150** according to further embodiments of the present invention. The composite dielectric material **150** may also be suitable for use in fabricating a lens for a multi-beam antenna.

[0041] As shown in **FIG. 1B**, the composite dielectric material **150** comprises a base dielectric material **160** that has a plurality of particles **172** of a high dielectric constant material **170** embedded therein. The base dielectric material **160** may be the same as the base dielectric material **110** that is discussed above, and hence further description thereof will be omitted. The base dielectric material **160** may comprise a foamed material having a very low density.

[0042] The high dielectric constant material **170** may also comprise, for example, a ceramic material, although non-ceramic materials may also be used. The high dielectric constant material **170** differs from the high dielectric constant material **120** in that it comprises elongated particles **172**. The elongated particles **172** may be uniformly distributed and randomly oriented throughout the base dielectric material **160**. The amount of high dielectric constant material **170** that is included in the composite dielectric material **150** may be selected so that the composite dielectric material **150** has a dielectric constant within a desired range. The composite dielectric material **150** may be manufactured in a desired shape or formed into a desired shape after manufacture.

[0043] **FIG. 2** is a schematic perspective view of a composite dielectric material **200** according to additional embodiments of the present invention that is suitable for use in fabricating a lens for a multi-beam antenna. As shown in **FIG. 2**, the composite dielectric material **200** comprises a plurality of small dielectric blocks **210** that are adhered together using an adhesive **240**. The adhesive **240** may, for example, be coated on the surface of the blocks **210**. The blocks **210** may optionally be contained within an outer shell **250** (which is

shown using dashed lines in **FIG. 2**), in which case the adhesive **240** may or may not be omitted.

[0044] Each block **210** may comprise a base dielectric material **220** that has a plurality of particles **232** of a high dielectric constant material **230** embedded therein. The base dielectric material **220** may comprise, for example, a foamed plastic material such as foamed (or "expanded") polyethylene, polystyrene, polytetrafluoroethylene (PTFE), polypropylene, polyurethane silicon or the like. The high dielectric constant material **230** may comprise, for example, small particles of a high dielectric constant ceramic material. Each block **210** may comprise, for example, a small cube (or other shaped block) that is formed of the composite dielectric material **100** that is discussed above with reference to **FIG. 1A**.

[0045] In an example embodiment, each block **210** may be cube-shaped with each side of the cube having a length between 0.5 and 3.0 mm. The high dielectric constant material **230** may comprise particles **232** having diameters (assuming that the particles are generally circular in shape) that are much smaller than the length of sides of the cubes **210**, such as diameters of 0.2 mm or less in some embodiments.

[0046] While the blocks **210** that are depicted in **FIG. 2** include generally spherical particles **232** of the high dielectric constant material **230**, it will be appreciated that in other embodiments, the blocks **210** may include particles **232** of a high dielectric constant material **230** that have different shapes. For example, elongated particles such as the particles **172** that are included in the composite dielectric material **150** may be used as the high dielectric constant material **230**. In some embodiments, these elongated particles may be randomly distributed throughout the base dielectric material **220** included in each block **210**. In other embodiments, the particles **232** may be elongated particles that are formed in arrays of two or more particles in each dielectric block **210** in the same manner that conductive fibers are formed in arrays within particles in the above-referenced '537 patent. In other embodiments, the particles **232** may comprise a finely ground powder of the high dielectric constant material **230**.

[0047] As noted above, in some embodiments, the blocks **210** may be contained within an outer shell **250** such as a shell formed of a dielectric material that is shaped in the desired shape for the lens for a base station antenna. In such embodiments, the adhesive **240** may or may not be used to adhere the blocks **210** together. Base station antennas may be subject to vibration or other movement as a result of wind, rain, earthquakes and other environmental factors. Such movement can cause settling of the blocks **210**, particularly if an

adhesive **240** is not used and/or if some blocks **210** are not sufficiently adhered to other blocks **210** and/or if the adhesive **240** loses adhesion strength over time and/or due to temperature cycling. In some embodiments, the shell **250** may include a plurality of individual compartments (not shown) and the small blocks **210** may be filled into these individual compartments to reduce the effects of settling of the blocks **210**. The use of such compartments may increase the long term physical stability and performance of a lens that is formed using the blocks **210**. It will also be appreciated that the blocks **210** may also and/or alternatively be stabilized with slight compression and/or a backfill material. Different techniques may be applied to different compartments, or all compartments may be stabilized using the same technique.

[0048] While in the embodiment of **FIG. 2** the particles **232** of high dielectric constant material **230** are shown embedded throughout the base dielectric material **220**, it will be appreciated that in other embodiments the particles **232** may only be embedded in and/or otherwise adhered to the exterior surfaces of the blocks **210**. In such embodiments, the blocks **210** may have a smaller volume to ensure that the particles **232** of high dielectric constant material **230** are distributed fairly uniformly throughout the composite dielectric material **200**.

[0049] The above-described composite dielectric materials **100**, **150**, **200** may be used to form lenses for base station antennas. According to embodiments of the present invention, it has been appreciated that composite dielectric materials that have non-conductive particles may be preferred over the conductive fibers suggested in the above-referenced '537 patent. For example, conductive fibers represent a potential source of passive intermodulation distortion ("PIM") in an RF communications system, and hence PIM considerations may impact the design of antennas that use composite dielectric materials that include such conductive fibers. Additionally, the response of conductive materials to radiation emitted through the antenna may depend on the size and/or shape of the conductive fibers and the frequency of the emitted radiation. As such, clustering of particles, which can effectively create particles having, for example, longer effective lengths, can potentially negatively impact the performance of the antenna. The present inventors appreciated that the use of a small amount of non-conductive high dielectric constant material dispersed in a lightweight base dielectric material could potentially provide improved performance as compared to the composite dielectric material of the '537 patent.

[0050] Moreover, because skin effect considerations are not a concern with respect to non-conductive high dielectric constant materials, using a high dielectric constant material

in the form of a powder as opposed to elongated fibers becomes a possibility with the present approach. The use of such a powder may significantly simplify the manufacture of the composite dielectric material, as the high dielectric constant material powder may be thoroughly mixed into a liquefied base dielectric material and the base dielectric material may then be foamed to form a lightweight solid foamed material in which the high dielectric constant material is uniformly dispersed throughout.

[0051] **FIG. 3A** is a perspective view of a lensed multi-beam base station antenna **300** according to embodiments of the present invention. **FIG. 3B** is a cross-sectional view of the lensed multi-beam base station antenna **300**.

[0052] Referring to **FIGS. 3A** and **3B**, the multi-beam base station antenna **300** includes one or more linear arrays of radiating elements **310A**, **310B**, and **310C** (which are referred to herein collectively using reference numeral **310**). These linear arrays of radiating elements **310** are also referred to as "linear arrays" or "arrays" herein. The antenna **300** further includes an RF lens **330**. In some embodiments, each linear array **310** may have approximately the same length as the lens **330**. The multi-beam base station antenna **300** may also include one or more of a secondary lens **340** (see **FIG. 3B**), a reflector **350**, a radome **360**, end caps **370**, a tray **380** (see **FIG. 3B**) and input/output ports **390**. In the description that follows, the azimuth plane is perpendicular to the longitudinal axis of the RF lens **330**, and the elevation plane is parallel to the longitudinal axis of the RF lens **330**.

[0053] The RF lens **330** is used to focus the radiation coverage pattern or "beam" of the linear arrays **310** in the azimuth direction. For example, the RF lens **330** may shrink the 3 dB beam widths of the beams (labeled BEAM1, BEAM2 and BEAM 3 in **FIG. 3B**) output by each linear array **310** from about 65° to about 23° in the azimuth plane. While the antenna **300** includes three linear arrays **310**, it will be appreciated that different numbers of linear arrays **310** may be used.

[0054] Each linear array **310** includes a plurality of radiating elements **312** (see **FIGS. 4, 5A** and **5B**). Each radiating element **312** may comprise, for example, a dipole, a patch or any other appropriate radiating element. Each radiating element **312** may be implemented as a pair of cross-polarized radiating elements, where one radiating element of the pair radiates RF energy with a +45° polarization and the other radiating element of the pair radiates RF energy with a -45° polarization.

[0055] The RF lens **330** narrows the half power beam width ("HPBW") of each of the linear arrays **310** while increasing the gain of the beam by, for example, about 4-5 dB for the 3-beam multi-beam antenna **300** depicted in **FIGS. 3A** and **3B**. All three linear arrays

310 share the same RF lens **330**, and thus each linear array **310** has its HPBW altered in the same manner. The longitudinal axes of the linear arrays **310** of radiating elements **312** can be parallel with the longitudinal axis of the lens **330**. In other embodiments, the axis of the linear arrays **310** can be slightly tilted (2-10°) to the axis of the lens **330** (for example, for better return loss or port-to-port isolation tuning).

[0056] The multi-beam base station antenna **300** as described above may be used to increase system capacity. For example, a conventional 65° azimuth HPBW antenna could be replaced with the multi-beam base station antenna **300** as described above. This would increase the traffic handling capacity for the base station **100**, as each beam would have 4-5 dB higher gain and hence could support higher data rates at the same quality of service. In another example, the multi-beam base station antenna **300** may be employed to reduce antenna count at a tower or other mounting location. The three beams (BEAM 1, BEAM 2, BEAM 3) generated by the antenna **300** are shown schematically in **FIG. 3B**. The azimuth angle for each beam may be approximately perpendicular to the reflector **350** for each of the linear arrays **310**. In the depicted embodiment the -10 dB beamwidth for each of the three beams is approximately 40° and the center of each beam is pointed at azimuth angles of -40°, 0°, and 40°, respectively. Thus, the three beams together provide 120° coverage.

[0057] In some embodiments, the RF lens **330** may be formed of a dielectric material **332** that has a generally homogeneous dielectric constant throughout the lens structure. The RF lens **330** may also, in some embodiments, include a shell such as a hollow, lightweight structure that holds the dielectric material **332**. This is in contrast to a conventional Luneberg lens that is formed of multiple layers of dielectric materials that have different dielectric constants. The lens **330** may be easier and less expensive to manufacture as compared to a Luneberg lens, and may also be more compact. In one embodiment, the RF lens **330** may be formed of a composite dielectric material **332** having a generally uniform dielectric constant of approximately 1.8 and diameter of about 2 wavelengths (λ) of the center frequency of the signals that are to be transmitted through the radiating elements **312**.

[0058] In some embodiments, the RF lens **330** may have a circular cylinder shape. In other embodiments, the RF lens **330** may comprise an elliptical cylinder, which may provide additional performance improvements (for example, reduction of the sidelobes of the central beam). Other shapes may also be used.

[0059] The RF lens **330** may be formed using any of the composite dielectric materials **100**, **150**, **200** that are discussed above with reference to **FIGS. 1A**, **1B** and **2** (and the above-described variations thereof) as the composite dielectric material **332**. The

composite dielectric material **332** focuses the RF energy that radiates from, and is received by, the linear arrays **310**.

[0060] When the cylindrical RF lens **330** is formed of a composite dielectric material **332** that has a homogeneous dielectric constant, depolarization can occur to an incident electromagnetic wave based on its geometry (nonsymmetrical for vertical (V) and horizontal (H) components of the electric field). When the electromagnetic wave crosses the cylindrical lens **330**, polarization along the axis of cylinder ("the VV direction") will have a larger phase delay than polarization perpendicular to cylinder axis ("the HH direction"), causing depolarization. This depolarization can be reduced by constructing the composite dielectric material **332** to have a different dielectric constant in the VV and HH directions; specifically, the dielectric constant for the VV direction should be less than the dielectric constant for the HH direction. In other words, reduction of the naturally occurring depolarization caused by a cylindrically shaped lens **330** can be achieved using an anisotropic composite dielectric material. The difference in dielectric constant may depend on a variety of factors including the size of cylinder and the relationship between beam wavelength and the diameter of the cylinder.

[0061] The composite dielectric material **332** may be fabricated to be an anisotropic material. By mixing, or arranging, different particles with different compositions and/or shapes, different values of dielectric constant in directions parallel and perpendicular to axis of cylinder can be achieved. The composite dielectric material can be designed in some embodiments to have phase differences between the V and H components that are close to 0° to reduce or minimize antenna cross-polarization in a frequency band of interest.

[0062] FIG. 4 is a perspective view of one of the linear arrays **310** that is included in the multi-beam base station antenna **300** of FIGS. 3A-3B. The linear array **310** includes a plurality of radiating elements **312**, a reflector **350**, a phase shifter/divider **318**, and two input connectors **390**. The phase shifter/divider **318** may be used for beam scanning (beam tilting) in the elevation plane.

[0063] FIGS. 5A-5B illustrate the radiating elements **312** in greater detail. In particular, FIG. 5A is a plan view of one of the dual polarized radiating elements **312**, and FIG. 5B is a side view of the dual polarized radiating element **312**. FIG. 5C is a schematic diagram illustrating the equivalent dipoles of the dual polarized radiating element of FIGS. 5A-5B.

[0064] As shown in FIG. 5A, each radiating element **312** includes four dipoles **314** that are arranged in a square or "box" arrangement. The four dipoles **314** are supported by

feed stalks **316**, as illustrated in **FIG. 5B**. As shown in **FIG. 5C**, each radiating element **312** includes two linear orthogonal polarizations (slant $+45^\circ/-45^\circ$), where four equivalent dipoles **315A-315D** are shown forming the two orthogonal polarization vectors **317A**, **317B**.

[0065] Furthermore, linear arrays can have box radiating elements that are configured to radiate in different frequency bands, interleaved with each other as shown in U.S. Patent No. 7,405,710, which is incorporated herein by reference. In these linear arrays, a first array of box-type dipole radiating elements is coaxially disposed within a second box-type dipole assembly and located in one line. This allows a lensed antenna to operate in two frequency bands (for example, 0.79-0.96 and 1.7-2.7 GHz). For the antenna to provide similar beam widths in both frequency bands, the high band radiating elements should have directors. In this case, a low band radiating element may have, for example, a HPBW of $65-50^\circ$, and a high band radiating element may have a HPBW of $45-35^\circ$, and in the result, the lensed antenna will have stable HPBW of about 23° (and beam width about 40° by -10 dB level) across both frequency bands. **FIG. 8** below provides an example of a dual-band antenna that can be used with the lenses according to embodiments of the present invention.

[0066] As is further shown in **FIG. 3B**, the multi-beam base station antenna **300** may also include one or more secondary lenses **340**. A secondary lens **340** can be placed between each linear array **310A**, **310B**, and **310C** and the RF lens **330**. The secondary lenses **340** may facilitate azimuth beamwidth stabilization. The secondary lenses **340** may be formed of dielectric materials and may be shaped as, for example, rods **342**, cylinders **344** or cubes **346** as shown in **FIGS. 6A-6C**, respectively. Other shapes may also be used.

[0067] The use of a cylindrical lens such as lens **330** may significantly reduce grating lobes (and other far sidelobes) in the elevation plane. This reduction is due to the lens **330** focusing the main beam only and defocusing the far sidelobes. This allows increasing spacing between the antenna elements **312**. In non-lensed antennas, the spacing between radiating elements in the array may be selected to control grating lobes using the criterion that $d_{\max}/\lambda < 1/(\sin \theta_0 + 1)$, where $d_{\max}$ is maximum allowed spacing, λ is the wavelength and θ_0 is scan angle. In the lensed antenna **300**, spacing $d_{\max}$ can be increased: $d_{\max}/\lambda = 1.2 \sim 1.3 [1/(\sin \theta_0 + 1)]$. So, the lens **330** allows the spacing between radiating elements **312** to be increased for the multi-beam base station antenna **300** while reducing the number of radiating elements by 20-30%. This results in additional cost advantages for the multi-beam base station antenna **300**.

[0068] Referring again to **FIGS. 3A** and **3B**, the radome **360**, end caps **370** and tray **380** protect the antenna **300**. The radome **360** and tray **380** may be formed of, for example,

extruded plastic, and may be multiple parts or implemented as a single piece. In other embodiments, the tray 380 may be made from metal and may act as an additional reflector to improve the front-to-back ratio for the antenna 300. In some embodiments, an RF absorber (not shown) can be placed between the tray 380 and the linear arrays 310 for additional back lobe performance improvement. The lens 330 is spaced such that the apertures of the linear arrays 310 point at a center axis of the lens 330.

[0069] The antenna 300 of FIGS. 3A-3B has an RF lens 330 that has a flat top and a flat bottom, which may be convenient for manufacturing and/or assembly. However, it will be appreciated that in other embodiments an RF lens 330' may be used instead that has rounded (hemispherical) ends. FIG. 7 schematically illustrates such a lens 330' and its orientation with respect to the central linear array 310B of radiating elements in the antenna 300 if the lens 330 of antenna 300 was replaced with the lens 330'. The hemispherical end portions 334 included in lens 330' provide additional focusing in the elevation plane for the radiating elements 312 at the respective ends of the linear array 310B (as well as for the radiating elements 312 at the lower and upper ends of linear arrays 310A and 310C). This may improve the overall gain of the antenna.

[0070] It will likewise be appreciated that the lenses according to embodiments of the present invention may be used in dual and/or multiband base station antennas. Such antennas may include, for example antennas providing ports for transmission and reception in the 698-960 MHz frequency band as well as in the 1.7-2.7 GHz frequency band or, as another example, in both the 1.7-2.7 GHz frequency band and the 3.4-3.8 GHz frequency band. A homogeneous cylindrical RF lens works well when its diameter $D = 1.5 - 6\lambda$ (where λ is the wavelength in free space of the center frequency of the transmitted signal). Consequently, such lenses may be used with respect to the above example frequency bands as the diameter of the lens may be selected so that the lens will perform well with respect to both frequency bands. In order to provide the same azimuth beamwidth for both bands (if desired in a particular application), the azimuth beam width of the low band linear array (before passing through the RF lens) may be made to be wider than the azimuth beam width of the high band linear array, approximately in proportion to a ratio of the center frequencies of the two bands.

[0071] FIG. 8 schematically illustrates an example configuration for the radiating elements of low band and high band arrays that may be used in example dual-band multi-beam lensed antennas according to further embodiments of the present invention. The linear array 400 shown in FIG. 8 may, for example, be used in place of the linear arrays 310 in the antenna 300 of FIGS. 3A-3B.

[0072] As shown in **FIG. 8**, in one configuration, low band radiating elements **420** that form a first linear array **410** and high band radiating elements **440** that form a second linear array **430** may be mounted on a reflector **450**. The radiating elements **420**, **440** may be arranged together in a single column so that the linear arrays **410**, **430** are co-linear and interspersed. In the depicted embodiments, both the low band radiating elements **420** and the high band radiating elements **440** are implemented as box-type dipole elements. In the depicted embodiment, each high band element **440** includes directors **442** which narrow the azimuth beamwidth of the high band radiating elements. For example, in one embodiment, the low band linear array **410** has an azimuth HPBW of about 65° - 75° and the high band linear array **430** has an azimuth HPBW of about 40° , and the resulting HPBW of the multi-beam lensed antenna is about 23° in both frequency bands.

[0073] **FIGS. 9A** and **9B** are a schematic plan view and a schematic side view, respectively, of a lensed multi-beam base station antenna **500** according to further embodiments of the present invention. As shown in **FIG. 9**, the multi-beam base station antenna **500** primarily differs from the multi-beam base station antenna **300** in that the cylindrical RF lens **330** of antenna **300** is replaced with a plurality of spherical lenses **530** in antenna **500**.

[0074] The use of a plurality of spherical lenses **530** instead of the single cylindrical lens **330** may have several advantages in some applications. For example, in some cases, the use of spherical lenses **530** may require less dielectric material, as the dielectric material is omitted in portions of the regions between adjacent radiating elements when the spherical lenses **530** are used. This may reduce material costs for the antenna. Moreover, spherical lenses **530** generally provide more symmetrical antenna radiation patterns as compared to equivalent cylindrical lenses, and hence improved performance may be obtained. Additionally, the spherical lenses **530** may further reduce grating lobes.

[0075] As shown in **FIGS. 9A** and **9B**, in one example embodiment, two linear arrays **510** are provided having four radiating elements **512** each, and four spherical lenses **530** are provided. The radiating elements **512** may be aligned in rows of two radiating elements **512** each. Each of the spherical lenses **530** may be positioned in front of the two radiating elements **512** in a respective one of the rows of radiating elements **512**. The spherical lenses **530** may be formed in the same manner and of the same materials as the cylindrical lens **330** and hence further description thereof will be omitted.

[0076] **FIG. 10** is flow chart of a method of manufacturing a base station antenna according to certain embodiments of the present invention. As shown in **FIG. 10**, a high

dielectric constant material is ground into small particles (Block **600**). Next, a base dielectric material such as, for example, polyethylene, polystyrene, polytetrafluoroethylene (PTFE), polypropylene, polyurethane silicon or the like is provided in liquid form (Block **610**). The high dielectric constant particles are mixed into the liquid base dielectric material (Block **620**). A nucleating agent such as, for example, boron nitride may be added to the liquid base dielectric material (Block **630**). A blowing agent (e.g., nitrogen) is then used to foam the liquid base dielectric material with the particles of a high dielectric constant material embedded therein (Block **640**) to provide a composite dielectric material. The composite dielectric material may then be used to form a lens for a multi-beam antenna (Block **650**). The lens may be mounted in front of at least one radiating element of the antenna (Block **660**).

[0077] **FIG. 11** is flow chart of a method of manufacturing a base station antenna according to further embodiments of the present invention. As shown in **FIG. 11**, a high dielectric constant material such as a high dielectric constant ceramic is ground into a powder or other small particles (Block **700**). Next, the high dielectric constant material particles are mixed with a liquid adhesive (Block **710**). The mixture of high dielectric constant material particles and adhesive is sucked into a foamed lightweight base dielectric material (Block **720**). The resulting composite dielectric material may then be trimmed into an appropriate shape for use as a lens for a base station antenna (Block **730**). In the fabrication technique described with respect to **FIG. 11**, the base dielectric material may be foamed to have an open-cell structure to facilitate drawing the high dielectric constant material particles and adhesive into the base dielectric material and uniformly distributing the high dielectric constant material particles throughout the base dielectric material.

[0078] **FIG. 12** is a flowchart illustrating a method for manufacturing a composite dielectric material for a lens of a multi-beam antenna according to further embodiments of the present invention. A base dielectric material that is capable of foaming is provided (Block **800**). A high dielectric constant material such as, for example, a ceramic material having a dielectric constant of at least ten is mixed into the base dielectric material while the base dielectric material is in a liquid or semi-liquid form (Block **810**). The high dielectric constant material may be in the form of a powder or other small particles such as elongated particles. The liquid base dielectric material with the particles of high dielectric constant material therein is thoroughly mixed to uniformly distribute the particles of high dielectric constant material throughout the base dielectric material (Block **820**). The composite dielectric

material may then be foamed to provide a lightweight dielectric constant material that is suitable for use in forming a lens of a multi-beam antenna (Block 830).

[0079] It will be appreciated that numerous modifications may be made to the above-described embodiments without departing from the scope of the present invention. For example, with respect to the lightweight composite dielectric materials that are described above that are formed as small blocks that are used to build the lens, it will be understood that different high dielectric constant materials may be used for different blocks and/or within the same blocks. Likewise, different blocks may include different lightweight base dielectric materials.

[0080] While embodiments of the present invention are primarily discussed above with respect to non-conductive particles of a high dielectric constant dielectric material, it will be appreciated that in other embodiments high dielectric constant dielectric materials that have some amount of conductivity may be used.

[0081] While the foregoing examples are described with respect to three beam antennas, additional embodiments including, for example, antennas having 2, 4, 5, 6 or more beams are also contemplated. It will also be appreciated that the lens may be used narrow at least the azimuth beam of a base station antenna from a first value to a second value. The first value may comprise, for example, about 90°, 65° or a wide variety of other azimuth beamwidths. The second value may comprise about 65°, 45°, 33°, 25°, etc. It will also be appreciated that in multi-band antennas according to embodiments of the present invention the degree of narrowing can be the same or different for the linear arrays of different frequency bands.

[0082] Embodiments of the present invention have been described above with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

[0083] It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another. For example, a first element could be termed a second element, and, similarly, a second element could be termed a first element, without departing from the scope of the present invention. As used herein,

the term "and/or" includes any and all combinations of one or more of the associated listed items.

[0084] It will be understood that when an element is referred to as being "on" another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being "directly on" another element, there are no intervening elements present. It will also be understood that when an element is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present. Other words used to describe the relationship between elements should be interpreted in a like fashion (*i.e.*, "between" versus "directly between", "adjacent" versus "directly adjacent", etc.).

[0085] Relative terms such as "below" or "above" or "upper" or "lower" or "horizontal" or "vertical" may be used herein to describe a relationship of one element, layer or region to another element, layer or region as illustrated in the figures. It will be understood that these terms are intended to encompass different orientations of the device in addition to the orientation depicted in the figures.

[0086] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" "comprising," "includes" and/or "including" when used herein, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0087] Aspects and elements of all of the embodiments disclosed above can be combined in any way and/or combination with aspects or elements of other embodiments to provide a plurality of additional embodiments.

That Which is Claimed is:

1. A multi-beam antenna, comprising:
a plurality of radiating elements; and
a lens that is positioned to receive electromagnetic radiation from at least one of the radiating elements, the lens comprising a composite dielectric material,
wherein the composite dielectric material comprises a foamed base dielectric material having particles of a high dielectric constant material embedded therein, the high dielectric constant material having a dielectric constant that is at least three times a dielectric constant of the foamed base dielectric material.
2. The multi-beam antenna of Claim 1, wherein the high dielectric constant material has a dielectric constant of at least 10.
3. The multi-beam antenna of Claim 1 or Claim 2, wherein the high dielectric constant material comprises a ceramic material.
4. The multi-beam antenna of any preceding claim, wherein the high dielectric constant material comprises a metal oxide.
5. The multi-beam antenna of any preceding claim, wherein the foamed dielectric material comprises a foamed plastic.
6. The multi-beam antenna of any preceding claim, wherein the foamed dielectric material has a foaming percentage of at least 50%.
7. The multi-beam antenna of any preceding claim, wherein the high dielectric constant material is substantially uniformly distributed throughout the foamed dielectric material.
8. The multi-beam antenna of any preceding claim, wherein the lens comprises a cylindrical lens.
9. The multi-beam antenna of any preceding claim, wherein the lens comprises at least one spherical lens.
10. The multi-beam antenna of any preceding claim, wherein the high dielectric constant material comprises a powder.

11. The multi-beam antenna of any preceding claim, wherein the composite dielectric material comprises a plurality of blocks.
12. A multi-beam antenna, comprising:
 - a plurality of radiating elements; and
 - a lens that is positioned to receive electromagnetic radiation from at least one of the radiating elements, the lens comprising a plurality of blocks that are contained within an outer shell of a composite dielectric material,wherein each block comprises a composite dielectric material that includes a base dielectric material having particles of a high dielectric constant material embedded therein, the high dielectric constant material having a dielectric constant that is at least three times a dielectric constant of the base dielectric material.
13. The multi-beam antenna of Claim 12, wherein the high dielectric constant material has a dielectric constant of at least 10.
14. The multi-beam antenna of Claim 12 or Claim 13, wherein the base dielectric material comprises a foamed dielectric material and the high dielectric constant material comprises a ceramic material or a metal oxide.
15. The multi-beam antenna of Claim 14, wherein the foamed dielectric material has an open-cell structure and a foaming percentage of at least 50%.
16. The multi-beam antenna of any of Claims 12-16, wherein the high dielectric constant material is substantially uniformly distributed throughout the foamed dielectric material.
17. The multi-beam antenna of Claims 12-16, wherein the lens comprises one of a cylindrical lens or a spherical lens.
18. A method of fabricating a multi-beam antenna, the method comprising:
 - mixing particles of a second dielectric material into a first dielectric material that is in liquid form, the second dielectric material having a dielectric constant that is at least three times a dielectric constant of the first dielectric material;
 - adding a nucleating agent to the first dielectric material;

using a blowing agent to foam the first dielectric material having the particles of the second dielectric material mixed therein;

using the foamed first dielectric material for a lens for the multi-beam antenna; and mounting the lens in front of at least one radiating element.

19. The method of Claim 18, wherein the second dielectric material comprises a ceramic material.

20. The method of Claim 18 or Claim 19, wherein the second dielectric material comprises a metal oxide.

21. The method of any of Claims 18-20, wherein the first dielectric material comprises a foamed plastic.

22. The method of any of Claims 18-21, wherein the first dielectric material has a foaming percentage of at least 50%.

23. The method of any of Claims 18-22, wherein the second dielectric material is substantially uniformly distributed throughout the first dielectric material.

24. The method of any of Claims 18-23, wherein the lens comprises a cylindrical lens.

25. The method of Claims 18-23, wherein the lens comprises at least one spherical lens.

26. The multi-beam antenna of Claim 11, wherein the high dielectric constant material is only embedded into the exterior surfaces of the blocks.

27. The multi-beam antenna of Claims 1-11, wherein the high dielectric constant material comprises an anisotropic dielectric material that has different dielectric constants in the vertical and horizontal directions.

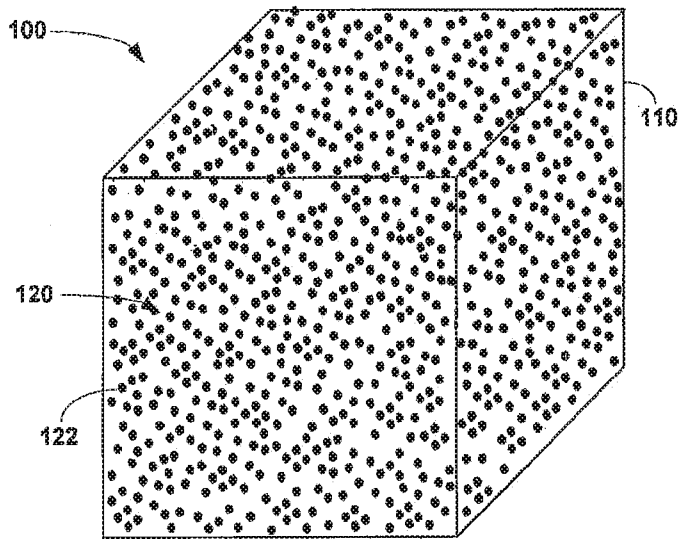


FIG. 1A

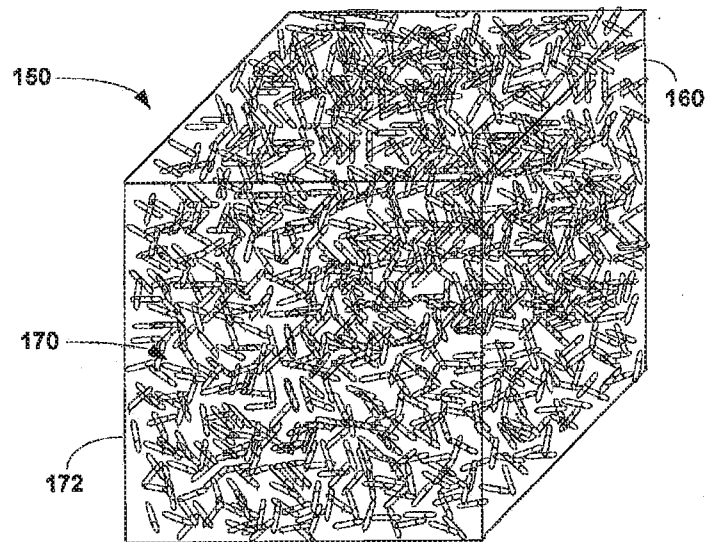


FIG. 1B

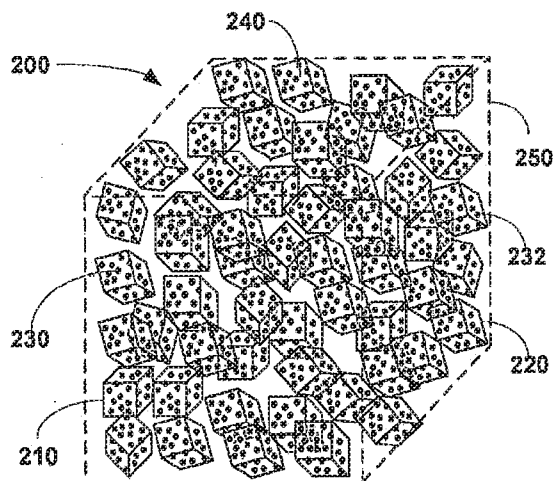
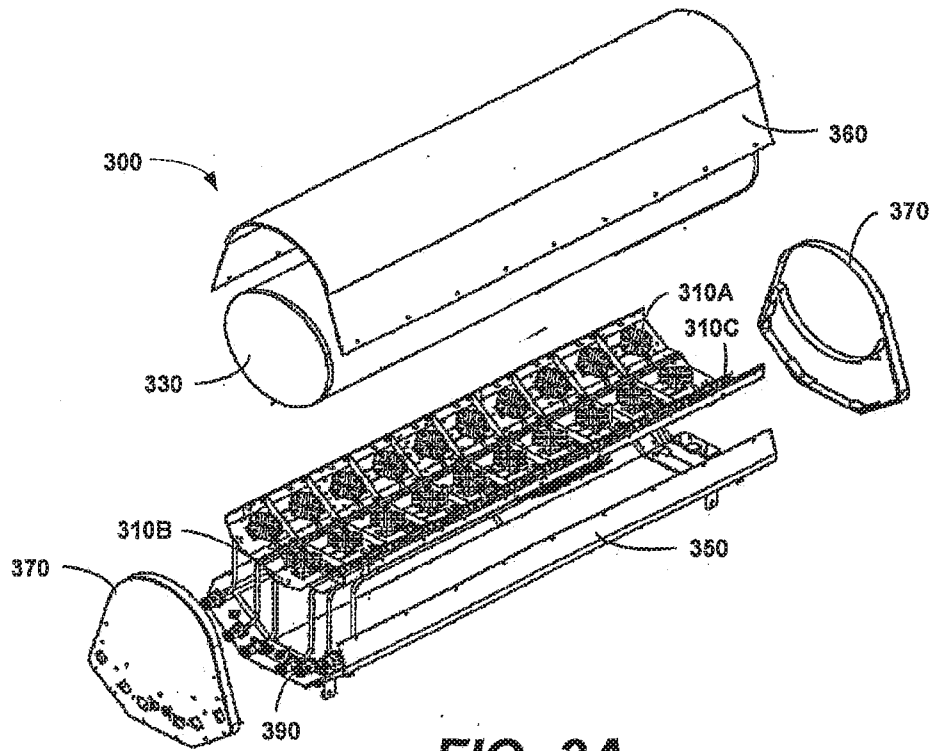
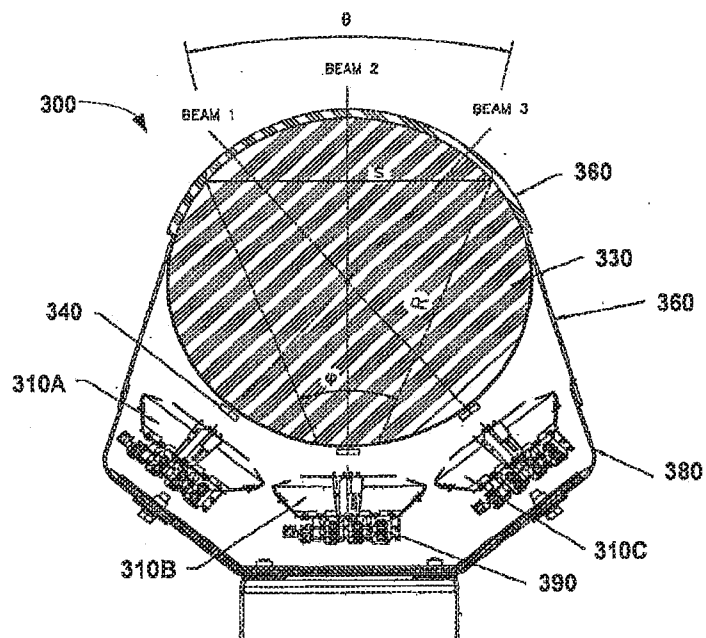


FIG. 2

**FIG. 3A****FIG. 3B**

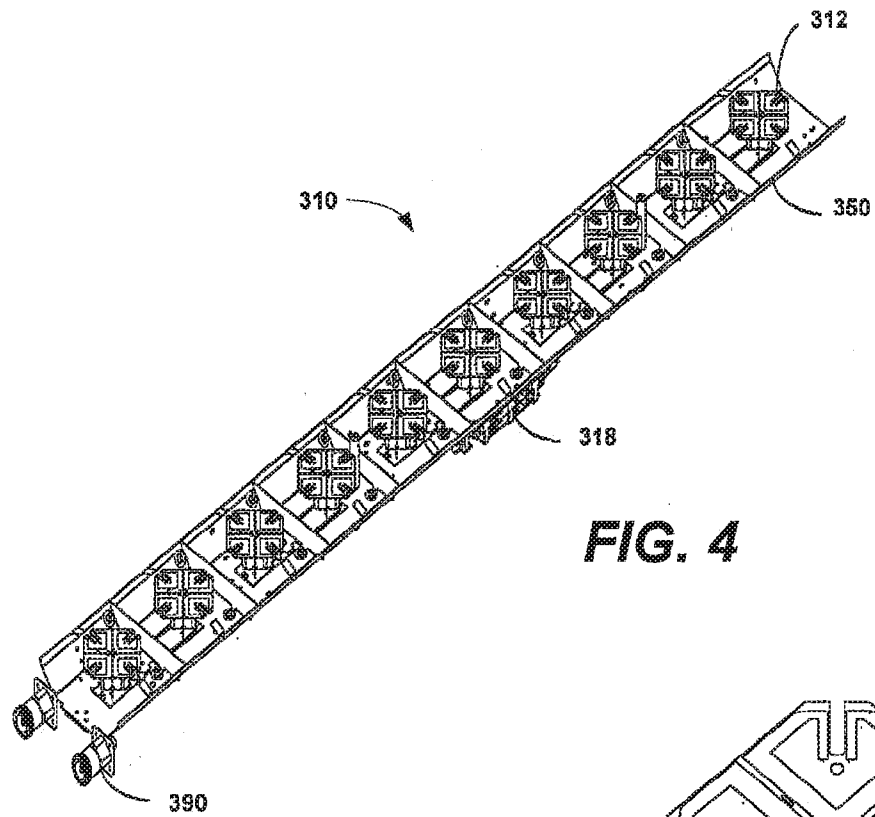


FIG. 4

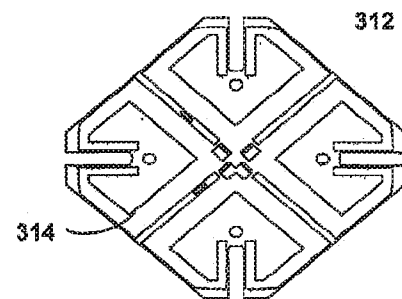


FIG. 5A

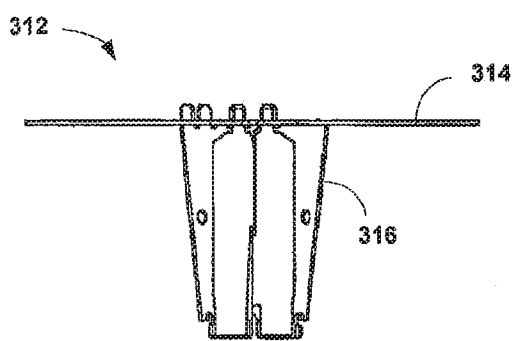


FIG. 5B

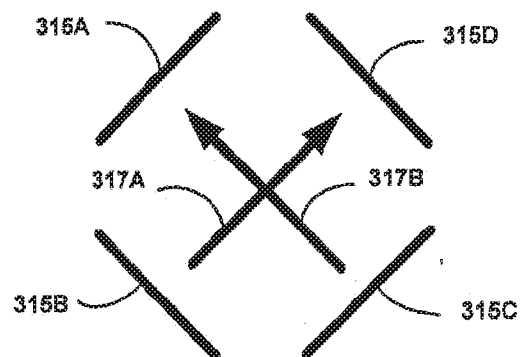


FIG. 5C




FIG. 6A




FIG. 6B




FIG. 6C

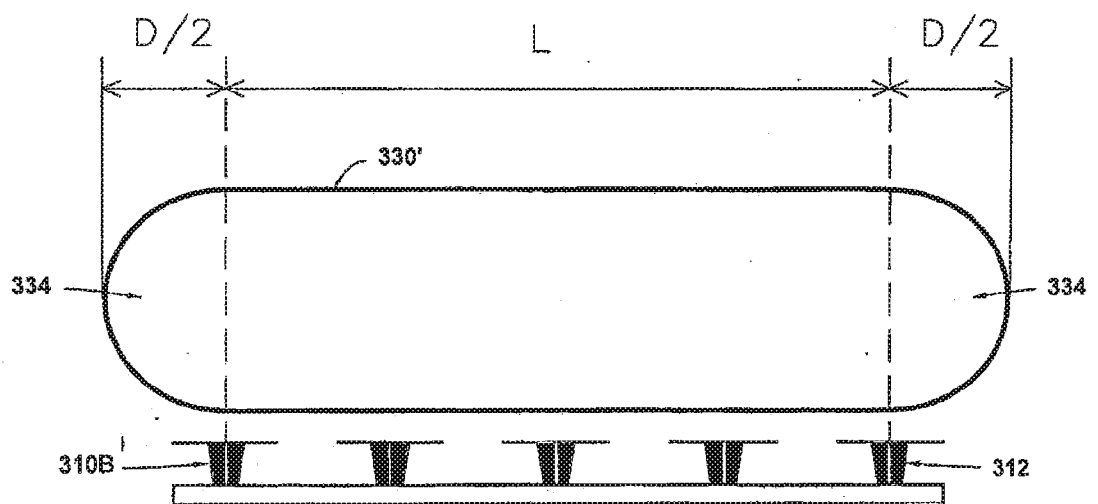
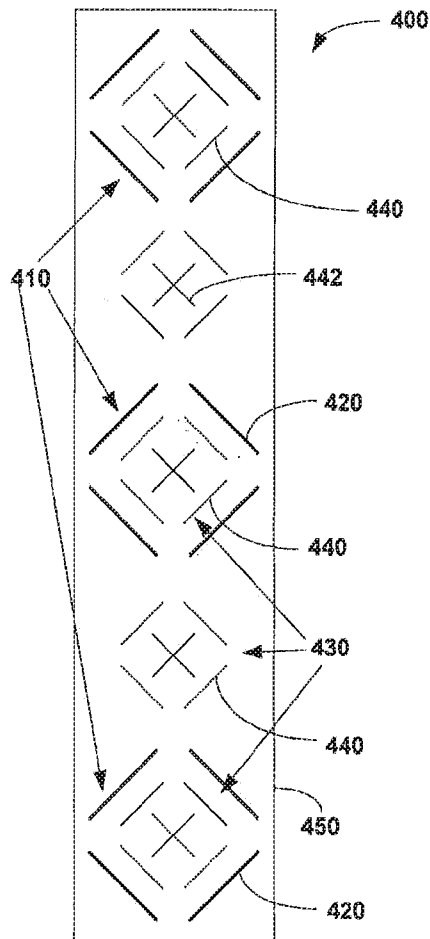
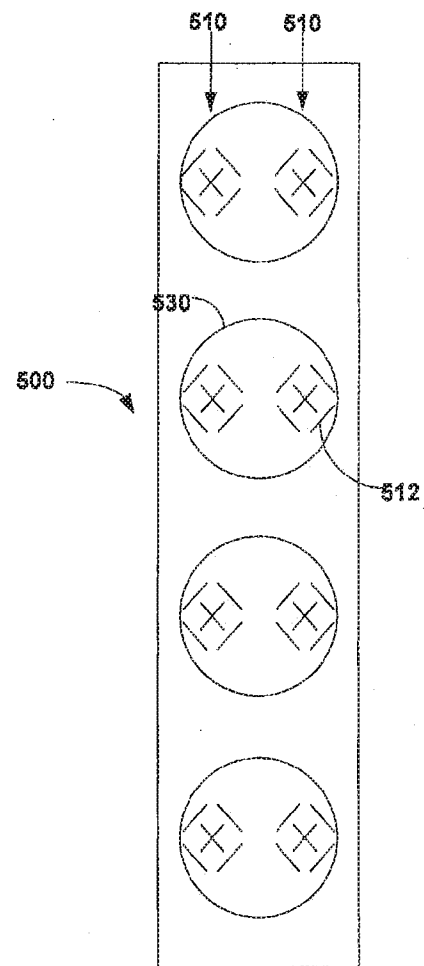
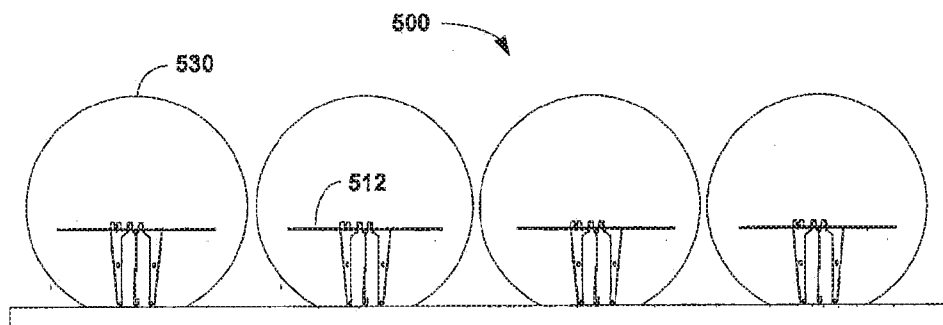
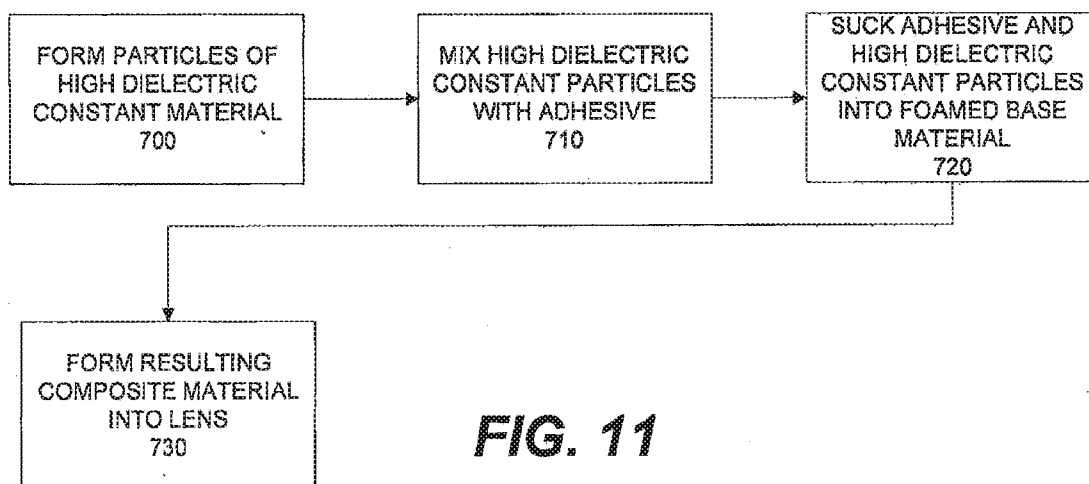
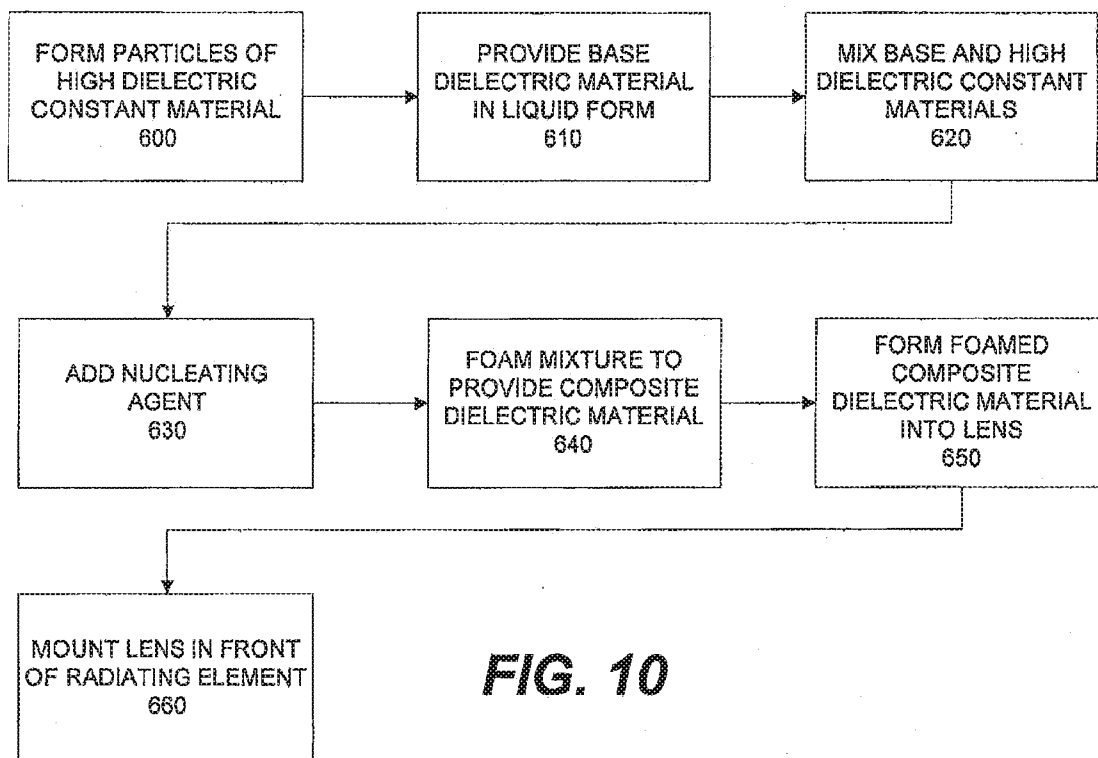
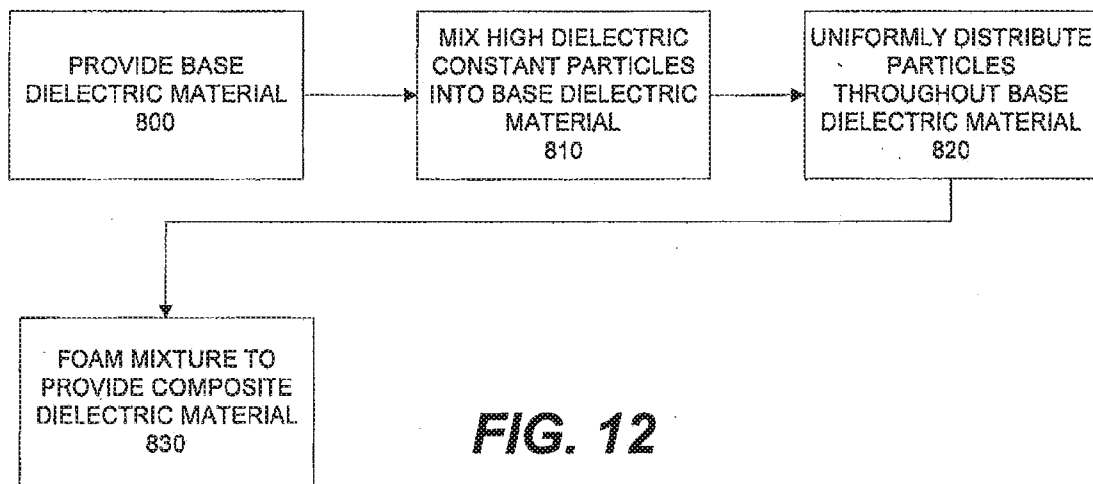


FIG. 7

**FIG. 8****FIG. 9A****FIG. 9B**



**FIG. 12**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/013845**A. CLASSIFICATION OF SUBJECT MATTER****H01Q 3/26(2006.01)i, H01Q 1/38(2006.01)i, H01Q 19/06(2006.01)i, H01Q 3/46(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01Q 3/26; H01Q 15/08; H01Q 13/08; H01Q 19/09; H01Q 21/00; H01Q 19/10; H01Q 19/06; B29C 43/18; H01Q 1/38; H01Q 3/46

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: multi-beam, antenna, lens, dielectric, material, constant

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015-0091767 A1 (COMMScope INC. OF NORTH CAROLINA) 02 April 2015 See paragraphs [0045]–[0049], claims 1–7 and figures 1a–1b.	1–3, 12–15, 18–20
A	US 2015-0042526 A1 (OSSIA, INC.) 12 February 2015 See paragraphs [0050]–[0052], claims 1, 8 and figure 10.	1–3, 12–15, 18–20
A	US 2015-0002352 A1 (CANON KABUSHIKI KAISHA) 01 January 2015 See paragraphs [0086]–[0106], claims 1–4 and figures 1a–1d.	1–3, 12–15, 18–20
A	US 2008-0278394 A1 (CHRISTOPHER TZE-CHAO KOH et al.) 13 November 2008 See paragraphs [0032]–[0033] and figure 1.	1–3, 12–15, 18–20
A	WO 2007-083921 A1 (E.M.W. ANTENNA CO., LTD. et al.) 26 July 2007 See claims 1, 9 and figure 3.	1–3, 12–15, 18–20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 April 2017 (28.04.2017)

Date of mailing of the international search report

28 April 2017 (28.04.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

JANG, Gijeong

Telephone No. +82-42-481-8364



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/013845

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0091767 A1	02/04/2015	CN 105659434 A EP 3044831 A2 US 2015-0070230 A1 WO 2015-035400 A2 WO 2015-035400 A3	08/06/2016 20/07/2016 12/03/2015 12/03/2015 30/04/2015
US 2015-0042526 A1	12/02/2015	EP 2951906 A1 JP 2016-512677 A JP 2016-528840 A KR 10-2016-0008160 A US 2014-0217967 A1 US 9553473 B2 WO 2014-121296 A1 WO 2015-024006 A1	09/12/2015 28/04/2016 15/09/2016 21/01/2016 07/08/2014 24/01/2017 07/08/2014 19/02/2015
US 2015-0002352 A1	01/01/2015	GB 2497328 A JP 2015-505182 A WO 2013-083794 A1	12/06/2013 16/02/2015 13/06/2013
US 2008-0278394 A1	13/11/2008	US 8134511 B2	13/03/2012
WO 2007-083921 A1	26/07/2007	KR 10-0632692 B1	29/09/2006

International application No.
PCT/US2017/013845

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 26
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Claim 26 is regarded to be unclear because the claim refers to multiple dependent claim which does not comply with PCT Rule 6.4(a).
3. ☒ Claims Nos.: 4-11,16-17,21-25,27
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.