

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2007200413 B2**

(54) Title
An improved articulating surgical instrument

(51) International Patent Classification(s)
A61B 17/12 (2006.01)

(21) Application No: **2007200413** (22) Date of Filing: **2007.01.31**

(30) Priority Data

(31) Number **11/352471** (32) Date **2006.02.07** (33) Country **US**

(43) Publication Date: **2007.08.23**

(43) Publication Journal Date: **2007.08.23**

(44) Accepted Journal Date: **2012.03.08**

(71) Applicant(s)
Ethicon Endo-Surgery, Inc.

(72) Inventor(s)
Widenhouse, Christopher W.; Hassler Jr., William L.

(74) Agent / Attorney
Freehills Patent & Trade Mark Attorneys, Level 43 101 Collins Street, Melbourne, VIC, 3000

(56) Related Art
DE 4243715 A1
DE 19608809 A1
FR 2713492 A1

Abstract of the Disclosure

5 A device for aiding a surgical procedure, the device having an elongated shaft with a distal end, a proximal end and a longitudinal axis therebetween. The proximal end has a handle attached thereto, and the distal end has an end effector attached thereto. The shaft has first and second spaced apart strips running along the longitudinal axis and attached to the distal end of the end effector. The end effector includes a plurality of spaced apart links disposed along the longitudinal axis between the distal end of the end effector the distal end of the shaft. The strips run through the links, and each link is attached to at least one strip. The device also includes an actuator attached to the handle. The actuator pulls the first strip proximally, causing the links and the end effector to curve in the direction of the first strip. The actuator also includes a means for preventing the first strip from moving proximally beyond a predetermined amount and thereby causing the end effector to bend only up to a predetermined angle. In addition, the predetermined angle is such that the links never make contact with one another.

AUSTRALIA

Patents Act 1990

COMPLETE SPECIFICATION STANDARD PATENT

Invention Title: **An improved articulating surgical instrument**

The following statement is a full description of this invention, including the best method of performing it known to us:

AN IMPROVED ARTICULATING SURGICAL INSTRUMENT

Field of the Invention

The present invention has application in conventional endoscopic and open surgical instrumentation as well as application in robotic-assisted surgery. The present invention has
5 even further relation to adjustable surgically implantable bands, such as gastric bands for the treatment of obesity.

Background of the Invention

The percentage of the world's population suffering from morbid obesity is steadily increasing. Severely obese persons are susceptible to increased risk of heart disease, stroke,
10 diabetes, pulmonary disease, and accidents. Because of the effect of morbid obesity to the life of the patient, methods of treating morbid obesity are being researched.

Numerous non-operative therapies for morbid obesity have been tried with virtually no permanent success. Dietary counseling, behavior modification, wiring a patient's jaws shut, and pharmacological methods have all been tried, and failed to correct the condition. Mechanical
15 apparatuses for insertion into the body through non-surgical means, such as the use of gastric balloons to fill the stomach have also been employed in the treatment of the condition. Such devices cannot be employed over a long term, however, as they often cause severe irritation, necessitating their periodic removal and hence interruption of treatment. Thus, the medical community has evolved surgical approaches for treatment of morbid obesity.

Most surgical procedures for treatment of morbid obesity may generally be classified as either being directed toward the prevention of absorption of food (malabsorption), or restriction of stomach to make the patient feel full (gastric restriction) The most common malabsorption and gastric restriction technique is the gastric bypass. In variations of this technique, the stomach is horizontally divided into two isolated pouches, with the upper pouch
20 having a small food capacity. The upper pouch is connected to the small intestine, or jejunum, through a small stoma, which restricts the processing of food by the greatly reduced useable stomach. Since food bypass much of the intestines, the amount of absorption of food is greatly reduced.

There are many disadvantages to the above procedure. Typically the above
30 mentioned procedure is performed in an open surgical environment. Current minimally invasive

techniques are difficult for surgeons to master, and have many additional drawbacks. Also, there is a high level of patient uneasiness with the idea of such a drastic procedure which is not easily reversible. In addition, all malabsorption techniques carry ongoing risks and side effects to the patient, including malnutrition and dumping syndrome.

Consequently, many patients and physicians prefer to undergo a gastric restriction procedure for the treatment of morbid obesity. One of the most common procedures involves the implantation of an adjustable gastric band. Examples of an adjustable gastric band can be found in U.S. Patents 4,592,339 issued to Kuzmak; RE 36176 issued to Kuzmak; 5,226,429 issued to Kuzmak; 6,102,922 issued to Jacobson and 5,601,604 issued to Vincent, all of which are hereby incorporated herein by reference. In accordance with current practice, a gastric band is operatively placed to encircle the stomach. This divides the stomach into two parts with a stoma in-between. An upper portion, or a pouch, which is relatively small, and a lower portion which is relatively large. The small partitioned portion of the stomach effectively becomes the patients new stomach, requiring very little food to make the patient feel full.

Once positioned around the stomach, the ends of the gastric band are fastened to one another and the band is held securely in place by folding a portion of the gastric wall over the band and closing the folded tissue with sutures placed therethrough thereby preventing the band from slipping and the encircled stoma from expanding.

However, positioning the band around the stomach is often difficult. The band needs to be placed around the stomach, including the posterior side which the physician has little access to. One commercially available product available for the physician to do this is the Goldfinger® sold by Ethicon Endo-Surgery, Inc., Cincinnati OH. The instrument basically comprises a straight shaft that has an end which starts out straight but can progressively curve by actuation of a device at the instruments proximal end. Similar devices are also shown in patent literature such as the device disclosed in U.S. Patent 5,467,763 issued to McMahon et al. on November 21, 1995, which is hereby incorporated herein by reference.

When using such a device, the physician uses it first as a blunt dissector to make what is referred to as the retrogastric tunnel. This is a tunnel behind the stomach which goes through the connective tissue surrounding the stomach just below the gastro-esophageal junction. Thereafter, the band is connected to the distal end of the device with suture, and the above described device drives or pulls the band through the tunnel. A straight instrument would have

2007200413 09 Feb 2012

difficulty doing this, but an articulating one which can curve can do the job nicely.

However, there has been a desire to improve upon the commercially available articulating surgical devices.

Reference to any prior art or background information in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that this prior art or background information forms part of the common general knowledge in Australia or any other jurisdiction; or that this prior art or background information could reasonably be expected to be ascertained, understood and regarded as relevant by a person skilled in the art.

As used herein, except where the context requires otherwise, the term "comprise" and variations of the term, such as "comprising", "comprises" and "comprised", are not intended to exclude further additives, components, integers or steps.

Summary of the Invention

In accordance with the present invention there is provided a device for aiding a surgical procedure, the device having an elongated shaft with a distal end, a proximal end and a longitudinal axis therebetween. The proximal end has a handle attached thereto, and the distal end has an end effector attached thereto. The shaft has first and second spaced apart strips running along the longitudinal axis and attached to a distal end of the end effector. The end effector includes a plurality of spaced apart links disposed along the longitudinal axis between the distal end of the end effector and the distal end of the shaft. The strips run through the links, and each link is attached to at least one strip. Each link has an internal concave contour adjacent to the second strip with an axis of curvature perpendicular to the longitudinal axis. The device also includes an actuator attached to the handle. The actuator pulls the first strip proximally, causing the links and the end effector to curve in the direction of the first strip. The actuator also includes a means for preventing the first strip from moving proximally beyond a predetermined amount and thereby causing the end effector to bend only up to a predetermined angle. In addition, the predetermined angle is such that the links never make contact with one another.

According to a second aspect, the first and second strips each comprise a plurality of juxtaposed strips.

Detailed Description of the Drawings

The novel features of the invention are set forth with particularity in the appended claims. The invention itself, however, both as to organization and methods of operation, together with further objects and advantages thereof, may best be understood by reference to the following description, taken in conjunction with the accompanying drawings in which:

Figure 1 is a plan view of device 10 made in accordance with the present invention.

Figure 2A is a perspective view an end effector for device 10 made in accordance with the present invention.

Figure 2B is a cross-section view of Figure 1, taken along lines 2B-2B.

Figure 3 is a close up view showing a portion of the end effector shown in Figure 2B

Figure 4 is another close up view showing a portion of the end effector shown in Figure 2B.

Figure 5 is a plan view of the end effector shown in Figure 2A.

Figure 6 is a cross-section view of the handle shown in Figure 1, taken along lines 6-6.

Figure 7 is a plan view of the end effector shown in its articulated state.

Detailed Description of the Invention

Referring now to the drawings wherein like numerals indicate the same element throughout the views, there is shown in figure 1 a device 10, for aiding in a surgical procedure.

Device 10 has an elongated shaft 12 with a distal end 14, a proximal end 16 and a longitudinal axis 18 therebetween. The proximal end 16 has a handle 20 attached thereto, and the distal end 14 has an end effector 50 attached thereto. Handle 20 has an actuator 22, and an actuator release 24 attached thereto. As will be apparent later, the handle is held in the surgeon's hand with the thumb portion of the surgeon's palm resting over actuator 22. The angle that end effector 50 bends is controlled by the amount that the actuator is depressed. The more actuator 22 is depressed into the handle, the larger the angle of end effector articulation. However, before actuator 22 can be moved, the surgeon must release it by pressing the actuator release 24 into the instrument handle, and holding it there while the articulation angle is changed. In addition, to

2007200413 09 Feb 2012

release the end effector articulation causing it to go straight, the release trigger must be depressed into the handle.

As seen from Figures 2A, 2B, and 3, the end effector includes a plurality of spaced apart links 52 disposed along the longitudinal axis between the distal end of the end effector 54 the distal end of the shaft 14. Shaft 12 has a first strip 72 running along the longitudinal axis and through links 52 from the handle 20 to a distal end of the end effector 54 where it is attached thereto. Device 10 also includes a second strip 74 running along the longitudinal axis through links 52 from the distal end 14 of shaft 12, where it is rigidly attached thereto, to distal end 54 of end effector 50. First and Second Strips 72 and 74 are preferably made from stainless steel or any other suitable material known to those skilled in the art. In addition, strips 72 and 74 can actually comprise a bundle or plurality of strips. Having a plurality of juxtaposed strips provide for greater stiffness while still providing good bending. The Fixed base 56 holds the second strip or bundle of strips 74. Base 56 and strips 74 are rigidly attached to the shaft 12. The Sliding base 60, which pulls on the first strip or plurality of strips 72 in a proximal direction, causes end effector 50 to bend or articulate in a direction towards first strip 72.

Both sets of strips 72 and 74 are attached to the distal end of end effector 54. Since the individual strips act as leaves in a leaf spring, they have to move in a linear direction with respect to each other. Because the leaves are rigidly fixed in the tip, they therefore have to slide with respect to each other within the pockets 76 of the bases 56 and 60 that hold them during actuation of the articulating tip. The larger the angle achieved during tip articulation, the more these strips will slide with respect to each other within the base pockets 76. These pockets have to be significantly longer than the length of the square tabs 80 located at the bottom of the strips being held. This provides adequate clearance needed for the full range of sliding motion of the strips with respect to each other.

Links 52 act as anti-buckling devices for the strips 72 and 74, which hold the two sets or bundles of strips 72 and 74 at a fixed distance from each other, and keep the sets of strips, or leaf springs from buckling. These links also keep the individual strips or leaves from buckling with respect to each other within the bundle so that they act more like a single beam in bending, reinforcing each other like a normal leaf spring. These links are made in two identical halves that will eventually be designed to be pressed fit into each other to hold the strips together, and form a single link.

2007200413 09 Feb 2012

Strips 72 in the movable base 60 can be covered by a thin Teflon, or other lubricious material that keeps them from popping out of the pocket 76, and helps reduce the friction of the base sliding against the inside of the instrument shaft. As seen from the figures, strip or strips 72 have a series of notches 82 to hold links 52 in place. Strip or strips 74 can be held in place by a stainless steel member or fixed base retainer 84 that extends beyond the end of the fixed base 56. Retainer 84 also retains the notched strips 74 in the pocket, and helps improve the stiffness of the tip.

As seen in figure 4, links 52 have an the internal concave contour 51 curved in the direction of articulation (concaved). The radius of curvature of contour feature 51 is less than the radius of curvature of strip 74 when it is bent to its maximum angle to help prevent binding. If the internal slots of the links were not curved in this fashion, then the strips would be forced into bending only between the links, and this would probably result in plastic deformation of the

strips, at low force levels. Also, please note the radiused corners where the internal contour cavities intersect with both the top and bottom face of the link. This radius avoids constraining the strips during articulation.

The slots 55 in links 52 containing strips 72 has a contour 53 curvature (convexed).
5 This curvature is to keep the link from pinching the strips 72 when they are being pulled through the link 52. The friction between the strips 72 and the link 52 during articulation will tend to cause the link to rotate slightly downwards which would tend to bind the links 52 and strips 72. By having this reverse curvature, this frictional binding is minimized, and its' effect on the force to actuate the articulating tip is also minimized. The larger this binding friction, the less round
10 the articulation will be. Put another way, the higher the friction, the more bending will occur at the base of the tip, and less at the top. This might eventually require the use of a lubricant in the links such as Sodium Sterate.

As seen from figure 5, end effector 54 can be covered by a cylindrical sleeve, or
cover 90 to prevent human tissue from catching on the links, and strips, resulting in tissue
15 trauma. Cover 90 can be made from an elastomer such as silicone or a polyurethane thermoplastic elastomer, such as Pellethane (heat shrink tubing). End effector 50 acts as a blunt dissector when doing a surgical procedure such as those described in the background section herein. The dissection tip also has two different notch features. There is an angled notch 92
which can receive a suture loop on the end of an adjustable gastric band. There is also a keyhole
20 feature 94 which can receive a band pulling tab present on many adjustable gastric bands.

The links 52 should also be as long as possible but also cannot be allowed to touch
each other as the tip articulates. Causing them to touch may upset the shape the tip will take, as
well as the uniformity of the force loading in the tip. It is also necessary that the links not touch
each other even under load, as these links are not designed to take axial loads, only the anti-
25 buckling loads that are small.

Referring now to Figure 6, there is shown the handle 20 of device 10. Handle 20 is
very similar to the handle of the device described in U.S. Patent application serial no. 10/741875,
publication no. US-2004-0254537-A1, which is hereby incorporated herein by reference. When
the surgeon depresses the articulation release trigger 24 with his index finger, the shaft 130 on
30 the back of the release trigger 24 pushes on the ratchet pall arm 120 causing it to rotate. This rotation causes the teeth 132 on the other side of arm 120 to disengage from the matching ratchet teeth 133 on the articulation drive shaft 122, which is connected to the sliding base 60

pulling it and strips 72 proximally. This allows drive shaft 122 to move along the axis of the instrument and accomplish articulation of the tip.

While the ratchet is disengaged by depressing the release trigger, the surgeon can then either depress the actuator 22 to articulate the tip or release the lever allowing the actuator reset spring 121 to push the actuator back up, and thereby de-articulate the end effector. When the surgeon sees that the end effector is at the desired articulation angle, he can then release the actuator 22, which will move back forward due to the force supplied by the release trigger reset spring 123. Correspondingly, pall arm reset spring 125 will then cause the ratchet pall arm 120 to rotate back so that the ratchet teeth 132 will then re-engage the teeth 133 on the articulation drive shaft 122, thereby preventing any change in the setting of the articulation mechanism. This ratchet arrangement is designed so as to minimize the risk of any unintended changes in the articulation of the instrument tip. This is accomplished by having the surgeon holding the release trigger 24 in the depressed position while changing the tip articulation angle. The instrument articulation cannot be readily changed without the depression of this trigger.

The actuator also includes a means for preventing the first strip from moving proximally beyond a predetermined amount and thereby causing the end effector to bend only up to a predetermined angle. This is done by limiting the movement of the drive shaft 122, by correctly sizing the length of the teeth 133. A preferred maximum angle for end effector articulation is 90 degrees. In addition, the predetermined angle is such that the links never make contact with one another. Figure 7 shows the instrument in its articulated position.

Lastly, it is preferred that device 10 be sterilized. This can be done by any number of ways known to those skilled in the art including beta or gamma radiation, ethylene oxide, steam.

It will become readily apparent to those skilled in the art that the above invention has equally applicability to other types of implantable bands. For example, bands are used for the treatment of fecal incontinence. One such band is described in U.S. Patent 6,461,292 which is hereby incorporated herein by reference. Bands can also be used to treat urinary incontinence. One such band is described in U.S. Patent Application 2003/0105385, which is hereby incorporated herein by reference. Bands can also be used to treat heartburn and/or acid reflux. One such band is described in U.S. Patent 6,470,892, which is hereby incorporated herein by reference. Bands can also be used to treat impotence. One such band is described in U.S. Patent Application 2003/0114729, which is hereby incorporated herein by reference.

While preferred embodiments of the present invention have been shown and described herein, it will be obvious to those skilled in the art that such embodiments are provided by way of example only. Numerous variations, changes, and substitutions will now occur to those skilled in the art without departing from the invention. For example, as would be apparent to those skilled in the art, the disclosures herein have equal application in robotic-assisted surgery. In addition, it should be understood that every structure described above has a function and such structure can be referred to as a means for performing that function. Accordingly, it is intended that the invention be limited only by the spirit and scope of the appended claims.

The claims defining the invention are as follows:

1. A device for aiding a surgical procedure, said device comprising:

a. an elongated shaft having a distal end, a proximal end and a longitudinal axis therebetween, said proximal end having a handle attached thereto, and said distal end having an end effector attached thereto;

b. said shaft having a first strip running along said longitudinal axis from said handle to a distal end of said end effector where it is attached thereto, and a second strip, parallel to said first strip, running along said longitudinal axis from said distal end of said shaft to said distal end of said end effector where it is attached thereto;

c. said end effector comprising a plurality of spaced apart links disposed along said longitudinal axis between said distal end of the end effector and said distal end of said shaft such that said strips run through said links, each link being attached to at least one strip, and each link having an internal concave contour adjacent to said second strip with an axis of curvature perpendicular to said longitudinal axis;

d. an actuator attached to said handle, said actuator pulls said first strip proximally, causing said links and said end effector to curve in the direction of said first strip, said actuator including a means for preventing said first strip from moving proximally beyond a predetermined amount and thereby causing said end effector to bend only up to a predetermined angle, wherein said predetermined angle is such that said links never make contact with one another.

2. The device of claim 1, wherein each of said links is attached to said second strip.

3. The device of claim 1 or 2, wherein said first strip comprises a plurality of juxtaposed strips.

4. The device of claim 1, 2 or 3, wherein said second strip comprises a plurality of juxtaposed strips.

5. The device of any one of the preceding claims, wherein said links have an internal convex surface adjacent said first strip.

6. The device of any one of the preceding claims, wherein said predetermined angle is no greater than 90 degrees.

2007200413 09 Feb 2012

7. The device of any one of the preceding claims, wherein said end effector is covered with an elastomeric boot.

8. The device of claim 7, wherein said boot is made from pellethane.

5 9. The device of any one of the preceding claims, wherein said first and second strips are made from stainless steel.

10. A device for aiding a surgical procedure, said device comprising:

a. an elongated shaft having a distal end, a proximal end and a longitudinal axis therebetween, said proximal end having a handle attached thereto, and said distal end having an end effector attached thereto;

0 b. said shaft having a first plurality of juxtaposed strips running along said longitudinal axis from said handle to a distal end of said end effector where it is attached thereto, and a second plurality of juxtaposed strips, parallel to said first strips, running along said longitudinal axis from said distal end of said shaft to said distal end of said end effector where it is attached thereto;

5 c. said end effector comprising a plurality of spaced apart links disposed along said longitudinal axis between said distal end of the end effector and said distal end of said shaft such that said strips run through said links, each link being attached to at least one plurality of juxtaposed strips, and each link having an internal concave contour adjacent to the second plurality of juxtaposed strips with an axis of curvature perpendicular to the longitudinal axis;

20 d. an actuator attached to said handle, said actuator pulls said first strips proximally, causing said links and said end effector to curve in the direction of said first strips, said actuator including a means for preventing said first strips from moving proximally beyond a predetermined amount and thereby causing said end effector to bend only up to a predetermined angle, wherein said predetermined angle is such that said links never make contact with one
25 another.

11. The device of claim 10, wherein each of said links is attached to said second plurality of juxtaposed strips.

12. The device of claim 10 or 11, wherein said links have an internal convex surface adjacent said first plurality of juxtaposed strips.

2007200413 09 Feb 2012

13. The device of claim 10, 11 or 12, wherein said predetermined angle is no greater than 90 degrees.

14. The device of any one of claims 10 to 13, wherein said end effector is covered with an elastomeric boot.

5 15. The device of claim 14, wherein said boot is made from pellethane.

16. The device of any one of claims 10 to 15, wherein said first and second strips are made from stainless steel.

17. A device for aiding a surgical procedure substantially as hereinbefore described with reference to the accompanying drawings.

FIG. 1

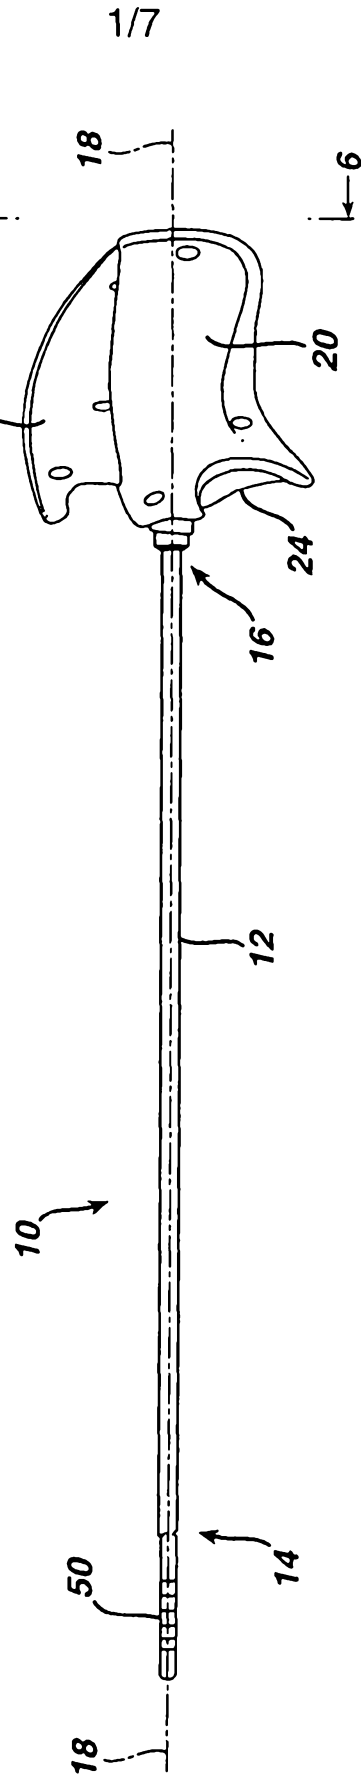


FIG. 2A

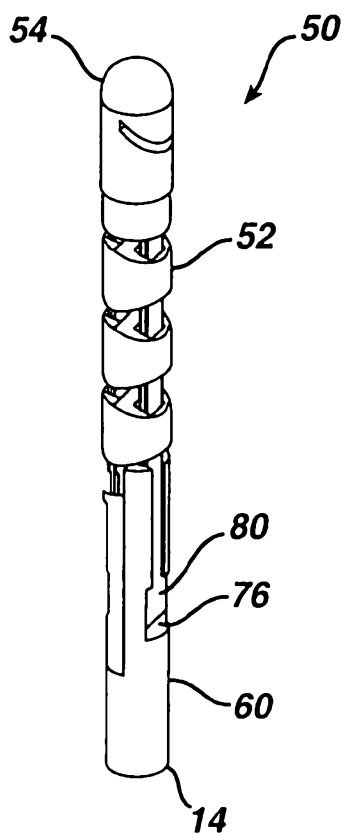


FIG. 2B

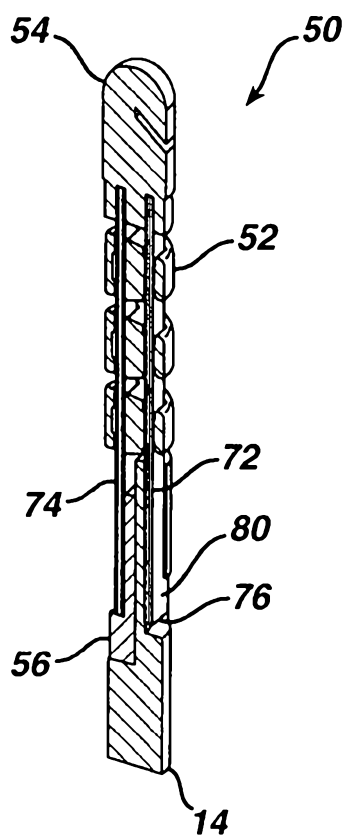


FIG. 3

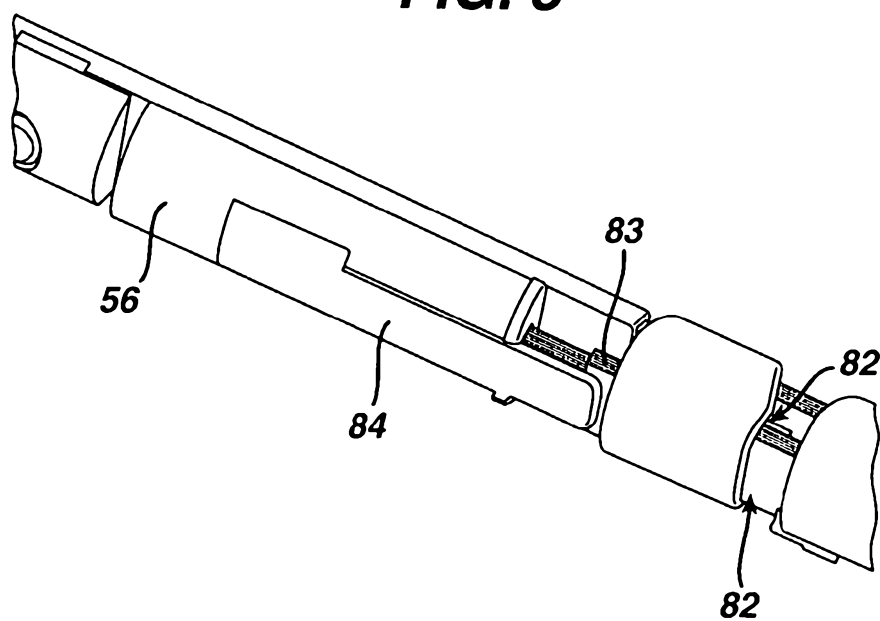


FIG. 4

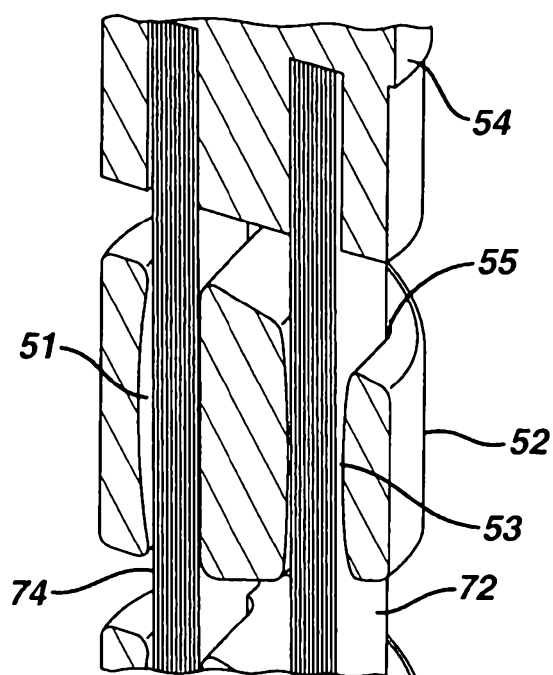
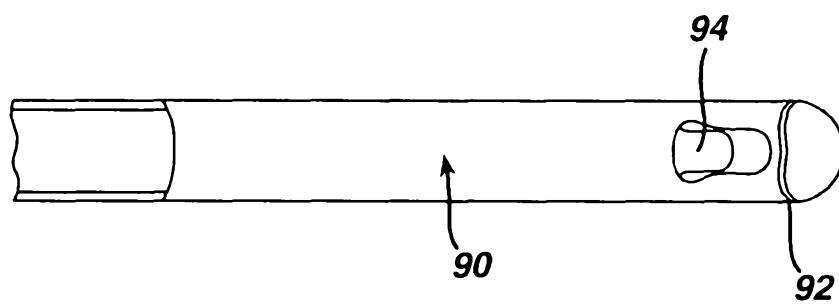


FIG. 5



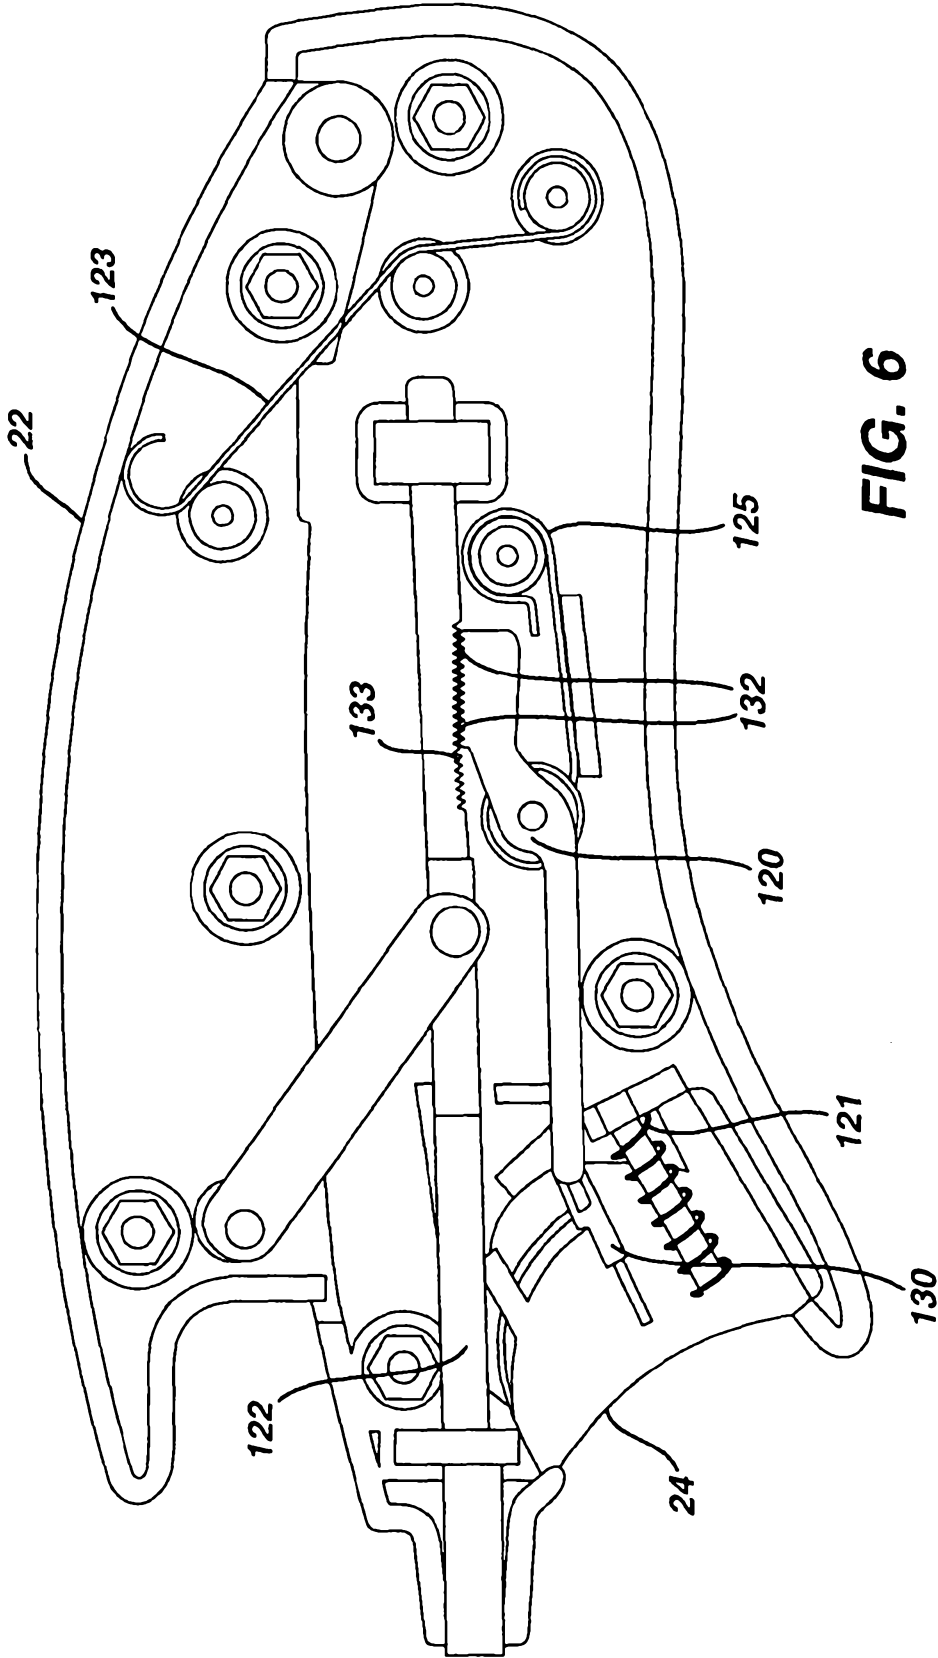


FIG. 6

FIG. 7

