US 20130126635A1

(19) **United States**

(12) **Patent Application Publication**

Klinefelter et al.

(10) **Pub. No.: US 2013/0126635 A1**

(43) **Pub. Date: May 23, 2013**

(54) **MULTI-NOZZLE ROTARY SPRINKLER**

(71) Applicant: **IRRIGREEN, LLC**, Eden Prairie, MN (US)

(72) Inventors: **Gary Klinefelter**, Eden Prairie, MN (US); **Ivan Tony Haugen**, Minnetonka, MN (US)

(73) Assignee: **IRRIGREEN, LLC**, Eden Prairie, MN (US)

(21) Appl. No.: **13/744,588**

(22) Filed: **Jan. 18, 2013**

Related U.S. Application Data

(63) Continuation-in-part of application No. PCT/US2011/044337, filed on Jul. 18, 2011.

(60) Provisional application No. 61/605,374, filed on Mar. 1, 2012.

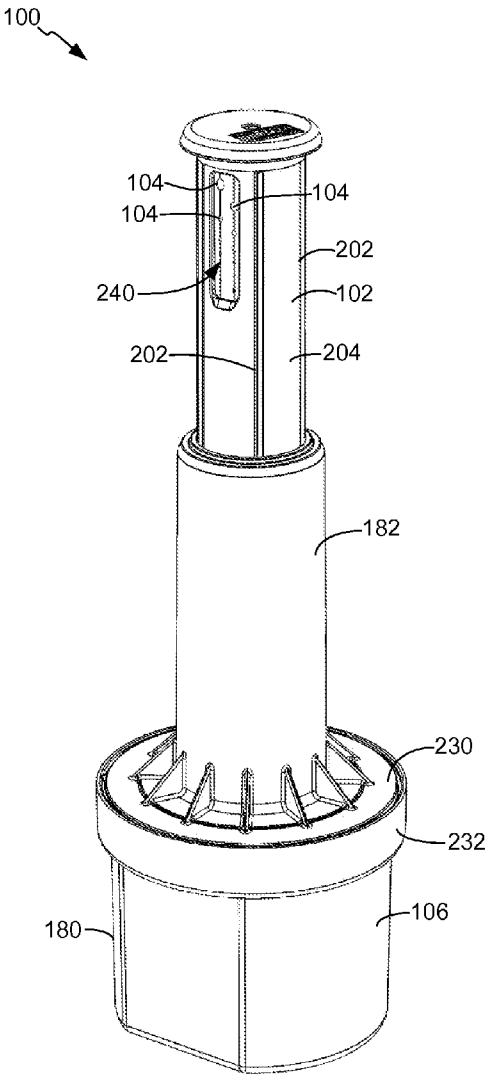
Publication Classification

(51) **Int. Cl.**
B05B 12/00 (2006.01)

(52) **U.S. Cl.**
CPC ***B05B 12/006*** (2013.01)
USPC **239/76**; 239/246

(57) **ABSTRACT**

A rotary sprinkler comprises a nozzle head and at least 8 nozzles supported by the nozzle head. The nozzles are configured to discharge water streams at substantially the same velocity, but to different radial distances from the nozzle head. Each water stream produces a spray pattern that overlaps at least one adjoining spray pattern.



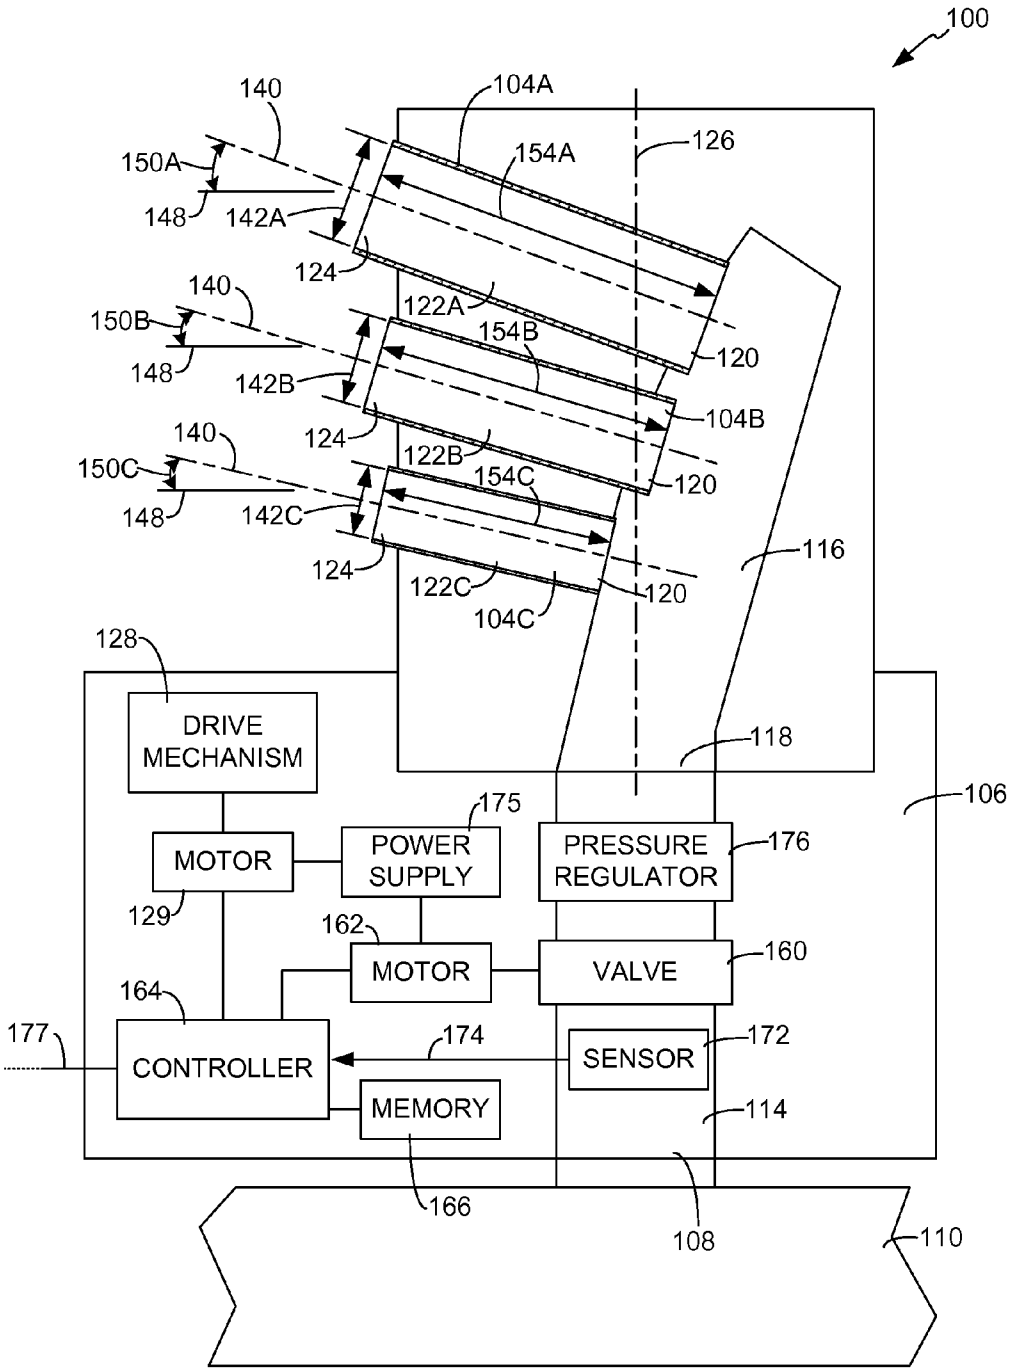

100
140
104A
150A
154A
126
148
142A
124
122A
140
150B
154B
148
142B
120
104B
124
140
122B
150C
154C
148
142C
120
124
116
122C
120
104C
128
DRIVE MECHANISM
118
106
175
MOTOR
POWER SUPPLY
PRESSURE REGULATOR
176
129
162
MOTOR
VALVE
160
164
177
CONTROLLER
174
SENSOR
172
MEMORY
114
166
108
110

FIG. 1

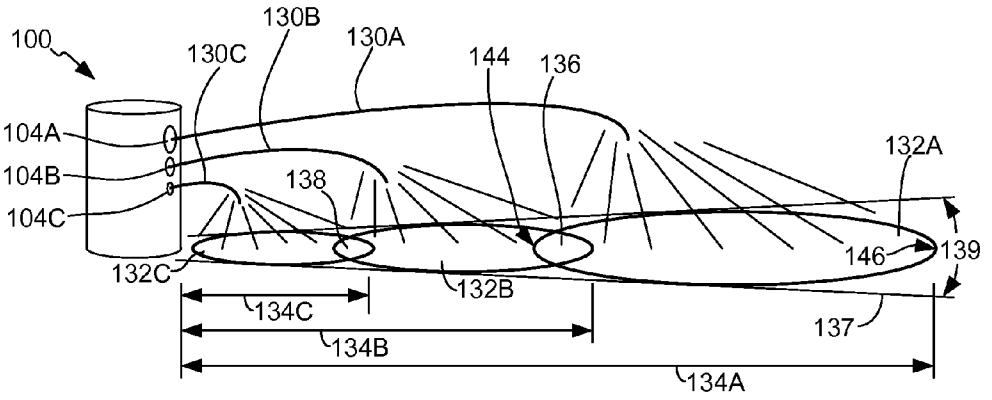

100
130B
130A
130C
144
136
104A
104B
104C
138
132A
146
139
132C
132B
134C
137
134B
134A

FIG. 2

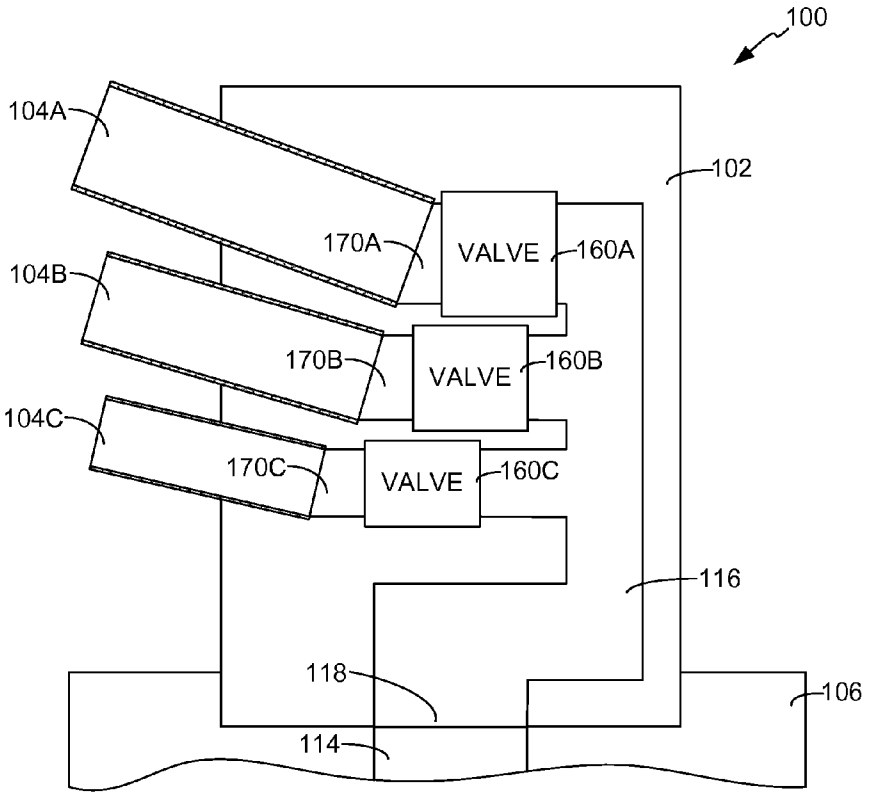

100
104A
102
170A
VALVE
160A
104B
170B
VALVE
160B
104C
170C
VALVE
160C
116
118
106
114

FIG. 3

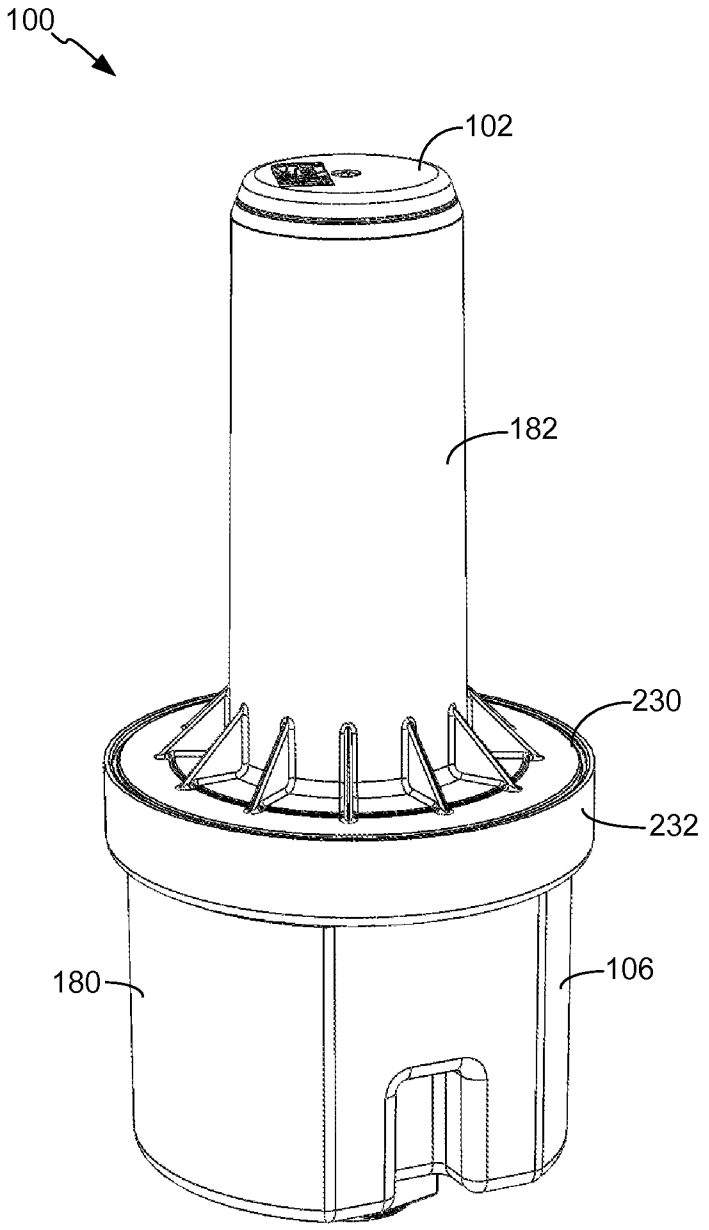


FIG. 4

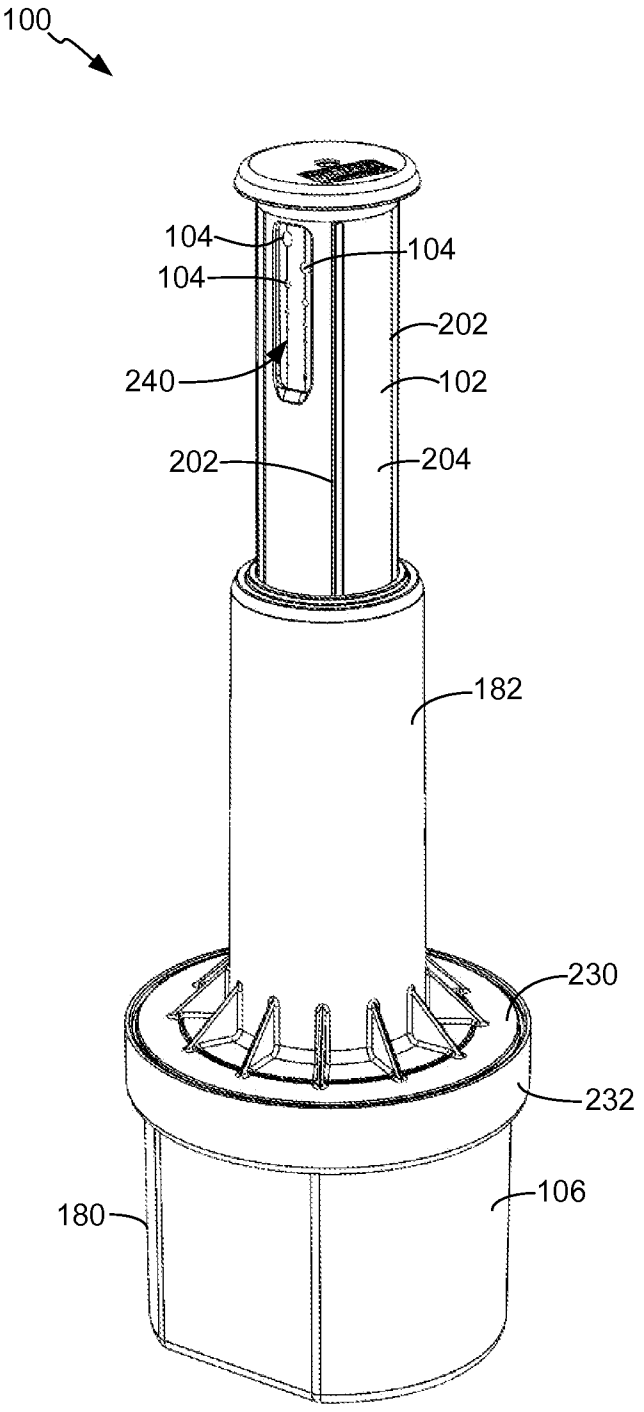


FIG. 5

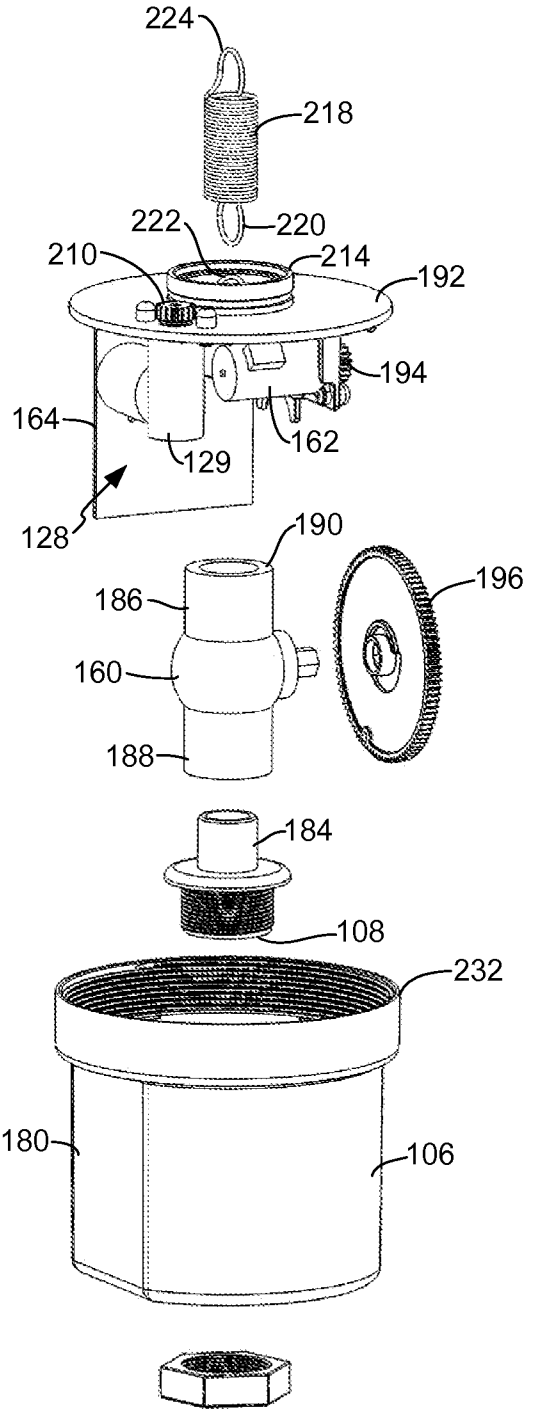

224
218
222
220
210
214
192
194
164
162
129
128
190
196
186
160
188
184
108
232
180
106

FIG. 6

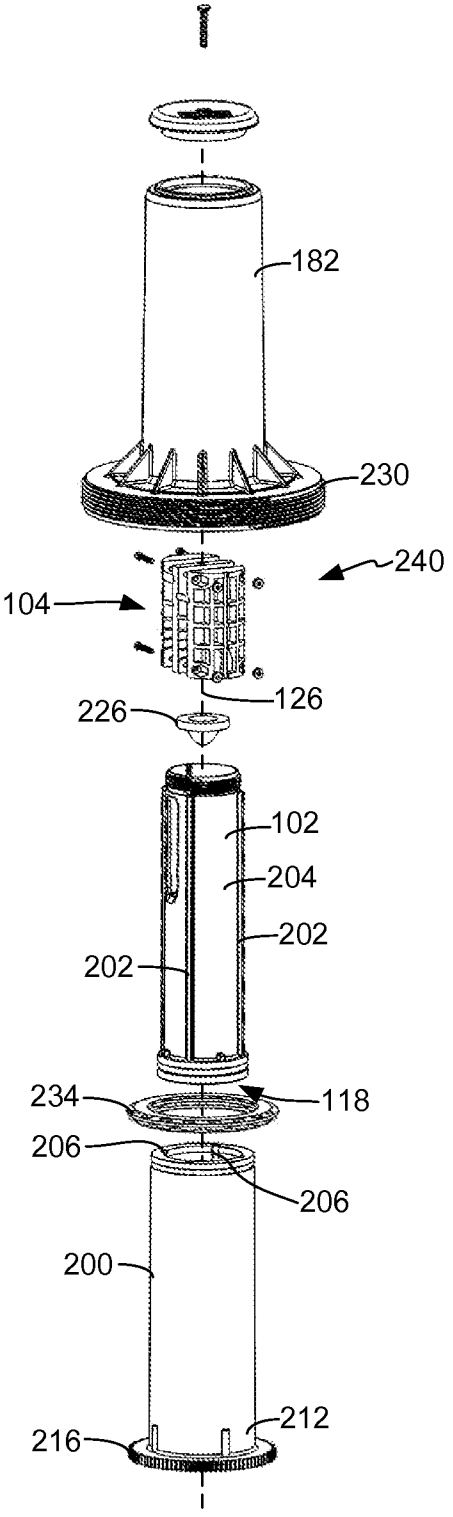

182
230
240
104
126
226
102
204
202
202
234
118
206
206
200
212
216

FIG. 7

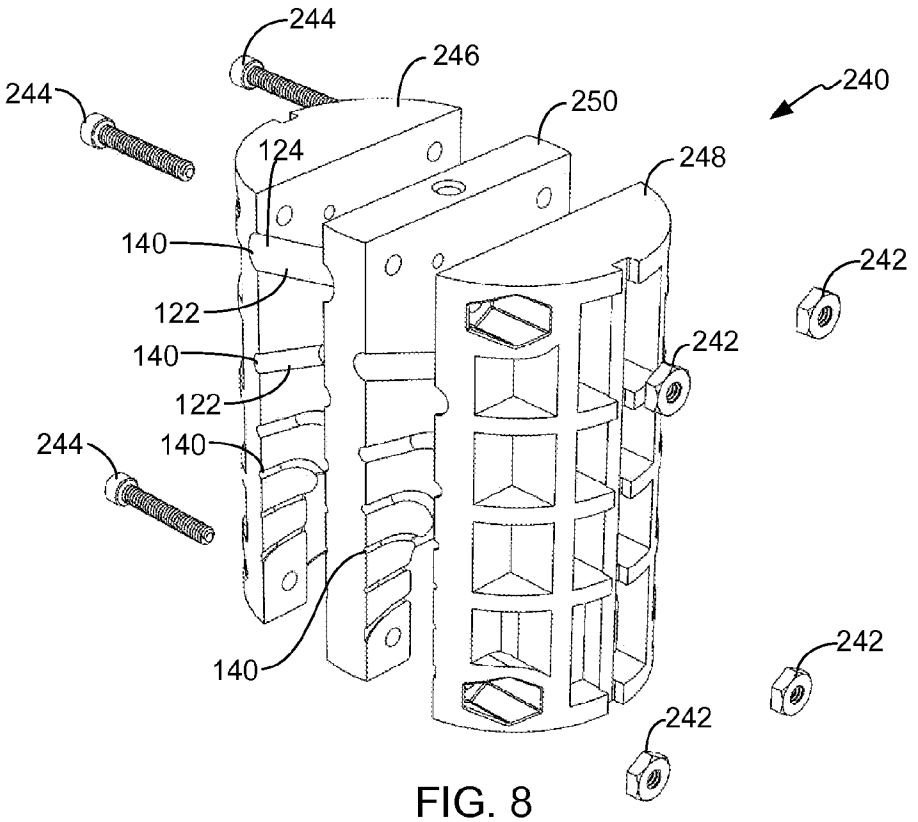

244
246
244
250
240
124
248
140
242
122
140
242
122
244
140
140
242
242

FIG. 8

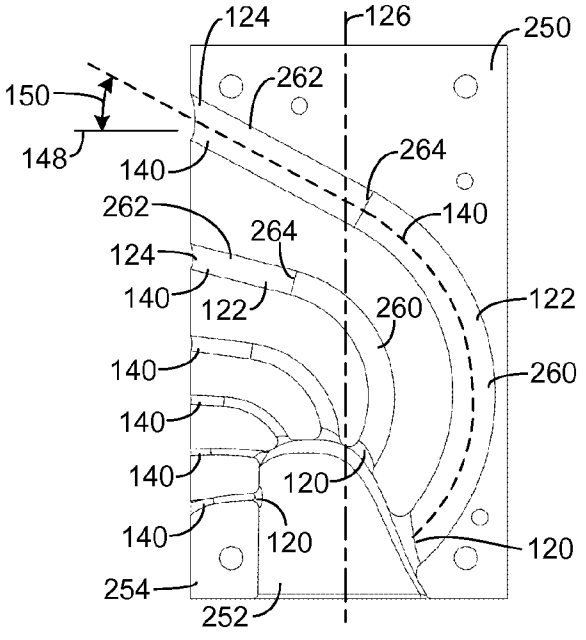

124
126
250
150
262
148
140
264
262
140
264
124
140
122
260
122
140
260
140
140
120
140
120
120
254
252

FIG. 9

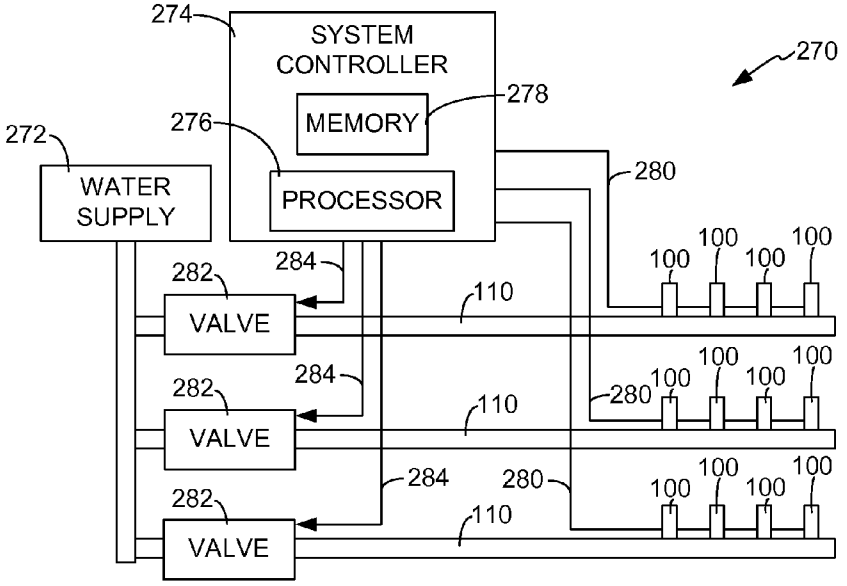


FIG. 10

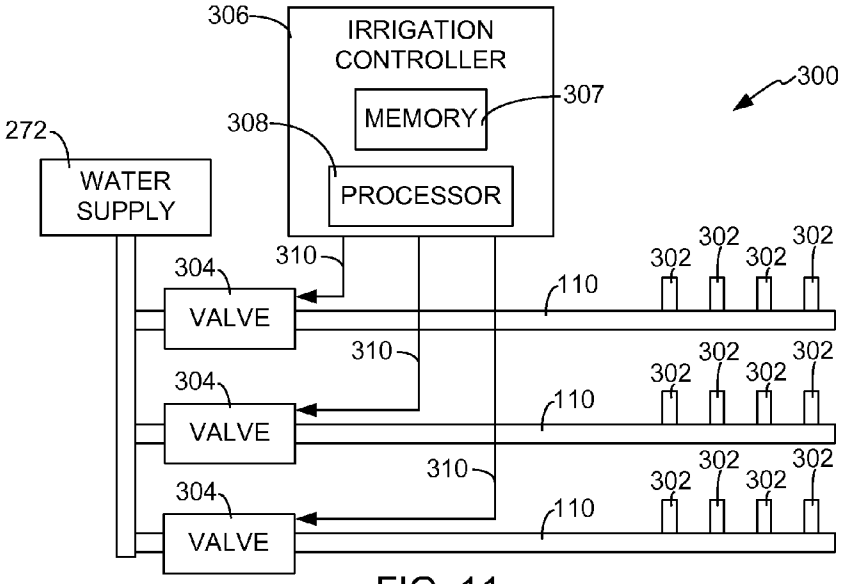


FIG. 11
(PRIOR ART)

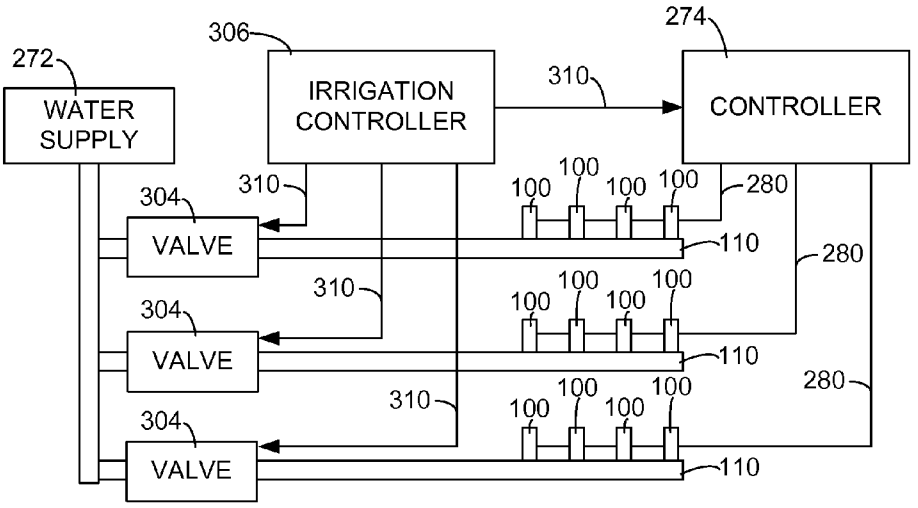

272
WATER SUPPLY
306
IRRIGATION CONTROLLER
310
274
CONTROLLER
304
VALVE
310
100
280
110
304
VALVE
310
304
VALVE
310
280

FIG. 12

MULTI-NOZZLE ROTARY SPRINKLER

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is based on and claims the benefit of U.S. provisional patent application Ser. No. 61/365,600, filed Jul. 19, 2010; claims the benefit of U.S. provisional patent application Ser. No. 61/605,374, filed Mar. 1, 2012; and is a continuation-in-part of International Application Serial No. PCT/US2011/044337, having an international filing date of Jul. 18, 2011. The content of each of the above-identified applications are hereby incorporated by reference in their entirety.

FIELD

[0002] Embodiments of the invention relate to multi-nozzle rotary sprinklers, sprinkler systems and methods.

BACKGROUND

[0003] Irrigation sprinklers are known for watering circular patterns or arc segments of a circular pattern. Typical irrigation sprinklers discharge a single rotary water stream that is rotated in a circle around a vertical rotational axis. This water stream is thrown by a sprinkler nozzle mounted in the peripheral sidewall of the nozzle head at an upward angle relative to the horizontal to direct the water a radial distance from the nozzle.

[0004] Irrigation systems generally comprise multiple sprinklers within multiple watering zones. Each sprinkler is recessed within the ground and is fed water through underground pipes. An irrigation controller activates a zone by opening a valve that controls the flow of water through the pipes of the zone. The irrigation controller activates the zones sequentially for a predetermined period of time based on zone program instructions.

[0005] Irrigation sprinklers currently have several drawbacks. The most significant is that they spray water in circles that are overlapped between sprinklers in order to conform to complex landscape shapes. This causes excess water to be deposited in the areas where these sprinklers overlap. In many systems 50% excess water is used.

[0006] Another drawback to conventional irrigation sprinklers is that they use only a few nozzles or nozzle openings. One drawback is that some nozzles spray a fine mist close to the sprinkler which results in water evaporation due to the small droplet size. Another drawback is that some of the nozzles must water a large annular ring around the sprinkler which results in watering that is not uniform across the annular ring (i.e., in a radial direction from the nozzle). As a result, these conventional sprinklers waste water and are inflexible to landscape variations.

SUMMARY

[0007] Embodiments of the invention are directed to a rotary sprinkler and a sprinkler system. In some embodiments, the rotary sprinkler comprises a nozzle head and at least 8 nozzles supported by the nozzle head. The nozzles are configured to discharge water streams at substantially the same velocity, but to different radial distances from the nozzle head. Each water stream produces a spray pattern, such as an elliptical spray pattern, that overlaps at least one adjoining spray pattern.

[0008] In some embodiments, the rotary sprinkler comprises a nozzle head and at least 8 nozzles supported by the nozzle head. The nozzles are configured to discharge water streams at substantially the same velocity, but to different radial distances from the nozzle head. Each water stream produces a spray pattern, such as an elliptical spray pattern, that overlaps at least one adjoining spray pattern.

[0009] In some embodiments, the rotary sprinkler comprises a plurality of nozzles, each of which comprises a fluid pathway including a central axis, an inlet, an outlet, a length measured from the inlet to the outlet along the central axis, and an interior diameter at the outlet. In one embodiment, the rotary sprinkler comprises three or more nozzles. In one embodiment, the rotary sprinkler comprises 4-7 nozzles. In one embodiment, the rotary sprinkler comprises 8-12 nozzles.

[0010] In some embodiments, the plurality of nozzles are configured to discharge water streams at different radial distances from the sprinkler to form concentric watering rings when the nozzles are rotated about a vertical axis. In some embodiments, each of the nozzles has a different interior diameter at the outlet. In accordance with some embodiments, each of the nozzles has a different length. In some embodiments, each of the nozzles is oriented at a different angle relative to the ground. In some embodiments, each of the nozzles has a different interior diameter at the outlet, a different length and/or is oriented at a different angle relative to the ground.

[0011] The spray patterns generated by the nozzles form concentric watering rings as the nozzle is rotated. Due to the large number of nozzles, the spray patterns form relatively narrow watering rings as compared to conventional sprinklers, and with less watering variation within each ring. This arrangement allows the sprinkler to save water through increased watering precision that improves watering uniformity, and decreases water waste.

[0012] In some embodiments, the rotary sprinkler comprises first, second and third nozzles. The first nozzle comprises a first nozzle fluid pathway including a central axis, an inlet, an outlet, a first length measured from the inlet to the outlet along the central axis, and a first interior diameter at the outlet. The second nozzle comprises a second nozzle fluid pathway including a central axis, an inlet, an outlet, a second length measured from the inlet to the outlet along the central axis, and a second interior diameter at the outlet. The third nozzle comprises a third nozzle fluid pathway including a central axis, an inlet, an outlet, a third length measured from the inlet to the outlet along the central axis, and a third interior diameter at the outlet. In some embodiments, the first interior diameter is greater than the second interior diameter, and the second interior diameter is greater than the third interior diameter. In some embodiments, the first length is greater than the second length, and the second length is greater than the third length.

[0013] In some exemplary embodiments, the second length is approximately 65-85% of the first length, and the third length is 65-85% of the second length. In some embodiments, the first length is 1.7-2.83 inches, the second length is 1.25-2.09 inches, and the third length is 0.92-1.54 inches. Adjustments may be made to the lengths depending on the water pressure and the radial distance to be covered by the sprinkler. Thus, in some embodiments, the lengths are longer for higher water pressures and longer water throw distances.

[0014] In some embodiments, the second interior diameter is approximately 70-90% of the first interior diameter, and the third interior diameter is 70-90% of the second interior diameter. In some embodiments, the first interior diameter is 0.125-0.185 inches, the second interior diameter is 0.096-0.144 inches, and the third interior diameter is 0.075-0.122 inches. In some embodiments, the interior diameters are enlarged for higher water pressure and to throw more water longer distances. For example, to cover a radial distance of approximately 80 feet, the first diameter is approximately 0.250-0.370 inches, the second diameter is approximately 0.192-0.288 inches and the third diameter is approximately 0.150-0.244.

[0015] In some embodiments, the central axis at the outlet of the first nozzle fluid pathway is oriented at a first angle relative to a horizontal plane, which is perpendicular to the vertical axis, the central axis at the outlet of the second nozzle fluid pathway is oriented at a second angle relative to the horizontal plane, and the central axis at the outlet of the third nozzle fluid pathway is oriented at a third angle relative to the horizontal plane. In some embodiments, the first angle is greater than the second angle, and the second angle is greater than the third angle.

[0016] In some embodiments, the rotary sprinkler comprises a nozzle head that supports the first, second and third nozzles. In one embodiment, the rotary sprinkler comprises a base that supports the nozzle head. In some embodiments, the rotary sprinkler comprises a drive mechanism that drives rotation of the nozzle head about a vertical axis relative to the base. In some embodiments, the drive mechanism comprises a motor configured to drive the rotation of the nozzle head about the vertical axis.

[0017] In some embodiments, the first nozzle body is configured to discharge a first water stream a first distance, the second nozzle body is configured to discharge a second water stream a second distance, which is less than the first distance, and the third nozzle body is configured to discharge a third water stream a third distance, which is less than the second distance. This allows the rotary sprinkler to water concentric rings around the rotary sprinkler.

[0018] In some embodiments, the first, second and third output streams respectively produce first, second and third spray patterns. In one embodiment, the first spray pattern overlaps a distal portion of the second spray pattern, and the second spray pattern overlaps a distal portion of the third spray pattern.

[0019] In some embodiments, the rotary sprinkler comprises a main water inlet configured to receive a flow of water from a water supply line and a fluid flow path connecting the main water inlet to the inlets of the first, second and third nozzles.

[0020] In some embodiments, the rotary sprinkler comprises a valve configured to control a flow of water through the fluid flow path responsive to signals received from a controller. In some embodiments, the rotary sprinkler comprises a motor configured to move the valve between opened, closed and intermediary positions.

[0021] In some embodiments, the rotary sprinkler comprises a plurality of valves, each configured to control a flow of water to one or more of the nozzles. In one embodiment, the rotary sprinkler comprises one or more motors configured to move the plurality of valves between opened, closed and intermediary positions. In some embodiments, the fluid flow path comprises a first fluid flow path connecting the water inlet to the inlet of the first nozzle, a second fluid flow path connecting the water inlet to the inlet of the second nozzle, and a third fluid flow path connecting the water inlet to the inlet of the third nozzle. In some embodiments, the rotary sprinkler comprises a first valve configured to control a flow of water through the first fluid flow path responsive to signals received from a controller, a second valve configured to control a flow of water through the second fluid flow path responsive to signals received from a controller, and a third valve configured to control a flow of water through the third fluid flow path responsive to signals received from a controller.

[0022] In some embodiments, the rotary sprinkler comprises a sensor that generates a signal indicative of a pressure in the fluid flow path, or a flow rate of a water flow through the fluid flow path.

[0023] In some embodiments, a pressure regulator in the fluid flow path.

[0024] In some embodiments, the fluid flow paths of each of the nozzles comprise a straight cylindrical section extending from the outlet to an intermediary location between the inlet and the outlet of the nozzle fluid pathway, and a curved section extending from the inlet to the intermediary location.

[0025] In some embodiments, the rotary sprinkler comprises a controller that is located within the sprinkler. In some embodiments, the controller comprises one or more processors configured to execute program instructions stored in memory to perform one or more method steps or functions described herein. In some embodiments, the controller is configured to set a position of the one or more valves of the rotary sprinkler to opened, closed and intermediary positions. In some embodiments, the controller is configured to receive output signals from the sensor. In some embodiments, the controller receives control signals from a system controller located remotely from the rotary sprinkler.

[0026] In some embodiments, the rotary sprinkler comprises a power supply. In one embodiment, the power supply is rechargeable.

[0027] In some embodiments, the base of the rotary sprinkler comprises a sealed compartment in which electrical components of the rotary sprinkler are contained. In some embodiments, the electrical components comprise one or more motors, a controller, one or more processors, a power supply, and/or electrical circuitry.

[0028] Some embodiments of the sprinkler system comprise a plurality of rotary sprinklers, an irrigation controller and a system or sprinkler controller. Embodiments of the rotary sprinklers include one or more embodiments described herein. In one embodiment, the rotary sprinklers each comprise a water supply inlet, a nozzle head supported by a base, and a plurality of nozzles supported by the nozzle head. The nozzles each comprise a fluid pathway having an inlet and an outlet. A fluid flow path connects the water supply inlet to the inlets of the nozzles. In some embodiments, the sprinklers each comprise at least one valve configured to control the flow of water through the fluid flow path. In some embodiments, the irrigation controller comprises memory containing zone program instructions, and a processor configured to execute the zone program instructions and generate zone valve signals based on the zone program instructions. In some embodiments, the system controller comprises memory containing sprinkler program instructions, and a processor configured to execute the sprinkler program instructions and communicate

control signals to the at least one valve of each of the rotary sprinklers based on the sprinkler program instructions and the zone valve signals.

[0029] In some embodiments, each of the rotary sprinklers comprises a rechargeable power supply coupled to the at least one valve. In some embodiments, the system controller provides power to the power supply over a control line.

[0030] In some embodiments, the control signals comprise valve settings, and each of the rotary sprinklers sets a position of the at least one valve responsive to the valve settings.

[0031] In some embodiments, the system comprises a sensor configured to produce a sensor output indicative of a measured pressure or water flow rate, and the system controller generates the valve settings based on the sensor output.

[0032] Other features and benefits that characterize embodiments of the invention will be apparent upon reading the following detailed description and review of the associated drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] FIG. **1** is a schematic diagram of a rotary sprinkler in accordance with embodiments of the invention.

[0034] FIG. **2** is a simplified drawing illustrating exemplary water streams from a rotary sprinkler in accordance with embodiments of the invention.

[0035] FIG. **3** is a schematic diagram of a nozzle head portion of a rotary sprinkler in accordance with embodiments of the invention.

[0036] FIGS. **4** and **5** are perspective views of the rotary sprinkler formed in accordance with embodiments of the invention with a nozzle head in lowered and raised positions, respectively.

[0037] FIGS. **6** and **7** are exploded perspective views of components contained within a sprinkler base in accordance with embodiments of the invention.

[0038] FIG. **8** is an exploded perspective view of the nozzle assembly in accordance with embodiments of the invention.

[0039] FIG. **9** is a side cross-sectional view of a set of the nozzles formed in accordance with embodiments of the invention.

[0040] FIG. **10** is a simplified diagram of a sprinkler system in accordance with embodiments of the invention.

[0041] FIG. **11** is a simplified diagram of a watering system in accordance with systems of the prior art.

[0042] FIG. **12** is a simplified diagram illustrating an update to the system depicted in FIG. **11**.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0043] Embodiments of the invention are directed to multi-nozzle rotary sprinklers, sprinkler systems and methods. Elements depicted in the drawings having the same or similar reference correspond to the same or similar element.

[0044] FIG. **1** is a schematic diagram of a rotary sprinkler **100** in accordance with embodiments of the invention. The rotary sprinkler **100** generally comprises a nozzle head **102**, a plurality of nozzles, each generally referred to as **104**, and a base **106**. The base **106** provides support for the nozzle head **102**. The nozzle head **102** supports the plurality of nozzles **104**, such as nozzles **104**A-C.

[0045] While the exemplary sprinkler **100** is illustrated as including 3 nozzles **104**, embodiments of the sprinkler include two or more nozzles. In one embodiment, the sprinkler **100** includes three or more nozzles. In some embodiments, the sprinkler **100** includes 4-7 nozzles, 8-14 nozzles, 8 or more nozzles, or 9 or more nozzles.

[0046] The rotary sprinkler **100** includes a water supply inlet **108** that may be coupled to a water supply line **110**, such as a hose or in-ground piping. The water supply line **110** provides a pressurized source of water that is delivered to the nozzles **104** through a fluid flow path of the sprinkler **100**. The fluid flow path comprises a section **114** through the base **106** and a section **116** through the nozzle head **102**. The fluid flow path section **114** of the base **106** extends from the water supply inlet **108** to an inlet **118** of the nozzle head **102**. The fluid flow path section **116** of the nozzle head **102** extends from the inlet **118** to inlets **120** of the nozzles **104**. Each of the nozzles **104** includes a fluid pathway, generally referred to as **122**, that fluidically couples the inlet **120** to an outlet **124**. Accordingly, water supplied by the water supply line **110** passes through the water supply inlet **108** of the rotary sprinkler **100**, the fluid flow path section **114** of the base **106**, the fluid flow path section **116** of the nozzle head **102** and the fluid pathway **122** of the nozzles **104** where it is discharged through the outlet **124** of the nozzles **104** and directed to the watering area.

[0047] In one embodiment, the nozzle head **102** is configured to rotate about a vertical axis **126** relative to the base **106**. In one embodiment, the rotary sprinkler **100** includes a drive mechanism **128** that is configured to drive the rotation of the nozzle head **102** about the axis **126** relative to the base **106**. In one embodiment, the drive mechanism **128** comprises a motor **129**, such as an electric motor or a hydraulic motor, that drives the rotation of the nozzle head **102** relative to the base **106** through a suitable gear arrangement.

[0048] In accordance with one embodiment, the rotary sprinkler **100** is designed for use as an in-ground sprinkler. In one embodiment, the base **106** is buried within the ground and the nozzle head **102** is configured to telescope out of the base **106** to a raised position when water pressure is applied to at least the inlet **118** of the nozzle head **102** for performance of a watering operation. When the water pressure is removed, the nozzle head **102** recedes within the base **106** to a lowered position, in which it is generally located at or just below the turf or grass. In one embodiment, the nozzle head **102** is biased toward the lowered position using, for example, a spring. The spring holds the nozzle head **102** within the base **106** until sufficient water pressure is applied to the inlet **118**.

[0049] In one embodiment, the rotary sprinkler **100** is configured for above-ground watering operations. In accordance with this embodiment, the base **106** provides sufficient support for the nozzle head **102** such that the nozzle head **102** is maintained in a vertical orientation during the watering operation. It is not necessary for the nozzle head **102** to recede within the base **106** in this embodiment.

[0050] In one embodiment, each of the nozzles **104** is configured to discharge a water stream to a different watering area or target site than the other nozzles **104** of the rotary sprinkler **100**. This allows the sprinkler **100** to produce concentric watering rings as the nozzle head **102** is rotated about the vertical axis **126**. FIG. **2** is a simplified drawing illustrating exemplary water streams, each generally referred to as **130**, from the rotary sprinkler **100** in accordance with embodiments of the invention. The watering streams **130** fall on watering areas, generally referred to as **132**, located on the ground or other target.

[0051] In one embodiment, nozzle **104**A is configured to discharge water stream **130**A that falls on a watering area **132**A that extends to a radial distance **134**A for a given water pressure at the inlet **120** of the nozzle **104**A. Nozzle **104**B is configured to discharge a water stream **130**B to a watering area **132**B that extends to a radial distance **134**A from the rotary sprinkler **100**. Likewise, nozzle **104**C is configured to discharge a water stream **130**C that falls on a watering area **132**C that extends to a radial distance **134**C from the sprinkler **100**. In one embodiment, the radial distance **134**A is greater than the radial distance **132**B, which is greater than the radial distance **132**C.

[0052] In one embodiment, the watering areas **132**A, **132**B and **132**C only partially overlap each other. For instance, the watering area **132**A covered by the water stream **130**A overlaps only a distal portion **136** of the watering area **132**B. Similarly, the watering area **132**B of the water stream **130**B overlaps only a distal portion **138** of the watering area **132**C of the water stream **130**C. As a result, each of the water streams **130** produced by the plurality of nozzles **104** of the rotary sprinkler **100** are configured to water an annular ring around the sprinkler **100** as the nozzle head **102** is rotated about the vertical axis **108** relative to the base **106** that does not significantly overlap the annular watering areas covered by the other nozzles **104**. In some embodiments, the center of each watering area **132** generally delivers a slightly higher concentration of water than at the edges of the watering area **132**. This is somewhat overcome by the overlap of the watering areas **132**.

[0053] The resultant concentric watering rings allow for uniform watering per unit length in the radial direction from the sprinkler **100** as compared to single nozzle sprinklers. Another advantage is that when the system water flow or pressure is adjusted, a proportional change in the watering pattern occurs.

[0054] In one embodiment, the water streams **130** do not produce as much spray as single nozzle sprinklers of the prior art. In one embodiment, the watering areas **132** covered by each of the water streams **130** are approximately elliptical, as illustrated in FIG. **2**. This has the advantage of reducing water loss through evaporation into the air, resulting in more efficient watering of the targeted area.

[0055] The radial distance the streams **130** discharged by the nozzles **104** travel from the sprinkler **100** depends on various nozzle parameters. These include the diameter of the outlet **124**, the length of the fluid pathway **122** and the angle of the nozzle **104** relative to the horizontal plane (i.e., the ground). The resultant streams **130** also depend on the water pressure at the inlet **120**.

[0056] In some embodiments, the nozzles **104** are oriented to discharge the streams **130** within a watering cone **137**, having side edges separated by an angle **139**. In some embodiments, the angle **139** is approximately of 2-3 degrees. This results in watering width of approximately 6 inches at 12 feet from the sprinkler **100**. Such a narrow watering cone **137** allows for precise watering. The narrow watering areas **132** reduce watering variation within the watering areas **132** to improve watering uniformity across the all of the watering areas **132**.

[0057] In one embodiment, each of the nozzles **104** has a central axis **140** that extends along the fluid pathway **122**, as shown in FIG. **1**. While the fluid pathway **122** is illustrated as a straight tubular section in FIG. **1**, the fluid pathway **122** may also be curved, as described below. The central axis **140** generally extends through the center of the straight and/or curved sections of the fluid pathway **122** of each nozzle **104**.

[0058] In one embodiment, the fluid pathway **122** has an interior diameter measured in a plane that is perpendicular to the central axis **140**. In accordance with one embodiment, the fluid pathway **122** has a uniform interior diameter. In accordance with another embodiment, the fluid pathway **122** has a non-uniform interior diameter.

[0059] In one embodiment, each of the nozzles **104** has a different interior diameter, generally referred to as **142**, at the outlet **124**. In one embodiment, the nozzles **104** having watering areas **132** located farther from the sprinkler **100** have larger diameters than the nozzles **104** having watering areas **132** located more closely to the sprinkler **100**. Thus, in one embodiment, the exemplary rotary sprinkler **100** illustrated in FIG. **1**, nozzle **104**A has an interior diameter **142**A that is larger than the interior diameter **142**B of the nozzle **104**B. In accordance with another embodiment, the interior diameter **142**B of the nozzle **104**B is larger than the interior diameter **142**C of the nozzle **104**C.

[0060] In one embodiment, the interior diameters **142** of the nozzles **104** are set based on the expected water pressure at the water supply inlet **108** and the radial distance from the rotary sprinkler **100** where the desired watering area **132** is located. In one embodiment, the interior diameters of each of the nozzles **104** are set to produce streams **130** that produce watering areas **132** that form concentric rings around the rotary sprinkler **100** when the nozzle head **102** is rotated 360 degrees during a watering operation.

[0061] In one embodiment, the selection of the interior diameters **142** of the nozzles **104** is made based on an expected pressure at their inlets **120** and the desired maximum radial distance from the sprinkler **100** that is to be watered. For instance, using a pressure of 40 psi, a single nozzle radius of 0.125 inches can discharge a water stream a distance of 40 feet when the volumetric flow rate of the water at the inlet **120** is approximately 7 gallons per minute. In one embodiment, this overall radius is used to determine the outlet diameter settings for multiple nozzles such that concentric rings of watering areas may be produced.

[0062] In one embodiment, the outlet diameters **142** or radii of the plurality of the nozzles **104** are computed based on this single nozzle radius determination. In general, the single nozzle radius is divided into a plurality of nozzles **104** where the sum of the radii of the plurality nozzles **104** is equal to the single nozzle radius. The nozzles can then be used to discharge the water to distinct radial distances and form a set of concentric ring watering areas.

[0063] In one exemplary embodiment, for 100 psi of pressure and a water flow rate of approximately 36 gallons per minute at inlet **120**, an overall radius of 0.25 is used to calculate multiple nozzles where the maximum desired distance is 80 feet.

[0064] Once the radius of the single nozzle is determined, such as that mentioned above, we can use that radius to determine the radii of proportionately smaller nozzles. In one embodiment, this is accomplished by selecting the nozzles **104** such that the sum of all their cross-sectional areas conforming to radii of k*r(n) is made to be equal to the area of the selected single nozzle, where k is a nozzle proportion factor. In accordance with one embodiment, k is within the range of 0.70-0.90 or 70-90%. In accordance with another embodiment, k is within the range of 0.70-0.80 or 70-80%. In accordance with another embodiment, k is within the range of

0.75-0.79 or 75-79%. In accordance with another embodiment, k is within the range of 0.77-0.78 or 77-78%. In one embodiment, k is 0.78.

[0065] As a result, in one embodiment, the interior diameter **142**B of the nozzle **104**B at its outlet **124** is determined by multiplying the interior diameter **142**A at its outlet **124** by the proportion factor k. The interior diameter **142**C of the nozzle **104**C at its outlet **124** is then determined by multiplying the interior diameter **142**B at the outlet **124** by the proportion factor k. For example, a single nozzle having a radius of 0.125 inches may be modeled as ten separate nozzles. For k=0.78, the largest nozzle will have a radius of approximately 0.77 inches and the smallest will have a radius of approximately 0.008 inches. Practical considerations like nozzle clogging may need to be considered for small nozzle sizes. As a result, a minimum radius, such as 0.0125 inches, may need to be set for some of the smaller nozzles.

[0066] In order to select an appropriate nozzle proportion factor k, the watering ring size for any given nozzle must be known. The watering ring size for a given nozzle is the radial distance between the proximal edge **144** and the distal edge **146** of the watering area **132** for a given pressure at the inlet **120**, as shown in FIG. **2** for watering area **132**A. This has been measured empirically and modeled as 117 times the radius in feet for one embodiment. For the 0.077 inch radius nozzle outlet **124**, the watering ring size is 9 feet from the proximal edge **144** to the distal edge **146**. For a maximum range of 40 feet, this means the 0.077 radius nozzle waters a ring from 31 to 40 feet under full pressure. Likewise, each successive nozzle can be set to water another ring inside the previous one. Taking 0.077 times 0.78 yields the next nozzle radius of approximately 0.06 inches. Taking 0.06 times 117 yields a ring size of 7 feet for the next ring. Thus, the second nozzle waters from 24 to 31 feet. Table 1 lists an exemplary set of 11 nozzles that may be used to generate concentric watering rings that cover a radial distance of 40 feet from the rotary nozzle **100** based on a water pressure of 40 psi.

TABLE 1

Watering Ring Range (feet)	Nozzle Radius (inches)
40-31	0.0770
31-24	0.0600
24-18.5	0.0468
18.5-14.2	0.0365
14.2-10.7	0.0298
10.7-8	0.0233
8-5.8	0.0185
5.8-4.1	0.0146
4.1-2.6	0.0125
2.6-1.3	0.0125
1.3-0	0.0125

[0067] As mentioned above, in one embodiment, the selection of the interior diameters **142** of the nozzles **104** is made based on an expected pressure at their inlets **120** and the desired maximum radial distance from the sprinkler **100** that is to be watered. In some embodiments, the outlet diameters **142** of the plurality of the nozzles **104** are computed based on this single nozzle radius determination. In general, the single nozzle radius is divided into a plurality of nozzles **104** where the sum of the radii of the plurality nozzles **104** is equal to the single nozzle radius. The nozzles can then be used to discharge the water to distinct radial distances and form a set of concentric ring watering areas.

[0068] The radii of multiple nozzles can be determined based on the selected single nozzle radius. In one embodiment, this is accomplished by setting the radii of the nozzles such that the sum of their corresponding areas is equal to the area of the selected single nozzle radius. In one embodiment, this is modeled as proportionately smaller nozzles having radii selected in accordance with Equation 1, where n is the nozzle number and k represents radius ratio between adjacent nozzles. In one embodiment, k has a range of 0.76-0.86.

$$r_{n+1}=k*r_n \quad \text{Eq. 1}$$

[0069] For each nozzle it has been found that the coverage distance or ring width that may be watered by the nozzle (watering ring size) is proportional to the nozzle radius in accordance with Equation 2, and the amount of water deposited in each ring is proportional to the area of the nozzle (a) in accordance with Equation 3, where D is the outer stream distance for the nozzle, such as **134**B for nozzle **104**B shown in FIG. **2**, m is the model distance radius multiplier, and c is the coverage distance of the watering area **132**. The optimal value for m depends on how the nozzle stream is spread before it hits the ground. In some embodiment, the value m is in a range of 90-120. In one embodiment, m is set to approximately 100 times the radius of the selected single nozzle in feet.

$$c(n)=m*r_n \quad \text{Eq. 2}$$

$$a=(D_n)^2-(D_n-c_n)^2/(r_n)^2 \quad \text{Eq. 3}$$

Equations 2 and 3 can be combined as shown in Equation 4 to form the mathematical correlation between a, m and k provided in Equation 5.

$$k=r_{n+1}/r_n=(D_n-(2*m^2/(a+m^2)))/D_n=(a-m^2)/(a+m^2) \quad \text{Eq. 4}$$

$$k=(a-m^2)/(a+m^2) \quad \text{Eq. 5}$$

[0070] In one example, it was found that for that a selected single nozzle radius of 0.131 inches could deliver a water stream a distance of 38 feet when the water flow is at 40 psi and has a flow velocity of 5.5 feet per second in a 0.375 inch diameter pipe. Multiple nozzles can be calculated using the above equations to provide the overall radius of 0.131 inches and produce the desired set of concentric watering rings. For instance, 14 rings of proportionately smaller nozzles can be modeled using Equation 1 where n=1 to 14 where the sum of all the areas of the nozzles is made to be equal to that of a 0.131 inch nozzle and Equation 5 is used for determining values for k. In one embodiment k is 0.825, m is 91 and a is 86459 with the largest nozzle radius being 0.073 inches. Practical considerations like nozzle clogging may need to be considered to limit small nozzle sizes. In one embodiment the minimum hole size was limited to 0.0148 radius based on a filter screen opening of 0.022 inches. Table 2 lists the resultant exemplary set of 14 nozzles calculated as described above that may be used to generate concentric watering rings that cover a radial distance of 38 feet from the rotary nozzle **100**.

TABLE 2

Ring Range in Feet	Nozzle Radius
38-31.36	0.0730
31.36-25.88	0.0602
25.88-21.35	0.0497
21.35-17.62	0.0410
17.6238-14.54	0.0339

TABLE 2-continued

Ring Range in Feet	Nozzle Radius
14.54-12.00	0.0279
12.00-9.90	0.0230
9.90-8.17	0.0190
8.17-6.74	0.0157
6.74-5.39	0.0148
5.93-4.04	0.0148
4.04-2.70	0.0148
2.70-1.35	0.0148
1.35-0	0.01480

[0071] Below is an exemplary method for setting the radius of each of the nozzles **104**. In order to complete the process of nozzle design one must tie the overall nozzle radius (single nozzle) to the other factors of the nozzle design as a whole. To start with the overall nozzle radius must be selected for a desired coverage distance and expected water pressure. In one embodiment an overall nozzle radius of 0.1314 inches sprayed 38-40 feet depending on the tube length, for a water pressure of 40 psi. If we pick 38 feet as a target distance then all of the nozzle coverages need to add up to 38 feet. In other words the sum of the $c=m*r_n$ need to equal 38, based on Equation 2. In addition the sum of the areas of all of the nozzles should approximately equal the overall nozzle area. These calculations are shown below.

$$38=m*(r_1+r_2 \ldots +r_n)$$

$$0.1314^2=(r_1^2+r_2^2 \ldots +r_n^2)$$

We already know the ratio between each adjacent radii can be computed using Equation 4, which is provided below.

$$r_{n+1}/r_n=(a-m^2)/(a+m^2)$$

In one example, m was empirically found to provide good watering coverage with a value of 91 using no taper on the nozzles using 14 total nozzles. Using a starting value of 0.073 for nozzle **1** a value for "a" can be computed using Equation 3.

$$a=(D_n^2-(D_n-(m*r_n))^2)/r_n^2=(38^2-(38-(91*0.073))^2)/0.073^2=86459.$$

Given values for a and m the nozzle ratio can be computed as follows:

$$r_{n+1}/r_n=(a-m^2)/(a+m^2)=(86459-91^2)/(86459+91^2)=0.825.$$

We solve for r_n as follows:

$$r_n=r_{n+1}*0.825=0.073*0.825=0.060 \text{ (for nozzle 2)}$$

[0072] Table 3 lists the resultant nozzles based on the method described above. As the holes get smaller a practical limit is reached and the ratio is limited to one. As you can see the smallest nozzle radius was limited to 0.01468 inches in radius in the table below. While this was a limitation for this design based on expected nozzle contamination other applications will require alternate considerations. Because the selection of a value for r_n is based on a desired overall nozzle radius, the number of nozzles and a limit to how small the holes can be, trial and error was needed to find an exact set of numbers.

TABLE 3

Nozzle Range (feet)	Nozzle Radius (inches)	Nozzle Ratio (r_n/r_{n-1})	Nozzle Coverage (feet)
38-31.36	0.07300	0.8252	6.643
31.36-25.88	0.06024	0.8252	5.482
25.88-21.35	0.04971	0.8252	4.523
21.35-17.64	0.04102	0.8252	3.733
17.64-14.54	0.03385	0.8252	3.080
14.54-12.00	0.02793	0.8252	2.542
12.00-9.90	0.02305	0.8252	2.097
9.90-8.17	0.01902	0.8252	1.731
8.17-6.74	0.01569	0.9441	1.428
6.74-5.39	0.01482	1	1.348
5.39-4.04	0.01482	1	1.348
4.04-2.70	0.01482	1	1.348
2.70-1.35	0.01482	1	1.348
1.35-0.00	0.01482	1	1.348

[0073] In one embodiment, after the appropriate nozzles have been selected, trajectory angles for each nozzle can be computed based on expected water velocity, nozzle height above the ground and the desired radial distance of the watering area to be covered by the nozzle. In one embodiment, the trajectory angle **150** for each nozzle is determined by the orientation of the central axis **140** relative to a horizontal plane **148** extending perpendicularly to the vertical axis **126**, about which the nozzle head **102** is configured to rotate.

[0074] In one embodiment, each of the nozzles of the rotary sprinkler **100** has a different trajectory angle, generally referred to as **150**. In one embodiment, the trajectory angle **150** of the nozzle **104** that is configured to have the farthest reaching output stream **130** (e.g., nozzle **104**A) has the largest trajectory angle **150**. In one embodiment, this trajectory angle **150** is approximately 30-45 degrees. In one embodiment, nozzles **104** responsible for directing water streams **130** to shorter radial distances from the rotary sprinkler **100** have lower trajectory angles **150** than nozzles **104** that are responsible for generating water streams **130** that travel larger radial distances from the sprinkler **100**. Accordingly, in one embodiment, nozzle **104**A has a trajectory angle **150**A, nozzle **104**B has a trajectory angle **150**B and nozzle **104**C has a trajectory angle **150**C, as shown in FIG. **1**.

[0075] The length of each of the nozzles **104** determines the stream **130** that is discharged by the nozzle. If the nozzle **104** is too short, the stream breaks up upon exit of the nozzle **104** thereby limiting the distance the stream can travel. If the nozzle **104** is too long, the pressure drop across the nozzle **104** slows the velocity of the water flow through the nozzle, which can also prevent the stream **130** from reaching a desired radial distance from the rotary sprinkler **100**. In one embodiment, the nozzles **104** are each configured to have water flows through the nozzles **104** that travel at approximately the same velocity for a given pressure, but to different radial distances from the nozzle head **102**. This allows the sprinkler **100** to provide a substantially even watering pattern over the entire radial distance covered by the water streams **130**. In some embodiments, the nozzles **104** are each configured such that the variance in the velocity of the water through the nozzles **104** is less than 2% over a pressure range of approximately 23-60 psi. However, it is understood that the velocity of the water through some of the nozzles **104** configured to discharge water streams **130** the shortest distances **134** from the sprinkler **100** may have a greater variance from the longer range nozzles **104**, in some embodiments.

[0076] In one embodiment, the length of each nozzle **104**, generally referred to as **154**, corresponds to the length of the central axis **140** measured from the inlet **120** to the outlet **124**, as shown in FIG. **1**. In one embodiment, the lengths **154** of the nozzles **104** are approximated using Darcy's formula provided below, where Δp is the pressure drop across the nozzle **104** due to friction in the fluid pathway **122**, ρ is the density of water, f is a friction coefficient, L is the pipe length **154**, v is the water flow rate, D is the internal pipe diameter, and Q is the volumetric flow rate of the water.

$$\Delta p = \frac{\rho * f * L * v^2}{2D} = \frac{8\rho * f * L * Q^2}{\pi^2 D^5}$$

[0077] For desired pressure drop across the nozzle **104** based on the static versus dynamic pressure of the system, a length of the fluid pathway **122** for a particular nozzle **104** is computed for a specific output velocity (e.g., approximately 39 feet per second). In this situation the largest nozzle is the longest and the most likely to produce an irregular flow if it is too short. The length **154** of the fluid pathway **122** of the nozzle needs 104 to be long enough so that the flow reaches a turbulent state. If the length **154** is less than this critical length, the flow through the nozzle **104** will be irregular. Lengths **154** that are greater than this critical length, reduces the velocity of the water that is ejected from the nozzle **104**. For instance, a nozzle radius of 0.077 inches requires a length **154** of approximately 2.26 inches in order to work in a system providing 40 psi of dynamic pressure. Shorter lengths **154** will not produce the desired 40 foot radial distance due to irregular flow in the nozzle **104**, and longer lengths **154** will reduce the radial distance the stream **130** can travel due to velocity reduction in the fluid pathway **122**. Longer lengths **154** also reduce the size of the watering area **132**. Once the exit velocity for the largest nozzle **104** has been computed, the lengths **154** of the remaining nozzles **104** can be computed given the same pressure drop (e.g., 12.5 psi) and velocity. In this way, all nozzle streams **130** exit at a similar velocity and the trajectory angle **150** can be used to determine the radial distance the stream **130** travels from the rotary sprinkler **100**.

[0078] Due to the turbulent flow in the fluid pathway **122**, each of the streams **130** break up into droplets as the stream travels from the outlet **124** to the targeted watering area **132**. This creates a spray pattern on the ground that forms the watering area **132**. The watering pattern **132** varies in proportion to the water flow that travels through the nozzle **104**. This allows for the formation of shorter and longer sets of concentric watering rings.

[0079] In one embodiment, the stream **130** discharged from the nozzle **104** responsible for the watering area **132** located closest to the sprinkler **100** is diffused by a modification to the outlet **124**, which may include a curved member in the fluid flow path leading up to the outlet **124** resulting in a taller outlet and a reduction in the outlet width resulting in watering area **132** having a longer and more narrow spray pattern compared to the nozzles **104** that lack the modification. Alternatively, a nozzle **104** may be configured to generate a spray pattern to cover the ground adjacent the sprinkler **100**.

[0080] In one embodiment, the rotary sprinkler **100** includes a valve **160** that controls the flow of water through the fluid flow paths **114** and **116** of the sprinkler **100**, as shown in FIG. **1**. In one embodiment, the valve **160** has a closed position, in which water is prevented from flowing along the fluid flow paths, and an opened position, in which water is free to travel along the fluid flow paths. In one embodiment, the valve **160** also includes intermediary positions that allow the flow rate of the water through the fluid flow path to be set to a value that is less than the maximum flow rate achieved when the valve **160** is in the fully opened position. As a result, the valve **160** may be used to adjust the flow rate of the water through the fluid flow path **112** to be set to the desired level. This allows for greater control over the streams **130** produced by the nozzles **104** and their watering areas **132**.

[0081] In one embodiment, the position of the valve **160** is controlled by a motor **162**. The motor **162** may be a stepper motor, a servo motor, or other suitable motor or device that may be used to adjust the position of the valve **160**.

[0082] In one embodiment, the rotary sprinkler **100** includes a plurality of valves **160**, as schematically illustrated in FIG. **3**. In one embodiment, the plurality of valves **160** are components of a multiplexor valve, rather than separate valves. Also, the valves **160** may also be located in the base **106** rather than the nozzle head **102**. Each of the valves **160** may be actuated between opened and closed positions using one or more motors, which are not shown in order to simplify the illustration, responsive to control signals as discussed above. In one embodiment, each of the valves **160** in the sprinkler **100**, control a flow of water to one or more of the nozzles **104** of the nozzle head **102**. For example, valve **160**A can be used to control the flow of water through a fluid flow path **170**A connecting the water inlet **108** to the inlet **120** of the nozzle **104**A, valve **160**B can be used to control the flow of water through the fluid flow path **170**B connecting the water inlet **108** to the inlet **120** of the nozzle **104**B, and valve **160**C can be used to control the flow of water through the fluid flow path **170**C connecting the water inlet **108** to the inlet **120** of the nozzle **104**C.

[0083] The flow of water to each of the nozzles **104** of the sprinkler **100** may be controlled independently of the flow of water to the other nozzles in the rotary sprinkler **100** through the actuation of the valves **160**. As a result, individual nozzles may be turned on or off, or the flow rates through the nozzles **104** may be adjusted to a desired level to produce the desired watering areas **132**. For instance, while the rotary sprinkler **100** may have the capability of watering out to a 40 foot radial distance from the sprinkler **100**, it may be desirable to only water 25 feet from the sprinkler **100**. In that case, the one or more nozzles **104** responsible for covering the radial distance from 25 to 40 feet from the sprinkler **100** may be turned off by setting the corresponding valves **160** to the closed position. The flow of water to the remaining nozzles **104** may be reduced, if necessary, by setting the corresponding valves **160** accordingly.

[0084] In accordance with another embodiment, the rotary sprinkler **100** includes a sensor **172** that measures a parameter of the water in the fluid flow pathway **114** or **116**. In one embodiment, the sensor comprises a pressure sensor that measures a pressure of the fluid in the fluid flow pathway **114** (shown) or **116**. In accordance with another embodiment, the sensor **172** is a flow sensor that measures a flow rate of the water traveling through the fluid flow path **114** (shown) or **116**. In one embodiment, the sensor **172** produces an output signal **174** that is representative of the parameter measured by the sensor **172**.

[0085] In one embodiment, the sprinkler **100** includes a controller **164**. In one embodiment, the controller **164** represents one or more processors and circuitry used to perform

functions described herein. In one embodiment, the processor of the controller **164** is configured to execute sprinkler or watering program instructions stored in memory **166** (e.g., RAM, ROM, flash memory, or other tangible data storage medium) and perform method steps described herein responsive to the execution of the program instructions. Embodiments of the program instructions include the date and time to commence a watering operation, the duration of a watering operation, valve settings, and other information.

[0086] In one embodiment, the program instructions comprise valve settings and the controller **164** controls the one or more valves **160** in response to the valve settings. In one embodiment, the valve settings for each of the one or more valves **160** map a desired water flow rate through the valve **160** to a specific valve position. In one embodiment, this flow rate mapping is provided for a series of pressures. For example, when the inlet pressure is 40 psi and the desired input flow rate is 9 feet per second, the mapping will identify a valve position, which is included in the program instructions stored in the memory **166**. The valve settings may be dynamically set by the controller **164** based on the output signal **174** (flow rate or pressure) and a predefined desired water flow rate through the valve **160**. Accordingly, the controller **164** may adjust the flow of the water through the sprinkler **100** responsive to the execution of program instructions stored in the memory **166**.

[0087] In one embodiment, the sprinkler program instructions include valve setting instructions that are dependent upon the angular position of the nozzles **104** about the axis **126** relative to a reference. This allows for the generation of non-circular watering patterns by modifying the distance the discharged streams **130** travel from the sprinkler **100**. As a result, the sprinkler **100** can produce watering patterns that avoid targets that are within the range of the sprinkler **100** that should not be watered.

[0088] In one embodiment, the sprinkler program instructions include rotation speed settings that set the rotational speed of the nozzle head **102**. Execution of the program instructions by the controller **164** generate control signals to the motor **129** based on the rotation speed settings that are used to control the motor **129**. In one embodiment, the rotation speed settings define a constant rotational velocity for the nozzle head **102**. In accordance with another embodiment, the rotation speed settings are dependent upon the angular position of the nozzle head **102** about the axis **126** relative to a reference. Thus, in one embodiment, the executed program instructions generate control signals to the motor **129** that cause the rotational speed of the nozzle head **102** to vary depending on its angular position. This allows for control of the amount of water that is delivered to certain angular sections of the watering pattern generated by the sprinkler. For instance, while the nozzles deliver a continuous amount of water to their respective watering areas **132**, the nozzle head **102** may be rotated slower to deliver more water to an angular section of the watering pattern, or faster to deliver less water to an angular section of the watering pattern. This angular speed control of the nozzle head **102** may also be combined with the control of the positions of the one or more valves in each sprinkler **100** to control the amount of water that is delivered by the sprinkler **100**.

[0089] In one embodiment, the method steps comprise driving the rotation of the nozzle head **102** through the control of the motor **129** responsive to program instructions stored in the memory **166**.

[0090] In one embodiment, the method steps comprise receiving the output signal **174** from the sensor. In one embodiment, the method steps comprise processing the output signal **174** from the sensor to produce a value indicative of the measured parameter. In one embodiment, the method steps comprise communicating the output signal **174** or the corresponding value to a remote system, such as a system controller.

[0091] In one embodiment, the controller **164** is configured to receive control signals from a system controller located remotely from the sprinkler **100**, and process the control signals to perform method steps described herein, such as setting the positions of the one or more valves **160**, rotating the nozzle head **102**, communicating information, acknowledging communications, and other method steps. In one embodiment, the controller **164** relays the output signal **174** or a value represented by the output signal **174** to the system controller using either a wired or wireless communication link.

[0092] In one embodiment, the sprinkler **100** includes a power supply **175**, such as a battery, a capacitor, a solar cell or other source of electrical energy, that provides power to the processor of the controller **164**, the motor **129**, the motor **162**, the sensor **172** and/or other component of the sprinkler **100** requiring electrical energy. In one embodiment, the power supply **175** is a rechargeable power supply, which may be recharged by signals received over a control line **177** or other wired connection, such as from the system controller described below.

[0093] In accordance with another embodiment, the rotary sprinkler **100** includes a pressure regulator **176** that is configured to regulate a pressure of the water in the fluid flow paths **114** and/or **116**. In one embodiment, the pressure regulator **176** is configured to maintain a pressure of the water in at least the fluid flow path **116** below a maximum pressure, such as 40 psi.

[0094] A specific example of an in-ground version of the rotary sprinkler **100** will be described with reference to FIGS. **4-9**. FIGS. **4** and **5** are perspective views of the rotary sprinkler **100** depicting the nozzle head **102** in lowered and raised positions, respectively. In one embodiment, the base **106** comprises a lower container **180** and a pedestal **182** that extends above the container **180**. The nozzle head **102** is received within the pedestal **182** when in the lowered position (FIG. **4**) and extends to the raised position (FIG. **5**) in response to water pressure applied to the inlet **118** of the nozzle head **102**.

[0095] FIG. **6** is an exploded perspective view of the components contained within the container **180** of the base **106**. FIG. **7** is an exploded perspective view of the components contained or supported by the pedestal **182**. The fluid flow path **114** extends through a pipe fitting **184** that may be coupled to a water supply line **110** (FIG. **1**) and defines the water inlet **108**. The fluid flow path **114** also extends through a tubing section **186** having a proximal end **188** that attaches to the pipe fitting **184** and a distal end **190** that extends through a cover **192**.

[0096] In one embodiment, the tubing section **186** includes a valve **160** that is adapted to control the flow of water through the tubing section **186**. In one embodiment, a motor **162** drives the valve **160** between the closed, intermediary and fully opened positions through gears **194** and **196**.

[0097] In one embodiment, the nozzle head **102** is received within a rotatable support **200**, which in turn is received

within the pedestal **182**. The nozzle head **102** is allowed to telescope out of the rotatable support **200** from the lowered position (FIG. **4**) to the raised position (FIG. **5**) in response to the application of water pressure at the inlet **118** of the nozzle head **102**. In one embodiment, the nozzle head **102** includes protrusions **202** that extend from the exterior surface **204** and are generally aligned with the vertical axis **126**. The protrusions **202** are received within vertical slots **206** formed in the interior wall of the rotatable support **200**. The engagement of the protrusions **202** of the nozzle head **102** with the slots **206** of the rotatable support **200** causes the nozzle head **102** to rotate along with rotation of the rotatable support **200** about the vertical axis **126**.

[0098] In one embodiment, the sprinkler **100** comprises a drive mechanism **128** that is contained within the container **180**. In one embodiment, the drive mechanism **128** comprises a motor **129** that drives rotation of a gear **210** that is supported by the cover **192**. A bottom end **212** of the rotatable support **200** receives a cylindrical protrusion **214** and includes a gear **216**. The motor **129** of the drive mechanism **128** rotates the rotatable support **200** about the axis **126** using the gears **210** and **216**, which in turn drives the rotation of the nozzle head **102** relative to the pedestal **182** and the container **180** of the base **106**.

[0099] A spring **218** has a proximal end **220** that is attached to a hook **222** on the cover **192** and a distal end **224** that is attached to a structure supported within the nozzle head **102**. The spring **218** maintains the nozzle head **102** in the lowered position when there is insufficient water pressure at the inlet **118**, and allows the nozzle head **102** to extend to the raised position under sufficient water pressure at the inlet **118**.

[0100] In one embodiment, a filter screen **226**, shown in FIG. **7**, is located within the flow path **116** of the nozzle head **102**. Alternatively, the filter screen may be located in the flow path **114** of the base **106**.

[0101] In one embodiment, the rotary sprinkler **100** includes a controller **164** that is contained within the container **180**. In one embodiment, the controller **164** operates to control the motor **162** and the positions of the valve **160**. In one embodiment, the sprinkler **100** includes a sensor that detects the positions of the valve **160**. One exemplary sensor that can be used to carry out this function is a Hall effect sensor that detects a magnetic field of a magnet that is attached to the gear **196**, for example.

[0102] In one embodiment, the controller **164** controls the motor **129** of the drive mechanism **128** and the rotation of the nozzle head **102**. In one embodiment, the sprinkler **100** includes a sensor that detects the angular position of the nozzle head relative to the base **106**. One exemplary sensor capable of performing this function is a Hall effect sensor that can detect the magnetic field of a magnet that is attached to the rotatable support **200**, the nozzle head **102**, or the gear **216** to detect the angular position of the nozzle head **102** relative to the base **106**, for example.

[0103] In one embodiment, the controller **164** is configured to receive and process control signals from a system controller located remotely from the sprinkler **100**. The control signals received from the system controller may be provided either through a wired connection or wirelessly in accordance with conventional techniques. The controller **164** may perform method steps responsive to the control signals, as discussed above.

[0104] In one embodiment, the container **180** includes a sealed compartment, in which the electronics of the sprinkler **100** are housed. In one embodiment, the pedestal **182** includes a threaded base **230** which may be screwed on to a threaded opening **232** of the container **180**. A seal **234** is positioned between the threaded base **230** and the container **180** to prevent water from entering the compartment containing the electronics.

[0105] The plurality of nozzles **104** are supported by the nozzle head **102**. In one embodiment, the nozzles **104** are formed in a nozzle assembly **240**. The nozzle assembly **240** is secured to the nozzle head **102** such that the nozzle assembly **240** rotates with rotation of the nozzle head **102**. FIG. **8** is an exploded perspective view of the nozzle assembly **240** in accordance with embodiments of the invention. The nozzle assembly **240** may comprise two or more components depending on the number of nozzles **104**. Thus, while the illustrated embodiment of the nozzle assembly **240** includes three components that align to form twelve nozzles **104**, the nozzle assembly **240** may include two halves that form two or more nozzles **104**. In one embodiment, the components forming the nozzle assembly **240** are secured together using nuts **242** and bolts **244**. Alternatively, the components forming the nozzle assembly **240** may be connected using an adhesive, by welding the components together, or other suitable technique. Further, the nozzle assembly **240** may also be molded as a single unitary component.

[0106] In one embodiment, the nozzle assemble **240** comprises end components **246** and **248** and a central component **250**. Each end component **246** and **248** includes one half of the fluid pathways **122** of each of the nozzles **104**. The other half of the fluid pathways **122** of the nozzles **104** are formed by the central component **250**. When the components **246**, **248** and **250** are assembled, each half of the fluid pathway **122** of each nozzle **104** is aligned with its corresponding half fluid pathway **122** to form the full nozzle **104**.

[0107] FIG. **9** is a side view of the central component **250** of the nozzle assembly **240** and, therefore, a cross-sectional view of one set of the nozzles **104**. As shown in FIG. **9**, the inlets **120** of each of the nozzles **104** open to a cavity **252** at the base **254** of the nozzle assembly **240**. Water received at the inlet **118** of the nozzle head **102** travels through the nozzle head **102** to the cavity **252** where it is provided to inlets **120** of the nozzles **104**.

[0108] In one embodiment, one or more of the nozzles **104** includes a curved section **260** and a straight section **262**. In one embodiment, the curved section **260** extends from the inlet **120** to a location **264** between the inlet **120** and the outlet **124**. The straight section **262** extends from the location **264** to the outlet **124**.

[0109] FIG. **10** is a simplified diagram of a sprinkler system **270** in accordance with embodiments of the invention. The sprinkler system **270** generally includes a plurality of the rotary sprinklers **100** formed in accordance with embodiments of the invention. Each of the sprinklers **100** are coupled to a pressurized water supply **272**, such as a household water supply, a pumped water supply, or other convention water supply. In one embodiment, the system comprises a system controller **274** comprising at least one processor **276** and memory **278** (e.g., RAM, ROM, flash memory, or other tangible data storage medium). In one embodiment, the memory **278** contains program instructions that are executable by the processor to perform method steps described herein.

[0110] In one embodiment, the system controller **274** communicates with each of the sprinklers **100** over one or more wired or wireless communication links represented by lines

280 formed in accordance with standard communication protocols. In one embodiment, the control signals provided over the communication links 280 are generated responsive to the execution of the program instructions in the memory 278 by the processor 276. In one embodiment, the control signals are communicated over the communication links 280 to controllers 164 of the rotary sprinklers 100. The controllers 164 are configured to operate the sprinklers 100 (e.g., set valve positions, rotate the nozzle head, etc.), communicate information (e.g., sensor information) back to the system controller 274, or perform other function responsive to the control signals. Alternatively, when the rotary sprinklers 100 do not include a controller 164, the control signals may be communicated over the communication links 280 directly to the relevant components of the sprinklers 100, such as the motor 162 or the motor 129, for example. Also, the outputs 174 from the sensors 172 of the rotary sprinklers 100 may also be communicated over the communication links 280 to the system controller 274.

[0111] In one embodiment, the control signals comprise valve settings for setting the positions of the one or more valves 160 in each of the controllers 100. When the sprinklers 100 include the one or more valves 160, it is not necessary to include separate valves 282 for each of the water lines 110 feeding different groups of the rotary sprinklers 100. Rather, the system controller 274 may individually activate any one of the rotary sprinklers 100 through the control signals. Thus, the system controller 274 is capable of activating and deactivating individual rotary sprinklers 100 based on the execution of the watering program instructions stored in memory 278.

[0112] In one embodiment, the system 270 includes one or more valves 282 that operate to control the flow of water along one or more of the water lines 110. In accordance with this embodiment, the system controller 274 is configured to control the positioning of the valves 282 using an appropriate control signal over a communication link 284 in accordance with conventional techniques. In accordance with this embodiment, it may not be necessary for each of the rotary sprinklers 100 to include their own internal valves 160. However, the inclusion of the valves 160 in the rotary sprinklers 100 allow the system controller 274 to activate individual sprinklers 100 within each group of sprinklers 100 fed by the corresponding valve 282.

[0113] In one embodiment, the memory 278 comprises a series of valve settings for each of the valves 160 of the sprinklers 100 that map a desired water flow rate through the valve 160 to a valve position, as described above. The valve settings may be dynamically set by the controller 274 based on the output signal 174 (flow rate or pressure) from the sensor 172 (or a sensor in the water line 110) and a predefined desired water flow rate through the valve 160. Alternatively, when the pressure in the system is regulated, such as by pressure regulator 176, the valve settings may be fixed in the watering program stored in the memory 278.

[0114] FIG. 11 is a simplified diagram of a watering system 300 in accordance with systems of the prior art. As with system 270, the watering system 300 includes a water supply 272 that is fluidically coupled to multiple sprinklers 302 through a water line 110. The sprinklers 302 are typically passive sprinklers, groups of which are activated in response to the opening of a valve 304 in the water line corresponding to the group.

[0115] The system 300 also includes an irrigation controller 306. Embodiments of the controller 306 include memory 307 (e.g., ROM, RAM, flash, or other tangible data storage medium) and at least one processor 308. The memory 307 contains zone program instructions that are executable by the processor 308 to control the valves 304 and perform a desired watering operation. For example, the irrigation controller 306 generates zone valve signals 310 based on the zone program instructions that open one of the valves 304 of the system 300 responsive to the program instructions using the signals 310. The opened valve 304 feeds water to the corresponding group of sprinklers 302 and a watering operation by the group of sprinklers 302 commences. After a predetermined period of time, the controller 306 closes the valve 304 and opens another valve 304 using the signals 310 to feed water to another group of the sprinklers 302 and commence another watering operation. This is repeated until all the groups of sprinklers 302 perform their watering operation in accordance with the program instructions.

[0116] One embodiment of the invention relates to updating prior art sprinkler systems, such as system 300, to include the rotary sprinklers 100 formed in accordance with one or more embodiments described herein. FIG. 12 is a simplified diagram illustrating such an update to the system 300 depicted in FIG. 11. In one embodiment, the sprinklers 302 are replaced with sprinklers 100 formed in accordance with embodiments of the invention. Depending on the needs of the system, it may not be necessary to replace each of the sprinklers 302 with one of the sprinklers 100. Rather, it may be possible to use fewer of the sprinklers 100 than were previously required to perform the desired watering operations.

[0117] The system controller 274 is also added. If necessary, wired communication links 280 between the system controller 274 and the rotary sprinklers 100 are installed. Wireless communication links may also be used.

[0118] In one embodiment, the system controller 274 is configured to detect the activation of the valves 304 and activate the corresponding sprinklers 100 that are fed by the open valve 304. This detection may occur by intercepting or receiving the signal 310 transmitted by the irrigation controller 306 to the valve 304. Alternatively, the system controller 274 may detect the rise in pressure in the water line 110 using the sensor 172 within one or more of the sprinklers 100, or a pressure sensor that is installed in the line 110. Upon detection of the opening of the valve 304, the system controller 274 activates the corresponding sprinklers 100 and the watering operation commences. This is repeated for each of the groups of sprinklers 100 in the system.

[0119] In one embodiment, each of the sprinklers 100 include at least one valve 160 to control the flow of water through the sprinkler 100. As a result, the valves 304 are no longer needed in the system. Thus, in one embodiment, the valves 304 are removed from the system or left in their opened position. The signal 310 is then directed to the controller 274, and the controller 274 controls the valves 160 in the sprinklers 100 to perform the desired watering operation.

[0120] The system controller 274 can also detect when the irrigation controller 306 closes one of the valves 304 using the same techniques described above. When the closing of the valve 304 is detected, the system controller 274 deactivates the one or more sprinklers 100 being fed water by the valve 304.

[0121] In accordance with a more specific embodiment, the system controller 274 provides power and control signals to the one or more sprinklers 100 through one or more wired connections 280 to the sprinklers 100. The power may be used to charge a capacitor or other power supply 175. Upon initial

detection of the opening of one of the valves **304**, the system controller **274** turns on the power to the corresponding one or more sprinklers **100** being fed water by the opened valve **304**. In one embodiment, the sprinklers **100** are initially turned on for a set period of time to charge up the power supply **175**. The system controller **274** then sends a command to the one or more sprinklers **100**, which is acknowledged by the controllers **164** of the sprinklers **100**. After the acknowledgement is received by the system controller **274**, the system controller **274** sends watering instructions to each of the one or more sprinklers **100** in the group. The one or more sprinklers **100** in the group acknowledge receipt of the watering instructions. The system controller **274** then activates the group of sprinklers **100** and each of the sprinklers **100** in the group begins to execute their watering instructions. When the irrigation controller **306** closes the valve **304**, the system controller **274** sends a command to the one or more sprinklers **100** in the group to stop the watering operation and the controllers **164** of the sprinklers **100** acknowledge receipt of the instruction. The system controller **274** then provides sufficient power for each of the sprinklers **100** in the group to close their one or more valves **160** before deactivating the sprinklers **100** in the group. This process is then continued for each group of one or more sprinklers **100** associated with each of the valves **304**.

[0122] Some embodiments are directed to manufacturing a rotary sprinkler formed in accordance with one or more embodiments described herein. In one embodiment, this involves designing the nozzles **104** using Equations 1-5 described above to optimize the design for best watering uniformity. These equations provided the mathematical correlation between the ring spacing determined by the variable m and the ring-to-ring ratio determined by variable a. As mentioned above, it has been empirically found that an m=91 provide good watering uniformity for one embodiment. The stream distance for each nozzle is set by the nozzle trajectory based on each nozzle having the same trajectory velocity. Another step in achieving uniformity is having the same velocity and flow characteristic in multiple nozzles over a range of pressures, such as up to 40 psi for a 40 foot throw distance in one embodiment. In some embodiments, this is achieved by making sure that the tube portion of each nozzle is long enough to provide a turbulent flow inside of the nozzle tube up to 40 psi and setting the length of each nozzle to achieve the same velocity. If the nozzle length is too short, cavitation appears at high pressure and disrupts the uniformity of the stream as mentioned above.

[0123] In some embodiments, the method for designing or manufacturing a nozzle head **102** of the type embodied herein comprises one or more of the following method steps described below. In some embodiments, a maximum water throw distance is determined for the sprinkler based on the maximum available water pressure, and the water velocity needed to achieve the maximum throw distance based on a given trajectory angle, such as 30 degrees. In some embodiments, the overall nozzle diameter needed to achieve the maximum throw distance given the water velocity and trajectory angle is determined. This diameter sets the overall area of all of the nozzles combined. In some embodiments, the water discharge velocity is computed based on the change in diameter and velocity from inside the water supply to that inside of the nozzle. In some embodiments, Equations 1-5 are used to map out a set of 8 or more nozzles that achieve the goal of uniform water distribution across the entire watering field. The size of inner ring nozzles may be limited due clogging. Inner ring nozzles may also be made to stream less in order to spread the water more evenly at short radial distances from the nozzle head **102**.

[0124] In some embodiments, Darcy's formula is used compute the length of the largest diameter nozzle using the pressure difference needed to achieve the maximum velocity at the maximum psi, for example 40 psi of dynamic pressure and 39 fps and 12.5 psi of pressure difference or drop in one embodiment. Using the same pressure difference, the lengths of the remaining nozzles are computed to achieve the same water discharge velocity for all of the nozzles.

[0125] In some embodiments, the trajectory angle of each nozzle is computed using Equations 1-5 based on the radial distance that the discharged water stream is to travel and the height of the nozzle above the ground.

[0126] When combined with a digitally controlled valve and digitally controlled rotor within which the nozzle is mounted, the water flow through the nozzle head can be adjusted and the speed of rotation adjusted together to water a complex landscape shape achieving a uniform water distribution much like rainfall.

[0127] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. For example, the location of the nozzles **104** may be changed from that depicted herein. That is, while the depicted embodiments generally illustrate the nozzles **104** being vertically aligned, the nozzles **104** may be angularly displaced from each other about the vertical axis of the nozzle head. Other configurations are also possible.

What is claimed is:

1. A rotary sprinkler comprising:
a nozzle head; and
at least 8 nozzles supported by the nozzle head;
wherein:
the nozzles are configured to discharge water streams at substantially the same velocity, but to different radial distances from the nozzle head; and
each water stream produces a spray pattern that overlaps at least one adjoining spray pattern.

2. The rotary sprinkler of claim **1**, wherein:
each of the nozzles comprises a nozzle fluid pathway including a central axis, an inlet, an outlet, a length measured from the inlet to the outlet along the central axis, and an interior diameter at the outlet; and
the central axes of the nozzles are oriented at different angles relative to a horizontal plane.

3. The rotary sprinkler of claim **2**, wherein the interior diameters of the nozzles are each different.

4. The rotary sprinkler of claim **3**, wherein the lengths of each of the nozzles are different.

5. The rotary sprinkler of claim **4**, further comprising:
a controller; and
a plurality of valves each configured to control a flow of water through one of the nozzles responsive to a signal from the controller.

6. The rotary sprinkler of claim **4**, further comprising:
a valve configured to control a flow of water through the fluid flow path;
a memory;
a flow rate mapping of water flow rates to valve positions for given pressures in the fluid flow path stored in the memory; and

a controller comprising a processor configured to adjust the valve position based on the flow rate mapping.

7. The rotary sprinkler of claim **6**, wherein:

the sprinkler comprises a sensor that generates a signal indicative of a pressure in the fluid flow path, or a flow rate of a water flow through the fluid flow path; and

the controller is configured to adjust the valve position based on the signal from the sensor and the flow rate mapping.

8. The rotary sprinkler of claim **1**, wherein the spray patterns provide substantially uniform watering per unit length in radial distance from the head.

9. A rotary sprinkler comprising:

a first nozzle comprising a first nozzle fluid pathway including a central axis, an inlet, an outlet, a first length measured from the inlet to the outlet along the central axis, and a first interior diameter at the outlet;

a second nozzle comprising a second nozzle fluid pathway including a central axis, an inlet, an outlet, a second length measured from the inlet to the outlet along the central axis, and a second interior diameter at the outlet; and

a third nozzle comprising a third nozzle fluid pathway including a central axis, an inlet, an outlet, a third length measured from the inlet to the outlet along the central axis, and a third interior diameter at the outlet;

wherein:

the first nozzle is configured to discharge a first water stream a first distance;

the second nozzle is configured to discharge a second water stream a second distance, which is less than the first distance;

the third nozzle is configured to discharge a third water stream a third distance, which is less than the second distance; and

the velocities of the first, second and third water streams are approximately the same.

10. The rotary sprinkler of claim **9**, wherein:

the central axis at the outlet of the first nozzle fluid pathway is oriented at a first angle relative to a horizontal plane, which is perpendicular to the vertical axis;

the central axis at the outlet of the second nozzle fluid pathway is oriented at a second angle relative to the horizontal plane;

the central axis at the outlet of the third nozzle fluid pathway is oriented at a third angle relative to the horizontal plane;

the first angle is greater than the second angle; and

the second angle is greater than the third angle.

11. The rotary sprinkler of claim **10**, wherein:

the first, second and third water streams respectively produce first, second and third spray patterns;

the first spray pattern overlaps a distal portion of the second spray pattern; and

the second spray pattern overlaps a distal portion the third spray pattern.

12. The rotary sprinkler of claim **11**, wherein the spray patterns provide substantially uniform watering per unit length in radial distance from the head.

13. The rotary sprinkler of claim **11**, wherein:

the first interior diameter is greater than the second interior diameter;

the second interior diameter is greater than the third interior diameter;

the first length is greater than the second length; and

the second length is greater than the third length.

14. The rotary sprinkler of claim **13**, wherein:

the second length is approximately 65-85% of the first length; and

the third length is 65-85% of the second length.

15. The rotary sprinkler of claim **9**, further comprising:

a main water inlet configured to receive a flow of water from a water supply line; and

a fluid flow path connecting the main water inlet to the inlets of the first, second and third nozzles.

16. The rotary sprinkler of claim **15**, wherein the fluid flow path comprises:

a first fluid flow path connecting the water inlet to the inlet of the first nozzle;

a second fluid flow path connecting the water inlet to the inlet of the second nozzle;

a third fluid flow path connecting the water inlet to the inlet of the third nozzle;

a first valve configured to control a flow of water through the first fluid flow path responsive to signals received from a controller;

a second valve configured to control a flow of water through the second fluid flow path responsive to signals received from a controller; and

a third valve configured to control a flow of water through the third fluid flow path responsive to signals received from a controller.

17. The rotary sprinkler of claim **15**, further comprising:

a valve configured to control a flow of water through the fluid flow path;

a memory;

a flow rate mapping of water flow rates to valve positions for given pressures in the fluid flow path stored in the memory; and

a controller comprising a processor configured to adjust the valve position based on the flow rate mapping.

18. The rotary sprinkler of claim **17**, wherein:

the sprinkler comprises a sensor that generates a signal indicative of a pressure in the fluid flow path, or a flow rate of a water flow through the fluid flow path; and

the controller is configured to adjust the valve position based on the signal from the sensor and the flow rate mapping.

19. A sprinkler system comprising:

a plurality of rotary sprinklers, each comprising:

a water supply inlet;

a nozzle head supported by a base;

at least 8 nozzles supported by the nozzle head, wherein the nozzles are configured to discharge water streams at substantially the same velocity, but to different radial distances from the nozzle head and each water stream produces a spray pattern that overlaps at least one adjoining spray pattern;

a fluid flow path connecting the water supply inlet to inlets of the nozzles; and

at least one valve configured to control a flow of water through the fluid flow path;

an irrigation controller comprising:

memory containing zone program instructions; and

a processor configured to execute the zone program instructions and generate zone valve signals based on the zone program instructions;

a system controller comprising:

memory containing sprinkler program instructions; and

a processor configured to execute the sprinkler program instructions and communicate control signals to the at least one valve of each of the rotary sprinklers based on the sprinkler program instructions and the zone valve signals.

20. The system according to claim **19**, wherein:

the system comprises a sensor configured to produce a sensor output indicative of a measured pressure or water flow rate; and

the control signals are based on the sensor output.

* * * * *