



(51) International Patent Classification:

B01L 3/00 (2006.01) *G01N 1/28* (2006.01)
F16K 99/00 (2006.01) *G01N 1/38* (2006.01)
G01N 1/10 (2006.01)

(21) International Application Number:

PCT/US2016/037225

(22) International Filing Date:

13 June 2016 (13.06.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/174,310 11 June 2015 (11.06.2015) US

(71) Applicant: NEOFLUIDICS LLC [US/US]; 4110 22nd
Place, Lubbock, TX 79410 (US).

(72) Inventor: SOLOMON, Deepak; 923 Alturas Road, Apt.
75, Fallbrook, CA 92028 (US).

(74) Agent: WOODEN, Sean, S.; Andrews Kurth, LLP, 1350 I
Street, N.W. Suite 1100, Washington, DC 20005 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MANUAL OR ELECTRONIC PIPETTE DRIVEN WELL PLATE FOR NANO-LITER DROPLET STORAGE AND METHODS OF USING SAME

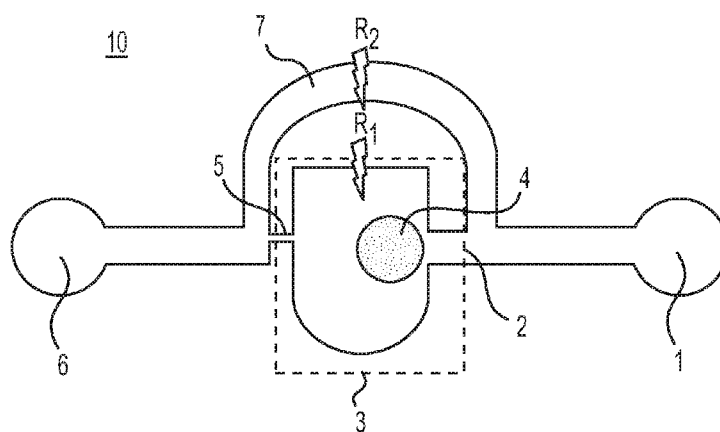**FIG. 1A**

(57) Abstract: Described herein are pipette driven well plates for nano-liter droplet storage and methods of using same. Embodiments may include an inlet, an outlet, a bypass channel, and a fluidic trap containing a valve covered by a removable covering, in which the fluid enters the fluidic trap when the removable covering is removed. The fluid enters either the fluidic trap or the bypass channel, depending on which of the fluidic trap or bypass channel has the lower hydrodynamic resistance. Embodiments may be used by closing the valve, introducing a first fluid to fill the fluidic trap and partially fill a bypass channel, opening the valve, removing the first fluid surrounding the valve, and introducing a second fluid into the fluidic trap, in which the introducing results in a mixture of the first and second fluids.



MANUAL OR ELECTRONIC PIPETTE DRIVEN WELL PLATE FOR NANO-LITER DROPLET STORAGE AND METHODS OF USING SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims priority to U.S. Provisional Application No. 62/174,310, filed on June 11, 2015. The entirety of the aforementioned application is incorporated herein by reference.

TECHNICAL FIELD

This disclosure is generally related to well plates. More particularly, this disclosure is related to a pipette driven well plate for nano-liter droplet storage.

BACKGROUND

The general state of the art relates to microfluidic processes that can create and manipulate nano-liter droplets of fluid (see, *e.g.*, U.S. Patent No. 8,528,589 entitled “Manipulation of Microfluidic Droplets,” Miller et al.). Prior art involves creation of drops outside the array, using membranes as valves (see, *e.g.*, WO2009139898, entitled “Valves And Other Flow Control In Fluidic Systems Including Microfluidic Systems,” Abate et al.), using pumps as valves (see, *e.g.*, U.S. PG PUB 20050106066, entitled “Microfluidic Devices For Fluid Manipulation And Analysis,” Saltsman et al.), using pressure controlled valves (see, *e.g.*, WO2014138203, entitled “Microfluidic Devices For The Rapid And Automated Processing Of Sample Populations,” Ben-Yakar et al.) to selectively merge different fluids or using electric charges (see, *e.g.*, U.S. PG PUB 20100255556, entitled “Methods And Apparatus For Manipulation Of Fluidic Species,” Hunt et al.) electro-coalescence (see, *e.g.*, U.S. Patent No. 2,920,982, entitled “Method Of Electrostatically Coating By Causing Coalescence Of Coating Droplets,” Miller Emery P.) or fluids that have electrical properties (see, *e.g.*, U.S. PG PUB 20110114190, entitled “Microfluidic Droplet Generation and/or Manipulation With Electrorheological Fluid,” Wen et al.). Other technologies involve the use of separation media that can selectively be induced/removed to manipulate drop species in microfluidic devices (see, *e.g.*, WO2004103565, entitled “Device And Method For Structuring Liquids And For Dosing Reaction Liquids Into Liquid Compartments Immersed In A Separation Medium,” Baier et al.).

Currently, microfluidic static droplet arrays allow drops to be stored in “hydrodynamic traps” using an immiscible phase that is typically oil (see, *e.g.*, U.S. Patent No. 7,556,776, entitled “Microfluidic Manipulation of Fluids and Reactions,” Fraden et al. and WO2012154688, entitled “Methods and Devices to Control Fluid Volumes, Reagent and Particle Concentration in Arrays of Microfluidic Drops,” Bithi et al.). After these drops are

1 FIGS. 2A-2C show diagrams of a single fluidic trap portion of an embodiment of a
2 manual or electronic pipette driven well plate for nano-liter droplet storage that illustrate a
3 procedure or method for filling the fluidic trap.

4 FIGS. 3A-3D show diagrams of a single fluidic trap portion of an embodiment of a
5 manual or electronic pipette driven well plate for nano-liter droplet storage that illustrate a
6 procedure or method for cleaning channels before dilution.

7 FIGS. 4A-4D show diagrams of a single fluidic trap portion of an embodiment of a
8 manual or electronic pipette driven well plate for nano-liter droplet storage that illustrate a
9 procedure or method for diluting contents in the fluidic trap.

10 FIG. 5 is a graph showing the extent of mixing in an embodiment of a manual or
11 electronic pipette driven well plate for nano-liter droplet storage using various amounts of
12 dilutant by changing the pipetting mixing speed using a commercially available electronic
13 pipette.

14 FIGS. 6A-6E show micrograph images of an embodiment of a manual or electronic
15 pipette driven well plate for nano-liter droplet storage illustrating a procedure or method of
16 diluting a droplet using the passive valve of such embodiment.

17 FIGS. 7A-7B show diagrams of different embodiments of an embodiment of a manual or
18 electronic pipette driven well plate for nano-liter droplet storage.

19 FIGS. 8A-8B show graphs of dilution carried out using an electronic pipette of an
20 embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage.

21 FIGS. 9A-9B show various dilution profiles for schematics shown in FIG. 7A using the
22 mixing function with an electronic pipettor of an embodiment of a manual or electronic pipette
23 driven well plate for nano-liter droplet storage.

24 FIG. 10 shows a dilution profile for the schematic in FIG. 7B.

25 FIGS. 11A-11B show diagrams of a modification of the circular trap with a side arm of
26 an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage.

27 FIGS. 12A-12B are graphs of dilution using the mixing function for the schematics of
28 designs described in FIGS. 11 A-11B, respectively.

29 FIG. 13 is a graph of HDAC assay standard curve generated using the design shown in
30 schematic FIG. 7A.

31 FIGS. 14A-14B show readings on a well plate reader for different concentrations of dye
32 and fluorescein solutions, respectively, for fluids trapped using the technique described in FIG.
33 7A of an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet
34 storage.

FIGS. 15A-15C show dilutions of cells in media after they are loaded in the schematic of design FIG. 7A of an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage.

FIG. 15D shows a graph of the reduction in population of the cells in the trap using mixing function in an electronic pipette as a function of mixing cycles.

FIG. 16 shows a schematic to achieve single cell trapping with the design illustrated in FIG. 7A.

FIGS. 17A-17E show pictures and graphs of the operation of the device illustrated in FIG. 16.

FIG. 18 shows an embodiment of manual or electronic pipette driven well plate for nano-liter droplet storage including an array of connected 96 fluidic traps.

FIG. 19 shows an active lid for the connected traps in an embodiment of manual or electronic pipette driven well plate for nano-liter droplet storage.

FIG. 20 shows an embodiment of manual or electronic pipette driven well plate for nano-liter droplet storage including an array of individual fluidic traps.

FIG. 21 shows a static lid for the individual traps in an embodiment of manual or electronic pipette driven well plate for nano-liter droplet storage.

FIG. 22 is a flowchart showing a method of using the manual or electronic pipette driven well plate for nano-liter droplet storage, according to one aspect of this disclosure.

DETAILED DESCRIPTION

Described herein are embodiments of a manual or electronic pipette driven well plate for nano-liter droplet storage. Also described herein are operations on selected drops in an array according to the embodiments. Also described are one-step serial dilutions in embodiments using atmospheric pressure as a unique valve. Embodiments may be used for DNA purification, polymerase chain reaction (PCR) assays, enzyme-linked immunosorbent (ELISA) based assays, and three-dimensional cell cultures. Embodiments may be used in the pharmaceutical industry for high throughput screening and cell based studies, point of care diagnostics, academic labs, contract research organizations, genomics industry, and drug testing.

Embodiments overcome the problems described above. Embodiments overcome the problems of the prior art. For example, embodiments provide a new passive valve to overcome the problem with current state of the art droplet trapping and selective dilution. In embodiments, a valve is constructed by drilling a hole near the specially designed opening in each droplet trap. Each droplet trap is 2mm in diameter and nearly 200 microns in height. This hole is positioned 200-500µm from a channel, which is 500-micron meter in length and 200 microns in width leading to the trap. When the hole is open to the atmosphere the circuit between the trap (lower

1 channel) and bypass channel (upper channel) is broken. When the hole is closed the circuit is
2 complete.

3 In embodiments, the manual or electronic pipette driven well plate for nano-liter droplet
4 storage device may be made with polydimethylsiloxane (PDMS), cyclic olefin copolymer
5 (COC), polymethyl methacrylate (PMMA), polycarbonate (PC), or other polymers. In an
6 embodiment, hydrophobic PDMS is bonded to a hydrophilic glass slide. Embodiments of the
7 device include an inlet, an outlet, and the valve/hole in the hydrodynamic trap. The inlet and
8 outlet remain open to atmospheric pressure during the entire process. The hole (herein the
9 “valve”) that is drilled into the trap is closed using a thin sheet of polymer, such as scotch tape.
10 Fluid is introduced into the design using a manual or electronic pipette. Consequently, the fluid
11 fills the hydrodynamic trap and excess fluid is pushed into a bypass channel. This increases the
12 hydrodynamic resistance in the bypass channel. The valve is then opened to the atmosphere by
13 removing the thin sheet of polymer (*e.g.*, the scotch tape) from over the valve hole. A suction is
14 then produced at the inlet, *e.g.*, using a pipettor, causing the removal of fluid surrounding the
15 valve to create a crescent shaped amount of fluid behind the valve (see, *e.g.*, FIG. 6B). This
16 crescent shaped fluid behind the valve is trapped owing to the high surface tension between the
17 fluid and air in the small constriction situated downstream of the fluidic trap. A second reagent
18 may then be introduced into the inlet to interact with the fluid stored behind the valve when in
19 open state (see, *e.g.*, FIG. 6C). The fluid introduced coalesces with the stored fluid to produce a
20 mixture. The composition of this mixture can be varied using the speed of the mix cycle and the
21 amount of second reagent for mixing a setting that is available in most commercially available
22 electronic pipettes.

23 Embodiments use a total volume of 3 microliters for dilution. By changing the amount
24 of fluid, number of mix cycles, and the speed of the mixing cycle, the original fluidic
25 composition may be varied. Once operation on the droplet is complete the diluting plug is
26 removed from the stored drop and the valve is again closed using the polymer film (*e.g.*, scotch
27 tape). Subsequently, any fluid that enters the inlet cannot access this droplet as the air trapped
28 (caused before closing the valve when diluting the plug is sucked back into the inlet) between
29 the valve and the connecting channel that is in turn connected to the inlet acts as a barrier. This
30 causes the fluid being injected to pass into the bypass channel and into subsequent connected
31 traps present in the array. When the valve is open the fluid passes again into the lower channel
32 to interact with the stored droplet. This method, therefore, allows one-step serial dilution that
33 can be controlled by changing the speed or the volume of plug in the electronic pipette. Hard-
34 wired operations on any selected drop in the array without changing the composition or
35 contaminating other droplets in the array can, therefore, be performed. High-throughput

screening operations of nano-liter drops may be conducted using just a pipettor. The coefficient of variation for the one step serial dilution is typically less than 10%. Increasing the pipetting accuracy of the electronic pipettor can further reduce this coefficient of variation.

FIG. 1A shows a diagram of a single fluidic trap portion 10 of an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage. The diagram illustrates a single fluidic trap portion 10 that includes a pipette tip inlet 1, an extended channel 2 from fluidic trap 3 to prevent contamination when drilled valve 4 is closed, the fluidic trap 3, *e.g.*, with a half circle radius of 1 mm and hydrodynamic resistance R_1 , the drilled valve 4, *e.g.*, with a height of ~ 4 mm and diameter of 0.5 mm, constriction piping for air 5, *e.g.*, with width of $90\mu\text{m}$ and length of $500\mu\text{m}$ preventing the contents in the fluidic trap from escaping, fluidic outlet 6 and bypass channel or upper branch 7. R_1 and R_2 , shown in FIG. 1A, refer to the upper and lower branch hydrodynamic resistances, respectively. With reference to FIGS. 1B-1C, shown are electrical analogy circuits of the single fluidic trap portion 10. In the electrical analogy circuits, the hydrodynamic resistances of the upper channel (R_1) and lower trap (R_2) are connected in parallel. As shown in FIG. 1B, when the valve 4 in the trap 3 is open to the atmosphere, the circuit is broken and the fluid first enters the valve 4. As shown in FIG. 1C, when the valve 4 is closed the circuit is complete and the fluid now enters the path with the least hydrodynamic resistance, which is part 7 in FIG. 1A.

FIGS. 2A-2C show diagrams of a single fluidic trap portion 10 of an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage that illustrate a procedure or method for filling the fluidic trap 3. The valve 4 is closed (FIG. 2A) and the reagent A fluid is injected with a pipette tip into inlet 1 with a pipettor (FIG. 2B). This causes the fluidic trap 3 to be filled with the reagent A fluid. A small amount of the reagent A fluid is left in the bypass channel 7 to enable effective dilution (FIG. 2C).

FIGS. 3A-3D show diagrams of a single fluidic trap portion 10 of an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage that illustrate a procedure or method for cleaning channels before dilution. The valve 4 is opened and suction is applied at the inlet 1 (FIG. 3A). This causes the reagent A fluid around the valve 4 to be removed, leaving a crescent-shaped volume of fluid in the fluidic trap 3. The valve 4 is then closed and cleaning fluid is passed or injected through the inlet 1 to remove any leftover reagent A fluid that is in the upper channel 7 (FIG. 3C). Some amount of the reagent A fluid however remains in the bypass channel 7, which increases the resistance R_2 of the bypass channel 7, preventing other fluids from entering the bypass channel 7 when valve 4 is open (FIG. 3D).

FIGS. 4A-4D show diagrams of a single fluidic trap portion 10 of an embodiment of a manual or electronic pipette driven well plate for nano-liter droplet storage that illustrate a

1 procedure or method for diluting contents in the fluidic trap 3. As noted above, a portion of the
2 reagent A fluid remains in bypass channel 7, preventing other fluid from entering the bypass
3 channel 7 when the valve 4 is open. The valve 4 is opened and dilutant fluid (*e.g.*, reagent B
4 fluid) is injected into the inlet 1 with a pipettor (FIG. 4A). Dilutant fluid enters the fluidic trap 3
5 and coalesces with the stored reagent A droplet, effecting advective and diffusive mixing in the
6 fluidic trap 3. After contents of the fluidic trap 3 are diluted, the dilutant fluid is removed back
7 via the pipette using a suction force created by the pipettor (FIG. 4B). This completes the
8 dilution state, during which the valve 4 is open. The valve 4 is then closed and extra dilutant
9 fluid in the bypass channel 7 is pulled back via suction into the pipette (FIGS. 4C-4D). Note
10 that the dilutant fluid being removed will not interact with the stored droplet due to the air
11 between the valve 4 and the main channel depicted as 3 in FIG. 1A.

12 FIG. 5 shows a graph showing the extent of mixing in an embodiment of a manual or
13 electronic pipette driven well plate for nano-liter droplet storage using various amounts of
14 dilutant by changing the pipetting mixing speed using a commercially available electronic
15 pipette (*e.g.*, Matrix Tech. Corp. electronic multichannel pipette). Error bars indicate standard
16 deviation for $n=5$ measurements.

17 FIGS. 6A-6E show micrograph images of an embodiment of a manual or electronic
18 pipette driven well plate for nano-liter droplet storage illustrating a procedure or method of
19 diluting a droplet using the passive valve of such embodiment. In FIGS. 6A, the valve 4 is
20 closed and a droplet of reagent A is stored in fluidic trap 3. In FIG. 6B, the valve 4 is open and
21 fluid around the valve 4 is evacuated using suction from a pipette at the inlet 1 (leaving a
22 crescent shaped droplet). In FIG. 6C, the diluting fluid or reagent B is introduced into the inlet 1
23 with valve 4 in an open state, in which reagent B coalesces with the stored crescent shaped drop
24 of reagent A, and mixing occurs. In FIG. 6D, after the mixing cycle is complete, extra fluid is
25 sucked back into the pipette with the valve 4 in open state. In FIG. 6E, fluid in the trap 3 is now
26 diluted and valve 4 is closed.

27 FIGS. 7A-7B show diagrams of different embodiments of the present disclosure. FIG.
28 7A shows a trap that is circular in geometry having an inlet 1, extended channel upstream of the
29 trap 2 to prevent contamination if the trap 2 is connected in series to other similar traps, drilled
30 valve 4, circular trap 5, air based constriction 6, and outlet 7. FIG. 7B shows a series of
31 circular traps with drilled valves 4 that are connected in series to each other with inlet 1, a series
32 of circular traps each having bypass channel 3, drilled valve 4, circular trap 5, air based
33 constriction 6, and outlet 7.

34 FIGS. 8A-8B show graphs of dilution carried out using an electronic pipette (*e.g.*, Matrix
35 Tech. Corp. electronic multichannel pipette). FIG. 8A shows the percentage of dilution

accomplished in a trapped drop where valve 4 is open and dilutant fluid enters the inlet 1 and exits directly through the valve 4. FIG. 8A shows a profile for two different fluids at different volumes of dilutant fluid as function of the number of diluting plugs used. FIG. 8B shows a similar graph for water-like fluids of different volumes as a function of remaining concentration of original fluid in the trap 3 vs. the number of diluting plugs that are used for dilution.

FIGS. 9A-9B show various dilution profiles for schematics shown in FIG. 7A using the mixing function with an electronic pipettor. In these graphs, fluid enters through the inlet 1 and interacts with the stored droplet when the hole 4 is open, and after the operation the fluid retracts back into the pipette tip. FIG. 9A is a graph of dilution range (expressed here as % normalized concentration in the trapped droplet) against the number of mixing cycles performed. Here, speed is fixed at setting 5 and the volume of dilutant is also fixed at 2 μ L. FIG. 9B shows a similar graph of dilution range against the number of mixing cycles performed. Here, speed is fixed at setting 5 and volume of dilutant is fixed at 1 μ L. One of ordinary skill in the art would readily recognize that speed and volume of dilutant may be set to any value.

FIG. 10 shows the dilution profile for the schematic in FIG. 7B (array of traps), and the operation that was used in this case was mixing. Mixing was performed sequentially or selectively in the traps by opening the selected trap and closing the other traps to prevent contamination.

FIGS. 11A-11B show diagrams of a modification of the circular trap 5 with a side arm 6. The side arm 6 when closed allows normal operation of the trap 5 for fluidic operations such as trapping, and when open allows extraction of the contents of the trap 5 via the side arm outlet 7. This can be particularly useful for applications such as single cell trapping, where a single cell can be trapped and removed from the side arm outlet 7 for further processing *e.g.*, in micro well plates. FIG. 9B represents an array 2 of the aforementioned traps 5 with side arms 6 connected to each other in a series arrangement. In FIG. 11B, 1 represents the inlet, 2 an array of traps with side arms 6 connected in series, 3 the bypass channel, 4 is the trap, 5 is the air based constriction, 6 is the sidearm, 7 is the outlet of the side arm, 8 is the drilled valve of the trap 4, and 9 is the outlet of the trap 4.

FIGS. 12A-B show graphs of dilution using the mixing function for the schematics of designs described in FIGS. 11A-B, respectively. FIG. 12A shows the dilution profile at various volumes of dilutant fluid as a function of the number of mixing cycles. FIG. 12B shows the dilution profile for an array of traps for the schematic shown in FIG. 11B. The volume of dilutant fluid was set to 10 μ L.

FIG. 13 shows a graph of HDAC assay standard curve generated using the design shown in FIG. 7A. The data obtained from the design is designated as "Assay On chip" in this graph.

FIGS. 14A-B show readings on a well plate reader for different concentrations of dye and fluorescein solutions, respectively, for fluids trapped using the technique described in FIG. 7A.

FIGS. 15A-C show dilutions of cells in media after they are loaded in the schematic of FIG. 7A. FIG. 15D shows a graph of the reduction in population of the cells in the trap using mixing function in an electronic pipette as a function of mixing cycles.

FIG. 16 shows a schematic to achieve single cell trapping with the design described above with reference to FIG. 7A, albeit that no hole/valve is required to be present in the trap while operating this design. A parent “large trap” 4 with elongated entrance to trap 2 and having inlet 1, bypass channel 3, constriction 5 connecting large channel 6 and constricted channel 7 immediately downstream is shown. Smaller rectangular traps 9 with dimensions of 1mm width and 0.5mm breadth are connected downstream of the parent trap with their outlets facing the parent trap. Each smaller trap has an inlet to trap 10, air based constriction 11, bypass channel 8 and inlet 12. To operate this device, a solution containing cells (*e.g.*, 6000 cells/ μ L) is first introduced into the parent trap 4 using a pipettor until it fills the trap, excess solution is then removed from the bypass channel by pulling back the fluid using a pipettor. The connected smaller traps are prefilled with media or other solutions using the same method. Media solution is then passed through inlet 1 of the parent trap followed by a plug of air using a pipettor, and the media collects a small number of cells from the parent trap and consequently deposits the cells into the smaller traps, excess media then leaves the device through 12.

FIGS. 17A-E show pictures and graphs of the operation of the device described in FIG. 16. FIG. 17A shows a suspension of cells loaded into the parent trap, FIG. 17B shows an array of smaller traps that are connected to the parent trap, FIG. 17C shows single cells trapped in the smaller traps after the operation, FIG. 17D shows the single cell after a period of 24 hours where they are cultured in the trap, and FIG. 17E shows the trapping efficiency of the device for 1, 2 and 3 cells.

With reference now to FIG. 18, shown is an embodiment of manual or electronic pipette driven well plate 1805 for nano-liter droplet storage including an array of connected 96 fluidic traps. Well-plate 1805 includes an array of fluidic traps (*e.g.*, fluidic trap portions 10 shown in FIGS. 1A-6E) connected to each other in the format of a well plate. The array of fluidic traps may be injection molded or micro machined in a polymer, such as COC. In the embodiment shown, array/well-plate 1805 has a length 1801 of 12.78 cm, a width 1802 of 8.55 cm, inlet 1803 for the array of traps, drilled hole or valve 1804 present in each of the fluidic traps, and outlet 1806 for the array 1805 of traps.

1 With reference now to FIG. 19, shown is an active lid 1905 for the connected traps in an
2 embodiment of manual or electronic pipette driven well plate for nano-liter droplet storage. The
3 lid 1905 contains electrically controlled flaps 1903 that close or open the valves/drilled holes of
4 each fluidic trap. The flaps 1903 may be programmable to be opened/closed for mixing or
5 filling operations. Each flap in the lid 1905 can be independently operated. In the embodiment
6 shown, the lid has a length 1901 of 12.78 cm, a width 1902 of 8.55 cm, electrically operated
7 flaps 1903 that can close or open the hole drilled into the fluidic trap, thereby opening or closing
8 the fluidic circuit, an assembly 1904 to hold and control the flaps 1903, and an USB/electronic
9 interface 7 to control each flap 1903 in the well plate lid 1905. A flap in the open position 1906
10 is shown.

11 With reference now to FIG. 20, shown is an embodiment of manual or electronic pipette
12 driven well plate 2004 for nano-liter droplet storage including an array of individual fluidic
13 traps. Well-plate 2004 includes an array of 96 fluidic traps (*e.g.*, fluidic trap portions 10 shown
14 in FIGS. 1A-6E), that are not connected to each other, in the format of a well plate. The array of
15 fluidic traps may be injection molded or micro machined in a polymer, such as COC. In the
16 embodiment shown, array/well-plate 2004 has a length 2001 of 12.78 cm, a width 2002 of 8.55
17 cm, inlet 2003 for reagents/fluid for each individual trap, drilled hole or valve 2005 present in
18 each of the fluidic traps and outlet 2006 for reagents/fluid for each individual trap.

19 With reference now to FIG. 21, shown is a static lid 2105 for the individual traps in an
20 embodiment of manual or electronic pipette driven well plate for nano-liter droplet storage. The
21 static lid contains flaps 2103 that are machined into a polymer, such as COC. The area around
22 the flaps is evacuated to allow access to the inlet and outlet ports of the array in FIG. 9. In the
23 embodiment shown, the lid has a length 2101 of 12.78 cm, a width 2102 of 8.55 cm, flaps 2103
24 are in closed position at all times and the user places or removes the lid on the well plate array
25 depending on operation on the fluid that is required. For example, for filling operations, the lid
26 2105 is placed on the well plate array to close the valves/holes of all the individual traps, and for
27 dilution operations, the lid 2105 is removed to allow mixing of reagent B with contents of the
28 trap. The lid 2105 includes an assembly 2104 to hold the flaps.

29 FIG. 22 is a flowchart showing a method 2200 of using the manual or electronic pipette
30 driven well plate for nano-liter droplet storage, according to one aspect of this disclosure. The
31 method 2200 may begin at block 2202. At block 2202, the valve 4 may be closed, for example,
32 by a removable sheet of polymer or by a programmable electronic flap. After block 2202 is
33 completed, the method 2200 may proceed to block 2204.

34 At block 2204, a first fluid may be introduced into the device at the inlet 1. The first
35 fluid may fill the fluidic trap 3. Any first fluid in excess of what the fluidic trap 3 may hold may

1 fill the bypass channel 7. After block 2204 is completed, the method 2200 may proceed to block
2 2206.

3 At block 2206, the valve 4 may be opened, for example, by removing the sheet of
4 polymer or by removing the programmable electronic flap. After block 2206 is completed, the
5 method 2200 may proceed to block 2208.

6 At block 2208, suction may be produced at the inlet 1 using, for example, a pipette.
7 Producing suction may remove the first fluid surrounding the valve 4. This may result in a
8 crescent-shaped volume of the first fluid in the fluidic trap 3. After block 2208 is completed, the
9 method 2200 may proceed to block 2210.

10 At block 2210, the valve 4 may be closed, for example, by a removable sheet of polymer
11 or by a programmable electronic flap. After block 2210 is completed, the method 2200 may
12 proceed to block 2212.

13 At block 2212, a cleaning fluid may be passed through the well plate. The cleaning fluid
14 may remove any leftover first fluid. After block 2212 is completed, the method 2200 may
15 proceed to block 2214.

16 At block 2214, the valve 4 may be opened, for example, by removing the sheet of
17 polymer or by removing the programmable electronic flap. After block 2214 is completed, the
18 method 2200 may proceed to block 2216.

19 At block 2216, a second fluid may be introduced into the well plate via inlet 1, for
20 example. The second fluid may then enter the fluidic trap 3. The second fluid and the first fluid
21 may then interact within the fluidic trap 3. After block 2216 is completed, the method 2200 may
22 proceed to block 2218.

23 At block 2218, a third fluid, which may be a mixture of the first and second fluids within
24 the fluidic trap 3, may be formed. The third fluid may be formed as a result of the first and
25 second fluids coalescing, for example. The method 2200 may then end.

26 The terms and descriptions used herein are set forth by way of illustration only and are
27 not meant as limitations. Those skilled in the art will recognize that many variations are
28 possible within the spirit and scope of the invention as defined in the following claims, and their
29 equivalents, in which all terms are to be understood in their broadest possible sense unless
30 otherwise indicated.

31

WHAT IS CLAIMED IS:

1. A pipette driven well plate for nano-liter droplet storage, the pipette driven well plate comprising:
 - an inlet;
 - an outlet;
 - a bypass channel; and
 - a fluidic trap containing a valve covered by a removable covering,wherein fluid enters the fluidic trap when the removable covering is removed and the fluid enters either the fluidic trap or the bypass channel, depending on which of the fluidic trap or bypass channel has the lower hydrodynamic resistance.
2. The pipette driven well plate of claim 1, wherein the bypass channel is cleaned by uncovering the valve by removing the covering and introducing a suction at the inlet.
3. The pipette driven well plate of claim 2, wherein a crescent-shaped amount of fluid is formed when the suction is introduced at the inlet.
4. The pipette driven well plate of claim 2, wherein a pipette produces the suction at the inlet.
5. The pipette driven well plate of claim 1, wherein the bypass channel is cleaned by covering the valve with the covering and introducing cleaning fluid at the inlet.
6. The pipette driven well plate of claim 1, wherein the fluid enters the bypass channel when the valve is covered by the removable covering and hydrodynamic resistance of the bypass channel is less than hydrodynamic resistance of the fluidic trap.
7. The pipette driven well plate of claim 1, further comprising a constriction piping for air between the fluidic trap and the atmosphere.
8. The pipette driven well plate of claim 1, further comprising an extended channel between the inlet and the fluidic trap.
9. The pipette driven well plate of claim 1, wherein a second fluid is introduced at the inlet when the valve is uncovered, and wherein the first fluid within the fluidic trap is diluted by the second fluid.
10. The pipette driven well plate of claim 9, wherein the second fluid is removed when suction is introduced at the inlet.
11. The pipette driven well plate of claim 1, wherein the fluidic trap has a side arm and a side arm outlet, wherein when the side arm is closed, the fluidic trap traps fluid and wherein when the side arm is opened, the fluid trapped within the fluidic trap is extracted via the side arm outlet.

- 1 12. The pipette driven well plate of claim 1, wherein the removable covering is a
2 programmable electronic flap.
- 3 13. The pipette driven well plate of claim 1, wherein the removable flap is a sheet of
4 polymer.
- 5 14. A method for using a pipette driven well plate for nano-liter droplet storage, the method
6 comprising:
7 closing a valve located within a fluidic trap;
8 introducing a first fluid to fill the fluidic trap and partially fill a bypass channel;
9 opening the valve located within the fluidic trap;
10 removing the first fluid surrounding the valve; and
11 introducing a second fluid into the fluidic trap,
12 wherein the introducing results in a mixture of the first and second fluids.
- 13 15. The method of claim 12, wherein the removing step further comprises:
14 providing a suction force at an inlet of the well plate.
- 15 16. The method of claim 12, further comprising:
16 closing the valve located within the fluidic trap; and
17 passing cleaning fluid through the well plate.
- 18 17. The method of claim 12, wherein the valve is opened by removing a sheet of polymer or
19 programmable electronic flap, and wherein the valve is closed by providing a sheet of polymer
20 or a programmable electronic flap.
- 21

1/23

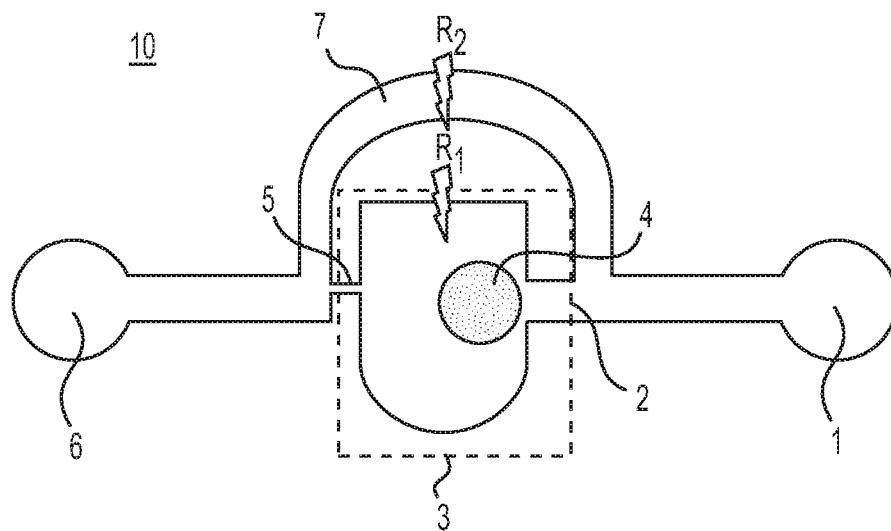


FIG. 1A

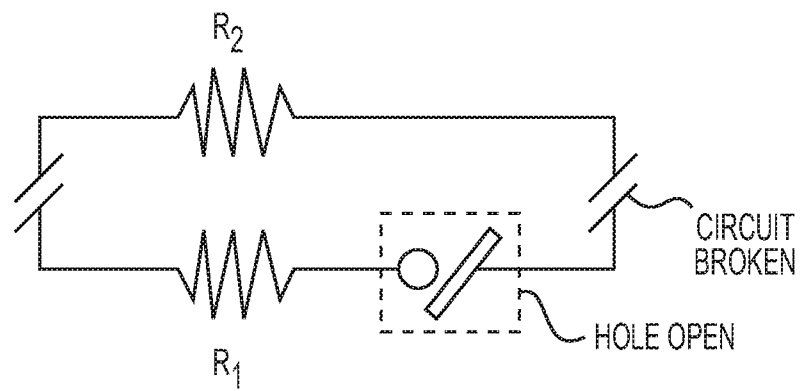


FIG. 1B

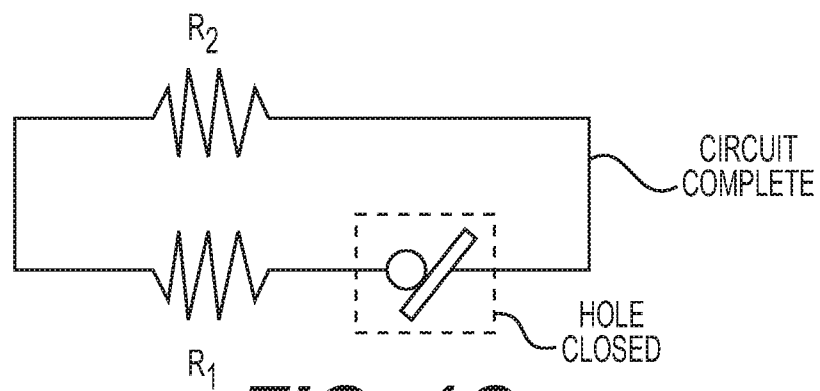


FIG. 1C

2/23

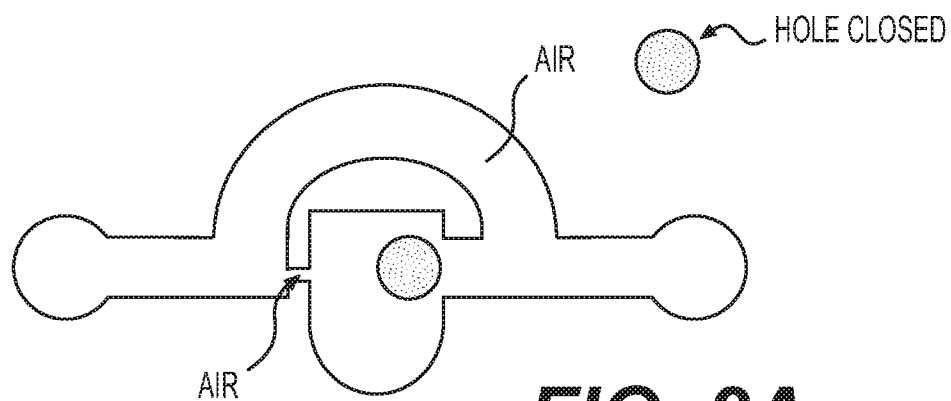


FIG. 2A

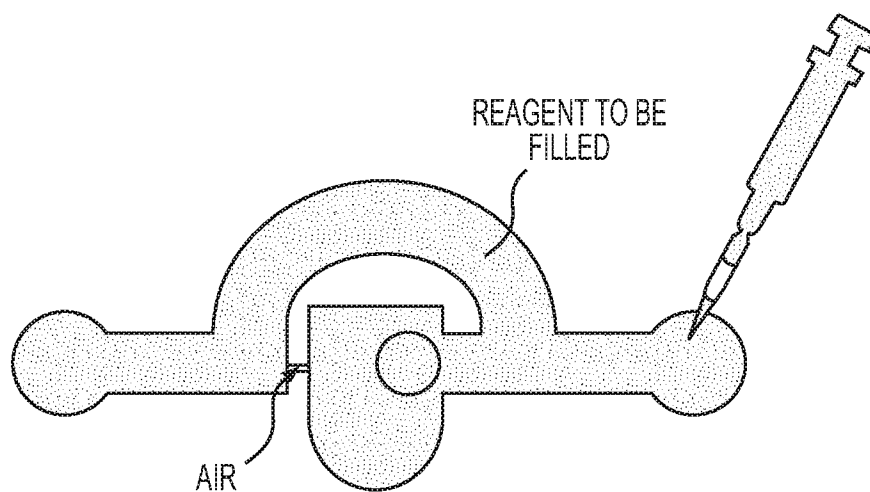


FIG. 2B

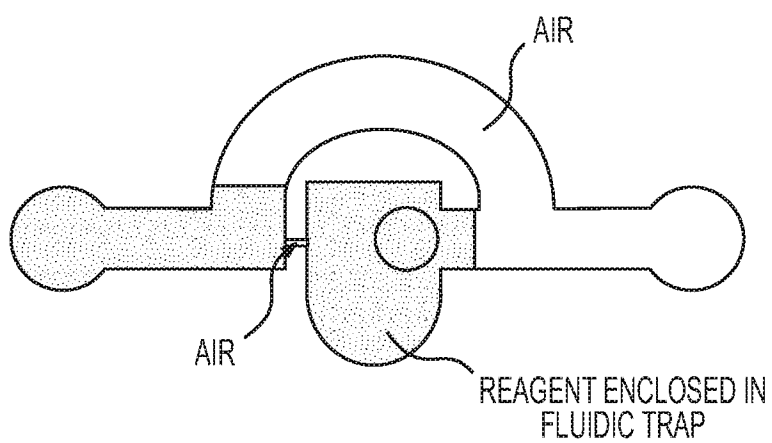


FIG. 2C

3/23

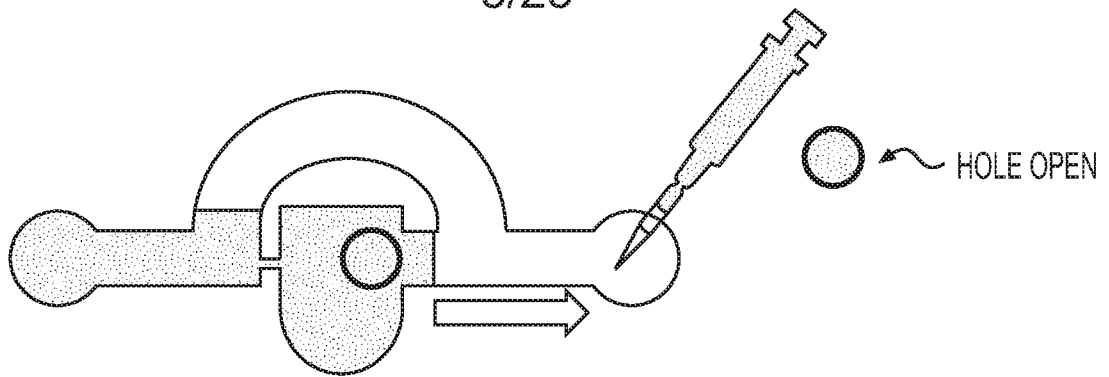


FIG. 3A

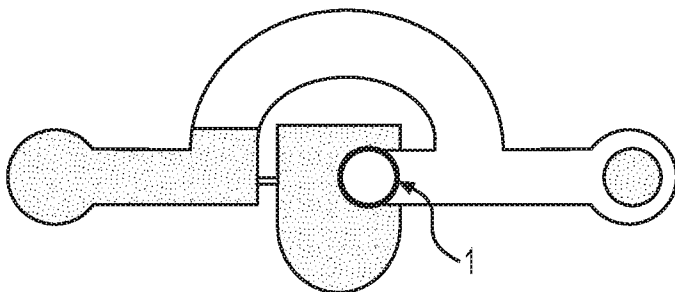


FIG. 3B

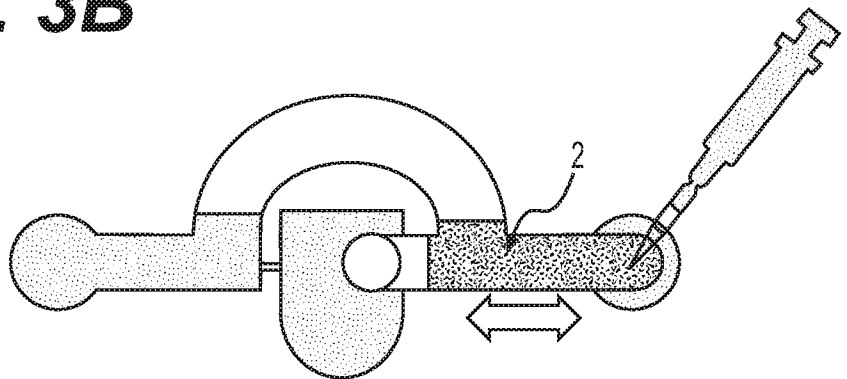


FIG. 3C

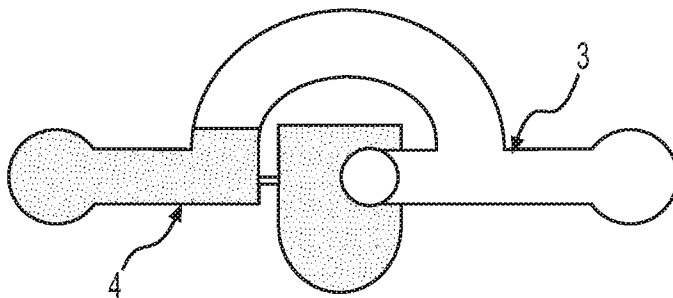


FIG. 3D

4/23

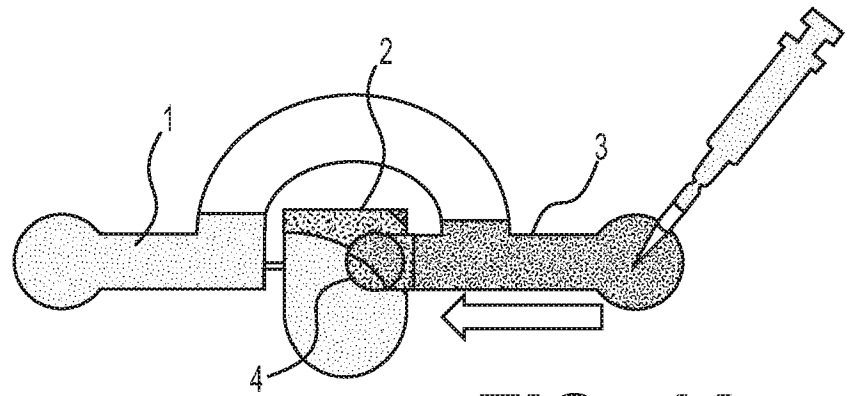


FIG. 4A

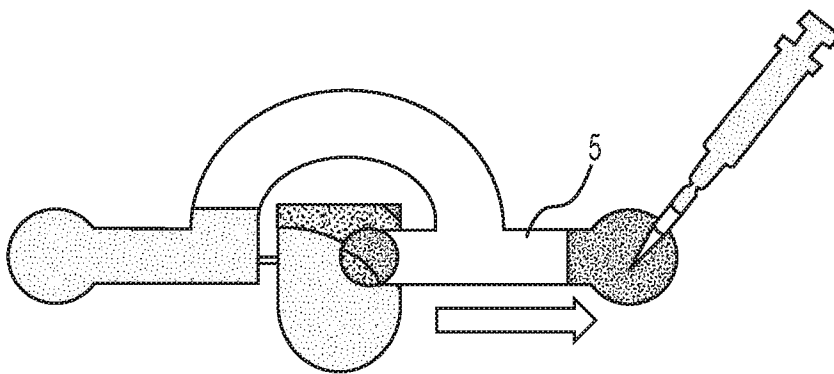


FIG. 4B

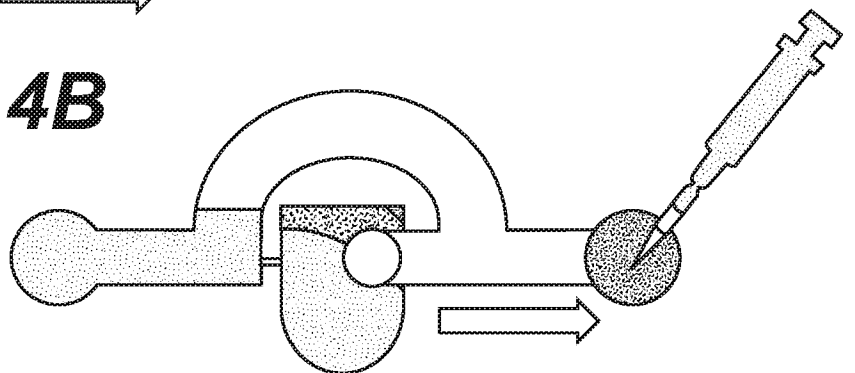


FIG. 4C

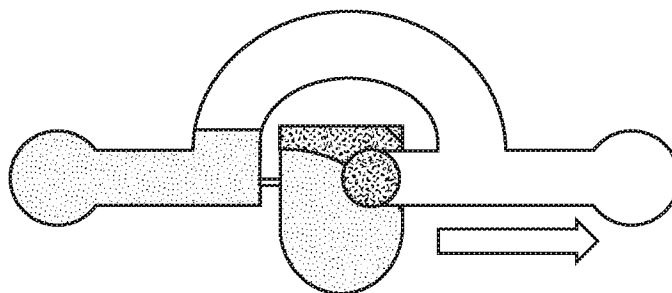
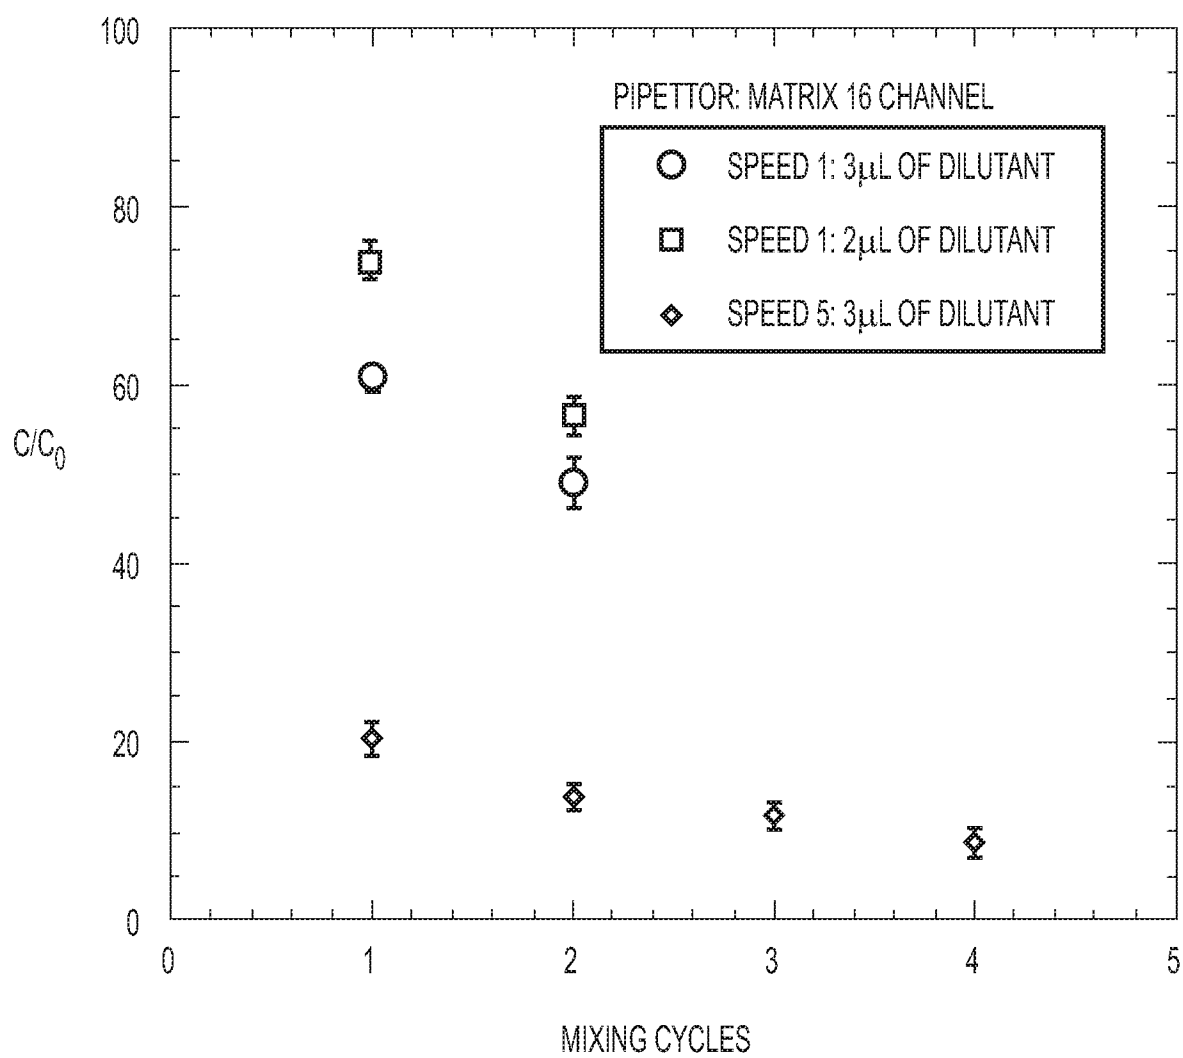


FIG. 4D

5/23

**FIG. 5**

6/23

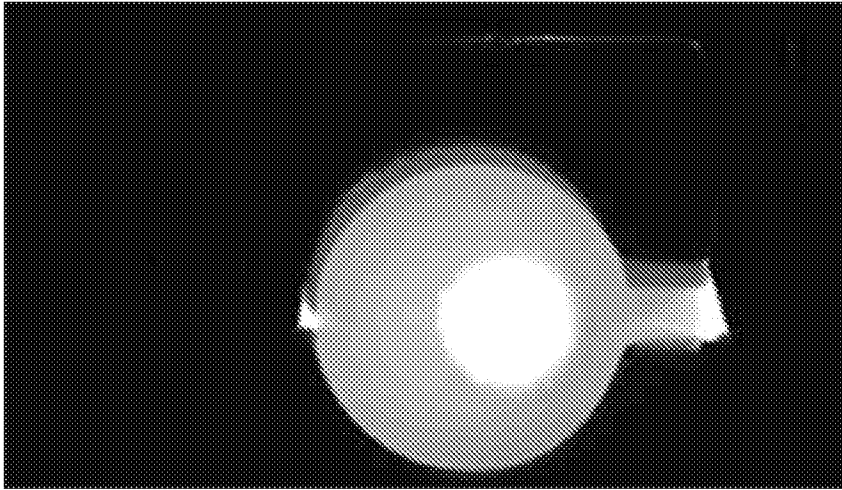


FIG. 6A

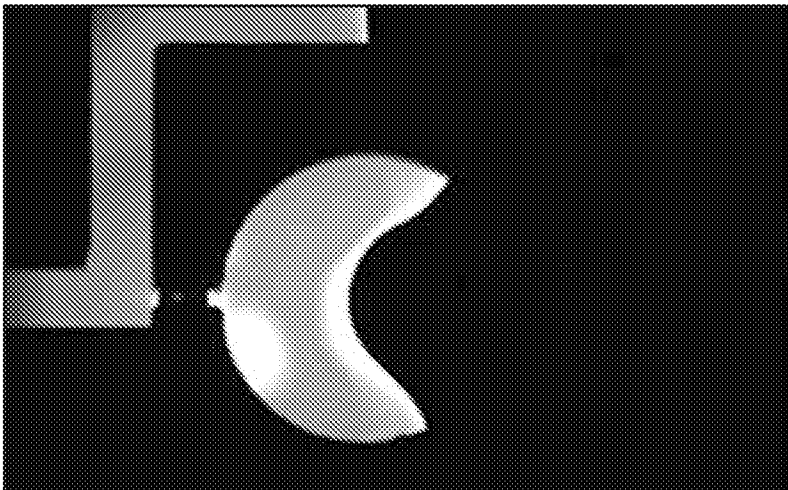


FIG. 6B

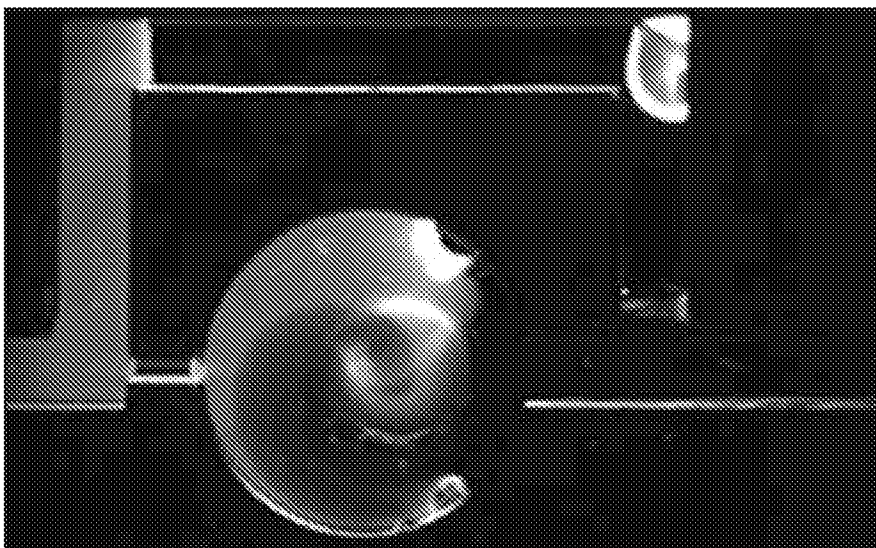


FIG. 6C

7/23

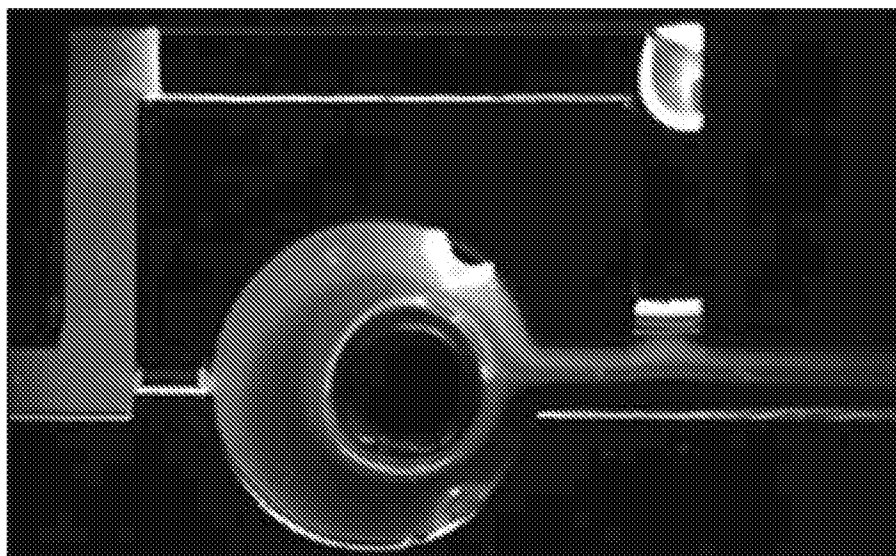


FIG. 6D

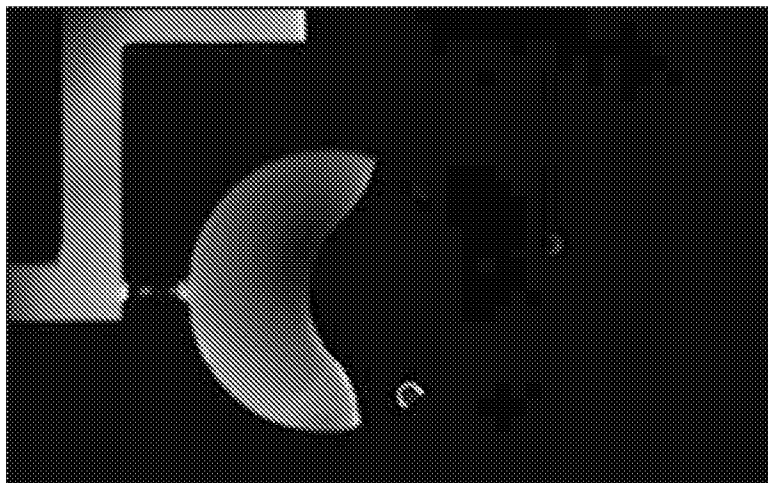


FIG. 6E

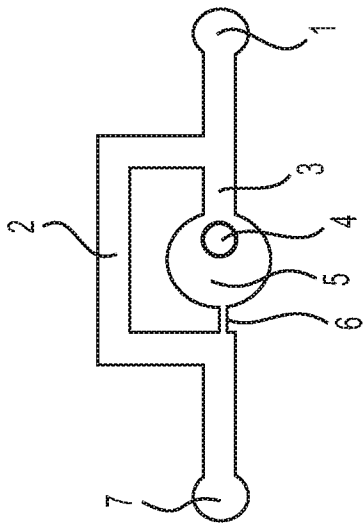


FIG. 7A

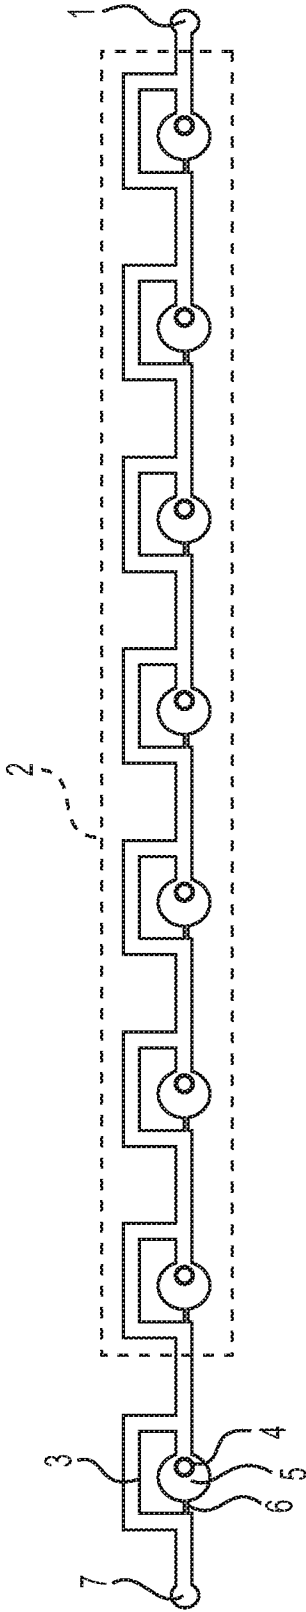


FIG. 7B

9/23

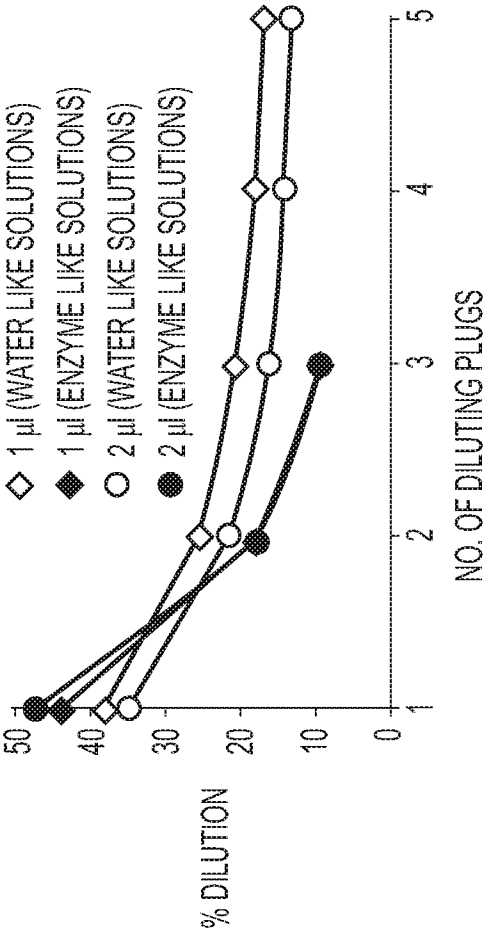


FIG. 8A

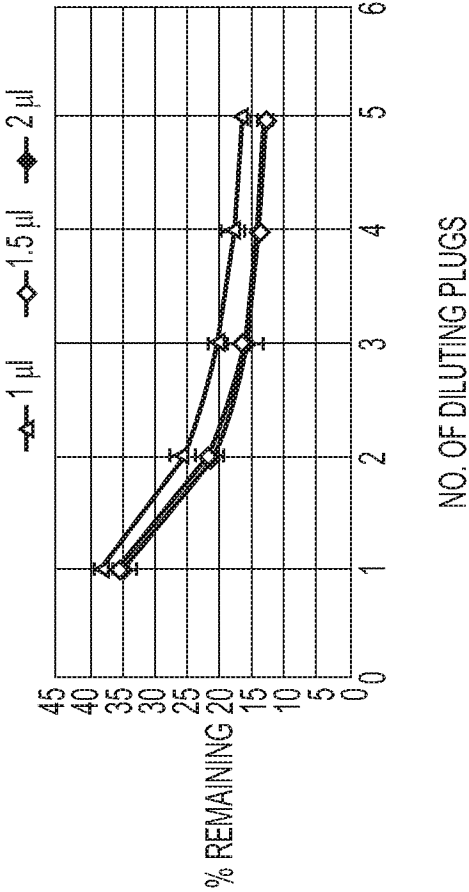


FIG. 8B

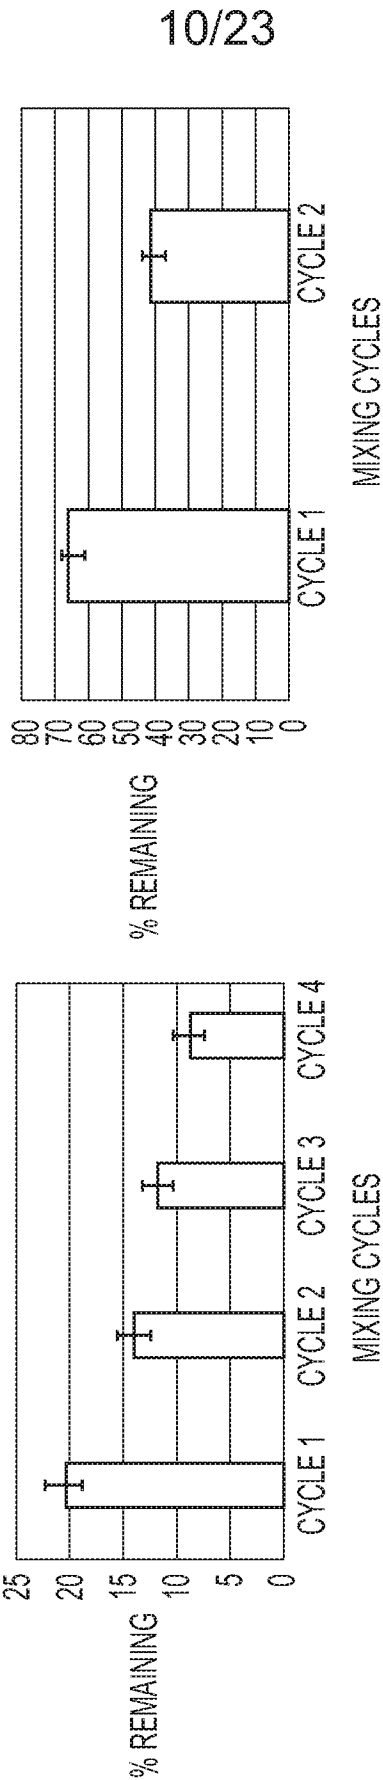


FIG. 9A

FIG. 9B

11/23

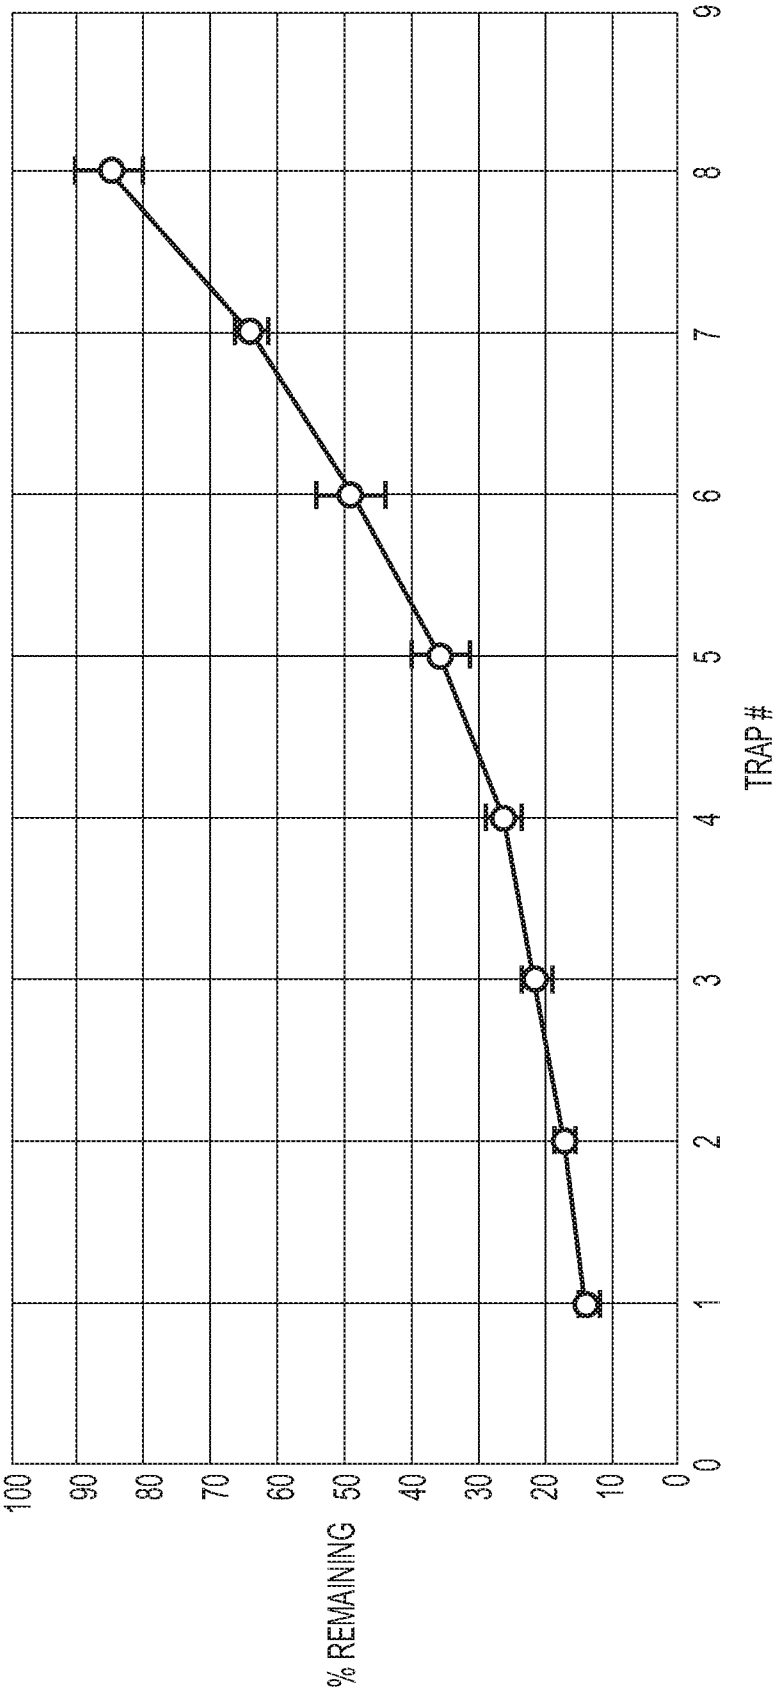


FIG. 10

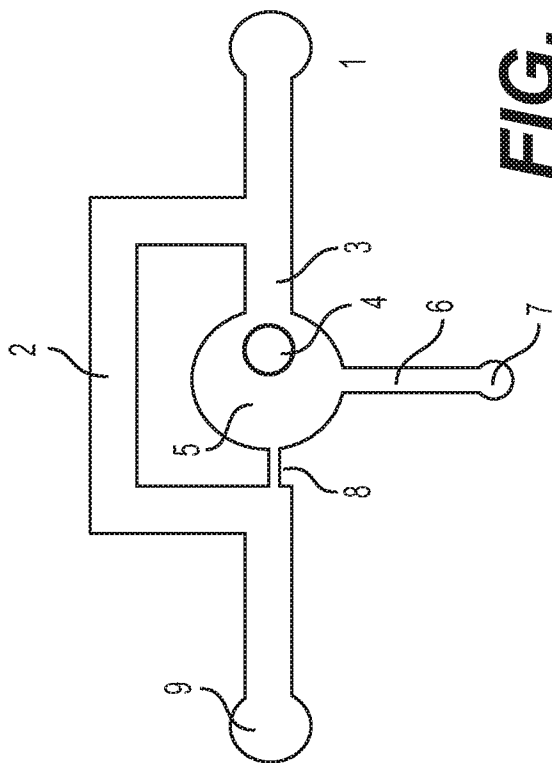


FIG. 11A

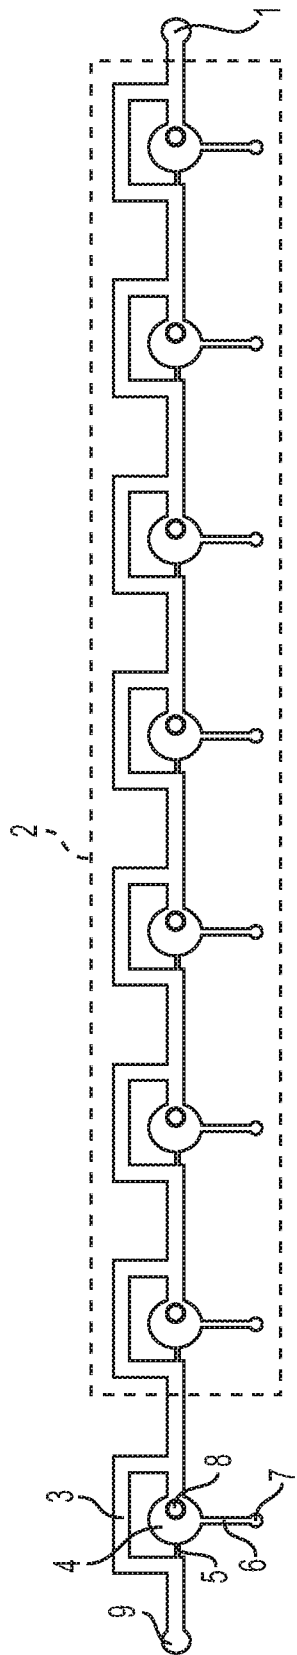


FIG. 11B

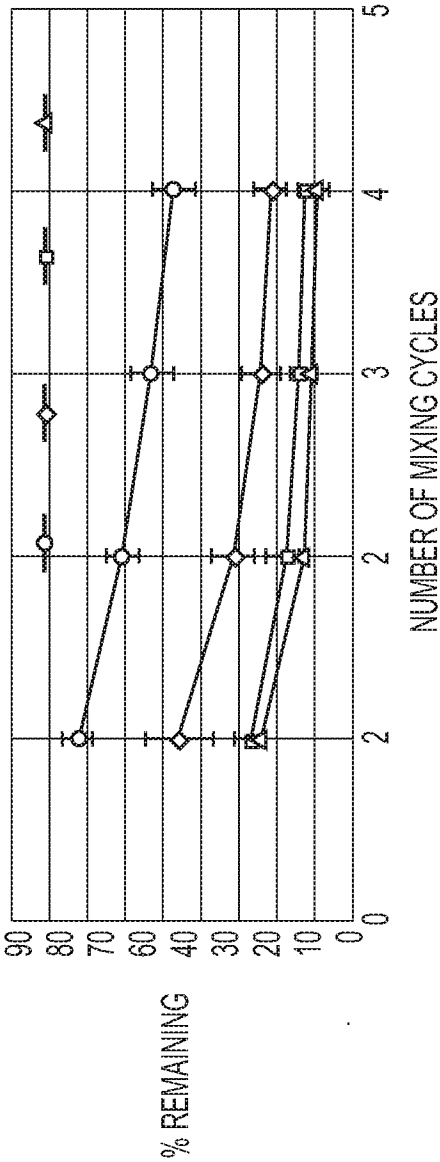


FIG. 12A

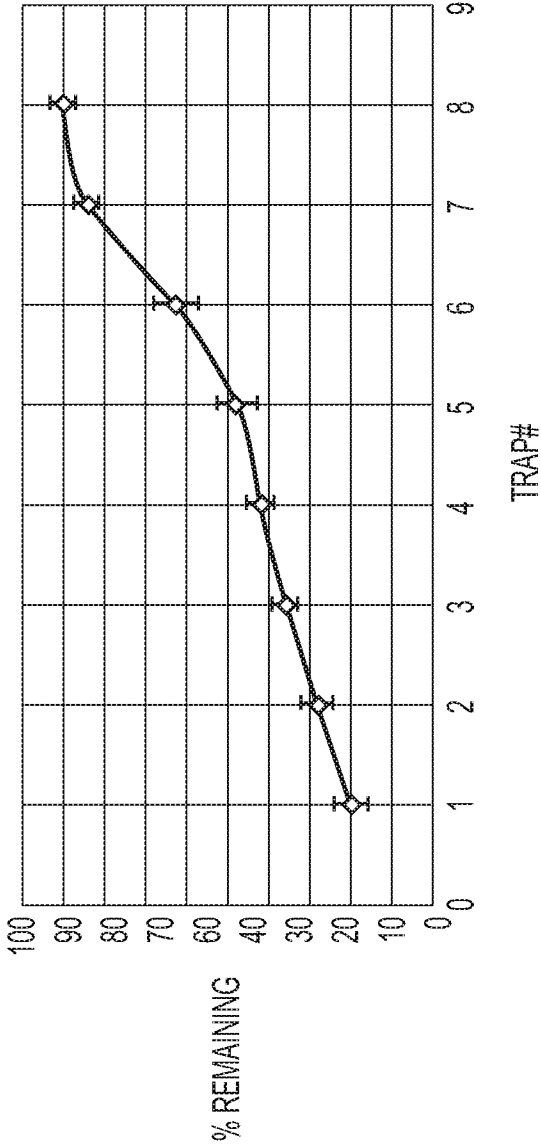


FIG. 12B

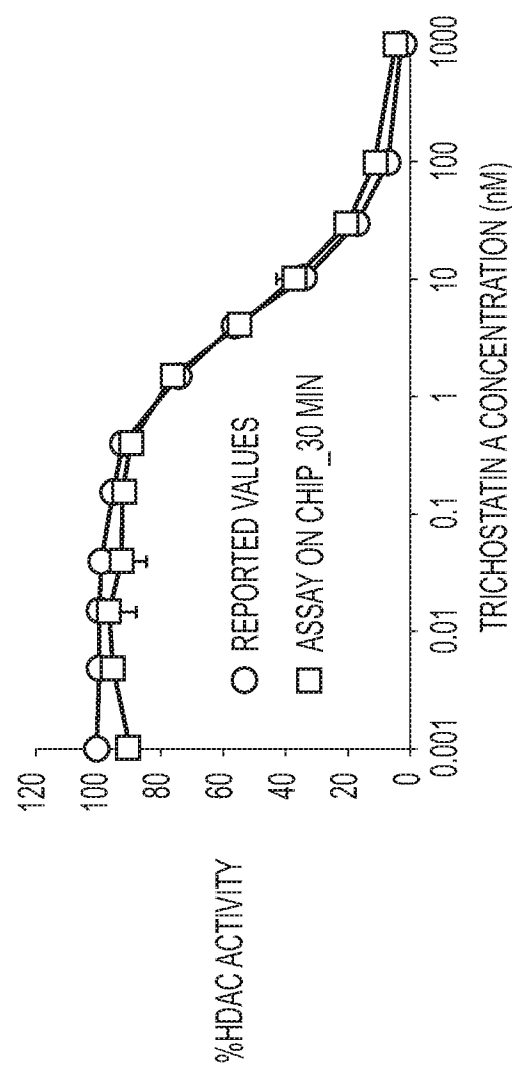


FIG. 13

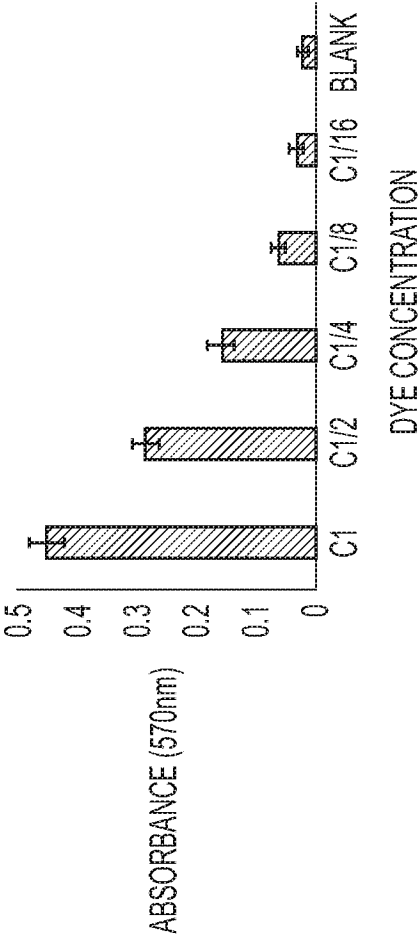


FIG. 14A

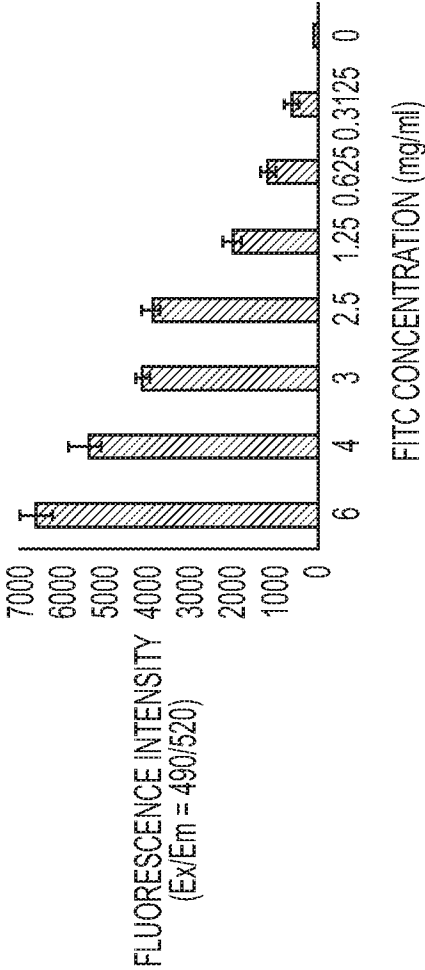


FIG. 14B

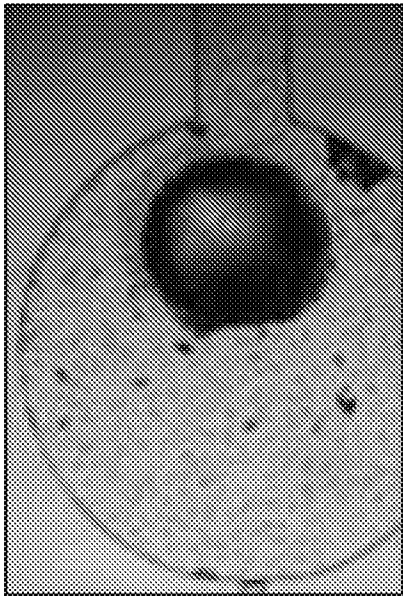


FIG. 15A

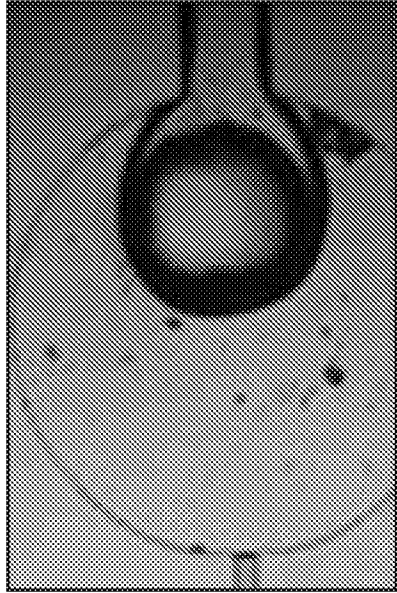


FIG. 15B

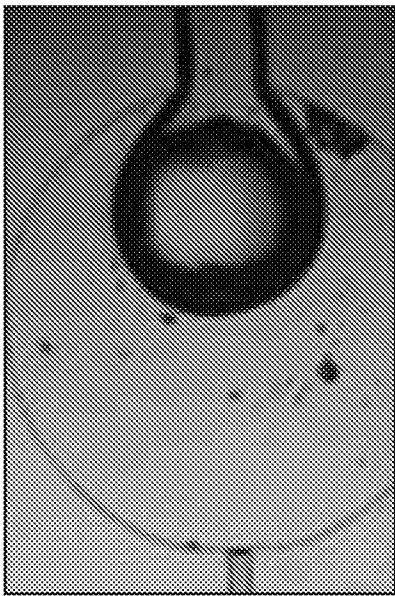


FIG. 15C

16/23

AVERAGE NUMBER OF CELLS/TRAP = 2032 (SD: 209.9)
AVERAGE NUMBER OF CELLS AFTER M-1/TRAP = 97
AVERAGE NUMBER OF CELLS AFTER M-2/TRAP = 28

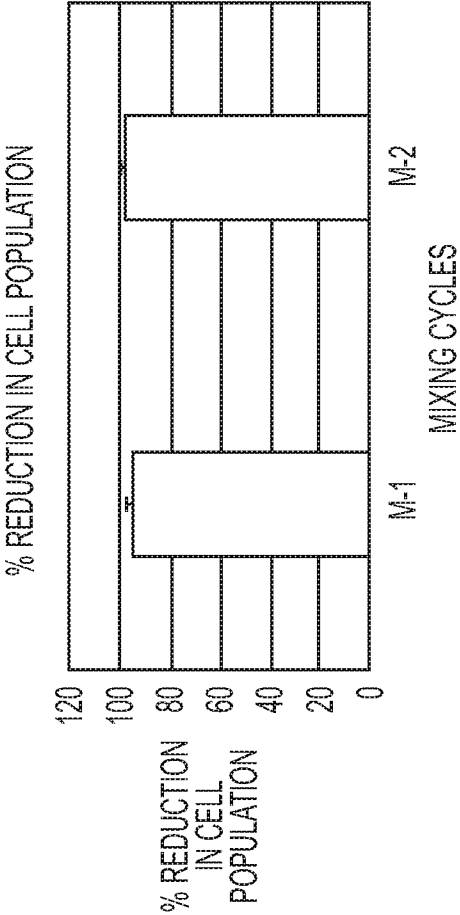


FIG. 15D

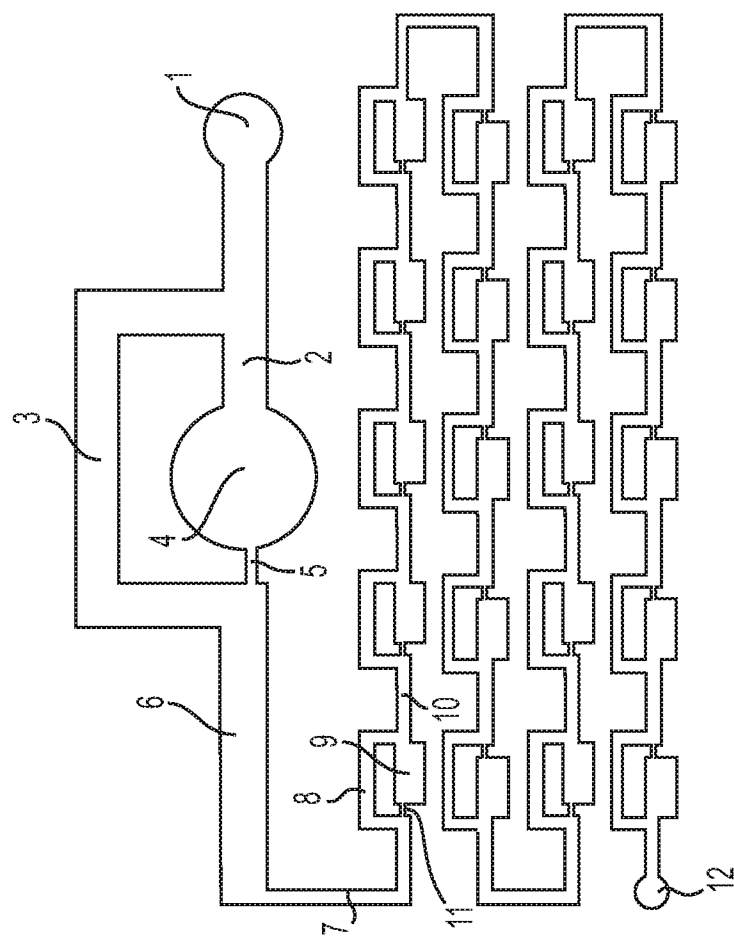


FIG. 16

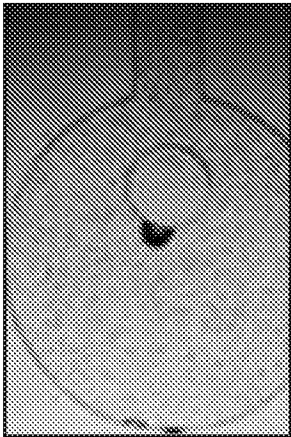


FIG. 17A

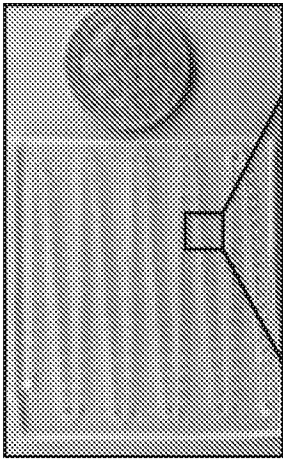


FIG. 17B

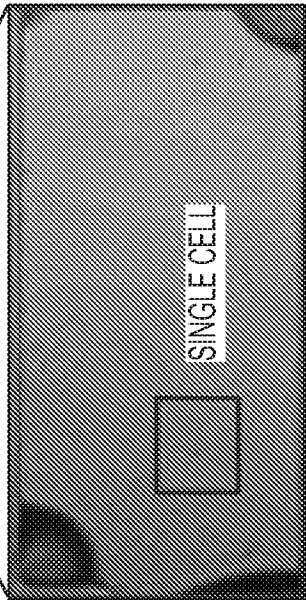


FIG. 17C

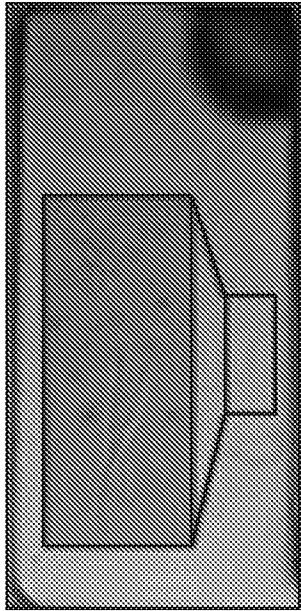


FIG. 17D

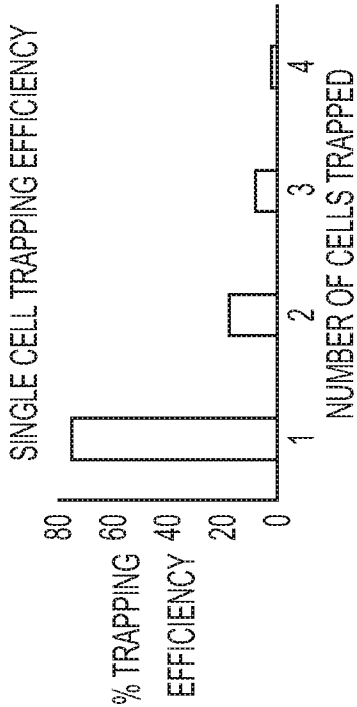


FIG. 17E

19/23

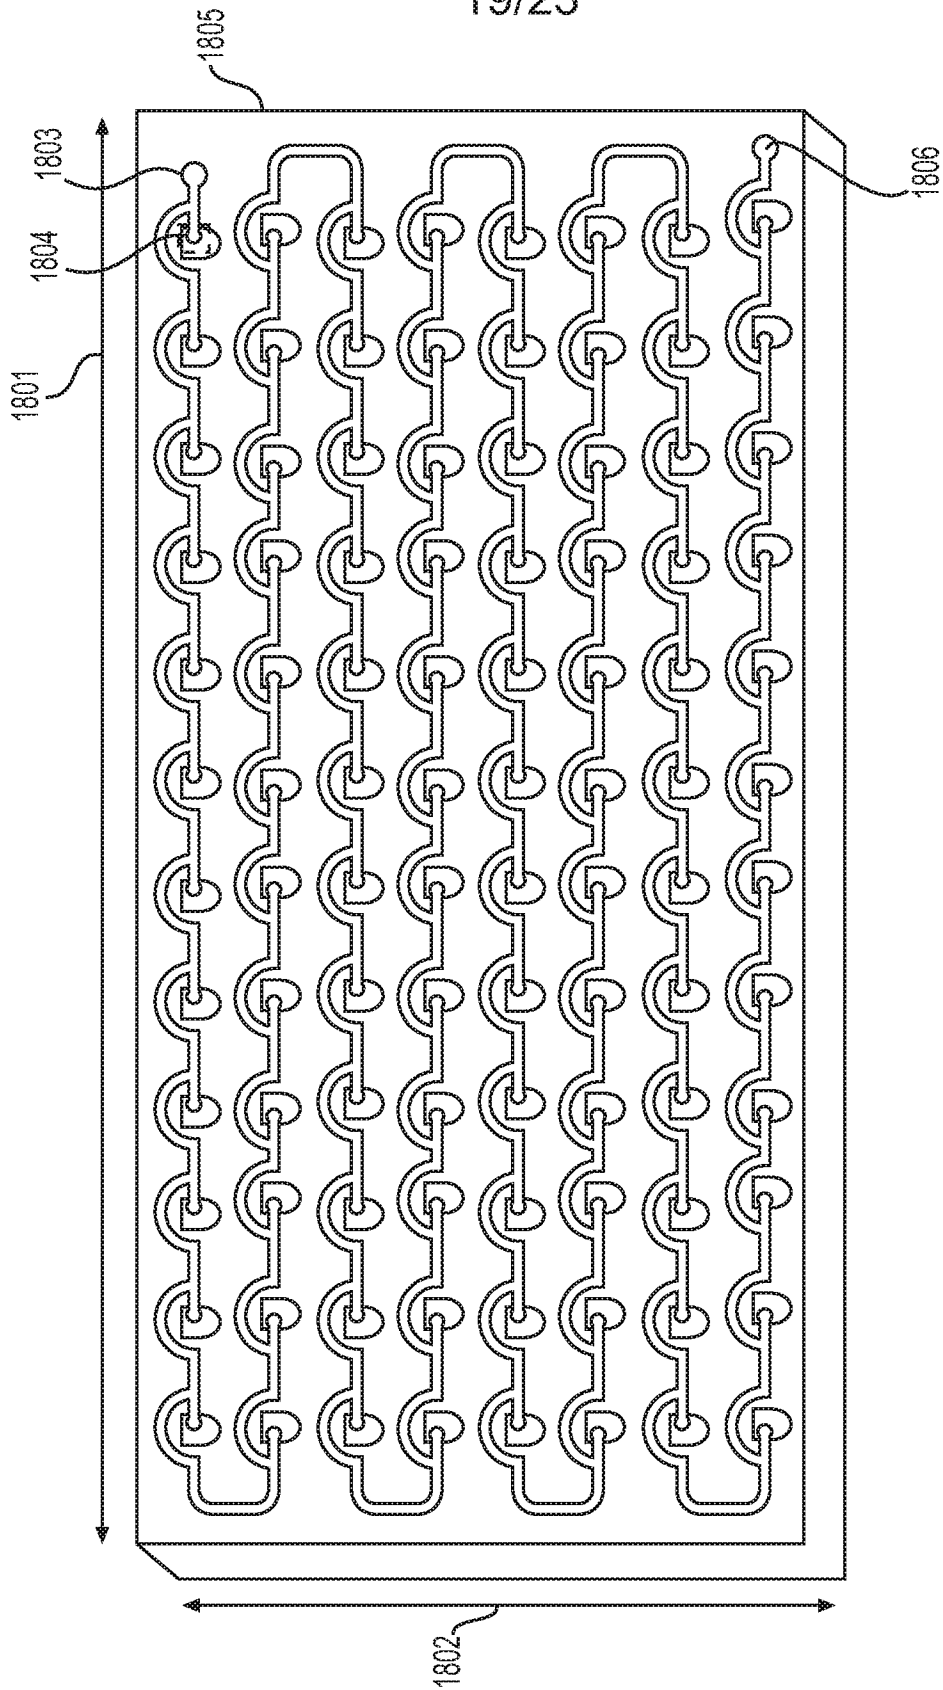


FIG. 18

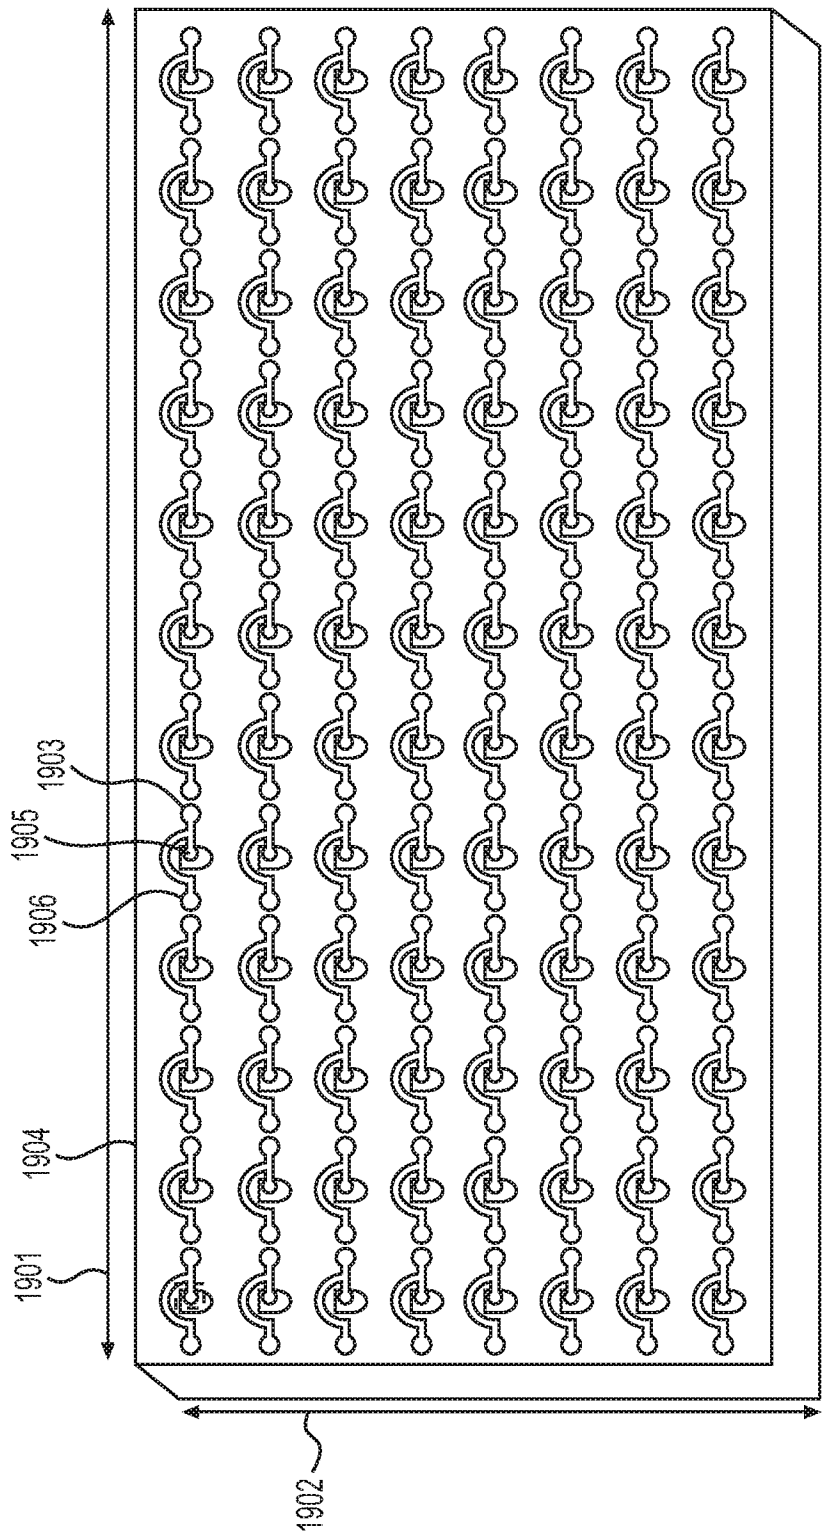


FIG. 19

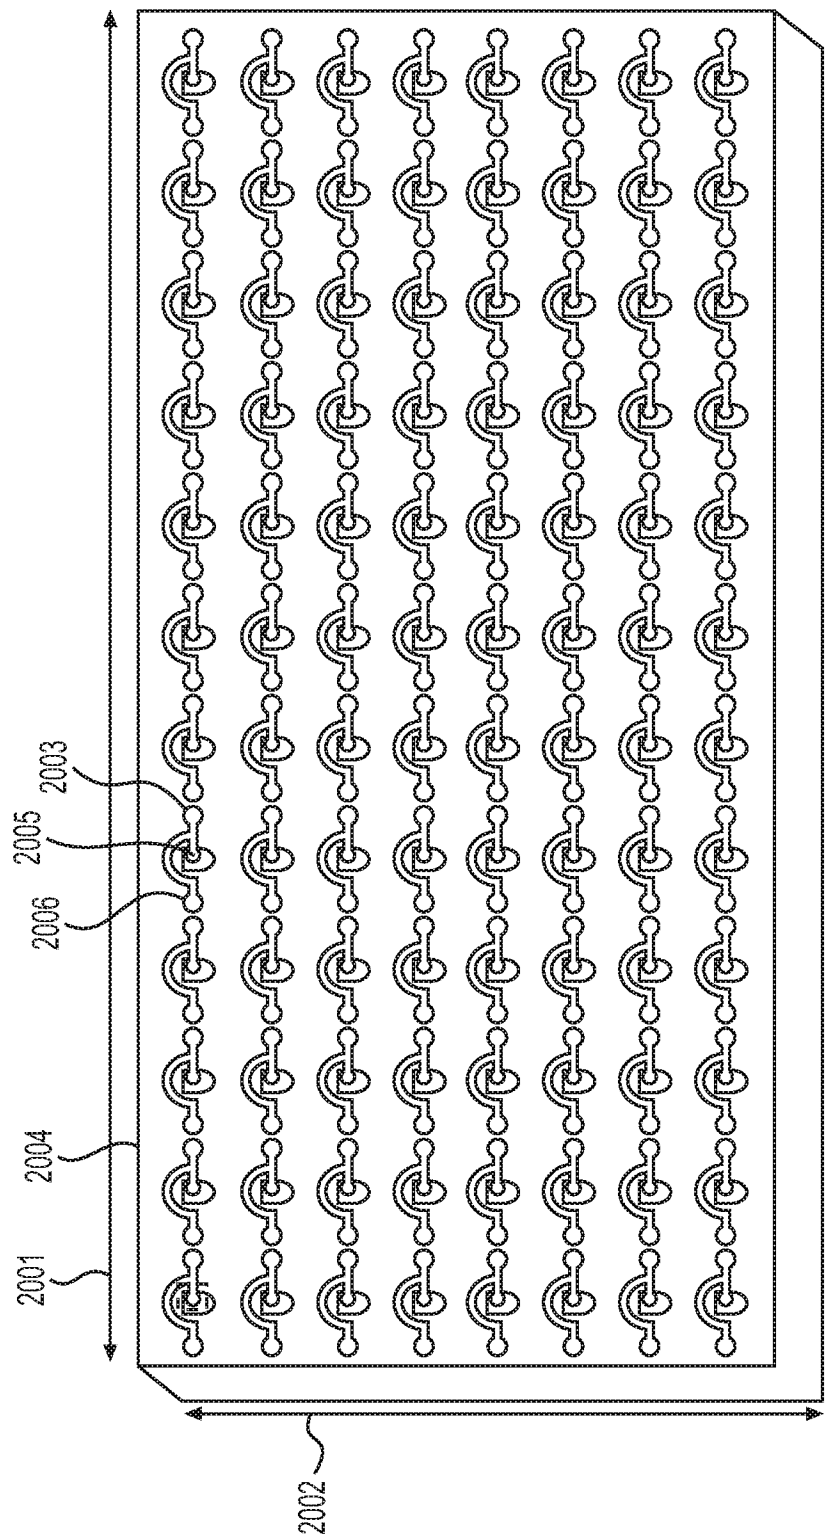


FIG. 20

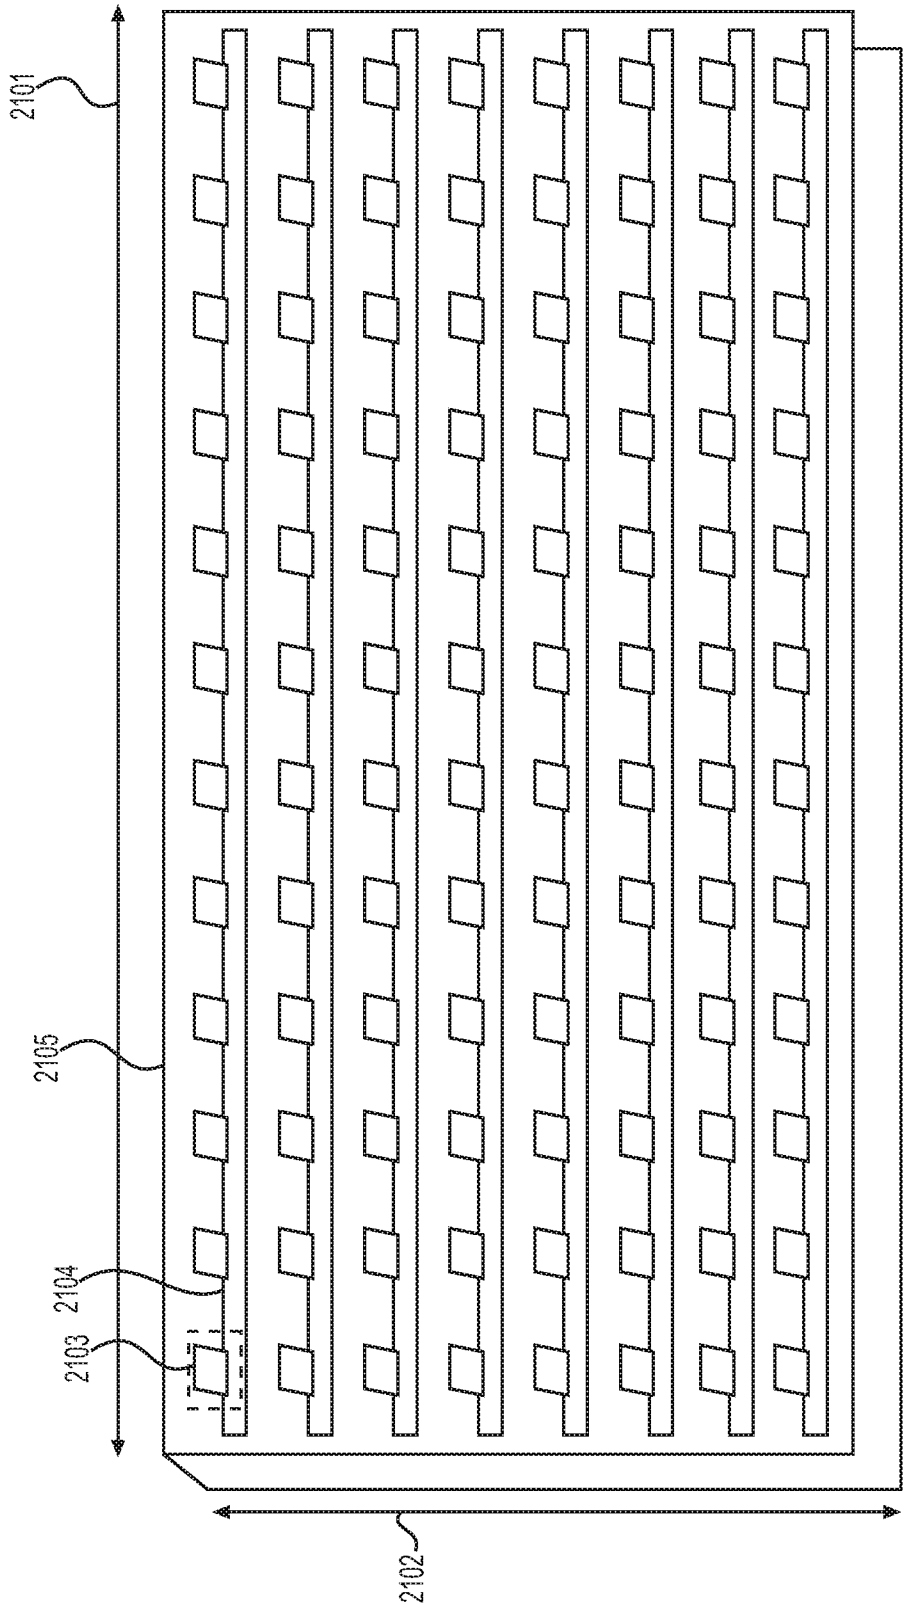
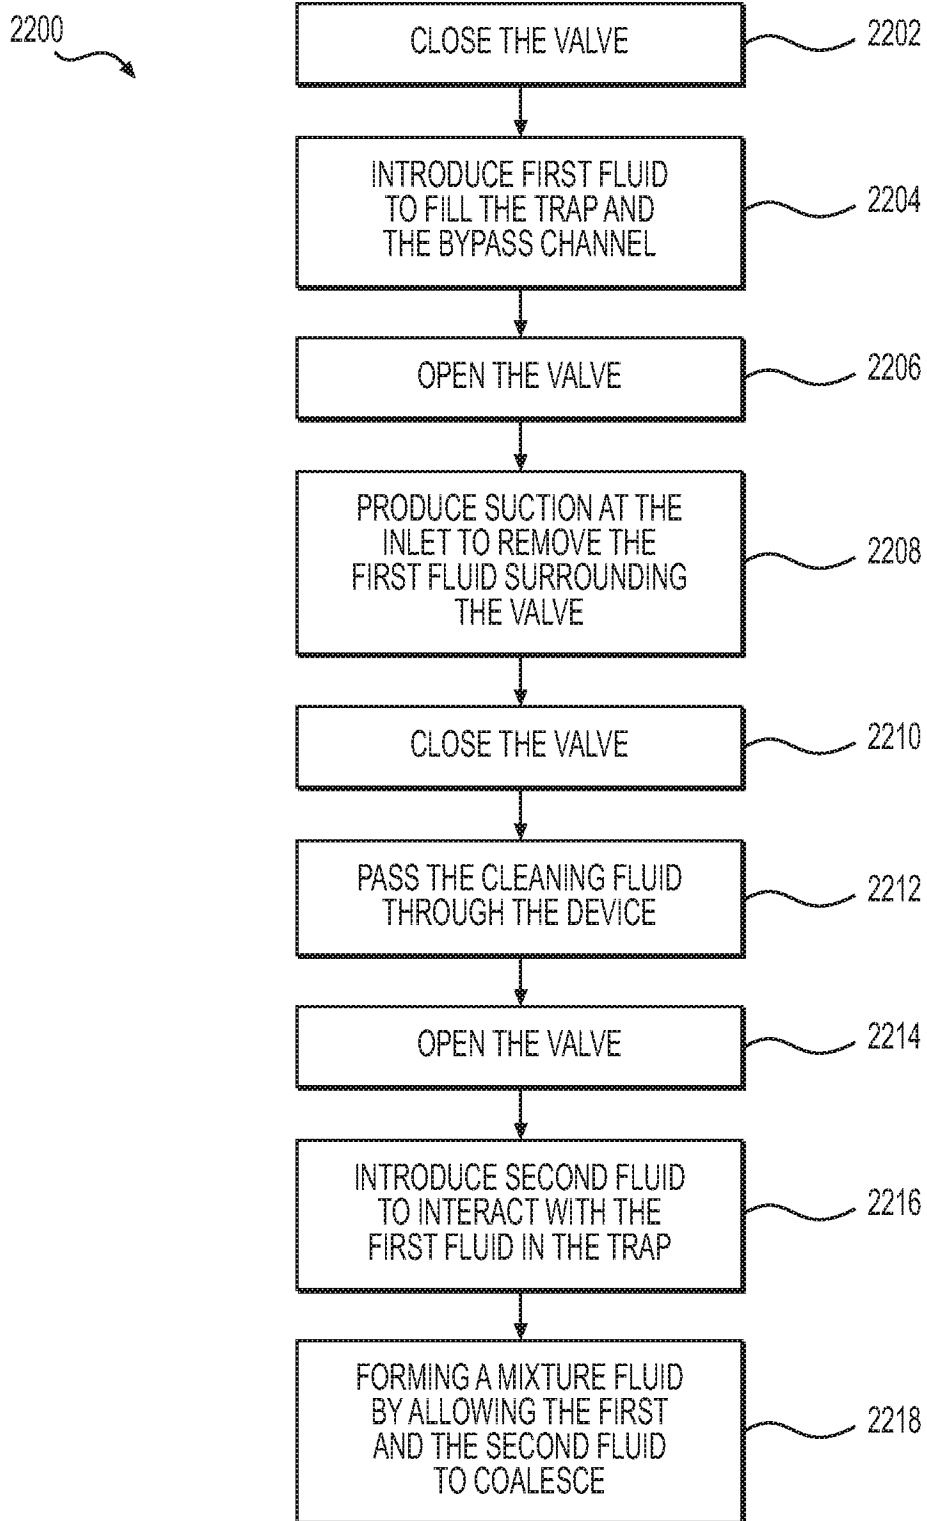


FIG. 21

23/23

**FIG. 22**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2016/037225

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B01L 3/00; F16K 99/00; G01N 1/10; G01N 1/28; G01N 1/38 (2016.01)

CPC - B01L 3/502715; B01L 3/00; B01L 3/502; B01L 3/5027; B01L 3/502715; B01L 2300/0816 (2016.08)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC - B01L 3/00; F16K 99/00; G01N 1/10; G01N 1/28; G01N 1/38

CPC - B01L 3/00; B01L 3/502; B01L 3/5027; B01L 3/502715; B01L 2300/0816; B01L 2300/0838; B01L 2300/0861; B01L 2300/0867; F16K 99/00; F16K 99/0001; F16K 99/0034; F16K 99/0055; G01N 1/10; G01N 1/28; G01N 1/38

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 422/502; 422/503; 422/504; 422/553; 436/180 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Orbit, Google Patents, Google

Search terms used: pipette driven well plate, well plate, pipette, nanoliter, nano-liter, nanolitre, nano-litre, droplet, storage, valve, inlet, outlet, bypass channel, bypass, fluidic trap, cover, mixture, first fluid, second fluid

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2013/0337578 A1 (DELAMARCHE et al) 19 December 2013 (19.12.2013) entire document	1-17
A	US 2015/0044688 A1 (TECHNISCHE UNIVERSITAT DRESDEN) 12 February 2015 (12.02.2015) entire document	1-17
A	US 2014/0246098 A1 (PRESIDENT AND FELLOWS OF HARVARD COLLEGE) 04 September 2014 (04.09.2014) entire document	1-17
A	US 2007/0125942 A1 (KIDO) 07 June 2007 (07.06.2007) entire document	1-17
A	US 2004/0206408 A1 (PETERS et al) 21 October 2004 (21.10.2004) entire document	1-17

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 August 2016

Date of mailing of the international search report

01 SEP 2016

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774