




(86) Date de dépôt PCT/PCT Filing Date: 2019/12/09
(87) Date publication PCT/PCT Publication Date: 2020/06/18
(45) Date de délivrance/Issue Date: 2021/12/21
(85) Entrée phase nationale/National Entry: 2021/04/06
(86) N° demande PCT/PCT Application No.: CA 2019/051765
(87) N° publication PCT/PCT Publication No.: 2020/118417
(30) Priorité/Priority: 2018/12/10 (US62/777,619)

(51) Cl.Int./Int.Cl. *B01J 19/24* (2006.01)
(72) Inventeurs/Inventors:
ELDER, TIMOTHY JOHN, CA;
HINKEY, JOHN BENJAMIN, JR., CA;
KRATSCHMAR, KENNETH WILLIAM, CA;
REID, CHRISTOPHER EDWIN JOHN, CA
(73) Propriétaire/Owner:
EKONA POWER INC., CA
(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : PROCÉDE ET REACTEUR DESTINES A PRODUIRE AU MOINS UN PRODUIT
(54) Title: METHOD AND REACTOR FOR PRODUCING ONE OR MORE PRODUCTS

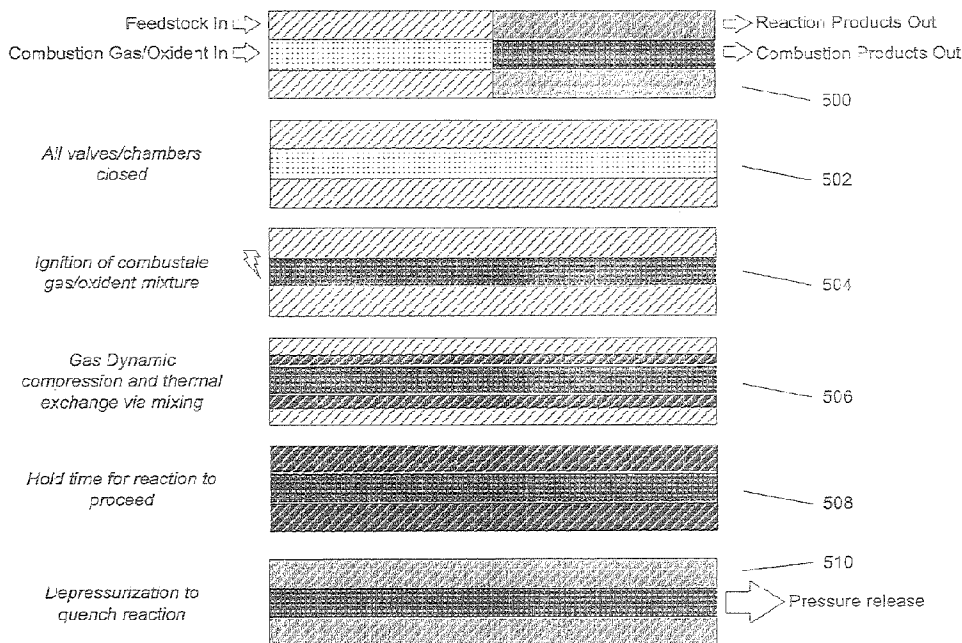

(57) Abrégé/Abstract:

A feedstock gas, such as natural gas, is introduced into a mixing chamber. A combustible gas is introduced into a combustion chamber, for example simultaneously to the introduction of the feedstock gas. Thereafter, the combustible gas is ignited so as to cause the combustible gas to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to mix with the feedstock gas. The mixing of the combustible gas with the feedstock gas causes one or more products to be produced.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
18 June 2020 (18.06.2020)



(10) International Publication Number
WO 2020/118417 A1

(51) International Patent Classification:
B01J 19/24 (2006.01)

(21) International Application Number:
PCT/CA2019/051765

(22) International Filing Date:
09 December 2019 (09.12.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/777,619 10 December 2018 (10.12.2018) US

(71) Applicant: **EKONA POWER INC.** [CA/CA]; 200-560 Beatty Street, Vancouver, British Columbia V6B 2L3 (CA).

(72) Inventors: **HINKEY, John Benjamin**; 200-560 Beatty Street, Vancouver, British Columbia V6B 2L3 (CA). **ELDER, Timothy John**; 200-560 Beatty Street, Vancouver, British Columbia V6B 2L3 (CA). **KRATSCHMAR, Kenneth William**; 200-560 Beatty Street, Vancouver, British Columbia V6B 2L3 (CA). **REID, Christopher Edwin**

John; 200-560 Beatty Street, Vancouver, British Columbia V6B 2L3 (CA).


(74) Agent: **LEE, Brian** et al.; Gowling WLG (Canada) LLP, Suite 2300 - 550 Burrard Street, Vancouver, British Columbia V6C 2B5 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: METHOD AND REACTOR FOR PRODUCING ONE OR MORE PRODUCTS

FIG. 5

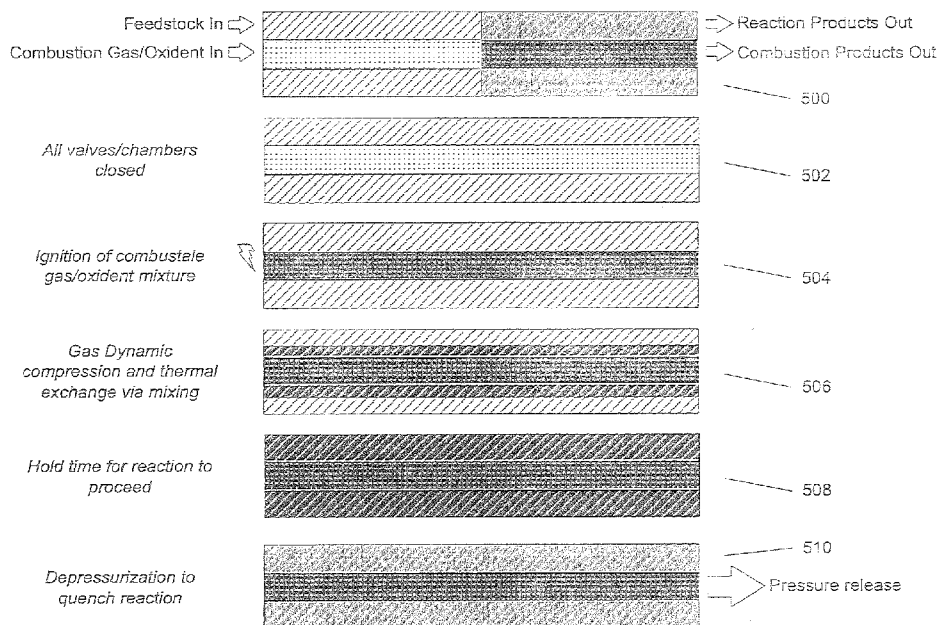

(57) Abstract: A feedstock gas, such as natural gas, is introduced into a mixing chamber. A combustible gas is introduced into a combustion chamber, for example simultaneously to the introduction of the feedstock gas. Thereafter, the combustible gas is ignited so as to cause the combustible gas to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to mix with the feedstock gas. The mixing of the combustible gas with the feedstock gas causes one or more products to be produced.

[Continued on next page]



WO 2020/118417 A1

WO 2020/118417 A1

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

METHOD AND REACTOR FOR PRODUCING ONE OR MORE PRODUCTS

FIELD OF THE DISCLOSURE

[0001] The present disclosure relates to a method and associated reactor for producing one or more products, for example through cracking of a feedstock gas such as natural gas.

BACKGROUND TO THE DISCLOSURE

[0002] Chemical cracking of natural gas (CH_4) refers to the disassociation of the natural gas into its constituent components of carbon (C) and Hydrogen (H_2). Conventional methods of hydrogen generation such as steam methane reforming (SMR) result in significant dilute CO_2 emissions which may require costly post-reforming cleanup to sequester. As a result, SMR produces approximately 8-10 tonnes of CO_2 per tonne of H_2 produced. Adding CO_2 cleanup to SMR flue gas streams is generally cost prohibitive unless penalties for carbon dioxide emissions increase to a tipping point.

[0003] Other methods of thermal decomposition to produce hydrogen and solid carbon exist, such as thermal and liquid metal pyrolysis and plasma pyrolysis. These processes are generally tailored to maximize the production of solid carbon for associated carbon markets and are widely used in these industries.

[0004] Thermal cracking of natural gas is typically a constant-pressure, steady-flow process whereby natural gas is heated until it reaches the temperature required to begin the formation of hydrogen and carbon. At this point, the temperature is maintained for a certain time to complete the equilibrium reaction. As the temperature is increased, the time required for methane conversion decreases, assuming a constant pressure of 1 ATM (as shown in FIG. 1 – drawing obtained from *Kinetic model of homogeneous thermal decomposition of methane and ethane*, Maryam Younessi-Sinaki, Edgar A. Matida, Feridun Hamdullahpur, Carleton University, Department of Mechanical and Aerospace Engineering, 1125 Colonel By Drive, Ottawa, ON K1S 5B6, Canada).

[0005] In such steady flow reactors, the carbon formed tends to build up on the surfaces of the reactor, eventually becoming so thick that the reactor performance is compromised. Mechanical scraping processes, or burning the carbon off the surfaces by introducing air into the reactor, are two common means of cleaning the reactor. Mechanical scraping is difficult to

implement and may not be able to remove hard carbon deposits. Burning the carbon off with air creates significant CO₂ emissions which is undesirable. It is therefore highly desirable to not form carbon on the surfaces in the first place, and to send the produced carbon to downstream processes.

5 [0006] Furthermore, shorter reaction times are needed to reduce the size of the reactor, but this requires high temperatures and exotic materials which are very costly. To try and overcome this, catalysts are added to the reactor which have the effect of lowering the reaction temperature. However, carbon build-up now also occurs on the surface of the catalysts which deactivate over time and require a reactivation process, or are replaced. Both of these options
10 are costly and add complexity to the process.

[0007] Liquid media reactors, such as liquid metal reactors, involve a thermal process whereby natural gas is bubbled through a column of high-temperature liquid, such as liquid metal or salts. As this is a constant-pressure, steady-flow process, the same temperature vs. time reaction rates as described above apply. The benefit of this process is that the separation of
15 hydrogen and carbon is simplified as the produced hydrogen bubbles out of the top of the reactor column and the carbon floats to the surface of the liquid media where it can theoretically be skimmed away. In some examples, liquid metal alloys have been identified which provide a catalytic effect and lower the reaction temperature. In all cases, however, carbon build-up at the top of the reactor remains a problem, and the use of molten media adds complexity, materials
20 challenges and cost to the reactor.

[0008] For most thermal processes, the energy required to heat the reactor and to maintain the process is usually supplied by burning some excess natural gas with air. This flue gas releases CO₂ into the atmosphere and contributes to global warming. In some cases, the excess carbon build-up and/or hydrogen can also be used to provide heat of reaction.

25 [0009] Plasma reactors pass natural gas at constant pressure through a high-temperature plasma which is created by electricity. Plasmas can be created by the use of, for example, electrodes or microwaves. In these reactors, carbon build-up can still be a problem but less so than thermal reactors as the high temperature plasma is confined to a very small area. Unlike thermal reactors, plasma reactors rely solely on electricity as the energy input. Compared to
30 thermal systems, the cost of electricity for the input energy is much higher than that for natural gas, and therefore the resulting production cost of hydrogen and methane is much higher.

[0010] There is therefore a need in the art for a natural gas cracking process which uses thermal energy that has lower capital cost and that suffers less from carbon build-up issues.

SUMMARY OF THE DISCLOSURE

5 [0011] According to a first aspect of the disclosure, there is provided a method of producing one or more products, comprising: introducing a feedstock gas into a mixing chamber, wherein the feedstock gas comprises one or more gases; introducing a combustible gas into a combustion chamber, wherein the combustible gas comprises one or more gases; and thereafter, igniting the combustible gas so as to cause the combustible gas to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and
10 to mix with the feedstock gas, wherein energy is transferred from the combustible gas to the feedstock gas and thereby causes one or more products to be produced.

[0012] The introductions of the feedstock gas and the combustible gas may be such that the feedstock gas substantially does not mix, or undergoes very little or negligible mixing, with the combustible gas prior to the igniting.

15 [0013] The method may further comprise stopping further production of the one or more products.

[0014] The method may further comprise preheating the feedstock gas prior to introducing the feedstock gas into the mixing chamber.

20 [0015] The method may further comprise preheating the combustible gas prior to introducing the combustible gas into the combustion chamber.

[0016] A ratio of a volume of the mixing chamber to a volume of the combustion chamber may be less than or equal to about 10:1.

[0017] A ratio of a length of the mixing chamber to a diameter of the mixing chamber may be less than or equal to about 30:1.

25 [0018] The feedstock gas may comprise natural gas. The feedstock gas may comprise a mixture of natural gas and recycled gas. The recycled gas may comprise one or more of: natural gas; hydrogen; carbon monoxide; and carbon dioxide.

[0019] The combustible gas may comprise an oxidant. The oxidant may comprise one or

more of oxygen and air. The combustible gas may comprise a mixture of CH₄ and O₂. The combustible gas may comprise a mixture of recycled gas and the oxidant. The recycled gas may comprise one or more of: natural gas; hydrogen; carbon monoxide; and carbon dioxide.

5 [0020] The combustible gas may be introduced into the combustion chamber simultaneously to the introduction of the feedstock gas into the mixing chamber.

[0021] The combustible gas may be introduced into the combustion chamber at a pressure that is equal to a pressure with which the feedstock gas is introduced into the mixing chamber.

[0022] The one or more products may comprise one or more of hydrogen and carbon.

10 [0023] The one or more products may comprise one or more of hydrogen and carbon monoxide.

[0024] The one or more products may comprise one or more of hydrogen, nitrogen, and carbon. The hydrogen and nitrogen may be used for ammonia production.

15 [0025] Stopping further production of the one or more products may comprise reducing a pressure within the mixing chamber. The pressure within the mixing chamber may be reduced sufficiently rapidly, for example by at least 50% over less than 1 second, so as to inhibit carbon fouling of the mixing chamber.

[0026] A pressure wave generated by the combustion of the combustible gas may inhibit carbon fouling of the mixing chamber.

20 [0027] The energy may be transferred from the combustible gas to the feedstock gas via gas dynamic compression and mixing.

[0028] A temperature in the combustion chamber after ignition but before mixing of the combustible gas with the feedstock gas may be ~90 ATM and ~3,700 K, for example with pure O₂ as the oxidant and recycled gas as the combustible gas.

25 [0029] After the mixing of the combustible gas with the feedstock gas, and before the one or more products are produced, at least a portion of the mixture of the feedstock gas and the combustible gas may be transferred to a third chamber. Thus, the combustion chamber and mixing chamber may be replenished with fresh combustible gas and feedstock gas while a user

waits for the one or more products to be produced in the third chamber.

[0030] In a further aspect of the disclosure, there is provided a feedstock gas reactor comprising: a mixing chamber; a combustion chamber; valving for controlling flow of gases into and out of the mixing chamber and the combustion chamber; an igniter; and one or more
5 controllers configured to perform a method comprising: controlling the valving to introduce a feedstock gas into the mixing chamber, wherein the feedstock gas comprises one or more gases; controlling the valving to introduce a combustible gas into the combustion chamber, wherein the combustible gas comprises one or more gases; and thereafter, controlling the igniter to ignite the
10 combustible gas so as to cause the combustible gas to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to mix with the feedstock gas, wherein energy is transferred from the combustible gas to the feedstock gas and thereby causes one or more products to be produced.

[0031] The introductions of the feedstock gas and the combustible gas may be such that the feedstock gas substantially does not mix with the combustible gas.

15 [0032] The method may further comprise controlling the valving to stop further production of the one or more products.

[0033] The combustion chamber may be located within the mixing chamber. The combustion chamber may be offset from a longitudinal axis of the mixing chamber.

[0034] The combustion chamber may be located outside the mixing chamber.

20 [0035] The combustion chamber may comprise one or more apertures formed therein.

[0036] The feedstock gas reactor may comprise any of the features described in connection with the first aspect of the disclosure.

[0037] In a further aspect of the disclosure, there is provided a feedstock gas reactor comprising: a mixing chamber; a combustion chamber comprising one or more apertures formed
25 therein, wherein the one or more apertures provide one or more fluid flow paths from the combustion chamber to the mixing chamber; valving for controlling flow of gases into and out of the mixing chamber and the combustion chamber; and an igniter.

[0038] The feedstock gas reactor may comprise any of the features described in

connection with the first aspect of the disclosure.

[0039] Controlling the valving may comprise controlling the opening and/or closing of individual valves. Alternatively, or in addition, controlling the valving may comprise rotating valves (for example using a motor) relative to the reactor.

5 [0040] In a further aspect of the disclosure, there is provided a system comprising: multiple feedstock reactors, each reactor comprising: a mixing chamber; a combustion chamber; and an igniter; valving for controlling flow of gases into and out of the mixing chambers and the combustion chambers; and one or more controllers configured to perform a method comprising, for each reactor: controlling the valving to introduce a feedstock gas into the mixing chamber,
10 wherein the feedstock gas comprises one or more gases; controlling the valving to introduce a combustible gas into the combustion chamber, wherein the feedstock gas comprises one or more gases; and thereafter, controlling the igniter to ignite the combustible gas so as to cause the combustible gas to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to mix with the feedstock gas, wherein energy
15 is transferred from the combustible gas to the feedstock gas and thereby causes one or more products to be produced, wherein, for a given reactor, the method is performed out of phase with at least one other reactor of the multiple reactors.

[0041] For each reactor, the introductions of the feedstock gas and the combustible gas may be such that the feedstock gas substantially does not mix with the combustible gas.

20 [0042] For each reactor, the method may further comprise controlling the valving to stop further production of the one or more products.

[0043] The multiple reactors may be arranged radially about a central axis, and the system may further comprise a rotator configured to: rotate the multiple reactors about the central axis relative to a valve assembly comprising the valving; or rotate a valve assembly comprising
25 the valving about the central axis relative to the multiple reactors. Thus, the valve assembly may be rotated while the reactors are stationary, or the valve assembly may be stationary while the reactors are rotated. In some embodiments, the valve assembly and the reactors may even be rotated at the same time.

[0044] Controlling the valving may comprise controlling the opening and/or closing of
30 individual valves. Alternatively, or in addition, controlling the valving may comprise rotating valves

(for example using a motor) relative to the reactors.

[0045] The system may comprise any of the features described in connection with the first aspect of the disclosure.

5 [0046] In a further aspect of the disclosure, there is provided a system comprising: one or more of any of the above-described reactors; and one or more fuel cells coupled to the one or more reactors and configured to receive carbon produced from the mixing of the combustible gases with the feedstock gases.

[0047] The system may comprise any of the features described in connection with the first aspect of the disclosure.

10 BRIEF DESCRIPTION OF THE DRAWINGS

[0048] Embodiments of the disclosure will now be described in detail in conjunction with the accompanying drawings of which:

[0049] FIG. 1 is a graph of mole fraction of hydrogen created from methane at a pressure of 1 atmosphere under various temperatures and time constants;

15 [0050] FIG. 2. shows a combination of natural gas dissociation and a carbon fuel cell for producing hydrogen, electricity and pure carbon dioxide, in accordance with embodiments of the disclosure;

[0051] FIG. 3 is a schematic diagram of a system for cracking natural gas, according to embodiments of the disclosure;

20 [0052] FIGS. 4A and 4B show different arrangements of a mixing chamber and a combustion chamber, according to embodiments of the disclosure;

[0053] FIG. 5 is a schematic diagram of a method of cracking natural gas, according to embodiments of the disclosure;

25 [0054] FIG. 6 shows different configurations of a system comprising bundled reactors operating out of phase, in accordance with embodiments of the disclosure;

[0055] FIG. 7 shows bundled reactors rotating around stationary valves, in accordance with embodiments of the disclosure;

[0056] FIG. 8 is a schematic block diagram of a combustion chamber and a mixing chamber used to provide mixing of a feedstock gas with a combustible gas, and a third chamber to which the combustible and feedstock gas mixture is directed and in which one or more products are produced from the mixture, according to embodiments of the disclosure;

5 [0057] FIG. 9 is a schematic block diagram of a combustion chamber and a mixing chamber used to provide mixing of a feedstock gas with a combustible gas, and in which one or more products are produced from the mixture, according to embodiments of the disclosure;

[0058] FIG. 10 is a schematic block diagram of a combustion chamber and a mixing chamber used to provide mixing of a feedstock gas with a combustible gas, and in which one or
10 more products are produced from the mixture, and wherein recycled gases are used to provide thermal energy for the process, according to embodiments of the disclosure;

[0059] FIG. 11 is a schematic diagram of a combustion chamber located within a mixing chamber, according to embodiments of the disclosure;

[0060] FIG. 12 is a schematic diagram of a combustion chamber located outside a mixing
15 chamber, according to embodiments of the disclosure;

[0061] FIG. 13 shows a combustion chamber arranged within a mixing chamber, according to embodiments of the disclosure; and

[0062] FIG. 14 shows a multi-reactor bundle with stationary reactors and rotating valves, according to embodiments of the disclosure.

20 DETAILED DESCRIPTION OF EMBODIMENTS

[0063] The present disclosure seeks to provide an improved method and reactor for producing one or more products. While various embodiments of the disclosure are described below, the disclosure is not limited to these embodiments, and variations of these embodiments may well fall within the scope of the disclosure which is to be limited only by the appended claims.

25 [0064] The word “a” or “an” when used in conjunction with the term “comprising” or “including” in the claims and/or the specification may mean “one”, but it is also consistent with the meaning of “one or more”, “at least one”, and “one or more than one” unless the content clearly dictates otherwise. Similarly, the word “another” may mean at least a second or more unless the content clearly dictates otherwise.

[0065] The terms “coupled”, “coupling” or “connected” as used herein can have several different meanings depending on the context in which these terms are used. For example, the terms coupled, coupling, or connected can have a mechanical or electrical connotation. For example, as used herein, the terms coupled, coupling, or connected can indicate that two elements or devices are directly connected to one another or connected to one another through one or more intermediate elements or devices via an electrical element, electrical signal or a mechanical element depending on the particular context. The term “and/or” herein when used in association with a list of items means any one or more of the items comprising that list.

[0066] As used herein, a reference to “about” or “approximately” a number or to being “substantially” equal to a number means being within +/- 10% of that number.

[0067] Generally, the present disclosure relates (but is not limited) to the cracking of natural gas into its components of carbon (C) and hydrogen (H₂), using dynamic gas compression and mixing to create the pressure and temperature needed to thermally decompose the natural gas. A goal of the process is to optimize the process for hydrogen yield and to recover solid carbon as a secondary value stream, while minimizing carbon greenhouse emissions. When paired with a direct carbon fuel cell (DCFC), the carbon product can be used to generate electricity and a pure product stream of CO₂ suitable for sequestration (see FIG. 2). The result is low-cost, “clean” hydrogen production.

[0068] Generally, according to embodiments of the disclosure, there is described an ultra-rich pulsed pyrolysis process used to produce hydrogen-rich gas and/or carbon products from natural gas feedstock. For large-scale hydrogen production, the process could compete with SMR.

[0069] According to embodiments of the disclosure, there is described the use of an unsteady, constant volume pulsed reaction process to produce hydrogen and carbon products from a natural gas-based feedstock. A separate chamber of combustible gases and an oxidant provides the energy for the reaction, and is transferred directly to the feedstock mixing chamber by gas-dynamic compression and rapid mixing thermal energy exchange via direct contact. In the discussion below, air is used as the oxidant; however, other oxidants such as pure oxygen can be used in the process. Furthermore, the feedstock gas and combustible gas can comprise

the same gas or gas mixture or can comprise different gases or gas mixtures. In some embodiments, the combustible gas may comprise a recycled gas mixture.

[0070] The reactor comprises a mixing chamber and a combustion chamber. These chambers are connected via a number of passageways that are always open. In some
5 embodiments, the reactor comprises a perforated tube (the combustion chamber) within a larger solid tube (the mixing chamber); see FIGS. 3 and 4A. In other embodiments, the combustion chamber can be external to the mixing chamber (as shown in FIG. 4B). External valves provide the feedstock, oxidant and combustible gas (shown as CH_4) as well as the discharged hydrogen, carbon and other gases produced during the reaction.

10 [0071] Turning to FIG. 5, at the start of the cycle, the mixing chamber is filled with the products of the previous reaction cycle. The mixing chamber is filled with a mixture of products of the feedstock reaction plus a portion of the products of the combustion reaction. The combustion chamber is predominantly filled with the products of the combustion reaction. At 500,
15 fresh feedstock and perhaps some recycled product gases are introduced into the mixing chamber to displace the products of the previous cycle from the end of the mixing chamber. At the same time, a combustible gas/air mixture is introduced into the combustion chamber, displacing the products of combustion from the end of the combustion chamber. At 502, all inlet and outlet valves are closed, creating a closed volume. At 504, the gases in the combustion
20 chamber are then ignited resulting in a pressure and temperature increase within the combustion chamber. At 506, the passageways between the combustion chamber and the mixing chamber allow the combustible gas products to enter into the mixing chamber thereby compressing the feedstock gases and increasing their pressure and temperature. In addition, the hot combustion
25 chamber gas products mix with the feedstock gases and thereby transfer their thermal energy to the feedstock gases, further increasing their temperature. The resulting temperature and pressure of the feedstock gases causes a reaction to occur. At 508, the reaction is allowed to proceed for a period of time to complete the desired reaction and develop the desired products. At 510, the pressure within the mixing chamber is rapidly lowered by releasing the products to an external volume (not shown). Combustion product gases remaining in the combustion chamber
30 may be vented out with the mixing chamber gases or vented out separately through a dedicated port. The pressure reduction in the mixing chamber reduces the temperature and stops or quenches the reaction. This rapid depressurization and expansion also has the desirous effect of removing solid reaction products, such as carbon, from the reactor walls. In addition, the pressure wave generated from the combustion may strip carbon deposits from the reactor walls.

[0072] If the feedstock and combustible gases are premixed, the mixture may not ignite, as it is too rich. Therefore, the mixing chamber and combustion chamber are distinct and separate prior to ignition, such that no or preferably very little mixing occurs between the feedstock gas and the combustible gas.

5 [0073] A number of reactor systems may be bundled together and operated slightly out of phase with each other to produce a continuous flow into and out of the reactor system. Valves can be stationary or rotating, as shown in FIG. 6. In some embodiment, the reactors can be rotated and the valves may remain stationary (see FIG. 7, modified from FIG. 2 of *Wave rotor design method with three steps including experimental validation*, Chan Shining et al., Journal of
10 Engineering for Gas Turbines and Power, December 2017).

[0074] Various parameters may be adjusted to enable the reactor to work effectively. The feedstock gas may be preheated to just below the temperature at which it starts to react, before being introduced into the mixing chamber. A typical temperature would be in the range of 600K-1000K, depending on the feedstock components and working pressures.

15 [0075] Furthermore, the combustible gas / oxidant mixture being introduced may also be preheated before entering the combustion chamber. A typical temperature would be in the range of 400K-700 K depending on the combustible gases used. Preheating the combustible gas / oxidant mixture may improve the efficiency of the process such that more combustion energy is transferred to the reactants rather than being used to heat the products of combustion.

20 [0076] The volume ratio between the mixing chamber and combustion chamber should be set such that the correct amount of energy contained in the combustion chamber is provided to the mixing chamber to produce the desired products. There should also be sufficient combustible gas products entering the mixing chamber to provide effective mixing. A volume ratio of < 10:1 is generally desired. When using air as the oxidant, nitrogen may be beneficial as a
25 non-reactive gas that promotes a lower volume ratio and increases mixing. When using pure oxygen as the oxidant, another gas such as CO₂ may provide the same benefit as nitrogen in the air as oxidant case. Introducing additional CO₂ to the combustible gas mixture may result in greater solid carbon production.

[0077] The length-to-diameter ratio is important to obtain efficient energy transfer from the
30 combustion chamber to the mixing chamber. Short, large-diameter reactors will tend to have poor

mixing while long, skinny reactors will develop challenges in introducing the feedstock and combustible gases into the reactor along its length. A length-diameter ratio of $< 30:1$ is generally desired.

[0078] According to some embodiments, the reactor uses methane (or natural gas) in addition to some recycled product gases as the feedstock gas, and a recycled gas / oxidant mixture as the combustible gases. The reactor may be designed and operated to maximize the production of hydrogen and solid carbon in the reaction products stream. The reactor may comprise a combustion chamber, being a perforated tube, inside a mixing chamber. The perforated combustion chamber may be offset from the center of the mixing chamber and bonded to a wall of the mixing chamber to provide structural integrity and support, as can be seen in FIG. 13. The mixing chamber / combustion chamber volume ratio may be less than or equal 10:1 and the length-to-diameter ratio may be 10:1. In some embodiments the mixing chamber / combustion chamber volume ratio may be about 6:1, and in some embodiments the mixing chamber / combustion chamber volume ratio may be about 3.5:1.

[0079] As can be seen in FIG. 14, a number of reactor tubes may be arranged together with external rotating valves providing the flow and sequencing of all feedstock, combustible gases and reaction products. A separate port may vent the combustion chamber combustion products.

[0080] The reactor may be operated at a sufficiently high pressure such that the resulting hydrogen can be purified using standard pressure swing absorption technology. According to some embodiments, product gases such as unreacted methane (CH_4), carbon monoxide (CO) and some hydrogen are recycled and mixed with more methane to produce the feedstock gas mixture to the reactor. The combustible gas mixture comprises the recycled gas mixture in addition (in the case of an air-blown reactor) to the CO_2 removed from the CO_2 removal system, and pure oxygen. In some embodiments, the recycled gas mixture flowing to both the combustion and mixing chambers contains CO_2 in addition to CH_4 , CO and H_2 . The feedstock gas mixture and the combustible gas mixture are preheated to $\sim 900\text{K}$ and $\sim 600\text{K}$ respectively, from thermal energy recovered from the reactor products stream via a multi-stream heat exchanger. In alternative embodiments, the mixing chamber / combustion chamber volume ratio is 3.5:1, methane (or natural gas) / air mixture is used for the combustible gases.

[0081] There will now be provided a detailed description of embodiments of the disclosure.

[0082] With reference to FIG. 8, combustible gas 10 and oxidant gas 20 enter the combustion mixture conditioning and control system 30 which conditions the combustible gas mixture 31 to the correct temperature and pressure required by chamber 60. Feedstock gas 40 and recycle gas mixture 91 enter the feedstock mixture conditioning and control system 50 which conditions the feedstock mixture 51 to the correct temperature and pressure required by chamber 60. In some embodiments, a recycle gas mixture is not available and only the feedstock gas 40 enters the feedstock mixture conditioning and control system 50.

[0083] Chamber 60 is a constant volume device which uses the combustion energy from the conditioned combustible gas mixture 31 to increase the pressure and temperature of the conditioned feedstock mixture 51 to a reaction ready level. A combustion product gas mixture 67 comprising mainly of the combustion products of combusted conditioned combustible gas mixture 31 may be vented from chamber 60. The reaction ready gas mixture 61 enters the reactor 70, whereby it remains until the gas mixture is converted in a constant volume endothermic reaction to the reacted product mixture 71. The constant volume reaction is an unsteady process which operates in a batch mode and requires control of flow timing. This is accomplished by flow control in conditioning systems 30, 50, and separation and control system 80.

[0084] The reacted product mixture 71 enters the product separation and control system 80 which stops the reaction in reactor 70 by reducing the pressure and temperature of the desired reacted product mixture 71 and separates and/or purifies the individual product components 81, 82, the unwanted products 83 and the recycle gas mixture 84. The recycle gas mixture 84 enters the pre-conditioning recycle gas system 90 where the recycle gas mixture 84 is pre-conditioned to the desired temperature and pressure and flows to the feedstock mixture conditioning and control system 50.

[0085] In some embodiments, the combustible gas 10 and the feedstock gas 40 are natural gas, and the oxidant gas 20 is air. The desired reaction in reactor 70 is methane pyrolysis generally given by the following equation:

[0086] CH_4 (methane) + energy $\rightarrow$ C (carbon) + 2H_2 (hydrogen)

[0087] The individual product 81 is hydrogen gas, the individual product 82 is carbon, and the unwanted products 83 are primarily carbon dioxide, nitrogen and water. The recycle gas mixture 84 comprises primarily of unreacted natural gas, hydrogen, nitrogen and carbon monoxide.

5 [0088] The system in FIG. 9 is similar to that of FIG. 8 with the exception that the chamber 60 and the reactor 70 are combined into the constant volume reactor 62.

[0089] FIG. 10 is similar to FIG. 9 but with a portion of recycle mixture 84, conditioned in pre-conditioned recycled gas conditioner 90, sent to the combustible gas conditioner and control system 30 to offset the amount of combustible gas 10 required.

10 [0090] FIG. 11 represents a cross-sectional view of either chamber 60 or constant volume reactor 62. In this description, it represents constant volume reactor 62.

[0091] Constant volume reactor 62 comprises a combustion volume 65 contained within combustion chamber 63. Combustion chamber 63 is surrounded by reactor volume 64 which is contained in reactor chamber 68. Passageways 66 connect combustion volume 65 to reactor
15 volume 64. Although combustion chamber 63 is shown in the center of reactor chamber 68, the combustion chamber 63 can be located anywhere in reactor chamber 68, including against the outside wall 69 of the reactor chamber 68.

[0092] Conditioned combustible gas mixture 31 enters combustion chamber 63 through combustible gas mixture valve 32 and passageway 33, displacing any combustion product gas
20 mixture 67 present in combustion volume 65 out of reactor 62 via passageway 74 and combustion product valve 75. Conditioned feedstock gas mixture 51 enters mixing chamber 68 through feedstock gas mixture valve 52 and passageway 53, displacing desired reacted product mixture 71 in reactor volume 64 out of reactor 62 via passageway 73 and product valve 72. Both the
25 conditioned combustible gas mixture 31 and the conditioned feedstock gas mixture 51 may simultaneously enter constant volume reactor 62 at the same pressure such that there is very little mixing via passageways 66.

[0093] Once predominantly all the combustible gas mixture 67 and desired product mixture 71 is displaced from reactor 62, combustion product valve 75 and product valve 72 are closed. Once the desired reactor pressure is reached, combustible gas mixture valve 32 and
30 feedstock gas mixture valve 52 are closed, creating a closed volume in reactor 62. Igniter 100

creates ignition energy 101 which allows conditioned combustible gas mixture 31 in combustion chamber 63 to combust in an exothermic reaction creating combustion product gas mixture 67 at elevated temperature and pressure. Due to the resulting pressure difference between combustion chamber 63 and mixing chamber 68, a portion of combustible gas mixture 67 enters reactor volume 64, compressing feedstock gas mixture 51 to a higher pressure. Simultaneously, this portion of hot combustible gas mixture 67 mixes and heats feedstock gas mixture 51 by conduction, convection and radiation. Feedstock gas mixture 51 is now at an elevated temperature and pressure which creates the conditions for an endothermic reaction to occur. Constant volume reactor 62 is maintained as a closed volume until the endothermic reaction proceeds long enough to create desired product mixture 71. Once this condition is reached, product valve 72 and combustion product valve 75 are opened which drops the pressure and temperature, stopping the endothermic reaction. The process then repeats.

[0094] FIG. 12 shows an embodiment of chamber 60 or constant volume reactor 62 with combustion chamber 63 external to mixing chamber 68. Combustion volume 65 is connected to reactor volume 64 via a number of passages 68. Multiple ignitors can be positioned along combustion chamber 63 to create specific combustion conditions if required. Multiple ignitors can also be positioned in the constant volume reactor 62 of FIG. 11 if the combustion chamber 63 is positioned next to reactor chamber wall 69.

[0095] FIG. 13 shows an isometric view of an embodiment of chamber 60 or constant volume reactor 62 with the combustion chamber 63 directly bonded with the reactor chamber wall 69 of reactor chamber 68. Directly bonding combustion chamber 63 to reactor chamber wall 69 provides structural support and alignment to combustion chamber 63, and essentially creates a one-piece chamber 60 or constant volume reactor 62.

[0096] In order to create a quasi or semi-continuous flow system, multiple chambers 60 or constant volume reactors 62 can be arranged together and operated out of phase such that each chamber or reactor is undergoing a different part of the process described in FIG. 11.

[0097] FIG. 14 shows an embodiment of a multi-tube reactor 110, with a multitude of individual constant volume reactors 62 shown in FIG. 14 arranged in a circular pattern. Conditioned combustible gas mixture 31 enters multitube reactor 110 via passageway 34 into plenum 35. Conditioned feedstock gas mixture 51 enters multitube reactor 110 via passageway 54 into plenum 55. Timing of conditioned combustion and conditioned feedstock gas mixtures

entering multitube reactor 110 is controlled by inlet rotating valve 120 which is part of rotating valve assembly 121. Inlet rotating valve 120 performs the same function as combustible gas mixture valve 32, passageway 33, feedstock gas mixture valve 52, and passageway 53 described in FIG. 11. The timing of combustion product gas mixture 67 and desired product mixture 71 leaving multitube reactor 110 is controlled by outlet rotating valve 122 which is part of rotating valve assembly 121. Outlet rotating valve 122 performs the same function as combustion product valve 72, passageway 73, feedstock product valve 75, and passageway 74 described in FIG. 11.

[0098] Combustion product gas mixtures 67 from each constant volume reactor 62 is collected in combustion product plenum 123 and distributed out of the multitube reactor 110 via passageway 125. Product mixture 71 from each constant volume reactor 62, is collected in product plenum 124 and distributed out of the multitube reactor 110 via passageway, 126.

[0099] While the disclosure has been presented primarily in the context of the cracking of a feedstock gas, the disclosure extends to other methods of producing one or more products from a feedstock gas. For example, syngas (H_2 and CO) may be produced by adjusting one or more parameters of the process such that the combustible gas reacts (in addition to mixing) with the feedstock gas. For instance, the ratio of oxidant to recycled gas in the combustible gas may be increased, to increase the pressure and temperature of the combustible gas immediately after ignition, and thereby induce an appropriate reaction between the combustible gas and the feedstock gas.

[0100] While the disclosure has been described in connection with specific embodiments, it is to be understood that the disclosure is not limited to these embodiments, and that alterations, modifications, and variations of these embodiments may be carried out by the skilled person without departing from the scope of the disclosure. It is furthermore contemplated that any part of any aspect or embodiment discussed in this specification can be implemented or combined with any part of any other aspect or embodiment discussed in this specification.

CLAIMS

1. A method of producing one or more products, comprising:

introducing a feedstock gas into a mixing chamber, wherein the feedstock gas comprises one or more gases;

introducing a combustible gas into a combustion chamber, wherein the combustible gas comprises one or more gases; and

thereafter, igniting the combustible gas so as to combust the combustible gas and thereby form one or more combustion product gases and cause the one or more combustion product gases to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to cause the one or more combustion product gases to mix with the feedstock gas, wherein, as a result of the mixing of the one or more combustion product gases with the feedstock gas, energy is transferred from the one or more combustion product gases to the feedstock gas and thereby causes a chemical reaction to produce one or more products.
2. The method of claim 1, wherein, prior to igniting the combustible gas, a pressure of the feedstock gas in the mixing chamber is about equal to a pressure of the combustible gas in the combustion chamber such that the feedstock gas substantially does not mix with the combustible gas.
3. The method of claim 1 or 2, further comprising stopping further production of the one or more products.
4. The method of any one of claims 1-3, further comprising preheating the feedstock gas prior to introducing the feedstock gas into the mixing chamber.
5. The method of any one of claims 1-4, further comprising preheating the combustible gas prior to introducing the combustible gas into the combustion chamber.
6. The method of any one of claims 1-5, wherein a ratio of a volume of the mixing chamber to a volume of the combustion chamber is less than or equal to 10:1.
7. The method of any one of claims 1-6, wherein a ratio of a length of the mixing chamber to a diameter of the mixing chamber is less than or equal to 30:1.

8. The method of claim any one of claims 1-7, wherein the feedstock gas comprises natural gas.
9. The method of claim 8, wherein the feedstock gas comprises a mixture of natural gas and recycled gas.
10. The method of claim 9, wherein the recycled gas comprises one or more of: one or more components of natural gas; hydrogen; carbon monoxide; and carbon dioxide.
11. The method of any one of claims 1-10, wherein the combustible gas comprises an oxidant.
12. The method of claim 11, wherein the oxidant comprises one or more of oxygen and air.
13. The method of claim 11 or 12, wherein the combustible gas comprises a mixture of CH₄ and the oxidant.
14. The method of any one of claims 11-13, wherein the combustible gas comprises a mixture of recycled gas and the oxidant.
15. The method of claim 14, wherein the recycled gas comprises one or more of: one or more components of natural gas; hydrogen; carbon monoxide; and carbon dioxide.
16. The method of any one of claims 1-15, wherein the combustible gas is introduced into the combustion chamber simultaneously to the introduction of the feedstock gas into the mixing chamber.
17. The method of any one of claims 1-16, wherein the combustible gas is introduced into the combustion chamber at a pressure that is equal to a pressure with which the feedstock gas is introduced into the mixing chamber.
18. The method of any one of claims 1-17, wherein the one or more products comprise one or more of hydrogen and carbon.
19. The method of any one of claims 1-17, wherein the one or more products comprise one or more of hydrogen and carbon monoxide.
20. The method of any one of claims 1-17, wherein the one or more products comprise one or more of hydrogen, nitrogen, and carbon.
21. The method of claim 3, wherein stopping further production of the one or more products comprises reducing a pressure within the mixing chamber.

22. The method of claim 21, wherein the pressure within the mixing chamber is reduced by at least 50% over less than 1 second so as to inhibit carbon fouling of the mixing chamber.
23. The method of any one claims 1-22, wherein a pressure wave generated by the combustion of the combustible gas inhibits carbon fouling of the mixing chamber.
24. The method of any one of claims 1-23, wherein the energy is transferred from the one or more combustion product gases to the feedstock gas via dynamic compression of the feedstock gas as a result of the one or more combustion product gases flowing into the mixing chamber and mixing with the feedstock gas.
25. The method of any one of claims 1-24, wherein, after the mixing of the one or more combustion product gases with the feedstock gas, and before the one or more products are produced, transferring at least a portion of the mixture of the feedstock gas and the one or more combustion product gases to a third chamber.
26. The method of any one of claims 1-25, wherein the method is a constant volume reaction process.
27. A feedstock gas reactor comprising:
- a mixing chamber;
 - a combustion chamber;
 - valving for controlling flow of gases into and out of the mixing chamber and the combustion chamber;
 - an igniter; and
 - one or more controllers configured to perform a method comprising:
 - controlling the valving to introduce a feedstock gas into the mixing chamber, wherein the feedstock gas comprises one or more gases;
 - controlling the valving to introduce a combustible gas into the combustion chamber, wherein the combustible gas comprises one or more gases; and
 - thereafter, controlling the igniter to ignite the combustible gas so as to combust the combustible gas and thereby form one or more combustion product gases and cause the one or more combustion product gases to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to cause the one

or more combustion product gases to mix with the feedstock gas, wherein, as a result of the mixing of the one or more combustion product gases with the feedstock gas, energy is transferred from the one or more combustion product gases to the feedstock gas and thereby causes a chemical reaction to produce one or more products.

28. The reactor of claim 27, wherein, prior to controlling the igniter, controlling the valving to introduce the feedstock gas comprises controlling the valving to introduce the feedstock gas into the mixing chamber at a first pressure, and wherein controlling the valving to introduce the combustible gas comprises controlling the valving to introduce the combustible gas into the combustion chamber at a second pressure about equal to the first pressure such that the feedstock gas substantially does not mix with the combustible gas.
29. The reactor of claim 27 or 28, wherein the method further comprises controlling the valving to stop further production of the one or more products.
30. The reactor of any one of claims 27-29, wherein the combustion chamber is located within the mixing chamber.
31. The reactor of claim 30, wherein the combustion chamber is offset from a longitudinal axis of the mixing chamber.
32. The reactor of any one of claims 27-29, wherein the combustion chamber is located outside the mixing chamber.
33. The reactor of any one of claims 27-32, wherein the combustion chamber comprises one or more apertures formed therein.
34. A system comprising:
 - multiple feedstock reactors, each reactor comprising:
 - a mixing chamber;
 - a combustion chamber; and
 - an igniter;
 - valving for controlling flow of gases into and out of the mixing chambers and the combustion chambers; and
 - one or more controllers configured to perform a method comprising, for each reactor:

controlling the valving to introduce a feedstock gas into the mixing chamber, wherein the feedstock gas comprises one or more gases;

controlling the valving to introduce a combustible gas into the combustion chamber, wherein the feedstock gas comprises one or more gases; and


thereafter, controlling the igniter to ignite the combustible gas so as to combust the combustible gas and thereby form one or more combustion product gases and cause the one or more combustion product gases to flow into the mixing chamber via one or more fluid flow paths between the combustion chamber and the mixing chamber, and to cause the one or more combustion product gases to mix with the feedstock gas, wherein, as a result of the mixing of the one or more combustion product gases with the feedstock gas, energy is transferred from the one or more combustion product gases to the feedstock gas and thereby causes a chemical reaction to produce one or more products,

wherein, for a given reactor, the method is performed out of phase with at least one other reactor of the multiple reactors.

35. The system of claim 34, wherein, for each reactor, prior to controlling the igniter, controlling the valving to introduce the feedstock gas comprises controlling the valving to introduce the feedstock gas into the mixing chamber at a first pressure, and wherein controlling the valving to introduce the combustible gas comprises controlling the valving to introduce the combustible gas into the combustion chamber at a second pressure about equal to the first pressure such that the feedstock gas substantially does not mix with the combustible gas.
36. The system of claim 34 or 35, wherein, for each reactor, the method further comprises controlling the valving to stop further production of the one or more products.
37. The system of any one of claims 34-36, wherein the multiple reactors are arranged radially about a central axis, and wherein the system further comprises a rotator configured to: rotate the multiple reactors about the central axis relative to a valve assembly comprising the valving; or rotate a valve assembly comprising the valving about the central axis relative to the multiple reactors.
38. A system comprising:
one or more reactors according to any one of claims 27-33; and


one or more fuel cells coupled to the one or more reactors and configured to receive carbon produced from the mixing of the one or more combustion product gases with the feedstock gases.

FIG. 1

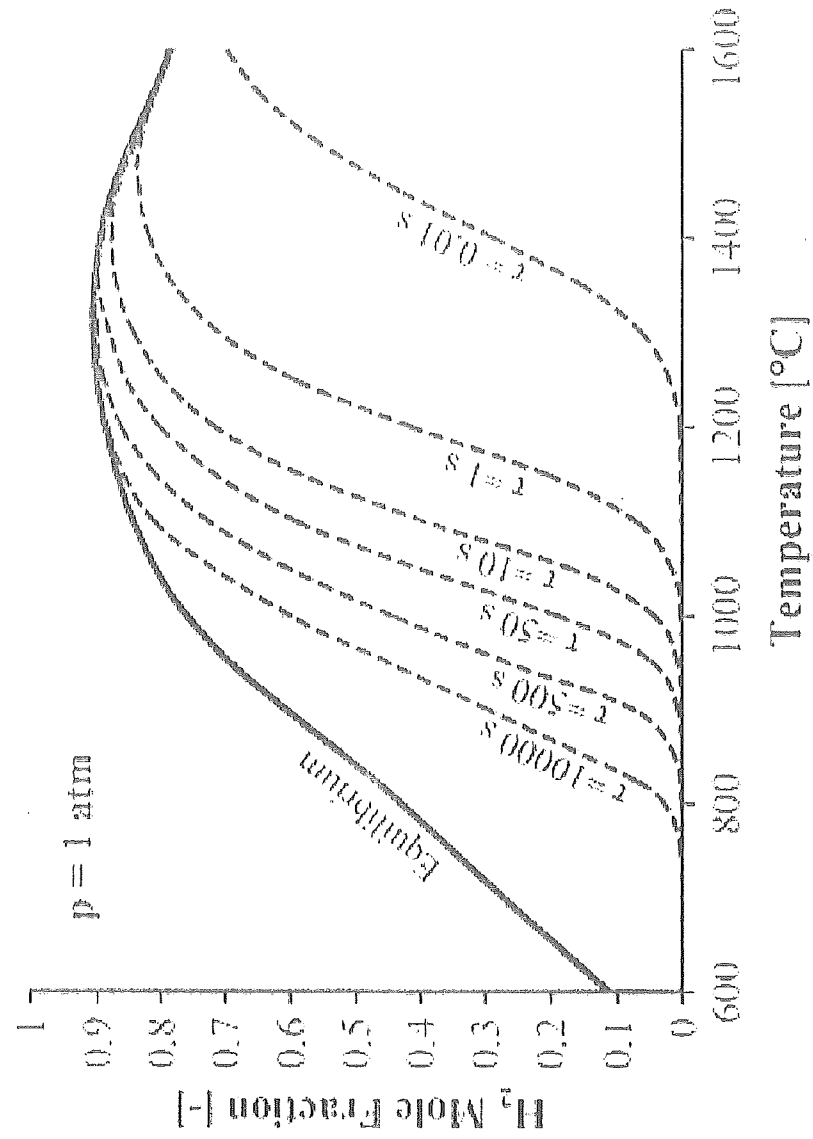


(Prior Art)

FIG. 2

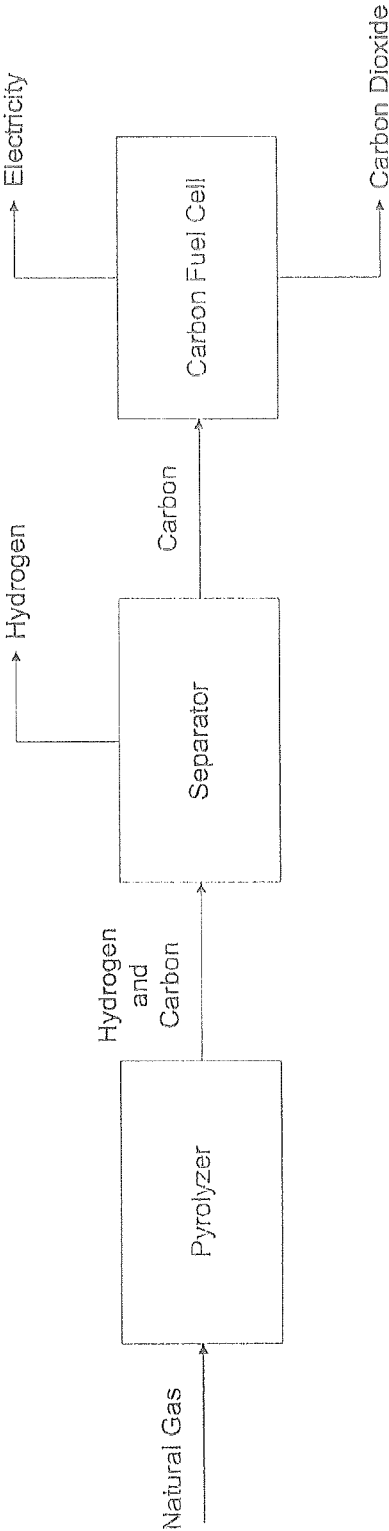

3/14

FIG. 3

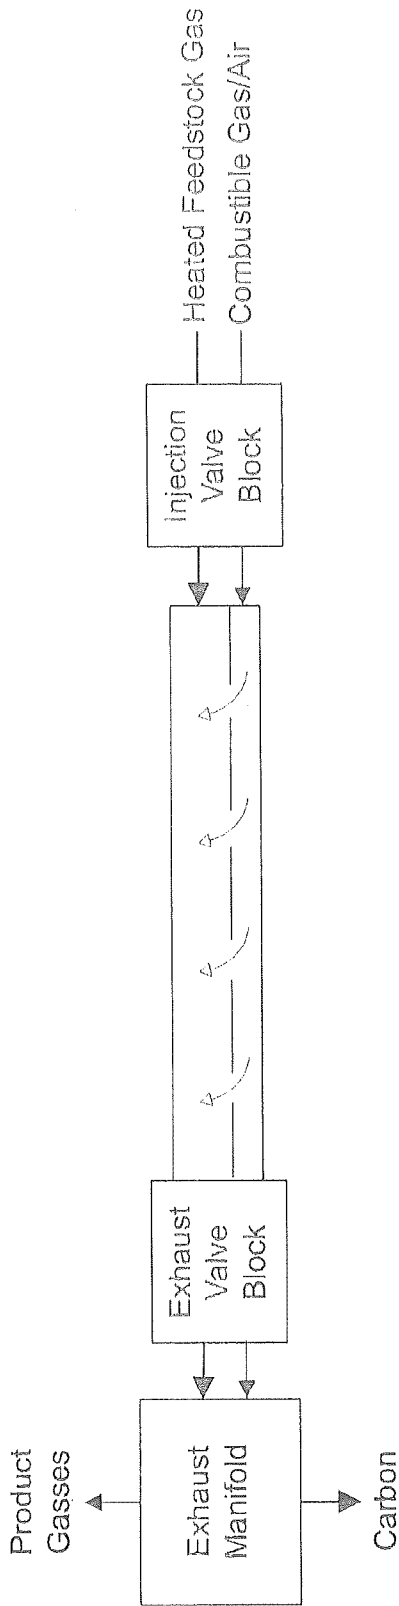

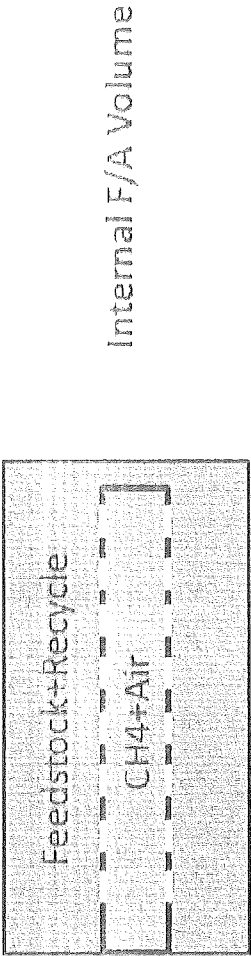


FIG. 4A

Internal F/A Volume

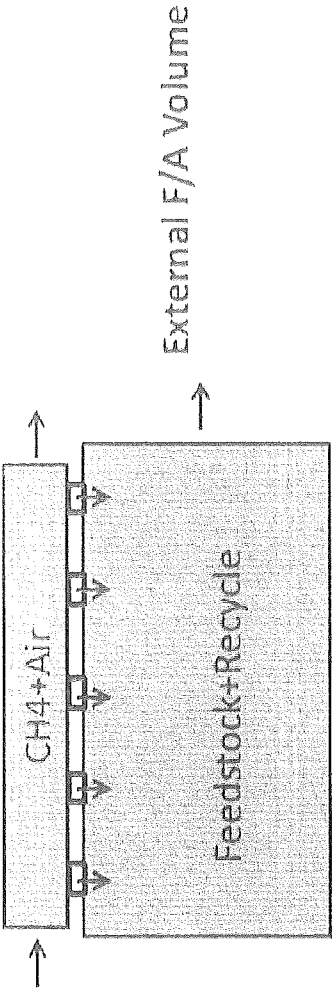


FIG. 4B

External F/A Volume

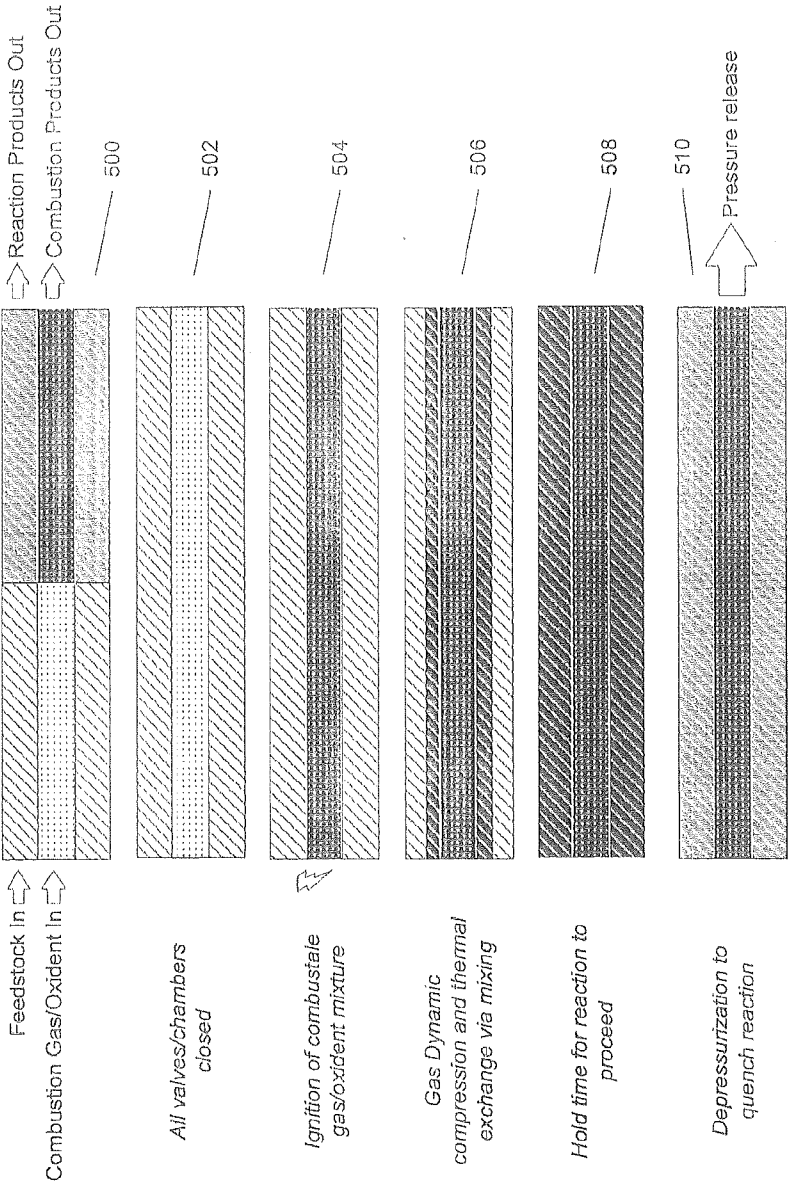


FIG. 5

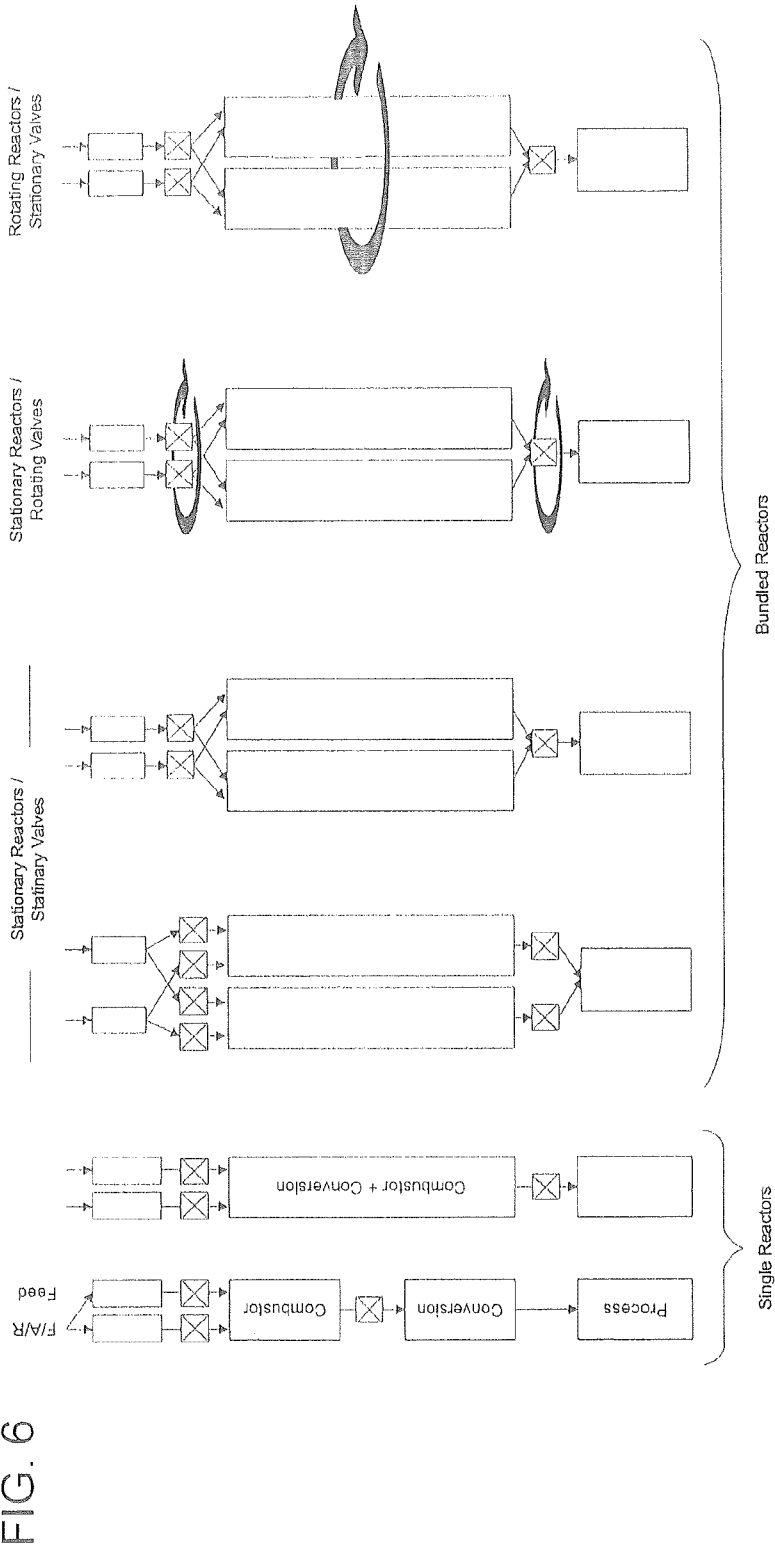


FIG. 7 Ported In/Out Rotary Reactors

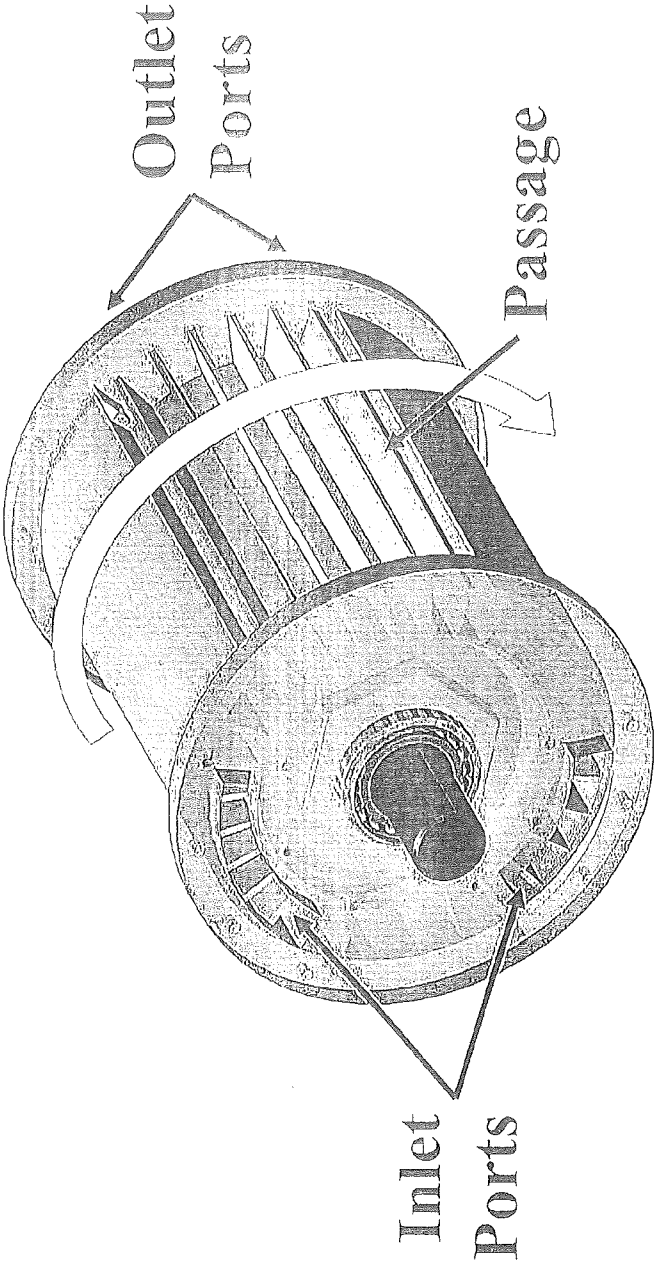


FIG. 8



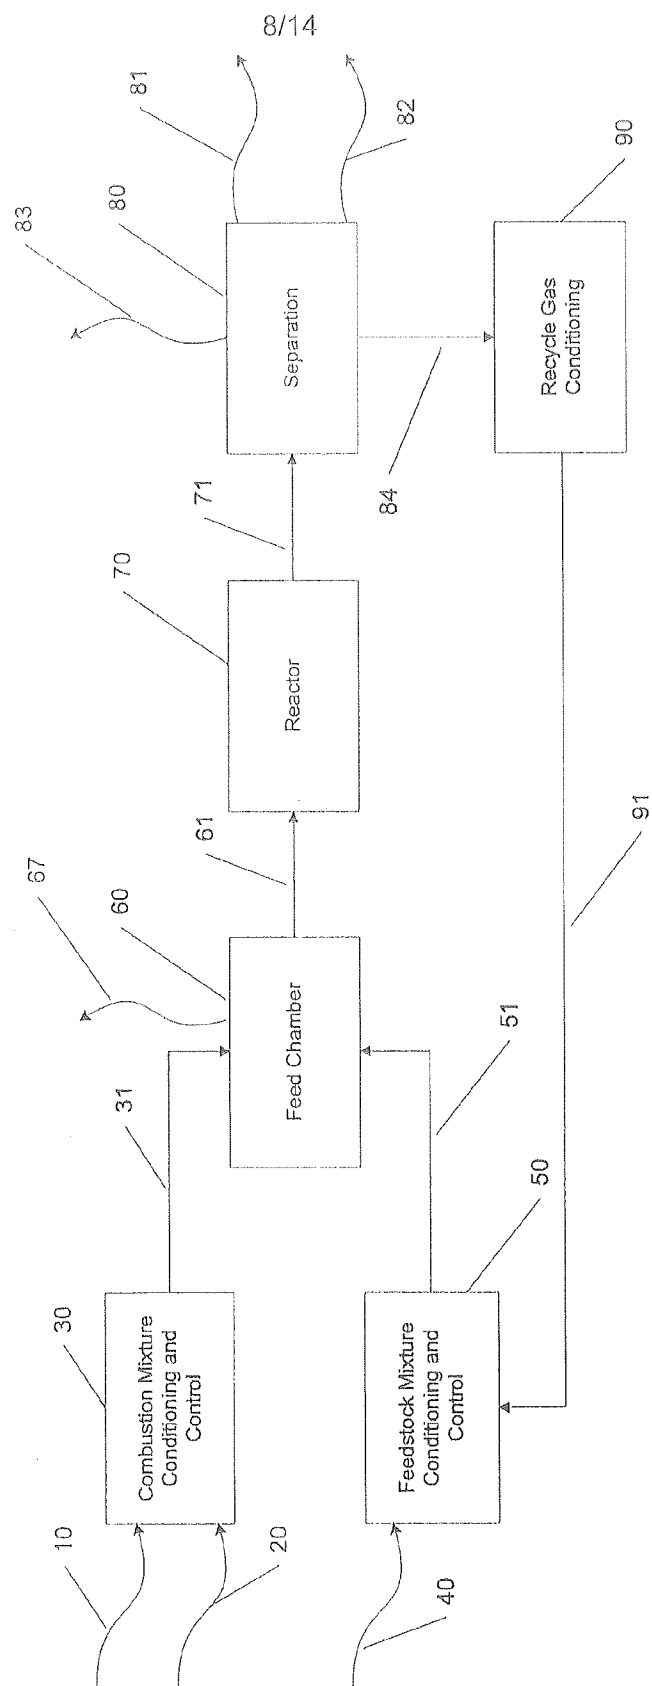


FIG. 9

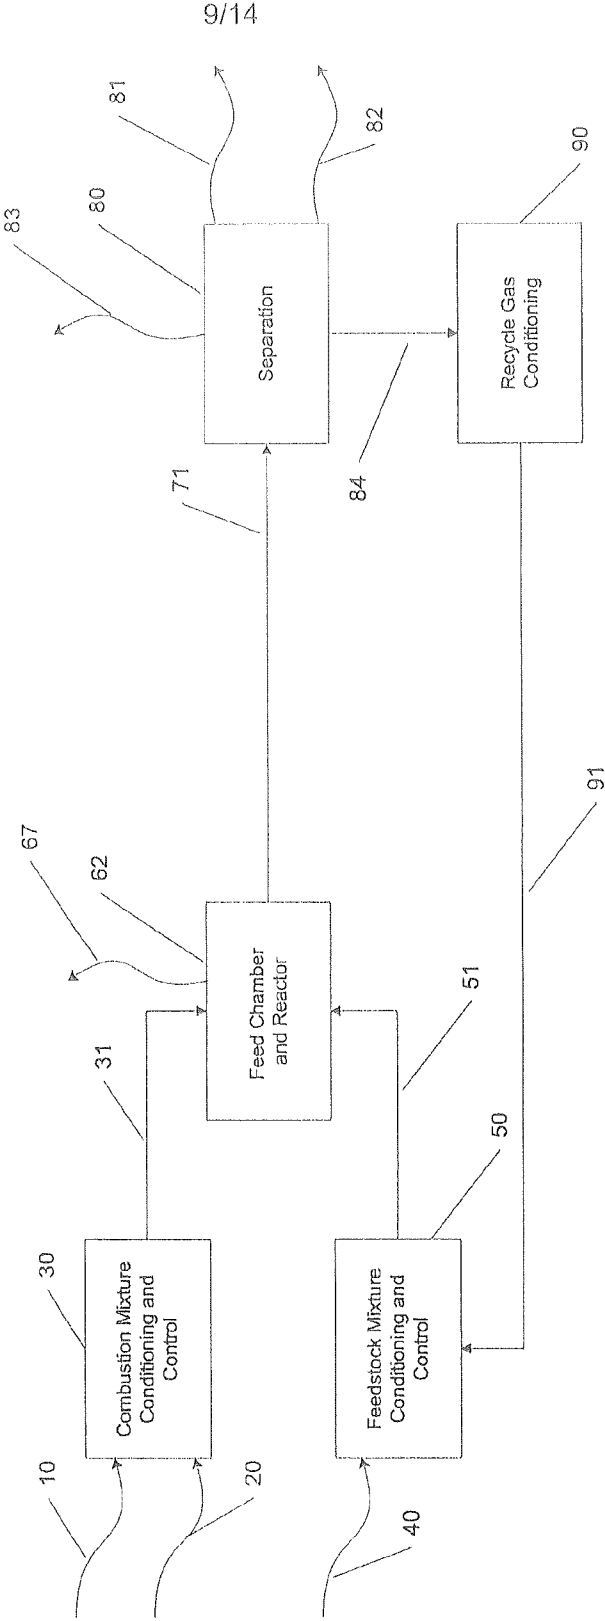

10/14

FIG. 10

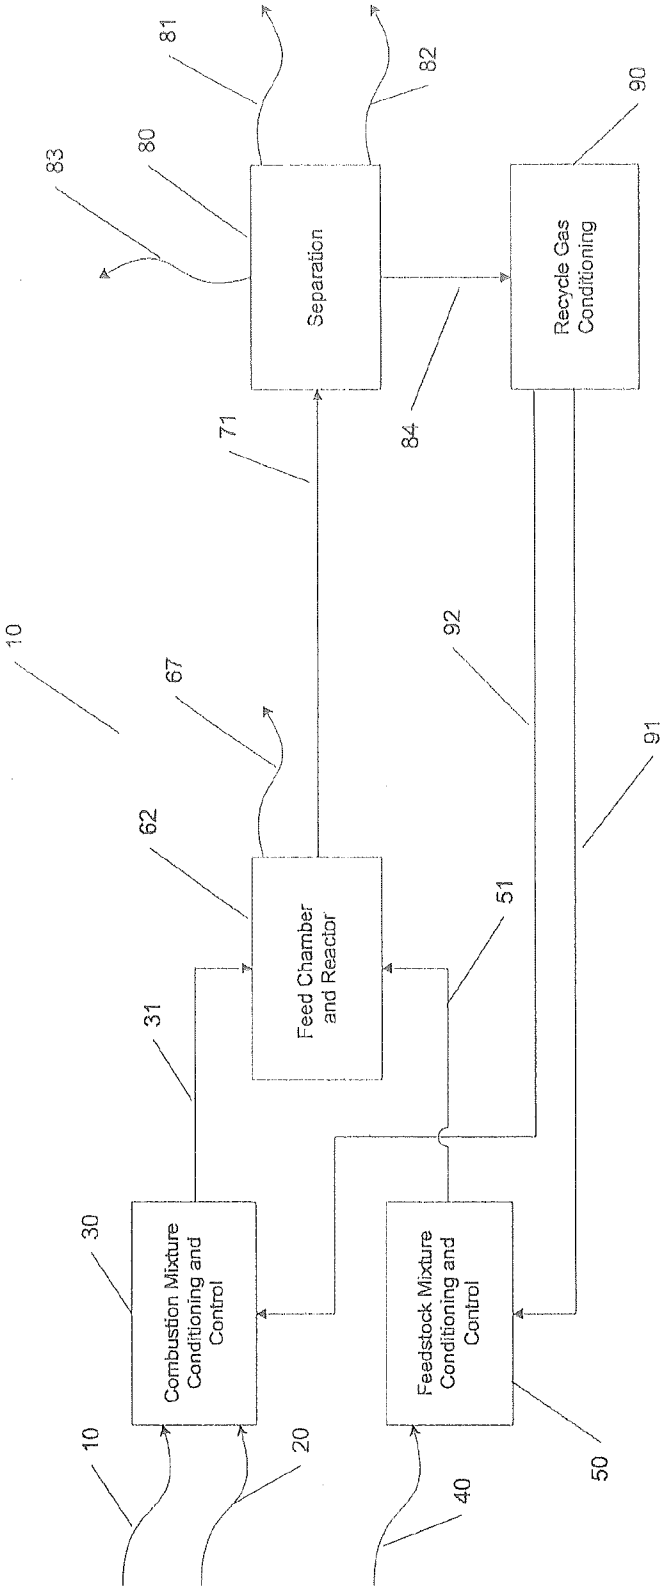

11/14

FIG. 11

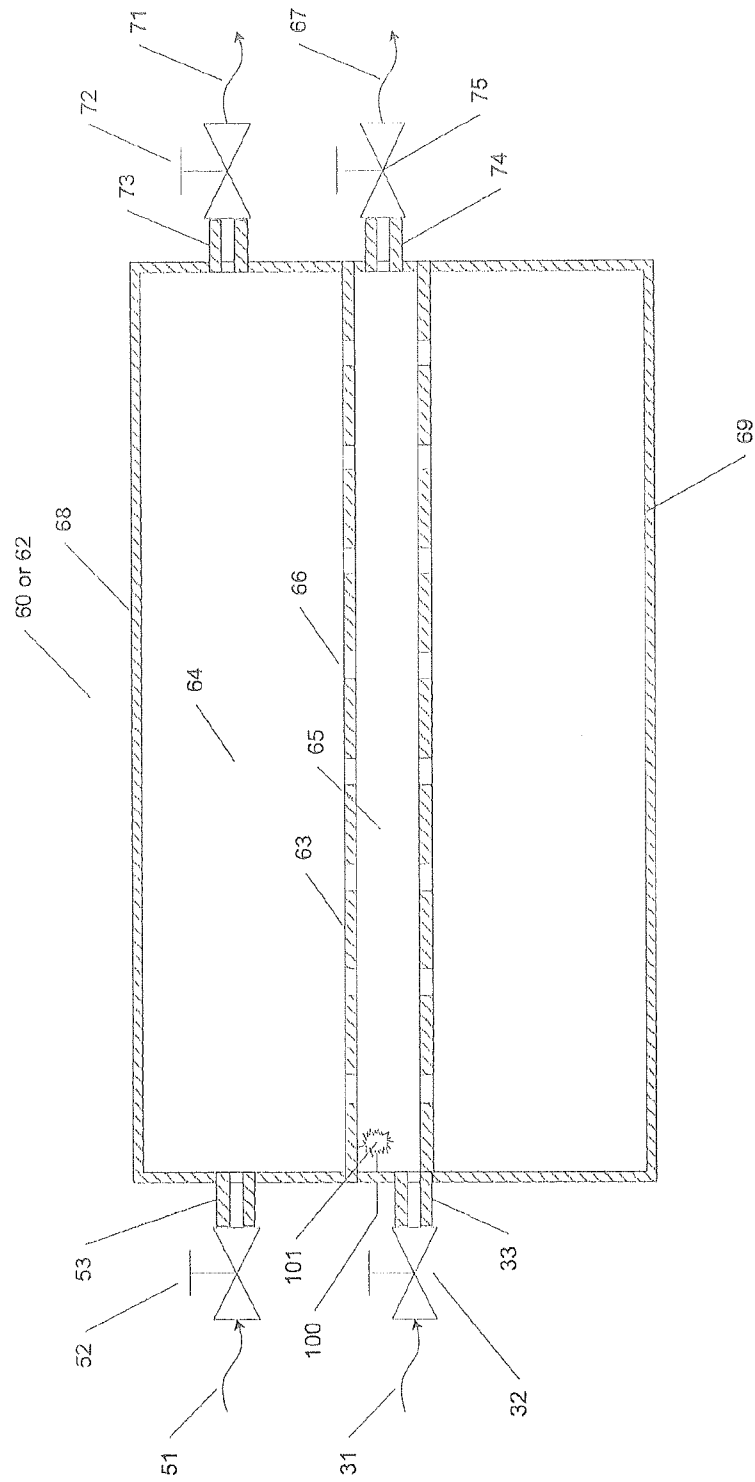


FIG. 12

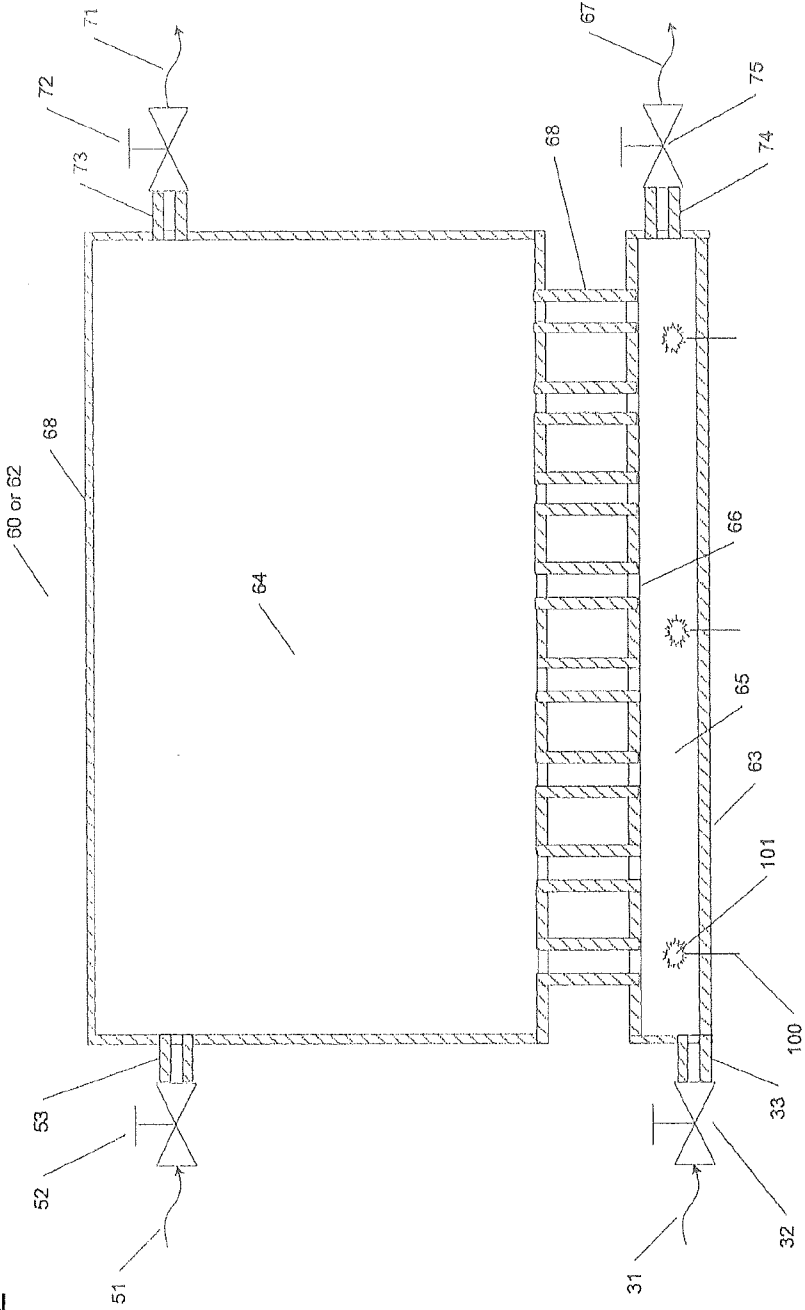


FIG. 13

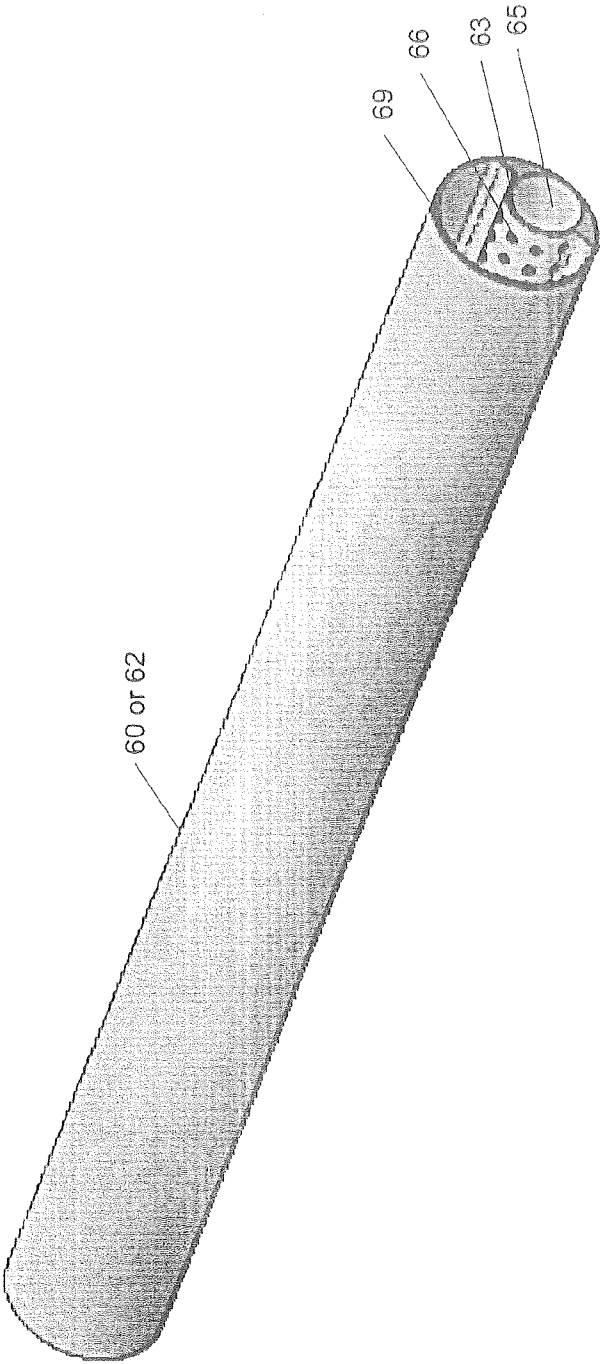


FIG. 14

