

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 July 2010 (29.07.2010)

(10) International Publication Number
WO 2010/085263 A1

(51) International Patent Classification:

A61F 13/00 (2006.01)

(21) International Application Number:

PCT/US2009/034838

(22) International Filing Date:

23 February 2009 (23.02.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/147,222 26 January 2009 (26.01.2009) US

(71) Applicant (for all designated States except US): **BSN MEDICAL, INC. [US/US]**; 5825 Carnegie Boulevard, Charlotte, NC 28209 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **EVANS, John, C.** [GB/GB]; 14 Haugh Fold, Nr Rochdale, Newhey, Lancashire OL16 3RF (GB).

(74) Agents: **THAD, Adams, W., III.** et al.; ADAMS INTELLECTUAL PROPERTY LAW, P.A., 201 South College Street, 2350 Charlotte Plaza, Charlotte, NC 28244 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WATER RESISTANT BANDAGE

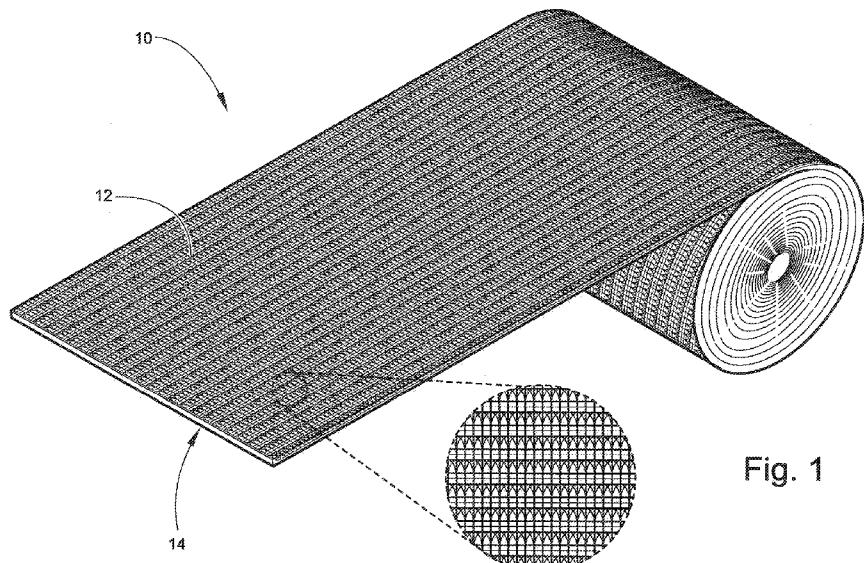


Fig. 1

(57) Abstract: A water resistant light compression and/or retention bandage for retaining an orthopaedic splint, padding or medical device against a body part, includes a knitted fabric formed of synthetic yarns having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours.

WATER RESISTANT BANDAGE

TECHNICAL FIELD AND BACKGROUND OF THE INVENTION

The present invention provides an elasticized water resistant bandage that may have light compression and/or retention characteristics for use in orthopaedic applications. More specifically, the bandage is used to hold a splint, wound dressing, padding or medical device in position against the limb or anatomy of the patient. The knitted retention bandage is water resistant so in combination with the splint, padding, or medical device that is regarded as water resistant, it can maintain the injury site in a dry and comfortable condition. The bandage may also provide a degree of compression to the surrounded body part, often a limb, that may improve circulation at and near the injury site.

The knitted elasticized retention bandage of the present invention is highly breathable with a moisture vapor transmission rate of greater than 1400g/m² per 24 hours. The present knitted construction of the elasticized light compression water resistant retention bandage involves a novel use of single monofilament yarns and knitting notation to render the bandage non-slip and therefore able to secure a splint, padding or medical device in position against movement in order to enable the splint, padding or other medical device to properly accomplish their desired medical effects.

Conventional bandages that are used to keep injury sites dry and clean rely on yarns and fibers that wick moisture away from the skin to the surface of the bandage. This construction is intended to enable the natural heat from the body and circulating air to dissipate the excess moisture. However, in practice, these conventional bandages can be overwhelmed by the amount of moisture wicked into their structure, particularly in ambient conditions of high humidity and/or low temperature where moisture transfer rates are compromised. Increasing the density of the structure to allow it to absorb more moisture further reduces the ability of the moisture to be transferred as vapor into the surrounding air. In general, the prior art has moved in a counterproductive direction in attempts to solve this problem.

In contrast, the bandage according to the embodiments described and claimed is formed from non-absorbent materials in a very lightweight, open fabric construction that allows excess water to drain from the bandage and be exposed to circulating air in and around the bandage to dry off the skin and allow moisture transfer into the surrounding air from the bandage. This has been found to be a much more effective way of keeping the injury and surrounding areas dry and allows the patient to bathe or shower without fear of getting the injury site wetted to the point that the moisture cannot be effectively dissipated.

This novel water resistant bandage has been tested to Standard BS7505 relating to "Elastic Properties of Extensible Bandages."

SUMMARY OF THE INVENTION

Accordingly, it is an object of the invention to provide a retention bandage suitable for use over orthopaedic bandages such as splints.

It is another object of the invention to provide a light compression bandage suitable for use over orthopaedic bandages such as splints.

It is another object of the invention to provide a bandage that has both light compression and retention characteristics suitable for use over orthopaedic bandages such as splints.

It is another object of the invention to provide a bandage that efficiently moves moisture away from the skin and orthopaedic bandage.

It is another object of the invention to provide a bandage suitable for use over orthopaedic bandages such as splints that has an open construction that is lightweight and breathable.

It is another object of the invention to provide a bandage suitable for use over orthopaedic bandages such as splints that is lightweight, breathable with sufficient elasticity to comprise a light compression bandage.

These and other objects and advantages of the invention are achieved by providing an elongate bandage for overwrapping and retaining an underlying

medical device in position on a body part, and comprising a knitted fabric formed of synthetic yarns having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours.

According to one preferred embodiment of the invention, the fabric includes elastic yarns and has an elongation in a lengthwise direction of at least 30% of its relaxed length.

According to another preferred embodiment of the invention, the inner face of the knitted fabric comprises a soft yarn for application against the medical device and the skin of a patient; and the outer face of the knitted fabric comprises a hydrophobic yarn for transmitting moisture away from the inner face of the bandage.

According to another preferred embodiment of the invention, the soft yarn of the inner face and the hydrophobic yarns of the outer face are both monofilament yarns.

According to another preferred embodiment of the invention, the fabric includes windows in the fabric that in a relaxed state is between 380 and 640/m², the number of courses in the weft direction in a relaxed state is between 5 and 12 per cm²; and the weight of the fabric in a relaxed state is 70 +/- 5 gsm².

According to another preferred embodiment of the invention, the yarns of the inner face are Nylon 1/33 dtex and the yarns of the outer face are 0.1 polypropylene.

According to another preferred embodiment of the invention, the bandage includes elastic threads of either, polyester, polyurethane, nylon or polyether that can be covered or uncovered in the preferred embodiment the elastic threads are an uncovered polyurethane.

According to another preferred embodiment of the invention, an elongate bandage is provided for overwrapping and retaining an underlying medical device in position on a body part, and comprises a knitted fabric formed of synthetic yarns having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours. The inner face of the knitted fabric comprises a soft monofilament synthetic yarn for application against the medical device and the skin of a patient; the outer face of the knitted fabric comprises a monofilament hydrophobic yarn for transmitting moisture away from the inner face of the bandage, and the number of windows in the fabric in a relaxed state is between 380 and 640/m², the number of courses in the weft direction in a relaxed state is between 5 and 12 per cm²; and the weight of the fabric in a relaxed state is 70 +/- 5 gsm².

According to another preferred embodiment of the invention, the bandage includes elastic yarns and has an elongation in a lengthwise direction of at least 30%.

According to another preferred embodiment of the invention, an elongate bandage is provided for overwrapping and retaining an underlying medical device in position on a body part, and comprises a warp-knitted fabric having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours. The fabric includes nylon yarns formed into loops on the inner face that protrude through the thickness of the fabric to the outer face to promote moisture transmission through the thickness of the fabric.

According to another preferred embodiment of the invention, the moisture vapor transmission rate is at least 1400 g/m² per 24 hours.

According to another preferred embodiment of the invention, the bandage includes a plurality of fine elastic threads, knitted or laid in with the wales to improve the stretch characteristics of the fabric structure to improve conformability to the anatomy of the patient.

According to another preferred embodiment of the invention, the elastic threads are knitted or laid into a chain stitch formed in the fabric, the elastic threads having a modulus of elasticity $\leq 90\text{Cn}$ at breaking elongation $\geq 470\%$.

According to another preferred embodiment of the invention, a water resistant light compression retention bandage is provided for retaining an orthopaedic splint, padding or medical device against a body part. The bandage comprises a fabric structure defining an inner face of relatively soft synthetic yarns suitable for contact with body part, and an outer face that comprises a plurality of wales constructed of hydrophobic monofilament yarns and a plurality of courses that are inserted in the knitted yarn that create windows that allow for breathability and conformability of the fabric to the body part and overlying splint, padding or medical device. A plurality of fine elastic threads are knitted or laid in with the wales to improve the stretch characteristics of the fabric structure and to aid and improve conformability to the anatomy of the patient.

BRIEF DESCRIPTION OF THE DRAWINGS

Some of the objects of the invention have been set forth above. Other objects and advantages of the invention will appear as the description of the invention proceeds when taken in conjunction with the following drawings, in which:

Figure 1 is a view of one embodiment of the novel light compression and retention bandage;

Figure 2 is a view of a cast bandage of a type over which an embodiment of the light compression and retention bandage shown in Figure 1 would be wrapped;

Figure 3 shows application of the light compression and retention bandage;

Figure 4 shows the splint with the light compression and retention bandage in place over the splint; and

Figure 5 is a photograph, enlarged in scale, of an embodiment of a light compression and retention bandage according to the preferred embodiment of the invention disclosed in this application.

DESCRIPTION OF THE PREFERRED EMBODIMENTS AND BEST MODE

Referring now specifically to the drawings, a retention bandage according to a preferred embodiment of the present invention is shown generally in Figure 1 at reference numeral 10.

The knitted structure of the bandage 10 preferably includes a combination of nylon and polypropylene monofilament yarns and, in addition, a small amount of elastic. The knit construction gives the fabric a thickness that is greater than the thickness of the yarns themselves and is thus considered three dimensional. This three dimensional characteristic is shown along the facing edge and cut end of the bandage 10 in Figure 1, and provides separation between the bandage's major

opposing outer and inner faces 12 and 14. The bandage 10 is typically rolled as shown in Figure 1 for ease in packaging and in manipulating the bandage 10 onto the injured limb.

The nylon is the softer of the two fibers and is knitted into the structure in a manner whereby the nylon is on the inner face 14 and therefore against the body part, with the polypropylene outer face 12 facing outwardly and not contacting the skin. The polypropylene is the more resilient of the fibers and has natural hydrophobic properties. The polypropylene therefore provides enhanced stability to the construction and acts as the drainage medium for moisture.

Elastic yarns are preferably incorporated into the fabric structure of the bandage 10 to provide additional elasticity. One suitable elastic yarn is Dorlastan, a filament fiber of segmented polyester- or polyether/polyurethane. A relatively small amount of this fiber is sufficient to obtain elasticity, elastic recovery and dimensional stability.

The knitted construction of the bandage 10 uses monofilament yarns that are very fine, generally having a maximum diameter of 0.1mm. This allows for a very open knitted structure and extremely low weight which promotes rapid moisture transmission through the thickness of the fabric from the nylon inner face 14 to the polypropylene outer face 12, and into ambient air.

One exemplary embodiment of the bandage 10 is set out below:

EXAMPLE 1

18 GAUGE SINGLE BAR WARP KNITTING MACHINE

EQUIPPED WITH 4 BARS

Threading and Run-In

Bar 1 and 2 fully threaded, PP 0.1 Plasticel Polypropylene,

Run-Ins 1650mm/Rack.

Bar 3 Fully Threaded, Nylon 1/33 dtex, Run-Ins 2550mm/rack.

Bar 4 Half Threaded with ends in first and last needle,

Elastic Dorlastan 1/80 dtex, Run-Ins 550mm/rack. Beaming Tension 50%.

Bandage Details

73 needles for 3" bandage.

97 needles for 4" bandage.

49 needles for 2" bandage.

Fabric Specifications

700 courses per meter "cpm" on machine.

900-950 cpm out of roll.

70 +/- 5 gsm² relaxed fabric weight.

Thickness in relaxed state. 1.26mm

Thickness in stretched
(140% of relaxed) state. 0.85mm

Notation of Structure

1-0/0-1 Full Sett Polypropylene Mono.

0-0/4-4 Full Sett Nylon.

1-1/0-0 Half Sett Elastic.

The above-referenced bandage has been tested to Standard BS7505, "Elastic Properties of Extensible Bandages". The test is conducted on a Instron Tensile testing machine and is used to characterize a bandage by measuring its elastic properties using information obtained from the second retraction curve. The test indicates that the bandage 10 of Example 1 meets a Type 2 characterization for application of light compression.

Figure 2 shows a forearm splint 20 of the general type over which the bandage 10 is placed. The splint 20 may be of any type or construction, including plaster/gauze or synthetic cast tape.

As is shown in Figure 3, the bandage 10 is wrapped around the limb and overlying splint 20 with sufficient tension to maintain the splint 20 in its required location and shape. As is shown in Figure 4, when application is completed the bandage 10 overlaps the splint 20 and contacts the skin on opposite ends of the splint 20. The bandage 10 is applied with nylon inner face 14 against the skin in the manner shown. The nylon yarns create a "channel" effect that allows moisture underneath the bandage 10 to migrate through the bandage 10 to the polypropylene yarns of the outer face 12. To facilitate the movement of moisture, nylon loops of the inner face 14 protrude through the thickness of the fabric to the polypropylene outer face 12.

Suitable embodiments of the bandage include a fabric structure defining an inner face, and an outer face that comprise a plurality of wales (warp yarns) that are constructed of hydrophobic single monofilament threads, and a plurality of courses (weft yarns) that are inserted in the wales yarn that creates holes or windows that allow for breathability and conformability of the structure. The bandage may also include a plurality of fine elastic threads, knitted or laid in with the wales to improve

the stretch characteristics of the fabric structure to improve conformability to the anatomy of the patient.

The moisture vapor transmission rate of the fabric of one embodiment of the bandage 10 is not less than 500g/m² per 24 hours. The moisture vapor transmission rate of the fabric of other embodiments of the bandage 10 may be as much as not less than 1400g/m² per 24 hours. The bandage 10 may be provided with a release and lock closure system, such as hook and loop fasteners, to secure the bandage to the patient. Patches of conventional hook material are secured at or near both ends of the bandage 10 to assist in self-application. Other fasteners, such as adhesive tapes with release liners and landing areas may be used.

The knitted stretchable fabric of the bandage 10 may also include polypropylene monofilament yarns knitted into the chain stitch, and nylon monofilament yarns in both the chain stitch and inlay stitch, with the elastic yarn laid or knitted in the warp or chain stitch direction.

The number of holes or windows in the knitted structure of the bandage 10 in a relaxed state is between 380 and 640/m², and the number of threads or courses in the weft direction is between 5 and 12 per cm² in a relaxed state. A typical length of the bandage 10 is between 4.4m and 5.1m.

The weight per unit area of the bandage 10 is preferably between 30 and 90 grams per m² and the stretch of the bandage 10 in the lengthways direction is between 30% AND 75%. The widthways stretch of the bandage 10 in a relaxed state is preferably between 25% and 45%.

The monofilament yarns may be between 0.03 and 0.14mm in diameter, with a tenacity between 45 and 60 centinewtons/Tex, and the elastic fiber may be between 40 and 80 d/tex. The thickness range of preferred embodiments of a bandage according to the application is 1.1mm to 2.6mm in its relaxed state and 0.6mm to 1.5mm in a 40% stretched state.

Preferably, the elastic thread is knitted or laid into the chain stitch and has a modulus of elasticity $\leq 90\text{Cn}$ at breaking elongation $\geq 470\%$. Alternatively, the elastic threads may be synthetic rubber or natural rubber.

A photograph of fabric of the bandage 10, enlarged to show detail, is shown in Figure 5.

An improved medical bandage is described above. Various details of the invention may be changed without departing from the scope of the invention. Furthermore, the foregoing description of the preferred embodiment of the invention and best mode for practicing the invention are provided for the purpose of

illustration only and not for the purpose of limitation, the invention being defined by the claims.

I Claim:

1. An elongate bandage for overwrapping and retaining an underlying medical device in position on a body part, and comprising a knitted fabric formed of synthetic yarns, and having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours.
2. An elongate bandage according to claim 1, wherein the fabric includes elastic yarns and has an elongation in a lengthwise direction of at least 30% of its relaxed length.
3. An elongate bandage according to claim 1, wherein the inner face of the knitted fabric comprises a soft yarn for application against the medical device and the skin of a patient; and the outer face of the knitted fabric comprises a hydrophobic yarn for transmitting moisture away from the inner face of the bandage.

4. An elongate bandage according to claim 1, wherein the soft yarn of the inner face and the hydrophobic yarns of the outer face are both monofilament yarns.
5. An elongate bandage according to claim 1, wherein the number of windows in the fabric in a relaxed state is between 380 and 640/m², the number of courses in the weft direction in a relaxed state is between 5 and 12 per cm²; and the weight of the fabric in a relaxed state is 70 +/- 5 gsm².
6. An elongate bandage according to claim 1, wherein the yarns of the inner face are Nylon 1/33 dtex and the yarns of the outer face are 0.1 polypropylene.
7. An elongate bandage according to claim 6, and including elastic yarns comprising a segmented polyester- or polyether/polyurethane.

8. An elongate bandage for overwrapping and retaining an underlying medical device in position on a body part, and comprising a knitted fabric formed of synthetic yarns, and having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours, wherein the inner face of the knitted fabric comprises a soft monofilament synthetic yarn for application against the medical device and the skin of a patient; the outer face of the knitted fabric comprises a monofilament hydrophobic yarn for transmitting moisture away from the inner face of the bandage, and the fabric is provided with a multiplicity of windows in the fabric that, in a relaxed state is between 380 and 640/m², the number of courses in the weft direction in a relaxed state is between 5 and 12 per cm²; and the weight of the fabric in a relaxed state is 70 +/- 5 gsm².
9. An elongate bandage according to claim 8, wherein the bandage includes elastic yarns and has an elongation in a lengthwise direction of at least 30% and a thickness in its relaxed state of between 1.1mm and 2.6mm.

10. An elongate bandage according to claim 8, wherein the yarns of the inner face are nylon 1/33 dtex and the yarns of the outer face are 0.1 polypropylene.
11. An elongate bandage according to claim 6, and including elastic yarns comprising a segmented polyester- or polyether/polyurethane.
12. An elongate bandage for overwrapping and retaining an underlying medical device in position on a body part, and comprising a warp-knitted fabric having a moisture vapor transmission rate from an inner face of the bandage to an outer face of the bandage of at least 500g/m² per 24 hours; and wherein the fabric includes nylon yarns formed into loops on the inner face that protrude through the thickness of the fabric to the outer face to promote moisture transmission through the thickness of the fabric.

13. An elongate bandage according to claim 12, wherein the moisture vapor transmission rate is at least 1400 g/m² per 24 hours.

14. An elongate bandage according to claim 8, and including a plurality of fine elastic threads, knitted or laid in with the wales to improve the stretch characteristics of the fabric structure to improve conformability to the anatomy of the patient.

15. An elongate bandage according to claim 14, wherein the elastic threads are knitted or laid into a chain stitch formed in the fabric, the elastic threads having a modulus of elasticity $\leq 90\text{Cn}$ at breaking elongation $\geq 470\%$.

16. A water resistant light compression retention bandage for retaining an orthopaedic splint, padding or medical device against a body part, comprising:

- a) a fabric structure defining an inner face of relatively soft synthetic yarns suitable for contact with the body part, and an outer face that comprises a plurality of wales constructed of hydrophobic monofilament yarns;
- b) a plurality of courses that are inserted in the knitted yarn that create windows that allow for breathability and conformability of the fabric to the body part and overlying splint, padding or medical device; and
- c) a plurality of fine elastic threads, knitted or laid in with the wales to improve the stretch characteristics of the fabric structure and to aid and improve conformability to the anatomy of the patient.

1/5

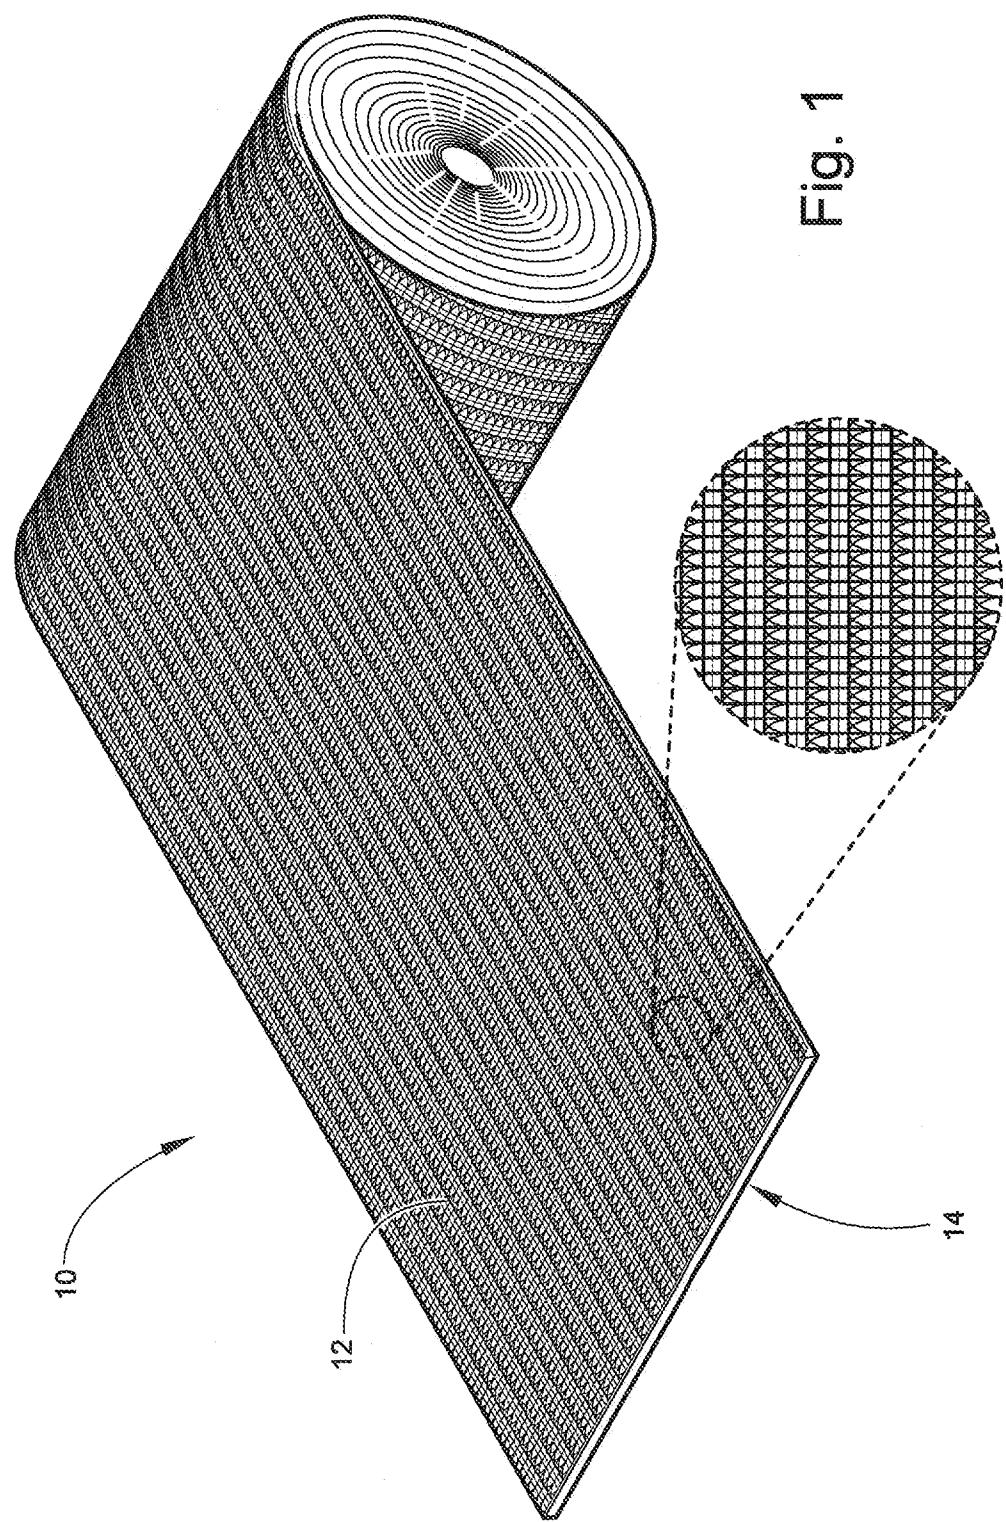


Fig. 1

2/5

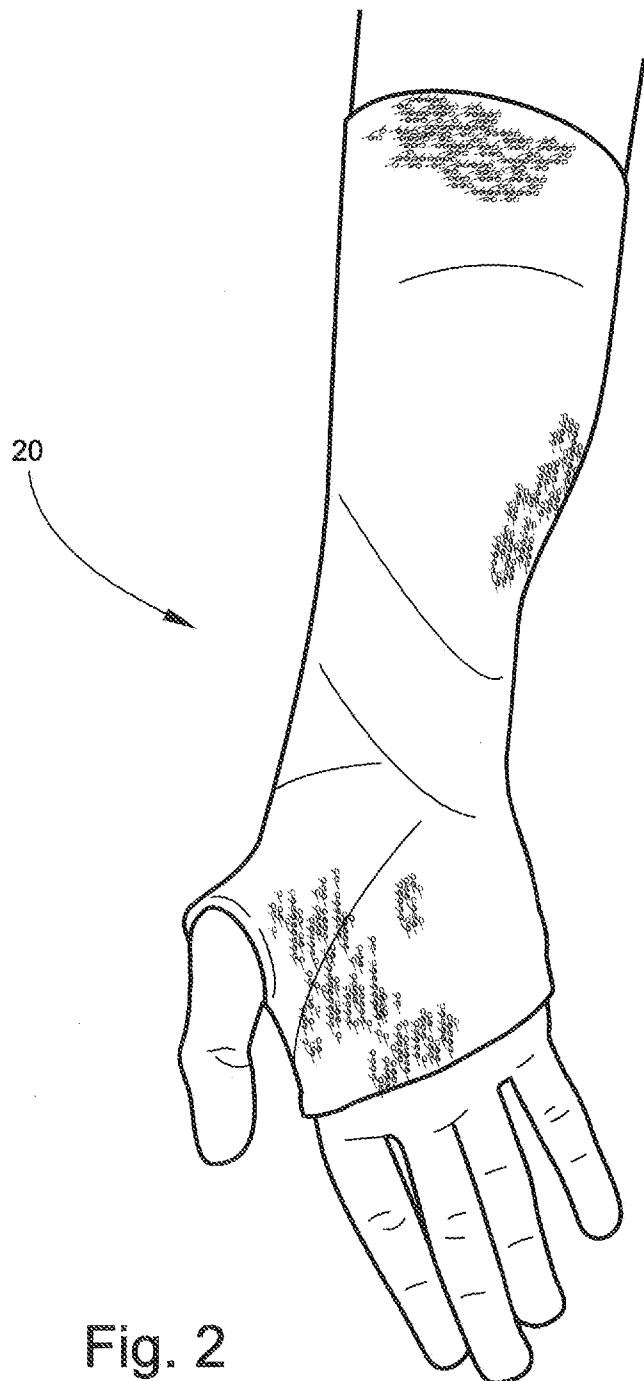


Fig. 2

3/5

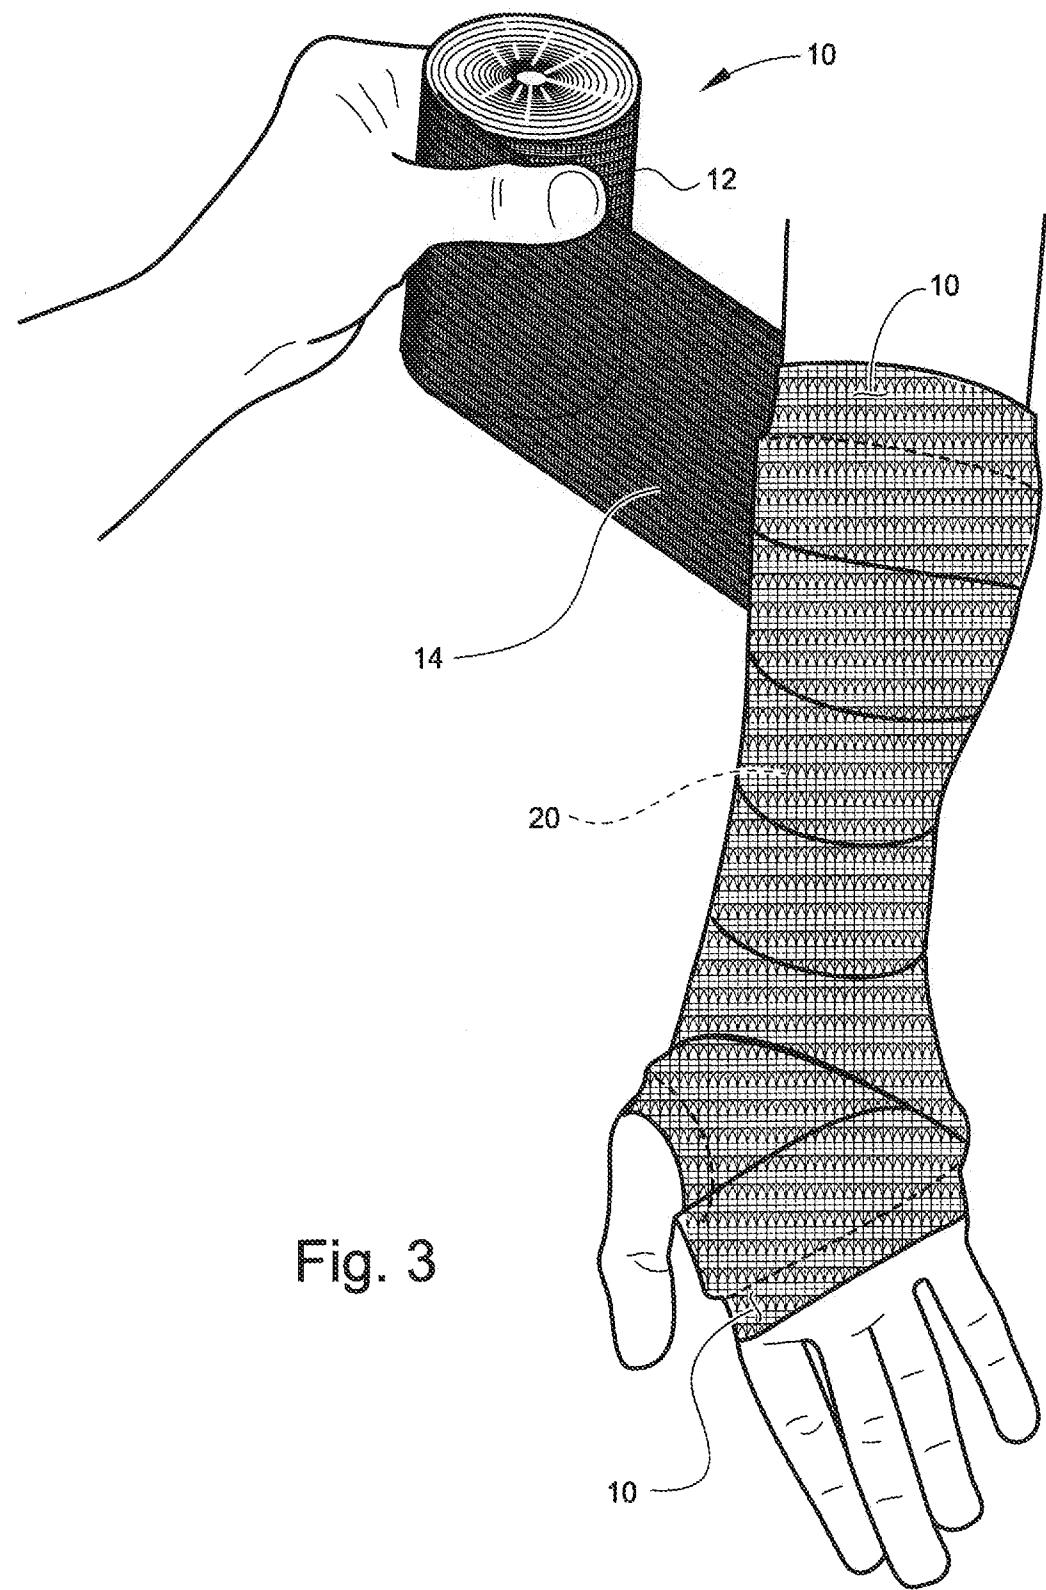


Fig. 3

4/5

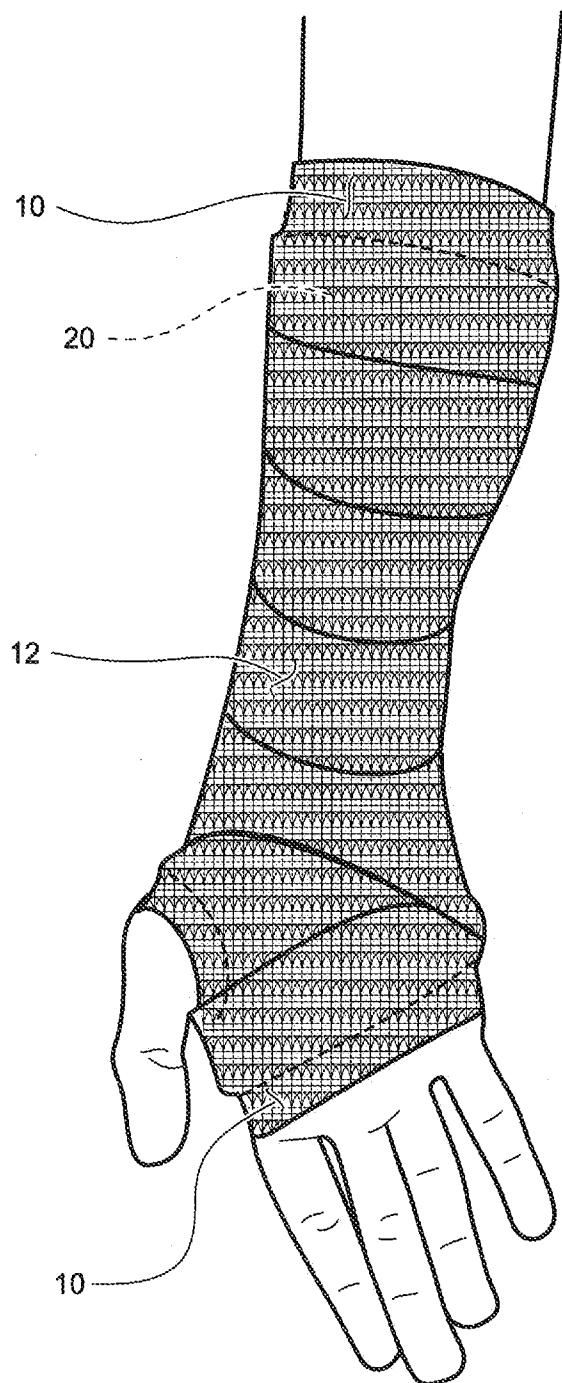


Fig. 4

5/5

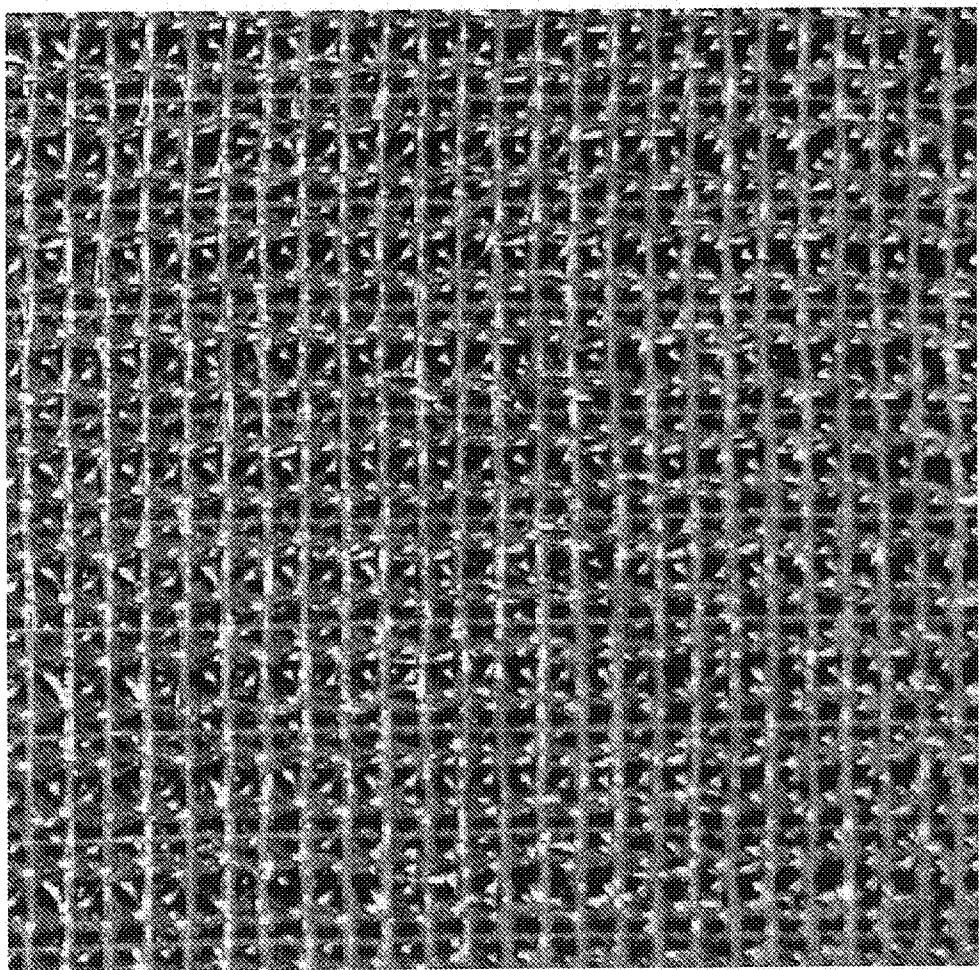


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No. PCT/US2009/034838
--

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61F 13/00 (2009.01)

USPC - 602/76

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A61F 13/00 (2009.01)

USPC - 602/42-44, 60-62, 75, 76, 79

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/0287852 A1 (EVANS) 20 November 2008 (20.11.2008) entire document	1-13
---		-----
Y	US 4,665,909 A (TRAINOR) 19 May 1987 (19.05.1987) entire document	14-16
A	US 4,977,892 A (EWALL) 18 December 1990 (18.12.1990) entire document	1-16
A	US 2003/0040691 A1 (GRIESBACH III et al) 27 February 2003 (27.02.2003) entire document	1-16
A	US 6,158,255 A (TERNON) 12 December 2000 (12.12.2000) entire document	1-16

 Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 March 2009

Date of mailing of the international search report

03 APR 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450
Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774