




(86) Date de dépôt PCT/PCT Filing Date: 2003/12/24
(87) Date publication PCT/PCT Publication Date: 2004/07/15
(45) Date de délivrance/Issue Date: 2011/09/06
(85) Entrée phase nationale/National Entry: 2005/06/27
(86) N° demande PCT/PCT Application No.: SG 2003/000291
(87) N° publication PCT/PCT Publication No.: 2004/058475
(30) Priorité/Priority: 2002/12/27 (US60/436,466)

(51) Cl.Int./Int.Cl. *B29C 43/02* (2006.01),
B29C 43/10 (2006.01), *B29C 70/42* (2006.01),
B29C 70/44 (2006.01), *B29C 70/54* (2006.01),
B29C 70/56 (2006.01)

(72) Inventeurs/Inventors:
GOPAL, RENUGA, SG;
FUJIHARA, KAZUTOSHI, SG;
RAMAKRISHNA, SEERAM, SG;
CHEW, CHONG-LIN, SG;
GANESH, VIJAY KUMAR, SG;
LOH, POEY LING, SG;
FOONG, WENG CHIONG KELVIN, SG

(73) Propriétaire/Owner:

(54) Titre : COMPOSITE RENFORCE PAR FIBRES ET PROCEDES DE FABRICATION CORRESPONDANTS
(54) Title: FIBER REINFORCED COMPOSITE AND METHODS OF FORMING THE SAME

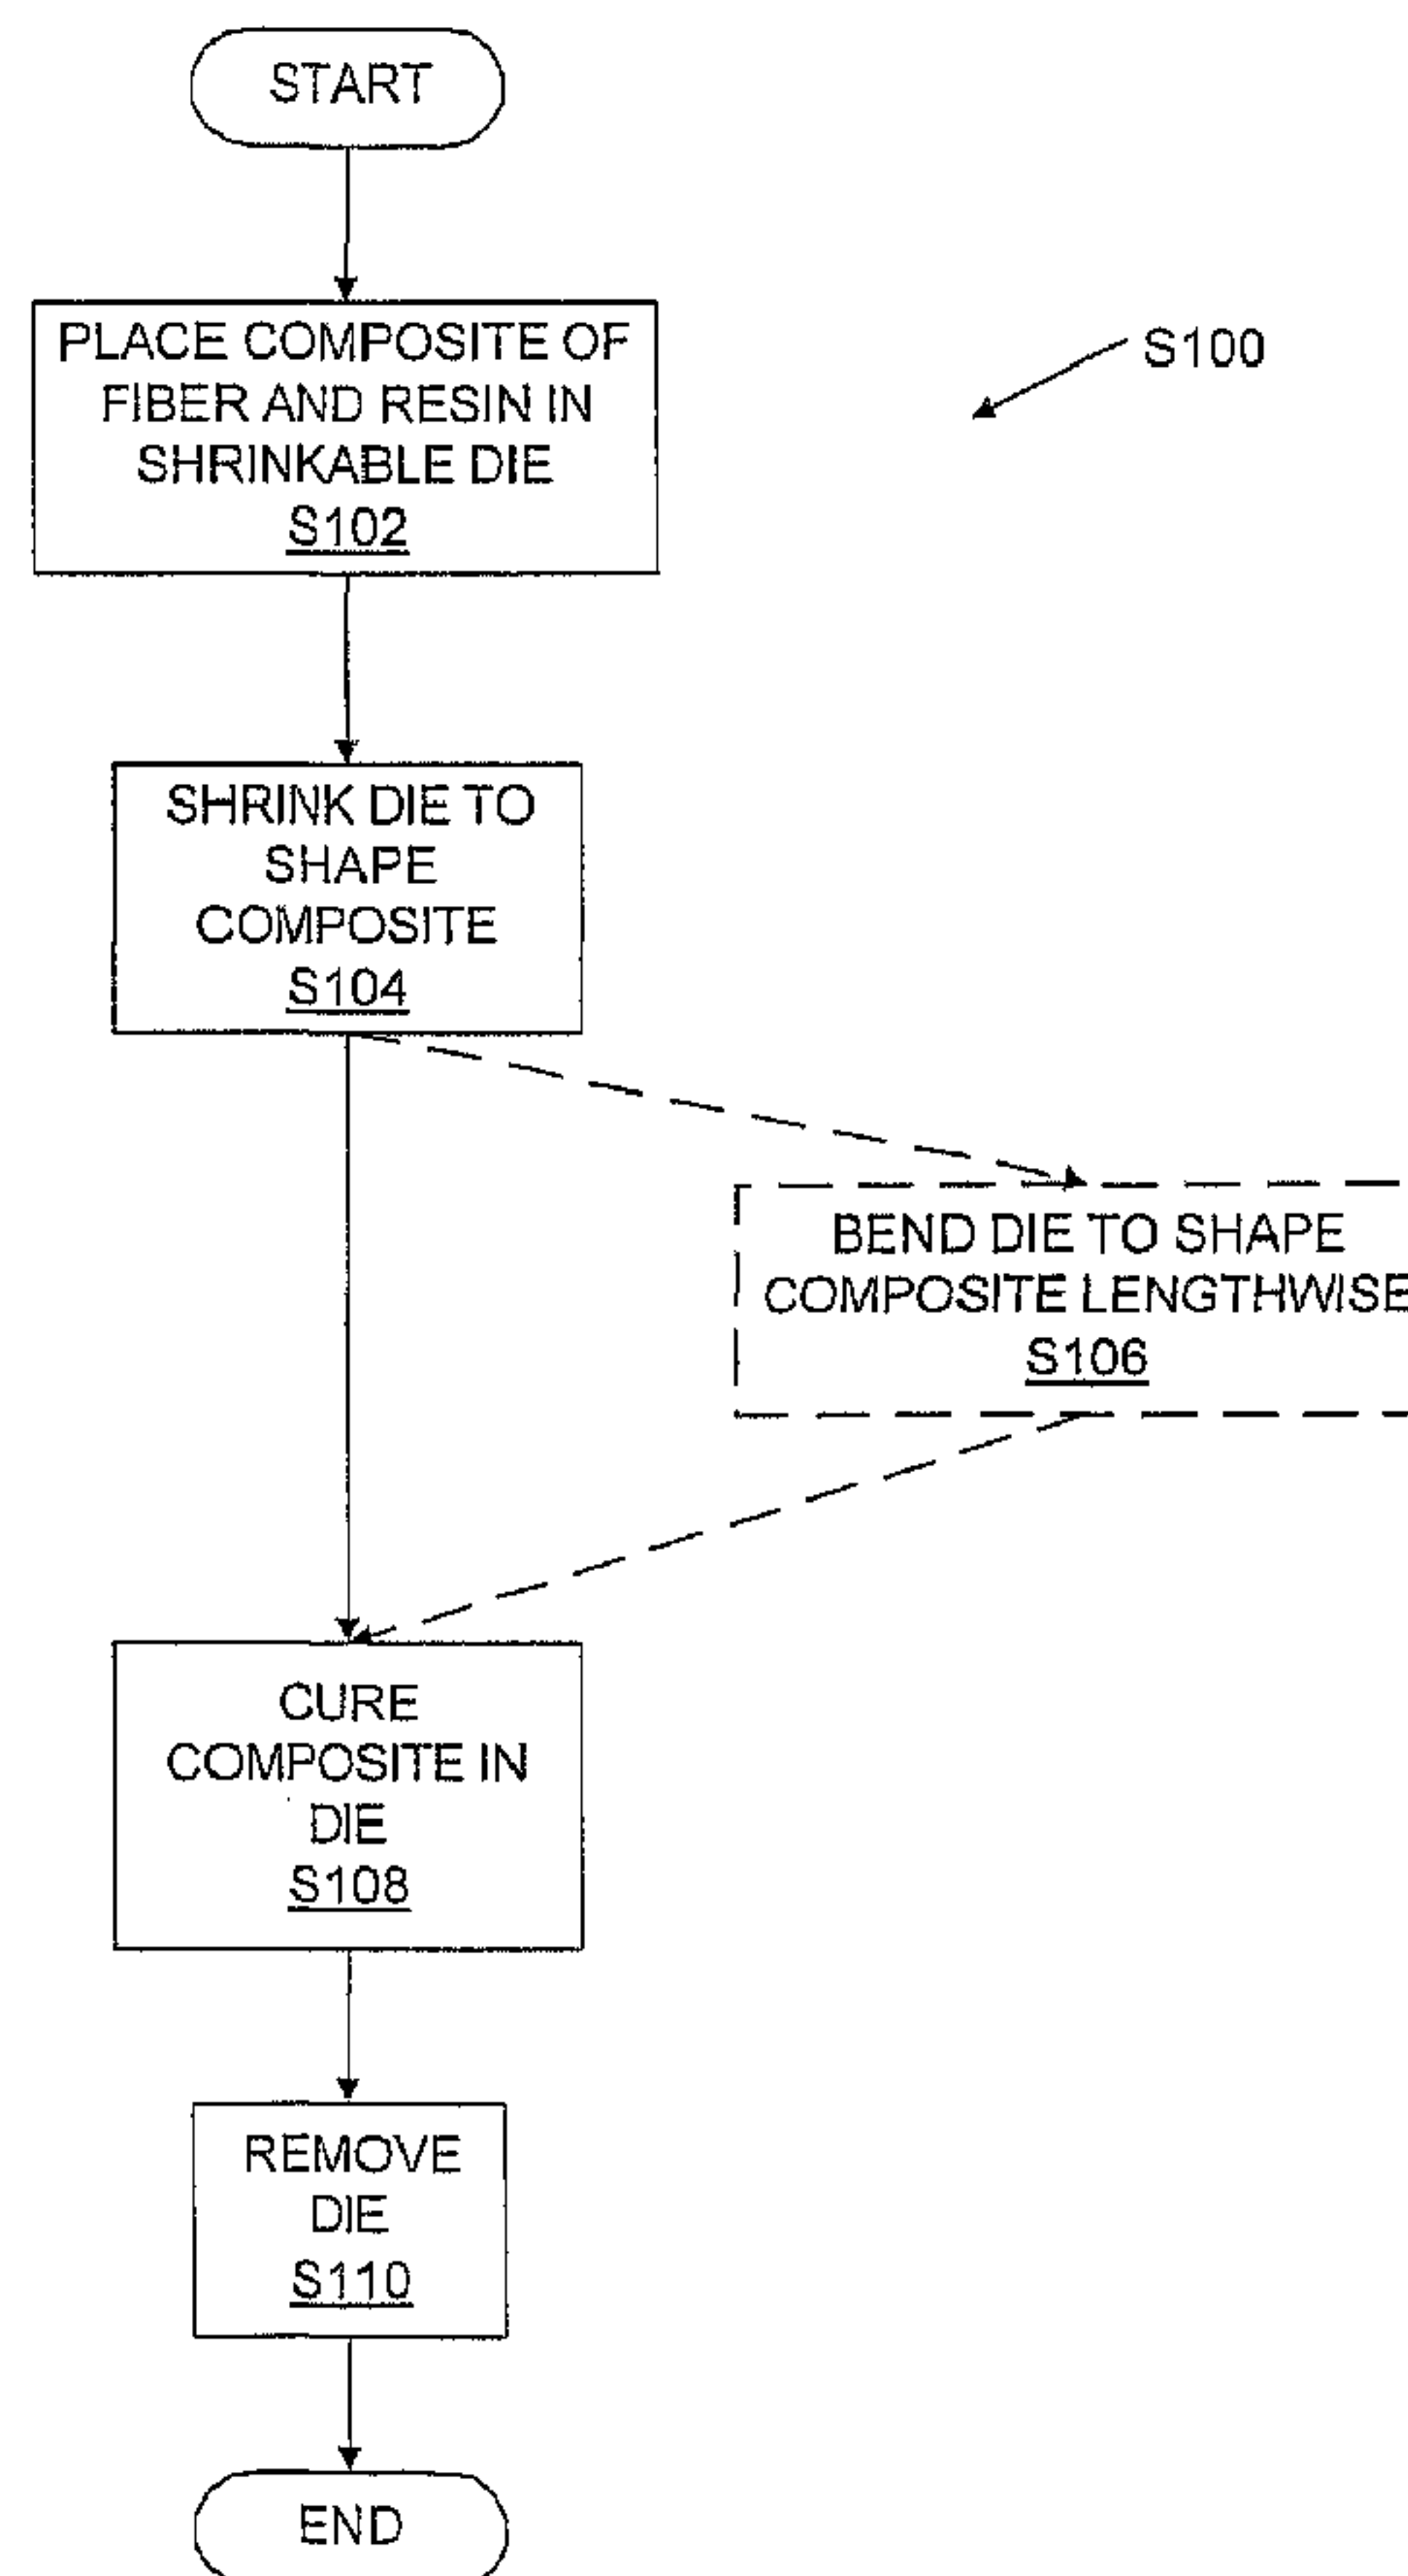

(57) Abrégé/Abstract:

A fiber reinforced composite is formed using a shrinkable die. A composite of fiber and resin is placed in the die and is compressed by shrinking the die to form a desired transverse cross-section. Optionally, the die is bent along its lengthwise extent to shape the composite in the die. After shrinking and optional shaping, the composite is cured to form the fiber reinforced composite.



(73) Propriétaires(suite)/Owners(continued):NATIONAL UNIVERSITY OF SINGAPORE, SG

(74) Agent: ROBIC

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/058475 A1

(51) International Patent Classification⁷: **B29C 43/02**,
43/10, 70/42, 70/44

(21) International Application Number:
PCT/SG2003/000291

(22) International Filing Date:
24 December 2003 (24.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/436,466 27 December 2002 (27.12.2002) US

(71) Applicant (for all designated States except US): **NATIONAL UNIVERSITY OF SINGAPORE** [SG/SG];
10 Kent Ridge Crescent, Singapore 119260 (SG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOPAL, Renuga**


[SG/SG]; Blk 154, Yishun Street 11 #09-88, Singapore 760154 (SG). **FUJIHARA, Kazutoshi** [JP/SG]; Blk 62, South Buona vista RD#02-08, Vista park, Singapore 118173 (SG). **RAMAKRISHNA, Seeram** [SG/SG]; 49 Jurong East ave, 1 #01-02, Singapore 609781 (SG). **CHEW, Chong-Lin** [SG/SG]; 65 sunset way, #03-13, Freesia woods, Singapore 597090 (SG). **GANESH, Vijay Kumar** [IN/SG]; Blk 210, Jurong East Street 21, #02-39, 1, Singapore 600210 (SG). **LOH, Poey Ling** [SG/SG]; 115 Sunset way, #02-03, Singapore 597149 (SG). **FOONG, Weng Chiong Kelvin** [SG/SG]; 25 holland hill, #02-05, Singapore 278740 (SG).

(74) Agent: **DREW & NAPIER LLC**; 20 Raffles Place, #17-00, Ocean Towers, Singapore 048620 (SG).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

[Continued on next page]

(54) Title: FIBER REINFORCED COMPOSITE AND METHODS OF FORMING THE SAME

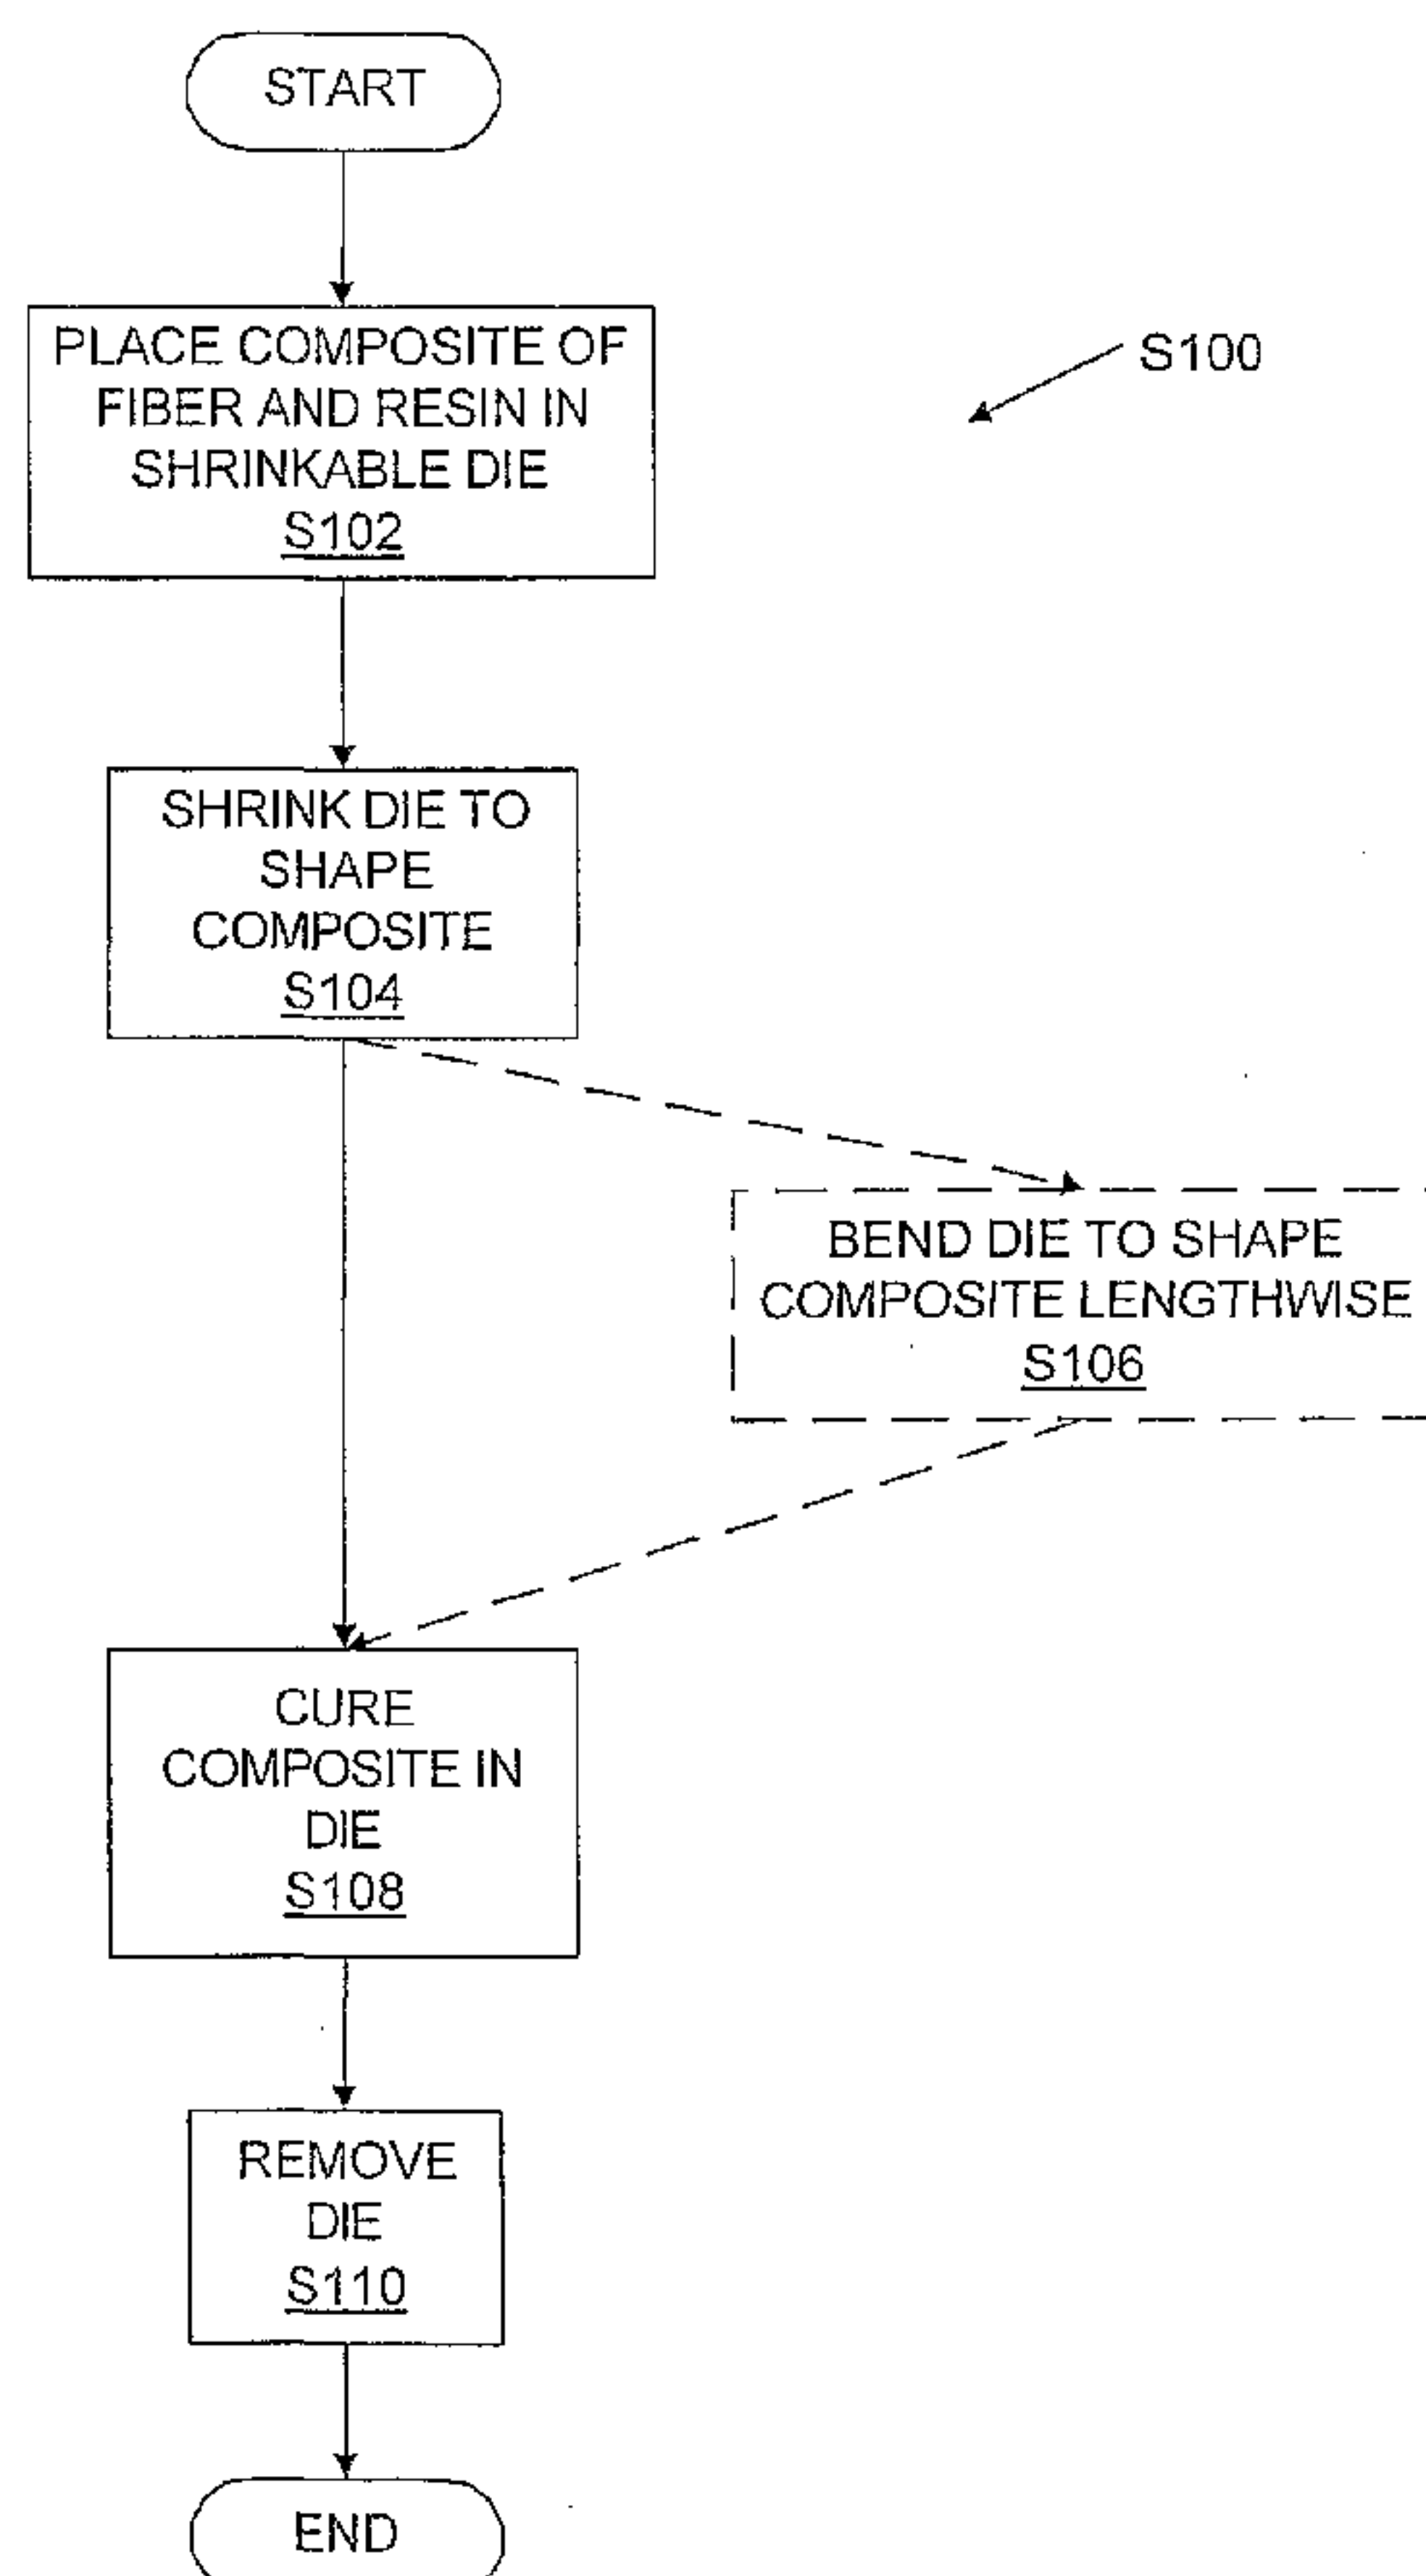

(57) Abstract: A fiber reinforced composite is formed using a shrinkable die. A composite of fiber and resin is placed in the die and is compressed by shrinking the die to form a desired transverse cross-section. Optionally, the die is bent along its lengthwise extent to shape the composite in the die. After shrinking and optional shaping, the composite is cured to form the fiber reinforced composite.

WO 2004/058475 A1

WO 2004/058475 A1

KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

[0001] FIBER REINFORCED COMPOSITE AND METHODS
OF FORMING THE SAME

FIELD OF THE INVENTION

[0002] The present invention relates to fiber reinforced composites and methods of forming such composites.

10 BACKGROUND OF THE INVENTION

[0003] Fiber reinforced composites (FRC) are useful, for example, as substitutes for metal materials. A fiber reinforced plastic wire can have strength comparable to a steel wire but only a fraction of the weight thereof. Fiber reinforced plastic wires can also be made more aesthetically pleasing to the eyes than steel wires do. They are therefore good replacements of metal wires used, for instance, in orthodontic treatments.

20 **[0004]** FRC wires can be produced by pultrusion. In a typical pultrusion process, a continuous reinforcement is first impregnated with curable resin and then pulled through a rigid die having a tunnel with a desired cross-section. The resulting long wire has a fiber inner core and a composite cover layer. The composite is cured in the die so that the wire can retain its cross-sectional shape. When cured, a soft material is hardened as chemical bonds are formed between atoms and/or molecules, which may occur for example under radiation. For example, monomers may be cured to produce polymers. After curing in the die,

the resulting wire will retain a cross-section similar in size and shape to that of the die tunnel.

[0005] If desirable, the wire is subject to further processing such as longitudinal shaping and further curing. Post-pultrusion processing is commonly referred to as "beta-staging." Under known approaches, to shape a wire longitudinally, the composite is only partially cured in the die, separated from the die, longitudinally shaped, and then fully cured.

[0006] An example FRC pultrusion process is described in U.S. Patent No. 5,869,178, issued on 9 February 1999 to Kusy *et al.* ("Kusy").

10 **[0007]** However, the known approaches to producing pultruded FRC have certain drawbacks. For example, under these known approaches, fiber distribution in the resulting composite wire is often uneven when the fiber content is in a certain percentage range. The manufacturing process can be complicated as two curing steps are required if the composite wire is to be shaped longitudinally. It is also difficult to produce very thin wires as it is difficult to insert resins into a very small opening of the die. Further, pulling a fiber through a very thin tunnel may induce high stress in the fiber. A highly stressed fiber is easy to break, either during or after the pultrusion process.

20 **[0008]** Thus, there is a need for improved fiber reinforced composites and improved methods of forming fiber reinforced composites.

SUMMARY OF THE INVENTION

[0009] There is provided a process for forming a fiber reinforced composite in which a shrinkable die is used, so that a composite of fiber and resin placed in the die can be compressed by shrinking the die to form a desired transverse cross-section.

[0010] In accordance with an aspect of the present invention, there is provided a method of forming an orthodontic wire. The method includes

placing a composite of straight fiber and resin in an elongate tunnel of a shrinkable die formed of a heat-sensitive material that shrinks in response to heat, the tunnel having a pre-defined transversal cross-sectional shape and having an open end for allowing removal of excess resin;

shrinking the die by heating the die to reduce the transversal cross-section of the tunnel along a longitudinal extent of the tunnel so as to compress the composite of fiber and resin to assume the pre-defined transversal cross-sectional shape; and

10 curing the composite of fiber and resin to form the orthodontic wire and separating the die from the orthodontic wire;

wherein the tunnel assumes the pre-defined cross-sectional shape and size after said die is completely shrunk and shrinks uniformly in cross-sectional area as the die is shrunk.

In accordance with another aspect of the invention, there is provided a method of forming a fiber reinforced composite orthodontic wire, comprising:

20 placing a plurality of elongate fiber strands and resin in a tunnel of a shrinkable die formed of a heat-sensitive material that shrinks in response to heat, said tunnel extending longitudinally along an axis and having a pre-defined transversal cross-sectional shape and size and having an open end for allowing removal of excess resin;

pulling opposite ends of said fiber strands to extend said fiber strands along said tunnel, generally parallel to said axis;

shrinking said die by heating said die to compress said fiber strands and said resin in said tunnel about said axis, to distribute said fiber substantially evenly within said tunnel, said fiber strands and said resin being compressed to assume said pre-defined transversal cross-sectional shape and size; and

curing said fiber and said resin, to form said fiber reinforced composite orthodontic wire,

separating said die from said fiber reinforced composite orthodontic wire, wherein the tunnel assumes said pre-defined cross-sectional shape and size after said die is completely shrunk and shrinks uniformly in cross-sectional area as said die is shrunk.

There is also provided a fiber reinforced composite formed in accordance with the method as defined above.

There is also provided a fiber reinforced composite wire for use in orthodontic treatment that is formed in accordance with the method as defined above.

[0011] There is also provided a process for forming a fiber reinforced composite in which a flexible die is used so that the die can be bent to shape the composite.

[0012] The method is particularly well suited to form wire for use in orthodontic treatment.

[0013] Other aspects, features and advantages of the invention will become apparent to those of ordinary skill in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS


[0014] In the figures, which illustrate exemplary embodiments of the invention,

[0015] **FIG. 1** is a flowchart illustrating a process of forming a fiber reinforced composite;

[0016] **FIGS. 2 to 4** schematically illustrate a process incorporating the processes of **FIG. 1**;

[0017] FIG. 5 is a cross-sectional view of a fiber reinforced plastic wire produced by the process illustrated in FIGS. 2 to 4; and

[0018] FIG. 6 is a graph comparing the properties of a composite wire with a metal wire.

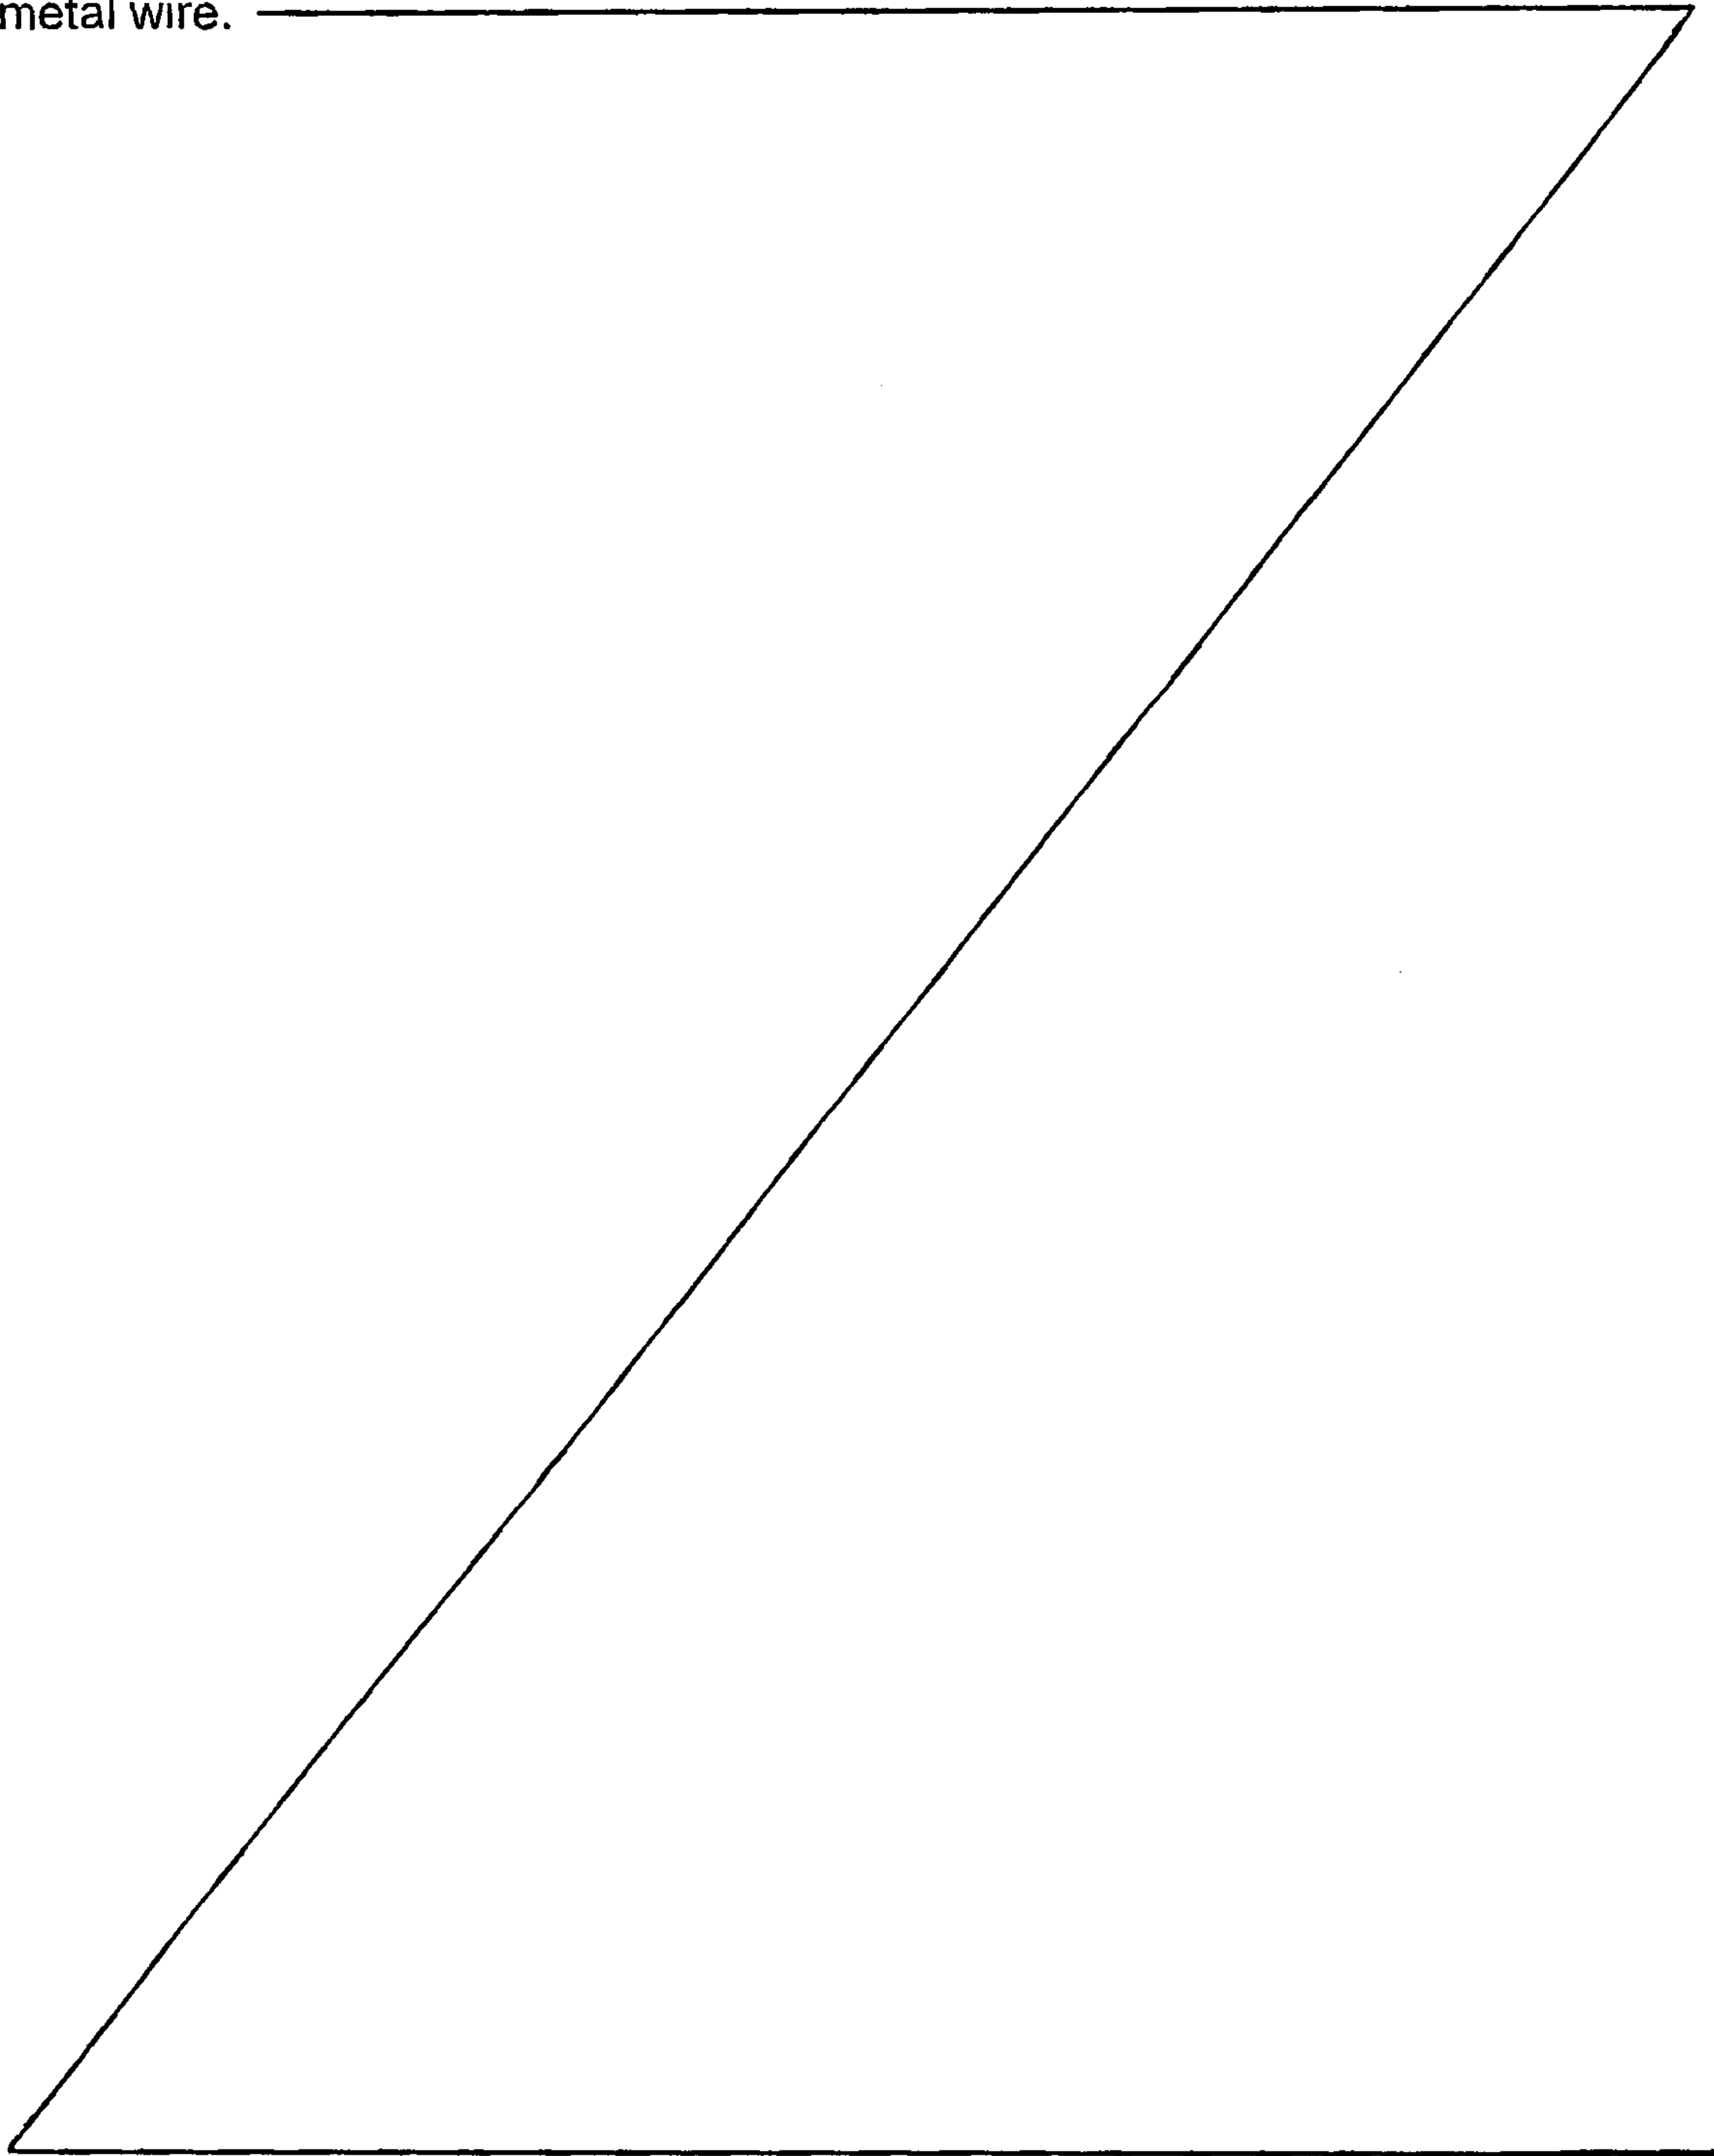

DETAILED DESCRIPTION

[0019] A flow diagram of an exemplary process **S100** for forming a fiber reinforced composite is illustrated in **FIG. 1**. In process **S100**, a composite of fiber and resin is placed in an elongate tunnel of a shrinkable die (**S102**); the die is shrunk to reduce the transversal cross-section of the tunnel of the die along a longitudinal extent of the tunnel so as to compress the composite in the tunnel (**S104**); and the composite is then cured (**S108**). The composite may be fully or partially cured in the die so that it may retain its shape after it is separated from the die. The die may be shrunk sufficiently to compress the composite into a pre-determined transversal cross-sectional shape.

[0020] Optionally, the die may be bent lengthwise so as to shape the composite in the die (**S106**), prior to curing (**S108**). Optionally, the die could be bent lengthwise before shrinking (**S104**). Since both shrinking and bending can be performed before curing the composite, only one curing step is required.

[0021] After curing, the die is peeled from the composite in step **S110**.

[0022] As can be appreciated by a person skilled in the art, in process **S100**, the tunnel of the die does not have to have a small transversal cross-section initially, even when the desired cross-section of the composite wire is small. The composite of fiber and resin can therefore be placed in the die with an initially large tunnel cross-section. This larger diameter minimizes stresses experienced by the fiber bundle as it is inserted into the die. Since the composite is compressed into the desired cross-sectional shape under mainly radial pressures, the stress in the resulting product is small. Further, since the tunnel of the shrunk die can have a size substantially smaller than its pre-shrunk size, it is easier to insert resins into the die initially even if the transversal cross-section of the final product is small.

[0023] **FIGS. 2 to 4** schematically illustrate an exemplary physical embodiment of process **S100** for producing a fiber reinforced composite wire having a desired size and shape.

[0024] As illustrated in FIG. 2 a section of composite fiber 12 impregnated with uncured resins is placed into an elongate tunnel (not shown) of a shrinkable and flexible die 14 (S102). Impregnated fiber 12 includes a bundle of fiber strands (yarns) and resins impregnated thereon. The fibers may be impregnated with the resins in suitable manners known to persons skilled in the art, such as those used in conventional pultrusion processes.

[0025] For unidirectional composites, each of the fiber strands has a length longer than the length of the tunnel of die 14. The bundle of fiber strands may be impregnated before or after it is placed into the tunnel of die 14. For other composites, fibers may be shorter than the tunnel of die 14.

[0026] Impregnated fiber 12 can include one strand or filament or a bundle of strands or filaments of fiber materials. Suitable fiber materials include metals, ceramics, glasses, polymers, and the like. For example, suitable fiber materials include boron, aluminium, quartz, graphite, polyethylene, nylon, and any combination thereof. Commercially available fiber yarns or rovings may be used. The fiber yarns or rovings may be preformed using known textile manufacturing techniques, such as brading. The fibers may contain one or more other ingredients, such as coupling agents, primer agents, and sizing agents, for improving the properties of the product or for facilitating the manufacturing process, such as improving the bonding between the resin and the fibers. Fibers can be chosen depending on the intended purpose for the final product. For example, for producing aesthetic composite product such as orthodontic wire, glass fiber may be preferable.

[0027] The resins used may include any suitable resins used in conventional pultrusion processes. Monomer resins may be used. Exemplary suitable monomer materials include acrylic monomer, acrylate monomer, epoxy monomer, carbonate monomer, or any combination thereof. The resins may contain a suitable polymerization initiator. For producing orthodontic wires, Bis-GMA based dental resins, such as Metafil FLo™ supplied by Sun Medical, may be used. These resins have been commonly used in dentistry and are

biocompatible in an oral environment. Further, they can form products with an aesthetically pleasing appearance.

[0028] The tunnel of die **14** is longitudinally straight and has a uniform cross section. The tunnel of die **14** for receiving fiber and resin may have any desired shape suitable for producing the desired final product. This allows formation of a wire having a cross-section that can be virtually any shape depending on the application. In the depicted embodiment, the cross-section is circular.

[0029] The initial cross-section of the die tunnel can have a size substantially larger than the desired size of the cross-section of the resulting composite wire.

[0030] Die **14** is oriented so that the tunnel is vertically disposed. However, the tunnel may be otherwise disposed. The vertical orientation is advantageous because the gravitational force is normal to the transversal cross-section of the tunnel and does not contribute to the transverse force exerted on the strands in the tunnel.

[0031] Preferably die **14** is made of material that may contract in size (or shrink) so as to constrict the tunnel formed therein. As well, die may be formed of a material that may be bent or flexed along its length. The shrinkable and/or flexible materials suitable for formation of die **14** are known to persons skilled in the art and are readily available. For example, the die may be formed with temperature sensitive material that shrinks in response to heat. One suitable material for such a die is polyolefin. An example of a suitable die material is the heat-shrinkable tubes available under the tradename SUMITUBE™. Other suitable polymers include polytetrafluoroethylene (PTFE), perfluoroalkoxy (PFA), fluorinated ethylene polymer (FEP), polyvinylidene Fluoride (PVDF), and polyethylene terephthalate (PET).

[0032] Fiber **12** may be pulled into and through the tunnel of die **14**, such as is done in conventional pultrusion processes. Fiber **12** may then be cut into a desired length. A portion of fiber **12** is exposed at each end of die **14**. Each

exposed portion can be, for example, two inches long. Two weights **16A** and **16B** may be respectively tied to one or other of the two exposed end portions. The weights **16A** and **16B** pull the fiber strands so that fiber **12** is straightened.

[0033] Optionally additional resin can be injected into die **14** with an injecting device such as syringe **18** to further fill the die tunnel.

[0034] Die **14** is then shrunk by heat treatment using heat gun **20** so as to cause the tunnel to contract and die **14** to compress fiber **12** and resin therein into a desirable cross-sectional shape (**S104**), as illustrated in **FIG. 4**.

[0035] It may be advantageous to shrink die **14** gradually from top to bottom along the length of the tunnel of die **14** as gravity facilitate the removal of excessive resin. The temperature required to shrink die **14** may vary depending on the die material. A heat gun producing hot air with a temperature of about 180°C has been found suitable for shrinking a polyolefin die. Die **14** preferably shrinks uniformly so that the cross section of its tunnel retains its general shape, but decreases in size. The contracting tunnel exerts a force on the uncured composite therein, thereby compressing the composite and causing it to assume a cross-section shape that is the shape of the tunnel.

[0036] Optionally, impregnated fiber **12** and die **14** can be placed under vacuum together after a section of die **14** has been shrunk to remove any gas entrapped inside the tunnel before completely shrinking die **14**. For example, the top 10% of die **14** may be shrunk first before vacuuming and further heating.

[0037] As illustrated in **FIG. 4**, after die **14** is completely shrunk to the desired size a section **22** can be cut out from the die and the impregnated fiber assembly (**S104**). Section **22**, including die **14** can then be bent along its length into a desired profile **24** (**S106**), for example, with an arch-shaped mould. Profile **24** can then be cured in a curing chamber **26** (**S108**). Profile **24** can be cured in manners known to a person skilled in the art, such as by radiation. For example, profile **24** may be cured with UV-light for about 90 seconds. After profile **24** is cured, die **14**

is separated from the fiber reinforced composite. A small cut/slit may be made at one end of die 14 and it may be peeled from the cured composite and discarded

[0038] The resulting fiber reinforced composite wire may be used in a variety of applications. For example, it may be used in orthodontic treatments.

[0039] The cross-section of a fiber reinforced composite wire produced as described above is shown in **FIG. 6**. The example wire has a glass fiber content of 48% by volume. As can be seen, glass fibers are evenly distributed. As is known to a person skilled in the art, in wires produced by conventional pultrusion processes, fiber distribution is often uneven when the fiber content is in a certain range, as shown in figures 6a to 6f of Kusy and discussed therein.

[0040] The resulting composite may contain a matrix and reinforcement. The reinforcement is formed of the fiber, while the cured resins form a polymer matrix. The resulting polymer may be a homopolymer, copolymer, terpolymer, and blends or modifications thereof. Copolymers include block, graft, random and alternating copolymers. The polymers may have various structures, such as isotactic, syndiotactic and random molecular configurations, which can be either linear or cross-linked.

[0041] Depending on the input fiber and resin, the resulting polymer product can be wholly or partially absorbable, non-absorbable, dissolvable, or biodegradable.

[0042] Test results show that fiber reinforced composite orthodontic wires produced with process **S100** can meet the specifications of international standards such as the ASTM D 790 standard. The fiber reinforced composite orthodontic wires have similar or improved mechanical properties in comparison with conventional metal orthodontic wires such as Ni-Ti wires sold under the tradename Reflex™ by TP Orthodontics, Inc. As shown in **FIG. 6**, a composite wire can withstand higher load than a similarly sized Ni-Ti wire having 0.45 mm (0.018 inch) diameter. The composite wire was formed of a Bis-GMA matrix

based dental resin, Metafil Flo B12, from Sun Medical reinforced with a bundle of several E-glass fiber yarns, each containing 200 fiber filaments (the filament diameter = $9\mu\text{m}$, Unitica Glass Fiber Co. Ltd, Japan. The fiber volume fraction was 48% and the diameter of the wire was 0.5mm. As can be seen, the composite wire also showed good recovery upon unloading.

[0043] Advantageously, with a shrinkable die, the die tunnel can have a large initial cross-section. As a result, it is easy to insert the fiber and resin into the tunnel and the stress in the fiber resulting from insertion of the composite and removal of the wire can be reduced. Very thin composite wires can thus be formed. Further, multiple strands of fiber can be evenly distributed in the formed composite, thus improving the mechanical properties of the composite. When a flexible die is used, the die can be bent to shape the composite wire before the wire is separated from the die. Only one curing step is required to form an arched wire.

[0044] Modifications to the exemplary embodiment described above are possible, as will be understood and appreciated by persons skilled in the art.

[0045] For example, die **14** can be horizontally arranged instead of vertically. Die **14**, with fiber and resin in it, may be shrunk first then shaped longitudinally or shaped longitudinally first then shrunk. Die **14** can also be shrunk in other manners. Heat gun **20** may be replaced by other heating devices, such as those using electromagnetic radiations. The whole assembly of impregnated fiber **12** and die **14** may be placed in a heating chamber.

[0046] The fiber content may vary depending on the desired mechanical properties, as will be understood by persons skilled in the art. Generally, increasing fiber content can increase the mechanical strength and stiffness of the final wire. Braided fibers may be used as the reinforcement fiber. Similarly, Short fibers or particulate reinforcement can also be used and inserted into die **14**. Pigments may be added to the resin before shrinking die **14**, to, for example, give the final product a desired colour.

[0047] Although only exemplary embodiments of this invention have been described above, those skilled in the art will readily appreciate that many modifications are possible. The invention, rather, is intended to encompass all such modification within its scope, as defined by the claims.

WHAT IS CLAIMED IS:

1. A method of forming an orthodontic wire, comprising:

placing a composite of fiber and resin in an elongate tunnel of a shrinkable die formed of a heat-sensitive material that shrinks in response to heat, the tunnel having a pre-defined transversal cross-sectional shape and having an open end for allowing removal of excess resin;

shrinking the die by heating the die to reduce the transversal cross-section of the tunnel along a longitudinal extent of the tunnel so as to compress the composite
10 of fiber and resin to assume the pre-defined transversal cross-sectional shape; and

curing the composite of fiber and resin to form the orthodontic wire and separating the die from the orthodontic wire;

wherein the tunnel assumes the pre-defined cross-sectional shape and size after said die is completely shrunk and shrinks uniformly in cross-sectional area as the die is shrunk.

2. The method of claim 1, wherein the shrinking comprises shrinking the die completely to compress the composite of fiber and resin into a pre-determined transversal cross-sectional shape.

3. The method of claim 1 or 2, wherein the curing comprises curing the
20 composite fiber and resin in the die so that the composite of fiber and resin retains its shape after it is separated from the die.

4. The method of any one of claims 1 to 3, wherein the die is bendable lengthwise; and further comprising bending the die lengthwise so as to shape the composite of fiber and resin in the die.

5. The method of any one of claims 1 to 4, wherein the curing is performed after the shrinking and bending.
6. The method of claim 4 or 5, wherein the bending comprises bending the die to shape the composite of fiber and resin into an arched wire suitable for use in an orthodontic treatment.
7. The method of any one of claims 1 to 6 wherein the fiber comprises a plurality of elongated strands each having a length longer than the length of the tunnel.
8. The method of claim 7, wherein the placing comprises pulling the plurality of strands into and through the tunnel of the die.
9. The method of claim 8, further comprising pulling each one of the plurality of strands at both ends so as to straighten the fibers in the die.
10. The method of claim 8, further comprising impregnating the plurality of strands with the resin prior to the pulling.
11. The method of claim 10, further comprising, after the pulling, adding additional resin in the tunnel of the die so as to further fill the tunnel.
12. The method of any one of claims 1 to 9, wherein said composite is placed in said die by placing the fiber in the tunnel of the die, and thereafter adding resin in the tunnel.
13. The method of any one of claims 1 to 12, further comprising orienting the die so that the tunnel is vertically disposed.

14. The method of any one of claims 1 to 13, wherein the orthodontic wire has a cross-sectional shape and size defined by the die.

15. The method of any one of claims 1 to 14, wherein the composite of fiber and resin is a composite of straight fiber and resin.

16. A method of forming a fiber reinforced composite orthodontic wire, comprising:

10 placing a plurality of elongate fiber strands and resin in a tunnel of a shrinkable die formed of a heat-sensitive material that shrinks in response to heat, said tunnel extending longitudinally along an axis and having a pre-defined transversal cross-sectional shape and size and having an open end for allowing removal of excess resin;

pulling opposite ends of said fiber strands to extend said fiber strands along said tunnel, generally parallel to said axis;

shrinking said die by heating said die to compress said fiber strands and said resin in said tunnel about said axis, to distribute said fiber substantially evenly within said tunnel, said fiber strands and said resin being compressed to assume said pre-defined transversal cross-sectional shape and size; and

curing said fiber and said resin, to form said fiber reinforced composite orthodontic wire,

20 separating said die from said fiber reinforced composite orthodontic wire, wherein the tunnel assumes said pre-defined cross-sectional shape and size after said die is completely shrunk and shrinks uniformly in cross-sectional area as said die is shrunk.

17. The method of claim 16, wherein the die is bendable along said axis, and further comprising bending the die along said axis so as to shape the composite of fiber and resin in the die.

18. The method of any one of claims 1 to 17, wherein the orthodontic wire is biocompatible.

19. The method of any one of claims 1 to 18, wherein the transversal cross-section of the tunnel is circular and the orthodontic wire has a diameter defined by the die when the die is completely shrunk.

20. A fiber reinforced composite formed in accordance with the method of any one of claims 1 to 19.

21. A fiber reinforced composite wire for use in orthodontic treatment that is formed in accordance with the method of any one of claims 1 to 19.

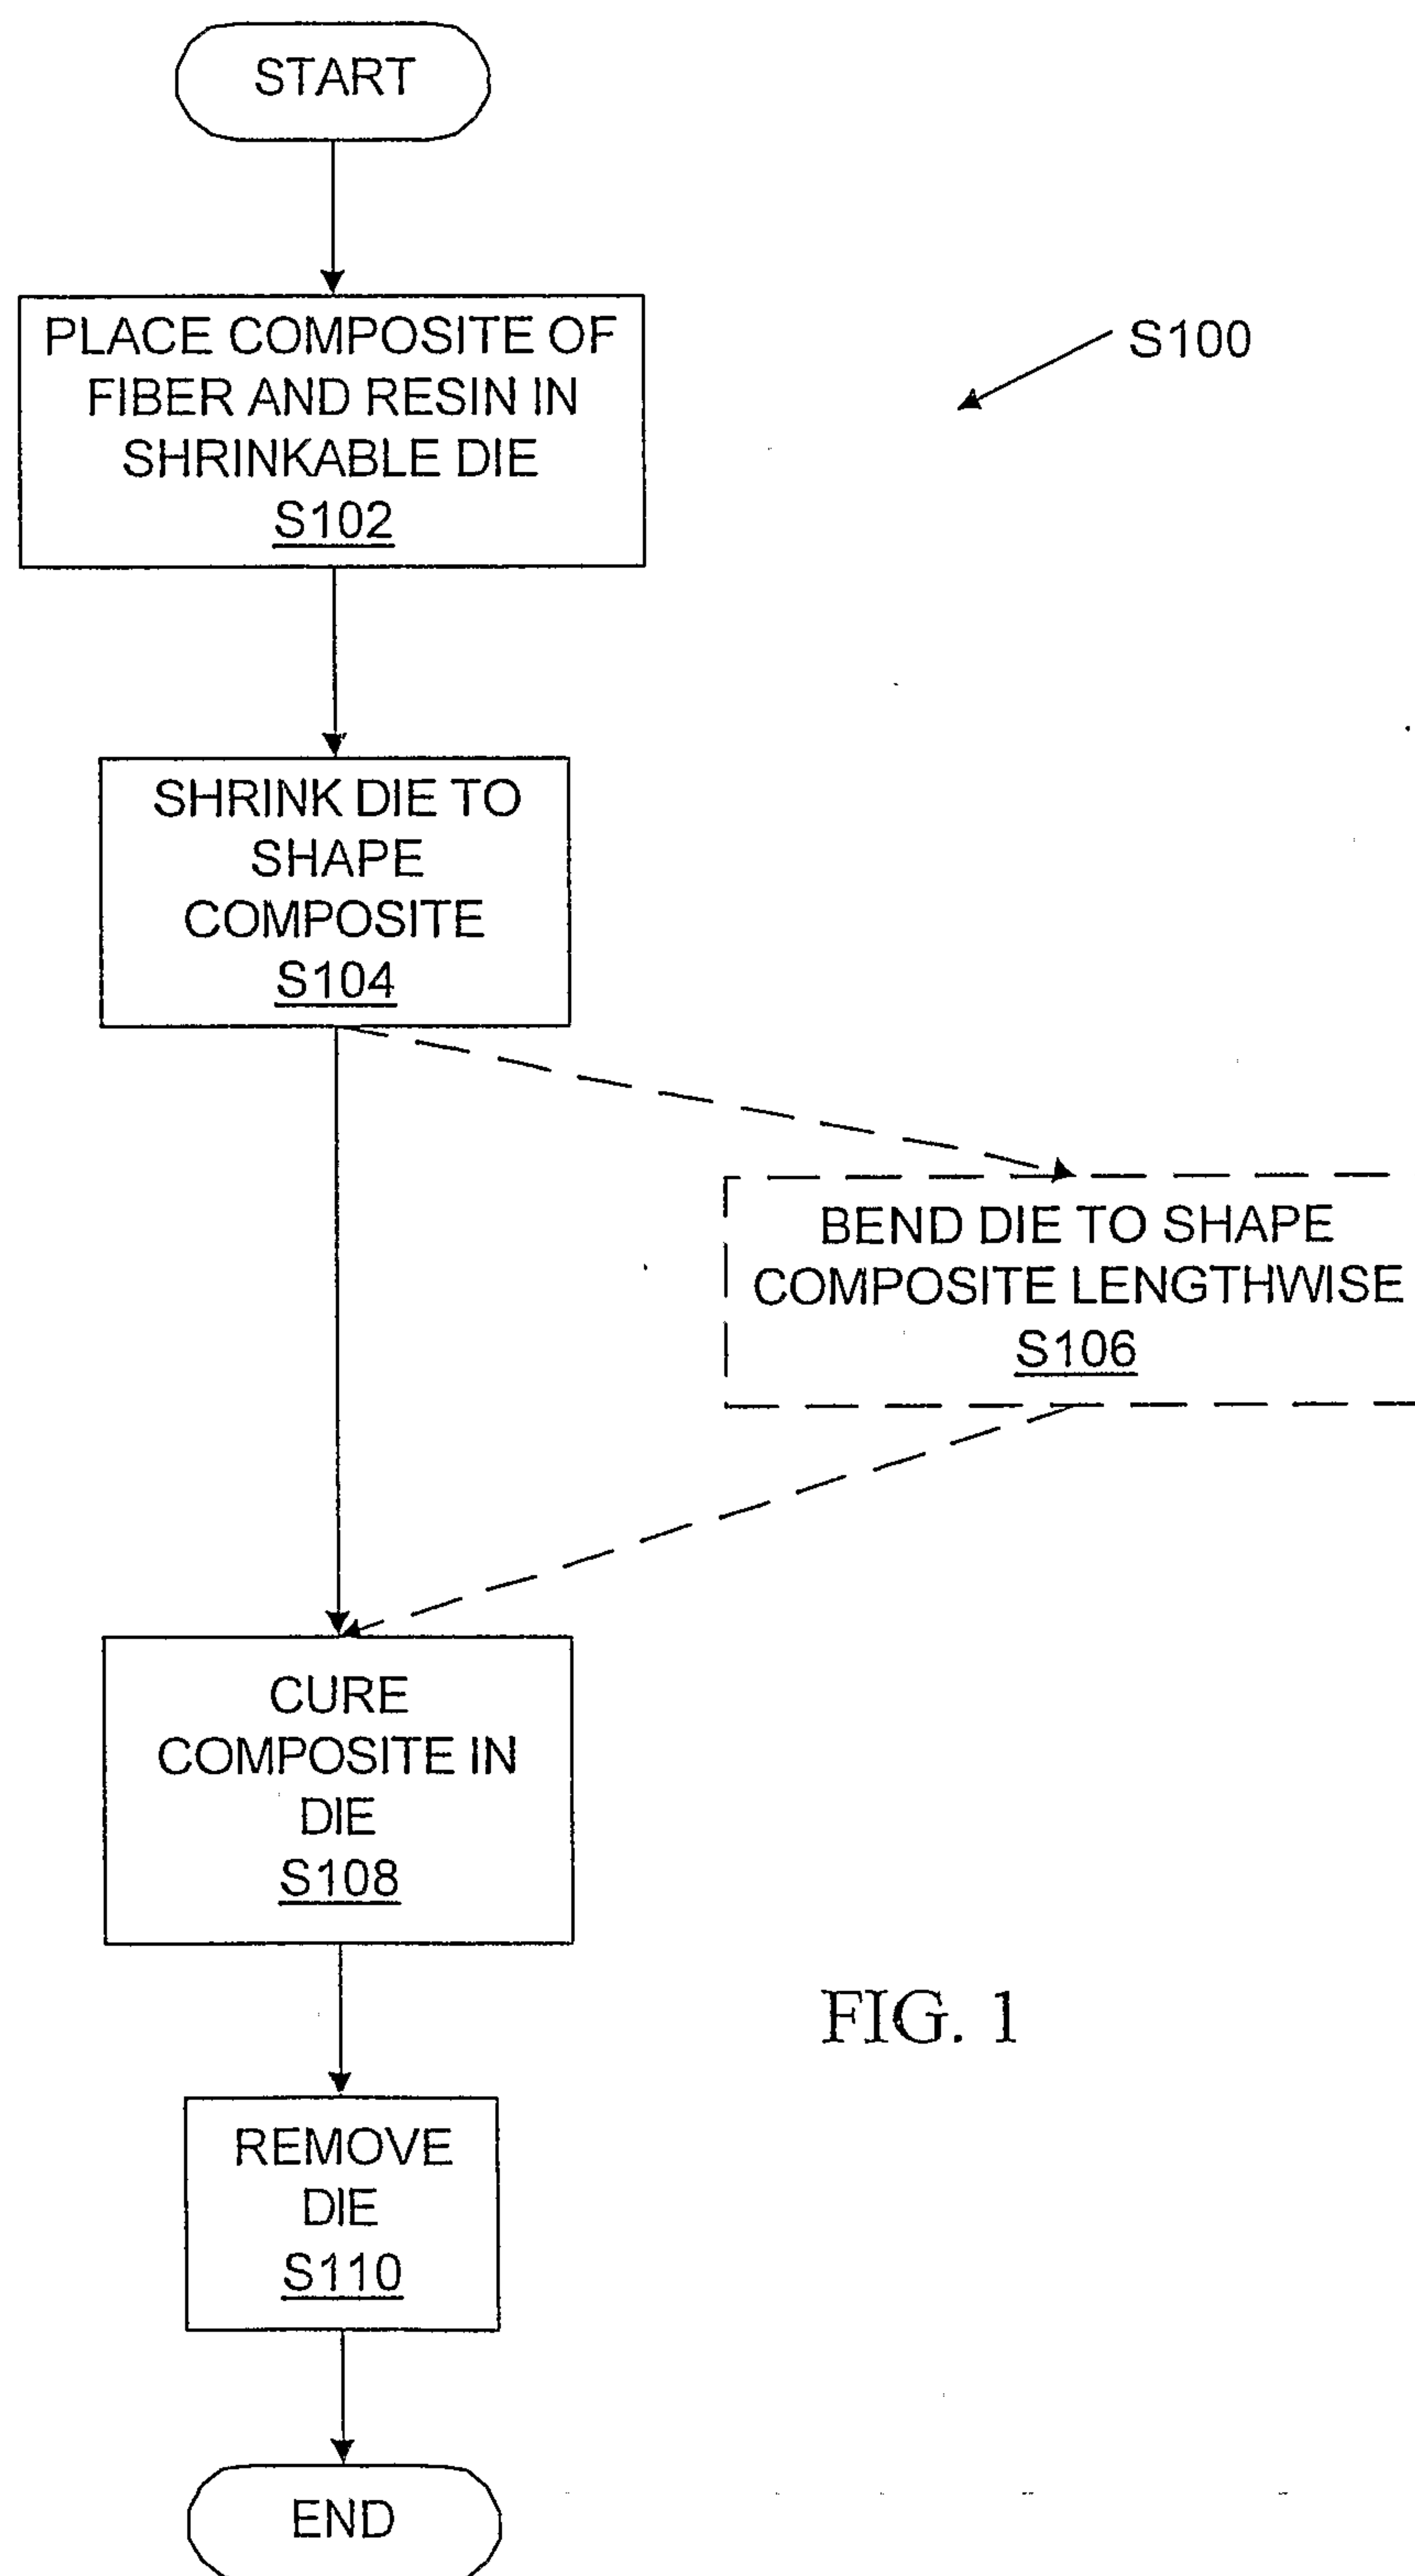


FIG. 1


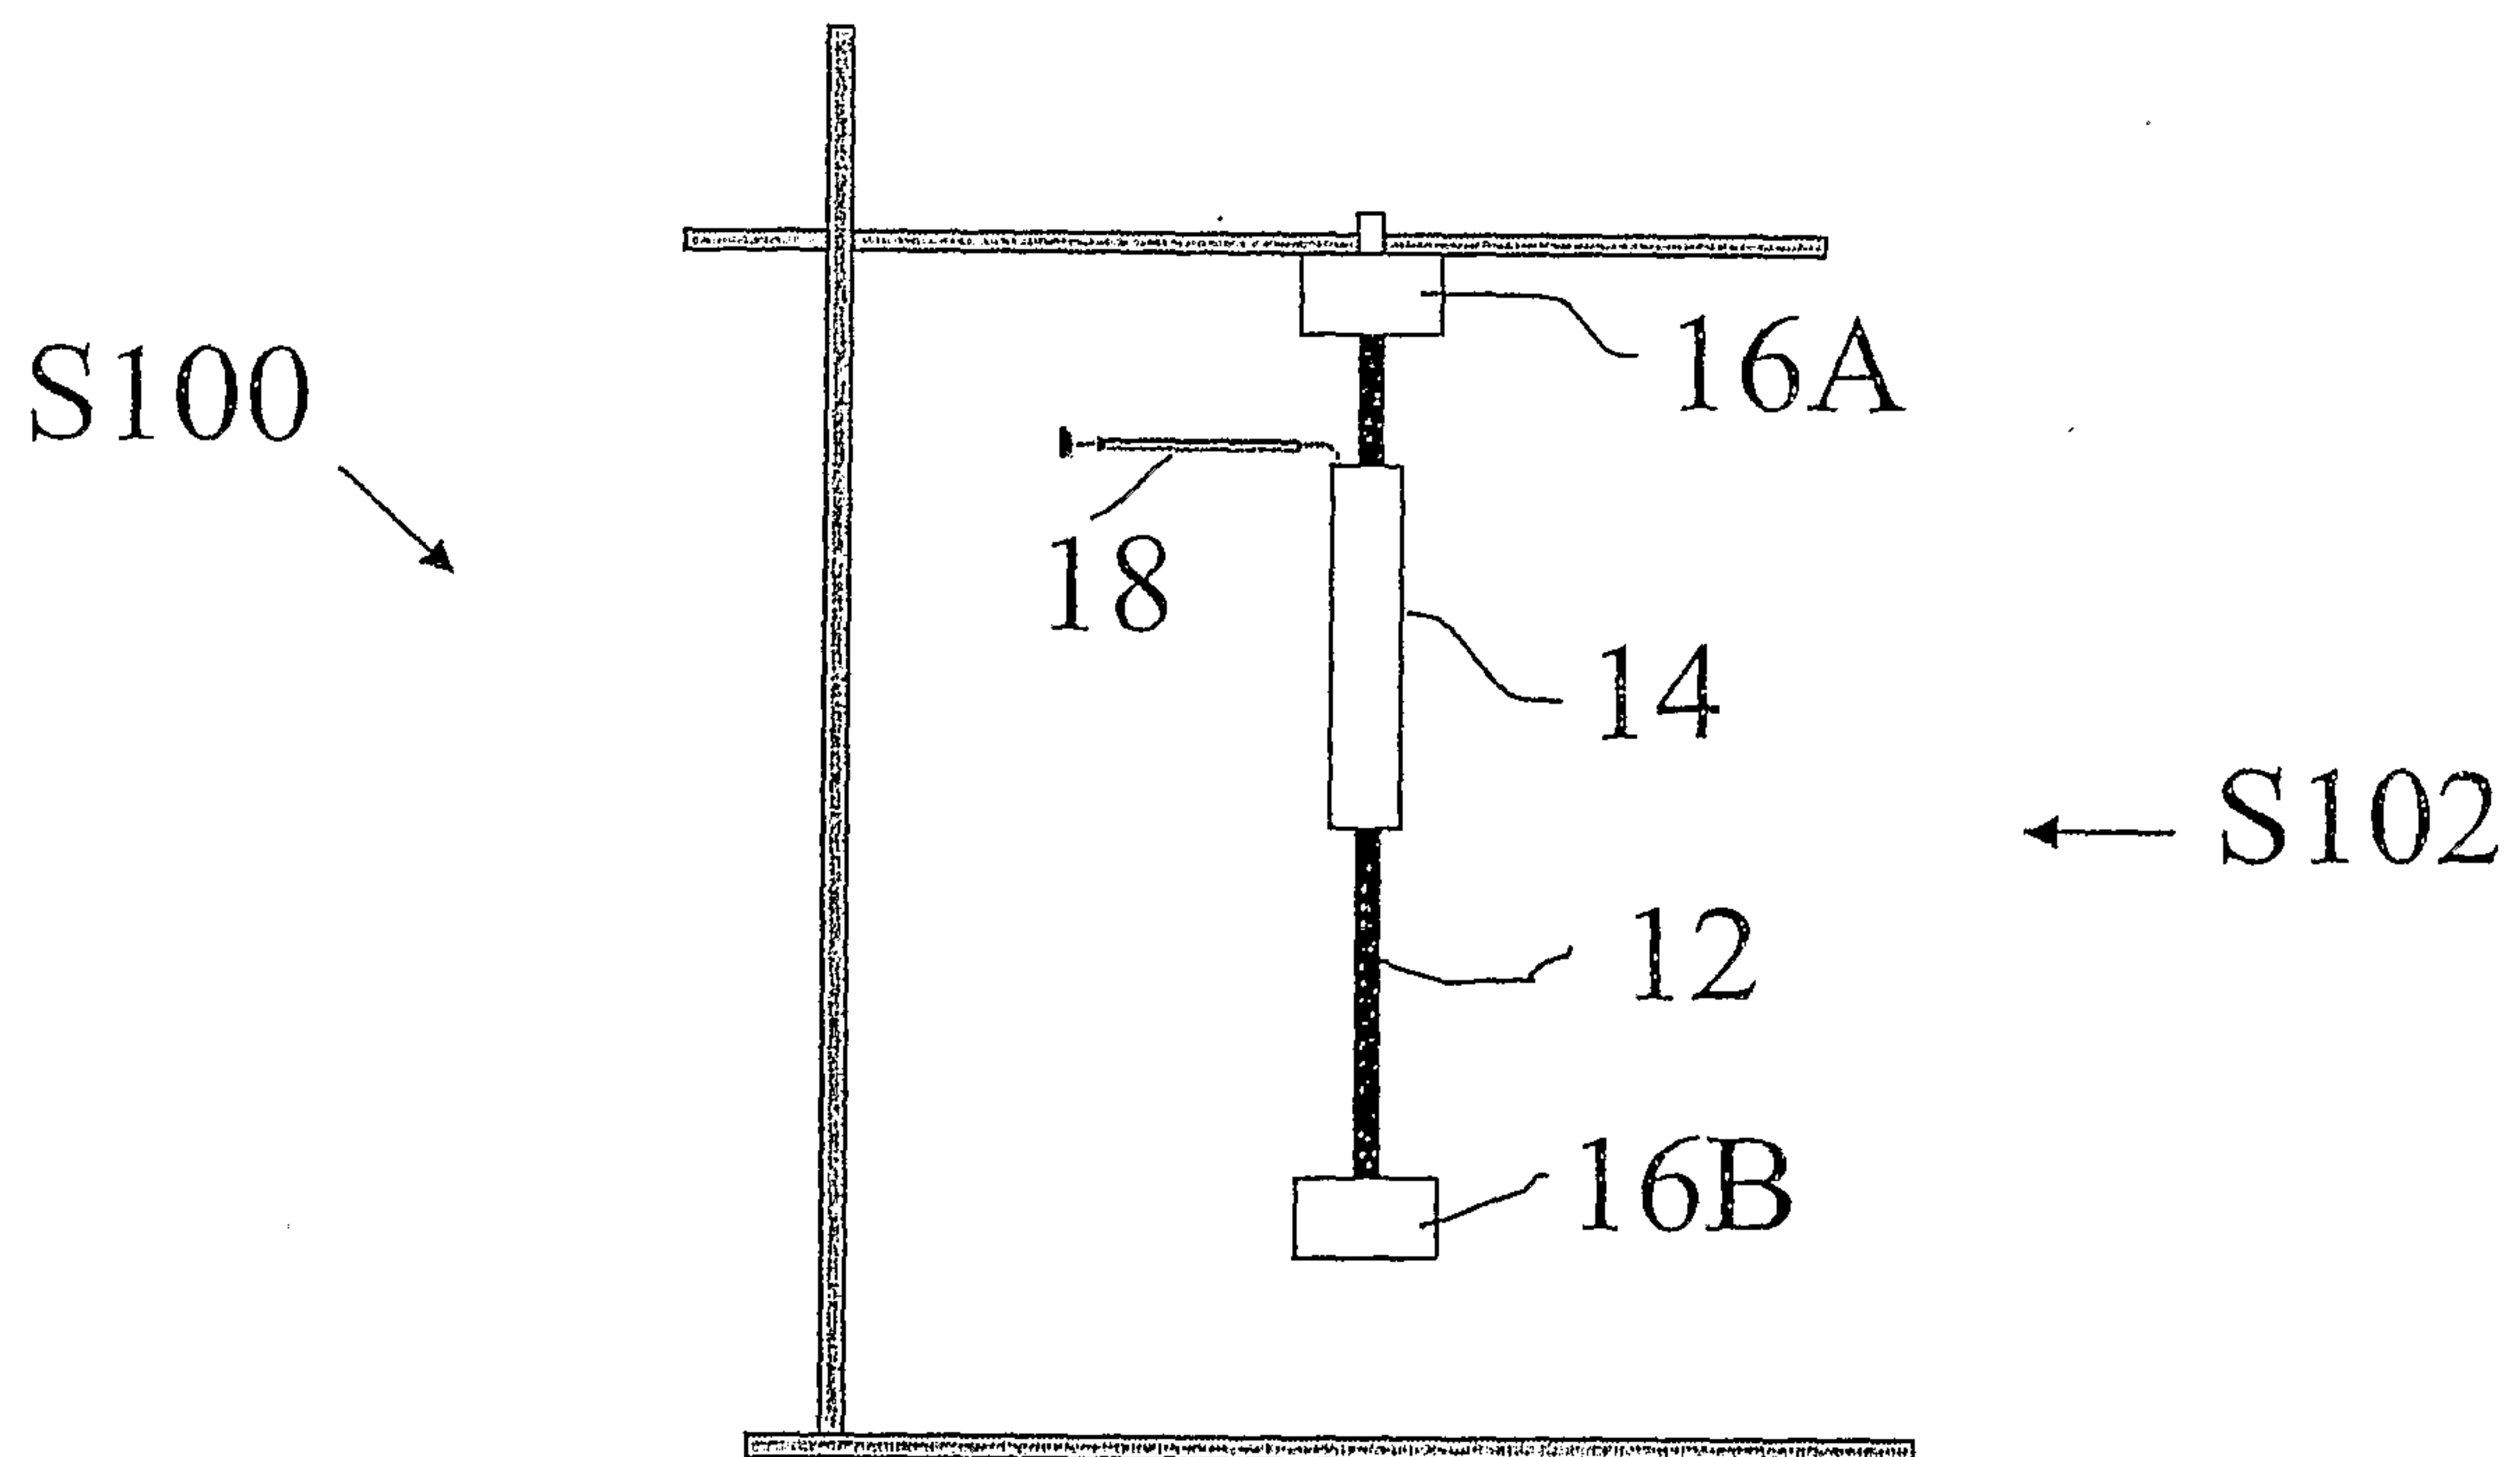


FIG. 2

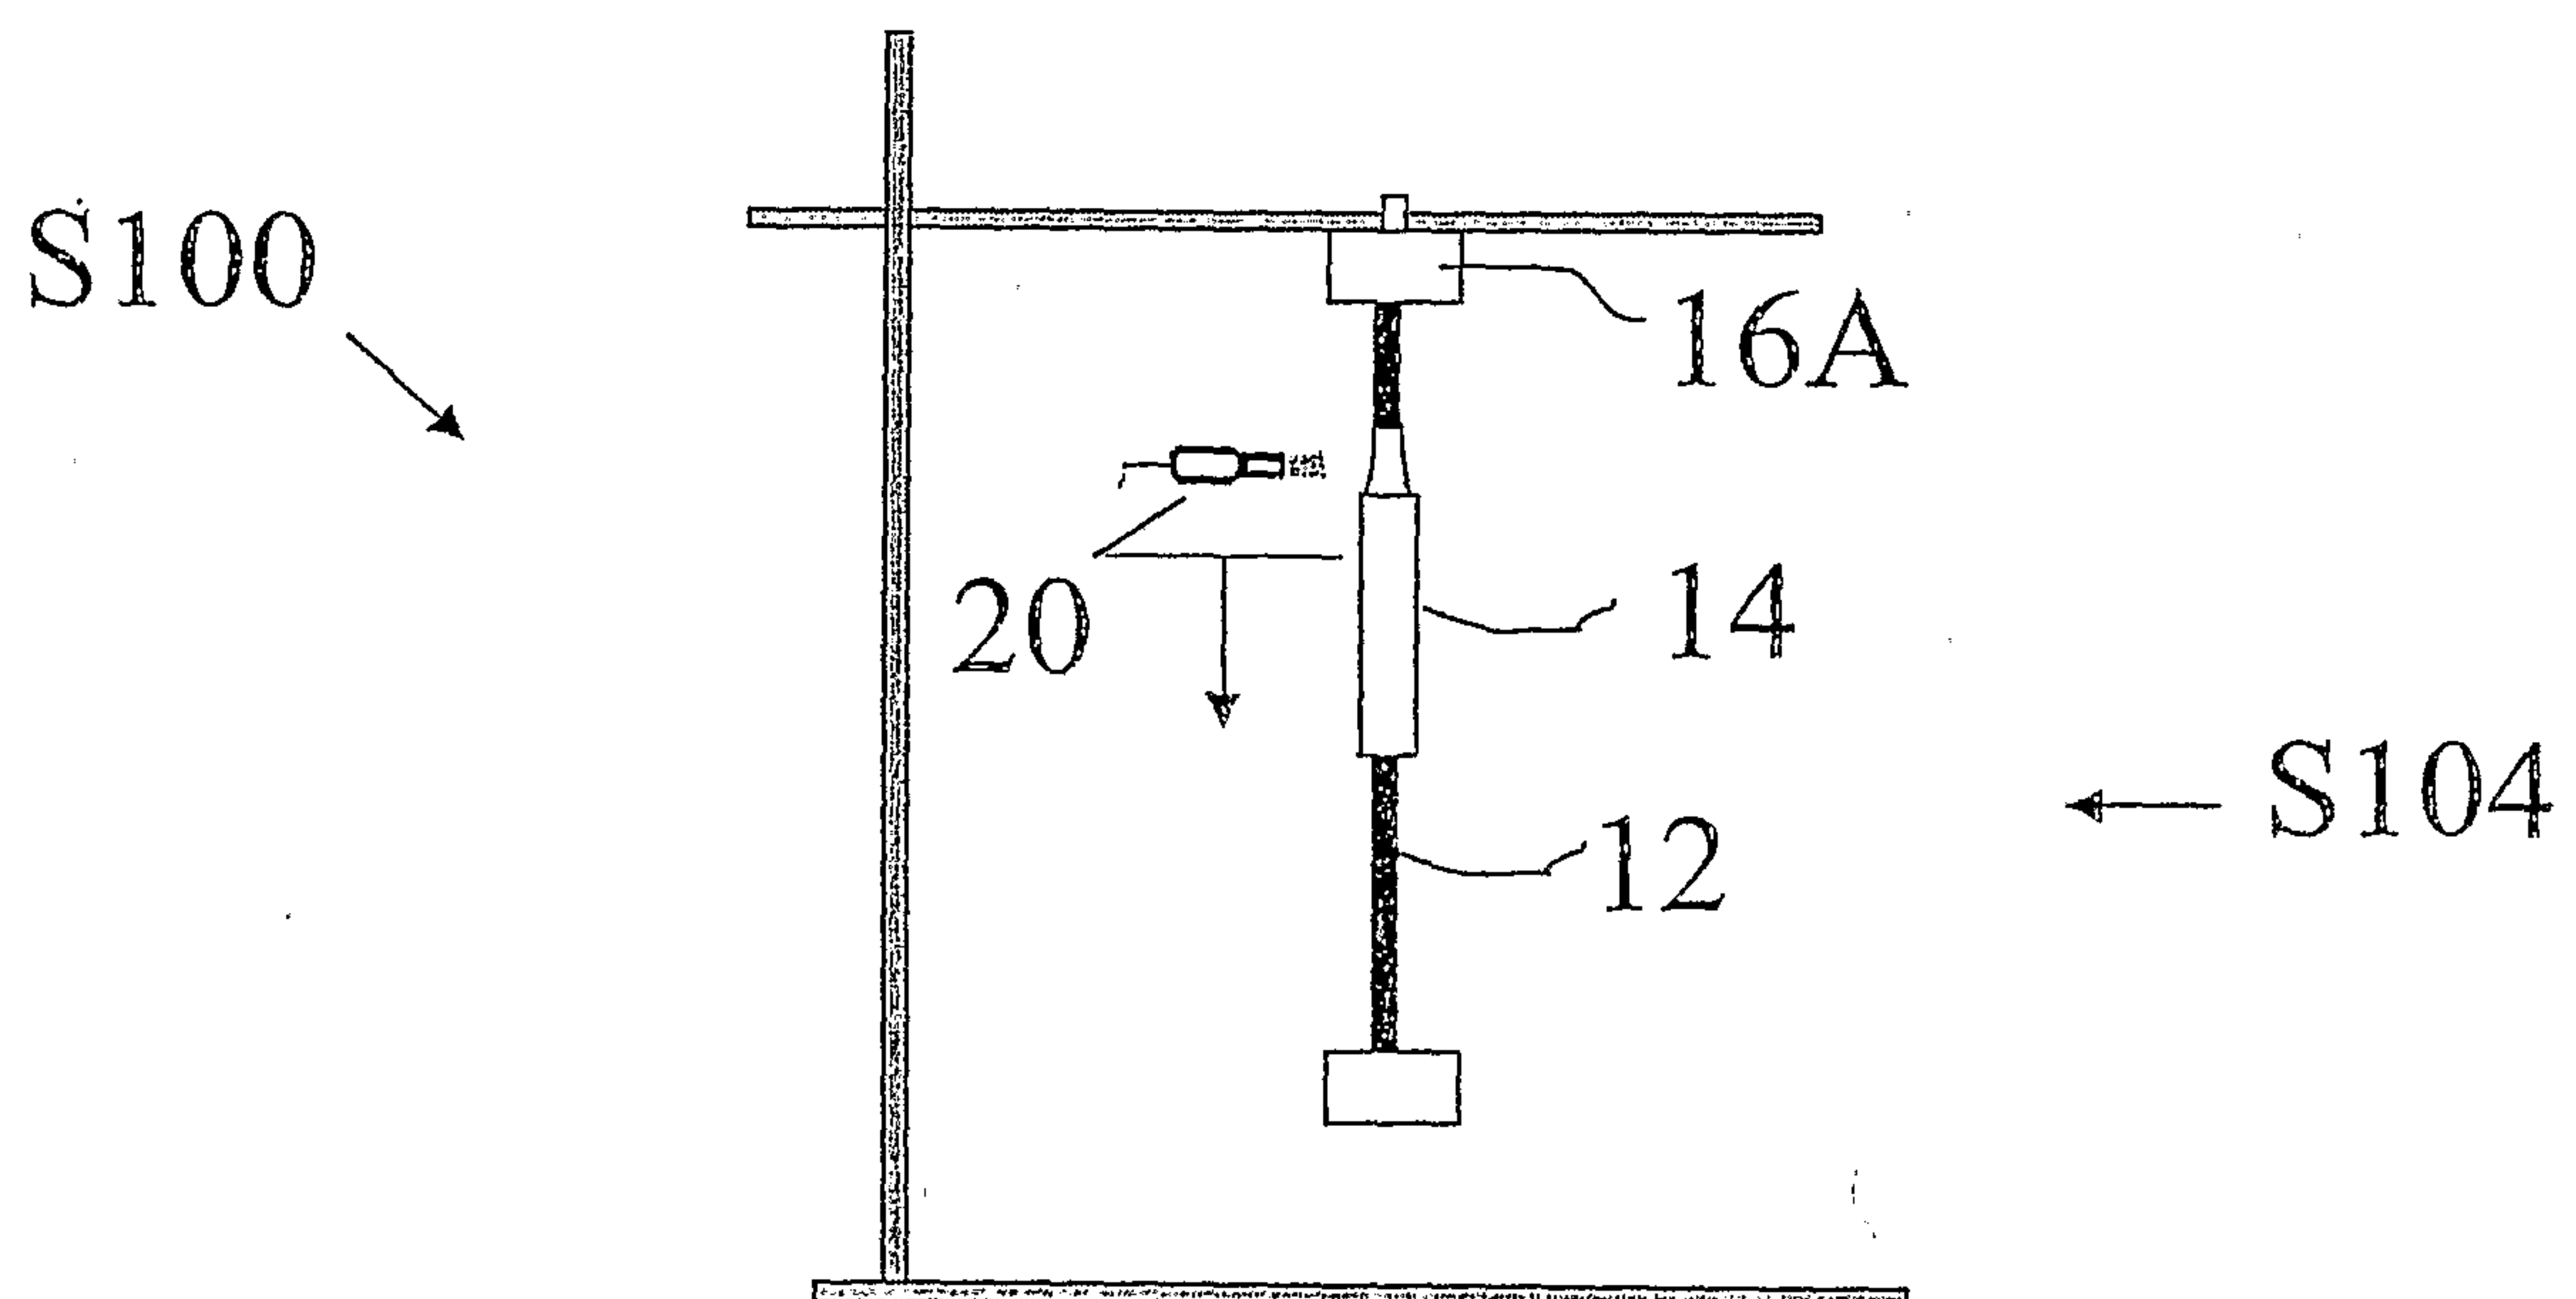

SUBSTITUTE SHEET (RULE 26)

FIG. 3

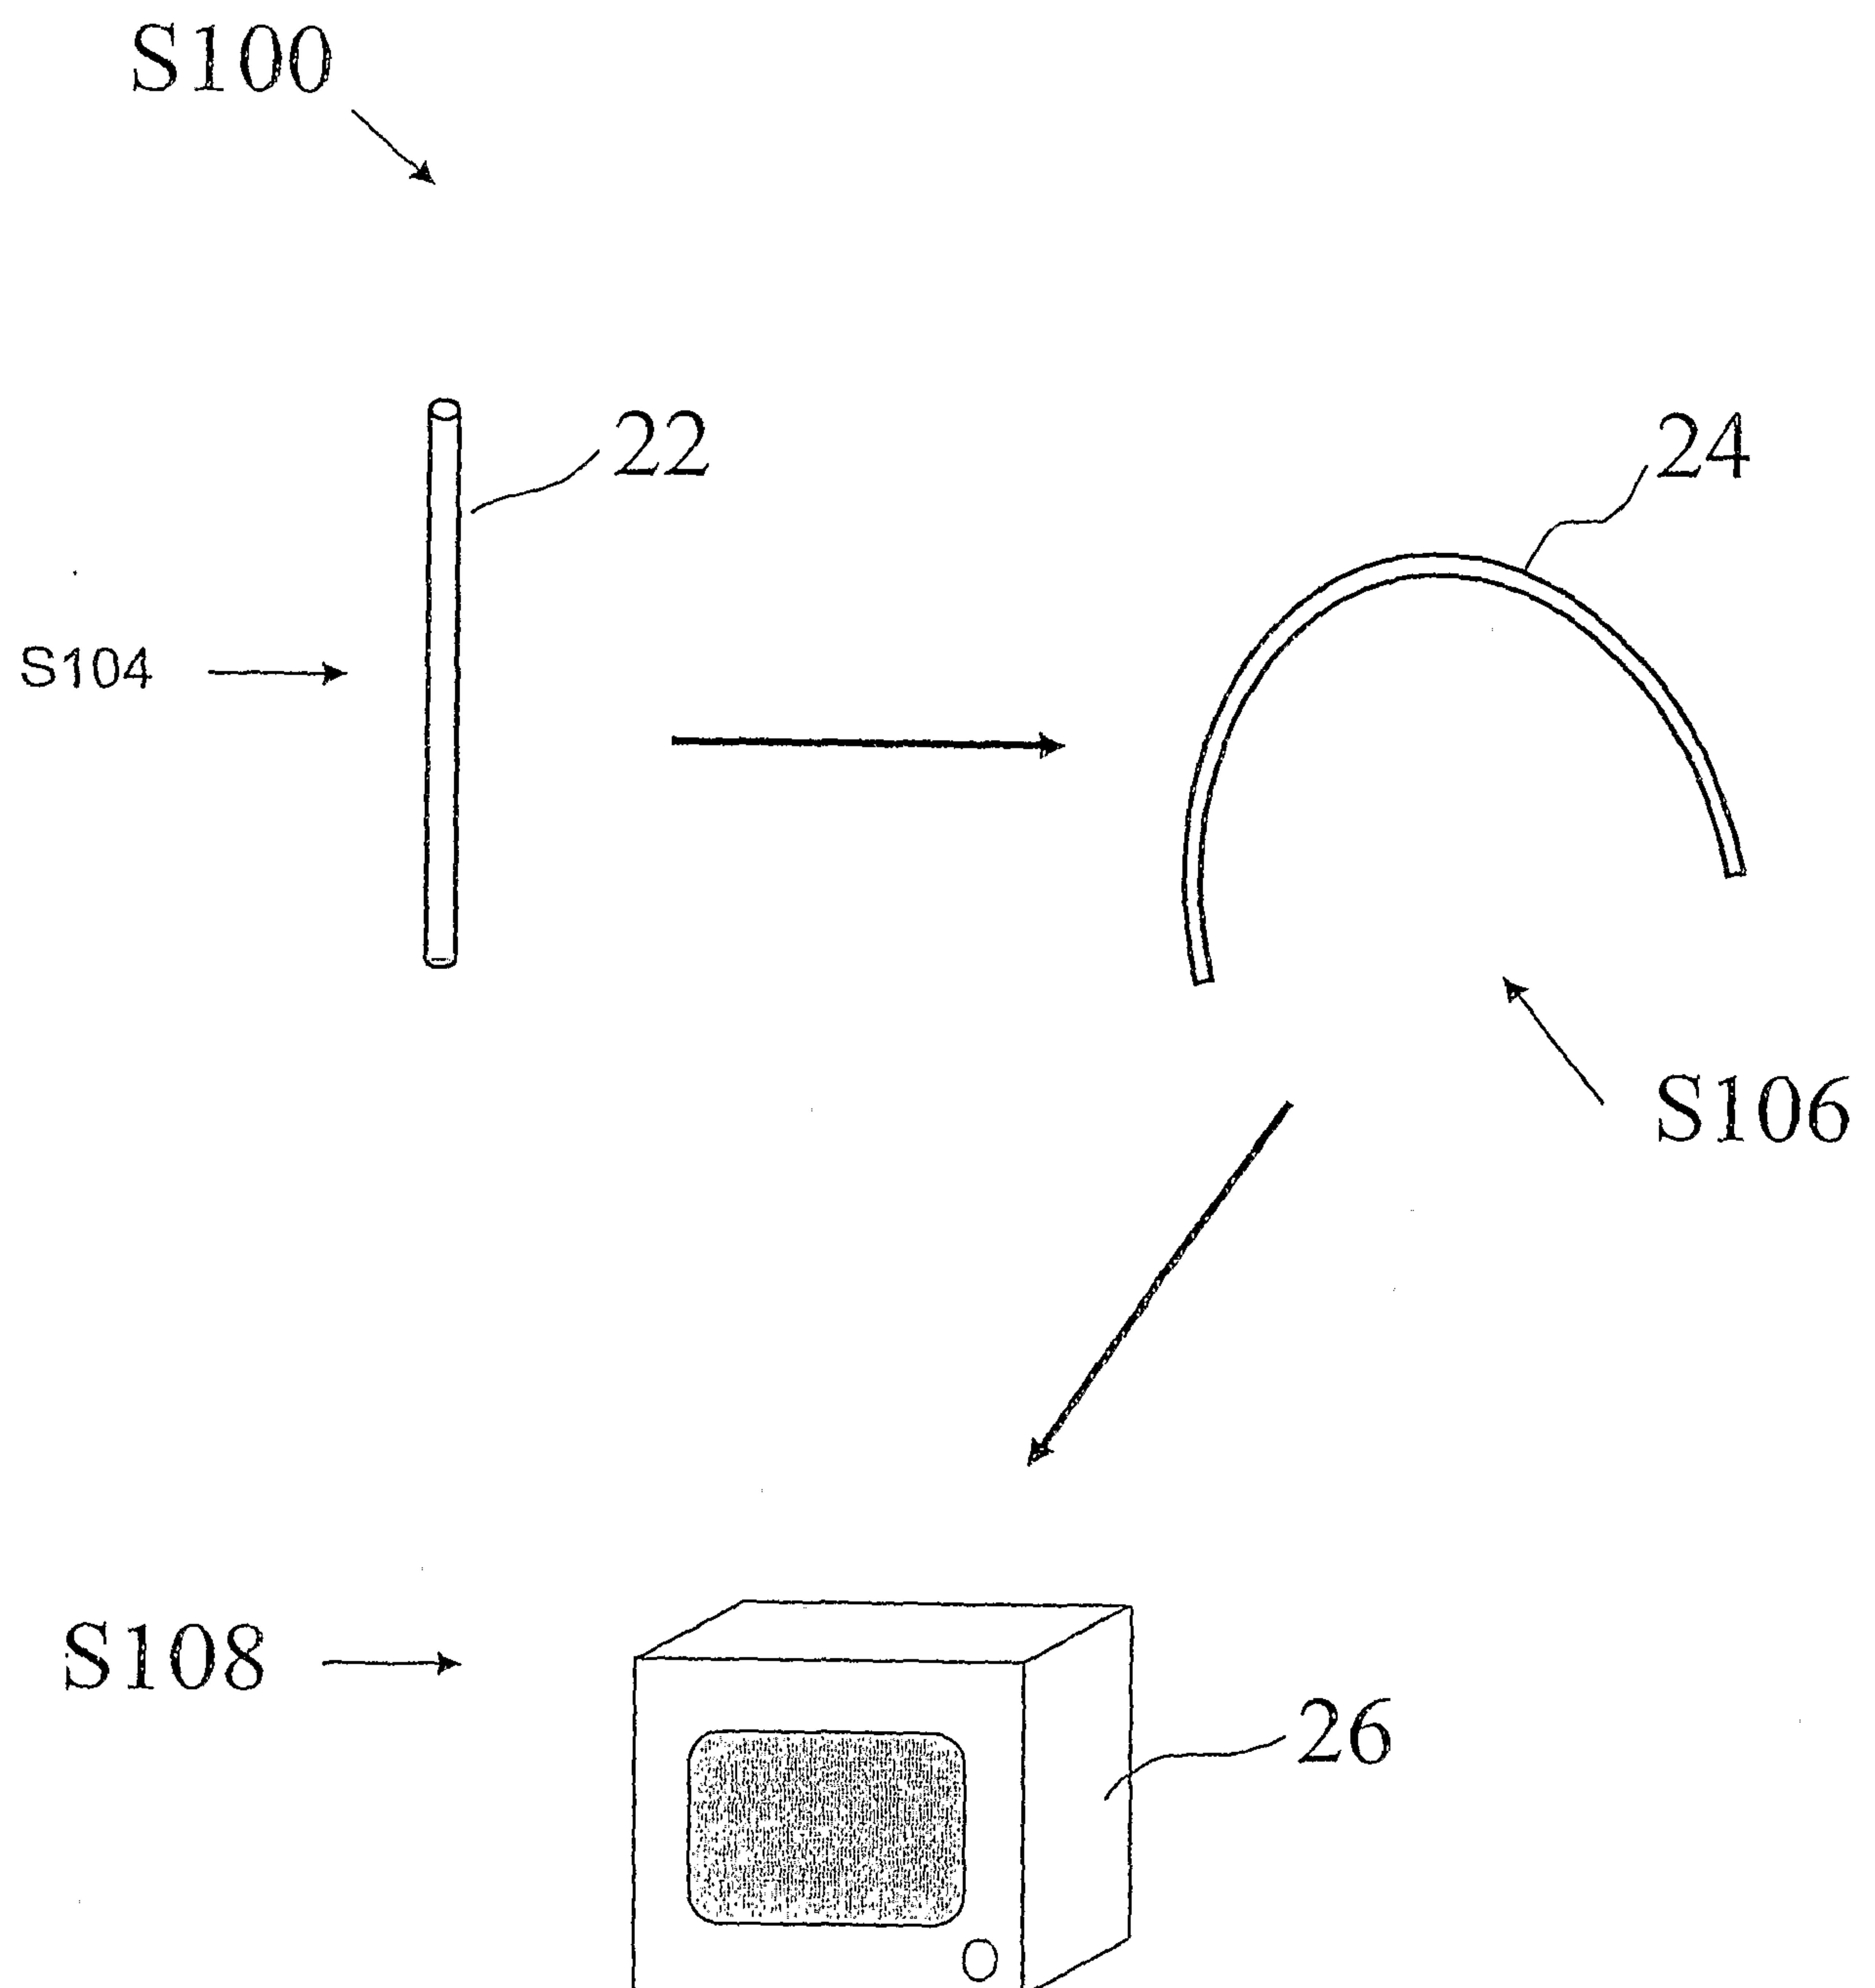


FIG. 4

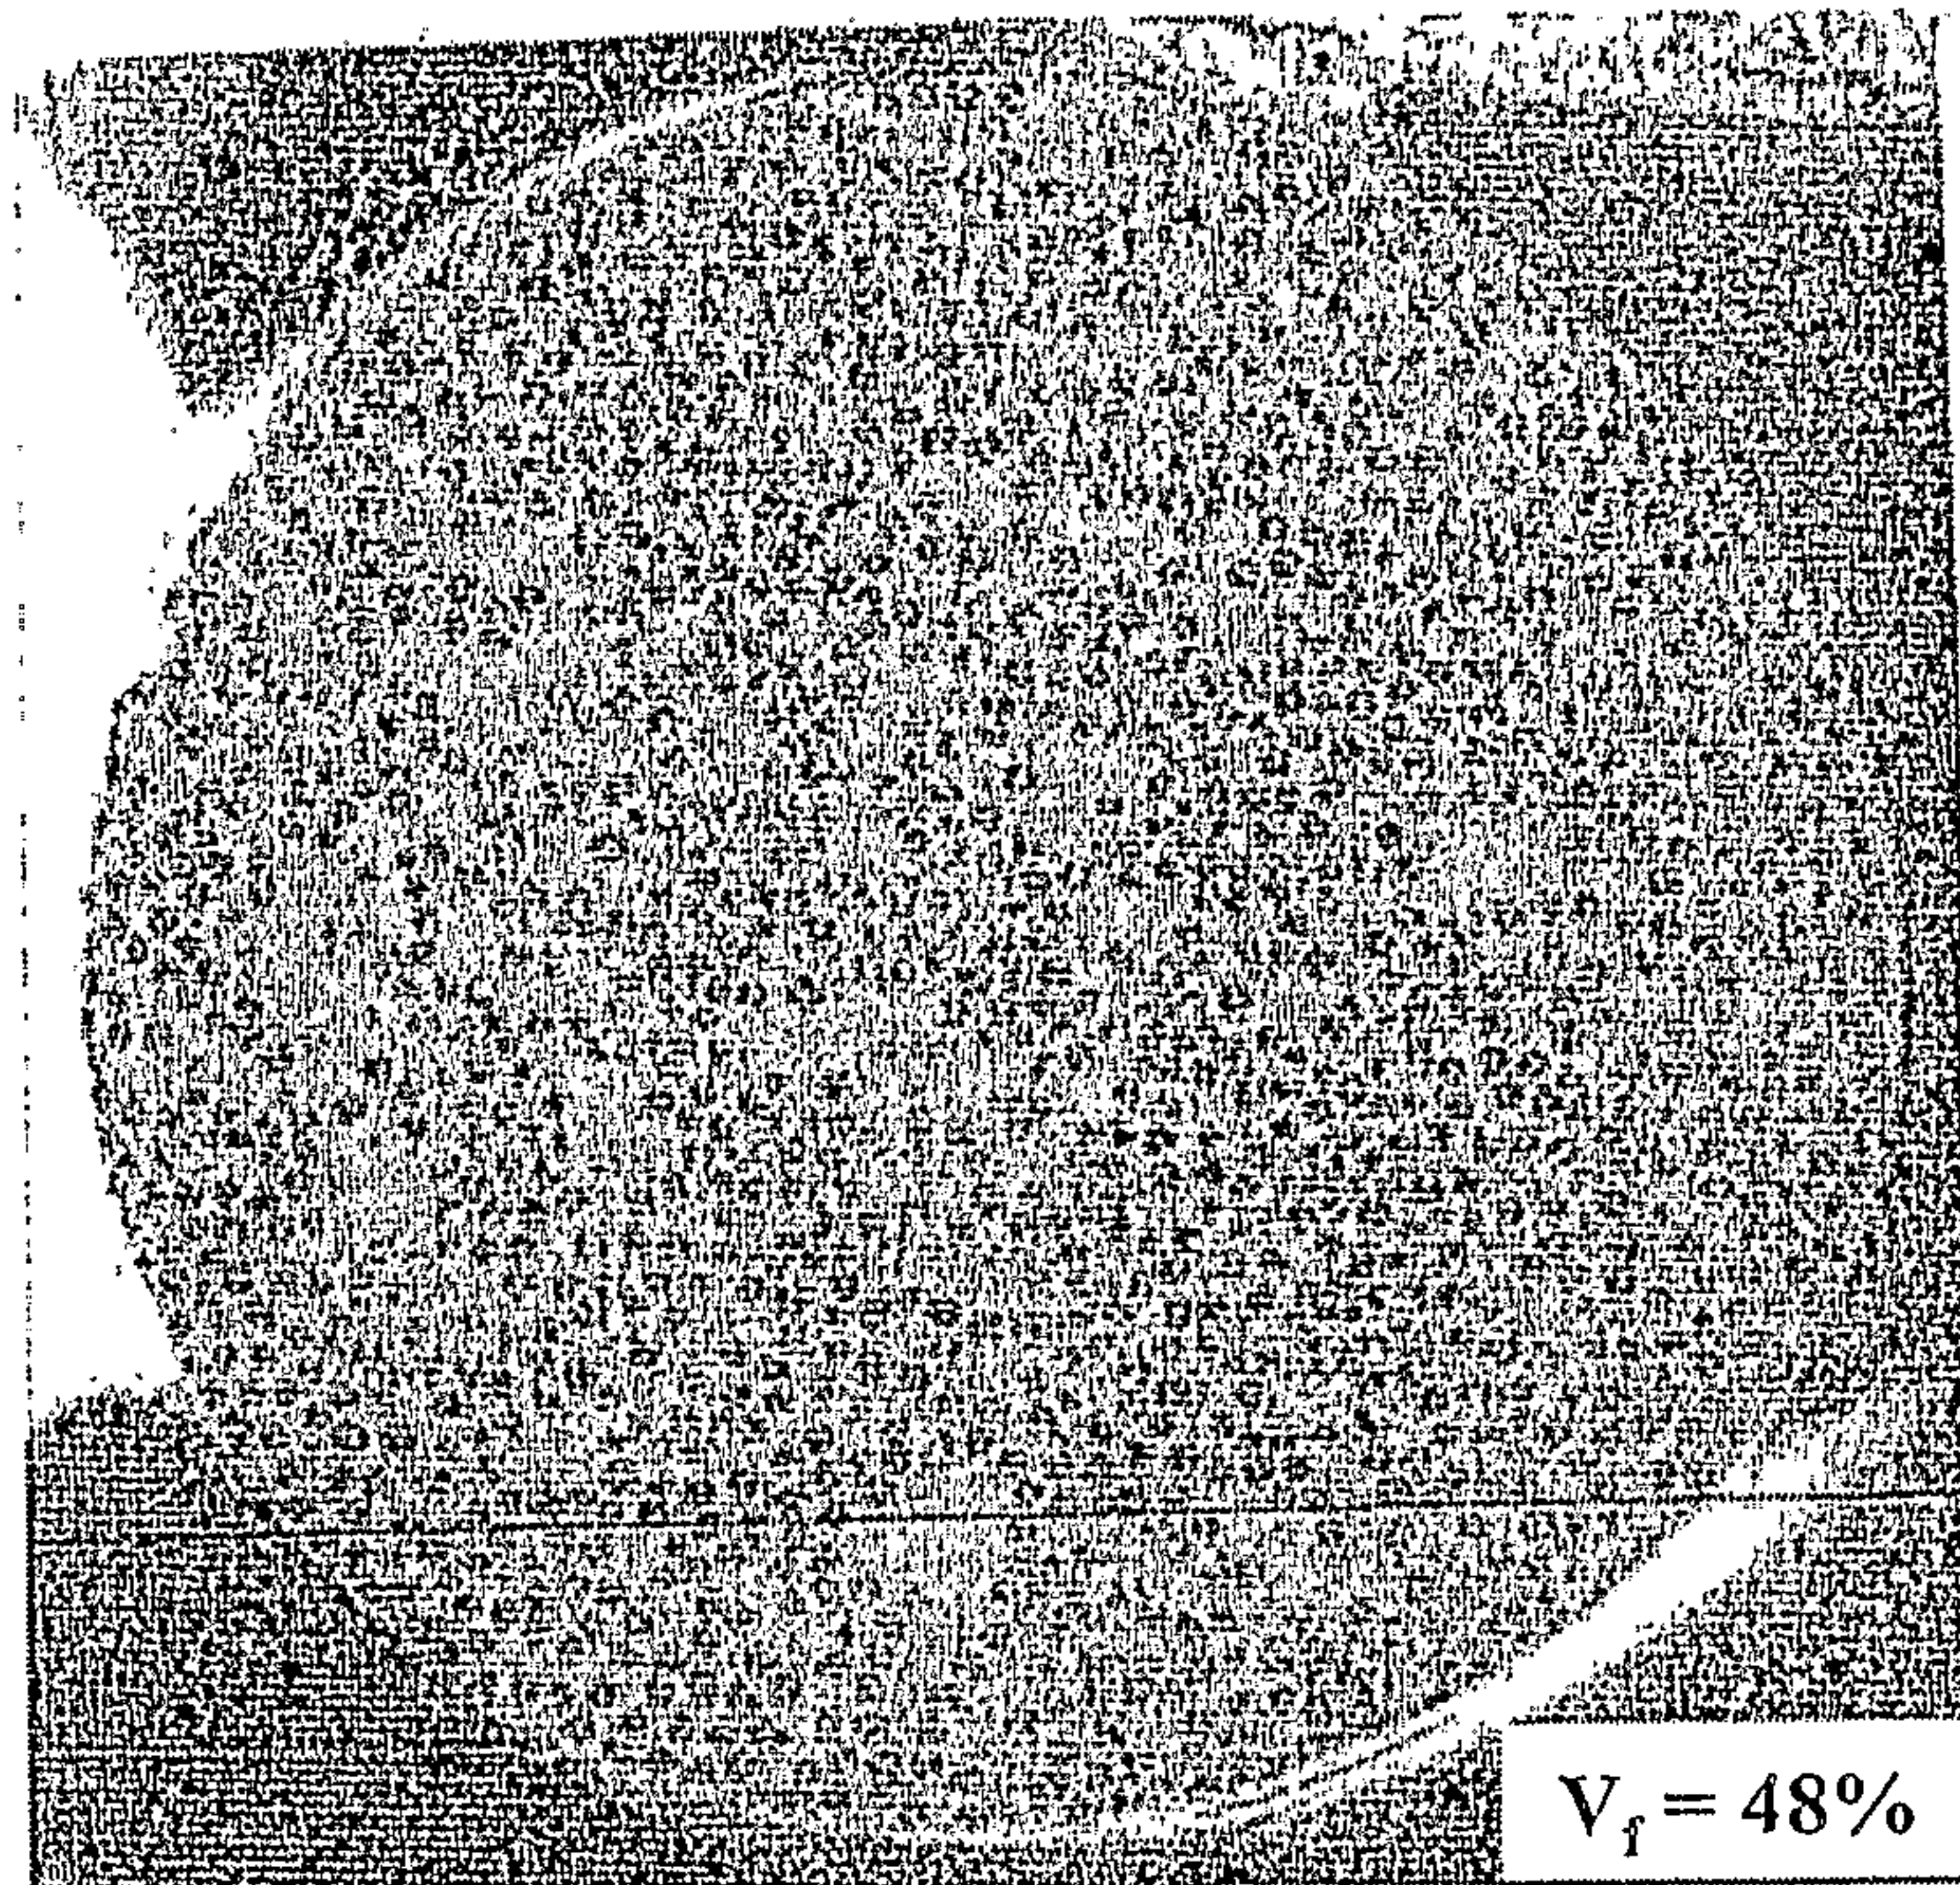


FIG. 5

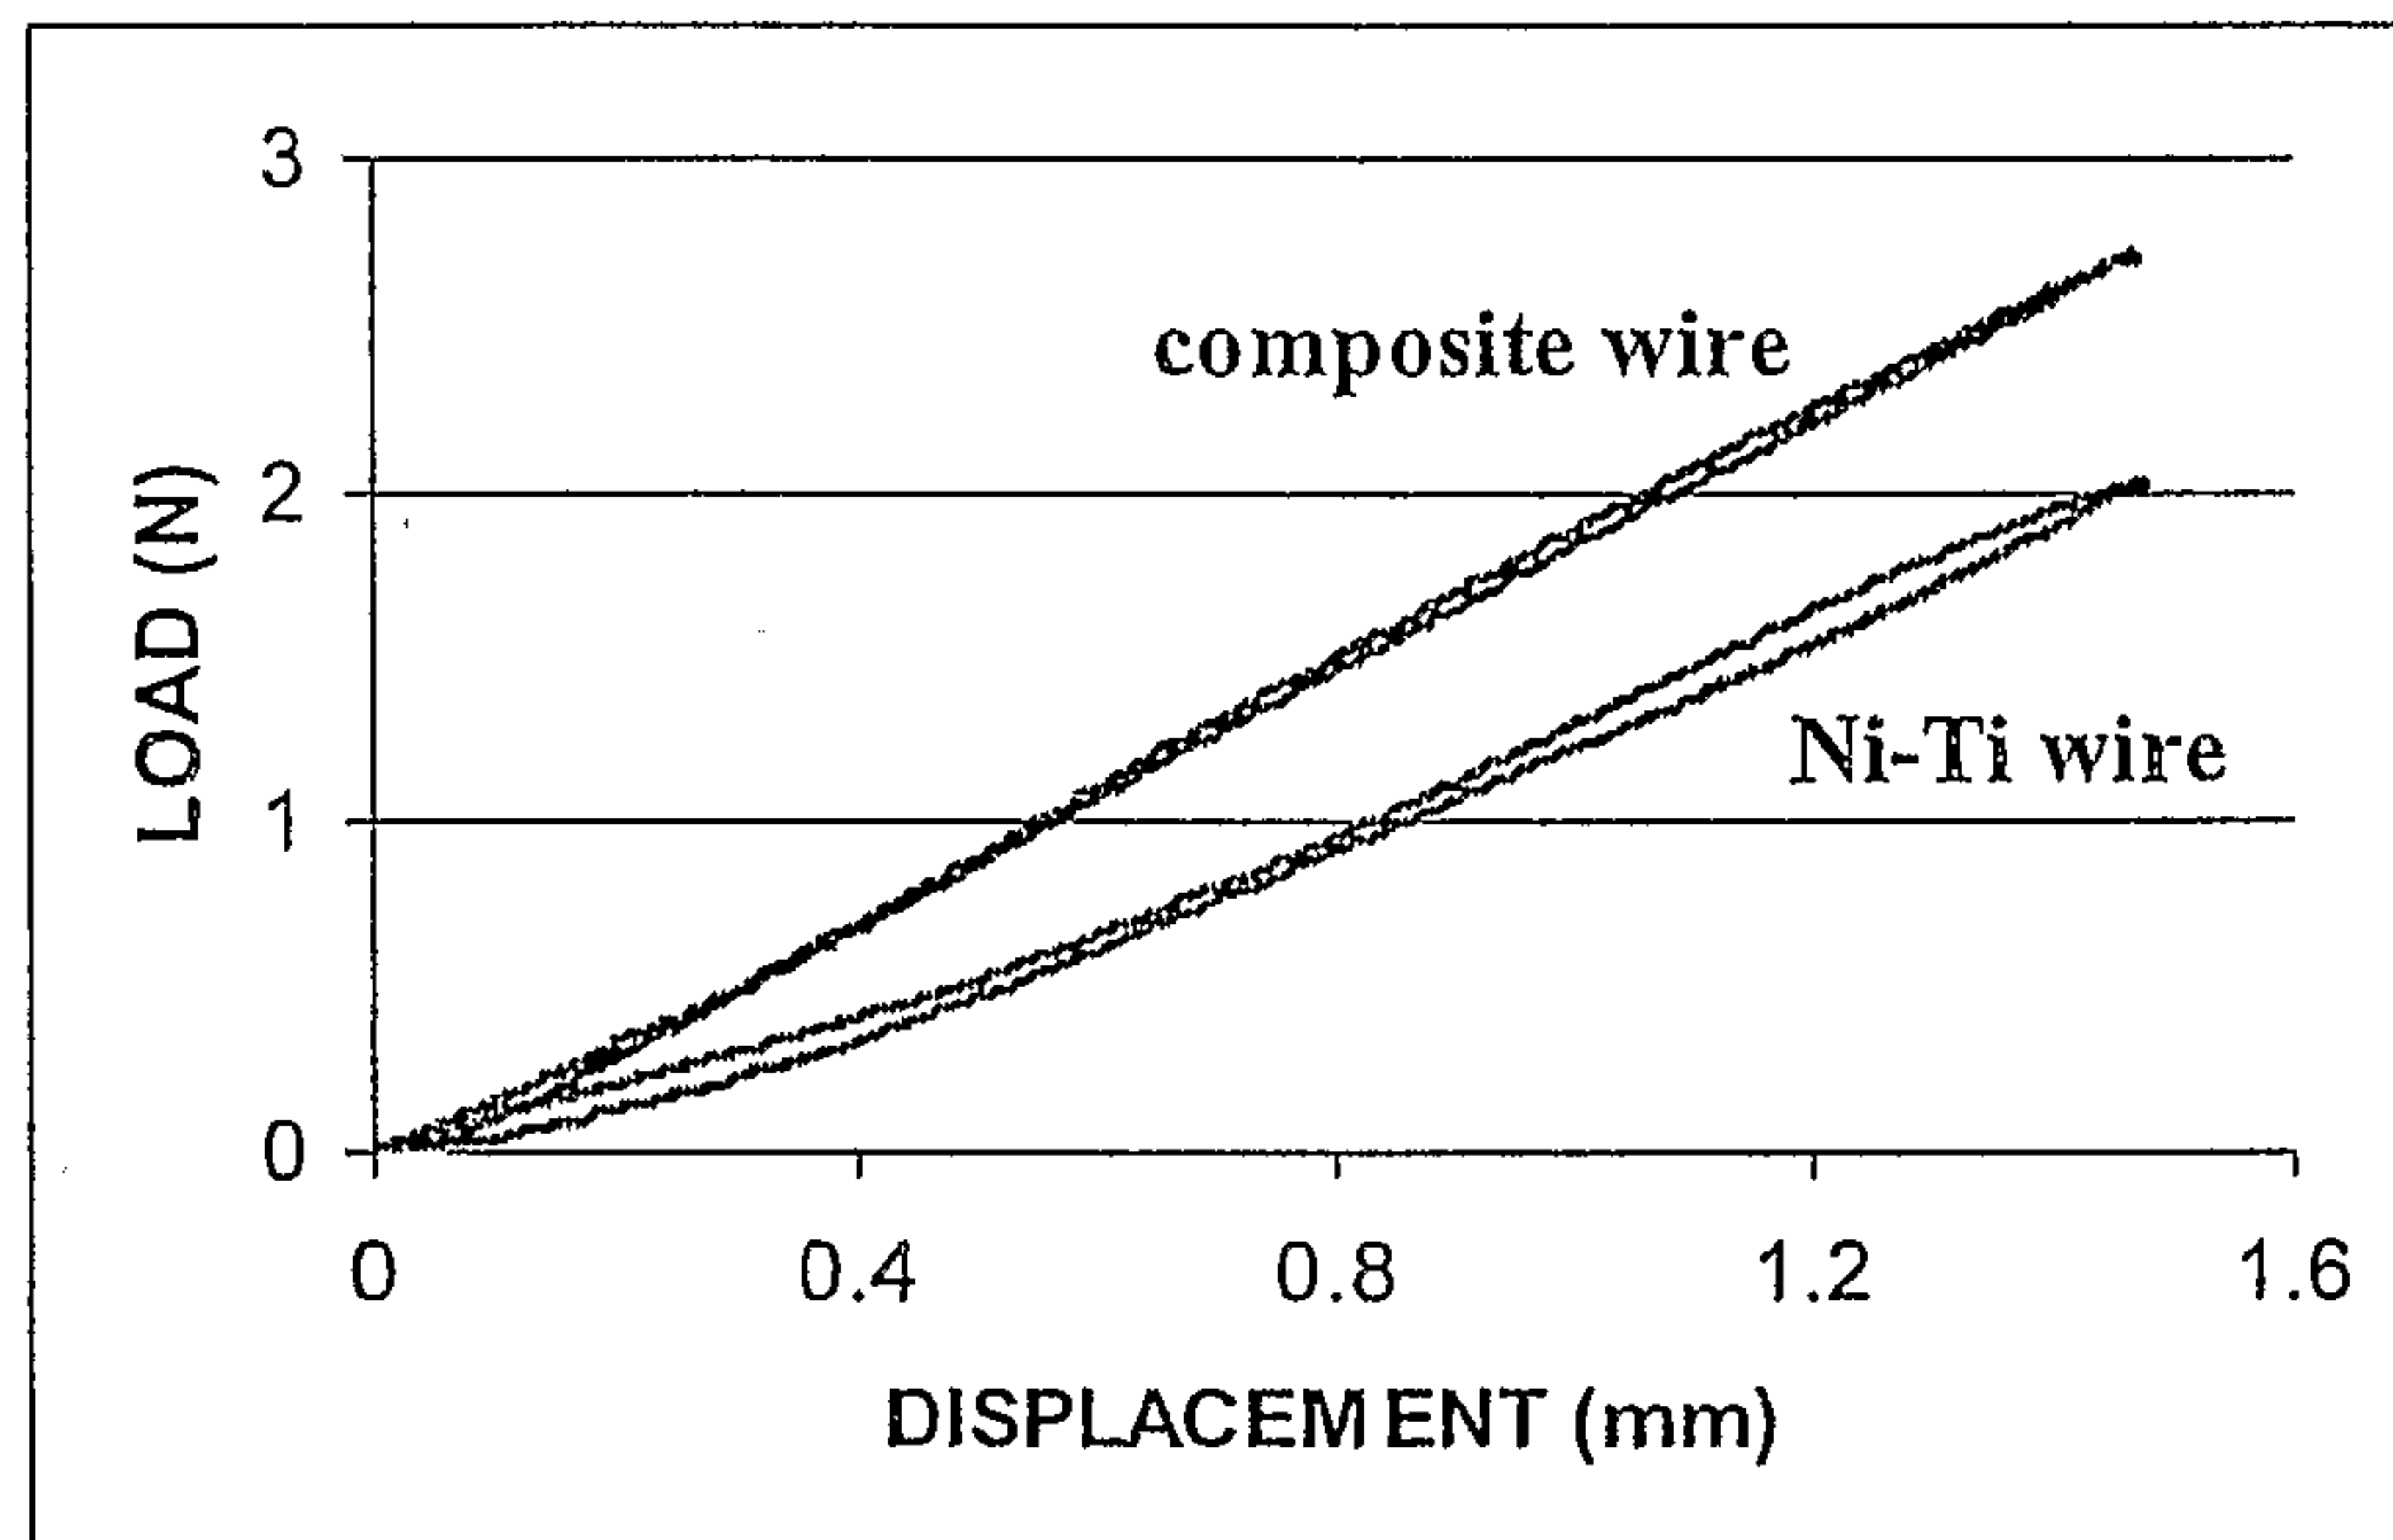


FIG. 6

START

PLACE COMPOSITE OF
FIBER AND RESIN IN
SHRINKABLE DIE

S102

S100

SHRINK DIE TO
SHAPE
COMPOSITE

S104

BEND DIE TO SHAPE
COMPOSITE LENGTHWISE

S106

CURE
COMPOSITE IN
DIE

S108

REMOVE
DIE

S110

END

