



(51) International Patent Classification:
H05B 3/74 (2006.01) **F24C 15/10** (2006.01)

(21) International Application Number:
PCT/EP2010/007572

(22) International Filing Date:
13 December 2010 (13.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09015395.8 12 December 2009 (12.12.2009) EP

(71) Applicant (for all designated States except US): **ELECTROLUX HOME PRODUCTS CORPORATION N. V.** [BE/BE]; Raketstraat, 40, B-1130 Brussel (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NEUKAMM, Alwin** [DE/DE]; Spitalstr. 6, 91452 Wilhelmsdorf (DE). **LEYH, Björn** [DE/DE]; Stifterweg 13, 74572 Blaustetten (DE). **SCHLÖTTERER-FRATOIANNI, Klaus** [DE/DE]; Flurstraße 3a, 91456 Diespeck (DE).

(74) Agent: **HOCHMUTH, Jürgen**; Electrolux Rothenburg GmbH Factory and Development, Group Intellectual Property, 90327 Nürnberg (DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CLAMPING CLAW

FIG 1

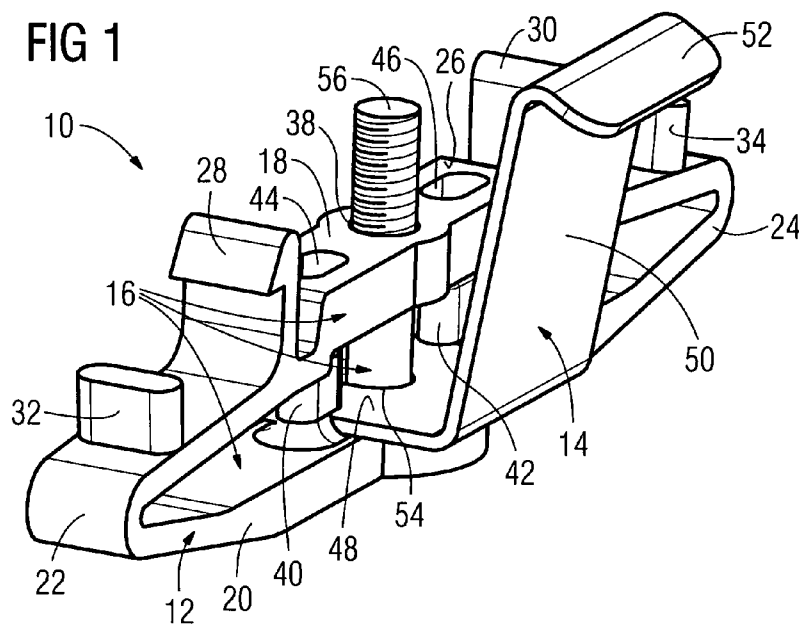

(57) Abstract: Clamping claw for fixing an appliance, which is inserted in an assembly opening of a carrier plate and rests with its rim on the top side of the carrier plate, wherein the clamping claw comprises a base element fixable to a lower portion of the appliance; at least one spring element, which is maintained at the base element and rests on the bottom side of the carrier plate in the assembled state of the clamping claw; and tensioning means being formed in such a manner that they tension the spring element along a clamp travel of pre-defined limited length.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

DescriptionClamping Claw

The present invention relates to a clamping claw designed for fixing an appliance, which is inserted in an assembly opening of a carrier plate and rests on the top side of the carrier plate, such as a ceramic stove top or the like.

A ceramic stove top is normally installed by inserting it into an assembly opening of a carrier plate, e.g. a kitchen counter-top, from above, such that a rim provided at the upper side of the stove top rests on the top side of the carrier plate. In order to reduce the clearance between the appliance and the carrier plate, clamping claws are provided, which pull the stove top downwards at high forces. Since the forces of today's clamping claws neither can be limited nor varied there is an imminent danger that the stove top and/or the carrier plate and/or the clamping claws are damaged.

Starting from this prior art technology it is an object of the present invention to provide a clamping claw of the above mentioned kind, which ensures a defined clamping force, that is variable depending on the intended field of application.

In order to solve this object the present invention provides a clamping claw of the above-mentioned kind comprising a base element fixable to a lower portion of the appliance; at least one spring element, which is maintained at the base element and rests on the bottom side of the carrier plate in the assembled state of the clamping claw; and tensioning means being formed in such a manner that they tension the spring element along a clamp travel of pre-defined limited length.

Due to the fact that the clamp travel of the spring element has a pre-defined limited length, also the maximum clamping force creatable by the clamping claw in regard to a special intended application is limited. Accordingly, a damaging of the appliance

and/or the carrier plate and/or the clamping claw itself can be prevented by properly limiting the maximum clamping force of the clamping claw with regard to the intended application by limiting the clamp travel of the spring element.

According to an embodiment of the present invention the tensioning means comprises an actuating element and oppositely arranged base element sections, which are relatively movable with respect to each other by operating the actuating element, whereas the spring element is arranged between the base element sections and rests on one of the base element sections in the assembled state of the clamping claw. Thus, the clamp travel of the spring element is essentially defined by the distance between the oppositely arranged base element sections at the maintaining position of the spring element.

Preferably, the actuating element is a screw, which extends through the oppositely arranged base element sections and causes, when operated, a relative movement between the base element sections and thus, in the assembled state of the clamping claw, a tensioning of the spring element resting on one of the base element sections as well as on the bottom side of the carrier plate. Such a screw leads to an inexpensive and simple design of the clamping claw and is easy to handle by a user.

The base element can be formed as a one-piece component and has a longish elastically deformable ring shape, wherein the actuating element extends through the oppositely arranged longish base element sections. Such a one-piece design of the element is advantageous with regard to the manufacture and the assembly of the clamping claw as well as with respect to the costs.

According to an embodiment of the present invention one of the base element sections is provided with at least one guiding projection facing towards the other base element section, and the other base element is provided with a corresponding guiding opening receiving the guiding projection during a relative movement between the base element sections. Accordingly, a guided

and uniform movement between the base element sections is ensured.

Preferably, spacers are provided, which project from the base element and are spaced apart from the actuating element, wherein the spacers are preferably made integral with the base element. Such spacers rest on a lower portion of the appliance in the assembled state of the clamping claw and promote a uniform deformation of the base element upon the actuation of the actuating element.

According to an embodiment of the present invention the base element comprises latching means, in particular latching hooks, for fixing the base element to the appliance, wherein the latching means are preferably made integral with the base element. Such latching hooks promote the ease of assembly.

The base element is preferably made of plastic material.

According to one embodiment of the present invention, the spring element essentially has a Z-form.

The spring element preferably is made of spring steel or of an elastic plastic material having similar characteristics.

In the following an embodiment of a clamping claw according to the present invention will be described with reference to the accompanying drawings, wherein

Figure 1 is a perspective view of a clamping claw according to an embodiment of the present invention;

Figure 2 is a perspective view of a base element of the clamping claw shown in figure 1 and

Figure 3 is a front view of the base element shown in figure 2.

Figure 1 shows a clamping claw 10 according to an embodiment of the present invention. The clamping claw 10 is designed for fixing an appliance, such as a ceramic stove top or the like, which is inserted in an assembly opening of a carrier plate and rests on the top side of a carrier plate. The clamping claw 10 comprises a base element 12 fixable to a lower portion of the appliance, a spring element 14, which is maintained at the base element 12 and rests on the bottom side of the carrier plate in the assembled state of the clamping claw 10, and a tensioning means 16 being formed in such a manner that it tensions the spring element 14 along a clamp travel D of pre-defined limited length.

The base element 12 is formed as a one-piece-component made of plastic material and has a longish elastically deformable ring shape. The ring shape is defined by two base element sections 18 and 20, which are oppositely arranged and extend in parallel, and by two essentially V-shaped base element connecting sections 22 and 24, which connect the base element sections 18 and 20. The upper base element section 18 is formed with a contact surface 26 at its outer side, which rests on an appliance to be fixed in the assembled state of the clamping claw 10. The base element connecting sections 22 and 24 are each provided with latching hooks 28 and 30 which are arranged next to the upper base element section 18 and extend upwards, such that they project beyond the contact surface 26 of the upper base element section 18. Moreover, the base element connecting sections 22 and 24 are both formed with upwardly extending spacers 32 and 34 on their upper sides. In the center portion of the upper base element section 18 and the lower base element section 20 through holes 36 and 38 are provided, which are aligned with each other and receive the tensioning means 16. On both sides of the through hole 36 the lower base element section 20 is formed with a guiding projection 40, 42 facing towards the upper base element section 18. The upper base element section 18 is provided with two corresponding guiding openings 44 and 46, which are aligned with and receive the guiding projection 40 and 42, re-

spectively, during a relative movement between the base element sections 18 and 20.

The spring element 14 is a one-piece component made of spring steel and essentially has a Z-shape, which is defined by a mounting section 48, a center section 50 and a supporting section 52. The mounting section 48 contacts the lower base element section 20 of the base element 12 and extends in parallel thereto, the center section 50 extends upwards from the mounting section 48 beyond the latching hooks 28 and 30 of the base element 12, and the joining supporting section 52 extends slightly downwards. The mounting section 48 of the spring element 14 is provided with a through hole 54 for receiving the tensioning means 16.

The tensioning means 16 is formed by a conventional screw 56 having a thread 58 and the two base element sections 18 and 20.

In order to fix an appliance, which is inserted in an assembly opening of a carrier plate and rests on the top side of the carrier plate, such as a ceramic stove top or the like, by means of a clamping claw 10, the clamping claw 10 is attached to the bottom wall of the appliance in close proximity to the bottom wall edge by inserting the latching hooks 28 and 30 of the base element 12 into corresponding latching openings formed in the bottom surface of the appliance. In this condition, the contact surface 26 rests on the bottom wall of the appliance, and the spring element 14 upwardly projects from the bottom wall of the appliance towards the bottom wall of the carrier plate and rests thereon. Thereafter, the screw 56 is screwed in a corresponding threaded bore of the appliance. Upon further tightening of the screw 56, the lower base element section is moved towards the upper base element section, such that the spring element 14 is tensioned in order to eliminate a clearance present between the appliance and the top side of the carrier plate. During this movement the spacers 32 and 34 come into contact with the bottom wall of the appliance and ensure a uniform deformation of the base element 12 while further tightening the screw 56. The maxi-

mum clamping force, which can be created in this manner, is limited by the distance D between the upper base element section 18 and lower base element section 20 essentially representing the clamp travel D of the spring element 14.

The maximum clamping force creatable by means of the clamping claw 10 can be varied by using a stronger or weaker spring element 14 or by providing several base elements 12 whose upper and lower base element sections 18 and 20 defined clamp travels D of different lengths. Thus, the clamping force of the clamping claw 10 can be adapted to different applications, e.g. carrier plates and/or appliances of different heights or the like.

List of reference numerals

10	clamping claw
12	base element
14	spring element
16	tensioning means
18	base element section
20	base element section
22	base element connecting section
24	base element connecting section
26	contact surface
28	latching hook
30	latching hook
32	spacer
34	spacer
36	through hole
38	through hole
40	guiding projection
42	guiding projection
44	guiding opening
46	guiding opening
48	mounting section
50	center section
52	supporting section
54	through hole
56	screw
58	thread
D	clamp travel

Claims

1. Clamping claw (10) designed for fixing an appliance, which is inserted in an assembly opening of a carrier plate and rests on the top side of the carrier plate, wherein the clamping claw (10) comprises a base element (12) fixable to a lower portion of the appliance; at least one spring element (14), which is maintained at the base element (12) and rests on the bottom side of the carrier plate in the assembled state of the clamping claw (10); and tensioning means (16) being formed in such a manner that they tension the spring element (14) along a clamp travel (D) of pre-defined limited length.
2. Clamping claw (10) according to claim 1, wherein the tensioning means (16) comprises an actuating element (56) and oppositely arranged base element sections (18, 20), which are relatively movable with respect to each other by operating the actuating element (56), whereas the spring element (14) is arranged between the base element sections (18, 20) and rests on one of the base element sections (20) in the assembled state of the clamping claw (10).
3. Clamping claw (10) according to claim 2, wherein the actuating element is a screw (56), which extends through the oppositely arranged base element sections (18, 20) and causes, when operated, a relative movement between the base element sections (18, 20) and thus, in the assembled state of the clamping claw (10), a tensioning of the spring element (14) resting on one of the base element sections (20) as well as on the bottom side of the carrier plate.
4. Clamping claw (10) according to claim 2 or 3, wherein the base element (12) is formed as a one-piece component and has a longish elastically deformable ring shape, wherein the actuating element (56) extends through the oppositely arranged longish base element sections (18, 20).

5. Clamping claw (10) according to one of the claims 2 to 4, wherein one of the base element section (20) is provided with at least one guiding projection (40, 42) facing towards the other base element section (18), and the other base element (18) is provided with a corresponding guiding opening (40, 42) receiving the guiding projection during a relative movement between the base element sections (18, 20).
6. Clamping claw (10) according to one of the claims 2 to 5, wherein spacers (32, 34) are provided, which project from the base element (12) and are spaced apart from the actuating element (56), wherein the spacers (32, 34) are preferably made integral with the base element (12).
7. Clamping claw (10) according to one of the foregoing claims, wherein the base element (12) comprises latching means (28, 30), in particular latching hooks, for fixing the base element (12) to the appliance, wherein the latching means (28, 30) are preferably made integral with the base element.
8. Clamping claw (10) according to one of the foregoing claims, wherein the base element (12) is made of plastic material.
9. Clamping claw (10) according to one of the foregoing claims, wherein the spring element (14) essentially has a Z-form.
10. Clamping claw (10) according to one of the foregoing claims, wherein the spring element (14) is made of spring steel or of an elastic plastic material.

1/1

FIG 1

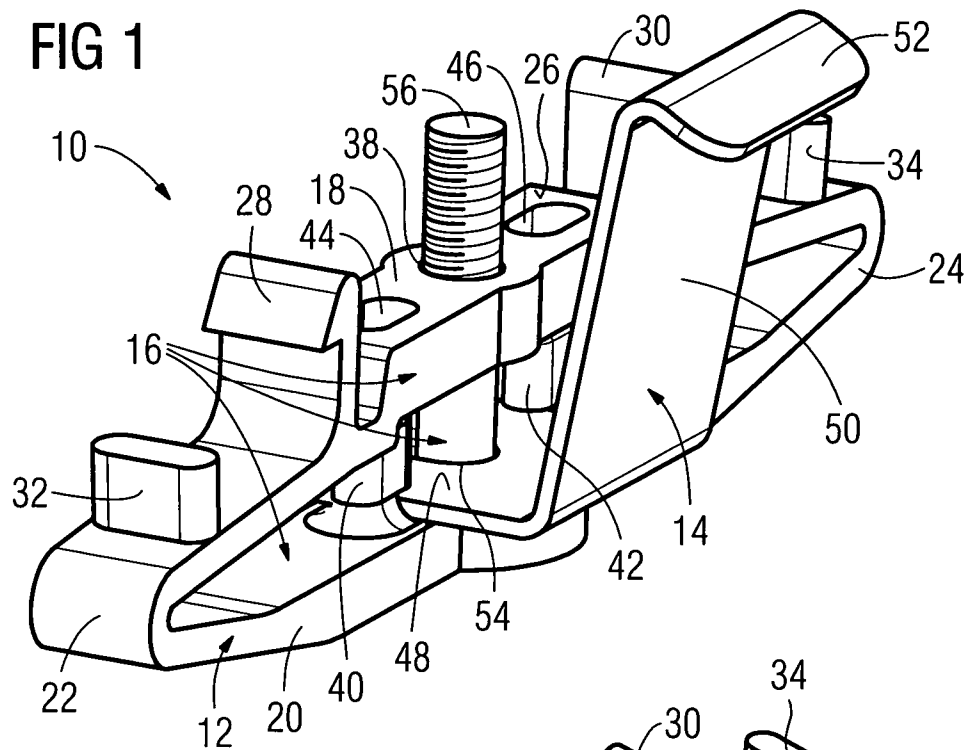


FIG 2


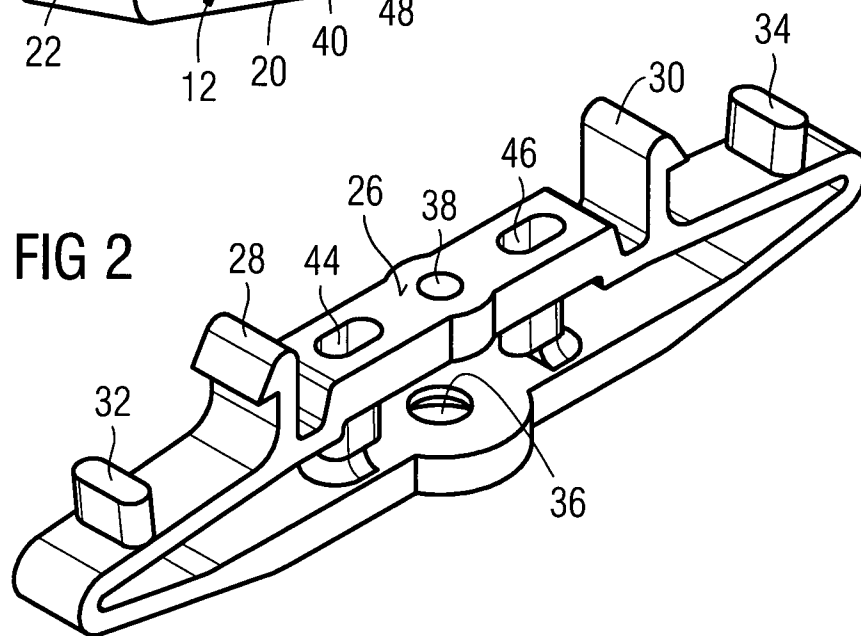


FIG 3

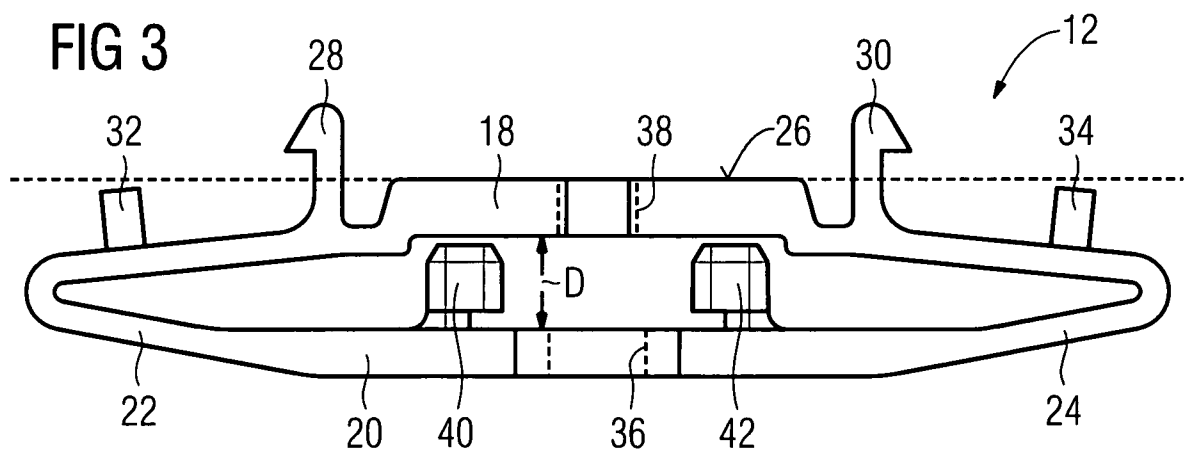

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/007572

A. CLASSIFICATION OF SUBJECT MATTER INV. H05B3/74 F24C15/10 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H05B F24C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 201 02 455 U1 (RAPID SA [FR]) 17 May 2001 (2001-05-17) * abstract page 2, line 17 - page 4, line 30 figures 1-3	1-10
X	----- EP 0 242 662 A2 (EGO ELEKTRO BLANC & FISCHER [DE]) 28 October 1987 (1987-10-28) * abstract column 7, line 33 - column 8, line 25 column 11, lines 20-39 figures 9,12	1
X	----- DE 195 30 365 C1 (MECANO RAPID GMBH [DE]) 2 October 1996 (1996-10-02) * abstract figure 1 column 3, line 38 - column 4, line 61 ----- -/--	1
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search	Date of mailing of the international search report	
29 March 2011	05/04/2011	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer de la Tassa Laforgue	

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/007572

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 632 983 A (DILLS RAYMOND L) 4 January 1972 (1972-01-04) * abstract column 2, line 69 - column 3, line 10 figure 2 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/007572

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 20102455	U1	17-05-2001	NONE
EP 0242662	A2	28-10-1987	DE 3613901 A1 29-10-1987 US 4788414 A 29-11-1988 YU 74387 A1 31-10-1989
DE 19530365	C1	02-10-1996	NONE
US 3632983	A	04-01-1972	NONE