



(51) International Patent Classification:

B32B 27/06 (2006.01) *C08F 4/64* (2006.01)
B32B 27/32 (2006.01) *C08L 23/08* (2006.01)
C08F 210/16 (2006.01)

(21) International Application Number:

PCT/US2015/037871

(22) International Filing Date:

26 June 2015 (26.06.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/017,525 26 June 2014 (26.06.2014) US
62/152,414 24 April 2015 (24.04.2015) US

(71) Applicant: **DOW GLOBAL TECHNOLOGIES LLC**
[US/US]; 2040 Dow Center, Midland, MI 48674 (US).

(72) Inventors: **WANG, Jian**; 2301 N. Brazosport Blvd., B-1470, Freeport, TX 77541 (US). **JAIN, Pradeep**; 2301 N. Brazosport Blvd, Freeport, TX 77541 (US). **DEMIRORS, Mehmet**; 2301 N. Brazosport Blvd., B-1470, Freeport, TX 77541 (US). **PATEL, Rajen M.**; 2301 N. Brazosport Blvd., Building 1607, Freeport, TX 77541 (US). **GUERRA, Suzanne M.**; 2301 N Brazosport Blvd, Freeport, TX 77541 (US). **LEANO, Mauricio E.**; 2301 N. Brazosport Blvd., B-1607, Freeport, TX 77541 (US).

(74) Agent: **LINK, J. Jason**; Dow Global Technologies LLC, 2030 Dow Center, Midland, Michigan 48674 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))



WO 2015/200742 A1

(54) Title: CAST FILMS WITH IMPROVED TOUGHNESS

(57) Abstract: Cast films formed from polyethylene are provided that can have desirable properties. In one aspect, a cast film comprises a layer formed from a composition comprising a first composition, wherein the first composition comprises at least one ethylene-based polymer and wherein the first composition comprises a MWCDCI value greater than 0.9, and a melt index ratio (I10/I2) that meets the following equation: $I10/I2 \geq 7.0 - 1.2 \times \log(I2)$.

CAST FILMS WITH IMPROVED TOUGHNESS

FIELD

The present invention relates generally to cast films and in some aspects, cast films having
5 improved toughness.

INTRODUCTION

Various polymerization techniques, using different catalyst systems, have been employed to
produce ethylene-based polymer compositions suitable for films. Ethylene-based polymer
compositions are described in the following references: US5844045 (see also US5869575 and
10 US6448341), US6566446, US5677383 (see also US6111023), US5977251, US2015/0148490,
US20150148491 and WO2014/058639. However, there remains a need for compositions that can be
used to form films with improved toughness, while maintaining a good balance of other film
physical properties, such as tear strength, puncture, and optics.

SUMMARY

15 The present invention utilizes ethylene-based polymers exhibiting certain features in the
formation of cast films with desirable properties. For example, in some embodiments, the cast films
have improved toughness (e.g., as measured by dart impact strength) as compared to cast films
formed from other ethylene-based polymers, while maintaining a good balance of other properties
(e.g., tear strength, optical properties, etc.).

20 In one aspect, the present invention provides a cast film comprising a layer formed from a
composition comprising a first composition, wherein the first composition comprises at least one
ethylene-based polymer and wherein the first composition comprises a MWCDI value greater than
0.9, and a melt index ratio (I10/I2) that meets the following equation: $I10/I2 \geq 7.0 - 1.2 \times \log(I2)$.

These and other embodiments are described in more detail in the Detailed Description.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 depicts the plot of “SCB_f versus IR5 Area Ratio” for ten SCB Standards.

Figure 2 depicts the several GPC profiles for the determination of IR5 Height Ratio for
Inventive First Composition 2.

Figure 3 depicts the plot of “SCB_f versus Polyethylene Equivalent molecular Log Mw_i
30 (GPC)” for Inventive First Composition 2.

Figure 4 depicts a plot of the “Mole Percent Comonomer versus Polyethylene Equivalent

Log M_{wi} (GPC) for Inventive First Composition 2.

Figure 5 depicts some GPC MWD profiles and corresponding comonomer distribution overlays for some inventive and comparative compositions (density 0.916-0.919 g/cc).

Figure 6 depicts some GPC MWD profiles and corresponding comonomer distribution overlays for some inventive and comparative compositions (density 0.924-0.926 g/cc).

Figure 7 depicts some GPC MWD profiles and corresponding comonomer distribution overlays for some inventive and comparative compositions (Cast stretch).

DETAILED DESCRIPTION

It has been discovered that the inventive compositions can be used to form inventive films with improved toughness. Such compositions contain an ethylene-based polymer that has a superior comonomer distribution, which is significantly higher in comonomer concentration, and a good distribution of comonomer, in the high molecular weight polymer molecules, and is significantly lower in comonomer concentration in the low molecular weight polymer molecules, as compared to conventional polymers of the art at the same overall density. It has also been discovered that the ethylene-based polymer has low LCB (Long Chain Branches), as indicated by low ZSVR, as compared to conventional polymers. As a result of this optimized distribution of the comonomer, as well as the inherent low LCB nature, the inventive compositions have more tie chains, and thus, improved film toughness. The inventive compositions can be useful in forming the inventive cast films of the present invention.

As discussed above, the invention provides a composition comprising a first composition, comprising at least one ethylene-based polymer, wherein the first composition comprises a MWCDI value greater than 0.9, and a melt index ratio (I10/I2) that meets the following equation:
$$I10/I2 \geq 7.0 - 1.2 \times \log (I2).$$

The inventive composition may comprise a combination of two or more embodiments described herein.

The first composition may comprise a combination of two or more embodiments as described herein.

The ethylene-based polymer may comprise a combination of two or more embodiments as described herein.

In one embodiment, the first composition has a MWCDI value less than, or equal to, 10.0, further less than, or equal to, 8.0, further less than, or equal to, 6.0.

In one embodiment, the first composition has a MWCDI value less than, or equal to, 5.0, further less than, or equal to, 4.0, further less than, or equal to, 3.0.

In one embodiment, the first composition has a MWCDI value greater than, or equal to, 1.0, further greater than, or equal to, 1.1, further greater than, or equal to, 1.2.

5 In one embodiment, the first composition has a MWCDI value greater than, or equal to, 1.3, further greater than, or equal to, 1.4, further greater than, or equal to, 1.5.

In one embodiment, the first composition has a melt index ratio I10/I2 greater than, or equal to, 7.0, further greater than, or equal to, 7.1, further greater than, or equal to, 7.2, further greater than, or equal to, 7.3.

10 In one embodiment, the first composition has a melt index ratio I10/I2 less than, or equal to, 9.2, further less than, or equal to, 9.0, further less than, or equal to, 8.8, further less than, or equal to, 8.5.

In one embodiment, the first composition has a ZSVR value from 1.2 to 3.0, further from 1.2 to 2.5, further 1.2 to 2.0.

15 In one embodiment, the first composition has a vinyl unsaturation level greater than 10 vinyls per 1,000,000 total carbons. For example, greater than 20 vinyls per 1,000,000 total carbons, or greater than 50 vinyls per 1,000,000 total carbons, or greater than 70 vinyls per 1,000,000 total carbons, or greater than 100 vinyls per 1,000,000 total carbons.

20 In one embodiment, the first composition has a density in the range of 0.910 to 0.940 g/cm³, for example from 0.910 to 0.930, or from 0.910 to 0.925 g/cm³. For example, the density can be from a lower limit of 0.910, 0.912, or 0.914 g/cm³, to an upper limit of 0.925, 0.927, or 0.930 g/cm³ (1 cm³ = 1 cc).

25 In one embodiment, the first composition has a melt index (I₂ or I₂; at 190°C / 2.16kg) from 0.1 to 50 g/10 minutes, for example from 0.1 to 30 g/10 minutes, or from 0.1 to 20 g/10 minutes, or from 0.1 to 10 g/10 minutes. For example, the melt index (I₂ or I₂; at 190°C / 2.16 kg) can be from a lower limit of 0.1, 0.2, or 0.5 g/10 minutes, to an upper limit of 1.0, 2.0, 3.0, 4.0, 5.0, 10, 15, 20, 25, 30, 40, or 50 g/10 minutes.

30 In one embodiment, the first composition has a molecular weight distribution, expressed as the ratio of the weight average molecular weight to number average molecular weight (M_w/M_n ; as determined by conv. GPC) in the range of from 2.2 to 5.0. For example, the molecular weight

distribution (M_w/M_n) can be from a lower limit of 2.2, 2.3, 2.4, 2.5, 3.0, 3.2, or 3.4, to an upper limit of 3.9, 4.0, 4.1, 4.2, 4.5, 5.0.

In one embodiment, the first composition has a number average molecular weight (M_n ; as determined by conv. GPC) in the range from 10,000 to 50,000 g/mole. For example, the number
5 average molecular weight can be from a lower limit of 10,000, 20,000, or 25,000 g/mole, to an upper limit of 35,000, 40,000, 45,000, or 50,000 g/mole.

In one embodiment, the first composition has a weight average molecular weight (M_w ; as determined by conv. GPC) in the range from 70,000 to 200,000 g/mole. For example, the number
10 average molecular weight can be from a lower limit of 70,000, 75,000, or 78,000 g/mole, to an upper limit of 120,000, 140,000, 160,000, 180,000 or 200,000 g/mole.

In one embodiment, the first composition has a melt viscosity ratio, $\text{Eta}^*_{0.1} / \text{Eta}^*_{100}$, in the range from 2.2 to 7.0. For example, the number average molecular weight can be from a lower limit of 2.2, 2.3, 2.4 or 2.5, to an upper limit of 6.0, 6.2, 6.5, or 7.0.

In one embodiment, the ethylene-based polymer is an ethylene/ α -olefin interpolymers, and
15 further an ethylene/ α -olefin copolymer.

In one embodiment, the first ethylene-based polymer is an ethylene/ α -olefin interpolymers, and further an ethylene/ α -olefin copolymer.

In one embodiment, the α -olefin has less than, or equal to, 20 carbon atoms. For example, the α -olefin comonomers may preferably have 3 to 10 carbon atoms, and more preferably 3 to 8
20 carbon atoms. Exemplary α -olefin comonomers include, but are not limited to, propylene, 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, and 4-methyl-1-pentene. The one or more α -olefin comonomers may, for example, be selected from the group consisting of propylene, 1-butene, 1-hexene, and 1-octene; or in the alternative, from the group consisting of 1-butene, 1-hexene and 1-octene, and further 1-hexene and 1-octene.

In one embodiment, the ethylene-based polymer, or first ethylene-based polymer, has a
25 molecular weight distribution (M_w/M_n ; as determined by conv. GPC) in the range from 1.5 to 4.0, for example, from 1.5 to 3.5, or from 2.0 to 3.0. For example, the molecular weight distribution (M_w/M_n) can be from a lower limit of 1.5, 1.7, 2.0, 2.1, or 2.2, to an upper limit of 2.5, 2.6, 2.8, 3.0, 3.5, or 4.0.

In one embodiment, the first composition further comprises a second ethylene-based polymer. In a further embodiment, the second ethylene-based polymer is an ethylene/ α -olefin interpolymer, and further an ethylene/ α -olefin copolymer, or a LDPE.

In one embodiment, the α -olefin has less than, or equal to, 20 carbon atoms. For example, 5 the α -olefin comonomers may preferably have 3 to 10 carbon atoms, and more preferably 3 to 8 carbon atoms. Exemplary α -olefin comonomers include, but are not limited to, propylene, 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, and 4-methyl-1-pentene. The one or more α -olefin comonomers may, for example, be selected from the group consisting of propylene, 1-butene, 1-hexene, and 1-octene; or in the alternative, from the group consisting of 1-butene, 10 1-hexene and 1-octene, and further 1-hexene and 1-octene.

In one embodiment, the second ethylene-based polymer is a heterogeneously branched ethylene/ α -olefin interpolymer, and further a heterogeneously branched ethylene/ α -olefin copolymer. Heterogeneously branched ethylene/ α -olefin interpolymers and copolymers are typically produced using Ziegler/Natta type catalyst system, and have more comonomer distributed in the lower 15 molecular weight molecules of the polymer.

In one embodiment, the second ethylene-based polymer has a molecular weight distribution (M_w/M_n) in the range from 3.0 to 5.0, for example from 3.2 to 4.6. For example, the molecular weight distribution (M_w/M_n) can be from a lower limit of 3.2, 3.3, 3.5, 3.7, or 3.9, to an upper limit of 4.6, 4.7, 4.8, 4.9, or 5.0.

20 In one embodiment, the composition comprises from 50 to 80 wt%, or from 50 to 85 wt%, or from 50 to 90 wt%, or from 50 to 95 wt% of the first composition, based on the weight of the composition.

In one embodiment, the composition comprises greater than or equal to 80 wt%, or greater than or equal to 85 wt%, or greater than or equal to 90 wt%, or greater than or equal to 95 wt%, or 25 greater than or equal to 98 wt% of the first composition, based on the weight of the composition.

In one embodiment, the composition further comprises another polymer. In a further embodiment, the polymer is selected from the following: a LLDPE, a VLDPE (a very low density polyethylene), a MDPE, a LDPE, a HDPE, a HMWHDPE (a high molecular weight HDPE), a propylene-based polymer, a polyolefin plastomer, a polyolefin elastomer, an olefin block copolymer, 30 an ethylene vinyl acetate, an ethylene acrylic acid, an ethylene methacrylic acid, an ethylene methyl

acrylate, an ethylene ethyl acrylate, an ethylene butyl acrylate, a polyisobutylene, a maleic anhydride-grafted polyolefin, an ionomer of any of the foregoing, or a combination thereof.

In one embodiment, the composition further comprises a LDPE. In a further embodiment, the LDPE is present in an amount from 5 to 50 wt%, further from 10 to 40 wt%, further from 15 to 30 wt%, based on the weight of the composition. In a further embodiment, the LDPE has a density from 0.915 to 0.930 g/cc, and a melt index (I2) from 0.15 to 30 g/10 min, further from 0.25 to 20 g/10 min.

In one embodiment, the composition further comprises one or more additives.

The invention also provides an article comprising at least one component formed from an inventive composition as described herein. In a further embodiment, the article is a film or a coating.

In some embodiments, the present invention relates to a cast film formed from any of the inventive compositions as described herein. In some embodiments, the cast film is a monolayer film. The cast film, in some embodiments, is a multilayer film. In some embodiments, the cast film comprises up to 35 layers.

In some embodiments, a cast film of the present invention has a thickness of up to 30 mils. For example, the cast film can have a thickness from a lower limit of 0.2 mils, 0.3 mils, 0.5 mils, 1.0 mil, 1.75 mils, or 2.0 mils to an upper limit of 10 mils, 15 mils, 20 mils, 25 mils, or 30 mils.

A cast film of the present invention, in some embodiments, comprises at least 20 percent by weight of the inventive composition, preferably at least 30 percent by weight of the inventive composition, and more preferably at least 40 percent by weight of the inventive composition.

In some embodiments where the cast film is a multilayer film, the film can further comprise a second layer, wherein the second layer comprises a polymer selected from the following: the inventive composition, a LLDPE, a VLDPE (a very low density polyethylene), a MDPE, a LDPE, a HDPE, a HMWHDPE (a high molecular weight HDPE), a propylene-based polymer, a polyolefin plastomer, a polyolefin elastomer, an olefin block copolymer, an ethylene vinyl acetate, an ethylene acrylic acid, an ethylene methacrylic acid, an ethylene methyl acrylate, an ethylene ethyl acrylate, an ethylene butyl acrylate, an isobutylene, a maleic anhydride-grafted polyolefin, an ionomer of any of the foregoing, or a combination thereof. The cast film, in some embodiments, can comprise a third layer, wherein the third layer comprises a polymer selected from the following: the first composition, a LLDPE, a VLDPE, a LDPE, a MDPE, a HDPE, a HMWHDPE, a propylene-based

polymer, a polyolefin plastomer, a polyolefin elastomer, an olefin block copolymer, an ethylene vinyl acetate, an ethylene acrylic acid, an ethylene methacrylic acid, an ethylene methyl acrylate, an ethylene ethyl acrylate, an ethylene butyl acrylate, an isobutylene, a maleic anhydride-grafted polyolefin, an ionomer of any of the foregoing, or a combination thereof.

5 A multilayer cast film can comprise up to 2, 3, 4, 5, 6, 7, 8, 9, 10, or 11 layers in various embodiments.

In some embodiments, the inventive composition used in the layer of cast film has a density in the range of 0.885 to 0.945 g/cm³, for example from 0.895 to 0.940, or from 0.905 to 0.935 g/cm³, or from 0.910 to 0.928 g/cm³. For example, the density can be from a lower limit of 0.885, 0.895,
10 0.905, or 0.910 g/cm³, to an upper limit of 0.928, 0.935, 0.940, or 0.945 g/cm³ (1 cm³ = 1 cc).

In one embodiment, the inventive composition used in the layer of cast film has a melt index (I₂ or I₂; at 190°C / 2.16kg) from 0.5 to 30 g/10 minutes, for example from 1 to 15 g/10 minutes, or from 2 to 10 g/10 minutes. For example, the melt index (I₂ or I₂; at 190°C / 2.16 kg) can be from a lower limit of 0.5, 1, or 2 g/10 minutes, to an upper limit of 10, 15, or 30 g/10 minutes.

15 In some embodiments, the cast film can be stretched up to 300% elongation in machine direction.

In some embodiments, the cast film comprising a layer formed from the inventive composition can be laminated to another film or a woven structure.

In some embodiments, a cast film of the present invention can comprise coextruded
20 multilayer films comprising a core component that is a nanolayer structure. In such embodiments, the core component can be a layer comprising any of the inventive compositions disclosed herein. In some embodiments, the core component comprises 15 to 4,000 layers (sublayers). Each layer (sublayer) can have a thickness of 10 nanometers to 10 microns in some embodiments. In some embodiments, the layers (sublayers) in the core component comprise two or more types of films.

25 Cast films of the present invention can be incorporated into a variety of articles including, for example, food packages, industrial and consumer packaging materials, foamed films, and others.

Food packages can comprise a cast film according to the present invention. A variety of food items known to those of skill in the art can be provided in such food packages including, for example, solid foods, liquids, beverages, cooking ingredients (e.g., sugar, flour, etc.), etc.

30 Exemplary food packaging materials include films for packaging baked goods, candy wrap, cheese, and others.

Industrial and consumer packaging materials can comprise a cast film according to the present invention. Exemplary industrial and consumer packaging materials include stretch wrap, silage wrap, protective films, and others. In embodiments related to silage wraps, in some embodiments, the silage wrap can further comprise polyisobutylene.

5 **Polymerization**

Polymerization processes include, but are not limited to, solution polymerization processes, using one or more conventional reactors, e.g., loop reactors, isothermal reactors, adiabatic reactors, stirred tank reactors, autoclave reactors in parallel, series, and/or any combinations thereof. The ethylene based polymer compositions may, for example, be produced via solution phase
10 polymerization processes, using one or more loop reactors, adiabatic reactors, and combinations thereof.

In general, the solution phase polymerization process occurs in one or more well mixed reactors, such as one or more loop reactors and/or one or more adiabatic reactors at a temperature in the range from 115 to 250°C; for example, from 135 to 200°C, and at pressures in the range of from
15 300 to 1000 psig, for example, from 450 to 750 psig.

In one embodiment, the ethylene based polymer composition (e.g., the first composition of claim 1) may be produced in two loop reactors in series configuration, the first reactor temperature is in the range from 115 to 200°C, for example, from 135 to 165°C, and the second reactor temperature is in the range from 150 to 210°C, for example, from 185 to 200°C. In another embodiment, the
20 ethylene based polymer composition may be produced in a single reactor, the reactor temperature is in the range from 115 to 200°C, for example from 130 to 190°C. The residence time in a solution phase polymerization process is typically in the range from 2 to 40 minutes, for example from 5 to 20 minutes. Ethylene, solvent, one or more catalyst systems, optionally one or more cocatalysts, and optionally one or more comonomers, are fed continuously to one or more reactors. Exemplary
25 solvents include, but are not limited to, isoparaffins. For example, such solvents are commercially available under the name ISOPAR E from ExxonMobil Chemical. The resultant mixture of the ethylene based polymer composition and solvent is then removed from the reactor or reactors, and the ethylene based polymer composition is isolated. Solvent is typically recovered via a solvent recovery unit, i.e., heat exchangers and separator vessel, and the solvent is then recycled back into
30 the polymerization system.


In one embodiment, the ethylene based polymer composition may be produced, via a solution polymerization process, in a dual reactor system, for example a dual loop reactor system, wherein ethylene, and optionally one or more α -olefins, are polymerized in the presence of one or more catalyst systems, in one reactor, to produce a first ethylene-based polymer, and ethylene, and optionally one or more α -olefins, are polymerized in the presence of one or more catalyst systems, in a second reactor, to produce a second ethylene-based polymer. Additionally, one or more cocatalysts may be present.

In another embodiment, the ethylene based polymer composition may be produced via a solution polymerization process, in a single reactor system, for example, a single loop reactor system, wherein ethylene, and optionally one or more α -olefins, are polymerized in the presence of one or more catalyst systems. Additionally, one or more cocatalysts may be present.

As discussed above, the invention provides a process to form a composition comprising at least two ethylene-based polymers, said process comprising the following:

polymerizing ethylene, and optionally at least one comonomer, in solution, in the present of a catalyst system comprising a metal-ligand complex of Structure I, to form a first ethylene-based polymer; and

polymerizing ethylene, and optionally at least one comonomer, in the presence of a catalyst system comprising a Ziegler/Natta catalyst, to form a second ethylene-based polymer; and wherein Structure I is as follows:

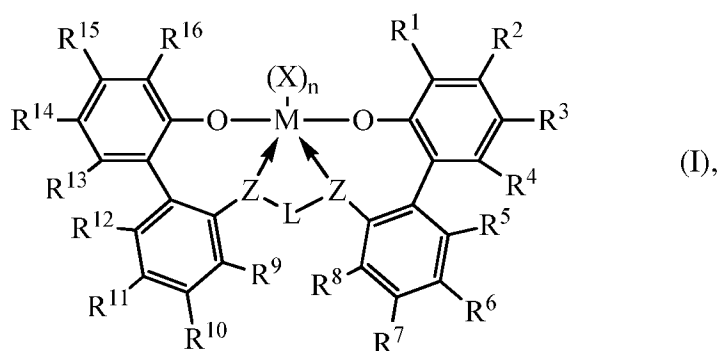

20

wherein:


M is titanium, zirconium, or hafnium, each, independently, being in a formal oxidation state of +2, +3, or +4; and

n is an integer from 0 to 3, and wherein when n is 0, X is absent; and

each X, independently, is a monodentate ligand that is neutral, monoanionic, or dianionic; or two Xs are taken together to form a bidentate ligand that is neutral, monoanionic, or dianionic; and

X and n are chosen, in such a way, that the metal-ligand complex of formula (I) is, overall, neutral; and

5 each Z, independently, is O, S, N(C₁-C₄₀)hydrocarbyl, or P(C₁-C₄₀)hydrocarbyl; and wherein the Z-L-Z fragment is comprised of formula (1):



R¹ through R¹⁶ are each, independently, selected from the group consisting of the following: a substituted or unsubstituted (C₁-C₄₀)hydrocarbyl, a substituted or unsubstituted
 10 (C₁-C₄₀)heterohydrocarbyl, Si(R^C)₃, Ge(R^C)₃, P(R^P)₂, N(R^N)₂, OR^C, SR^C, NO₂, CN, CF₃, R^CS(O)-, R^CS(O)₂-, (R^C)₂C=N-, R^CC(O)O-, R^COC(O)-, R^CC(O)N(R)-, (R^C)₂NC(O)-, halogen atom, hydrogen atom; and wherein each R^C is independently a (C₁-C₃₀)hydrocarbyl; R^P is a (C₁-C₃₀)hydrocarbyl; and R^N is a (C₁-C₃₀)hydrocarbyl; and

15 wherein, optionally, two or more R groups (from R¹ through R¹⁶) can combine together into one or more ring structures, with such ring structures each, independently, having from 3 to 50 atoms in the ring, excluding any hydrogen atom.

An inventive process may comprise a combination of two or more embodiments as described herein.


20 In one embodiment, said process comprises polymerizing ethylene, and optionally at least one α -olefin, in solution, in the presence of a catalyst system comprising a metal-ligand complex of Structure I, to form a first ethylene-based polymer; and polymerizing ethylene, and optionally at least one α -olefin, in the presence of a catalyst system comprising a Ziegler/Natta catalyst, to form a second ethylene-based polymer. In a further embodiment, each α -olefin is independently a C₁-C₈ α -olefin.

25 In one embodiment, optionally, two or more R groups from R⁹ through R¹³, or R⁴ through R⁸ can combine together into one or more ring structures, with such ring structures each, independently, having from 3 to 50 atoms in the ring, excluding any hydrogen atom.

In one embodiment, M is hafnium.

In one embodiment, R^3 and R^{14} are each independently an alkyl, and further a C1-C3 alkyl, and further methyl.


In one embodiment, R^1 and R^{16} are each as follows:



5 In one embodiment, each of the aryl, heteroaryl, hydrocarbyl, heterohydrocarbyl, $Si(R^C)_3$, $Ge(R^C)_3$, $P(R^P)_2$, $N(R^N)_2$, OR^C , SR^C , $R^C S(O)-$, $R^C S(O)_2-$, $(R^C)_2 C=N-$, $R^C C(O)O-$, $R^C OC(O)-$, $R^C C(O)N(R)-$, $(R^C)_2 NC(O)-$, hydrocarbylene, and heterohydrocarbylene groups, independently, is unsubstituted or substituted with one or more R^S substituents; and each R^S independently is a
 10 halogen atom, polyfluoro substitution, perfluoro substitution, unsubstituted (C_1-C_{18}) alkyl, F_3C- , FCH_2O- , F_2HCO- , F_3CO- , R_3Si- , R_3Ge- , $RO-$, $RS-$, $RS(O)-$, $RS(O)_2-$, R_2P- , R_2N- , $R_2C=N-$, $NC-$, $RC(O)O-$, $ROC(O)-$, $RC(O)N(R)-$, or $R_2NC(O)-$, or two of the R^S are taken together to form an unsubstituted (C_1-C_{18}) alkylene, wherein each R independently is an unsubstituted (C_1-C_{18}) alkyl.

In one embodiment, two or more of R^1 through R^{16} do not combine to form one or more ring structures.

15 In one embodiment, the catalyst system suitable for producing the first ethylene/ α -olefin interpolpolymer is a catalyst system comprising bis((2-oxoyl-3-(dibenzo-1H-pyrrole-1-yl)-5-(methyl)phenyl)-2-phenoxyethyl)-methylene-1,2-cyclohexanediylhafnium (IV) dimethyl, represented by the following Structure: IA:

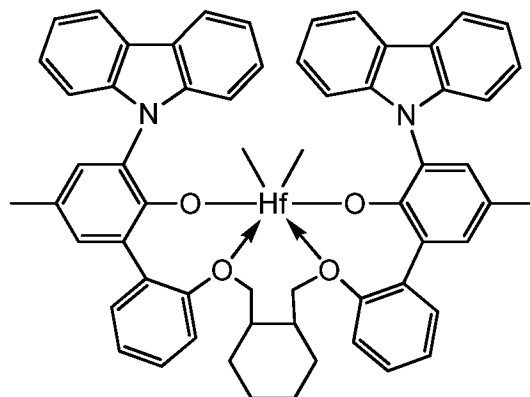

(IA).

20 The Ziegler/Natta catalysts suitable for use in the invention are typical supported, Ziegler-type catalysts, which are particularly useful at the high polymerization temperatures of the solution

process. Examples of such compositions are those derived from organomagnesium compounds, alkyl halides or aluminum halides or hydrogen chloride, and a transition metal compound. Examples of such catalysts are described in U.S. Pat Nos. 4,612,300; 4,314,912; and 4,547,475; the teachings of which are incorporated herein by reference.

5 Particularly suitable organomagnesium compounds include, for example, hydrocarbon soluble dihydrocarbylmagnesium, such as the magnesium dialkyls and the magnesium diaryls. Exemplary suitable magnesium dialkyls include, particularly, n-butyl-sec-butylmagnesium, diisopropylmagnesium, di-n-hexylmagnesium, isopropyl-n-butyl-magnesium, ethyl-n-hexyl-magnesium, ethyl-n-butylmagnesium, di-n-octylmagnesium, and others, wherein the alkyl has from
10 1 to 20 carbon atoms. Exemplary suitable magnesium diaryls include diphenylmagnesium, dibenzylmagnesium and ditolylmagnesium. Suitable organomagnesium compounds include alkyl and aryl magnesium alkoxides and aryloxides and aryl and alkyl magnesium halides, with the halogen-free organomagnesium compounds being more desirable.

 Halide sources include active non-metallic halides, metallic halides, and hydrogen chloride.
15 Suitable non-metallic halides are represented by the formula R'X, wherein R' is hydrogen or an active monovalent organic radical, and X is a halogen. Particularly suitable non-metallic halides include, for example, hydrogen halides and active organic halides, such as t-alkyl halides, allyl halides, benzyl halides and other active hydrocarbyl halides. By an active organic halide is meant a hydrocarbyl halide that contains a labile halogen at least as active, i.e., as easily lost to another
20 compound, as the halogen of sec-butyl chloride, preferably as active as t-butyl chloride. In addition to the organic monohalides, it is understood that organic dihalides, trihalides and other polyhalides that are active, as defined hereinbefore, are also suitably employed. Examples of preferred active non-metallic halides, include hydrogen chloride, hydrogen bromide, t-butyl chloride, t-amyl bromide, allyl chloride, benzyl chloride, crotyl chloride, methylvinyl carbinyl chloride, a-
25 phenylethyl bromide, diphenyl methyl chloride, and the like. Most preferred are hydrogen chloride, t-butyl chloride, allyl chloride and benzyl chloride.

 Suitable metallic halides include those represented by the formula $MR_{y-a}X_a$, wherein: M is a metal of Groups IIB, IIIA or IVA of Mendeleev's periodic Table of Elements; R is a monovalent organic radical; X is a halogen; y has a value corresponding to the valence of M; and "a" has a
30 value from 1 to y. Preferred metallic halides are aluminum halides of the formula $AlR_{3-a}X_a$, wherein each R is independently hydrocarbyl, such as alkyl; X is a halogen; and a is a number from

1 to 3. Most preferred are alkylaluminum halides, such as ethylaluminum sesquichloride, diethylaluminum chloride, ethylaluminum dichloride, and diethylaluminum bromide, with ethylaluminum dichloride being especially preferred. Alternatively, a metal halide, such as aluminum trichloride, or a combination of aluminum trichloride with an alkyl aluminum halide, or a trialkyl aluminum compound may be suitably employed.

Any of the conventional Ziegler-Natta transition metal compounds can be usefully employed, as the transition metal component in preparing the supported catalyst component. Typically, the transition metal component is a compound of a Group IVB, VB, or VIB metal. The transition metal component is generally, represented by the formulas: $\text{TrX}'_{4-q}(\text{OR}1)_q$, $\text{TrX}'_{4-q}(\text{R}2)_q$, VOX'_3 and $\text{VO}(\text{OR})_3$.

Tr is a Group IVB, VB, or VIB metal, preferably a Group IVB or VB metal, preferably titanium, vanadium or zirconium; q is 0 or a number equal to, or less than, 4; X' is a halogen, and R1 is an alkyl group, aryl group or cycloalkyl group having from 1 to 20 carbon atoms; and R2 is an alkyl group, aryl group, aralkyl group, substituted aralkyls, and the like.

The aryl, aralkyls and substituted aralkyls contain 1 to 20 carbon atoms, preferably 1 to 10 carbon atoms. When the transition metal compound contains a hydrocarbyl group, R2, being an alkyl, cycloalkyl, aryl, or aralkyl group, the hydrocarbyl group will preferably not contain an H atom in the position beta to the metal carbon bond. Illustrative, but non-limiting, examples of aralkyl groups are methyl, neopentyl, 2,2-dimethylbutyl, 2,2-dimethylhexyl; aryl groups such as benzyl; cycloalkyl groups such as 1-norbornyl. Mixtures of these transition metal compounds can be employed if desired.

Illustrative examples of the transition metal compounds include TiCl_4 , TiBr_4 , $\text{Ti}(\text{OC}_2\text{H}_5)_3\text{Cl}$, $\text{Ti}(\text{OC}_2\text{H}_5)\text{Cl}_3$, $\text{Ti}(\text{OC}_4\text{H}_9)_3\text{Cl}$, $\text{Ti}(\text{OC}_3\text{H}_7)_2\text{Cl}_2$, $\text{Ti}(\text{OC}_6\text{H}_{13})_2\text{Cl}_2$, $\text{Ti}(\text{OC}_8\text{H}_{17})_2\text{Br}_2$, and $\text{Ti}(\text{OC}_{12}\text{H}_{25})\text{Cl}_3$, $\text{Ti}(\text{O}-i\text{C}_3\text{H}_7)_4$, and $\text{Ti}(\text{O}-n\text{C}_4\text{H}_9)_4$. Illustrative examples of vanadium compounds include VCl_4 , VOCl_3 , $\text{VO}(\text{OC}_2\text{H}_5)_3$, and $\text{VO}(\text{OC}_4\text{H}_9)_3$. Illustrative examples of zirconium compounds include ZrCl_4 , $\text{ZrCl}_3(\text{OC}_2\text{H}_5)$, $\text{ZrCl}_2(\text{OC}_2\text{H}_5)_2$, $\text{ZrCl}(\text{OC}_2\text{H}_5)_3$, $\text{Zr}(\text{OC}_2\text{H}_5)_4$, $\text{ZrCl}_3(\text{OC}_4\text{H}_9)$, $\text{ZrCl}_2(\text{OC}_4\text{H}_9)_2$, and $\text{ZrCl}(\text{OC}_4\text{H}_9)_3$.

An inorganic oxide support may be used in the preparation of the catalyst, and the support may be any particulate oxide, or mixed oxide which has been thermally or chemically dehydrated, such that it is substantially free of adsorbed moisture. See U. S. Pat Nos. 4,612,300; 4,314,912; and 4,547,475; the teachings of which are incorporated herein by reference.

In one embodiment, the composition comprises a MWCDI value greater than 0.9.

In one embodiment, the composition comprises a melt index ratio (I10/I2) that meets the following equation: $I10/I2 \geq 7.0 - 1.2 \times \log(I2)$.

The composition may comprise one embodiment, or a combination of two or more
5 embodiments, as listed above for the “first composition.”

An inventive process may comprise a combination of two or more embodiments described herein.

Co-catalyst Component

The above described catalyst systems can be rendered catalytically active by contacting it to,
10 or combining it with, the activating co-catalyst, or by using an activating technique, such as those known in the art, for use with metal-based olefin polymerization reactions. Suitable activating co-catalysts, for use herein, include alkyl aluminums; polymeric or oligomeric alumoxanes (also known as aluminoxanes); neutral Lewis acids; and non-polymeric, non-coordinating, ion-forming compounds (including the use of such compounds under oxidizing conditions). A suitable activating
15 technique is bulk electrolysis. Combinations of one or more of the foregoing activating co-catalysts and techniques are also contemplated. The term “alkyl aluminum” means a monoalkyl aluminum dihydride or monoalkylaluminum dihalide, a dialkyl aluminum hydride or dialkyl aluminum halide, or a trialkylaluminum. Aluminoxanes and their preparations are known at, for example, U.S. Patent 6,103,657. Examples of preferred polymeric or oligomeric alumoxanes are methylalumoxane,
20 triisobutylaluminum-modified methylalumoxane, and isobutylalumoxane.

Exemplary Lewis acid activating co-catalysts are Group 13 metal compounds containing from 1 to 3 hydrocarbyl substituents as described herein. In some embodiments, exemplary Group 13 metal compounds are tri(hydrocarbyl)-substituted-aluminum or tri(hydrocarbyl)-boron
25 compounds. In some other embodiments, exemplary Group 13 metal compounds are tri(hydrocarbyl)-substituted-aluminum or tri(hydrocarbyl)-boron compounds are tri((C₁-C₁₀)alkyl)aluminum or tri((C₆-C₁₈)aryl)boron compounds and halogenated (including perhalogenated) derivatives thereof. In some other embodiments, exemplary Group 13 metal compounds are tris(fluoro-substituted phenyl)boranes, in other embodiments, tris(pentafluorophenyl)borane. In some embodiments, the activating co-catalyst is a
30 tris((C₁-C₂₀)hydrocarbyl) borate (e.g., trityl tetrafluoroborate) or a tris((C₁-C₂₀)hydrocarbyl)ammonium tetra((C₁-C₂₀)hydrocarbyl)borane (e.g.,

bis(octadecyl)methylammonium tetrakis(pentafluorophenyl)borane). As used herein, the term “ammonium” means a nitrogen cation that is a $((C_1-C_{20})\text{hydrocarbyl})_4N^+$, a $((C_1-C_{20})\text{hydrocarbyl})_3N(H)^+$, a $((C_1-C_{20})\text{hydrocarbyl})_2N(H)_2^+$, $(C_1-C_{20})\text{hydrocarbyl}N(H)_3^+$, or $N(H)_4^+$, wherein each $(C_1-C_{20})\text{hydrocarbyl}$ may be the same or different.

5 Exemplary combinations of neutral Lewis acid activating co-catalysts include mixtures comprising a combination of a tri((C_1-C_4) alkyl)aluminum and a halogenated tri((C_6-C_{18}) aryl)boron compound, especially a tris(pentafluorophenyl)borane. Other exemplary embodiments are combinations of such neutral Lewis acid mixtures with a polymeric or oligomeric alumoxane, and combinations of a single neutral Lewis acid, especially tris(pentafluorophenyl)borane with a
10 polymeric or oligomeric alumoxane. Exemplary embodiments ratios of numbers of moles of (metal-ligand complex):(tris(pentafluoro-phenylborane):(alumoxane) [e.g., (Group 4 metal-ligand complex):(tris(pentafluoro-phenylborane):(alumoxane)] are from 1:1:1 to 1:10:30, other exemplary embodiments are from 1:1:1.5 to 1:5:10.

Many activating co-catalysts and activating techniques have been previously taught, with
15 respect to different metal-ligand complexes, in the following U.S. patents: US 5,064,802; US 5,153,157; US 5,296,433; US 5,321,106; US 5,350,723; US 5,425,872; US 5,625,087; US 5,721,185; US 5,783,512; US 5,883,204; US 5,919,983; US 6,696,379; and US 7,163,907. Examples of suitable hydrocarbyloxides are disclosed in US 5,296,433. Examples of suitable Bronsted acid salts for addition polymerization catalysts are disclosed in US 5,064,802;
20 US 5,919,983; US 5,783,512. Examples of suitable salts of a cationic oxidizing agent and a non-coordinating, compatible anion, as activating co-catalysts for addition polymerization catalysts, are disclosed in US 5,321,106. Examples of suitable carbenium salts as activating co-catalysts for addition polymerization catalysts are disclosed in US 5,350,723. Examples of suitable silylium salts, as activating co-catalysts for addition polymerization catalysts, are disclosed in US 5,625,087.
25 Examples of suitable complexes of alcohols, mercaptans, silanols, and oximes with tris(pentafluorophenyl)borane are disclosed in US 5,296,433. Some of these catalysts are also described in a portion of US 6,515,155 B1, beginning at column 50, at line 39, and going through column 56, at line 55, only the portion of which is incorporated by reference herein.

In some embodiments, the above described catalyst systems can be activated to form an
30 active catalyst composition by combination with one or more cocatalyst, such as a cation forming

cocatalyst, a strong Lewis acid, or a combination thereof. Suitable cocatalysts for use include polymeric or oligomeric aluminoxanes, especially methyl aluminoxane, as well as inert, compatible, noncoordinating, ion forming compounds. Exemplary suitable cocatalysts include, but are not limited to, modified methyl aluminoxane (MMAO), bis(hydrogenated tallow alkyl)methyl, 5 tetrakis(pentafluorophenyl)borate(1-) amine, triethyl aluminum (TEA), and any combinations thereof.

In some embodiments, one or more of the foregoing activating co-catalysts are used in combination with each other. In one embodiment, a combination of a mixture of a tri((C₁-C₄)hydrocarbyl)aluminum, tri((C₁-C₄)hydrocarbyl)borane, or an ammonium borate with an 10 oligomeric or polymeric alumoxane compound, can be used.

Additives, Additional Polymers and Applications

An inventive composition may comprise one or more additives. Additives include, but are not limited to, antistatic agents, color enhancers, dyes, lubricants, fillers (for example, TiO₂ or CaCO₃), opacifiers, nucleators, processing aids, pigments, primary anti-oxidants, secondary anti- 15 oxidants, UV stabilizers, anti-blocks, slip agents, tackifiers, fire retardants, anti-microbial agents, odor reducer agents, anti-fungal agents, and combinations thereof. An inventive composition may comprise from about 0.001 to about 10 percent by the combined weight of such additives, based on the weight of the composition including such additives. In some embodiments, such as applications where fire resistance is important, the combined weight of such additives can be up to 40 weight 20 percent.

An inventive composition may further comprise one or more other polymers. For example one or more other ethylene-based polymers (such polymers differ in one or more properties from the ethylene-based polymer of the first composition and the second ethylene-based polymer; i.e., density, melt index, comonomer, Mn, Mw, and/or MWD), or one or more propylene-based 25 polymers, or combinations thereof. Such compositions may be blended via any method, known to a person of ordinary skill in the art, including, but not limited to, dry blending, and melt blending via any suitable equipment, for example, an extruder.

The invention provides for an article comprising at least one component formed from an inventive composition. Articles includes, but are not limited to, film, sheets, coatings, and 30 multilayer structures. Multilayer structures typically comprise one or more film layers or sheets comprising an inventive composition. The multilayer structure may further comprise one or more

layers comprising one or more polyamides, one or more polyesters, one or more olefin-based polymers, and combinations thereof.

In one embodiment, the inventive compositions according to the present invention are characterized by one or more of the followings: (a) having a Dart impact A of at least 400 g, measured according to ASTM D1709 (Method A), when said composition is formed into a monolayer blown film having a thickness of 1 mil; and/or (b) having a normalized machine direction Elmendorf tear of at least 250 g/mil, measured according to ASTM D1922, when said polyolefin composition is formed into a monolayer blown film having a thickness of 1 mil.

In one embodiment, an inventive composition further comprises from 5 to 20 percent by weight of low density polyethylene (LDPE). In a further embodiment, the composition has a Dart Impact A greater than 275 g, preferably greater than 300 g, measured according to ASTM D1709, when said composition is formed into a monolayer blown film having a thickness of 1 mil.

In some embodiments, the present invention relates to a cast film formed from any of the inventive compositions as described herein. In some embodiments, the cast film is a monolayer film. The cast film, in some embodiments, is a multilayer film. Cast films can be formed from inventive compositions using methods and equipment well-known to those of skill in the art.

The amount of the inventive composition to use in cast films of the present invention can depend on a number of factors including, for example, whether the film is a monolayer or multilayer film, the other layers in the film if it is a multilayer film, the desired properties of the film, the end use application of the film, the desired properties of the film, the equipment available to manufacture the film, and others. A cast film of the present invention, in some embodiments, comprises at least 20 percent by weight of the inventive composition, preferably at least 30 percent by weight of the inventive composition, and more preferably at least 40 percent by weight of the inventive composition.

Cast films of the present invention can have a variety of thicknesses. The thickness of the cast film can depend on a number of factors including, for example, whether the film is a monolayer or multilayer film, the other layers in the film if it is a multilayer film, the desired properties of the film, the end use application of the film, the desired properties of the film, the equipment available to manufacture the film, and others. In some embodiments, a cast film of the present invention has a thickness of up to 30 mils. For example, the cast film can have a thickness from a lower limit of

0.2 mils, 0.3 mils, 0.5 mils, 1.0 mil, 1.75 mils, or 2.0 mils to an upper limit of 10 mils, 15 mils, 20 mils, 25 mils, or 30 mils.

In embodiments where the cast film comprises a multilayer film, the number of layers in the film can depend on a number of factors including, for example, the desired properties of the film, the
5 desired thickness of the film, the content of the other layers of the film, whether any of the layers in the film are to be foamed, the end use application of the film, the equipment available to manufacture the film, and others. A multilayer cast film can comprise up to 2, 3, 4, 5, 6, 7, 8, 9, 10, or 11 layers in various embodiments.

The inventive composition, in some embodiments, can be used in more than one layer of the
10 film. Other layers within a multilayer film of the present invention can comprise, in various embodiments, a polymer selected from the following: the inventive composition, a LLDPE, a VLDPE (a very low density polyethylene), a MDPE, a LDPE, a HDPE, a HMWHDPE (a high molecular weight HDPE), a propylene-based polymer, a polyolefin plastomer, a polyolefin elastomer, an olefin block copolymer, an ethylene vinyl acetate, an ethylene acrylic acid, an ethylene
15 methacrylic acid, an ethylene methyl acrylate, an ethylene ethyl acrylate, an ethylene butyl acrylate, an isobutylene, a maleic anhydride-grafted polyolefin, an ionomer of any of the foregoing, or a combination thereof. In some embodiments, a multilayer film of the present invention can comprise one or more tie layers known to those of skill in the art.

In some embodiments, in a cast film comprising a layer formed from the composition
20 comprising the inventive composition, the layer can be a sealant layer and/or an abuse layer.

In some embodiments, the cast film comprising a layer formed from the inventive composition can be laminated to another film or a woven structure.

Cast films of the present invention, in some embodiments, can be corona treated and/or
printed (e.g., reverse or surface printed) using techniques known to those of skill in the art.

25 The cast films of the present invention may be subjected to a post-quench orientation step where the film is stretched at a temperature below the melting point of any polyethylene used in the film. The degree of stretching could be from 1.1 : 1 to 5 : 1 in the machine direction or the cross (transverse) direction or both directions. The degree of stretching is the ratio of the original film thickness to that of the film thickness of the stretched portion of the film. So the portion of the film
30 that originally was 100 micron after a 3:1 stretch ratio in one direction (for example, the machine direction) would be 33 micron. In some embodiments the post-quench stretching is less than 4.5:1,

4:1, or 3.5: 1 in the machine direction, the cross direction or both directions. In some preferred embodiments, the stretching is done in only one direction (that is, monoaxial orientation). In such cases, it may be preferred that the orientation be only in the machine direction. In some embodiments where the cast films are to be oriented, the orientation can be performed in-line (i.e.,
5 just after extrusion), or off-line as part of a separate process or at a different location.

For example, the stretching can be conducted in the machine direction using a set of rolls and in the cross direction using a tenter frame, or using other methods which uniformly stretch the films. Alternatively, the films may be stretched by techniques which stretch the film in a non-uniform manner such that localized regions of the film remain unstretched. Such techniques include local
10 stretching, interdigitized rollers or embossing techniques. It should be understood that with such localized stretching, the degree of stretching referred to above for some embodiments (that is from 1.1 to 3.5 to 1) refers to the stretch in the area which were subjected to the stretching and not the overall film.

Cast films of the present invention can be incorporated into a variety of articles including, for
15 example, food packages, industrial and consumer packaging materials, foamed films, and others. Cast films of the present invention might be particularly useful in applications that require a film with high dart, puncture and/or tear resistance properties.

In some embodiments, cast films of the present invention can be used to form laminates by laminating the film to a substrate (e.g., paperboard, metallic films, and other substrates to which cast
20 films can be laminated).

Food packages can comprise a cast film according to the present invention. A variety of food items known to those of skill in the art can be provided in such food packages including, for example, solid foods, liquids, beverages, cooking ingredients (e.g., sugar, flour, etc.), etc. Exemplary food packaging materials include films for packaging baked goods, candy wrap, cheese,
25 and others.

Industrial and consumer packaging materials can comprise a cast film according to the present invention. Exemplary industrial and consumer packaging materials include stretch wrap, silage wraps, protective films, and others. In embodiments related to silage wraps, in some embodiments, the silage wrap can further comprise polyisobutylene.

30

DEFINITIONS

Unless stated to the contrary, implicit from the context, or customary in the art, all parts and percents are based on weight, and all test methods are current as of the filing date of this disclosure.

5 The term “composition,” as used herein, includes material(s) which comprise the composition, as well as reaction products and decomposition products formed from the materials of the composition.

10 The term “comprising,” and derivatives thereof, is not intended to exclude the presence of any additional component, step or procedure, whether or not the same is disclosed herein. In order to avoid any doubt, all compositions claimed herein through use of the term “comprising” may include any additional additive, adjuvant, or compound, whether polymeric or otherwise, unless stated to the contrary. In contrast, the term, “consisting essentially of” excludes from the scope of any succeeding recitation any other component, step or procedure, excepting those that are not essential to operability. The term “consisting of” excludes any component, step or procedure not specifically delineated or listed.

15 The term “polymer,” as used herein, refers to a polymeric compound prepared by polymerizing monomers, whether of the same or a different type. The generic term polymer thus embraces the term homopolymer (employed to refer to polymers prepared from only one type of monomer, with the understanding that trace amounts of impurities can be incorporated into the polymer structure), and the term interpolymer as defined hereinafter. Trace amounts of impurities
20 may be incorporated into and/or within the polymer.

The term “interpolymer,” as used herein, refers to a polymer prepared by the polymerization of at least two different types of monomers. The generic term interpolymer thus includes copolymers (employed to refer to polymers prepared from two different types of monomers), and polymers prepared from more than two different types of monomers.

25 The term, “olefin-based polymer,” as used herein, refers to a polymer that comprises, in polymerized form, a majority amount of olefin monomer, for example ethylene or propylene (based on the weight of the polymer), and optionally may comprise at least one polymerized comonomer.

The term, “ethylene-based polymer,” as used herein, refers to a polymer that comprises a majority amount of polymerized ethylene monomer (based on the total weight of the polymer), and
30 optionally may comprise at least one polymerized comonomer.

The term, “ethylene/ α -olefin interpolymer,” as used herein, refers to an interpolymer that comprises, in polymerized form, a majority amount of ethylene monomer (based on the weight of the interpolymer), and at least one α -olefin.

5 The term, “ethylene/ α -olefin copolymer,” as used herein, refers to a copolymer that comprises, in polymerized form, a majority amount of ethylene monomer (based on the weight of the copolymer), and an α -olefin, as the only two monomer types.

The term “propylene-based polymer,” as used herein, refers to a polymer that comprises, in polymerized form, a majority amount of propylene monomer (based on the total weight of the polymer) and optionally may comprise at least one polymerized comonomer.

10 TEST METHODS

Melt index

Melt indices I_2 (or $I2$) and I_{10} (or $I10$) were measured in accordance to ASTM D-1238 (method B) at 190°C and at 2.16 kg and 10 kg load, respectively. Their values are reported in g/10 min.

15 **Density**

Samples for density measurement were prepared according to ASTM D4703. Measurements were made, according to ASTM D792, Method B, within one hour of sample pressing.

Dynamic Shear Rheology

20 Each sample was compression-molded into “3 mm thick x 25 mm diameter” circular plaque, at 177°C, for five minutes, under 10 MPa pressure, in air. The sample was then taken out of the press and placed on a counter top to cool.

Constant temperature, frequency sweep measurements were performed on an ARES strain controlled rheometer (TA Instruments), equipped with 25 mm parallel plates, under a nitrogen purge. For each measurement, the rheometer was thermally equilibrated, for at least 30 minutes, prior to zeroing the gap. The sample disk was placed on the plate, and allowed to melt for five minutes at 25 190°C. The plates were then closed to 2 mm, the sample trimmed, and then the test was started. The method had an additional five minute delay built in, to allow for temperature equilibrium. The experiments were performed at 190°C, over a frequency range from 0.1 to 100 rad/s, at five points per decade interval. The strain amplitude was constant at 10%. The stress response was analyzed in 30 terms of amplitude and phase, from which the storage modulus (G'), loss modulus (G''), complex modulus (G^*), dynamic viscosity (η^* or Eta^*), and $\tan \delta$ (or $\tan \delta$) were calculated.

Conventional Gel Permeation Chromatography (conv. GPC)

A GPC-IR high temperature chromatographic system from PolymerChar (Valencia, Spain), was equipped with a Precision Detectors (Amherst, MA), 2-angle laser light scattering detector Model 2040, an IR5 infra-red detector and a 4-capillary viscometer, both from PolymerChar. Data
5 collection was performed using PolymerChar Instrument Control software and data collection interface. The system was equipped with an on-line, solvent degas device and pumping system from Agilent Technologies (Santa Clara, CA).

Injection temperature was controlled at 150 degrees Celsius. The columns used, were three, 10-micron "Mixed-B" columns from Polymer Laboratories (Shropshire, UK). The solvent used was
10 1,2,4-trichlorobenzene. The samples were prepared at a concentration of "0.1 grams of polymer in 50 milliliters of solvent." The chromatographic solvent and the sample preparation solvent each contained "200 ppm of butylated hydroxytoluene (BHT)." Both solvent sources were nitrogen sparged. Ethylene-based polymer samples were stirred gently at 160 degrees Celsius for three hours. The injection volume was "200 microliters," and the flow rate was "1 milliliters/minute." The GPC
15 column set was calibrated by running 21 "narrow molecular weight distribution" polystyrene standards. The molecular weight (MW) of the standards ranges from 580 to 8,400,000 g/mole, and the standards were contained in six "cocktail" mixtures. Each standard mixture had at least a decade of separation between individual molecular weights. The standard mixtures were purchased from Polymer Laboratories. The polystyrene standards were prepared at "0.025 g in 50 mL of solvent"
20 for molecular weights equal to, or greater than, 1,000,000 g/mole, and at "0.050 g in 50 mL of solvent" for molecular weights less than 1,000,000 g/mole.

The polystyrene standards were dissolved at 80°C, with gentle agitation, for 30 minutes. The narrow standards mixtures were run first, and in order of decreasing "highest molecular weight component," to minimize degradation. The polystyrene standard peak molecular weights were
25 converted to polyethylene molecular weight using Equation 1 (as described in Williams and Ward, *J. Polym. Sci.*, Polym. Letters, 6, 621 (1968)):

$$M_{\text{polyethylene}} = A \times (M_{\text{polystyrene}})^B \quad (\text{Eqn. 1}),$$

where M is the molecular weight, A is equal to 0.4316 and B is equal to 1.0.

Number-average molecular weight ($M_n(\text{conv gpc})$), weight average molecular weight (M_w -
30 conv gpc), and z-average molecular weight ($M_z(\text{conv gpc})$) were calculated according to Equations 2-4 below.

$$\text{Mn}(\text{conv gpc}) = \frac{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (IR_{\text{measurement channel}_i})}{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} \left(IR_{\text{measurement channel}_i} / M_{PE_i} \right)} \quad (\text{Eqn. 2})$$

$$\text{Mw}(\text{conv gpc}) = \frac{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (M_{PE_i} IR_{\text{measurement channel}_i})}{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (IR_{\text{measurement channel}_i})} \quad (\text{Eqn. 3})$$

$$\text{Mz}(\text{conv gpc}) = \frac{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (M_{PE_i}^2 IR_{\text{measurement channel}_i})}{\sum_{i=RV \text{ integration start}}^{i=RV \text{ integration end}} (M_{PE_i} IR_{\text{measurement channel}_i})} \quad (\text{Eqn. 4})$$

In Equations 2-4, the RV is column retention volume (linearly-spaced), collected at “1 point
 5 per second,” the IR is the baseline-subtracted IR detector signal, in Volts, from the IR5
 measurement channel of the GPC instrument, and M_{PE} is the polyethylene-equivalent MW
 determined from Equation 1. Data calculation were performed using “GPC One software (version
 2.013H)” from PolymerChar.

Creep Zero Shear Viscosity Measurement Method

10 Zero-shear viscosities were obtained via creep tests, which were conducted on an AR-G2
 stress controlled rheometer (TA Instruments; New Castle, Del), using “25-mm-diameter” parallel
 plates, at 190°C. The rheometer oven was set to test temperature for at least 30 minutes, prior to
 zeroing the fixtures. At the testing temperature, a compression molded sample disk was inserted
 between the plates, and allowed to come to equilibrium for five minutes. The upper plate was then
 15 lowered down to 50 μm (instrument setting) above the desired testing gap (1.5 mm). Any
 superfluous material was trimmed off, and the upper plate was lowered to the desired gap.
 Measurements were done under nitrogen purging, at a flow rate of 5 L/min. The default creep time
 was set for two hours. Each sample was compression-molded into a “2 mm thick x 25 mm
 diameter” circular plaque, at 177°C, for five minutes, under 10 MPa pressure, in air. The sample
 20 was then taken out of the press and placed on a counter top to cool.

A constant low shear stress of 20 Pa was applied for all of the samples, to ensure that the
 steady state shear rate was low enough to be in the Newtonian region. The resulting steady state
 shear rates were in the range from 10^{-3} to 10^{-4} s^{-1} for the samples in this study. Steady state was
 determined by taking a linear regression for all the data, in the last 10% time window of the plot of
 25 “log (J(t)) vs. log(t),” where J(t) was creep compliance and t was creep time. If the slope of the

linear regression was greater than 0.97, steady state was considered to be reached, then the creep test was stopped. In all cases in this study, the slope meets the criterion within one hour. The steady state shear rate was determined from the slope of the linear regression of all of the data points, in the last 10% time window of the plot of “ ϵ vs. t ,” where ϵ was strain. The zero-shear viscosity was
 5 determined from the ratio of the applied stress to the steady state shear rate.

In order to determine if the sample was degraded during the creep test, a small amplitude oscillatory shear test was conducted before, and after, the creep test, on the same specimen from 0.1 to 100 rad/s. The complex viscosity values of the two tests were compared. If the difference of the viscosity values, at 0.1 rad/s, was greater than 5%, the sample was considered to have degraded
 10 during the creep test, and the result was discarded.

Zero-Shear Viscosity Ratio (ZSVR) is defined as the ratio of the zero-shear viscosity (ZSV) of the branched polyethylene material to the ZSV of a linear polyethylene material (see ANTEC proceeding below) at the equivalent weight average molecular weight ($M_w(\text{conv gpc})$), according to the following Equation 5:

$$ZSVR = \frac{\eta_{0B}}{\eta_{0L}} = \frac{\eta_{0B}}{2.29^{-15} M_{w(\text{conv. gpc})}^{3.65}} \quad (\text{Eqn. 5}).$$

The ZSV value was obtained from creep test, at 190°C, via the method described above. The $M_w(\text{conv gpc})$ value was determined by the conventional GPC method (Equation 3), as discussed above. The correlation between ZSV of linear polyethylene and its $M_w(\text{conv gpc})$ was established based on a series of linear polyethylene reference materials. A description for the ZSV- M_w
 20 relationship can be found in the ANTEC proceeding: Karjala et al., *Detection of Low Levels of Long-chain Branching in Polyolefins*, Annual Technical Conference - Society of Plastics Engineers (2008), 66th 887-891.

¹H NMR Method

A stock solution (3.26 g) was added to “0.133 g of the polymer sample” in 10 mm NMR
 25 tube. The stock solution was a mixture of tetrachloroethane- d_2 (TCE) and perchloroethylene (50:50, w:w) with 0.001M Cr^{3+} . The solution in the tube was purged with N_2 , for 5 minutes, to reduce the amount of oxygen. The capped sample tube was left at room temperature, overnight, to swell the polymer sample. The sample was dissolved at 110°C with periodic vortex mixing. The samples were free of the additives that may contribute to unsaturation, for example, slip agents such

as erucamide. Each ^1H NMR analysis was run with a 10 mm cryoprobe, at 120°C , on Bruker AVANCE 400 MHz spectrometer.

Two experiments were run to get the unsaturation: the control and the double presaturation experiments. For the control experiment, the data was processed with an exponential window function with $\text{LB}=1$ Hz, and the baseline was corrected from 7 to -2 ppm. The signal from residual ^1H of TCE was set to 100, and the integral I_{total} from -0.5 to 3 ppm was used as the signal from whole polymer in the control experiment. The “number of CH_2 group, NCH_2 ,” in the polymer was calculated as follows in Equation 1A:

$$\text{NCH}_2 = I_{\text{total}}/2 \quad (\text{Eqn. 1A}).$$

For the double presaturation experiment, the data was processed with an exponential window function with $\text{LB}=1$ Hz, and the baseline was corrected from about 6.6 to 4.5 ppm. The signal from residual ^1H of TCE was set to 100, and the corresponding integrals for unsaturations (I_{vinylene} , $I_{\text{trisubstituted}}$, I_{vinyl} and $I_{\text{vinylidene}}$) were integrated. It is well known to use NMR spectroscopic methods for determining polyethylene unsaturation, for example, see Busico, V., et al., *Macromolecules*, 2005, 38, 6988. The number of unsaturation unit for vinylene, trisubstituted, vinyl and vinylidene were calculated as follows:

$$\text{N}_{\text{vinylene}} = I_{\text{vinylene}}/2 \quad (\text{Eqn. 2A}),$$

$$\text{N}_{\text{trisubstituted}} = I_{\text{trisubstituted}} \quad (\text{Eqn. 3A}),$$

$$\text{N}_{\text{vinyl}} = I_{\text{vinyl}}/2 \quad (\text{Eqn. 4A}),$$

$$\text{N}_{\text{vinylidene}} = I_{\text{vinylidene}}/2 \quad (\text{Eqn. 5A}).$$

The unsaturation units per 1,000 carbons, all polymer carbons including backbone carbons and branch carbons, were calculated as follows:

$$\text{N}_{\text{vinylene}}/1,000\text{C} = (\text{N}_{\text{vinylene}}/\text{NCH}_2)*1,000 \quad (\text{Eqn. 6A}),$$

$$\text{N}_{\text{trisubstituted}}/1,000\text{C} = (\text{N}_{\text{trisubstituted}}/\text{NCH}_2)*1,000 \quad (\text{Eqn. 7A}),$$

$$\text{N}_{\text{vinyl}}/1,000\text{C} = (\text{N}_{\text{vinyl}}/\text{NCH}_2)*1,000 \quad (\text{Eqn. 8A}),$$

$$\text{N}_{\text{vinylidene}}/1,000\text{C} = (\text{N}_{\text{vinylidene}}/\text{NCH}_2)*1,000 \quad (\text{Eqn. 9A}),$$

The chemical shift reference was set at 6.0 ppm for the ^1H signal from residual proton from TCE-d₂. The control was run with ZG pulse, $\text{NS}=4$, $\text{DS}=12$, $\text{SWH}=10,000$ Hz, $\text{AQ}=1.64\text{s}$, $\text{D1}=14\text{s}$. The double presaturation experiment was run with a modified pulse sequence, with $\text{O1P} = 1.354$

ppm, O2P = 0.960 ppm, PL9 = 57db, PL21 = 70 db, NS = 100, DS = 4, SWH = 10,000 Hz, AQ = 1.64s, D1 = 1 s (where D1 is the presaturation time), D13 = 13s. Only the vinyl levels were reported in Table 2 below.

¹³C NMR Method

5 Samples are prepared by adding approximately 3g of a 50/50 mixture of tetra-chloroethane-d₂/orthodichlorobenzene, containing 0.025 M Cr(AcAc)₃, to a “0.25 g polymer sample” in a 10 mm NMR tube. Oxygen is removed from the sample by purging the tube headspace with nitrogen. The samples are then dissolved, and homogenized, by heating the tube and its contents to 150°C, using a heating block and heat gun. Each dissolved sample is visually inspected to ensure homogeneity.

10 All data are collected using a Bruker 400 MHz spectrometer. The data is acquired using a 6 second pulse repetition delay, 90-degree flip angles, and inverse gated decoupling with a sample temperature of 120°C. All measurements are made on non-spinning samples in locked mode. Samples are allowed to thermally equilibrate for 7 minutes prior to data acquisition. The ¹³C NMR chemical shifts were internally referenced to the EEE triad at 30.0 ppm.

15 **C13 NMR Comonomer Content:** It is well known to use NMR spectroscopic methods for determining polymer composition. ASTM D 5017-96; J. C. Randall et al., in "NMR and Macromolecules" ACS Symposium series 247; J. C. Randall, Ed., Am. Chem. Soc., Washington, D.C., 1984, Ch. 9; and J. C. Randall in "Polymer Sequence Determination", Academic Press, New York (1977) provide general methods of polymer analysis by NMR spectroscopy.

Molecular Weighted Comonomer Distribution Index (MWC DI)

20 A GPC-IR, high temperature chromatographic system from PolymerChar (Valencia, Spain) was equipped with a Precision Detectors' (Amherst, MA) 2-angle laser light scattering detector Model 2040, and an IR5 infra-red detector (GPC-IR) and a 4-capillary viscometer, both from PolymerChar. The “15-degree angle” of the light scattering detector was used for calculation
25 purposes. Data collection was performed using PolymerChar Instrument Control software and data collection interface. The system was equipped with an on-line, solvent degas device and pumping system from Agilent Technologies (Santa Clara, CA).

Injection temperature was controlled at 150 degrees Celsius. The columns used, were four, 20-micron “Mixed-A” light scattering columns from Polymer Laboratories (Shropshire, UK). The
30 solvent was 1,2,4-trichlorobenzene. The samples were prepared at a concentration of “0.1 grams of polymer in 50 milliliters of solvent.” The chromatographic solvent and the sample preparation

solvent each contained “200 ppm of butylated hydroxytoluene (BHT).” Both solvent sources were nitrogen sparged. Ethylene-based polymer samples were stirred gently, at 160 degrees Celsius, for three hours. The injection volume was “200 microliters,” and the flow rate was “1 milliliters/minute.”

5 Calibration of the GPC column set was performed with 21 “narrow molecular weight distribution” polystyrene standards, with molecular weights ranging from 580 to 8,400,000 g/mole. These standards were arranged in six “cocktail” mixtures, with at least a decade of separation between individual molecular weights. The standards were purchased from Polymer Laboratories (Shropshire UK). The polystyrene standards were prepared at “0.025 grams in 50 milliliters of
10 solvent” for molecular weights equal to, or greater than, 1,000,000 g/mole, and at “0.050 grams in 50 milliliters of solvent” for molecular weights less than 1,000,000 g/mole. The polystyrene standards were dissolved at 80 degrees Celsius, with gentle agitation, for 30 minutes. The narrow standards mixtures were run first, and in order of decreasing “highest molecular weight component,” to minimize degradation. The polystyrene standard peak molecular weights were converted to
15 polyethylene molecular weights using Equation 1B (as described in Williams and Ward, J. Polym. Sci., Polym. Let., 6, 621 (1968)):

$$M_{\text{polyethylene}} = A \times (M_{\text{polystyrene}})^B \quad (\text{Eqn. 1B}),$$

where M is the molecular weight, A has a value of approximately 0.40 and B is equal to 1.0. The A value was adjusted between 0.385 and 0.425 (depending upon specific column-set efficiency),
20 such that NBS 1475A (NIST) linear polyethylene weight-average molecular weight corresponded to 52,000 g/mole, as calculated by Equation 3B, below:

$$M_n(\text{LALS gpc}) = \frac{\sum_{i=RV_{\text{integration start}}}^{i=RV_{\text{integration end}}} (IR_{\text{measurement channel}_i})}{\sum_{i=RV_{\text{integration start}}}^{i=RV_{\text{integration end}}} \left(IR_{\text{measurement channel}_i} / M_{PE_i} \right)} \quad (\text{Eqn. 2B})$$

$$M_w(\text{LALS gpc}) = \frac{\sum_{i=RV_{\text{integration start}}}^{i=RV_{\text{integration end}}} (M_{PE_i} IR_{\text{measurement channel}_i})}{\sum_{i=RV_{\text{integration start}}}^{i=RV_{\text{integration end}}} (IR_{\text{measurement channel}_i})} \quad (\text{Eqn. 3B})$$

In Equations 2B and 3B, RV is column retention volume (linearly-spaced), collected at “1
25 point per second.” The IR is the baseline-subtracted IR detector signal, in Volts, from the measurement channel of the GPC instrument, and the M_{PE} is the polyethylene-equivalent MW

determined from Equation 1B. Data calculation were performed using “GPC One software (version 2.013H)” from PolymerChar.

A calibration for the IR5 detector ratios was performed using at least ten ethylene-based polymer standards (polyethylene homopolymer and ethylene/octene copolymers; narrow molecular weight distribution and homogeneous comonomer distribution) of known short chain branching (SCB) frequency (measured by the ^{13}C NMR Method, as discussed above), ranging from homopolymer (0 SCB/1000 total C) to approximately 50 SCB/1000 total C, where total C = carbons in backbone + carbons in branches. Each standard had a weight-average molecular weight from 36,000 g/mole to 126,000 g/mole, as determined by the GPC-LALS processing method described above. Each standard had a molecular weight distribution (Mw/Mn) from 2.0 to 2.5, as determined by the GPC-LALS processing method described above. Polymer properties for the SCB standards are shown in Table A.

Table A: “SCB” Standards

Wt % Comonomer	IR5 Area ratio	SCB / 1000 Total C	Mw	Mw/Mn
23.1	0.2411	28.9	37,300	2.22
14.0	0.2152	17.5	36,000	2.19
0.0	0.1809	0.0	38,400	2.20
35.9	0.2708	44.9	42,200	2.18
5.4	0.1959	6.8	37,400	2.16
8.6	0.2043	10.8	36,800	2.20
39.2	0.2770	49.0	125,600	2.22
1.1	0.1810	1.4	107,000	2.09
14.3	0.2161	17.9	103,600	2.20
9.4	0.2031	11.8	103,200	2.26

The “IR5 Area Ratio (or “IR5_{Methyl Channel Area} / IR5_{Measurement Channel Area}”)” of “the baseline-subtracted area response of the IR5 methyl channel sensor” to “the baseline-subtracted area response of IR5 measurement channel sensor” (standard filters and filter wheel as supplied by PolymerChar: Part Number IR5_FWM01 included as part of the GPC-IR instrument) was calculated for each of the “SCB” standards. A linear fit of the SCB frequency versus the “IR5 Area Ratio” was constructed in the form of the following Equation 4B:

$$\text{SCB/1000 total C} = A_0 + [A_1 \times (\text{IR5}_{\text{Methyl Channel Area}} / \text{IR5}_{\text{Measurement Channel Area}})]$$
 (Eqn. 4B), where A_0 is the “SCB/1000 total C” intercept at an “IR5 Area Ratio” of zero, and A_1 is the slope of the “SCB/1000 total C” versus “IR5 Area Ratio,” and represents the increase in the “SCB/1000 total C” as a function of “IR5 Area Ratio.”

A series of “linear baseline-subtracted chromatographic heights” for the chromatogram generated by the “IR5 methyl channel sensor” was established as a function of column elution volume, to generate a baseline-corrected chromatogram (methyl channel). A series of “linear baseline-subtracted chromatographic heights” for the chromatogram generated by the “IR5 measurement channel” was established as a function of column elution volume, to generate a baseline-corrected chromatogram (measurement channel).

The “IR5 Height Ratio” of “the baseline-corrected chromatogram (methyl channel)” to “the baseline-corrected chromatogram (measurement channel)” was calculated at each column elution volume index (each equally-spaced index, representing 1 data point per second at 1 ml/min elution) across the sample integration bounds. The “IR5 Height Ratio” was multiplied by the coefficient A_1 , and the coefficient A_0 was added to this result, to produce the predicted SCB frequency of the sample. The result was converted into mole percent comonomer, as follows in Equation 5B:

$$\text{Mole Percent Comonomer} = \{ \text{SCB}_f / [\text{SCB}_f + ((1000 - \text{SCB}_f * \text{Length of comonomer}) / 2)] \} * 100$$

(Eqn. 5B),

where “ SCB_f ” is the “SCB per 1000 total C” and the “Length of comonomer” = 8 for octene, 6 for hexene, and so forth.

Each elution volume index was converted to a molecular weight value (Mw_i) using the method of Williams and Ward (described above; Eqn. 1B). The “Mole Percent Comonomer (y axis)” was plotted as a function of $\text{Log}(Mw_i)$, and the slope was calculated between Mw_i of 15,000 and Mw_i of 150,000 g/mole (end group corrections on chain ends were omitted for this calculation). An EXCEL linear regression was used to calculate the slope between, and including, Mw_i from 15,000 to 150,000 g/mole. This slope is defined as the molecular weighted comonomer distribution index ($MWCDI = \text{Molecular Weighted Comonomer Distribution Index}$).

Representative Determination of MWCDI (Inventive First Composition 2)

A plot of the measured “SCB per 1000 total C (= SCB_f)” versus the observed “IR5 Area Ratio” of the SCB standards was generated (see Figure 1), and the intercept (A_0) and slope (A_1) were determined. Here, $A_0 = -90.246 \text{ SCB}/1000 \text{ total C}$; and $A_1 = 499.32 \text{ SCB}/1000 \text{ total C}$.

The “IR5 Height Ratio” was determined for Inventive Example 2 (see integration shown in Figure 2). This height ratio (IR5 Height Ratio of Inventive Example 2) was multiplied by the coefficient A_1 , and the coefficient A_0 was added to this result, to produce the predicted SCB frequency of this example, at each elution volume index, as described above ($A_0 = -90.246$

SCB/1000 total C; and $A_1 = 499.32$ SCB/1000 total C). The SCB_f was plotted as a function of polyethylene-equivalent molecular weight, as determined using Equation 1B, as discussed above. See Figure 3 (Log Mwi used as the x-axis).

The SCB_f was converted into “Mole Percent Comonomer” via Equation 5B. The “Mole
5 Percent Comonomer” was plotted as a function of polyethylene-equivalent molecular weight, as determined using Equation 1B, as discussed above. See Figure 4 (Log Mwi used as the x-axis). A linear fit was from Mwi of 15,000 g/mole to Mwi of 150,000 g/mole, yielding a slope of “2.27 mole percent comonomer x mole/g.” Thus, the $MWCDI = 2.27$. An EXCEL linear regression was used to calculate the slope between, and including, Mwi from 15,000 to 150,000 g/mole.

10 **Film Testing Conditions**

The following physical properties were measured on the films produced (see experimental section).

- **45° Gloss:** ASTM D-2457.
- **Clarity:** ASTM: D-1746.

15 **ASTM D1003 Total Haze**

Samples measured for internal haze and overall (total) haze were sampled and prepared according to ASTM D1003. Internal haze was obtained via refractive index matching using mineral oil on both sides of the films. A Hazeguard Plus (BYK-Gardner USA; Columbia, MD) was used for testing. Surface haze was determined as the difference between total haze and internal haze. The
20 total haze was reported as the average of five measurements.

ASTM D1922 MD (Machine Direction) and CD (Cross Direction) Elmendorf Tear Type B

The Elmendorf Tear test determines the average force to propagate tearing through a specified length of plastic film or non rigid sheeting, after the tear has been started, using an Elmendorf-type tearing tester.

25 After film production from the sample to be tested, the film was conditioned for at least 40 hours at 23°C (+/- 2°C) and 50% R.H (+/- 5) as per ASTM standards. Standard testing conditions were 23°C (+/- 2°C) and 50% R.H (+/- 5) as per ASTM standards.

The force, in grams, required to propagate tearing across a film or sheeting specimen was measured using a precisely calibrated pendulum device. In the test, acting by gravity, the pendulum
30 swung through an arc, tearing the specimen from a precut slit. The specimen was held on one side by the pendulum and on the other side by a stationary member. The loss in energy by the pendulum

was indicated by a pointer or by an electronic scale. The scale indication was a function of the force required to tear the specimen.

The sample specimen geometry used in the Elmendorf tear test was the 'constant radius geometry,' as specified in ASTM D1922. Testing is typically carried out on specimens that have been cut from both the film MD and CD directions. Prior to testing, the film specimen thickness was measured at the sample center. A total of 15 specimens per film direction were tested, and the average tear strength and average thickness reported. The average tear strength was normalized to the average thickness.

ASTM D882 MD and CD, 1% and 2% Secant Modulus and Tensile Strength

The film MD (Machine Direction) and CD (Cross Direction) secant modulus and tensile break strength (or tensile strength) were measured with an Instron universal tester according to ASTM D882-10. The reported secant modulus value was the average of five measurements. The tensile break strength was determined using five film samples in each direction, with each sample being "1 inch x 6 inches" in size.

Puncture Strength

The Puncture test determines the resistance of a film to the penetration of a probe at a standard low rate, a single test velocity. The puncture test method is based on ASTM D5748. After film production, the film was conditioned for at least 40 hours at 23°C (+/- 2°C) and 50% R.H (+/- 5), as per ASTM standards. Standard testing conditions are 23°C (+/- 2°C) and 50% R.H (+/- 5), as per ASTM standards. Puncture was measured on a tensile testing machine. Square specimens were cut from a sheet to a size of "6 inches by 6 inches." The specimen was clamped in a "4 inch diameter" circular specimen holder, and a puncture probe was pushed into the centre of the clamped film at a cross head speed of 10 inches/minute. The internal test method follows ASTM D5748, with one modification. It deviated from the ASTM D5748 method, in that the probe used was a "0.5 inch diameter" polished steel ball on a "0.25 inch" support rod (rather than the 0.75 inch diameter, pear shaped probe specified in D5748).

There was a "7.7 inch" maximum travel length to prevent damage to the test fixture. There was no gauge length; prior to testing, the probe was as close as possible to, but not touching the specimen.

A single thickness measurement was made in the centre of the specimen. For each specimen, the maximum force, the force at break, the penetration distance, and the energy to break were

determined. A total of five specimens were tested to determine an average puncture value. The puncture probe was cleaned using a "Kim-wipe" after each specimen.

ASTM D1709 Dart Drop

The film Dart Drop test determines the energy that causes a plastic film to fail, under
5 specified conditions of impact by a free falling dart. The test result is the energy, expressed in terms of the weight of the missile falling from a specified height, which would result in the failure of 50% of the specimens tested.

After the film was produced, it was conditioned for at least 40 hours at 23°C (+/- 2°C) and
50% R.H (+/- 5), as per ASTM standards. Standard testing conditions are 23°C (+/- 2°C) and 50%
10 R.H (+/- 5), as per ASTM standards.

The test result was reported as either by Method A, which uses a 1.5" diameter dart head and
26" drop height, or by Method B, which uses a 2" diameter dart head and 60" drop height. The
sample thickness was measured at the sample center, and the sample then clamped by an annular
specimen holder with an inside diameter of 5 inches. The dart was loaded above the center of the
15 sample, and released by either a pneumatic or electromagnetic mechanism.

Testing was carried out according to the 'staircase' method. If the sample failed, a new
sample was tested with the weight of the dart reduced by a known and fixed amount. If the sample
did not fail, a new sample was tested with the weight of the dart increased by a known amount.
After 20 specimens had been tested, the number of failures was determined. If this number was 10,
20 then the test is complete. If the number was less than 10, then the testing continued, until 10 failures
had been recorded. If the number was greater than 10, testing was continued, until the total of non-
failures was 10. The Dart Drop strength was determined from these data, as per ASTM D1709, and
expressed in grams, as either the Dart Drop Impact of Type A or Type B. In some cases, the sample
Dart Drop Impact strength may lie between A and B. In these cases, it is not possible to obtain a
25 quantitative dart value.

Ultimate Stretch

Ultimate stretch is tested on a Highlight Film Test System from Highlight Industries. A film
roll is placed on the unwind section of the machine and the film is passed through a set of rollers.
The film is then unwound with increasing force until it reaches its ultimate stretch point. Load cells
30 measure the amount of force applied and a calculation is made to determine the amount of stretch
present in the film, measured in percent. The stretch force @200% is also determined.

Lantech Puncture

This test uses a Bruceton staircase method to determine the maximum force to load at which the film can be passed over a test probe for three wraps with no failures. The test probe is inserted into the test stand at the desired protrusion distance. The film is positioned such that the test probe is aligned with the center of the film. The film is attached to the test stand and the wrapper started. Once the wrapper reaches the designated target for pre-stretch, the film is allowed to pass over the probe for a maximum of three wraps. Any breakage of the film during any of the wrap is considered a failure at that force to load setting. Depending on the performance of the film at the load setting (i.e. passed or failed), the force to load is adjusted up or down, and the test is repeated at the new load setting. This continues until the maximum force at which no failures occurs is found. The equipment and settings used in this method are as follows:

Equipment:	Lantech SHC Film Test Wrapper	Lantech SHC Film Test Wrapper
	0.8 mil films	0.5 mil films
Pre-stretch:	250%	200%
Turntable Speed	9 rpm	9 rpm
Force to Load (F2)	Variable	Variable
Probe Type	4'' by 4'' blunt rod	4'' by 4'' blunt rod
Probe Protrusion Distance	12 in	3 in

EXAMPLES


The following examples illustrate the present invention, but are not intended to limit the scope of the invention.

EXAMPLE 1:

Inventive First Compositions 1, 2 and 3

Inventive first compositions 1, 2 and 3, each contain two ethylene-octene copolymers. Each composition was prepared, via solution polymerization, in a dual series loop reactor system according to U.S. Pat. No. 5,977,251 (see Figure 2 of this patent), in the presence of a first catalyst system, as described below, in the first reactor, and a second catalyst system, as described below, in the second reactor.

The first catalyst system comprised a bis((2-oxoyl-3-(dibenzo-1H-pyrrole-1-yl)-5-(methyl)phenyl)-2-phenoxyethyl)-methylene-1,2-cyclohexanediylhafnium (IV) dimethyl, represented by the following formula (CAT 1):



(CAT 1).

The molar ratios of the metal of CAT 1, added to the polymerization reactor, in-situ, to that of Cocat1 (modified methyl aluminoxane), or Cocat2 (bis(hydrogenated tallow alkyl)methyl, tetrakis(pentafluorophenyl)borate(1-) amine), are shown in Table 1.

5 The second catalyst system comprised a Ziegler-Natta type catalyst (CAT 2). The heterogeneous Ziegler-Natta type catalyst-premix was prepared substantially according to U.S. Pat. No. 4,612,300, by sequentially adding to a volume of ISOPAR E, a slurry of anhydrous magnesium chloride in ISOPAR E, a solution of EtAlCl₂ in heptane, and a solution of Ti(O-*i*Pr)₄ in heptane, to yield a composition containing a magnesium concentration of 0.20M, and a ratio of Mg/Al/Ti of
 10 40/12.5/3. An aliquot of this composition was further diluted with ISOPAR-E to yield a final concentration of 500 ppm Ti in the slurry. While being fed to, and prior to entry into, the polymerization reactor, the catalyst premix was contacted with a dilute solution of Et₃Al, in the molar Al to Ti ratio specified in Table 1, to give the active catalyst.

The polymerization conditions for the inventive first compositions 1, 2 and 3 are reported in
 15 Table 1. As seen in Table 1, Cocat. 1 (modified methyl aluminoxane (MMAO)); and Cocat. 2 (bis(hydrogenated tallow alkyl)methyl, tetrakis(pentafluorophenyl)borate(1-) amine) were each used as a cocatalyst for CAT 1. Additional properties of the inventive compositions 1, 2 and 3 were measured, and are reported in Table 2. The GPC MWD profiles, and corresponding comonomer distribution overlays, are shown in Figures 5-7. Each polymer composition was stabilized with
 20 minor (ppm) amounts of stabilizers.

Comparative First Compositions A and B

Comparative compositions A and B, each contain two ethylene-octene copolymers, and each was prepared, via solution polymerization, in a dual loop reactor system, in the presence of a first catalyst system, as described below, in the first reactor, and a second catalyst system, as described
 25 below, in the second reactor. The first catalyst system comprised titanium, [*N*-(1,1-dimethylethyl)-1,1-dimethyl-1-[(1,2,3,3a,8a-η)-1,5,6,7-tetrahydro-2-methyl-*s*-indacen-1-yl]silanaminato(2-)-

$\kappa\text{M}[(1,2,3,4-\eta)\text{-}1,3\text{-pentadiene}]$ - (CAT 3, a constrained geometry catalyst). The second catalyst system comprised the Ziegler-Natta premix (CAT 2), as discussed above.

The polymerization conditions for comparative compositions A and B are reported in Table 1. As seen in Table 1, Cocat. 1 (modified methyl aluminoxane (MMAO)) and Cocat. 2 (bis(hydrogenated tallow alkyl)methyl, tetrakis(pentafluorophenyl)borate(1-) amine) were each used as cocatalyst for CAT 3. Additional properties of the comparative compositions A and B were measured, and are reported in Table 2. The GPC MWD profiles, and corresponding comonomer distribution overlays, are shown in Figures 5 and 6. Each polymer composition was stabilized with minor (ppm) amounts of stabilizers.

10 **Comparative C (First Composition)**

Comparative C is an ethylene-hexene copolymer composition, commercially available under the commercial designation EXCEED 1018CA from EXXONMOBIL Chemical Company, and having a density of approximately 0.918 g/cm^3 , a melt index (I_2 or I_2), measured at 190°C and 2.16 kg, of approximately 1.0 g/10 minutes. Additional properties of the comparative example C were measured, and are reported in Table 2. The GPC MWD profile, and corresponding comonomer distribution overlay, is shown in Figure 5.

15 **Comparative D (First Composition)**

Comparative D is an ethylene-octene copolymer composition, provided by The Dow Chemical Company, under the commercial designation ELITE 5230G, and having a density of approximately 0.916 g/cm^3 , a melt index (I_2 or I_2), measured at 190°C and 2.16 kg, of approximately 4.0 g/10 minutes. Additional properties of the comparative example D were measured, and are reported in Table 2. The GPC MWD profile, and corresponding comonomer distribution overlay, is shown in Figure 7.

25 Table 1: Polymerization Conditions (Rx1 = reactor 1; Rx2 = reactor 2)

Sample #	Units	Inv. First 1	Inv. First 2	Inv. First 3	Comp. First A	Comp. First B
Reactor Configuration		Dual Series	Dual Series	Dual Series	Dual Series	Dual Series
Comonomer		1-octene	1-octene	1-octene	1-octene	1-octene
<i>REACTOR FEEDS</i>						
First Reactor Total Solvent Flow	lb/hr	1122	1057	1177	958	1061
First Reactor Total Ethylene Flow	lb/hr	190	175	269	184	187

First Reactor Total Comonomer Flow	lb/hr	74	48	118	97	58
First Reactor Hydrogen Feed Flow	SCCM	6827	5017	22848	525	857
Second Reactor Total Solvent Flow	lb/hr	384	451	421	494	561
Second Reactor Total Ethylene Flow	lb/hr	173	204	155	182	216
Second Reactor Total Comonomer Flow	lb/hr	12	8	22	50	17
Second Reactor Hydrogen Feed Flow	SCCM	298	99	100	2446	3829
<i>REACTION</i>						
First Reactor Control Temperature	°C	140	150	143	145	135
First Reactor Ethylene Conversion	%	86.7	90.5	72.7	69.4	77.7
First Reactor Viscosity	cP	2400	2315	824	891	1318
Second Reactor Control Temperature	°C	195	195	190	190	195
Second Reactor Ethylene Conversion	%	87.1	86	87.8	89.2	88.8
Second Reactor Viscosity	cP	869	876	264	892	848
<i>CATALYST</i>						
First Reactor Catalyst	type	CAT 1	CAT 1	CAT 1	CAT 3	CAT 3
First Reactor Catalyst Efficiency	g polymer per g catalyst metal	3,681,068	2,333,579	481,051	2,984,071	2,653,724
First Reactor Cocatalyst (Cocat. 2) to Catalyst Metal Molar Ratio	Ratio	1.3	1.8	1.2	1.2	1.5
First Reactor Cocatalyst (Cocat. 1) to Catalyst Metal Molar Ratio	Ratio	20	100	5	15	25
Second Reactor Catalyst Efficiency	g polymer per g catalyst metal	404,385	469,511	176,500	561,063	390,994
Second Reactor Al to Ti Molar Ratio	Ratio	4.0	4.0	1.2	4.0	4.0

*solvent = ISOPAR E

Table 2: Properties of Inventive and Comparative Compositions

	Unit	Inv. First 1	Inv. First 2	Inv. First 3	Comp. First A	Comp. First B	Comp. First C	Comp. First D
Density	g/cc	0.9174	0.9245	0.9148	0.9162	0.9253	0.9191	0.9158
I ₂	g/10 min	0.83	0.87	3.91	0.93	0.80	0.95	4.05
I ₁₀ /I ₂		7.7	8.0	7.3	8.2	8.4	6.0	7.0
7.0 – 1.2xlog(I ₂)		7.1	7.1	6.3	7.0	7.1	7.0	6.3
Mn (conv.gpc)	g/mol	32,973	33,580	20,244	33,950	34,626	45,645	26,355
Mw (conv.gpc)		117,553	117,172	78,820	111,621	112,688	109,931	76,118
Mz (conv.gpc)		270,191	277,755	186,520	258,547	254,301	197,425	155,254
Mw/Mn (conv.gpc)		3.57	3.49	3.89	3.29	3.25	2.41	2.89
Mz/Mw (conv.gpc)		2.30	2.37	2.37	2.32	2.26	1.80	2.04
Eta* (0.1 rad/s)	Pa*s	9,496	11,231	1,997	10,342	11,929	6,975	2,057
Eta* (1.0 rad/s)	Pa*s	7,693	8,455	1,920	7,313	7,942	6,472	1,908
Eta* (10 rad/s)	Pa*s	4,706	4,977	1,527	4,337	4,586	5,071	1,473
Eta* (100 rad/s)	Pa*s	1,778	1,893	792	1,769	1,873	2,415	834
Eta*0.1/ Eta*100		5.34	5.93	2.52	5.85	6.37	2.89	2.47
Eta zero	Pa*s	11,210	13,947	2,142	12,994	15,661	7,748	2,176
MWCDI		2.64	2.27	1.56	0.65	0.79	-0.06	-0.54
Vinyls	Per 1000 total Carbons	134	179	115	157	148	69	56
ZSVR		1.53	1.92	1.25	2.13	2.49	1.35	1.45

Monolayer Cast Films

Monolayer cast films of inventive composition 3 and comparative composition D were fabricated on a 5 layer, Egan Davis Standard coextrusion cast film line. Film thickness was maintained at 0.8 mil (0.0008 in or 0.02 mm). The cast line consisted of three 2-1/2" and two 2" "30:1 L/D Egan Davis Standard MAC extruders," which are air cooled. All extruders had moderate work DSB (Davis Standard Barrier) type screws. A CMR 2000 microprocessor monitored and controlled the operations. The extrusion process was monitored by pressure transducers, located before, and after, the breaker plate, as well as by four heater zones on each barrel, one each at the adapter and the block and two zones on the die. The microprocessor also tracked the extruder RPM, %FLA, HP, rate, line speed, % draw, primary and secondary chill roll temperatures, gauge deviation, layer ratio, rate/RPM, and melt temperature for each extruder.

Equipment specifications included a Cloeren 5 layer, dual plane feed block, and a Cloeren 36" Epich II autogage 5.1 die. The primary chill roll had a matte finish, and was 40" O.D. x 40"

long, with a 30-40 RMS surface finish for improved release characteristics. The secondary chill roll is 20" O.D. x 40" long, with a 2-4 RMS surface for improved web tracking. Both the primary and secondary chill rolls had chilled water circulating through them to provide quenching. There was an NDC Beta gauge sensor for gauge thickness and automatic gauge control, if needed. Rate was measured by five Barron weigh hoppers, with load cells on each hopper for gravimetric control. Samples were finished on the two position, single turret Horizon winder, on 3" I.D. cores, with center wind automatic roll changeover and slitter station. The maximum throughput rate for the line was "600 pounds per hour," and maximum line speed was "900 feet per minute." Film properties are shown in Table 3.

5

10 Monolayer cast films for inventive composition 3 and comparative composition D were fabricated based on the following conditions:

- Melt Temperature = 530 ° F
- Temperature Profile (B1 300°F:B2 475°F, B3-5 525°F, Screen 525°F, Adaptor 525°F, Die all zones 525°F)
- 15 Line speed= 470 ft/min
- Through put rate= 370 - 400 lb/hr
- Chill roll temperature=70°F
- Cast roll temperature=70°F
- Air knife=7.4" H2O
- 20 Vacuum box=OFF
- Die gap= 20-25 mil

Film properties are shown in Table 3.

25

Table 3: Cast Film Properties

	Unit	Inv. 3	Comp. D
Dart Drop Impact (Method-A)	g	463	211
Normalized tear (MD)	g/mil	375	351
Normalized tear (CD)	g/mil	557	600
Clarity	%	99.5	99.6
Puncture Strength	ft*lb/in ³	225	352
Secant Modulus - MD at 1% strain	psi	14,676	14,803
Secant Modulus - MD at 2% strain	psi	13,232	13,732
Secant Modulus - CD at 1% strain	psi	14,479	15,084
Secant Modulus - CD at 2% strain	psi	13,654	13,829

It has been discovered, that for cast films, inventive example 3 showed significantly higher toughness (as indicated by dart drop impact values) than comparative composition D. It is believed that the improved film toughness from the inventive compositions is a result of their high MWCDI values. From a molecular structure standpoint, a high MWCDI value indicates comonomers are more favorably incorporated (a higher incorporation of comonomer and a better distribution of comonomer) in the high molecular weight polymer molecules, rather than in the low molecular weight polymer molecules. The inventive compositions also have low LCB, as indicated by low ZSVR, as compared to conventional polymers. As a result the polymer contains more tie chains, and therefore, provides better film toughness. The inventive compositions also have significantly high I₁₀/I₂ values, indicating good processability of these compositions.

EXAMPLE 2:

Inventive Compositions 4 and 5

In this example, inventive composition 4 is the same as inventive composition 3 (above) and was prepared in the same way as inventive composition 3. For clarity in discussing the results, it is referred to as inventive composition 4 in this example because a different cast film is formed from it. Inventive composition 5 contains an ethylene-octene copolymer. Inventive composition 5 was prepared in the same manner and using the same catalyst system as inventive compositions 1-3, with the exception of the polymerization conditions which are reported in Table 4.

Comparative Composition E

Comparative composition E is an ethylene-octene copolymer composition, commercially available under the commercial designation ELITE 5230G from the Dow Chemical Company, and having a density of approximately 0.916 g/cm³ and a melt index (I₂ or I₂), measured at 190°C and

2.16 kg, of approximately 4.0 g/10 minutes. Additional properties of the comparative composition E were measured, and are reported in Table 5.

Table 4: Polymerization Conditions (Rx1 = reactor 1; Rx2 = reactor 2)

Sample #	Units	Inv. Comp. 4	Inv. Comp. 5
Reactor Configuration		Dual Series	Dual Series
Comonomer		1-octene	1-octene
<i>REACTOR FEEDS</i>			
First Reactor Total Solvent Flow	lb/hr	1177	1049
First Reactor Total Ethylene Flow	lb/hr	269	215
First Reactor Total Comonomer Flow	lb/hr	118	105
First Reactor Hydrogen Feed Flow	SCCM	22848	9601
Second Reactor Total Solvent Flow	lb/hr	421	550
Second Reactor Total Ethylene Flow	lb/hr	155	210
Second Reactor Total Comonomer Flow	lb/hr	22	24
Second Reactor Hydrogen Feed Flow	SCCM	100	1066
<i>REACTION</i>			
First Reactor Control Temperature	°C	143	155
First Reactor Ethylene Conversion	%	72.7	84.1
First Reactor Viscosity	cP	824	524
Second Reactor Control Temperature	°C	190	190
Second Reactor Ethylene Conversion	%	87.8	87.3
Second Reactor Viscosity	cP	264	307
<i>CATALYST</i>			
First Reactor Catalyst	type	CAT 1	CAT 1
First Reactor Catalyst Efficiency	g polymer per g catalyst metal	481,051	1,243,000
First Reactor Cocatalyst (Cocat. 2) to Catalyst Metal Molar Ratio	Ratio	1.2	1.2
First Reactor Cocatalyst (Cocat. 1) to Catalyst Metal Molar Ratio	Ratio	5	50.0

Second Reactor Catalyst Efficiency	g polymer per g catalyst metal	176,500	524,499
Second Reactor Al to Ti Molar Ratio	Ratio	1.2	4.0

Table 5: Properties of Inventive and Comparative Compositions

	Unit	Inv. Comp. 4	Inv. Comp. 5	Comp. E
Density	g/cc	0.9148	0.9169	0.9158
I ₂	g/10 min	3.91	4.27	4.05
I ₁₀ /I ₂		7.3	7.3	7.0
7.0 – 1.2xlog(I ₂)		6.3	6.2	6.3
Mn (conv.gpc)	g/mol	20,244	22,234	26,355
Mw (conv.gpc)		78,820	75,179	76,118
Mz (conv.gpc)		186,520	167,985	155,254
Mw/Mn (conv.gpc)		3.89	3.38	2.89
Mz/Mw (conv.gpc)		2.37	2.23	2.04
Eta* (0.1 rad/s)	Pa•s	1,997	1,830	2,057
Eta* (1.0 rad/s)	Pa•s	1,920	1,745	1,908
Eta* (10 rad/s)	Pa•s	1,527	1,397	1,473
Eta* (100 rad/s)	Pa•s	792	757	834
Eta*0.1/ Eta*100		2.52	2.42	2.47
Eta zero	Pa•s	2,142	1998	2176
MWCDI		1.56	2.29	-0.54
Vinyls	Per 1000 total Carbons	115	NM	56
ZSVR		1.25	1.39	1.45

5 NM = Not Measured.

Monolayer Cast Films

Monolayer cast films of inventive compositions 4 and 5, and of comparative composition E, were fabricated on a 5 layer Egan Davis Standard coextrusion cast film line. The cast line consisted of three 2-1/2" and two 2" 30:1 L/D Egan Davis Standard MAC extruders, which are air cooled. All extruders had moderate work DSB (Davis Standard Barrier) type screws. A CMR 2000 microprocessor monitored and controlled the operations. The extrusion process was monitored by pressure transducers, located before, and after, the breaker plate, as well as by four heater zones on

10

each barrel, one each at the adapter and the block and two zones on the die. The microprocessor also tracked the extruder RPM, %FLA, HP, rate, line speed, % draw, primary and secondary chill roll temperatures, gauge deviation, layer ratio, rate/RPM, and melt temperature for each extruder.

Equipment specifications included a Cloeren 5 layer, dual plane feed block, and a Cloeren
 5 36" Epich II autogage 5.1 die. The primary chill roll had a matte finish, and was 40" O.D. x 40" long, with a 30-40 RMS surface finish for improved release characteristics. The secondary chill roll is 20" O.D. x 40" long, with a 2-4 RMS surface for improved web tracking. Both the primary and secondary chill rolls had chilled water circulating through them to provide quenching. There was an NDC Beta gauge sensor for gauge thickness and automatic gauge control, if needed. Rate was
 10 measured by five Barron weigh hoppers, with load cells on each hopper for gravimetric control. Samples were finished on the two position single turret Horizon winder, on 3" I.D. cores, with center wind automatic roll changeover and slitter station. The maximum throughput rate for the line was "600 pounds per hour," and maximum line speed was "900 feet per minute."

Monolayer cast films for inventive compositions 4 and 5, and for comparative composition E,
 15 were fabricated based on the following conditions to provide films having a nominal thickness of 0.8 mils (0.0008 inches):

Melt Temperature = 500-540 ° F
 Temperature Profile (B1 300°F:B2 450°F, B3-5 525°F, Screen 525°F, Adaptor 525°F, Die all
 20 zones 525°F)
 Line speed= 600 ft/min
 Through put rate= 415-430 lb/hr
 Chill roll temperature=70°F
 Cast roll temperature=70°F
 Air knife=7.4" H2O
 25 Vacuum box=OFF
 Die gap= 20-25 mil

Monolayer cast films for inventive compositions 4 and 5, and for comparative composition E,
 were also fabricated based on the following conditions to provide films having a nominal thickness
 30 of 0.5 mils (0.0005 inches):

Melt Temperature = 510-540 ° F
 Temperature Profile (B1 300°F:B2 450°F, B3-5 525°F, Screen 525°F, Adaptor 525°F, Die all
 zones 525°F)
 Line speed= 950 ft/min
 35 Through put rate= 420-430 lb/hr
 Chill roll temperature=70°F
 Cast roll temperature=70°F

Air knife=7.4" H2O
 Vacuum box=OFF
 Die gap= 20-25 mil

5 Film properties are shown in Table 6A and 6B.

Table 6A: Cast Film Properties

	Unit	Inv. Comp. 4	Inv. Comp. 5	Comp. Comp. E
Nominal film thickness	mil	0.8	0.8	0.8
Dart Drop Impact (Method-A)	g	700	559	472
Tear (MD)	g	297	297	276
Tear (CD)	g	460	387	507
Puncture Strength	ft*lbf/in ³	294	243	264
Ultimate Stretch	%	369	387	349
Lantech Puncture @250% prestretch	lbs	8	10	9
Stretch Force @200%	lbs	53	53	56
Tensile Strength- MD	psi	4483	3790	5032
Tensile Strength – CD	psi	3649	3708	3760

Table 6B: Cast Film Properties

	Unit	Inv. Comp. 4	Inv. Comp. 5	Comp. Comp. E
Nominal film thickness	mil	0.5	0.5	0.5
Dart Drop Impact (Method-A)	g	727	763	409
Tear (MD)	g	255	228	177
Tear (CD)	g	426	403	391
Puncture Strength	ft*lbf/in ³	330	260	--
Ultimate Stretch	%	316	340	268
Lantech Puncture @200% prestretch	lbs	9	9	11
Stretch Force @200%	lbs	34	35	40
Tensile Strength- MD	psi	4605	4187	5704
Tensile Strength – CD	psi	3701	3445	3594

10 It has been discovered, that for cast films, inventive examples 4 and 5 showed significantly higher toughness (as indicated by dart drop impact values) than comparative composition E. It is believed that the improved film toughness from the inventive compositions is a result of their high MWCDI values. From a molecular structure standpoint, a high MWCDI value indicates comonomers are more favorably incorporated (a higher incorporation of comonomer and a better distribution of
 15 comonomer) in the high molecular weight polymer molecules, rather than in the low molecular

weight polymer molecules. The inventive compositions also have low LCB, as indicated by low ZSVR, as compared to conventional polymers. As a result the polymer contains more tie chains, and therefore, provides better film toughness. The inventive compositions also have significantly high I_{10}/I_2 values, indicating good processability of these compositions.

5 What is claimed is:

1. A cast film comprising a layer formed from a composition comprising a first composition, wherein the first composition comprises at least one ethylene-based polymer and wherein the first composition comprises a MWCDI value greater than 0.9, and a melt index ratio (I10/I2) that meets the following equation: $I10/I2 \geq 7.0 - 1.2 \times \log(I2)$.
- 5
2. The cast film of claim 1, wherein the first composition has a MWCDI value less than, or equal to, 10.0.
3. The cast film of any one of the preceding claims, wherein the first composition has a ZSVR
10 value from 1.2 to 3.0.
4. The cast film of any one of the preceding claims, wherein the first composition has a melt index ratio I10/I2 less than, or equal to, 9.2.
- 15 5. The cast film of any one of the preceding claims, wherein the first composition has a vinyl unsaturation level greater than 10 vinyls per 1,000,000 total carbons.
6. The cast film of any one of the preceding claims, wherein the layer further comprises a second polymer and the second polymer is selected from the following: a LLDPE, a VLDPE, a
20 LDPE, a MDPE, a HDPE, a HMWHDPE, a propylene-based polymer, a polyolefin plastomer, a polyolefin elastomer, an olefin block copolymer, an ethylene vinyl acetate, an ethylene acrylic acid, an ethylene methacrylic acid, an ethylene methyl acrylate, an ethylene ethyl acrylate, an ethylene butyl acrylate, a polyisobutylene, a maleic anhydride-grafted polyolefin, an ionomer of any of the foregoing, or a combination thereof.
- 25
7. The cast film of any one of the preceding claims, wherein the film has a thickness of at least 0.25 mils.
8. The cast film of any one of the preceding claims, wherein the cast film comprises at least 20
30 percent by weight of the first composition.

9. The cast film of any of the preceding claims, wherein the first composition has a density of 0.905 to 0.935 g/cm³.
10. The cast film of any of the preceding claims, wherein the first composition has a melt index
5 (I2) of 0.9 to 15 g/10 minutes.
11. The cast film of any of the preceding claims, wherein the layer formed from the composition comprising the first composition is at least one of a sealant layer, an abuse layer, or a release layer.
- 10 12. The cast film of any one of the preceding claims, wherein the layer formed from the composition comprising the first composition is a core component comprising 15 to 4,000 sublayers, wherein each sublayer has a thickness of 10 nanometers to 10 microns.
- 15 13. The cast film of any one of the preceding claims, wherein the film is stretched up to 350% elongation in the machine direction.
14. A stretch wrap comprising the cast film of any one of the preceding claims.
15. An article comprising the cast film of any one of claims 1-13.

20

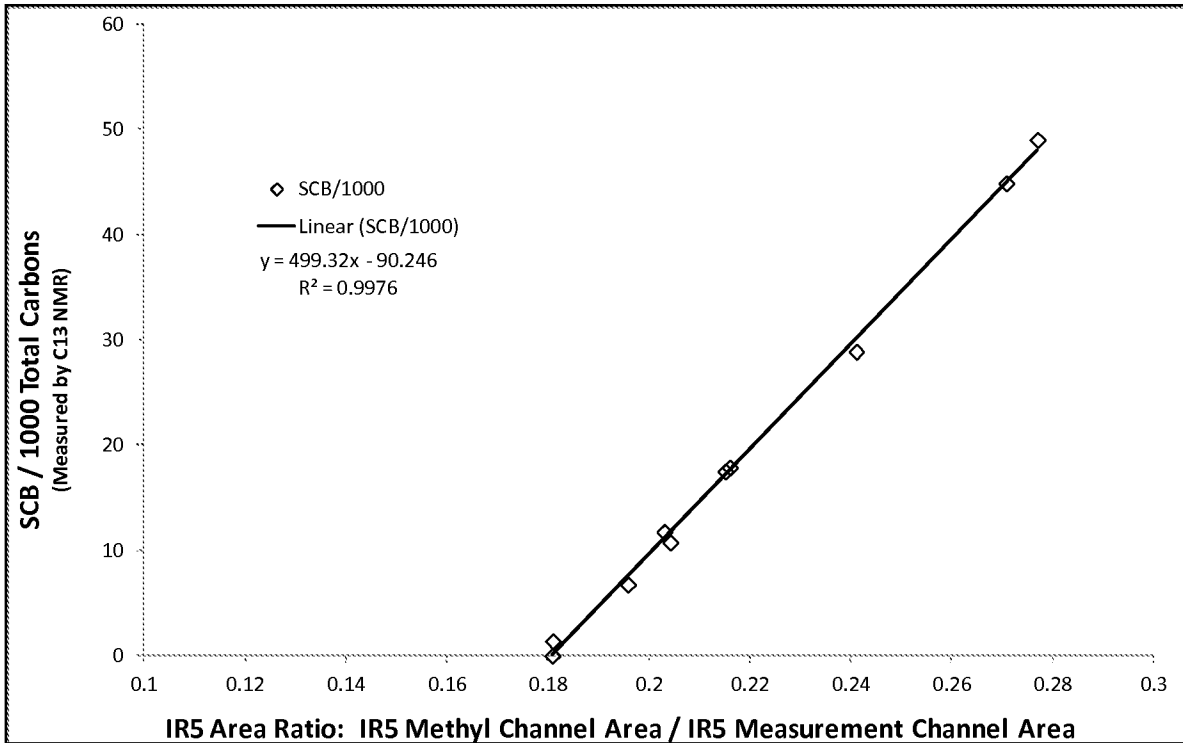


FIGURE 1

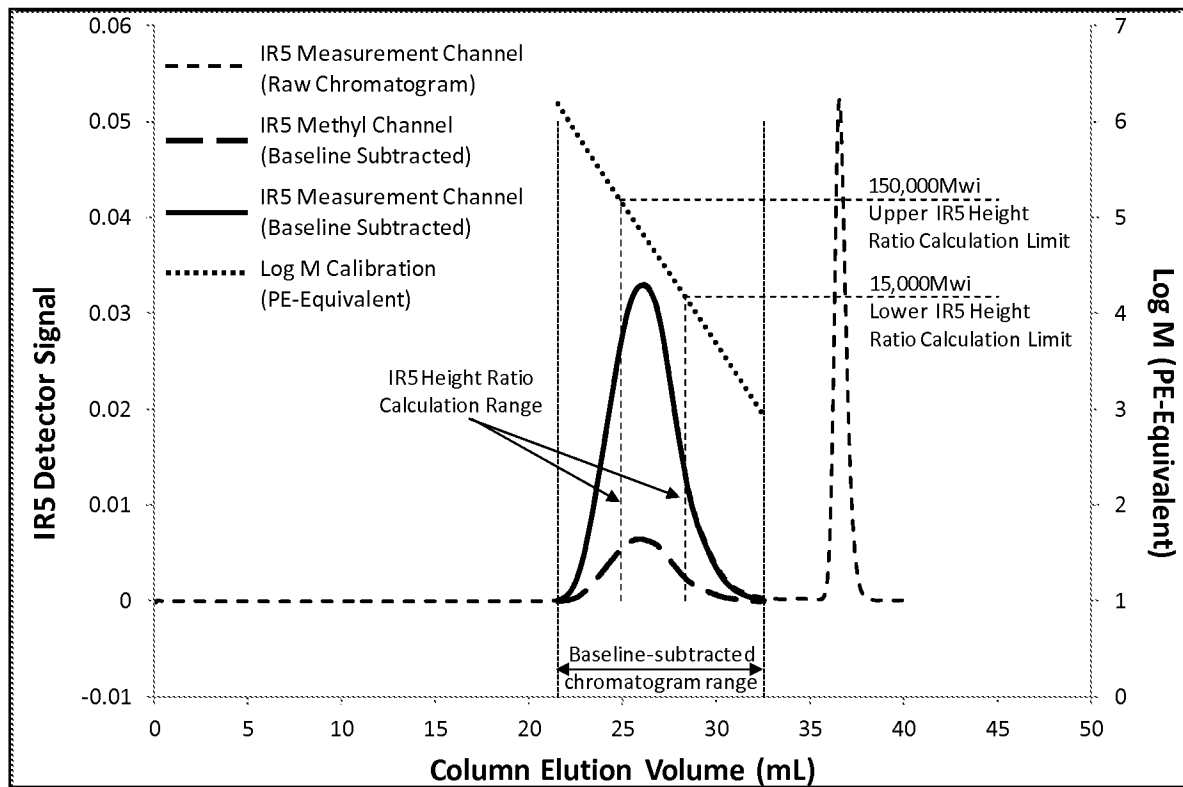


FIGURE 2

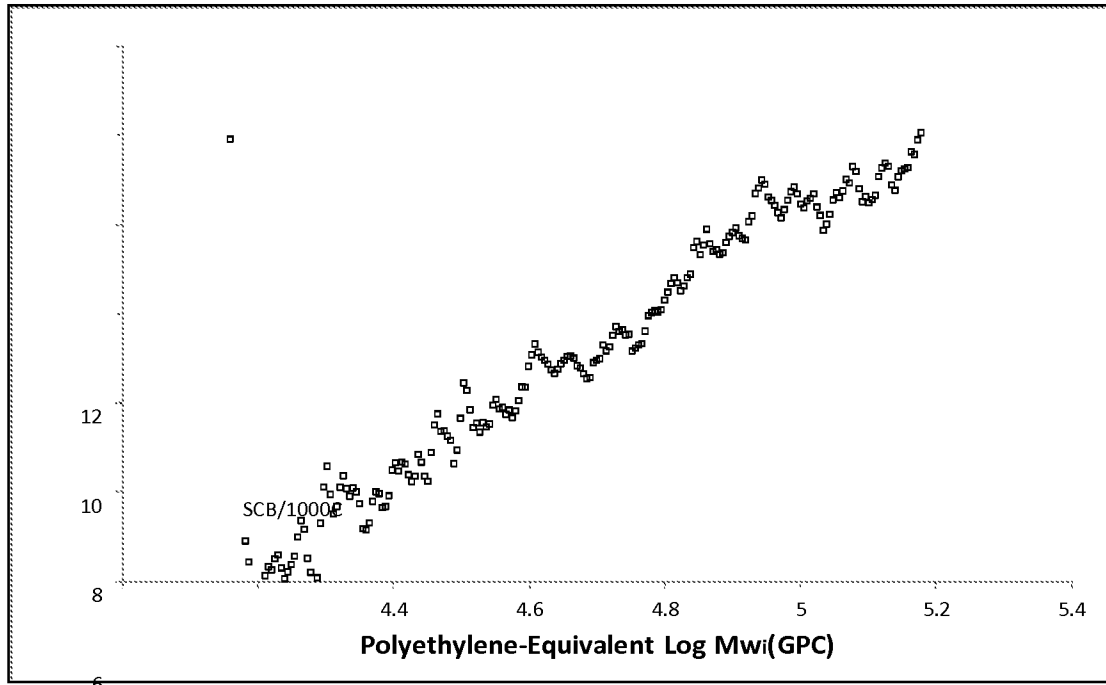


FIGURE 3

4

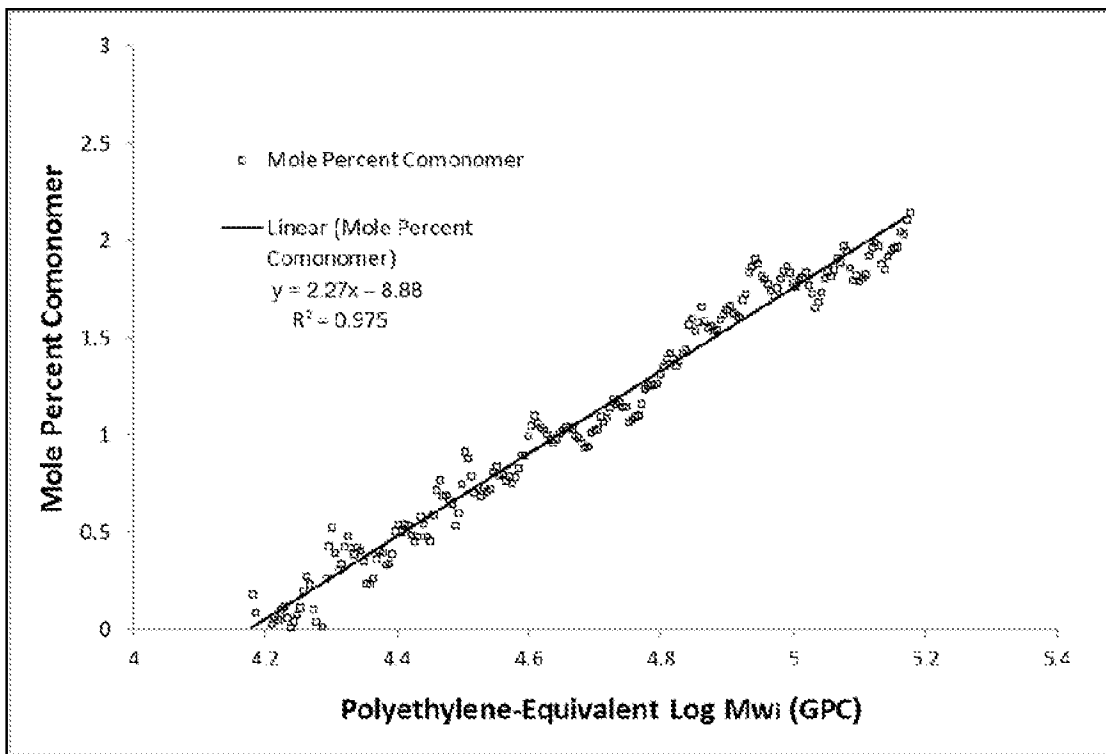


FIGURE 4

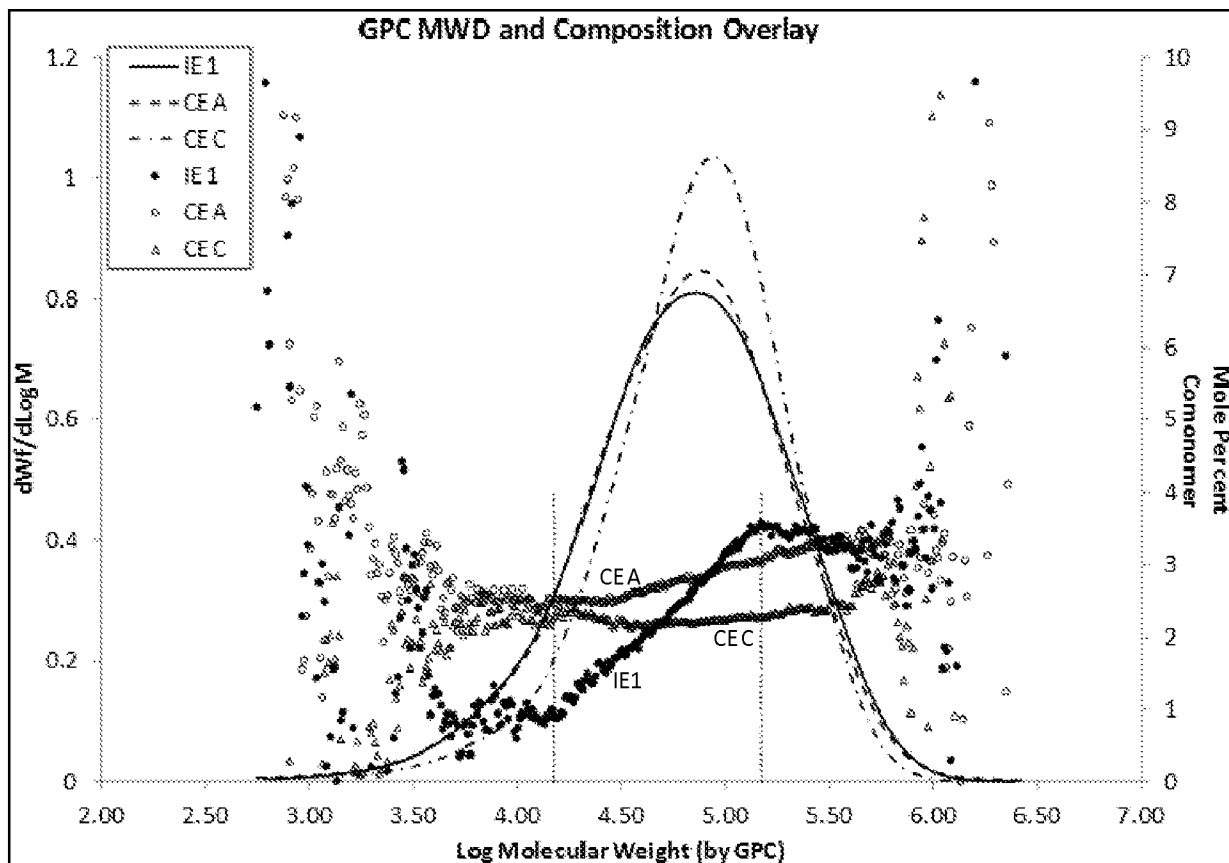


FIGURE 5

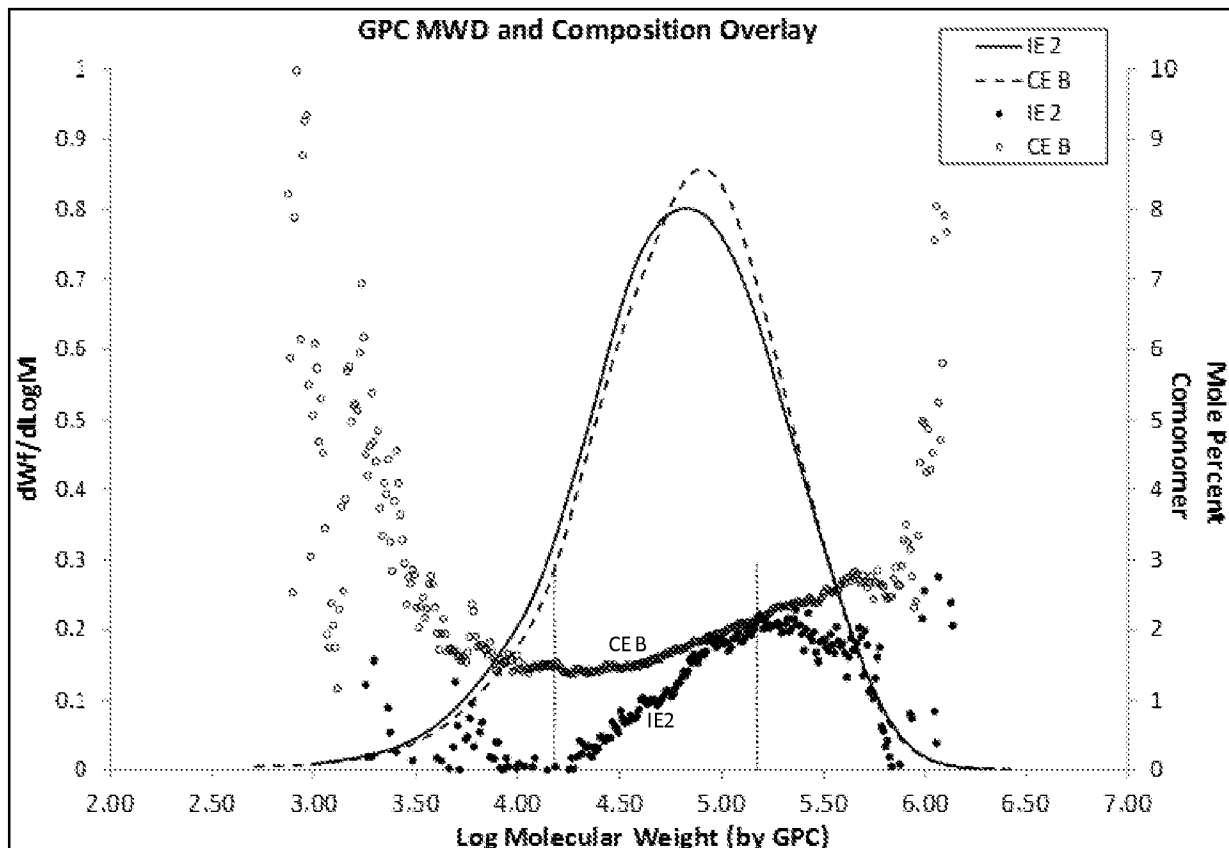


FIGURE 6

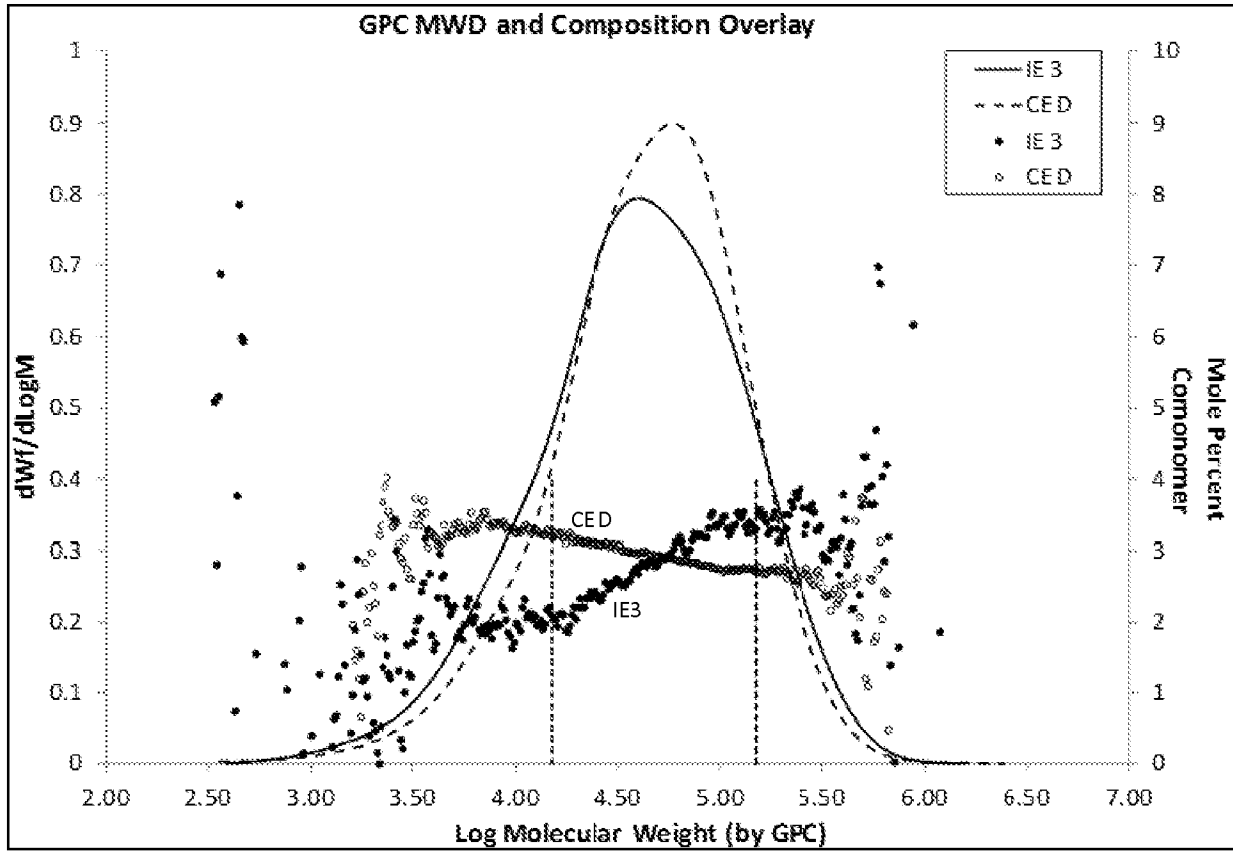


FIGURE 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/037871

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B32B27/06 B32B27/32 C08F210/16 C08F4/64 C08L23/08
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 B32B C08F C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/058639 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]) 17 April 2014 (2014-04-17) cited in the application examples cpc2, ipc5; tables 1a, 1b -----	1-15
A	WO 2014/081505 A1 (EXXONMOBIL CHEM PATENTS INC [US]) 30 May 2014 (2014-05-30) the whole document -----	1-15
X	US 2013/017745 A1 (OSWALD THOMAS [US] ET AL) 17 January 2013 (2013-01-17) paragraph [0064]; example 1; table 1a -----	1-15
X	WO 2013/052636 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]) 11 April 2013 (2013-04-11) pages 12,1.16; examples Inv.Ex.2,3,5; table 1 ----- -/--	1-15

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

18 September 2015

Date of mailing of the international search report

25/09/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Balmer, J

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/037871

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2012/061168 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]; DEMIRORS MEHMET [US]; CONG RONGJUAN) 10 May 2012 (2012-05-10) examples C, D; table 1 -----	1-15
X	US 2013/046061 A1 (HERMEL-DAVIDOCK THERESA J [US] ET AL) 21 February 2013 (2013-02-21) paragraph [0082]; example Inv.Ex4; tables 3-5 -----	1-15
X	WO 98/26000 A1 (DOW CHEMICAL CO [US]; DUN JOZEF J VAN [BE]; DEGROOT JACQUELYN A [US];) 18 June 1998 (1998-06-18) examples 3,4; table 2a -----	1-15
X	WO 2014/012250 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]; BENSASON SELIM [CH]; DEMIRORS MEHMET) 23 January 2014 (2014-01-23) the whole document -----	1-15
X,P	WO 2014/100889 A1 (NOVA CHEM INT SA [CH]; LAM PATRICK [CA]; KER VICTORIA [CA]; GRABOW KAR) 3 July 2014 (2014-07-03) page 12; claims 24,29; figure 3; table 2 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/037871

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO 2014058639	A1	17-04-2014	CN 104837627 A	12-08-2015
			EP 2906423 A1	19-08-2015
			KR 20150068377 A	19-06-2015
			US 2015259586 A1	17-09-2015
			WO 2014058639 A1	17-04-2014
WO 2014081505	A1	30-05-2014	CN 104853917 A	19-08-2015
			EP 2922699 A1	30-09-2015
			WO 2014081505 A1	30-05-2014
US 2013017745	A1	17-01-2013	NONE	
WO 2013052636	A1	11-04-2013	CN 103958751 A	30-07-2014
			CN 103975099 A	06-08-2014
			EP 2751313 A1	09-07-2014
			EP 2751315 A1	09-07-2014
			JP 2014531528 A	27-11-2014
			JP 2014532125 A	04-12-2014
			KR 20140072070 A	12-06-2014
			KR 20140072071 A	12-06-2014
			US 2014248811 A1	04-09-2014
			US 2014248816 A1	04-09-2014
			WO 2013052636 A1	11-04-2013
			WO 2013052638 A1	11-04-2013
WO 2012061168	A1	10-05-2012	AR 083681 A1	13-03-2013
			CA 2769598 A1	02-05-2012
			CN 102712794 A	03-10-2012
			EP 2491081 A1	29-08-2012
			ES 2446379 T3	07-03-2014
			JP 2014500894 A	16-01-2014
			KR 20130117638 A	28-10-2013
			TW 201223978 A	16-06-2012
			US 2013210990 A1	15-08-2013
			WO 2012061168 A1	10-05-2012
US 2013046061	A1	21-02-2013	CN 103038281 A	10-04-2013
			EP 2542621 A2	09-01-2013
			JP 2013521382 A	10-06-2013
			KR 20130004585 A	11-01-2013
			RU 2012141894 A	10-04-2014
			US 2013046061 A1	21-02-2013
			WO 2011109563 A2	09-09-2011
WO 9826000	A1	18-06-1998	AR 010767 A1	12-07-2000
			AT 356169 T	15-03-2007
			AU 740572 B2	08-11-2001
			AU 7400598 A	03-07-1998
			BR 9713707 A	08-01-2002
			CA 2274746 A1	18-06-1998
			CN 1245513 A	23-02-2000
			DE 69737458 T2	05-07-2007
			EP 0944669 A1	29-09-1999
			ES 2279551 T3	16-08-2007
			JP 2001505949 A	08-05-2001
			JP 2009097017 A	07-05-2009
			MY 126398 A	29-09-2006
			NZ 336307 A	30-11-2001

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2015/037871

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		TW 496884 B	01-08-2002
		WO 9826000 A1	18-06-1998
		ZA 9711155 A	11-06-1999
WO 2014012250	A1 23-01-2014	CN 104640921 A	20-05-2015
		EP 2875073 A1	27-05-2015
		JP 2015523446 A	13-08-2015
		KR 20150037832 A	08-04-2015
		US 2015225520 A1	13-08-2015
		WO 2014012250 A1	23-01-2014
WO 2014100889	A1 03-07-2014	CA 2800056 A1	24-06-2014
		CA 2836285 A1	24-06-2014
		KR 20150099543 A	31-08-2015
		US 2014179873 A1	26-06-2014
		WO 2014100889 A1	03-07-2014