

(19)



(11)

EP 2 713 038 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

02.04.2014 Bulletin 2014/14

(51) Int Cl.:

F02M 35/10 ^(2006.01)

F16L 33/00 ^(2006.01)

F16L 47/22 ^(2006.01)

(21) Application number: **12290322.2**

(22) Date of filing: **28.09.2012**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

(71) Applicant: **MANN+HUMMEL GmbH**

71638 Ludwigsburg (DE)

(72) Inventors:

- **Girard, Dominique**
53970 Montigné le Brillant (FR)
- **Sarrazin, Maxime**
53260 Entrammes (FR)

(54) **Pipe system for a fluid, a method and an apparatus for connecting at least one duct part of a pipe system**

(57) The present invention relates to a pipe system for a fluid, in particular a gas, in particular of an intake system (10) or a turbocharger of an internal combustion engine, in particular of a motor vehicle. Further the present invention relates to a method and an apparatus for connecting at least one duct part (12) of a pipe system

(10). The pipe system (10) has at least one blow-molded duct part (12) made of plastic and at least one fitting (18) for connecting the at least one blow-molded duct part (12) with another part (20) of the pipe system (10). The fitting (18) is inserted tight in the at least one blow-molded duct part (12). The at least one blow-molded duct part (12) is shrunk on the at least one fitting (18).

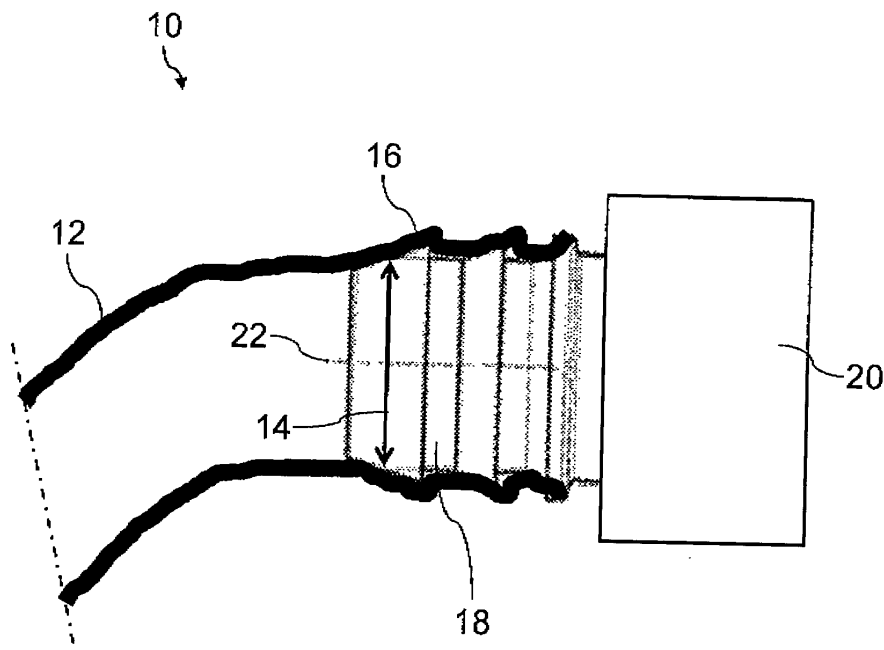


Fig. 1

EP 2 713 038 A1

Description

Technical Field

[0001] The present invention relates to a pipe system for a fluid, in particular a gas, in particular of an intake system or a turbocharger of an internal combustion engine, in particular of a motor vehicle, having at least one blow-molded duct part made of plastic and at least one fitting for connecting the at least one blow-molded duct part with another part of the pipe system, whereby the fitting is inserted tight in the at least one blow-molded duct part.

[0002] The present invention relates further to a method for connecting at least one duct part of a pipe system for a fluid, in particular a gas, in particular of an intake system or a turbocharger of an internal combustion engine, in particular of a motor vehicle, with another part of the pipe system by use of at least one fitting, whereby the at least one duct part is made of plastic by a blow molding process and the at least one fitting is inserted tight in the at least one blow-molded duct part.

[0003] Additionally, the present invention relates to an apparatus for connecting at least one duct part of a pipe system for a fluid, in particular a gas, in particular of an intake system or a turbocharger of an internal combustion engine, in particular of a motor vehicle, with another part of the pipe system by use of at least one fitting, having an extruder for extruding a plastic material in a blowing mold for blow molding the at least one duct part and having a device for inserting the at least one fitting tight in the at least one blow-molded duct part.

State of Technology

[0004] An air intake system of an internal combustion engine known from the market has a first blow-molded duct part made of plastic. A second duct part has a nipple for connection with the first duct part. The nipple of the second duct part is inserted in a connection end of the first duct part. The connection between the first duct part and the second duct part is fixed tightly by welding.

[0005] It is an object of the invention to provide a pipe system, a method and an apparatus for connecting at least one duct part of the pipe system of the above-mentioned kind, in which the connection can be realized easily directly inside the mould without external ejection process and the connection is reliable and tight.

Disclosure of Invention

[0006] The object is achieved by that, the at least one blow-molded duct part is shrunk on the at least one fitting.

[0007] According to the present invention, the at least one fitting is inserted in the at least one blow-molded duct part while the duct part is plasticized. Due to the shrinking a nonpositive connection between the at least one blow-

molded duct part and the at least one fitting can be realized which can be actuated by adherence. The at least one fitting is a male part. It can be a nipple or a pipe socket. The at least one fitting can be connected to a second duct part. A connecting end of the second duct part can be formed as a fitting. An external diameter of the at least one fitting, in particular the connecting end of the second duct part, can correspond to an internal diameter of the connection end of the at least one blow-molded duct part.

[0008] Favorably the external diameter of the at least one fitting can be between 15 mm and 70 mm. The internal diameter of the connection end of the at least one blow-molded duct part can be between 15 mm and 70 mm. The shape of the duct part can be circular or oval.

[0009] Favorably a wall thickness of the at least one fitting can be between 2 mm and 4 mm. A wall thickness of the at least one blow-molded duct part can be between 2 mm and 4 mm. The at least one fitting can be inserted in the at least one blow-molded duct part before the plasticized material of the blow-molded duct part is cooled down. During the cooling the at least one blow-molded duct part shrinks on the at least one fitting. So a tight connection can be realized. Additional tools in particular for welding are not necessary. Advantageously the at least one fitting can be inserted during the blowing phase of the at least one blow-molded duct part. Favorably a radial outer surface of the at least one fitting can be graded in axial direction. So during the shrinkage the shape of the pipe wall of the at least one blow-molded duct part adapts to the outline of the radial outer circumferential side of the at least one fitting. In this way a positive locking connection between the at least one blow-molded duct part and the at least one fitting can be realized. The positive locking connection can be realized alternatively or additionally to the nonpositive connection. In particular the radial outer surface of the at least one fitting can be sawtoothed. So the stability of the positive locking connection can be further increased. In particular, the pipe system can be part of a turbo link, an air connection or a connection of a filter. Further, the pipe system can be part of a so-called Christmas tree. A Christmas tree can be an assembly of valves, spools and fittings.

[0010] According to a favorable embodiment of the invention, the at least one blow-molded duct part can be connected to the at least one fitting by material engagement. The material engagement can be realized by fusing the materials of the at least one blow-molded duct part and the at least one fitting together. The fusion of the materials can be caused by the contact of the plasticized material of the at least one blow-molded duct part with the material of the at least one fitting. The fusion can be improved by the surface compression load due to the shrinking of the at least one blow-molded duct part. The tightness of the connection can be further increased by the material engagement. The material engagement can be realized additionally or alternatively to the nonpositive connection or the positive locking connection.

[0011] Advantageously, the at least one fitting can be made of plastic. Favorably it can be made of polyamide. Polyamide is a thermoplastic which easy can be plasticized by heating. It hardens when it cools down. In particular the at least one fitting can be made of polyamide, which is chemically strengthened with 15 % glass fiber. Favorably the at least one fitting can be made of a strengthened polyamide from Caprolactam, in particular known as "PA 6 15% GF", or a polyamide known as "PA 666 15% GF". Favorably, an external surface of the at least one plastic fitting can be plasticized before inserting in the at least one blow-molded duct part. For plasticizing the fitting can be heated. After inserting the fitting, the plasticized material of its surface can fuse with the plasticized material of the internal surface of the blow-molded duct part. So the material engagement between the at least one fitting and the at least one blow-molded duct part can be realized by chemical adhesion.

[0012] Advantageously, the at least one blow-molded duct part can be made of polyamide. Favorably the at least one blow-molded duct part can be made of polyamide, which is chemically strengthened with 15 % glass fiber, known as "PA 6 15% GF" or "PA 666 15% GF". Polyamide easy can be plasticized by heating. Plasticized polyamide can be hardened by cooling down. Plasticized polyamide can realize a material engagement with the radial outer surface of the at least one fitting.

[0013] According to a further favorable embodiment of the invention, the at least one blow-molded duct part and the at least one fitting can be made of different materials. The materials can differ in thermal conductivity and/or temperature resistance and/or electrical conductivity and/or mechanical stability and/or flexibility. In this way the at least one blow-molded duct part and the at least one fitting can be optimized for their function each. In particular the at least one fitting can be made of a rigid material. The at least one fitting can be made of a rigid plastic or a metal. The at least one blow-molded duct part can be made of a flexible material.

[0014] According to a further favorable embodiment of the invention, a gasket can be placed between the at least one blow-molded duct part and the at least one fitting. In this way the tightness of the connection can be increased further.

[0015] The object is further achieved by the method in that, the plastic material for realizing the at least one blow-molded duct part is plasticized by heating and formed in a blowing mold, the plasticized at least one blow-molded duct part is shrunk on the at least one fitting, the plasticized at least one blow-molded duct part is cooled down.

[0016] All features and advantages of the above-mentioned inventive pipe system apply analogous to the inventive method and its favorable embodiments. Advantageously, the plasticized plastic material can be extruded. Therefore a method of suction extruding by use of an extruder can be performed. The extruded plastic material can be blow-molded by use of the blowing mold. Extruding and blow molding can happen during just several seconds.

Scrap of the blow-molded duct part can be cut off. Then the plasticized at least one blow-molded duct part can be moved to the at least one fitting. Advantageously, the blowing mold with the blow-molded duct part can be moved to the at least one fitting. The at least one fitting can be strongly inserted in the plasticized at least one blow-molded duct part. Therefore the at least one fitting can be mounted on a lifter which can be positioned by an actuator. During the insertion of the at least one fitting, the at least one blow-molded duct part can still be placed within the blowing mold. After the insertion of the at least one fitting, the at least one blow-molded duct part can be cooled down. During the down cooling, the at least one blow-molded duct part can shrink tight on the at least one fitting. In this way, the at least one duct part is blow-molded on the at least one fitting, effectively.

[0017] According to a favorable embodiment of the invention, the at least one fitting can be heated before the plasticized at least one duct part is shrunk on the at least one fitting. In this way the at least one fitting and the at least one duct part can be connected by material engagement. Advantageously, the at least one fitting can be made of plastic. Thus the plastic material of the at least one duct part and the material of the at least one fitting can fuse. So a material engagement between the at least one fitting and the at least one blow-molded duct part can be realized by chemical adhesion.

[0018] The object is further achieved by the apparatus by a cutting device for trimming the at least one blow-molded duct part, a driver for moving the blowing mold to the device for inserting the at least one fitting, whereby the device for inserting the at least one fitting has means for pushing the at least one fitting into the at least one duct part. The device for inserting the at least one fitting can also have heating means for heating the at least one fitting before pushing it into the at least one duct part. The extruder can be a suction extruder. All features and advantages of the above-mentioned inventive pipe system and the above-mentioned inventive method apply analogous to the inventive apparatus and its favorable embodiments.

Brief Description of Drawings

[0019] The present invention together with the above-mentioned and other objects and advantages may best be understood from the following detailed description of the embodiments, but not restricted to the embodiments, wherein is shown schematically

- Figure 1 a detail of an air intake system of an internal combustion engine of a motor vehicle with a duct part which is connected to a fitting, whereby the duct part is shown in a longitudinal section;
- Figure 2 an apparatus for connecting the duct part of the pipe system of figure 1 with the fitting in an early production step;

Figure 3 the apparatus of figure 2 in a posterior production step.

[0020] In the drawings, equal or similar elements are referred to by equal reference numerals. The drawings are merely schematic representations, not intended to portray specific parameters of the invention. Moreover, the drawings are intended to depict only typical embodiments of the invention and therefore should not be considered as limiting the scope of the invention.

Embodiment(s) of Invention

[0021] In figure 1 a detail of an air intake system 10 of an internal combustion engine of a motor vehicle is depicted. The air intake system 10 has a first duct part 12. The first duct part 12 is shown in a longitudinal section. The first duct part 12 is blow-molded of polyamide. The polyamide is chemically strengthened with 15% glass fiber. Favorably so-called "PA6 15% GF" or "PA666 15% GF" can be used. An internal diameter of the first duct part 12 at its shown connection end 16 varies between 15 mm and 70 mm, favorably between 47 mm and 52 mm. The internal diameter is indicated in figure 1 with a double arrow 14. A wall thickness of the first duct part 12 is between 2 mm and 4 mm, favorably 3 mm.

[0022] The air intake system 10 further has a fitting 18 for connecting the first duct part 12 with a second duct part 20 of the air intake system 10. The fitting 18 is a tube section. In figure 1 it is shown in a side view. The fitting 18 is inserted tightly in the connection end 16 of the first duct part 12. The first duct part 12 is shrunk on the fitting 18. The first duct part 12 is connected to the fitting 18 by a combination of material engagement, nonpositive connection and positive locking connection.

[0023] The fitting 18 is made of plastic. It is connected in one piece to the second duct part 20. The first duct part 12 and the fitting 18 are made of different materials. The radial outer circumferential side of the fitting 18 is sawtoothed in axial direction. An imaginary axis of the fitting 18 is indicated with a broken line 22. The shape of the pipe wall of the first duct part 12 is adapted to the radial outer circumferential side of the fitting 18. In this way the positive locking connection between the first duct part 12 and the fitting 18 is realized. An external diameter of the fitting 18 corresponds to the internal diameter 14 of the connection end 16 of the first duct part 12. It is between 35 mm and 70 mm. Favorably it is between 47 mm and 52 mm. A wall thickness of the fitting 18 is between 2 mm and 4 mm, favorably 3 mm. Due to the tight shrinking of the first duct part 12, the nonpositive connection by actuation by adherence is realized.

[0024] In figures 2 and 3 an apparatus 24 for connecting the first duct part 12 with the second duct part 20 by use of the fitting 18 is shown in two different production steps.

[0025] The apparatus 24 has an extruder 26 for extruding polyamide to a parison which is formed in a blowing

mold 28 to the first duct part 12. Further the apparatus 24 has a suction housing 30, into which a leading end of the parison is sucked for forming the parison to the first duct part 12. The suction housing 30 is placed on the opposite side of the extruder 26. It has an opening 31. In a state of extruding and blow molding of the first duct part 12, the opening 31 is connected with an outlet opening 32 of the blowing mold 28. The state of the apparatus 24 of extruding and blow molding of the first duct part 12 is shown in figure 2. The extruder 26 and the suction housing 30 are fixed relative to another.

[0026] Between the blowing mold 28 and the suction housing 30 a blade 36 for trimming the first duct part 12 is mounted on the suction housing 30. The blade 36 is movable parallel to a surface of the blowing mold 28, which abuts on the suction housing 30. In figure 2 a moving direction of the blade 36 is indicated with an arrow 38.

[0027] The blowing mold 28 is movable in direction of an arrow 34 relative to the extruder 26 and the suction housing 30 toward a device for inserting 40 the fitting 18 tight in connection end 16 of the first duct part 12. Therefore the apparatus 24 has a driver 42 for moving the blowing mold 28 toward the device for inserting 14. A housing 44 of the device for inserting 40 is affixed to the suction housing 30 by a bridge 46. At a further favorable contrary embodiment, the blowing mould 28 is fixed and the fitting apparatus is moved.

[0028] The housing 44 has a cylindrical interior 48, in which the second duct part 20 with the fitting 18 can be placed. At a front side of the interior 48 the housing 44 has an assembling opening 50. In the state of inserting the fitting 18, the assembling opening 50 is coaxial to the outlet opening 32 of the blowing mold 28. The state of inserting the fitting 18 of the apparatus 24 is shown in figure 3.

[0029] On the side opposite to the assembling opening 50, the housing 44 has an actuator opening 52. The actuator opening 52 is coaxial to the assembling opening 50. A piston 54 of an actuator 56 leads through the actuator opening 52. The piston 54 is movable in the interior 48. A moving direction of the piston 54 is axial to the interior 48. In figure 3, the moving direction is indicated with an arrow 58.

[0030] Near the assembling opening 50, a cylindrical heating element 60 is placed at the radial inner circumferential side of the housing 44. Favorably the heating element 60 is electrically operated.

[0031] An exemplary method for connecting the first duct part 12 with the second duct part 20 by use of the fitting 18 is described with the help of figures 2 and 3.

[0032] The apparatus 24 is in its state of extruding as shown in figure 2. The extruder 26 is provided with the polyamide for the first duct part 12. The pre-casted second duct part 20 with the fitting 18 is placed in the interior 48 of the housing 44 of the device for inserting 40. The fitting 18 is coaxial to the assembling opening 50. The free end of the fitting 18 points to the assembling opening 50. The second duct part 20 is mounted on the free end

of the piston 54. The fitting 18 is placed inside the heating element 60.

[0033] The polyamide is heated and plasticized within the extruder 26. The plasticized polyamide is extruded with the extruder 26 and blown to the parison in the blowing mold 28. The parison is sucked with its leading end into the suction housing 30. So the parison is sucked into the blowing mold 28 and formed to the first duct part 12.

[0034] The blade 36 is moved in direction 38 to cut off the scrap 62 of the leading end of the first duct part 12 which is within the suction housing 30. So the first duct part 12 is trimmed.

[0035] The blowing mold 28 together with the first duct part 12 is moved in direction 34 toward the device for inserting 40. As it is shown in figure 3, the leading end, which realizes the connection end 16 of the first duct part 12, then is coaxial to the fitting 18 in the interior 48 of the housing 44.

[0036] The fitting 18 is heated by the heating element 60. The radial outer surface of the fitting 18 so is plasticized.

[0037] The piston 54 is moved by the actuator 56 in moving direction 58 toward the assembling opening 50, so that the fitting 18 is pushed in the still plasticized connection end 16 of the first duct part 12.

[0038] The plasticized first duct part 12 is cooled down. For this the blowing mold 28 can be cooled down. Thereby the plasticized first duct part 12 is shrinked on the fitting 18. During the shrinkage of the first duct part 12 the shape of its pipe wall adapts to the profile of the radial outer circumferential side of the fitting 18. The plasticized material on the radial outer circumferential side of the fitting 18 fuses with the plasticized material of the first duct part 12 for realizing the material engagement. The first duct part 12 and the second duct part 20 are connected tight by use of the fitting 18.

[0039] After the connection of the first duct part 12 with the fitting 18 is firm, the blowing mold 28 is removed from the housing 44. The blowing mold 28 is opened and the first duct part 12 with the fitting 18 and the second duct part 20 are removed.

[0040] The invention is not limited to an air intake system 10 of an internal combustion engine of a motor vehicle. The invention can also be applied for other kinds of pipe systems for fluids. For example it can be used for a turbocharger of an internal combustion engine. The invention can be applied for pipe systems for other gases or liquids, for example oil, fuel or water. The invention is further applicable to other kinds of internal combustion engines, for example to industrial engines.

[0041] The air intake system 10 can have more than one blow-molded first duct part 12. The air intake system 10 can have more than one fitting 18.

[0042] Instead of being connected with the second duct part 20, the first duct part 12 can also be connected with another part of the air intake system 10, for example with a housing of an air filter or a so-called Christmas tree.

[0043] The internal diameter 14 of the connection end

16 of the first duct part 12 can be less than 35 mm or more than 70 mm. Accordingly, the external diameter of the fitting 18 can be less than 35 mm or more than 70 mm.

[0044] The wall thickness of the first duct part 12 can be less than 2 mm or more than 4 mm. The wall thickness of the fitting 18 can be less than 2 mm or more than 4 mm.

[0045] Instead of being sawtoothed the radial outer circumferential side of the fitting 18 can be graded in axial direction in a different way. For example it can be wavy. The radial outer circumferential side of the fitting 18 can also be straight in axial direction.

[0046] The connection between the first duct part 12 and the fitting 18 can be realized by material engagement or nonpositive connection, in particular actuation by adherence, or positive locking connection or a combination of those connection types.

[0047] The first duct part 12 also can be made of polyamide which is strengthened with more or less than 15% glass fiber. Also polyamide without glass fiber can be used. The first duct part 12 can also be made of another kind of plastic material.

[0048] The fitting 18 can also be made of polyamide. The polyamide also can be chemically strengthened with 15 % glass fiber, for example so-called "PA6 15% GF" or "PA666 15% GF". Also polyamide with more or less than 15 % glass fiber or without glass fiber can be used. The fitting 18 also can be made of a material different from plastic. For example it can be made of metal.

[0049] The first duct part 12 and the fitting 18 can also be made of the same material.

[0050] A gasket can be placed between the first duct part 12 and the fitting 18.

[0051] Instead of one cylindrical heating element 60 also multiple heating elements can be placed at the radial inner circumferential side of the housing 44.

[0052] The order of the procedural steps of the exemplary method for connecting the first duct part 12 with the fitting 18 can be different.

[0053] Also an alternative method for connecting the duct parts 12 and 20 by use of the fitting 18 can be applied, which differs from the described exemplary method.

[0054] The first duct part 12 can be shrinked on the fitting 18 without heating the fitting 18 before.

[0055] The first duct part 12 can be connected with the fitting 18 by use of an apparatus different from the exemplary described apparatus 24.

Claims

1. Pipe system for a fluid, in particular a gas, in particular of an intake system (10) or a turbocharger of an internal combustion engine, in particular of a motor vehicle, having at least one blow-molded duct part (12) made of plastic and at least one fitting (18) for connecting the at least one blow-molded duct part (12) with another part (20) of the pipe system (10), whereby the fitting (18) is inserted tight in the at least

- one blow-molded duct part (12), **characterized in that**, the at least one blow-molded duct part (12) is shrunk on the at least one fitting (18).
2. Pipe system according to claim 1, **characterized in that**, the at least one blow-molded duct part (12) is connected to the at least one fitting (18) by material engagement. 5
 3. Pipe system according to claim 1 or 2, **characterized in that**, the at least one fitting (18) is made of plastic. 10
 4. Pipe system according to one of the previous claims, **characterized in that**, the at least one blow-molded duct part (12) is made of polyamide. 15
 5. Pipe system according to one of the previous claims, **characterized in that**, the at least one blow-molded duct part (12) and the at least one fitting (18) are made of different materials. 20
 6. Pipe system according to one of the previous claims, **characterized in that**, a gasket is placed between the at least one blow-molded duct part and the at least one fitting. 25
 7. Method for connecting at least one duct part (12) of a pipe system for a fluid, in particular a gas, in particular of an intake system (10) or a turbocharger of an internal combustion engine, in particular of a motor vehicle, with another part (20) of the pipe system (10) by use of at least one fitting (18), whereby the at least one duct part (12) is made of plastic by a blow molding process and the at least one fitting (18) is inserted tight in the at least one blow-molded duct part (12), **characterized in that**, the plastic material for realizing the at least one blow-molded duct part (12) is plasticized by heating and formed in a blowing mold (28), the plasticized at least one blow-molded duct part (12) is shrunk on the at least one fitting (18), the plasticized at least one blow-molded duct part (12) is cooled down. 30
35
40
 8. Method according to claim 7, **characterized in that**, the at least one fitting (18) is heated before the plasticized at least one duct part (12) is shrunk on the at least one fitting (18). 45
 9. Method according to claim 6 or 7, **characterized in that**, the at least one fitting (18) is made of plastic. 50
 10. Apparatus (24) for connecting at least one duct part (12) of a pipe system for a fluid, in particular of an intake system (10) or a turbocharger of an internal combustion engine, in particular of a motor vehicle, with another part (20) of the pipe system (10) by use of at least one fitting (18), having an extruder (26) for extruding a plastic material in a blowing mold (28) 55

for blow molding the at least one duct part (12) and having a device for inserting (40) the at least one fitting (18) tight in the at least one blow-molded duct part (12), **characterized by** a cutting device (36) for trimming the at least one blow-molded duct part (12), a driver (42) for moving the blowing mold (28) to the device for inserting (40) the at least one fitting (18), whereby the device for inserting (14) the at least one fitting (18) has means (54, 56) for pushing the at least one fitting (18) into the at least one duct part (12).



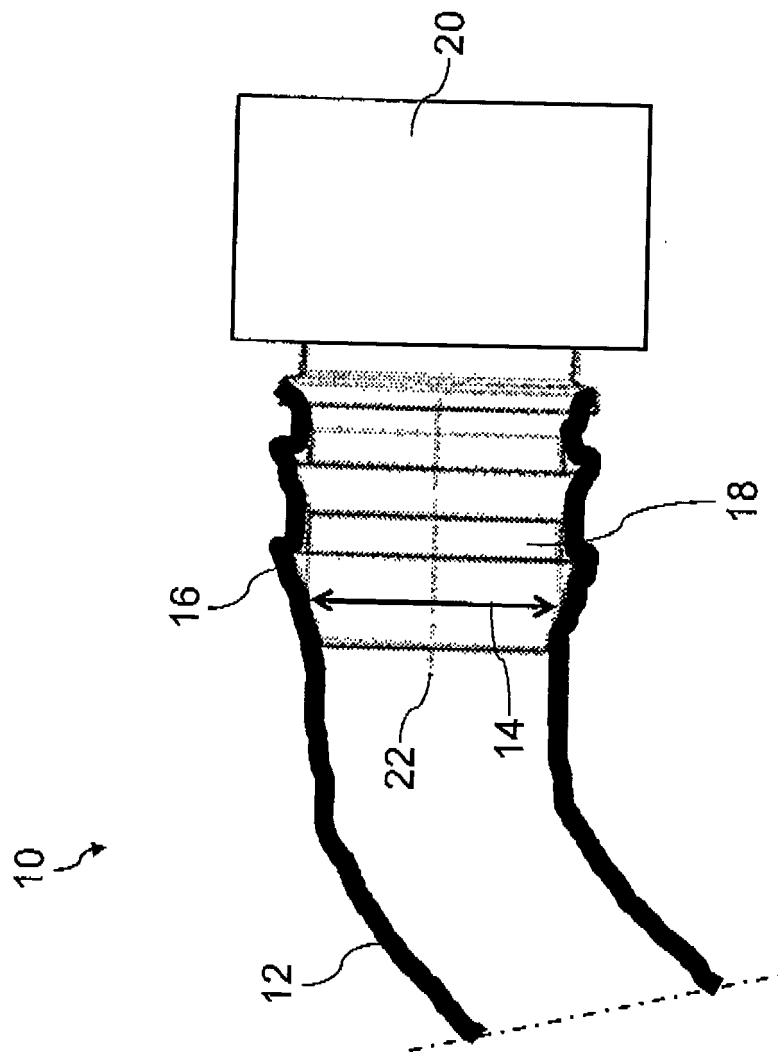


Fig. 1



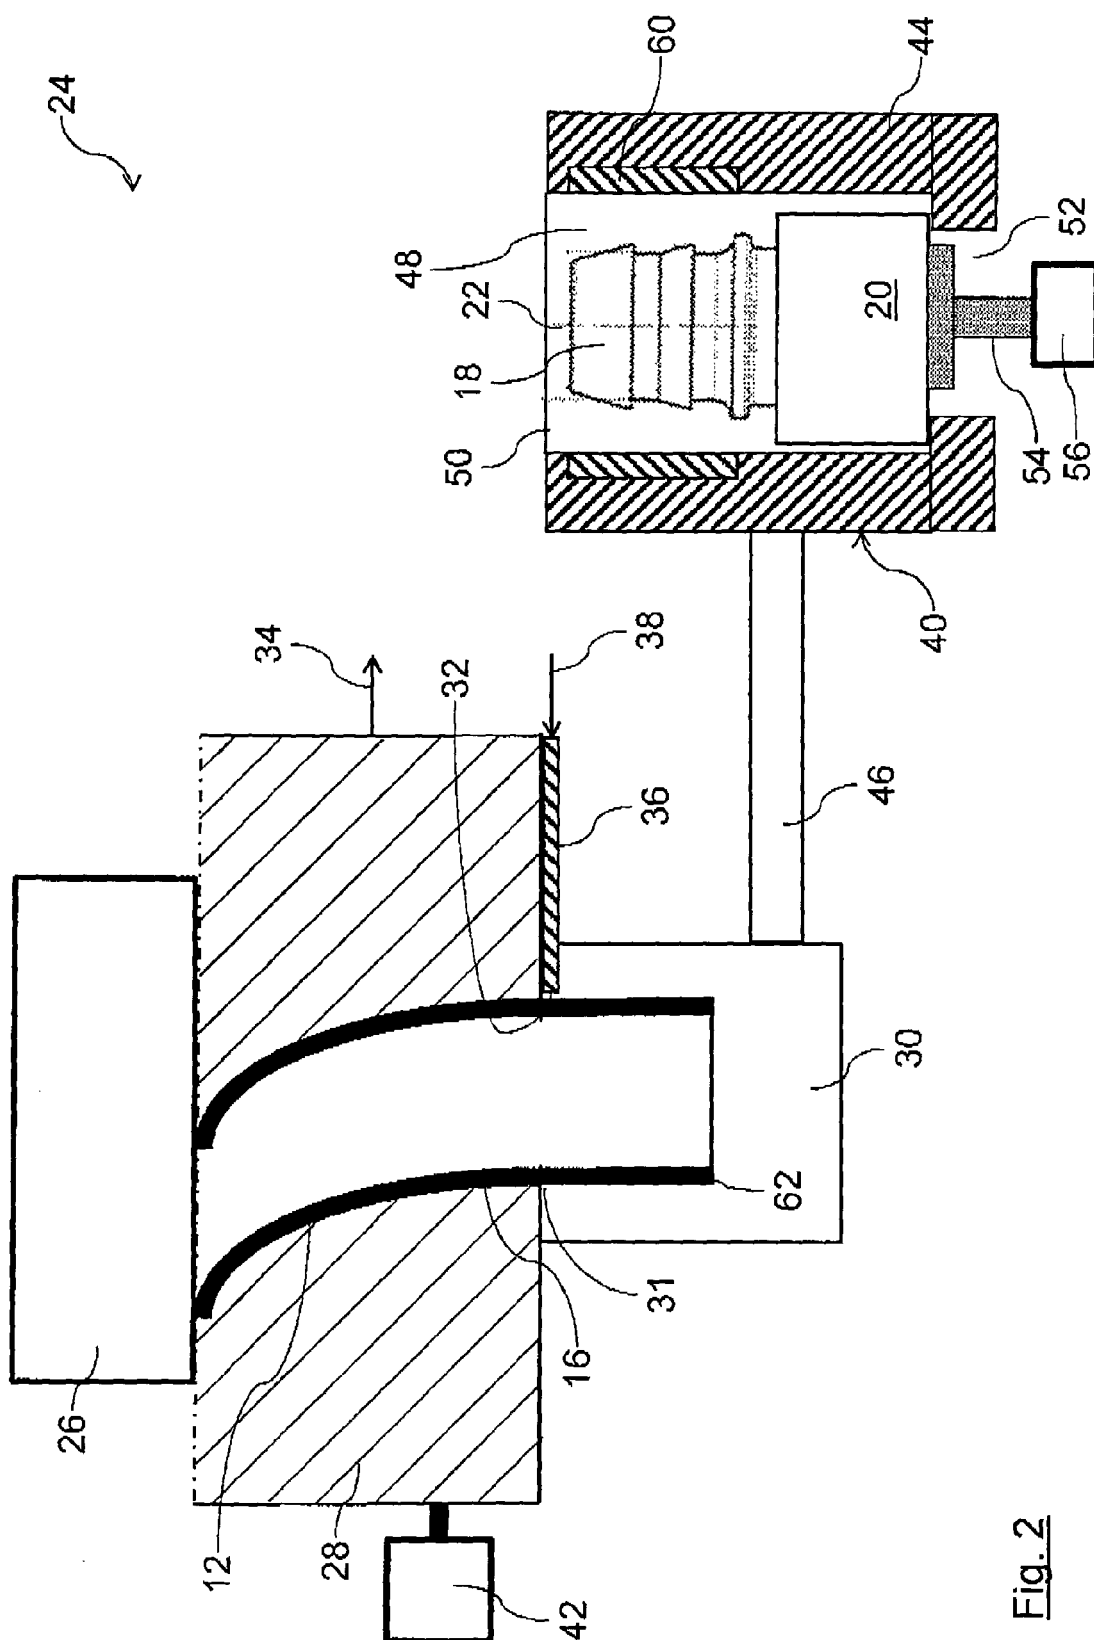

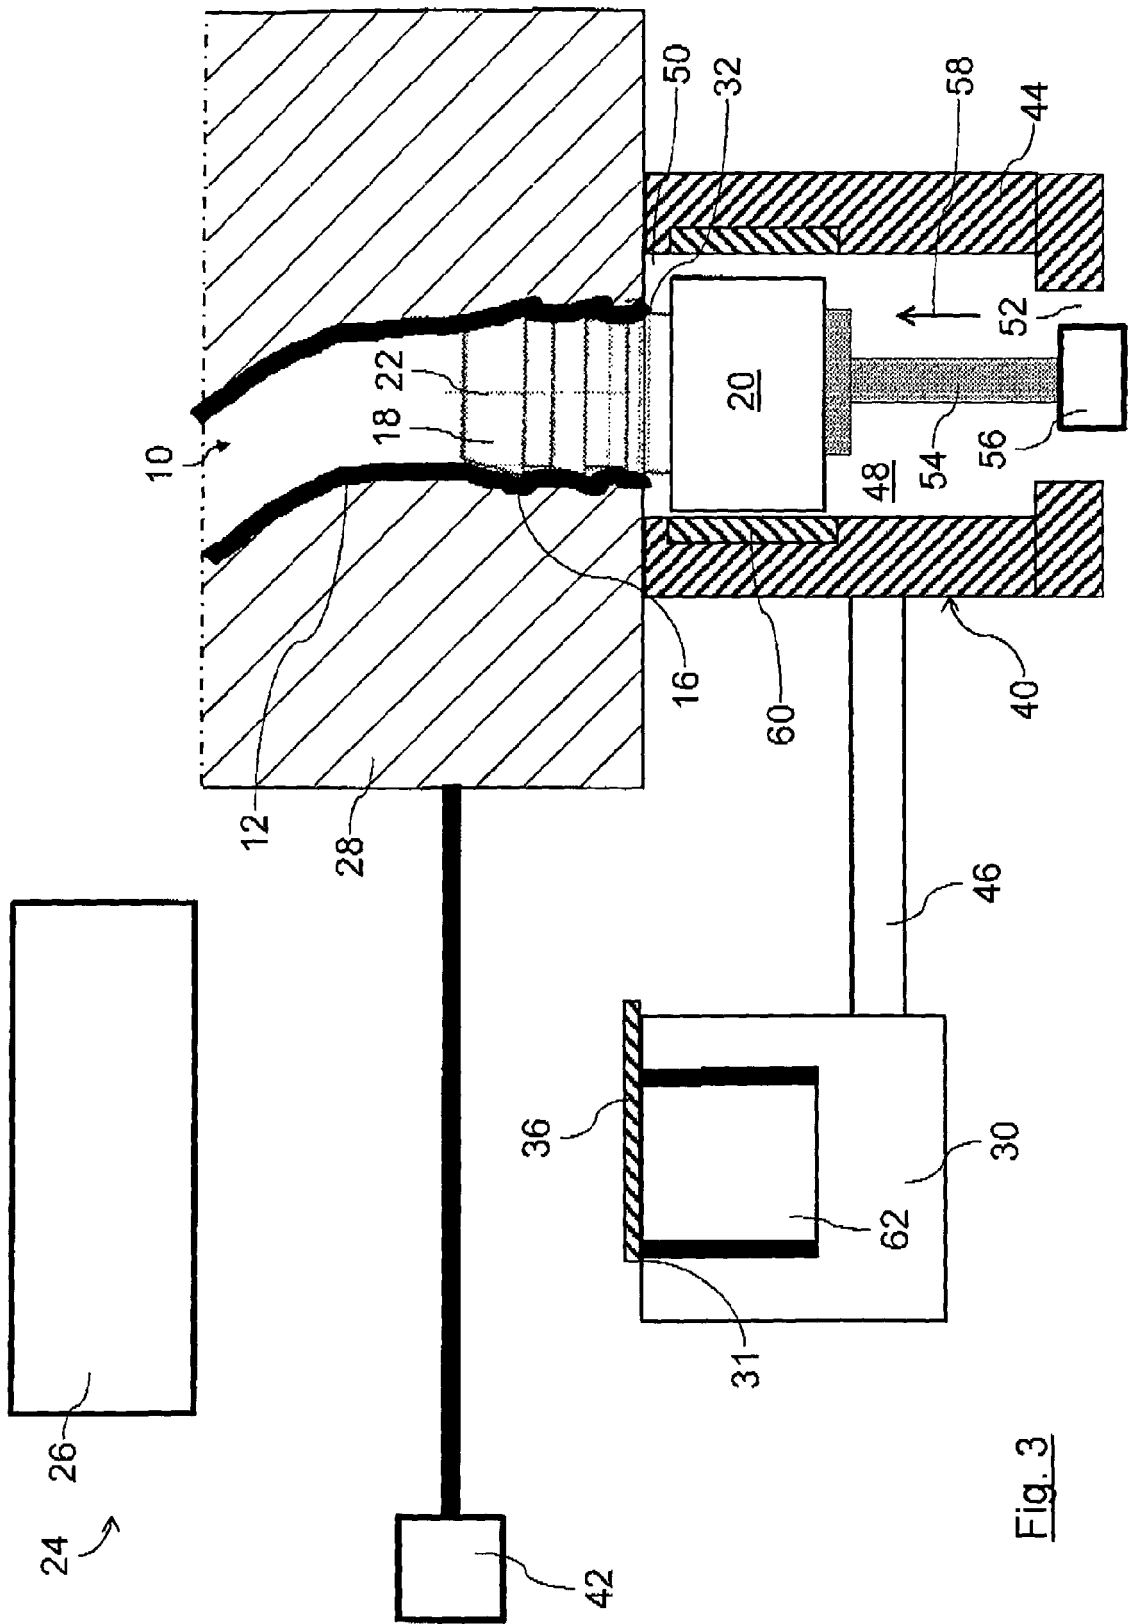

EUROPEAN SEARCH REPORT

Application Number
EP 12 29 0322

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 4 578 855 A (VAN DER HAGEN GENE E [US]) 1 April 1986 (1986-04-01) * column 2, line 31 - column 4, line 28; figures 1-4 *	1-10	INV. F02M35/10 F16L33/00 F16L47/22
Y	----- WO 98/30827 A1 (SNAP TITE INC [US]) 16 July 1998 (1998-07-16) * page 3, line 24 - page 5, line 25; figures 1-7 *	1-10	
Y	----- US 3 929 538 A (DIEBEL LEVERNE G) 30 December 1975 (1975-12-30) * column 2, line 62 - column 5, line 34; figures 1-3 *	1-10	
			TECHNICAL FIELDS SEARCHED (IPC)
			F02M F16L
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 3 May 2013	Examiner Raposo, Jorge
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 29 0322

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-05-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4578855	A	01-04-1986	NONE

WO 9830827	A1	16-07-1998	AU 3732297 A 03-08-1998
			US 6195865 B1 06-03-2001
			WO 9830827 A1 16-07-1998

US 3929538	A	30-12-1975	CA 1012336 A1 21-06-1977
			US 3929538 A 30-12-1975

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82