

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2013251122 B2**

(54) Title
Method for producing dentures

(51) International Patent Classification(s)
A61C 13/00 (2006.01) **A61C 13/36** (2006.01)

(21) Application No: **2013251122** (22) Date of Filing: **2013.04.18**

(87) WIPO No: **WO13/156572**

(30) Priority Data

(31) Number	(32) Date	(33) Country
10 2012 007 706.8	2012.04.19	DE

(43) Publication Date: **2013.10.24**

(44) Accepted Journal Date: **2016.02.25**

(71) Applicant(s)
Heraeus Kulzer GmbH

(72) Inventor(s)
Beyer, Mario;Bohm, Uwe

(74) Agent / Attorney
Spruson & Ferguson, L 35 St Martins Tower 31 Market St, Sydney, NSW, 2000

(56) Related Art
WO 2012/021816

BERICHTIGTE FASSUNG

(19) Weltorganisation für geistiges

Eigentum

Internationales Büro

(43) Internationales

Veröffentlichungsdatum

24. Oktober 2013 (24.10.2013)



WIPO | PCT



(10) Internationale Veröffentlichungsnummer

WO 2013/156572 A8

(51) Internationale Patentklassifikation:

A61C 13/00 (2006.01) A61C 13/36 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2013/058111

(22) Internationales Anmeldedatum:

18. April 2013 (18.04.2013)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:

10 2012 007 706.8

19. April 2012 (19.04.2012)

DE

(71) Anmelder: HERAEUS KULZER GMBH [DE/DE];
Grüner Weg 11, 63450 Hanau (DE).

(72) Erfinder: BEYER, Mario; Gartenfeldstraße 26, 61350
Bad Homburg (DE). BÖHM, Uwe; Pfützenweg 30 b,
63456 Hanau (DE).

(74) Anwalt: BENDELE, Tanja; RUHR-IP Patentanwälte,
Markuspfad 2-4, 45133 Essen (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,

AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW,
BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ,
TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ,
RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY,
CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,
LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz
3)

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD FOR PRODUCING DENTURES

(54) Bezeichnung : VERFAHREN ZUM HERSTELLEN EINES KÜNSTLICHEN GEBISSES

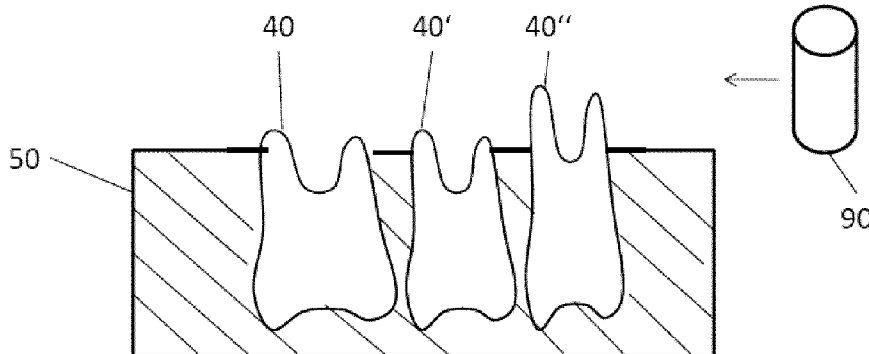


Fig. 6

(57) Abstract: The invention relates to a method for producing dentures. According to the invention, provision is made for the dentures to have a base element, which holds at least two tooth blanks, comprising the following steps: producing a negative mould by machining on the basis of a digital image of a tooth situation; shortening by machining a length dimension of the tooth blanks which are preassembled and held in the negative mould from a basal side in order to achieve a tooth line adapted to the tooth situation; connecting the base element and the shortened tooth blanks to form the dentures.

(57) Zusammenfassung: Die Erfindung betrifft ein Verfahren zum Herstellen eines künstlichen Gebisses. Erfindungsgemäß ist vorgesehen, dass das künstliche Gebiss ein Basiselement aufweist, welches wenigstens zwei Zahnrohlinge hält, mit den Schritten: Maschinelles Erstellen einer Negativform auf Basis eines digitalen Abbilds einer Zahnsituation; Maschinelles Verkürzen

[Fortsetzung auf der nächsten Seite]



**(48) Datum der Veröffentlichung dieser berichtigten
Fassung:**

26. Juni 2014

(15) Informationen zur Berichtigung:
siehe Mitteilung vom 26. Juni 2014

einer Längenabmessung der in der Negativform gehaltenen und vorgefertigten Zahnrohlinge von einer basalen Seite, um eine der Zahnsituation angepasste Zahnlinie zu erlangen; Verbinden des Basiselementes und der verkürzten Zahnrohlinge zu dem künstlichen Gebiss.

Method for producing dentures

Description:

The invention relates to a method for producing a denture.

The state of the art knows so-called partial or total prostheses which can be removed reversibly from the jaw, if applicable. In general, said partial or total prostheses are connected to the jaw and/or an implant introduced into the jaw by means of negative pressure, adhesion or screws. For this purpose, said prostheses comprise a base that comes to rest on the gingiva. Individual teeth are applied to said base - also called base element - as replacement for the natural teeth. Specifically the positioning and introduction of the artificial teeth in and into the base element has proven to be problematic according to the prior art. The artificial teeth used in this context are pre-assembled teeth. Accordingly, the teeth need to be shortened to the lengths actually used. To ensure adaptation to the individually required tooth lengths and widths, it is feasible, firstly, to produce a very large number of different artificial teeth to reflect the most commonly used lengths and/or widths. However, this is very expensive and laborious. Alternatively, it is possible to individually grind down the individual tooth blanks of those artificial teeth, which are inserted into the base element later on. However, it has been evident with this type of method that the accuracy of fit thus attained is too low. Moreover, there is the danger of the tooth blanks, which are multi-layered in structure, to get damaged to the extent that the durability of the denture thus produced is clearly reduced.

It is the object of the present invention to substantially overcome or at least ameliorate one or more of the afore-mentioned disadvantages.

Accordingly in a first aspect, the present invention provides a method for producing a denture, whereby the denture comprises a base element, which holds at least two tooth blanks, comprising the steps:

- producing, by machining, a negative mould based on a digital image of a tooth situation;
- shortening, by machining, a length dimension of the tooth blanks that are being held in the negative mould and are pre-fabricated, from a basal side in order to attain a tooth line that is adapted to the tooth situation; and
- connecting the base element and the shortened tooth blanks to form the denture.

Preferably, for preparing the negative mould, a computer-based up-building production method is used, in particular in that the computer-based up-building production method is selected from the group consisting of: rapid prototyping, SD lithography, SLM (selective laser melting), 3D stereolithography, 3D inkjet, FDM (fused deposition modelling), and 3D laser lithography or at least two thereof.

The pre-fabricated tooth blanks are preferably held in the negative mould in a nonpositive fit and/or form closure and/or material bonded manner.

The method preferably comprises the step of:

- preparing an attachment means for connecting the shortened tooth blanks to the base element, whereby the attachment means comprises a first coding means that facilitates definite spatial positioning of the shortened tooth blank in said base part.

The negative mould is preferably provided with at least one second coding means that facilitates definite spatial positioning of the pre-fabricated tooth blank in the negative mould.

The method preferably comprises the following steps of:

- a) preparing the digital image of a tooth situation;
- b) computer-based generating of a digital model of the denture based on the digital image;
 - by means of using and selecting digital representations of pre-fabricated tooth blanks;
 - whereby the pre-fabricated tooth blanks have a defined length dimension; and
- c) calculating a length difference data set, prepared from the defined length dimension and an insertion depth of the at least two pre-fabricated tooth blanks in the base element.

The method preferably comprises the following steps of:

- d) building-up a digital image of the negative mould, in which the at least two pre-fabricated tooth blanks form the positive, whereby the negative mould encodes the position of the at least two pre-fabricated tooth blanks on the base element;
- e) producing, by machining, the negative mould by means of the digital image of the negative mould;
- f) inserting the pre-fabricated tooth blanks into the negative mould;

- g) shortening, by machining, the length dimension of the pre-fabricated tooth blanks from a basal side based on the length difference data set in order to produce the shortened tooth blanks; and
- h) connecting the base element and the shortened tooth blanks to form the denture.

Preferably, in step b), the selection from a number of digital representations of pre-fabricated tooth blanks is done in order to minimise the deviation of a geometrical shape of the pre-fabricated tooth blanks from the tooth situation.

Preferably, in step b), the selection from a number of digital representations of pre-fabricated tooth blanks is done in order to minimise the deviation of a geometrical shape of the pre-fabricated tooth blanks from a pre-defined tooth arrangement.

Preferably, in step c), the selected digital representations of pre-fabricated tooth blanks are arranged as a dental arch.

Preferably, in step c), the selected digital representations of the tooth blanks are arranged on a crown side along a tooth line based on the tooth situation and/or a pre-defined tooth arrangement.

The method preferably comprises, after step b), the step of: adapting a height position of the digital representations of the pre-fabricated tooth blanks in the digital model of the denture.

The method preferably comprises the step of: computer-based splitting of the digital model of the denture into a digital image of the base element and a digital likeness of the at least two tooth blanks.

The digital image preferably forms a negative for the negative mould.

The method preferably comprises the step of: fabricating, by machining, the base element based on the digital image of the base element.

The negative mould is preferably provided with at least one positioning element to allow the negative mould to be positioned during the shortening of the length dimension by machining.

The base part preferably comprises a material or consists of a material selected from the group: polyethylene, polypropylene, polystyrene, poly(methylmethacrylate), acrylonitrile-butadiene-styrene copolymer, epoxy or acrylates.

The base part and the shortened tooth blanks are preferably connected in a nonpositive fit and/or form closure and/or material bonded manner.

According to at least one of the preceding embodiments, an attachment means preferably serves to connect the base element and the shortened tooth blanks, whereby the attachment means is selected from the group consisting of: an adhesive, a mechanical connecting means, a screw, a thread, a pin, a bayonet closure or at least two thereof.

According to at least one of the preceding embodiments, an ablating and/or up-building computer-based production method is preferably selected from the group consisting of: preparing the negative mould by machining, shortening the length dimension, and fabricating the base element by machining, is used in at least one of the procedural steps of the method.

According to the preceding, the up-building computer-based production method is selected from the group consisting of: rapid prototyping, 3D laser lithography, 3D lithography, SLM (selective laser melting), 3D stereolithography, 3D inkjet, FDM (fused deposition modelling), and 3D laser lithography or at least two thereof.

According to at least one of the preceding embodiments, wherein a digital image of a tooth situation that reflects the shape of a gingival area of a patient is preferably used for shaping the digital model of the denture.

According to at least one of the preceding embodiments, the digital model is preferably obtained by scanning an impression model of the gingival area or by scanning the gingival area of a patient.

In a second aspect, the present invention provides a computer-readable data medium that comprises instructions that trigger a computer to run a method according to any one of the preceding embodiments.

In a third aspect, the present invention provides a computer with a computer-readable data medium according to preceding embodiment 24.

The production of a negative mould is the core of the above method. The teeth in natural arrangement in the jaw of the patient and/or the desired arrangement of the artificial tooth blanks in the mouth are the positive for said negative mould. In so far, the negative mould comprises all information regarding the position and length of the teeth in the jaw of the patient. The invention then provides pre-produced tooth blanks to be inserted into the negative mould and to be adapted to the requisite length by means of an ablating method. The negative mould therefore protects the surface of the artificial tooth blanks and concurrently ensures that these can be adapted to the desired length. The special feature being that rather than individually adapting single teeth, a plurality of artificial teeth can be processed in parallel. Concurrently, the pre-fabricated tooth blanks being held firmly in the negative mould provides for higher precision

of the tooth length to be attained as compared to known methods. Moreover, it can be made sure in the scope of the present method that the tooth blanks are not processed to be shorter than any minimal lengths in order not to destroy their multi-layered structure.

In the scope of the invention, the terms, "tooth blank" or "pre-fabricated tooth blank", shall refer to an element that is equivalent to a natural tooth in terms of its shape and external appearance. Tooth blanks of this type are usually made from plastic materials. High-quality tooth blanks undergo a multi-layered build-up. The layers are polymerised individually in the hot polymerisation process in this context: First the dentine core and then the cutting and enamel layer. Each of said elements of the tooth blank can be built-up from a different plastic material. Due to the multi-layered structure, it is feasible to adapt the technical properties in a layer-specific manner. Accordingly, the cutting enamel layer, which is exposed to high mastication loads, needs to be highly abrasion-resistant. In contrast, the basal neck layer should be less densely cross-linked and more easily detachable for optimal bonding to the plastic material of the prosthesis - i.e. the plastic material of the base element.

The term, "basal", shall be understood according to the invention to mean the root side of the tooth blanks. A shortened tooth blank is a basally processed tooth blank and/or pre-fabricated tooth blank.

The method serves for producing dentures. The term, "dentures", shall be understood to mean, in particular, partial prosthesis and total prostheses. A partial prosthesis can be made in various versions. The simplest version consists of a plastic base - the base element - and the teeth to be replaced and curved holding and supporting elements. In case of need, the prosthesis can be reinforced by means of an incorporated wire or bar. Chromium-cobalt-molybdenum as alloy or titanium can be used for parts of the base element as these are particularly compatible with the tissues. Plastic material and teeth are then built-up on said base. If all teeth have been lost from a jaw, a total prosthesis is the only remaining solution in many cases. These are attached to the jaw by means of negative pressure, screws and/or adhesion.

The method proposes to use an up-building computer-based production method to prepare the negative mould. Said up-building computer-based production method is advantageously selected from the group consisting of: rapid prototyping, 3D laser lithography, 3D lithography, SLM (selective laser melting), 3D stereolithography, 3D inkjet, FDM (fused deposition modelling) or 3D laserlithography. The up-building production methods specified above comprise a number of advantages. Using them, it is easy to produce a negative mould based on a digital image of a tooth situation. Such computer programmes can convert the digital image of the tooth situation into a negative mould in a short period of time. Moreover, the production-related deviations from the digital image of the negative mould are minor. Precision

levels on the order of magnitude of $\pm 20 \mu\text{m}$, in particular $\pm 10 \mu\text{m}$, can be implemented using the afore-mentioned production methods. This ensures that the pre-

fabricated tooth blanks are held in place in the negative mould with an error of $\pm 20\ \mu\text{m}$, in particular $\pm 10\ \mu\text{m}$, only. This, in turn, has a positive impact on the shortened tooth blanks being held in place in the denture later on and on the comfort of wear experienced by the patient.

Advantageously, the pre-fabricated tooth blanks are held in place in the negative mould in a nonpositive fit and/or form closure and/or material bonded manner. It is an essential aspect in this context that the pre-fabricated tooth blanks can be detached reversibly, but are arranged in the negative mould such as to be stably placed in their position. Appropriate material bonded connections by means of adhesives or magnets enabling the tooth blanks to be positioned and held in place appropriately have proven to be advantageous. Moreover, it is advantageous for the negative mould to be provided with at least one second coding means that facilitates definite spatial positioning of the pre-fabricated tooth blank in the negative mould. A second coding means can, for example, be a projection which engages and/or communicates with a corresponding counter-element in the pre-fabricated tooth blank. This ensures a definite arrangement of the pre-fabricated tooth blanks in the negative mould. In particular inadvertent switching of the front and back side of the tooth blanks is thus prevented.

Moreover, it has proven to be advantageous for the base element to be provided with an attachment means. Said attachment means serves to hold the shortened tooth blanks in place in the base part. Moreover, the attachment means is designed such that it comprises a first coding means that facilitates a definite spatial arrangement of the tooth blank in the base part. This is to ensure that the shortened tooth blanks are inserted into the base part in definite manner exclusively and that they can be arranged therein in a nonpositive fit and/or form closure and/or material bonded manner. Advantageously, the attachment means and/or the base part is/are designed appropriately such that the shortened tooth blank can be arranged in said base part at a positional accuracy of $\pm 20\ \mu\text{m}$, advantageously of $\pm 10\ \mu\text{m}$. In this context, the attachment means can be designed in a variety of ways, such as, for example, as a bayonet closure, a thread or a pin, which ensure the definite spatial arrangement of the shortened tooth blanks.

In the scope of another advantageous variant of an embodiment, a step a) involves the preparation of the digital image of a tooth situation. A corresponding digital image can be prepared, for example, using an intraoral scanner directly on the patient. Alternatively, it is feasible just as well to take an impression of the patient's tooth situation with an impression mass and to then realise a positive. Corresponding positives can be digitally imaged at high precision using industrial scanners. A digital model of the denture is then generated in a

computer-based manner based on said digital image of the tooth situation. Building on said digital model, corresponding digital files and/or models are then used to prepare a denture specifically for said patient. In this context, the invention provides for the use and selection of digital representations of pre-fabricated tooth blanks. The underlying rationale is that only a comparatively small number of pre-fabricated tooth blanks is to be utilised. These are scanned digitally and provided, in the form of a database, to the user preparing the digital model. Using a corresponding selection method, the user can utilise the digital representations of the pre-fabricated tooth blanks to produce the digital model of the denture. Criteria such as size, width, and colour contribute to the selection of the pre-fabricated tooth blanks to be used. The length dimensions of the pre-fabricated tooth blanks are usually not compatible with the lengths of the tooth blanks as actually used that are to be incorporated into the actual denture. Accordingly, the scope of step c) includes the calculation of a length difference data set that results from the difference between the defined length dimension of the pre-fabricated tooth blanks and the insertion depth of the at least two pre-fabricated tooth blanks in the base element. The length difference data set therefore describes the difference between the "actual condition" of the pre-fabricated tooth blanks and the "nominal condition" these are to have upon insertion into the base element.

As illustrated, a selection of digital representations of pre-fabricated tooth blanks proceeds in step b). Said selection from a number of digital representations of pre-fabricated tooth blanks can proceed in order to minimise the deviation of a geometrical shape of the pre-fabricated tooth blanks from the tooth situation actually present in the patient's mouth. This is the case, if the teeth still present are extracted from the mouth of the patient and replaced by the tooth blanks to be inserted. If the patient is toothless, the goal must be to select the digital representations of the pre-fabricated tooth blanks appropriately such that the deviation of a geometrical shape of the pre-fabricated tooth blanks from the tooth arrangement pre-defined ahead of time is minimised. Accordingly, one tooth blank each, which optimally fits into the overall scope of the denture to be produced, is selected. In this context, the size, geometrical shape, and distance from/placement with respect to its neighbours will be crucial.

Another advantageous variant of an embodiment of the method according to the invention is characterised in that it comprises a step d), in the scope of which a digital image of the negative mould is being built up. This digital image serves as the basis for producing, by machining, the actual negative mould later on (see step e)). In this context, the invention provides the negative mould to encode the position of the at least two pre-fabricated tooth blanks on the base element, which also is still to be prepared. Accordingly, the negative mould defines the position of the pre-fabricated tooth blanks with respect to each other and with respect to the element or elements of the base element. The negative mould is prepared

by machining in the scope of a step e). Said preparation by machining is effected by means of the digital information of the digital image of the negative mould. A corresponding preparation can proceed by means of ablating or up-building computer-based production methods. Especially the following production methods shall be mentioned in this context: milling, milling by CAD/CAM, turning, rapid prototyping, 3D laserlithography, 3D lithography, SLM (selective laser melting), 3D stereolithography, 3D inkjet, FDM (fused deposition modelling) or 3D laserlithography.

The scope of step g) includes shortening, by machining, the length dimensions of the pre-fabricated tooth blanks from a basal side. After preparation of the negative mould, the pre-existing pre-fabricated tooth blanks are inserted into the negative mould in the scope of step f). The negative mould now serves in holding the pre-fabricated tooth blanks. Since the negative mould is being produced based on the desired digital image of the denture to be prepared, the negative mould concurrently encodes for the arrangement, length, and height of the tooth blanks to be used. Once these are inserted, it is easy to shorten them by machining. Said shortening on the basal side is done based on the length difference data set. Accordingly, the pre-fabricated tooth blanks are shortened exactly by the fraction of length by which they project beyond the desired length. Subsequently, the scope of step h) only includes that the base element and the shortened tooth blanks are connected to form the denture.

Another variant of an embodiment of the above method provides the digital model of the denture to be split into two parts in computer-based manner: a digital image of the base element and a digital likeness of the at least two tooth blanks. The aim being to also design the base element in computer-based manner. In particular, this variant enables very good adaptation of the base element and tooth blanks and/or digital representations of the pre-fabricated tooth blanks. Moreover, digital models of attachment means, etc., can be incorporated into the digital image of the base element. Also, the digital representation of the pre-fabricated tooth blanks is adapted in terms of its position with respect to the base element. Said adaptation of a height position of the digital representation of the pre-fabricated tooth blanks permits the digital model of the denture to be designed on a computer. The adaptation of the height position also involves the calculation of the length difference data set, since the adaptation of the height position provides feedback concerning the depth by which the pre-fabricated tooth blanks are to be inserted into the base element later on.

Based on the digital image of the base element, it is feasible to fabricate the actual base element by machining. Ablating just as well as up-building computer-based production method can be used for this purpose. Accordingly, milling, turning or sawing can be used for an ablating

production method. The up-building production methods mentioned above, which are used in the production of the negative mould, can also be used for production of the base element.

Preferred embodiments will now be described, by way of examples only, with reference to the following drawings. In this context, equal or functionally equal or functionally corresponding elements are identified through the same reference numbers.

In the figures:

Figure 1 shows a flow diagram of an embodiment of a method according to the invention;

Figure 2 shows a process of selecting digital representations of pre-fabricated tooth blanks;

Figure 3 shows a calculation of a length difference data set;

Figure 4 shows a process of inserting the pre-fabricated tooth blanks into a negative mould;

Figures 5 and 6 show a process of shortening the length dimension of the pre-fabricated tooth blanks by machining;

Figure 7 shows the shortened tooth blanks; and

Figure 8 shows a process of connecting the base element and the shortened tooth blanks to form the denture.

The underlying rationale of an embodiment of a method according to the invention is to prepare a negative mould 50 that serves to support a plurality of pre-fabricated tooth blanks 40, 40', 40". The negative mould 50 is designed appropriately in this context such that the tooth blanks 40, 40', 40" are positioned in it in the same way in which they are to be arranged in the denture 10 later on. In this context, the lengths of the pre-assembled tooth blanks 40, 40', 40" do not correspond to the lengths as needed in the actual denture 10 that is still to be produced. However, since they are being held in the negative mould 50, the pre-fabricated tooth blanks 40, 40', 40" can be shortened at high precision. Moreover, the method according to the invention has a particularity in that the negative mould 50 is calculated from a digital image of a tooth situation 15 by means of a computer. The flow diagram shown in Figure 1 is to illustrate the various procedural steps of the method.

In step 100, a digital image of the existing tooth situation 15 of the patient is prepared. This can be done, preferably, by means of an intraoral scanner. Subsequently, a digital model 11 of the denture 10 to be produced is produced based on the digital image. If, for example, a total prosthesis is to be prepared, an image of only the gingiva is generated in the scope of the digital image of the tooth situation. Based on said image of the gingiva, a dental technician then needs to digitally prepare the denture 15 to be inserted later. According to the invention, the dental technician can use digital representations 41, 41', 41" of pre-fabricated tooth blanks 40, 40', 40" for this purpose. The digital model 11 of the denture 10 is prepared in the scope of step 200. Figure 2 illustrates in exemplary manner that a selection is being made of which of the digital representations 41, 41', 41" of a pre-fabricated tooth blank 40, 40', 40" corresponds best to the desired tooth situation 15. In this context, in particular the size, length, and volume are used as selection criteria.

After calculation of the shape of the digital model 11 and selection of the digital representations 41, 41', 41" of the pre-fabricated tooth blanks 40, 40', 40" in step 200, a length difference data set 72 is determined in step 300. This is to be illustrated in Figure 3. The length of the teeth is different between humans due to the difference in anatomical situations. The pre-fabricated tooth blanks 40, 40', 40" all have the same pre-defined lengths, though. Moreover, it is known to which depth the tooth blanks need to be inserted into the base element for the assembly to be stable and non-reversible. This depth is called insertion depth 74 and it is pre-defined and it is a function of the dimension of the base element 20. The distance between a base line 70, on which the cutting surface of the teeth is arranged, and a capital line 71 defines the visible length of the pre-fabricated tooth blanks 40, 40', 40". The insertion depth 74 is directly adjacent to this. The desired tooth length 75 results from the two lengths. In Figure 3, in exemplary manner, the actual tooth length 76 of the pre-fabricated tooth blank 40" differs strongly from said desired tooth length 75. The length difference data set 72 is calculated from the desired tooth length 75 and the actual tooth length 76 in the scope of step 300.

Based on the length difference data set 72 and further information concerning the external shape of the pre-fabricated tooth blanks 40, 40', 40" and the digital image 11 of the tooth situation, a digital image 51 of the negative mould 50 is created in the scope of step 400. This is illustrated in Figure 4 as well. The digital image 51 enables a preparation 500, by machining, of the negative mould 50. The preparation 500, by machining, preferably is done by means of up-building and computer-based production method such as rapid prototyping. The pre-fabricated tooth blanks 40 are inserted into the negative mould 50 thus prepared in the scope of step 600, as is shown in Figure 5.

The negative mould 50 according to the invention holds the pre-fabricated tooth blanks 40, 40', 40" appropriately such that these project beyond the negative mould 50 on its basal side. A process of shortening 90 the pre-fabricated tooth blanks by machining by means of a milling machine, etc., proceeds in step 700. The pre-fabricated tooth blanks 40, 40', 40" are shortened by the length difference data set 72 in this process. As is evident from Figure 6 in particular, the pre-fabricated tooth blanks 40, 40', 40" project beyond the negative mould 50 by said length difference data set 72. Accordingly, it is easy to ablate the projecting lengths. Concurrently, the negative mould 50 protects the outsides of the fractions of the pre-fabricated tooth blanks 40, 40', 40" that are to be inserted into the denture later on. Moreover, the negative mould 50 provides for mechanical stability and holds the pre-fabricated tooth blanks 40, 40', 40" during the shortening process in the scope of step 700. By this means, a precision of $\pm 20 \mu\text{m}$, in particular $\pm 10 \mu\text{m}$, can be attained in the shortening process. This high level of precision is a prerequisite for the creation of a denture 10 that can be used by the patient without any lengthy period of familiarisation.

Figure 7 shows the shortened tooth blanks. These are connected to a base element 20 in step 800 in order to create the denture 10 shown in Figure 8. The denture 10 therefore consists of the base element 20, in which the shortened tooth blanks 40, 40', 40" are arranged.

Reference numbers:

- 10 Denture
- 11 Digital model of the denture
- 15 Tooth or tooth situation or pre-defined tooth arrangement
- 20 Base element
- 40,40',40" Pre-fabricated tooth blanks
- 41,41',41" Digital representation of pre-fabricated tooth blanks
- 50 Negative mould
- 51 Digital image of the negative mould
- 52 Receptacles for tooth blanks in negative mould

- 70 Base line
- 71 Capital line
- 72 Length difference data set
- 74 Insertion depth
- 75 Tooth length
- 76 Actual tooth length of the tooth blank 40"
- 90 Shortening by machining
- 100 Preparation of a digital image
- 200 Shaping a digital model
- 300 Calculation of a length difference data set
- 400 Build-up of a digital image of a negative mould
- 500 Preparation of the negative mould by machining
- 600 Insertion of the pre-fabricated tooth blanks into the negative mould
- 700 Shortening of the pre-fabricated tooth blanks by machining
- 800 Connecting a base element and the shortened tooth blanks

CLAIMS

1. Method for producing a denture, whereby the denture comprises a base element, which supports at least two tooth blanks, comprising the steps:
 - producing, by machining, a negative mould based on a digital image of a tooth situation;
 - shortening, by machining, a length dimension of the tooth blanks that are being held in the negative mould and are pre-fabricated, from a basal side in order to attain a tooth line that is adapted to the tooth situation; and
 - connecting the base element and the shortened tooth blanks to form the denture.
2. Method according to claim 1, wherein, for preparing the negative mould, a computer-based up-building production method is used, the computer-based up-building production method being selected from the group consisting of: rapid prototyping, SD lithography, SLM (selective laser melting), 3D stereolithography, 3D inkjet, FDM (fused deposition modelling), and 3D laser lithography or at least two thereof.
3. Method according to at least any one of the preceding claims, wherein the pre-fabricated tooth blanks are held in the negative mould in a nonpositive fit and/or form closure and/or material bonded manner.
4. Method according to at least one of the preceding claims, wherein the method comprises the step of:
 - preparing an attachment means for connecting the shortened tooth blanks to the base element, whereby the attachment means comprises a first coding means that facilitates definite spatial positioning of the shortened tooth blank in said base part.
5. Method according to at least one of the preceding claims, wherein the negative moulds are provided with at least one second coding means that facilitates definite spatial positioning of the pre-fabricated tooth blank in the negative mould.
6. Method according to at least one of the preceding claims, wherein the method comprises the following steps:
 - a. preparing the digital image of a tooth situation;
 - b. computer-based generating of a digital model of the denture based on the digital image;
 - by means of using and selecting digital representations of pre-fabricated tooth blanks;
 - whereby the pre-fabricated tooth blanks have a defined length dimension; and

- c. calculating a length difference data set, prepared from the defined length dimension and an insertion depth of the at least two pre-fabricated tooth blanks in the base element.
7. Method according to at least one of the preceding claims, wherein the method comprises the following steps:
- d. building-up a digital image of the negative mould, in which the at least two pre-fabricated tooth blanks form the positive, whereby the negative mould encodes the position of the at least two pre-fabricated tooth blanks on the base element;
 - e. producing, by machining, the negative mould by means of the digital image of the negative mould;
 - f. inserting the pre-fabricated tooth blanks into the negative mould;
 - g. shortening, by machining, the length dimension of the pre-fabricated tooth blanks from a basal side based on the length difference data set in order to produce the shortened tooth blanks; and
 - h. connecting the base element and the shortened tooth blanks to form the denture.
8. Method according to claim 6, wherein, in step c), the selected digital representations of the tooth blanks are arranged on a crown side along a tooth line based on the tooth situation and/or a pre-defined tooth arrangement.
9. Method according to at least one of the claims 6 or 8, wherein the method comprises, after step b), the step of: adapting a height position of the digital representations of the pre-fabricated tooth blanks in the digital model of the denture.
10. Method according to at least one of the preceding claims 6 to 9, wherein the method comprises the step of: computer-based splitting of the digital model of the denture into a digital image of the base element and a digital image of the at least two tooth blanks.
11. Method according to claim 10, wherein the method comprises the step of: fabricating, by machining, the base element based on the digital image of the base element.
12. Method according to at least one of the preceding claims 1 or 11, wherein an ablating and/or up-building computer-based production method is used in at least one of the procedural steps of the method, selected from the group consisting of: preparing the negative mould by machining and fabricating the base element by machining.

13. Method according to at least one of the preceding claims, wherein a digital image of a tooth situation that reflects the shape of a gingival area of a patient is used for shaping the digital model of the denture.
14. Computer-readable data medium that comprises instructions that trigger a computer to run a method according to any one of the claims 1 to 13.
15. Computer with a computer-readable data medium according to claim 14.

Heraeus Kulzer GmbH
Patent Attorneys for the Applicant
SPRUSON & FERGUSON

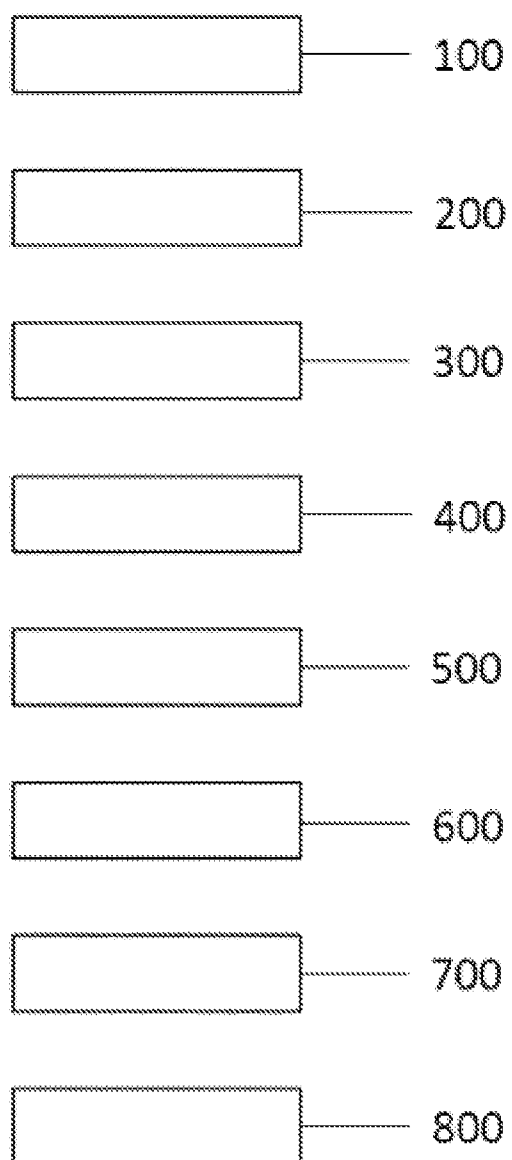


Fig. 1

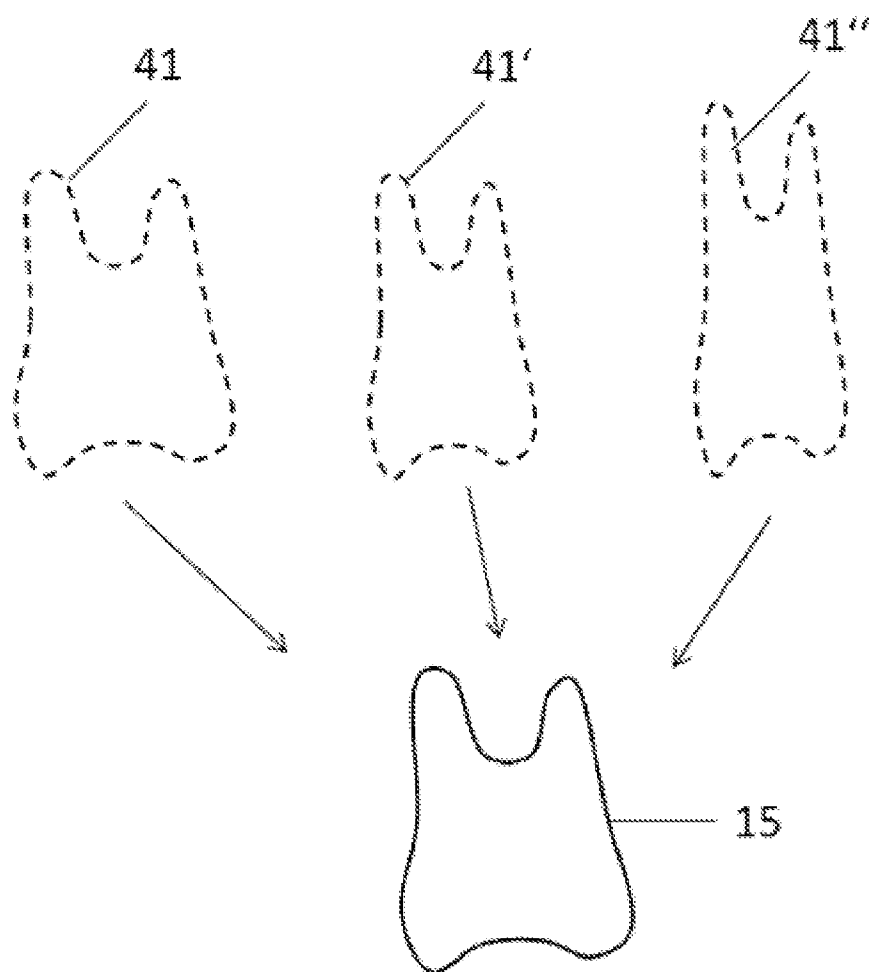


Fig. 2

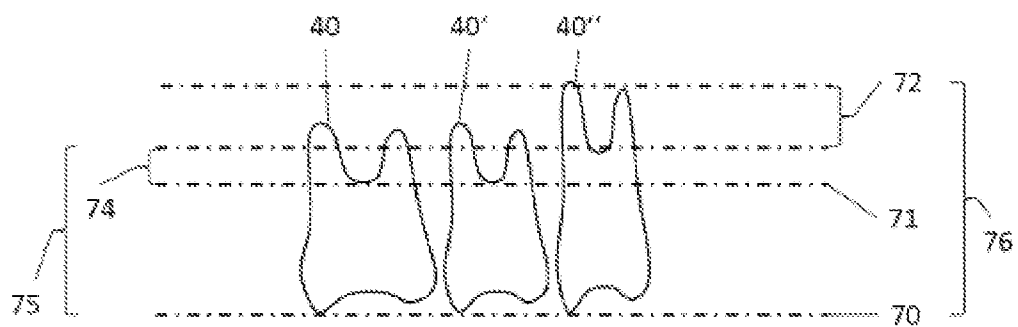


Fig. 3

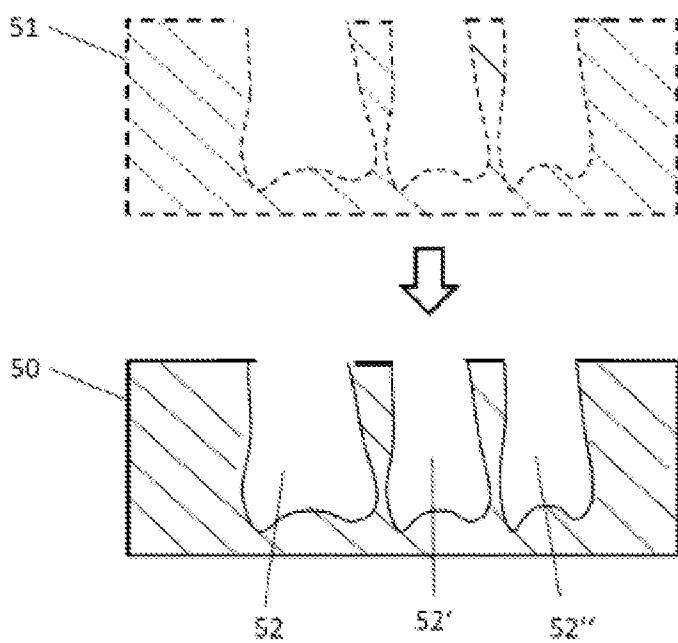


Fig. 4

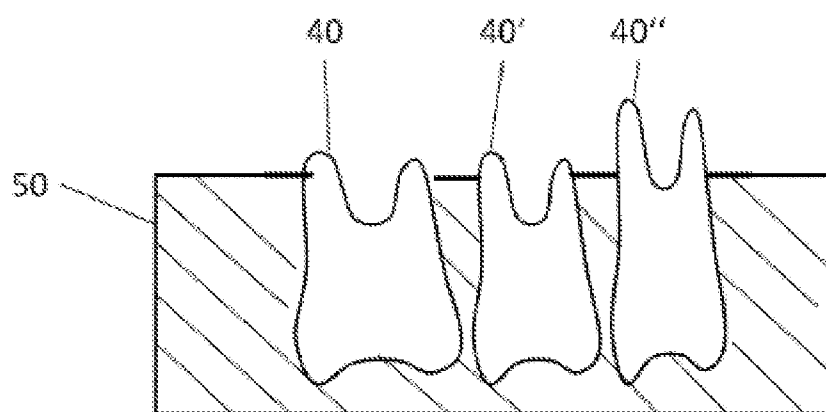


Fig. 5

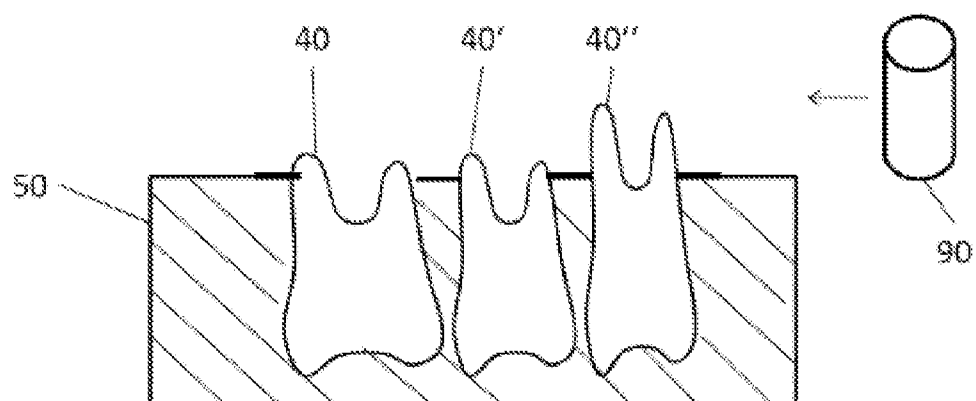


Fig. 6

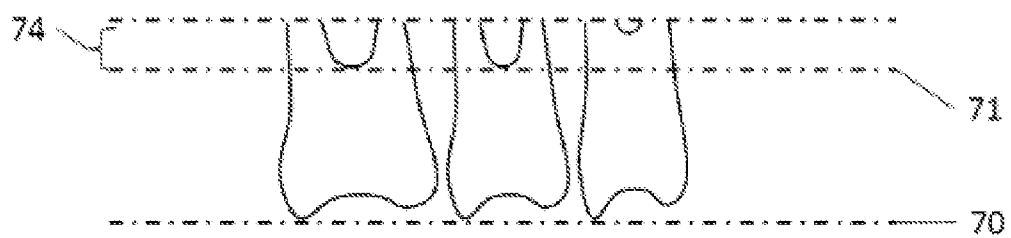


Fig. 7

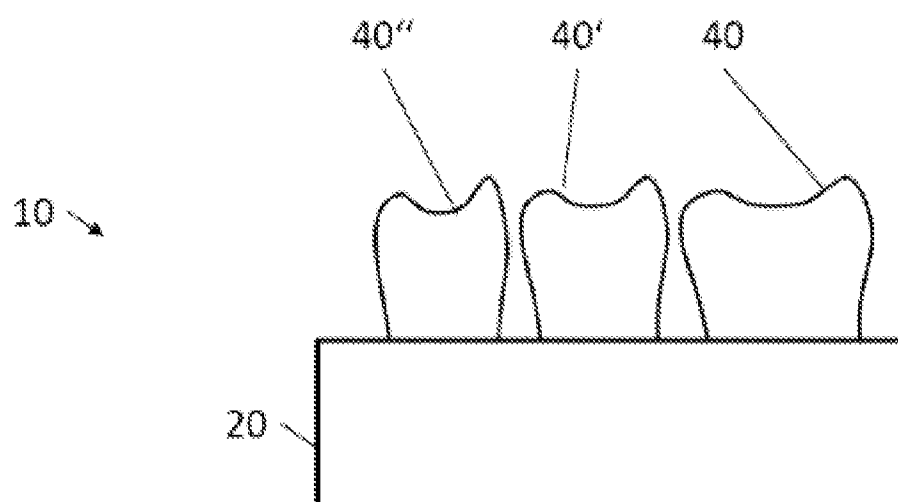


Fig. 8