PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : C22C 29/02, 29/08

A1

(11) International Publication Number: WO 93/17140

(43) International Publication Date: 2 September 1993 (02.09.93)

(21) International Application Number: PCT/SE93/00140

(22) International Filing Date: 19 February 1993 (19.02.93)

(30) Priority data:
9200530-5 21 February 1992 (21.02.92) SE

(71) Applicant: SANDVIK AB [SE/SE]; S-811 81 Sandviken (SE).


(72) Inventors: ÖSTLUND, Åke ; Kopparvägen 114, S-183 46 Täby (SE). OSCARSSON, Ulf ; Prästgårdsv. 82, S-147 40 Tumba (SE). GUSTAFSON, Per ; Segerminnesv. 37, S-141 40 Huddinge (SE). ÅKESSON, Leif ; Vårgårdavägen 24, S-125 31 Älvsjö (SE).

(74) Agent: ÖSTLUND, Alf; Sandvik AB, Patent Department, S-811 81 Sandviken (SE).

(81) Designated States: BR, CA, JP, KR, RU, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: CEMENTED CARBIDE WITH BINDER PHASE ENRICHED SURFACE ZONE

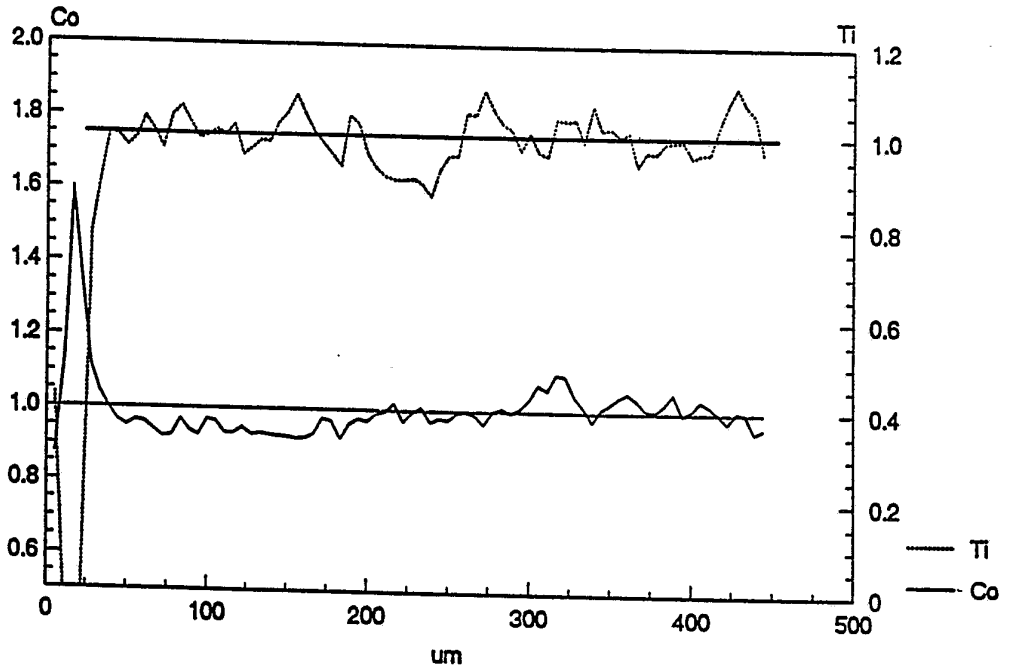

(57) Abstract

The present invention relates to a cemented carbide insert with improved toughness and resistance against plastic deformation containing WC and cubic phases of carbide and/or carbonitride in a binder phase based on Co and/or Ni with a binder phase enriched surface zone. The binder phase content in the insert is 3.5-12 weight-%. In a zone below the binder phase enriched surface zone the binder phase content is 0.85-1 of the content in the inner portion of the insert and the content of cubic phases essentially constant and equal to the content in the inner portion of the insert.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	**FR**	France	**MR**	Mauritania
AU	Australia	**GA**	Gabon	**MW**	Malawi
BB	Barbados	**GB**	United Kingdom	**NL**	Netherlands
BE	Belgium	**GN**	Guinea	**NO**	Norway
BF	Burkina Faso	**GR**	Greece	**NZ**	New Zealand
BG	Bulgaria	**HU**	Hungary	**PL**	Poland
BJ	Benin	**IE**	Ireland	**PT**	Portugal
BR	Brazil	**IT**	Italy	**RO**	Romania
CA	Canada	**JP**	Japan	**RU**	Russian Federation
CF	Central African Republic	**KP**	Democratic People's Republic of Korea	**SD**	Sudan
CG	Congo			**SE**	Sweden
CH	Switzerland	**KR**	Republic of Korea	**SK**	Slovak Republic
CI	Côte d'Ivoire	**KZ**	Kazakhstan	**SN**	Senegal
CM	Cameroon	**LI**	Liechtenstein	**SU**	Soviet Union
CS	Czechoslovakia	**LK**	Sri Lanka	**TD**	Chad
CZ	Czech Republic	**LU**	Luxembourg	**TG**	Togo
DE	Germany	**MC**	Monaco	**UA**	Ukraine
DK	Denmark	**MG**	Madagascar	**US**	United States of America
ES	Spain	**ML**	Mali	**VN**	Viet Nam
FI	Finland	**MN**	Mongolia		

Cemented carbide with binder phase enriched surface zone

The present invention relates to coated cemented carbide inserts with a binder phase enriched surface zone and a process for the making of the same. More particularly the present invention relates to coated inserts in which the cemented carbide has been modified so that unique technological properties have been obtained at a given chemical composition and grain size regarding the balance between very good toughness behaviour in combination with high resistance against plastic deformation.

Coated cemented carbide inserts with binder phase enriched surface zone are today used to a great extent for machining of steel and stainless materials. Thanks to the binder phase enriched surface zone an extension of the application area for the cutting tool material has been obtained.

Methods or processes to make cemented carbide containing WC, cubic phase (gamma-phase) and binder phase with binder phase enriched surface zones are within the technique referred to as gradient sintering and are known through a number patents and patent applications. According to, e.g., U.S. Patents 4,277,283 and 4,610,931 nitrogen containing additions are used and sintering takes place in vacuum whereas according to U.S. Patent 4,548,786 the nitrogen is added in gas phase. Hereby in both cases, a binder phase enriched surface zone essentially depleted of cubic phase is obtained. U.S. Patent 4,830,930 describes a binder phase enrichment obtained through decarburization after the sintering whereby a binder phase enrichment is obtained which also contains cubic phase.

In U.S. Patent 4,649,084 nitrogen gas is used in connection with the sintering in order to eliminate a process step and to improve the adhesion of a subsequently deposited oxide coating.

From fracture mechanics point of view, an enrichment of binder metal in a surface zone means that the ability of the cemented carbide to absorb deformation and stop growing cracks increases. In this way, a material is obtained with improved ability to withstand fracture by allowing greater deformations or by preventing cracks from growing, compared to a material with mainly the same composition but homogeneous microstructure. The cutting material, thus, obtains a tougher behaviour.

When gradient sintering according to the known technique of vacuum sintering of nitrogen containing cemented carbide, the nitrogen is usually added by adding of a small amount of nitrogen containing raw materials. Due to the fact that the nitrogen activity in the furnace atmosphere at the sintering is below the average nitrogen activity in the cubic phase, the nitrogen containing cubic phase will give off nitrogen through the liquid binder phase to the furnace atmosphere. There is a certain disagreement about the kinetics in this dissolution process. The opinion seems to be that when the nitrogen leaves, this generates conditions for a complete dissolution of the cubic phase in the surface zone of the material. The process is thought to be controlled by diffusion of nitrogen and by diffusion of the metal components of the cubic phase. The result is that the volume which previously was occupied by the cubic phase after its dissolution is occupied by liquid binder metal. Through this process a binder phase enriched surface zone is created after the solidification of the binder phase. The metal components in the dissolved cubic phase diffuse inwardly and are precipitated on

available undissolved cubic phase present further in the material. The content of these elements therefore increases in a zone inside the binder phase enriched surface zone at the same time as a corresponding decrease in the binder phase content is obtained.

A characteristic distribution of Co, Ti and W as a function of the distance from the surface of a cemented carbide with binder phase enrichment obtained through the above mentioned process appears, e.g., from fig 1 in U.S. 4,830,930. Outermost, there is a surface zone enriched in binder phase and completely or partly depleted of cubic phase. Inside this surface zone there is an area with an enrichment of the metallic element(s) present in the cubic phase, in particular Ti, Ta and Nb and where the binder phase content is considerably lower than the average content of binder phase in the interior of the cemented carbide body. The decrease in binder phase content for cemented carbide with about 6 weight-% cobalt and 9 weight-% cubic phase can be up to about 2 weight-%, i.e., a relative decrease of the order of 30 %. Cracks grow easily in this zone, which has a decisive influence on the fracture frequency during machining.

It has now turned out that if an essentially vacuum sintered nitrogen containing cemented carbide with a binder phase enriched surface zone is subjected to a nitrogen gas treatment at a temperature where the binder phase is liquid, the toughness behaviour can be increased further. This improvement in toughness is obtained simultaneously as the resistance against plastic deformation remains essentially unchanged. In this way, an insert can be used in applications which today generally require two or more grades of inserts with homogeneous structure to cover the same application area.

Figure 1 shows the distribution of Co and Ti as a function of the distance from the surface of a binder

phase enriched cemented carbide according to the invention.

Figure 2 shows the distribution of Co and Ti as a function of the distance from the surface of a binder phase enriched cemented carbide according to known technique.

Figure 3 is a light optical micrograph in 1200X of the surface zone of a cemented carbide according to the invention in which A is surface zone enriched in binder phase and essentially free from cubic phase and B is the upper part of the zone according to the invention.

The present invention relates to a process performed after gradient sintering comprising sintering in vacuum or inert atmosphere of a nitrogen containing cemented carbide either as a separate process step or integrated into the gradient sintering process. The process comprises supplying nitrogen gas to the sintering furnace at a pressure of 40-400 mbar, preferably 150-350 mbar, at a temperature between 1280 and 1430°C, preferably between 1320 and 1400°C. A suitable time for the nitrogen gas treatment is 5-100 min, preferably 10-50 min. The nitrogen gas is maintained until a temperature where the binder phase solidifies at about 1275-1300°C. The main part of the effect is, however, achieved even if the binder phase solidifies in vacuum or in inert atmosphere. It is particularly suitable to introduce a holding time for the nitrogen gas treatment of 5-50 min at a temperature of 1350-1380°C and a pressure of 200-350 mbar for cemented carbides with a content of cubic phase of 6-10 weight-% expressed according to below or at 1280-1320 at a pressure of 50-150 mbar at a content of cubic phase of 8-15 weight-%.

The process according to the present invention is particularly intended to be applied to binder phase enriched cemented carbide made by sintering in vacuum or

inert atmosphere at very low pressure of nitrogen of nitrogen containing material. It is effective on cemented carbide containing titanium, tantalum, niobium, tungsten, vanadium and/or molybdenum and a binder phase based on Co and/or Ni. An optimal combination of toughness and resistance against plastic deformation is obtained when the amount of cubic phase expressed as the total content of metallic elements forming cubic carbides i.e. Ti, Ta, Nb etc is between 6 and 15 weight-%, preferably between 7-10 weight-% at a titanium content of 0.4-10 weight-%, preferably 1-4 weight-% for turning and 2-10 weight-% for milling and when the binder phase content is between 3.5 and 12 weight-% for turning, preferably between 5 and 7.5 weight-% and for milling, preferably between 6 and 12 weight-%.

The carbon content can be below carbon saturation up to a content corresponding to maximum C08, preferably C02-C08.

With the process according to the present invention a cemented carbide with improved toughness and resistance against plastic deformation containing WC and cubic phases of carbonitride and/or carbide, preferably containing Ti in a binder phase based on Co and/or Ni with a, preferably <50 µm thick binder phase enriched surface zone is obtained. Immediately inside the binder phase enriched there is a <300 µm, preferably <200 µm thick zone with a binder phase content of 0.85-1, preferably 0.9-1, most preferably 0.92-1 of the content in the inner portion of the cemented carbide and where the content of cubic phase is essentially constant and equal to the content in the inner portion of the cemented carbide. The binder phase enriched zone is essentially free from cubic phase i.e. it contains WC and binder phase except for the very surface where the share of cubic phase is $\leq$50 volume-%. The binder phase content in the

binder phase enriched zone has within a distance from the surface of 10-30 µm a maximum of >1.1, preferably 1.25-2 of the content in the inner portion of the cemented carbide.

Cemented carbide according to the invention is suitably coated with in itself known thin wear resistant coating with CVD- or PVD-technique. Preferably a layer of carbide, nitride or carbonitride of, preferably titanium is applied as the innermost layer. Prior to the coating the cemented carbide is cleaned, e.g., by blasting so that possible graphite and cubic phase are essentially removed.

The present invention improves the properties of the cemented carbide. When used, no zone is obtained in the material where propagation of cracks is favourable. As a consequence, a cemented carbide is obtained with considerably tougher behaviour than possible using known technique. By choosing a cemented carbide composition which has great resistance against plastic deformation, it is thus possible with the present invention to obtain the combination of very good toughness behaviour and good resistance to plastic deformation in a way that gives a cemented carbide with unique properties.

Example 1

From a powder mixture comprising 1.9 weight-% TiC, 1.4 weight-% TiCN, 3.3 weight-% TaC, 2.2 weight-% NbC, 6.5 weight-% Co and rest WC with 0.15 weight% overstoichiometric carbon content turning inserts CNMG 120408 were pressed. The inserts were sintered with H_2 up to 450°C for dewaxing, further in vacuum to 1350°C and after that with protective gas of Ar for 1 h at 1450°C. This part is completely standard sintering.

During the cooling, a treatment according to the invention was made as 30 min at 1375°C with an atmosphere

of 300 mbar N_2 and thereafter continued cooling in N_2 down to 1200°C where a gas change to Ar was made.

The structure in the surface of the cutting insert consisted then of a 25 µm thick binder phase enriched zone essentially free from cubic phase and below that a zone slightly depleted of binder phase, 0.92-1 of the content in the inner portion of the insert and without essential enrichment of cubic phase, fig 1.

On the very surface of the inserts, particles of cubic phase were present covering about 40 % together with Co, WC and graphite. The inner portion of the inserts showed C-porosity, C04. After conventional edgerounding and cleaning, part of the cubic phase present on the surface was removed. The cutting inserts were coated by conventional CVD-technique with an 8 µm thick layer consisting of TiC and TiN.

Example 2 (reference example to Example 1)

From the same powder as in Example 1 inserts were pressed of the same type. These inserts were sintered according to the standard part of the sintering in Example 1, i.e., with a protective gas of Ar during the holding time at 1450°C. The cooling was under a protective gas of Ar.

The structure in the surface consisted of a 25 µm thick binder phase enriched zone essentially free from cubic phase. Below that zone, a 100-150 µm thick zone considerably depleted of binder phase, with a minimum of about 70 % of the nominal content in the inner portion of the insert and enriched of cubic phase was found as shown fig 2. The inner portion of the inserts showed C-porosity, C04. This is a typical structure for gradient sintered cemented carbide according to known technique. The inserts were edgerounded and coated according to known technique.

Example 3

With the CNMG 120408 inserts from Examples 1 and 2 a test was performed as an interrupted turning operation in an ordinary low carbon steel. The following cutting data were used:

Speed = 80 m/min

Feed = 0.30 mm/rev

Cutting depth = 2.0 mm

Thirty edges of each insert were run until fracture. The average life for the inserts according to the invention was 4.6 min and for the inserts according to known technique 1.3 min.

Example 4

The inserts from Examples 1 and 2 were tested in a continuous turning operation in a quenched and tempered steel with the hardness HB = 280. The following cutting data were used:

Speed = 250 m/min

Feed = 0.25 mm/rev

Cutting depth = 2.0 mm

The operation led to a plastic deformation of the cutting edge which could be observed as a wear land on the clearance face of the insert. The time to obtain a land width of 0.40 mm was measured for five edges each. Inserts according to the invention obtained an average tool life of 10.9 min and according to known technique an average tool life of 11.2 min.

From the Examples 3 and 4 it is evident that inserts according to the invention show a considerably better toughness behaviour than according to known technique without having significantly reduced their deformation resistance.

Example 5

From a powder consisting of, in weight-%, 5.5 TiC, 1.9 TiCN, 5 TaC, 2.5 NbC, 9.5 Co and the rest WC with about 0.05% substoichiometric carbon content milling inserts SPKR 1203 EDR were pressed. The inserts were sintered according to Example 1 except that the sintering temperature was 1410°C and that the treatment during the cooling was performed with the following parameters: 20 min at 1310°C at an atmosphere of 125 mbar N_2.

Examination of the structure showed an about 15 µm thick binder phase enriched zone, essentially free from cubic phase, fig 3. Below this surface zone there was a thicker zone insignificantly depleted of binder phase, less than 10% below nominal content.

On the surface there were particles of cubic phase covering <10% together with WC and binder phase. The inserts had no C-porosity.

After conventional edgerounding and cleaning a considerable portion of the cubic phase on the surface was removed particularly in the area close to the edge. The inserts were coated by conventional CVD-technique with an about 6 µm layer of TiC and TiN.

Example 6 (reference example to Example 5)

From the same powder as in Example 5, blanks were pressed of the same type and inserts were sintered according to the standard part of the sintering in Example 5, i.e., with a protective gas of Ar during the holding time at 1410°C. The cooling was performed under a protective gas of Ar. The structure in the surface of the insert consisted of an about 15 µm thick binder phase enriched zone essentially free from cubic phase. Below that there was a zone 100-130 µm thick considerably depleted of binder phase, with a minimum of about 30 %

below the nominal content and to the corresponding degree enriched of cubic phase. The inner portion of the inserts showed no C-porosity. This is a typical structure for gradient sintered cemented carbide according to known technique.

The inserts were edgerounded and coated according Example 5.

Example 7

With the milling inserts from Examples 5 and 6, a milling operation in a quenched and tempered steel SS 2541 was performed as a facemilling over a workpiece 50 mm thick. The milling was performed as one tooth milling with a milling body with a diameter of 125 mm. The milling body was positioned such that its centre was above the exit side of the workpiece. The following cutting data were used:

Speed = 90 m/min

Feed = 0.3 mm/rev

Cutting depth = 2 mm

The time until insert fracture was obtained was measured for 20 edges. The average tool life was 9.3 min for the inserts according to Example 5 and 3.2 min for Example 6. It appears that a clearly improved toughness was obtained for the inserts according to the invention.

Claims

1. Cemented carbide insert with improved toughness and resistance against plastic deformation containing WC and cubic phases of carbide and/or carbonitride in a binder phase based on Co and/or Ni with a binder phase enriched surface zone c h a r a c t e r i z e d in that the amount of cubic phase expressed as the total content of metallic elements, that forms cubic carbides, is between 6 and 15 weight-%, and that in a zone below the binder phase enriched surface zone the binder phase content is 0.85-1 of the content in the inner portion of the insert and the content of cubic phases essentially constant and equal to the content in the inner portion of the insert.

2. Cemented carbide insert according to the previous claim c h a r a c t e r i z e d in that said content of cubic phases in the binder phase enriched zone is essentially = 0.

3. Cemented carbide insert according to any of the previous claims c h a r a c t e r i z e d in that the surface fraction of cubic phase on the surface of the insert is <50 %.

4. Cemented carbide insert according to any of the previous claims c h a r a c t e r i z e d in that the binder phase content in the binder phase enriched zone has a maximum >1.1 of the binder phase content in the inner portion and the said maximum is at a distance of 10-30 µm from the surface.

5. Cemented carbide insert according to any of the previous claims c h a r a c t e r i z e d in that on said insert is deposited with CVD- or PVD-technique at least one wear resistant coating.

6. Cemented carbide insert according to any of the previous claims c h a r a c t e r i z e d in that inner-

most is deposited a coating of carbide, nitride or carbonitride, preferably of titanium.

7. Method of making a binder phase enriched cemented carbide insert by sintering in vacuum of a nitrogen containing material in in itself known way c h a r a c t e r i z e d in that after the sintering the insert is heat treated in nitrogen at 40-400 mbar at a temperature of 1280-1430°C for a time of 5-100 min.

Fig 1

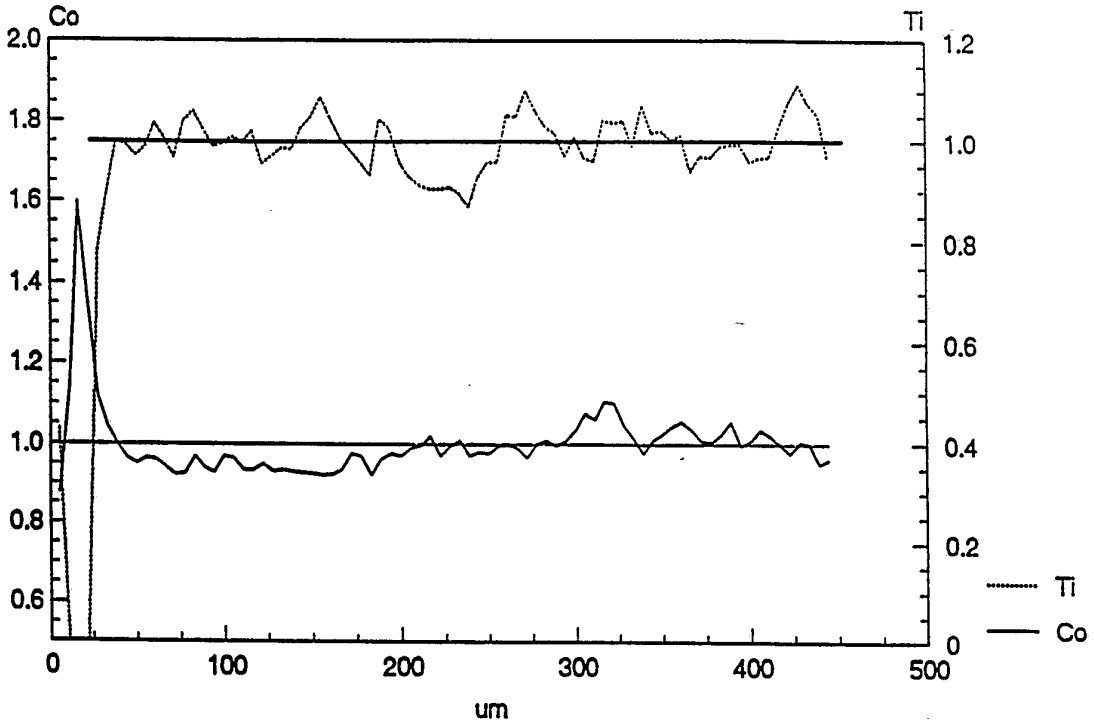
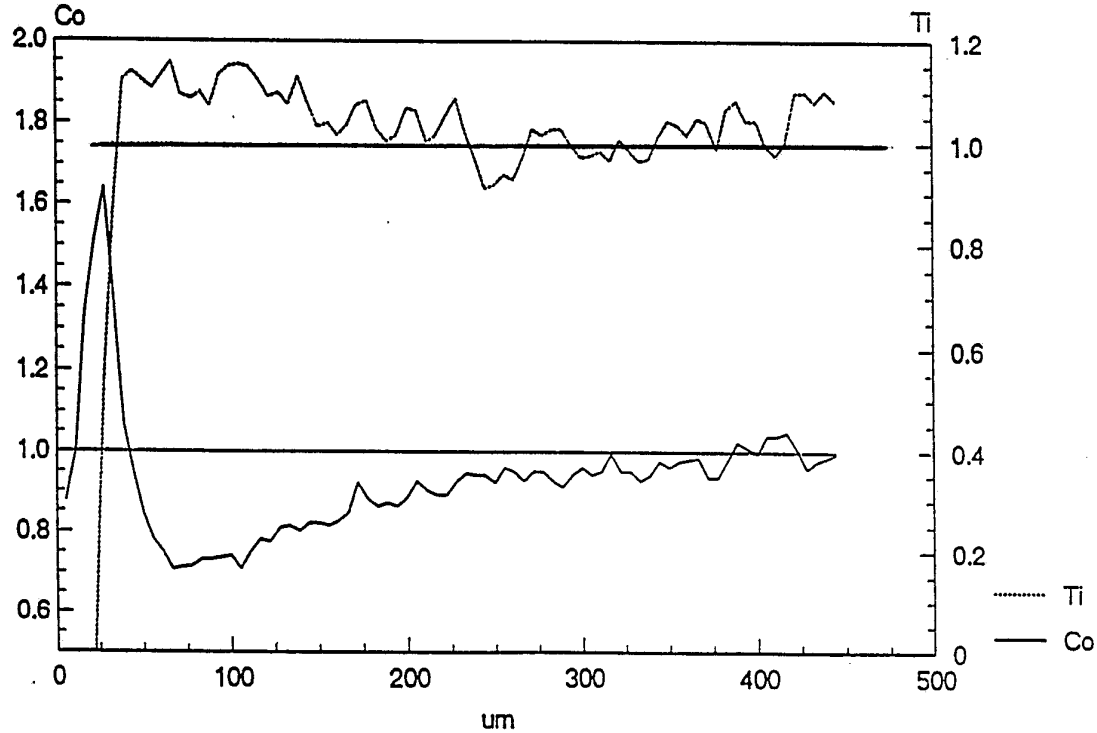

Co
Ti
2.0
1.8
1.6
1.4
1.2
1.0
0.8
0.6
1.2
1.0
0.8
0.6
0.4
0.2
0
0
100
200
300
400
500
um
Ti
Co

Fig 2


Co
Ti
2.0
1.8
1.6
1.4
1.2
1.0
0.8
0.6
1.2
1.0
0.8
0.6
0.4
0.2
0
0
100
200
300
400
500
um
Ti
Co

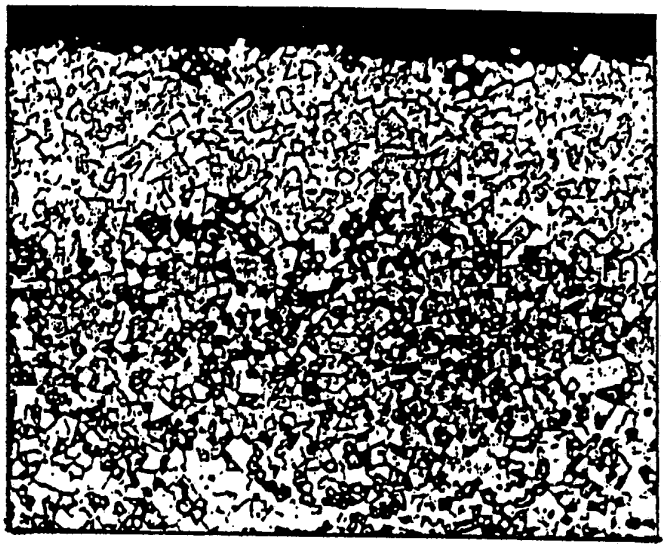


Fig 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 93/00140

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: C22C 29/02, C22C 29/08
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: C22C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPIL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 4649084 (THOMAS E. HALE ET AL), 10 March 1987 (10.03.87), column 2, line 19 - column 3, line 28; column 4, line 66 - column 6, line 65; column 10, line 1 - line 56, figures 4,5	1,2,3,4,5,7
A	--	6
X	US, A, 4830930 (YASURO TANIGUCHI ET AL), 16 May 1989 (16.05.89), column 2, line 40 - line 63; column 4, line 14 - line 23; column 5, line 1 - line 50, column 6, line 63 - column 7, line 30; figures 2, 7, 8; Table 1, sample 3; Table 2, samples 6, 7	1,5
A	--	2-4,6,7

[X] Further documents are listed in the continuation of Box C. [X] See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" erlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
11 June 1993	16 -06- 1993
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Nils Engnell Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 93/00140

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4828612 (WARREN C. YOHE), 9 May 1989 (09.05.89), column 1, line 36 - column 2, line 53; column 5, line 30 - column 6, line 34 --	1-7
A	US, A, 4913877 (WARREN C. YOHE), 3 April 1990 (03.04.90), column 1, line 40 - column 2, line 55; column 5, line 33 - column 6, line 49 --	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

28/05/93

International application No.
PCT/SE 93/00140

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4649084	10/03/87	CA-A- 1278173 EP-A,B- 0200991	27/12/90 12/11/86
US-A- 4830930	16/05/89	NONE	
US-A- 4828612	09/05/89	US-A- 4913877	03/04/90
US-A- 4913877	03/04/90	US-A- 4828612	09/05/89