



(86) **Date de dépôt PCT/PCT Filing Date:** 2005/12/02
(87) **Date publication PCT/PCT Publication Date:** 2006/06/08
(45) **Date de délivrance/Issue Date:** 2020/03/24
(85) **Entrée phase nationale/National Entry:** 2007/05/31
(86) **N° demande PCT/PCT Application No.:** US 2005/043926
(87) **N° publication PCT/PCT Publication No.:** 2006/060770
(30) **Priorité/Priority:** 2004/12/03 (US11/004,382)

(51) **Cl.Int./Int.Cl. G01N 15/10** (2006.01),
G01N 15/12 (2006.01), **G01N 15/14** (2006.01)


(72) **Inventeurs/Inventors:**
NEAS, EDWIN DEAN, US;
KUIKEN, JERALD EDWARD, US;
SCHENK, JOHN LOUIS, US;
GILLIGAN, THOMAS BOYD, US

(73) **Propriétaire/Owner:**
XY, LLC, US

(74) **Agent:** PERRY + CURRIER

(54) **Titre : CONTENANT DE VOLUME VARIABLE A PRESSION REGULEE CONTINUUELLEMENT POUR LA DISTRIBUTION DE LIQUIDE**

(54) **Title: PRESSURE REGULATED CONTINUOUSLY VARIABLE VOLUME CONTAINER FOR FLUID DELIVERY**

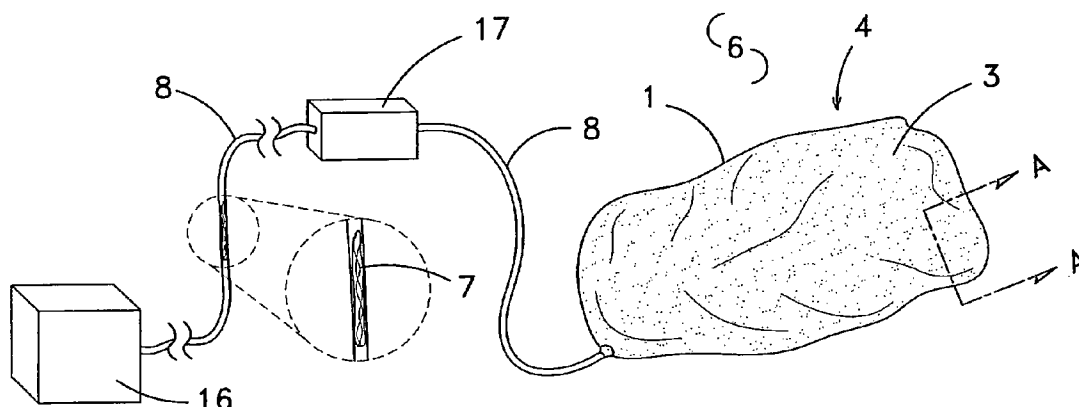

(57) **Abrégé/Abstract:**

A fluid handling and delivery system useful in generating a fluid stream (7) in the flow path (8) of microfluidic device (16).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
8 June 2006 (08.06.2006)

PCT

(10) International Publication Number
WO 2006/060770 A3

(51) International Patent Classification:

G01N 15/10 (2006.01) **G01N 15/14** (2006.01)
G01N 15/12 (2006.01)

(21) International Application Number:

PCT/US2005/043926

(22) International Filing Date:

2 December 2005 (02.12.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/004,382 3 December 2004 (03.12.2004) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 11/004,382 (CIP)
Filed on 3 December 2004 (03.12.2004)(71) Applicants (for all designated States except US): **XY, INC.** [US/US]; 1108 North Lemay Avenue, Fort Collins, CO 80524 (US). **CHATA BIOSYSTEMS, INC.** [US/US]; 323 SOUTH College Avenue, #5 Clocktower Square, Fort Collins, CO 80524 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NEAS, Edwin, Dean** [US/US]; 8202 Wcr 102, Nunn, CO 80648 (US). **KUIKEN, Jerald, Edward** [US/US]; 1289 High Plains Court, Windsor, CO 80550 (US). **SCHENK, John, Louis**[US/US]; 1906 Constitution Avenue, Fort Collins, CO 80526 (US). **GILLIGAN, Thomas, Boyd** [US/US]; 1856 Michael Lane, Fort Collins, CO 80526 (US).(74) Agent: **MILES, Craig, R.**; CR Miles P.C., 1 Old Town Square, Suite 200b, Fort Collins, CO 80524 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US (patent), UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: PRESSURE REGULATED CONTINUOUSLY VARIABLE VOLUME CONTAINER FOR FLUID DELIVERY

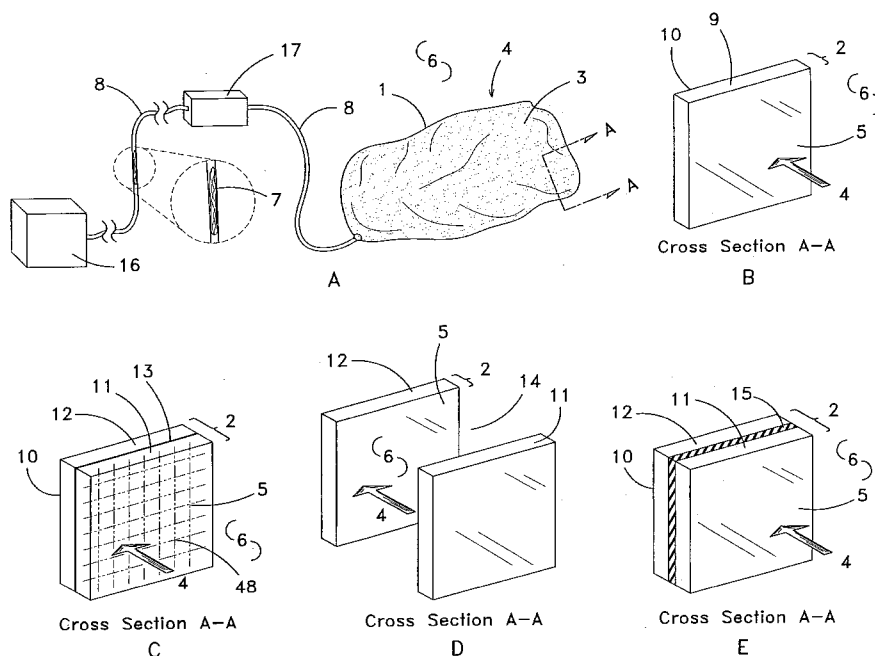

(57) Abstract: A fluid handling and delivery system useful in generating a fluid stream (7) in the flow path (8) of microfluidic device (16).

WO 2006/060770 A3

WO 2006/060770 A3



Published:

— *with international search report*

(88) Date of publication of the international search report:

22 February 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**PRESSURE REGULATED CONTINUOUSLY VARIABLE VOLUME
CONTAINER FOR FLUID DELIVERY**

I. TECHNICAL FIELD

5 A pressure regulated continuously variable volume container for the handling and delivery of fluids. Specifically, a pressure regulated variable volume container useful in generating a fluid stream in the flow path of various types of microfluidic devices such as flow cytometers or liquid chromatographs.

10 **II. BACKGROUND**

 Flow cytometry, liquid chromatography, and other microfluidic devices are prominent tools used in basic and applied research and in commercial manufacturing processes. These microfluidic systems are routinely used to analyze, separate, isolate, or purify biological particles, such as cells, organelles, chromosomes, deoxyribonucleic acids
15 (DNA), ribonucleic acids (RNA), DNA fragments, RNA fragments, proteins, protein fragments, peptides, oligonucleotides, or the like.

 Specifically with respect to applications in flow cytometry or the utilization of flow sort devices, biological particles, such as cells (which may be modified with one or a
20 plurality of types or kinds of ligands, labels, or fluorescent dyes), or carrier particles (which can bear biological particles such as antibodies or oligonucleotides, or the like), can be analyzed and sorted to isolate individual cells or biological particles, or subpopulations of cells or biological particles, having one or a plurality of common characteristic(s). As the field of flow cytometry has matured, an increased emphasis has been placed on retaining the
25 biological function(s) of isolated cells or biological particles.

Flow cytometers can also be used to analyze and sort a mixture of non-biological particles. For example, non-biological particles may be differentially modified with analyte specific reagents and reacted with a heterogeneous mixture of biological particles or analytes. The non-biological particles loaded with the corresponding reagent specific biological particles or analytes can then be differentiated and isolated with the flow sort system. Flow sort applications of this type can provide epitope or gene sequence analysis similar to that of a microarray analysis which utilizes a flat surface, such as a microscope slide, to present different analyte specific reagents such as antibodies, oligonucleotides, aptamers, or the like, to one or more biological particles of a heterogeneous biological mixture.

To maintain the biological function(s) of living cells during analysis, separation, purification, or collection, cells are entrained in fluids prepared to have certain characteristics relating to purity, pH, ion concentration, osmolality, buffering capacity, nutrient availability, and the like. With respect to certain applications, these fluids must be prepared with water validated to be free of adventitious agents, pyrogens, or the like; or with chemicals obtained from chemical suppliers validated as in compliance with regulatory specifications such as cGMP guidelines, 510K guidelines, ISO-9000 type guidelines, batch record documentation, drug master file documentation, or the like.

20

Specifically with respect to chromatographic systems, the fluids used to entrain and separate biological particles are often purified mixtures of solvents and solutes in water. Variable mixture between two or more fluids to establish differential gradients of salt concentration, pH, solvent ratios, or the like may be utilized to selectively release particles from a variety of solid substrates to effect the separation of biological particles into subpopulations based upon one or more particle characteristics.

Characteristic of chromatographic systems is the relatively large volume of fluid used to separate mixtures of different particle(s) or population(s) of particles into individual particles or purified subpopulations of particles which are then isolated in a relatively small volume of fluid. Typically, many liters of an elution buffer may be collected in a plurality of individual fractions each containing just a few milliliters with the desired product isolated in one or few of such fractions. The preparation and handling of fluids to support

30

chromatographic applications must be performed reliably by appropriately trained technicians. Any inaccuracy in the preparation of such fluids can lead to significant loss of chromatograph operating time or loss in whole or in part of the unpurified mixed particle(s) or population(s) of particles or of the purified individual particle(s) or subpopulation(s) of particles of interest.

Understandably, extensive research has been conducted resulting in numerous and varied types of microfluidic devices, fluids utilized with such microfluidic devices, and methods of making and using such microfluidic devices to separate biological and non-biological particles as above-described, or otherwise. Nonetheless, significant problems remain unresolved with regard to establishing and maintaining consistency in the preparation, handling, and delivery of fluids to and in the conduits of such microfluidic devices.

A significant problem with conventional delivery of fluids to microfluidic devices can be contamination of the fluid. The transfer of fluid from a fluid reservoir to a microfluidic device, and further transfer of the fluid through the various analytical conduits may require generation of hydrostatic pressure. Typically, a pump supplies the hydrostatic pressure required to move a fluid to and in the conduits of a microfluidic device.

Positive displacement pumps, for example, take up fluid from one side of the pump body, and utilizing valves, pistons, rotors, paddles, or the like, force the fluid to the other side of the pump. In this process, the fluid may come into contact with the internal surfaces of the pump depositing non-biological or biological materials, microbial or other infectious agents, which may remain within the body of the pump. In this way, the surfaces of the pump body can become a source of contamination to the subsequent volume of fluid transferred through the pump body.

Peristaltic pumps, apply pressure to the exterior surface of a conformable conduit to act on fluids contained within the conformable conduit. Peristalsis of the conformable conduit transfers fluid in one direction within the body of the conformable conduit. An advantage of the peristaltic pump can be that fluids do not contact the surfaces of the peristaltic pump. However, peristaltic pumps have disadvantages in that they may not build

very high pressures, may tend to create oscillating hydrostatic pressure variations, may be expensive to build and maintain, and recurring peristalsis of the conformable conduit can cause progressive deformation or degradation of the conduit material which can shed, bleed, or leach into the fluid.

5

Another significant problem with conventional delivery of fluids to microfluidic devices can be the use of a gas or mixtures of gases, such as air, argon, nitrogen, helium, or the like, to pressurize the head space of a fluid reservoir to initiate and maintain a fluid stream in the conduits of the microfluidic device. Use of pressurized gas(es) or atmospheric
10 gas pressure in contact with fluid in the reservoir can result in bubble formation in the fluid paths of the device. Since microfluidic devices have small diameter flow paths and the biological particles entrained in the fluid stream are also of small size, even very small or fine bubbles formed in the flow path can affect volume and laminar flow of the fluid within the flow paths, can cause failure of certain types of pumps, and can result in analytical
15 errors. Even bubbles invisible to the naked eye can be problematic with respect to the proper performance of a microfluidic device.

One mechanism by which unwanted bubbles may spontaneously form in the flow path of a microfluidic device can be a change in the concentration of dissolved gas in the
20 liquid stream followed by bubble formation. For example, a sheath fluid reservoir may contain an amount of sheath fluid to operate a flow cytometer for a long duration of time, sometimes in excess of 72 hours. With a head pressure of more than four atmospheres, or in certain applications in excess of 6 atmospheres, dissolved nitrogen content of the fluid can dramatically increase as the gases in the liquid move toward equilibrium with the gases in
25 the head space of the reservoir.

Subsequently, when gas pressure on the liquid is reduced, bubbles may form. Reduction in gas pressure may come from operator inspection or manipulation of the amount of fluid remaining in the sheath fluid reservoir. Alternatively, as the fluid flows
30 through the conduits of the microfluidic device, fluid pressure may become substantially lower to match the operating pressure of the microfluidic flow path. Under these conditions bubbles may form and travel within the flow path of the microfluidic device. Alternatively, surface tension of the bubble may allow it to adhere to the surfaces of the analytical

components of the microfluidic device. Adhered bubbles may further serve as nuclei of condensation where additional small bubbles fuse, or where additional dissolved gas may enter the bubble.

5 The position of such bubbles partitioning between a surface adherent phase, and the fluid suspended phase, is determined by the size of the bubble, and the rate of flux of the fluid at that point in the apparatus. Microfluidic devices, flow cells, and flow cytometers commonly present regions in the flow path where flow is not laminar, where flux rate is low, and where bubbles tend to form. For example, microfluidic devices may have filters
10 which purposefully restrict the fluid flow to facilitate removal of unwanted particles or aggregates. Bubbles often collect on the upstream side of such filters, effectively reducing the surface area of filter available to the fluid. Also, because gas may easily move across a filter, as dissolved gas, or as bubbles which may be smaller than the exclusion dimension of the filter, bubbles may accumulate on the opposite side of the filter as well.

15

Unwanted bubbles may also form in a microfluidic device by direct transfer of pressurized gas into the flow path of the microfluidic device. For example, when conventional flow cytometry sheath fluid reservoirs run out of fluid, or when the amount of fluid is low and the reservoir is not level, or when the sheath fluid reservoir is bumped,
20 tipped, or shaken, pressurized gas can directly enter the flow path of the device. When pressurized gas enters the flow path of a microfluidic device directly, the bubbles can be much larger and in certain circumstances can interrupt of the flow of fluid all together, alter flow characteristics, or remain located in the flow path of the microfluidic device. If the microfluidic device or flow path is not disposable, a significant amount of time may be
25 needed to dislodge or flush unwanted bubbles from the flow path.

Another problem related to the use of pressurized gas in contact with liquids to generate a fluid stream in microfluidic devices can be an increased concentration of oxygen in solution. For example, live sperm cells in the presence of media containing energy
30 sources may exhibit a metabolic rate limited by the content of dissolved oxygen. During and after flow sorting of sperm cells it may be advantageous to have a viable but low metabolic rate. High concentrations of dissolved oxygen may be generated by equilibration of the

sheath fluid with pressurized gases containing oxygen and its use may result in detrimentally high metabolic rates in sperm cells during flow analysis or flow sort processes.

5 A similar problem with the use of atmospheric gases or pressurized gases in contact with fluids to generate a fluid stream can be increased amounts of water introduced into anhydrous solvents or other water sensitive fluids used within microfluidic devices.

10 Another similar problem with the use of atmospheric gases or pressurized gases in contact with fluids to generate a fluid stream can be reaction of the certain gases with the fluid or the particles entrained in the fluid.

15 Another significant problem with conventional preparation of fluids for use with microfluidic devices or chromatographic systems can be that the available water quality or chemical solvent quality may be unacceptably low from which to make standardized solutions for certain applications. While there are numerous and varied methods to increase water quality, the cost of use may be unacceptably high when the source water contains a certain level of one or a plurality of materials, substances, or pathogens. This problem can be exacerbated with the use of specialized fluids for applications in basic research, clinical cell based therapy, or pharmaceutical production which may require fluids of higher quality with respect to precision of formulation, lot to lot consistency, and freedom from unwanted contaminating materials, particles, inorganic and organic substances, pathogens, chemicals, or the like. Particularly, with respect to fluids which are buffered or provide carbon sources to maintain cell function, high quality water may be essential to prevent, or reduce to acceptably low levels, the growth of pathogens.

25

A number of these problems are identified by United States Patent No. 6,729,369 to Neas, which are addressed by preparing large volumes of sterile specialized fluids at a single geographic location at which high quality water and chemicals are available. Flexible walled vessels are then used for transporting the prepared sterile specialized fluids to the location where the fluids are used. Neas et al. does not, however, address the problem of establishing a pressurized fluid stream in the flow path of any microfluidic devices such as a flow cytometer, liquid chromatograph, or the like.

30

Another significant problem with conventional delivery of fluids to microfluidic devices can be cleanup, disposal of unused amounts of fluid, and sterilization of fluid reservoirs. Flow cytometers can consume between about 200 milliliters to about 800 milliliters of sheath fluid per hour, and are typically operated between about one hour and
5 twenty four hours for a single procedure. The sheath fluid tanks or reservoirs typically contain between about five and about ten liters of sheath fluid, and if a procedure is interrupted or finished, it is often inconvenient to save the unused sheath fluid in the sheath fluid reservoir for use in the same procedure at a later date, because the sheath fluid tank may be needed for other procedures, or the sheath fluid may support the growth of
10 microflora or microfauna, if stored. Even if the sheath fluid is stored, it may often be held at between 4-10°C, and must then be re-equilibrated to warm temperatures before further use.

In the broad consumer markets many products are distributed as containers of fluid which are opened for use, and accordingly, the fluids in the container begin to interact with
15 atmosphere. With respect to certain fluids, interaction with atmosphere can be detrimental to the stability or consistency of the fluid. For example, paint or other surface coating products may begin to cure when exposed to atmosphere by moving toward equilibrium with the volume of atmosphere in the container. As such, an unused portion of paint in a container may form a thin layer of film. Another example may be free radical mediated
20 rancidification of food oils such as olive oil, polyunsaturated vegetable oils, or the like, accelerated by molecular oxygen.

Many fluids are distributed in small pressurized containers which deliver the fluid through an orifice that causes the fluid to disperse when it exits the container. Common
25 examples are cans of spray paint, hair spray, deodorant, insecticide, pesticide, herbicide, or the like. A disadvantage of the small pressurized containers is that there are a limited number of acceptable propellants which are both inert to reaction with contained fluid(s), and yet benign to the environment.

30 For larger scale application, these fluids are typically contained in reusable reservoirs which can be pressurized with a hand pumps or with air compressors. In addition to the problems above-discussed with respect to interaction of gas with the fluids, there are

additional disadvantages related to the safety of cleaning large containers of the remaining fluids and the disposal of the remaining fluids.

The instant invention provides fluid delivery devices and methods of fluid delivery which address each of the above mentioned problems with the conventional technology in the specific area of microfluidic devices as well as the broader consumer market.

III. DISCLOSURE OF INVENTION

Accordingly, a broad object of the invention can be to eliminate exposure of fluid(s) being delivered to the flow path of a microfluidic device or chromatography systems to external sources of contamination. One aspect of this object of the invention can be to isolate the fluids being delivered to the flow path of a microfluidic device from moving toward equilibrium with atmospheric gases, mixtures of gases, or partial pressures of gases whether at atmospheric pressure or at greater than atmospheric pressures. A second aspect of this object of the invention can be to isolate the fluids being delivered to the flow path of a microfluidic device from exposure to non-biological materials or surfaces, such as, pump surfaces, dust, cleaning compositions, or the like; or to biological substances or surfaces which may introduce pathogens, bacteria, viruses, spores, cells, proteins, nucleic acids, tissues, blood, semen, urine, feces, or the like. A third aspect of this object of the invention can be to maintain a sterile fluid to be delivered to the flow path of a microfluidic device.

Another broad object of the invention can be to provide a container which has a continuously adjustable volume with respect to the amount of fluid contained within so that a stream of the fluid can be delivered to a microfluidic device. One aspect of this object of the invention can be to provide a container which has continuously variable volume in response to pressure exerted on the exterior surface which allows the interior surface of the container to act upon the fluid contained within to generate a fluid stream at an outlet. A second aspect of this object of the invention can be to provide a flexible wall capable of withstanding a gas pressure of between about 70 pounds per square inch (psi) and 100 psi to generate a fluid stream in the flow path of a microfluidic device of about 25 psi to about 50 psi. Naturally, for certain applications the amount of pressure exerted on the flexible wall may be greater and for certain applications the amount of pressure may be less. A third

aspect of this object of the invention can be to deliver from a container having continuously variable volume in response to the pressure exerted by an amount of gas or liquid a fluid stream to the flow path of a microfluidic device, such as a flow cytometer or liquid chromatograph, in which particles can be entrained for analysis, separation, purification, or otherwise manipulated as desired.

Another broad object of the invention can be to provide an improvement of, or retrofit to, conventional fluid reservoir technology which further includes a container which has a continuously adjustable volume with respect to the amount of fluid contained within so that a stream of the fluid can be delivered to a microfluidic device. One aspect of this object of the invention can be to retrofit conventional flow cytometer sheath fluid tanks to further include a container which has a continuously adjustable volume with respect to the amount of fluid contained within so that a stream of the fluid can be delivered to a flow cytometer. A second aspect of this object of the invention with respect to liquid chromatographs can be to retrofit conventional liquid phase reservoirs to further include a container which has a continuously adjustable volume with respect to the amount of fluid contained within so that a stream of the fluid can be delivered directly to the separation column or to the high pressure pump of the liquid chromatograph.

Another broad object of the invention can be to establish or maintain a desired concentration of a dissolved gas or gases in the fluid delivered in the flow path of a microfluidic device such that particles (whether biological or non-biological) are exposed to the concentration or level of gas(es) necessary or desired; or exposure of particles to certain unwanted gases, mixtures of gases, or partial pressures of gases, increased water content, or the like, can be avoided.

Another broad object of the invention can be to provide fluids which are prepared to conform to the specifications of a particular microfluidic device or method of using the microfluidic device and are transferred to a container having continuously variable volume in accordance with the invention. Such containers prepared at a first geographic location can then be shipped to numerous other geographic locations to maintain consistency of the fluids utilized by the microfluidic devices at each location.

Another broad object of the invention can be to provide a receptacle of substantially fixed configuration into which an amount of gas or liquid can be delivered to act on the surface of a container having variable volume to deliver fluid to the flow path of a microfluidic device. One aspect of this broad embodiment of the invention can be to
5 provide a receptacle of substantially fixed configuration having a plurality of compartments allowing a plurality of fluids to be delivered simultaneously to one or more microfluidic devices or containers.

Another broad embodiment of the invention can be to provide a flow cytometer
10 device or chromatographic system and methods of using such flow cytometer device or chromatographic system which utilize fluids separated from the surfaces of the sheath fluid tank, and the gases delivered to the sheath fluid tank.

Another broad object of the invention can be to provide fluids and methods of
15 delivering fluids to the flow paths of microfluidic devices which are compatible with the isolation or purification of cells or other particles or substances for reintroduction into a human or animal. There are a significant number of concerns raised with respect to the prevention of transmission of infection or disease when cells, particles or substances are isolated by microfluidic devices. Infectious particles or other agents can vary in size from
20 prions which can be a few tens of nanometers, to virus particles which may be a few hundreds of nanometers, to yeasts, fungus, molds and bacteria which can be several hundreds of nanometers to many micrometers in size. Once a sample of cells, particles or other substance is contaminated with such infectious particles, it can be very difficult to remove them. In some cases, agents such as preservatives or antibiotics are acceptable, but
25 in most products being used in animals and humans, the governmental regulations requires use of production methods which can be validated to produce biological cells, particles, substances or chemicals free of all such adventitious infectious particles or agents. The instant invention facilitates the preparation, shipment, storage, handling, and use of validated sterile solutions free of adventitious particles or agents, which can be delivered
30 under pressure to flow cytometer, flow cell, or other microfluidic devices or chromatographic systems to generate cells, particles or other substances free of infectious or other unwanted agents.

Specific examples of such treatments or therapies can be, the isolation of specific hematopoietic stem cells from bone marrow with the proceeding separation of cancerous or abnormal cells from normal cells, and the reinsertion of the non-cancerous or normal cells back into the bone marrow; the isolation of certain white blood cells or blood cancer cells and the modification of such cells with certain conjugates and adjuvants which allow the cells to be re-inserted (dead or alive) as a form of therapeutic vaccination; the isolation of very rare cells, such as fetal cells, from the blood, such as maternal blood, containing a very small number of said fetal cells, for the purpose of performing genetic analysis such as polymerase chain reaction (PCR), genotyping, or haplotyping of such fetal cells, with minimal genetic background from the much more abundant genetic content of the maternal blood cells; the isolation of cells such as sperm cells from the vaginal fluids for the purposes of analyzing genetic make-up of the sperm cells; the flow sorting of sperm cells of mammals to generate enriched X-chromosome bearing and Y-chromosome bearing populations of viable sperm or the flow sorting of sperm cells enriched for certain genetic traits for further use in assisted reproduction techniques such as in-vitro fertilization, intra-cytoplasmic sperm injection, artificial insemination, or the like.

Another broad object of the invention can be to provide a container which has a continuously variable volume with respect to an amount of conformable material contained within such that such conformable material such as: water, a fluid for a microfluidic device; a sheath fluid for flow cytometry; a food; a drink; a food ingredient; a drink ingredient; a liquid detergent; a liquid pesticide or herbicide; a pharmaceutical solvent such as rubbing alcohol; a toiletry product such as a shampoo, a body wash, a hairspray or hair gel; or the like, can be handled, delivered, flowed in the flow path of a conduit, or otherwise utilized with only the desired contact with the atmosphere or other partial pressures of gases and without release to the atmosphere or other partial pressures of gases, unless desired. One aspect of this embodiment is the provision of large variable volume containers which contain specialized concentrates which are useful in the processing industry which formulates and produces fluid products for consumers and may benefit from new methods for accurate and clean delivery of fluid products, at controlled amounts, into the products they are compounding.

Naturally, further objects of the invention are disclosed throughout other areas of the specification, drawings, and claims.

IV. BRIEF DESCRIPTION OF THE DRAWINGS

5

Figure 1A shows an embodiment of the invention which provides a pressure regulated variable volume container which delivers a fluid stream in response to an amount of gas acting on the exterior surface.

10 Figure 1B shows a cross section through the flexible wall of an embodiment of the pressure regulated variable volume container.

Figure 1C shows a cross section through the flexible wall of alternative embodiment of the pressure regulated variable volume container.

15

Figure 1D shows a cross section through the flexible wall of second alternative embodiment of the pressure regulated variable volume container.

20 Figure 1E shows a cross section through the flexible wall of third alternative embodiment of the pressure regulated variable volume container.

Figure 2A shows a conventional sheath fluid tank for the delivery of sheath fluid(s) to a flow cytometer.

25 Figure 2B shows an embodiment of the invention for the delivery of sheath fluid(s) to a flow cytometer in which a conventional sheath fluid tank is retrofitted to receive an amount of gas which acts upon the exterior surface of a variable volume container.

30 Figure 2C shows an alternative embodiment of the invention for the delivery of sheath fluid(s) to a flow cytometer in which a conventional sheath fluid tank is retrofitted to receive an amount of gas which acts upon the exterior surface of a variable volume container.

Figure 3A shows an embodiment of the invention in which a receptacle of substantially fixed configuration receives an amount of gas which acts upon the exterior surface of a variable volume container.

5 Figure 3B shows an alternative embodiment of the invention in which a receptacle of substantially fixed configuration receives an amount of gas which acts upon the exterior surface of a variable volume container.

Figure 4A shows an embodiment of the invention in which a plurality of receptacles
10 each receive an amount of gas which acts upon the exterior surface of a variable volume container to generate a plurality of fluid streams.

Figure 4B shows an alternative embodiment of the invention in which a plurality of receptacles each receive an amount of gas which acts upon the exterior surface of a variable
15 volume container to generate a plurality of fluid streams.

Figure 5 shows a flow cytometer embodiment of the invention in which a fluid stream can be generated in the flow path of the flow cytometer from a variable volume container acted upon by an amount of gas.
20

Figure 6 shows a bivariate plot of sperm cells entrained in a fluid stream generated in accordance with the invention differentiated into X-chromosome bearing and Y-chromosome bearing populations.

25 Figure 7 shows an embodiment of the invention in which a plurality of variable volume containers each containing an amount of fluid are configured into a sheet of columns and rows.

Figure 8 illustrates a plurality of flow paths operable with the embodiment of the
30 invention shown by Figure 7.

V. MODE(S) FOR CARRYING OUT THE INVENTION

Generally, an amount of fluid located within a variable volume container having a flexible wall which acts upon the amount of fluid in response to gas pressure exerted on the exterior surface to generate a fluid stream in the flow path of a conduit.

5 Now referring primarily to Figure 1, an embodiment of the invention can provide a variable volume container (1) having a flexible wall (2) which acts on an amount of fluid (3) within the variable volume container (1) in response to an amount of pressure (4) exerted on the exterior surface (5) of the flexible wall (2) by an amount of gas (6). The amount of pressure (4) exerted on the exterior surface (5) of flexible wall (2) continuously adjusts the
10 volume of the variable volume container (1) to act on the amount of fluid (3) to generate a fluid stream (7)(whether of continuous flow or of discontinuous flow) in the flow path of a conduit (8). As to certain embodiments of the invention the variable volume container (1) can in part be of substantially rigid configuration and in part a flexible wall (2). That portion of the variable volume container (1) which provides the flexible wall (2) can act on
15 the amount of fluid (3) within the variable volume container (1) in response to the amount of pressure (4) exerted on the exterior surface (5) of the flexible wall by the amount of gas (6) to generate a fluid stream (7).

 The fluid (3) within the variable volume container (1) broadly encompasses without
20 limitation any fluid, liquid, composition, mixture, phase, product, or other material flowable in the flow path of the conduit (8) by continuous adjustment of the volume of the variable volume container (1) in response to the amount of pressure (4) exerted on exterior surface (5) of the flexible wall (2). The numerous and varied fluids flowable in the flow path of the conduit (8) (the flow path of the conduit includes numerous and varied configurations
25 corresponding to the broad range of applications for the invention and without limitation includes microfluidic flow paths or conduits which typically have an internal diameter of about one millimeter or less) includes without limitation: water, a solvent, a solution, a buffered solution, a liquid chromatography solution, a fluid in which biological particles can be entrained, a fluid in which non-biological particles can be entrained, a fluid in which cells
30 can be analyzed, a fluid in which sperm cells can be analyzed, a fluid in which sperm cells can be separated into Y-chromosome bearing and X-chromosome bearing populations, a flow cytometry sheath fluid, a flow cytometry sheath fluid in which non-biological particles can be entrained, a flow cytometry sheath fluid in which biological particles can be

entrained, a flow cytometry sheath fluid in which cells are entrained, a flow cytometry sheath fluid in which spermatozoa can be entrained, a flow cytometry sheath fluid in which stained spermatozoa can be entrained, paint, pesticides, pastes, adhesives, organic solvents, pesticides, food products, beverages, and various permutations and combinations thereof.

5

Now referring primarily to Figure 1B, the variable volume container (1) can provide a flexible wall (2) on which the amount of gas (6) exerts an amount pressure (4). The flexible wall (2) can comprise a layer of material (9) which has sufficient flexibility to adjust volume of the variable volume container (1) in response to the amount of pressure (4) exerted by the amount of gas (6) on the exterior surface (5). The layer of material (9) can be selected to provide an interior surface (10) compatible with the fluid (3) contained within the variable volume container (1) and to provide an exterior surface (5) compatible with the amount gas (6) which exerts the amount of pressure (4) thereon. With respect to certain embodiments of the invention, the layer of the material can further be selected to prevent or minimize the transfer of materials leachable or transferable from the layer of material (9) to the fluid (3) held by the variable volume container (1). The layer of material (9) can further be selected to prevent or minimize the transfer the amount of gas (6) through the layer of material (9) to the fluid held by the variable volume container (1). Without limiting the numerous and varied materials that can be used in accordance with the invention, preferred embodiments of the invention can utilize a layer of material (9) such as a polypropylene, a polyethylene, a nylon, a fluorocarbon, a styrene, a polycarbonate, a metal foil, a laminated paper, a biodegradable polymer, a waxed paper, or bonded layers thereof in various permutations and combinations. The layer of material (9) can include a coat of material, such as an oxygen barrier, a water barrier, alternate layers of a surface filling polymer and a ceramic (for example Barix), or the like.

Now referring primarily to Figure 1C, as to other embodiments of the invention the flexible wall (2) can comprise two layers of material. The first layer (11) which establishes the exterior surface (5) compatible to the amount of gas (6) which exerts a pressure (4) on the flexible wall (2) and a second layer (12) providing an interior surface (10) compatible with the fluid (3) within the variable volume container (1). The first layer (11) can be selected from materials such as a polypropylene, a polyethylene, a fluorocarbon, a styrene, a polycarbonate, a Mylar® film, an oxygen barrier, a water barrier, or the like. The second

layer (12) can be selected from the same or a different material than the first layer (11) such as a polypropylene, a polyethylene, a fluorocarbon, a styrene, a polycarbonate, a water barrier, or oxygen barrier (for example Barix), or the like. Either or both of the first layer (11) or the second layer (12) can be further include a reinforcement element (48) such as
5 individual fibers, threads, strands, a net, web, or the like, which can be made of a reinforcement material such as a nylon, a cotton, a carbon fiber, a metal strand, a plastic strand, or the like.

As to certain embodiments of the invention, the first layer (11) and the second layer
10 (12) of the flexible wall (2) can slidably engage, while as to other embodiments of the invention the first layer (11) and the second layer (12) can be fixedly engaged. Fixed engagement between the first layer (11) and the second layer (12) can be generated by the use of an adhesive layer (13), or other type of layer, or other process which induces a surface of the first layer (11) and a surface of the second layer (12) to adhere to each other.

15

Now referring primarily to Figure 1D, as to other particular embodiments of the invention, a gas collection element (14) can be interposed between the first layer (11) and the second layer (12). As to these embodiments of the invention, the amount of gas (6) which exerts an amount of pressure (4) on the exterior surface (5) of the variable volume
20 container (1) collects in the gas collection element (14) and exerts an amount of pressure (4) on the second layer (12) which acts on the liquid (3) contained within to generate the fluid stream (7). The first layer (11) acts to adjust the volume or pressure (or both) of the amount of gas (6) within the gas collection element (14) to the necessary or desired amount. As to these embodiments of the invention, in which the first layer (11) does not have to function
25 as part of a flexible wall (2) of the variable volume container (1), the first layer (11) can have a substantially fixed configuration formed from a material such as a plastic, a fiberglass, a glass, a metal, a steel, a polycarbonate, an acrylic, a polypropylene, a vinyl, a fluorocarbon, a carbon fiber, or the like.

30 Now referring primarily to Figure 1E, other embodiments of the invention can further include a flexible wall (2) having at least one intermediate layer (15) located between the first layer (11) and the second layer (12). The at least one intermediate layer (15) can be selected from a material such as a polypropylene, a polyethylene, a

fluorocarbon, a styrene, a polycarbonate, a Mylar® film, a ceramic layer, an oxygen barrier (or other gas), a water barrier, or the like. Additional embodiments of the invention can further provide the gas collection element (14) (similar to Figure 1D) interposed between the first layer (11) and the at least one intermediate layer (15), or as to other particular
5 embodiments of the invention the gas collection element (14)(similar to Figure 1D) can be interposed between the second layer (12) and the at least one intermediate layer (15). Where the gas collection element (14) is interposed between the first layer (11) and the at least one intermediate layer (15), the first layer (11) can be of substantially fixed configuration as above-described. In those embodiments of the invention in which the gas
10 collection element (14) is interposed between the second layer (12) and the at least one intermediate layer (15), either of the first layer (11) or the at least one intermediate layer (15), or both, can have a substantially fixed configuration, while the second layer (12) provides sufficient flexibility to allow the variable volume container (1) to continuously adjust volume in response to the amount of pressure (4) exerted by the amount of gas (6) on
15 the flexible wall (2). As to those embodiments of the invention, in which the liquid (3) engages the interior surface (10) of the second layer (12) and the amount of gas (6) exerts an amount of pressure (4) on the exterior surface (5) of the first layer (11), then the first layer (11), the intermediate layer (15) and the second layer (12) can have sufficient flexibility to allow variable adjustable volume of the container (1) whether the surfaces of the layers have
20 slidely or fixed engagement.

The amount of gas (6) which exerts an amount of pressure (4) on the exterior surface (5) of the flexible wall (2) to provide a continuously adjustable variable volume container (1) to act on the fluid (3) contained within can be any type or kind of gas (6) compatible
25 with the exterior surface (5) of the flexible wall (2) on which it acts, such as, an atmosphere, a mixture of gases, a mixture of gases having selected partial pressures, a purified gas, a filtered gas, a conditioned gas, or the like. As to alternative embodiments of the invention, the amount of gas (6) can be replaced with an amount of flowable material capable of acting upon the exterior surface (5) of the flexible wall (2) to adjust the volume of the container
30 (1), such as water, oil, or a solution.

With respect to certain embodiments of the invention, the gas (6) can exert an amount of pressure (4) on the exterior surface (5) of the flexible wall (2) of between 1 pound

per square inch (psi) to about 500 pounds per square inch (psi). As to other embodiments of the invention utilized for flow cytometry applications, the amount of gas (6) can exert a pressure on the exterior surface (5) of the flexible wall (2) of between about 10 psi and about 200 psi. Alternatively, the amount of gas (6) whether within the gas collection
 5 element (14), or otherwise, can be adjusted to generate a sufficient amount of pressure (4) on the exterior surface (5) of the flexible wall (2) of the variable volume container (1) to generate a fluid stream (7) within the flow path of a conduit (8) of a microfluidic device (16) having a fluid pressure of between 10 psi and about 200 psi, or a fluid pressure sufficient to generate a fluid stream (7) within the flow path of the conduit (8) having a velocity
 10 sufficient to entrain particles for a particular type or kind of application, analysis, differentiation, or separation.

Again referring primarily to Figure 1A, particular embodiments of the invention can further include fluid pressure generator (17), such as a peristaltic pump, piston pump, or the
 15 like to generate sufficient pressure for certain microfluidic applications, or other applications, in the range of between about 100 psi and about 5000 psi. One illustrative embodiment of the invention, provides a microfluidic device (16) configured as a high pressure liquid chromatograph (HPLC) having a fluid pressure generator (17) which increases fluid pressure within the conduit (8) to between about 100 psi and about 3000 psi
 20 for applications such as normal phase or reverse phase liquid chromatography.

Now referring primarily to Figure 2A, a conventional substantially cylindrical sheath fluid tank (18)(or other configuration of sheath fluid tank) can have an aperture element (19). The aperture element (19) of the sheath fluid tank (18) can be configured to mate with
 25 a removably sealable closure (20) which can further include a closure securement element (21) to secure the removably sealable closure (20). Alternative embodiments of the closure securement element (21) can include, as examples, mated spiral threads on the removable sealable closure (20) and the sheath fluid tank (18), spiral threaded rods connected to the sheath fluid tank which mate with spirally threaded hardware which operationally apply
 30 pressure to the removably sealable closure (20), straps, catches, or the like.

A gas inlet element (22) allows delivery of an amount of gas (6)(various types and kinds of gas(es) as above-described) to the interior of the sheath fluid tank (18). In

conventional applications, an amount of fluid (3) is contained by the sheath fluid tank (18) and the amount of gas (6) delivered to the interior of the sheath fluid tank (18) exerts an amount of pressure (4) on the surface of the fluid (3). A portion of the fluid (3) under pressure flows through the fluid outlet element (23) to be delivered as a fluid stream (7) in the flow path of a flow cytometer (24)(or other microfluidic device). A pressure adjustment element (25)(such as a pressure relief valve) can allow for adjustment of the amount of pressure within the sheath fluid tank (18).

Now referring primarily to Figure 2B, a conventional sheath fluid tank (18)(or similar fluid tank) can be adapted to operate in accordance with the invention. A variable volume container (1) having a flexible wall (2) can contain an amount of fluid (3)(sheath fluid for flow cytometry applications). The variable volume container (1) containing the fluid (3) can be located inside of the conventional sheath fluid tank (18) by transfer through the aperture element (19). A conduit (8) provides a flow path between the variable volume container (1) and the fluid outlet element (23). A coupler element (26) may be required to connect the conduit (8) to the fluid outlet element (23) of the sheath fluid tank (18). The coupler element can in certain instances comprise mated spirally threaded hardware which operates to compress a ferrule against a seat to seal the flow path within the conduit (8) from leaking fluid. Naturally, a variety of hardware can be used as the coupler element (26) to provide a continuous flow path to the fluid outlet element (23).

Now referring primarily to Figure 2C, as to certain embodiments of the invention the variable volume container (1) can be enclosed by a second layer (12) of substantially fixed configuration as discussed above formed from a material such as a plastic, a fiberglass, a glass, a metal, a steel, a polycarbonate, an acrylic, a polypropylene, a vinyl, a fluorocarbon, a carbon fiber, a paperboard, a cardboard, or the like. The second layer can be sufficiently perforated or permeable to an amount of gas (6) to allow an amount of pressure (4) to be exerted on the exterior surface (5) of the flexible wall (2) to act upon the amount of liquid (3) or sheath fluid contained within to generate a fluid stream (7) within the flow path of the conduit (8).

Now referring primarily to Figure 3A, certain embodiments of the invention can provide a receptacle (27) of substantially fixed configuration (rectangular as shown by

Figure 3A or otherwise as desired) in which one or more variable volume container(s)(1) having a flexible wall (2) can be located. The receptacle (27) may be mounted on a base (28) which orients the receptacle (27) relative to a support surface (29) (for example, angled as shown by Figure 3A or substantially perpendicular to the support surface (29) as shown by Figure 3B) which can facilitate flow of the fluid (3) within the variable volume container (1) toward the conduit (8) which communicates with the fluid outlet element (23). The receptacle (27) of substantially fixed configuration can be made from a material such as a plastic, a fiberglass, a glass, a metal, a steel, a polycarbonate, an acrylic, a polypropylene, a vinyl, a fluorocarbon, a carbon fiber, or the like. A portion or the entirety of the receptacle (27) can be made from a material which allows visual observation of the variable volume container (1) and the fluid (3) within the variable volume container (1). The receptacle (27) can further include a gas inlet element (22) through which an amount of gas (6) can be introduced into the gas collection element (14) between the interior surface of the receptacle (27) and the exterior surface (5) of the variable volume container (1). A pressure adjustment element (25) can be further included to maintain the necessary or desired amount of gas pressure (4) exerted on the exterior surface (5) of the variable volume container (1).

Now referring primarily to Figure 4A, certain embodiments of the invention can include a plurality of receptacles (27), individually discrete or as a single integral piece (as shown by Figures 4A and 4B) providing a corresponding plurality of gas collection elements (14). Figure 4A illustrates that each of the plurality of gas collection elements (14) can provide independent gas inlet elements (22), fluid outlet elements (23), and pressure adjustment elements (25) to allow each of the plurality of receptacle (27) to be utilized independent of the other receptacles (27). In this configuration of the invention, an amount of gas (6) can be delivered to each gas collection element (14) to establish an amount of pressure (4) on the exterior surface (5) of the flexible wall (2) of the variable volume container (1) located inside the individual receptacle (27). Accordingly, an amount of the fluid (3) contained in each of the variable volume containers (1) can be delivered to the fluid outlet element (23) from each receptacle (27). The fluid flow rate from each variable volume container (1) can be adjusted to be substantially the same or variably adjusted between receptacles (27).

Now referring primarily to Figure 4B, alternative embodiments of the invention can provide a single gas inlet element (22) to deliver an amount of gas (6) to all the gas collection elements (14) to establish a substantially similar amount of gas pressure (4) on the exterior surface (5) of the flexible wall (2) of each of the plurality of variable volume
 5 containers (1) in the corresponding each of the plurality of receptacles (27) which can be adjusted by a single pressure adjustment element (25). Each receptacle can further provide a fluid outlet element (23) through which a fluid stream (7) can flow to the flow path of a microfluidic device (16)(similar to that shown in Figure 1A).

10 Now referring primarily to Figure 5, a generic microfluidics device in accordance with the invention is illustrated. An amount of gas (6) can be delivered with a pressure differential generator (30) such as a tank of pressurized gas, a gas compressor, or the like, to one or more gas inlet elements (22) of the receptacle(s)(27) through a gas transfer conduit (31). A pressure regulator (32) can be further included to regulate the pressure of the
 15 amount of gas (6) in the gas transfer conduit (31). The amount of gas (6) transfers from the gas inlet element (22) to a gas collection element (14) inside the receptacle (27) which can have a substantially fixed configuration as shown, or alternatively described herein. At least one variable volume container (1) as above-described can be located inside the receptacle (27).

20

The amount of gas (6) within the gas collection element (14) acts upon the exterior surface (5) of the at least one variable volume container (1) located within the receptacle (27) to generate a fluid stream (7) at the fluid outlet element (25) which can be transferred within one or a plurality of conduits (8). The conduits (8) can have substantially the same
 25 internal diameter or varying internal diameters. The conduit (8) can further include a fluid conditioning element (33) such as a fluid filter, a gas scrubber, or a fluid pressure regulator, fluid pressure generator, such as a pump, or various permutations or combinations thereof. The conduit (8) can be connected to the flow path of a microfluidics device (24), such as a flow cytometer as shown in Figure 5, or other microfluidic device, such as a fluid
 30 distribution device which transfers liquid(s) to and between locations on a liquid containment element such as plates having a plurality of wells, the surface of slides, cuvettes, channels, or other containment features.

As to the flow cytometer embodiment of the invention shown in Figure 5, the variable volume container (1) having the flexible wall (2) can act on an amount of fluid (3) within the variable volume container (1) in response to an amount of pressure (4) exerted on the exterior surface (5) of the flexible wall (2) by an amount of gas (6) to generate the fluid stream (7) in which particles (33)(as described above) can be entrained upon delivery from a particle source (34). With respect to certain flow analysis or flow sort applications, the variable volume container can be established to further allow gravity to act upon the amount of fluid to assist in transfer of the amount of fluid (3) toward the fluid outlet element (23). For various flow analysis and flow sort applications, the fluid stream (7) can be pressurized within a range of about 15 pounds per square inch to about 80 pounds per square inch as above-described. With respect to certain flow sort applications, the pressure of the fluid stream (7) can be adjusted within a range of about 40 pounds per square inch and about 50 pounds per square inch. As but one example, the fluid stream (7) can be adjusted to about 45 pounds per square inch with a pressure variation of as little as about +/- 0.01 pounds per square inch. It can be important to hold the fluid stream (7) at a substantially constant pressure because consistent entrainment of particles (33) into the fluid stream (7) depends upon holding substantially constant the pressure differential between the fluid stream (7) and the particle source (34). Unlike certain types of reciprocating pumps which can generate fluctuations of pressure in the fluid stream (7), the invention can generate a fluid stream (7) having sufficiently constant pressure to in turn maintain a the pressure differential between the fluid stream (7) and the particle source (34) to allow entrainment of particles (33) for flow analysis or for flow sort applications. Additionally, because the amount of liquid (3) in the variable volume container (1) can be protected from contaminants as above-described, the constancy of the fluid stream (7) established by the invention can be greater than in conventional flow analysis or flow sort devices. The fluid stream (7) having particles (33) entrained can be oscillated by a nozzle (35) to generate a plurality of droplets (36) below the nozzle (35). Each of the plurality of droplets (36) can entrain an individual particle (33). An illumination source (37), such as a laser, can emit a beam of light (38), or a plurality of beams of light can be generated by utilizing a beam splitting element (39)(or by utilizing a plurality of illumination sources (37)), which can be focused through an optical element (40) incident upon the particle (33) entrained in the fluid stream (7) below the nozzle (35), either as a single beam of light or a plurality of beams of light, whether at the same or different wave lengths. As to some embodiments of the invention,

characteristics of the beam of light (38) can be altered by incidence upon the particle (33) within the fluid stream (7), and as to other embodiments of the invention the particle (or ligands, fluorescent materials, or the like, attached to the particle) can generate an emission (41). The beam(s) of light having altered characteristics or the emission (41) can be received by a single or a plurality of detectors (42) which can generate a signal for analysis to differentiate the particles (33) entrained in the droplets (36) based upon one or a plurality of particle characteristics. The differentiated particles can be separated based upon the presence or absence of one or a plurality of particle characteristics into individual collection elements (43). The separation device (44) can include a droplet charge generator (45) which induces a positive or negative charge in each droplet (36) and a droplet deflector (46) which acts upon the charged droplets to establish a trajectory to the proper collection element (43).

Now referring primarily to Figure 6, a bivariate plot generated during the flow sort of spermatozoa into X-chromosome bearing and Y-chromosome bearing populations in accordance with the invention is shown. The bivariate plot shows that a mixture of X-chromosome bearing sperm cells and Y-chromosome bearing sperm cells can be resolved into first X-chromosome bearing population (49) and second Y-chromosome bearing population (50). Provision of the bivariate plot is not intended to be limiting with respect to the numerous and varied applications of the invention. Rather, the bivariate plot is intended to be illustrative of the broad range of applications in which the invention can be utilized.

Now referring primarily to Figure 7, certain embodiments of the invention can provide a plurality of variable volume containers (1) configured as a single integral piece formatted in columns and rows, or otherwise as necessary or desired. A plurality of receptacles (27) configured as a single integral piece formatted in columns and rows can receive the plurality of variable volume containers (1). A releasably sealable closure (20) can be configured to isolate each of the plurality of variable volume containers (1). An amount of gas (6) can be delivered through a gas inlet element (22a)(22b) (two embodiments shown) to the gas collection element (14) within each separate receptacle (27), whether to a single receptacle of the plurality of receptacles or to a plurality of receptacles substantially simultaneously. The amount of gas (6) exerts an amount of pressure (4) on the

flexible wall(s) (2) of the individual variable volume containers (1) to generate a fluid stream in one or a plurality of conduits (8) which communicate with each receptacle (27).

Now referring primarily to Figure 8, the conduit (8) which fluidically communicates
5 with each receptacle (27) can comprise a microfluidic conduit (internal diameter of one millimeter or less) such as a plastic tube, or as shown in Figure 8 can also comprise a relief element (44) in the surface of a single or a plurality of fluid delivery bodies (45) which provides a flow path for the fluid stream (7). The fluid delivery bodies (45) can be releasably sealable and interchangeable to provide a number of different flow paths. In the
10 embodiment shown, the flow path established by the releasably sealable fluid delivery bodies can deliver the fluid (3) from a plurality of variable volume containers (1) to a plate (46) having a plurality of wells (47).

V. EXAMPLES.

15

EXAMPLE 1. Now referring to Figure 8, which shows a bivariate plot generated from the analysis of fluorochrome stained sperm cells differentiated based upon the presence of an X-chromosome or a Y-chromosome utilizing a DakoCytomation, Inc., MoFlo® flow cytometer in accordance with the invention. A conventional sheath fluid
20 tank was retrofitted with a variable volume container in accordance with the invention containing about 5 liters of sterile sheath fluid. The sheath fluid was maintained at about 20°C during use. An amount of gas was delivered to the sealed sheath fluid tank to exert an amount of gas pressure on the exterior surface of the variable volume container resulting in the generation of a fluid stream within the flow path of a DakoCytomation, Inc., MoFlo®
25 flow cytometer. The flow cytometer was then otherwise operated in accordance with the standard operation procedures provided by DakoCytomation, Inc. for a period of about 8 hours to analyze and sort a mixture of sperm cells to generate a viable population of X-chromosome bearing spermatozoa and viable population of Y-chromosome bearing spermatozoa. X-chromosome bearing and Y-chromosome bearing populations enriched
30 were established in discrete collection containers.

EXAMPLE 2. Similarly, a flow cytometer sorting human sperm in accordance with the invention can provide X-chromosome bearing and Y-chromosome bearing populations

for the purpose of sex selected artificial insemination. Human sperm cells sufficient for artificial insemination of a human female can be flow sorted in approximately 2 hours from male human ejaculate. The enriched X-chromosome bearing or Y-chromosome bearing sperm cell populations can be over 80% pure. Clinical procedures may require that after
5 each sample is sorted, the sorting fluidic channels are washed with an acid wash, a base wash, a disinfectant wash, and then a water wash. The instant invention can be used to deliver four different sterile fluids to the flow cytometer, and allows computer automated cleaning steps to be performed between patients. During the automated wash procedure, the physician may perform the artificial insemination procedure.

10

EXAMPLE 3. In accordance with the invention, a plurality of different microfluidic devices can be operated 24 hours per day. The variable volume containers can be located in common receptacle pressured at about 1.6 atmospheres. Each microfluidic device can be served with one or more conduits from the variable volume containers which communicate
15 with the conventional hardware of the microfluidic device.

As can be easily understood from the foregoing, the basic concepts of the present invention may be embodied in a variety of ways. The invention involves numerous and varied embodiments of a continuously variable volume container for fluid delivery and
20 methods of making and using such continuously variable volume container.

As such, the particular embodiments or elements of the invention disclosed by the description or shown in the figures accompanying this application are not intended to be limiting, but rather exemplary of the numerous and varied embodiments generically
25 encompassed by the invention or equivalents encompassed with respect to any particular element thereof. In addition, the specific description of a single embodiment or element of the invention may not explicitly describe all embodiments or elements possible; many alternatives are implicitly disclosed by the description and figures.

30 It should be understood that each element of an apparatus or each step of a method may be described by an apparatus term or method term. Such terms can be substituted where desired to make explicit the implicitly broad coverage to which this invention is entitled. As but one example, it should be understood that all steps of a method may be

disclosed as an action, a means for taking that action, or as an element which causes that action. Similarly, each element of an apparatus may be disclosed as the physical element or the action which that physical element facilitates. As but one example, the disclosure of an "adjustable volume" should be understood to encompass disclosure of the act of "adjusting
5 volume" -- whether explicitly discussed or not -- and, conversely, were there effectively disclosure of the act of "adjusting volume", such a disclosure should be understood to encompass disclosure of an "adjustable volume" and even a "means for adjusting volume." Such alternative terms for each element or step are to be understood to be explicitly included in the description.

10

In addition, as to each term used it should be understood that unless its utilization in this application is inconsistent with such interpretation, common dictionary definitions should be understood to included in the description for each term as contained in the Random House Webster's Unabridged Dictionary, second edition.

15

Thus, the applicant(s) should be understood to claim at least: i) each of the fluid delivery devices herein disclosed and described, ii) the related methods disclosed and described, iii) similar, equivalent, and even implicit variations of each of these devices and methods, iv) those alternative embodiments which accomplish each of the functions shown,
20 disclosed, or described, v) those alternative designs and methods which accomplish each of the functions shown as are implicit to accomplish that which is disclosed and described, vi) each feature, component, and step shown as separate and independent inventions, vii) the applications enhanced by the various systems or components disclosed, viii) the resulting products produced by such systems or components, ix) methods and apparatuses
25 substantially as described hereinbefore and with reference to any of the accompanying examples, x) the various combinations and permutations of each of the previous elements disclosed.

The scope of the claims should not be limited by the preferred embodiments set forth
30 in the examples, but should be given the broadest interpretation consistent with the description as a whole.

CLAIMS

1. A flow cytometer comprising:

a variable volume container having a flexible wall;

an amount of fluid in said variable volume container;

5 means for exerting an amount of pressure with an amount of a gas on an exterior surface of said flexible wall of said variable volume container;

a conduit between said variable volume container and a flow path of said flow cytometer;

10 means for generating a fluid stream of said amount of fluid in said flow path of said flow cytometer by exerting said amount of pressure with an amount of gas on said exterior surface of said flexible wall of said variable volume container;

means for generating a fluid pressure of said fluid stream of said amount of fluid inside of said flow cytometer within the range of about 25 psi and about 50 psi;

15 means for regulating said fluid stream within said flow path of said flow cytometer having said fluid pressure within the range of about 25 psi and about 50 psi for analysis of a plurality of particles entrained within said fluid stream; and

means for intermittently entraining one of said plurality of particles in said fluid stream in said flow path of said flow cytometer; and analyzing said plurality of particles entrained within said stream.

20

2. The flow cytometer of claim 1, wherein said variable volume container comprises a flexible tubular body having a first end and a second end each hermetically formed.

25 3. The flow cytometer of claim 2, wherein said tubular body comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.

4. The flow cytometer of claim 1 or 3, wherein said flexible wall comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
- 5 5. The flow cytometer of claim 1, wherein said flexible wall comprises a first layer and a second layer, wherein said first layer has a surface compatible with said amount of gas and said second layer has a surface compatible with said fluid.
- 10 6. The flow cytometer of claim 5, wherein said first layer comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
- 15 7. The flow cytometer of claim 5, wherein said second layer comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
8. The flow cytometer of claim 5, wherein said first layer establishes said exterior surface and said amount of gas collects between said first layer and said second layer.
- 20 9. The flow cytometer of claim 5, wherein said first layer and said second layer are bonded.
10. The flow cytometer of claim 5, wherein said flexible wall further comprises at least one intermediate layer.
- 25 11. The flow cytometer of claim 10, wherein said at least one intermediate layer comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
- 30 12. The flow cytometer of claim 1, wherein said amount of gas is selected from the group consisting of an atmosphere, a mixture of gases, a mixture of gases having selected partial pressures, a purified gas, a nitrogen gas, and a helium gas.

13. The flow cytometer of claim 1, wherein said pressure exerted by said amount of gas is selected from the group consisting of about 25 psi to about 30 psi, about 30 psi to about 40 psi, 40 psi to about 50 psi.
- 5 14. The flow cytometer of claim 1, wherein said fluid is selected from the group consisting of a fluid flowable in the flow path of a microfluidic device, water, a buffer, a sheath fluid, a flow cytometer sheath fluid, liquid reagents, cleaning solutions, solvents, and pesticides.
- 10 15. The flow cytometer of claim 1, comprising:
- a particle source which intermittently entrains a particle in said fluid stream;
 - at least one beam of light incident upon said particle for a duration of time;
 - an oscillator which acts upon and generates a plurality of droplets in said fluid stream, wherein at least one of said droplets contains said particle;
 - 15 • an emission generated by said particle which varies based upon at least one particle characteristic; and
 - at least one detector which receives said emission.
16. The flow cytometer of claim 15, further comprising a receptacle, wherein said
20 variable volume container is located within said receptacle.
17. The flow cytometer of claim 16, wherein said receptacle comprises a material selected from the group consisting of stainless steel, aluminum, plastic, paper board, and cardboard.
- 25 18. The flow cytometer of claim 16 or 17, wherein said amount of gas collects between said receptacle and said container.
19. The flow cytometer of any one of claims 16 to 18, wherein said receptacle has a
30 substantially rigid configuration.
20. The flow cytometer of any one of claims 16 to 19, wherein said receptacle comprises a sheath fluid tank for a flow cytometer.

21. The flow cytometer of claim 20, wherein said fluid is selected from water, a buffer, a sheath fluid, a flow cytometer sheath fluid, a liquid reagent, a cleaning solution, and a solvent.
- 5 22. The flow cytometer of claim 15, wherein said particle is selected from the group consisting of a cell, a sperm cell, a labeled sperm cell, a stained sperm cell, a sperm cell having a fluorochrome bound to a nuclear DNA, a component obtained from a cell, a chromosome, a nucleic acid, a protein, a DNA, a RNA, a fragment of DNA, a fragment of RNA, and a fragment of protein.
- 10 23. The flow cytometer of claim 15, further comprising a nozzle responsive to said oscillator which acts upon said fluid stream to generate said plurality of droplets.
24. The flow cytometer of claim 15, wherein said at least one beam of light comprises at
15 least one laser beam.
25. The flow cytometer of claim 24, wherein said at least one laser beam comprises a pulsed laser beam.
- 20 26. The flow cytometer of claim 15, wherein said emission comprises a fluorescent emission generated by said particle.
27. The flow cytometer of claim 15, further comprising an analyzer which differentiates
25 each of said particles based upon said at least one particle characteristic.
28. The flow cytometer of claim 26 or 27, wherein said at least one particle
characteristic comprises an amount of DNA contained in said particle.
29. The flow cytometer of claim 27, wherein said at least one particle characteristic
30 comprises an amount of DNA contained in an X-chromosome bearing spermatozoa.
30. The flow cytometer of claim 27, wherein said at least one particle characteristic
comprises an amount of DNA contained in a Y-chromosome bearing spermatozoa.

31. The flow cytometer of claim 15, wherein said at least one detector comprises a single detector.

32. The flow cytometer of claim 15, wherein said at least one detector comprises at least two detectors.

33. The flow cytometer of claim 31, wherein said at least one detector comprises a first photomultiplier tube and a second photomultiplier tube.

34. The flow cytometer of claim 15, further comprising a signal generator coupled to said at least one detector differentially responsive to the emission generated by each of said particles.

35. The flow cytometer of claim 27, further comprising a particle sorter which isolates each said particle based upon the presence of said at least one particle characteristic into a collection container.

36. The flow cytometer of claim 35, wherein said particle sorter separates X chromosome bearing sperm cells from Y-chromosome bearing sperm cells.

37. A method of operating a flow cytometer, comprising:
providing a variable volume container having a flexible wall;
establishing an amount of fluid in said variable volume container;
exerting an amount of pressure with an amount of a gas on an exterior surface of said flexible wall of said variable volume container;
providing a conduit between said variable volume container and a flow path of said flow cytometer;
generating a fluid stream of said amount of fluid in said flow path of said flow cytometer by exerting said amount of pressure with an amount of gas on said exterior surface of said flexible wall of said variable volume container;
generating a fluid pressure of said fluid stream of said amount of fluid inside of said flow cytometer within the range of about 25 psi and about 50 psi;

regulating said fluid stream within said flow path of said flow cytometer having said fluid pressure within the range of about 25 psi and about 50 psi for analysis of a plurality of particles entrained within said fluid stream;

intermittently entraining one of said plurality of particles in said fluid stream in said
5 flow path of said flow cytometer; and analyzing said plurality of particles entrained within said stream.

38. The method of claim 37, wherein providing a variable volume container comprises the step of providing a flexible tubular body having an upper end and a lower end each hermetically formed.

10 39. The method of claim 37, wherein providing a variable volume container having a flexible wall comprises providing a container only a portion of which provides said flexible wall.

40. The method of claim 37, wherein generating a fluid stream in said flow path of said flow cytometer comprises generating a fluid stream from the group consisting of water, a
15 buffer, a sheath fluid, a flow cytometer sheath fluid, a liquid reagent, a cleaning solution, and a solvent.

41. The method of claim 37, wherein exerting an amount of pressure with an amount of gas on said flexible wall of said variable volume container further comprises selecting said amount of gas from the group consisting of an atmospheric gas, a mixture of gases, a
20 mixture of gases having selected partial pressures, a purified gas, a nitrogen gas, a helium gas.

42. The method of claim 37, further comprising locating said variable volume container in a receptacle.

43. The method of claim 42, wherein exerting an amount of pressure with an amount of
25 a gas on an exterior surface of said flexible wall of said variable volume container further

comprising the step of collecting said amount of gas between an interior surface of said receptacle and said exterior surface of said variable volume container.

44. The method of claim 37, wherein said flexible wall of said variable volume container comprises at least two flexible layers.

5 45. The method of claim 44, further comprising providing a first flexible layer compatible with said amount of gas and providing a second flexible layer compatible with said amount of fluid.

46. The method of claim 45, further comprising collecting said amount of gas between said first flexible layer and said second flexible layer.

10 47. The method of claim 45, further comprising the step of bonding said first flexible layer to said second flexible layer.

48. The method of claim 47, wherein said first flexible layer comprises a material selected from the group consisting of polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.

15 49. The method of claim 47, wherein said second flexible layer comprises a material selected from the group consisting of polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.

50. The method of claim 45, further comprising providing at least one intermediate material layer between said first flexible layer and said second flexible layer.

20 51. The method of claim 37, further comprising illuminating said particles in said fluid stream.

52. The method of claim 51, further comprising detecting an emission from said particles which varies based upon corresponding variation of at least one particle characteristic.

25 53. The method of claim 52, wherein each of said particles comprises a cell and said emission comprises a fluorescent emission which varies based upon a difference in an amount of DNA within a cell.

54. The method of claim 53, further comprising entraining said cell in a droplet.
55. The method of claim 53, further comprising sorting said cell based upon relative presence or absence of said at least one particle characteristic.
56. The method of claim 55, wherein sorting said particle based upon relative presence
5 or absence of said at least one particle characteristic comprises sorting X -chromosome bearing from Y -chromosome bearing cells.
57. The method of claim 56, wherein said cells comprise live sperm cells.
58. The method of claim 37, wherein said flow cytometer comprises a plurality of flow cytometers.
- 10 59. A fluid delivery system comprising:
- a variable volume container having a flexible wall;
- an amount of fluid in said variable volume container;
- means for exerting an amount of pressure with an amount of a gas on an exterior surface of said flexible wall of said variable volume container;
- 15 a conduit between said variable volume container and a flow path of said fluid delivery system;
- means for generating a fluid stream of said amount of fluid in said flow path of said fluid delivery system by exerting said amount of pressure with an amount of gas on said exterior surface of said flexible wall of said variable volume container;
- 20 means for generating a fluid pressure of said fluid stream of said amount of fluid inside of said fluid delivery system within the range of about 10 psi and about 500 psi;
- means for regulating said fluid stream within said flow path of said fluid delivery system having said fluid pressure within the range of about 10 psi and about 500 psi; and
- means for entraining a plurality of particles in said fluid stream in said flow path of said
25 fluid delivery system; and

means for analyzing said plurality of particles entrained within said stream.

60. The fluid delivery system of claim 59, wherein said variable volume container comprises a flexible tubular body having a first end and a second end each hermetically formed.

5

61. The fluid delivery system of claim 60, wherein said tubular body comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.

10 62. The fluid delivery system of claim 59 or 61, wherein said flexible wall comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.

63. The fluid delivery system of claim 59, wherein said flexible wall comprises a first
15 layer and a second layer, wherein said first layer has a surface compatible with said amount of gas and said second layer has a surface compatible with said fluid.

64. The fluid delivery system of claim 63, wherein said first layer comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a
20 styrene, and a polycarbonate.

65. The fluid delivery system of claim 63, wherein said second layer comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.

25

66. The fluid delivery system of claim 63, wherein said first layer establishes said exterior surface and said amount of gas collects between said first layer and said second layer.

30 67. The fluid delivery system of claim 63, wherein said first layer and said second layer are bonded.

68. The fluid delivery system of claim 63, wherein said flexible wall further comprises at least one intermediate layer.
69. The fluid delivery system of claim 68, wherein said at least one intermediate layer
5 comprises a material selected from the group consisting of a polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
70. The fluid delivery system of claim 59, wherein said amount of gas is selected from the group consisting of an atmosphere, a mixture of gases, a mixture of gases having
10 selected partial pressures, a purified gas, a nitrogen gas, and a helium gas.
71. The fluid delivery system of claim 59, comprising:
- a particle source which entrains a particle in said fluid stream; and
 - an oscillator which acts upon and generates droplets in said fluid stream,
15 wherein at least one of said droplets contains said particle.
72. The fluid delivery system of claim 71, comprising:
- at least one beam of light incident upon said particle for a duration of time;
 - an emission generated by said particle which varies based upon at least one
20 particle characteristic; and
 - at least one detector which receives said emission.
73. The fluid delivery system of claim 72, wherein said pressure exerted by said amount of gas is selected from the group consisting of about 25 psi to about 30 psi, about 30 psi to
25 about 40 psi, 40 psi to about 50 psi.
74. The fluid delivery system of claim 59, wherein said fluid is selected from the group consisting of a fluid flowable in the flow path of a microfluidic device, water, a buffer, a sheath fluid, a fluid delivery system sheath fluid, liquid reagents, cleaning solutions,
30 solvents, and pesticides.

75. The fluid delivery system of 72, further comprising a receptacle, wherein said variable volume container is located within said receptacle.
76. The fluid delivery system of claim 75, wherein said receptacle comprises a material
5 selected from the group consisting of stainless steel, aluminum, plastic, paper board, and cardboard.
77. The fluid delivery system of claim 76, wherein said amount of gas collects between said receptacle and said container.
- 10 78. The fluid delivery system of any one of claims 75 to 77, wherein said receptacle has a substantially rigid configuration.
79. The fluid delivery system of any one of claims 75 to 78, wherein said receptacle
15 comprises a sheath fluid tank for a flow cytometer.
80. The fluid delivery system of claim 79, wherein said fluid is selected from water, a buffer, a sheath fluid, a flow cytometer sheath fluid, a liquid reagent, a cleaning solution, and a solvent.
- 20 81. The fluid delivery system of claim 71 or 72, wherein said particle is selected from the group consisting of a cell, a sperm cell, a labeled sperm cell, a stained sperm cell, a sperm cell having a fluorochrome bound to a nuclear DNA, a component obtained from a cell, a chromosome, a nucleic acid, a protein, a DNA, a RNA, a fragment of DNA, a
25 fragment of RNA, and a fragment of protein.
82. The fluid delivery system of claim 71 or 72, further comprising a nozzle responsive to said oscillator which acts upon said fluid stream to generate said droplets.
- 30 83. The fluid delivery system of claim 71 or 72, wherein said at least one beam of light comprises at least one laser beam.






84. The fluid delivery system of claim 71 or 72, wherein said at least one laser beam comprises a pulsed laser beam.
85. The fluid delivery system of claim 72, wherein said emission comprises a fluorescent emission generated by said particle.
- 5 86. The fluid delivery system of claim 71 or 72, further comprising an analyzer which differentiates said particle based upon said at least one particle characteristic.
87. The fluid delivery system of claim 85 or 86, wherein said at least one particle characteristic comprises an amount of DNA contained in said particle.
88. The fluid delivery system of claim 85 or 86, wherein said at least one particle characteristic
10 comprises an amount of DNA contained in an X-chromosome bearing spermatozoa.
89. The fluid delivery system of claim 86, wherein said at least one particle characteristic comprises an amount of DNA contained in a Y-chromosome bearing spermatozoa.
90. The fluid delivery system of claim 72, wherein said at least one detector comprises a single detector.
- 15 91. The fluid delivery system of claim 72, comprising at least two detectors.
92. The fluid delivery system of claim 90, wherein said at least one detector comprises a first photomultiplier tube and a second photomultiplier tube.
93. The fluid delivery system of claim 72, further comprising a signal generator coupled to said at least one detector differentially responsive to the emission generated by said particle.

94. The fluid delivery system of claim 86, further comprising a particle sorter which isolates each said particle based upon the presence of said at least one particle characteristic into a collection container.
95. The fluid delivery system of claim 94, wherein said particle sorter separates X-
5 chromosome bearing sperm cells from Y-chromosome bearing sperm cells.
96. A method of operating a fluid delivery system, comprising:
- providing a variable volume container having a flexible wall;
- establishing an amount of fluid in said variable volume container;
- 10 exerting an amount of pressure with an amount of a gas on an exterior surface of said flexible wall of said variable volume container;
- providing a conduit between said variable volume container and a flow path of said fluid delivery system;
- generating a fluid stream of said amount of fluid in said flow path of said fluid delivery
15 system by exerting said amount of pressure with an amount of gas on said exterior surface of said flexible wall of said variable volume container;
- generating a fluid pressure of said fluid stream of said amount of fluid inside of said fluid delivery system within the range of about 10 psi and about 500 psi;
- regulating said fluid stream within said flow path of said fluid delivery system having said
20 fluid pressure within the range of about 10 psi and about 500 psi;
- entraining a plurality of particles in said fluid stream in said flow path of said fluid delivery system; and
- analyzing said plurality of particles entrained within said stream.
97. The method of claim 96, wherein providing a variable volume container comprises
25 the step of providing a flexible tubular body having an upper end and a lower end each hermetically formed.

98. The method of claim 96, wherein providing a variable volume container having a flexible wall comprises providing a container only a portion of which provides said flexible wall.
99. The method of claim 96, wherein generating a fluid stream in said flow path of said
5 fluid delivery system comprises generating a fluid stream from the group consisting of water, a buffer, a sheath fluid, a flow cytometer sheath fluid, a liquid reagent, a cleaning solution, and a solvent.
100. The method of claim 96, wherein exerting an amount of pressure with an amount of gas on said flexible wall of said variable volume container further comprises selecting said
10 amount of gas from the group consisting of an atmospheric gas, a mixture of gases, a mixture of gases having selected partial pressures, a purified gas, a nitrogen gas, a helium gas.
101. The method of claim 96, further comprising locating said variable volume container in a receptacle.
- 15 102. The method of claim 101, wherein exerting an amount of pressure with an amount of a gas on an exterior surface of said flexible wall of said variable volume container further comprising the step of collecting said amount of gas between an interior surface of said receptacle and said exterior surface of said variable volume container.
103. The method of claim 96, wherein said flexible wall of said variable volume container
20 comprises at least two flexible layers.
104. The method of claim 103, further comprising providing a first flexible layer compatible with said amount of gas and providing a second flexible layer compatible with said amount of fluid.
105. The method of claim 104, further comprising collecting said amount of gas between
25 said first flexible layer and said second flexible layer.
106. The method of claim 104, further comprising the step of bonding said first flexible layer to said second flexible layer.

107. The method of claim 106, wherein said first flexible layer comprises a material selected from the group consisting of polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
108. The method of 106, wherein said second flexible layer comprises a material selected from
5 the group consisting of polypropylene, a polyethylene, a fluorocarbon, a styrene, and a polycarbonate.
109. The method of claim 104, further comprising providing at least one intermediate material layer between said first flexible layer and said second flexible layer.
110. The method of claim 96, further comprising illuminating said particle in said fluid
10 stream.
111. The method of claim 110, further comprising detecting an emission from said particle which varies based upon corresponding variation of at least one particle characteristic.
112. The method of claim 111, wherein said particle comprises a cell and said emission comprises a fluorescent emission which varies based upon a difference in an amount of DNA
15 within a cell.
113. The method of claim 112, further comprising entraining said cell in a droplet.
114. The method of claim 96 wherein said fluid pressure of said fluid stream of said amount of fluid inside of said fluid delivery system is generated within the range of about 25 psi and about 50 psi.
- 20 115. A microfluidic device comprising the fluid delivery system as set forth in claim 59.
116. The fluid delivery system as set forth in claim 59, wherein said fluid pressure of said fluid stream of said amount of fluid inside of said fluid delivery system is generated within the range of about 25 psi and about 50 psi.
117. A flow cytometer comprising the fluid delivery system as set forth in claim 59.
- 25 118. A flow sort device comprising the fluid delivery system as set forth in claim 59.
119. A high performance liquid chromatograph comprising the fluid delivery system as set forth in claim 59.
120. A liquid chromatograph comprising the fluid delivery system as set forth in claim 59.

1/8

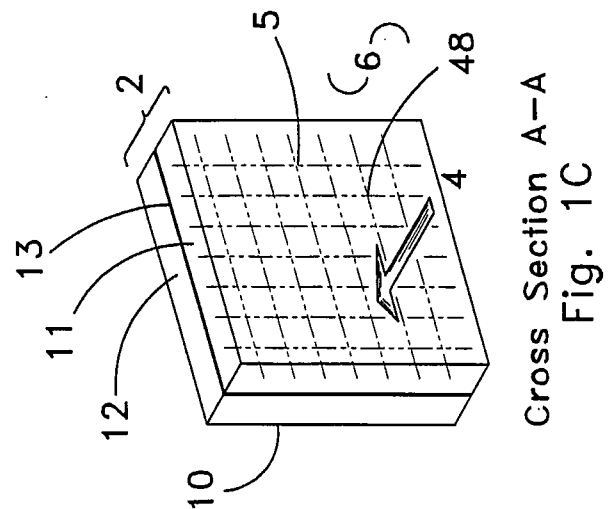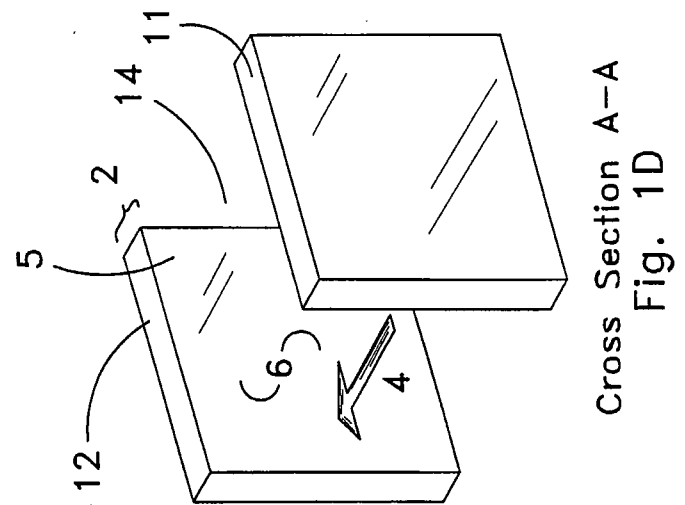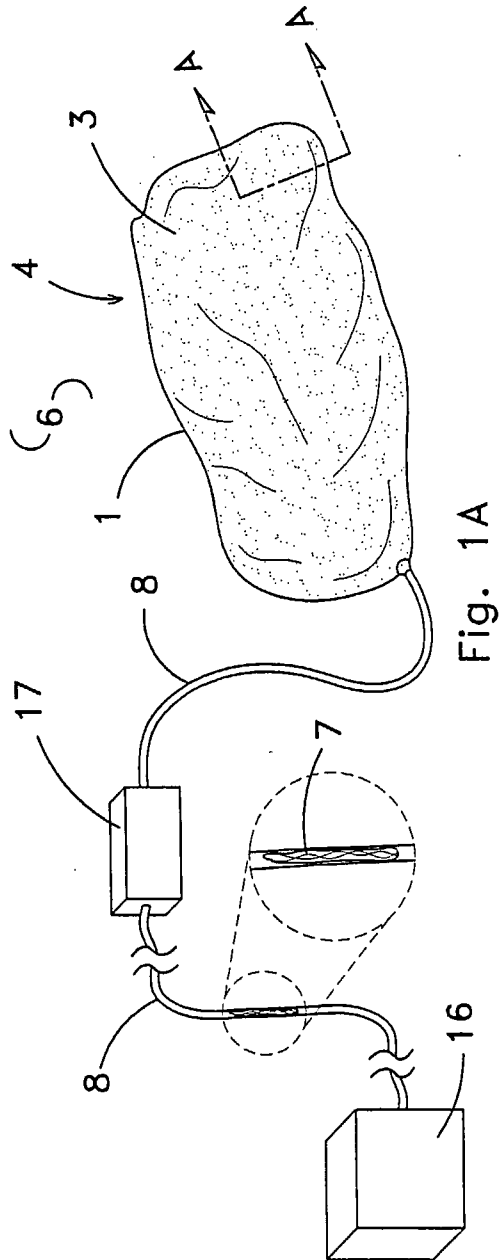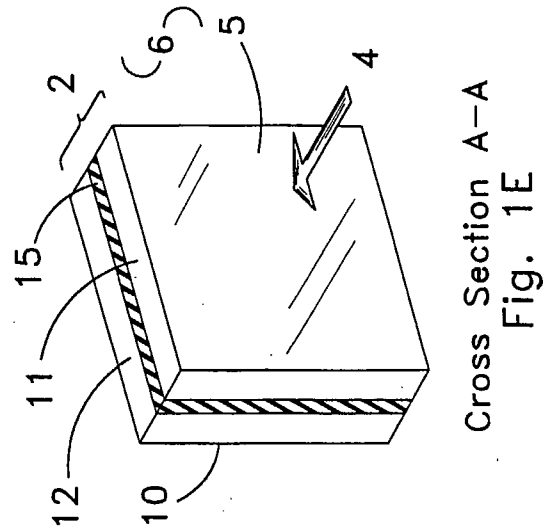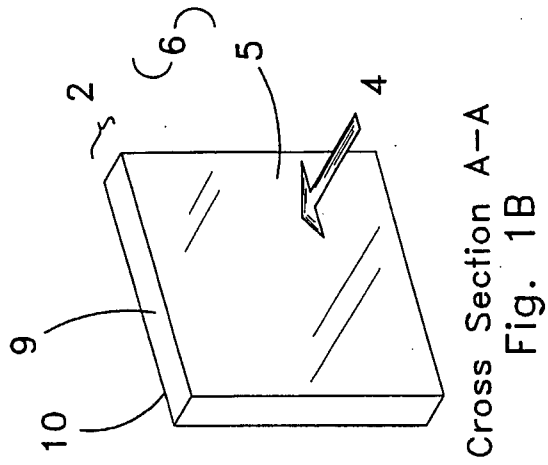

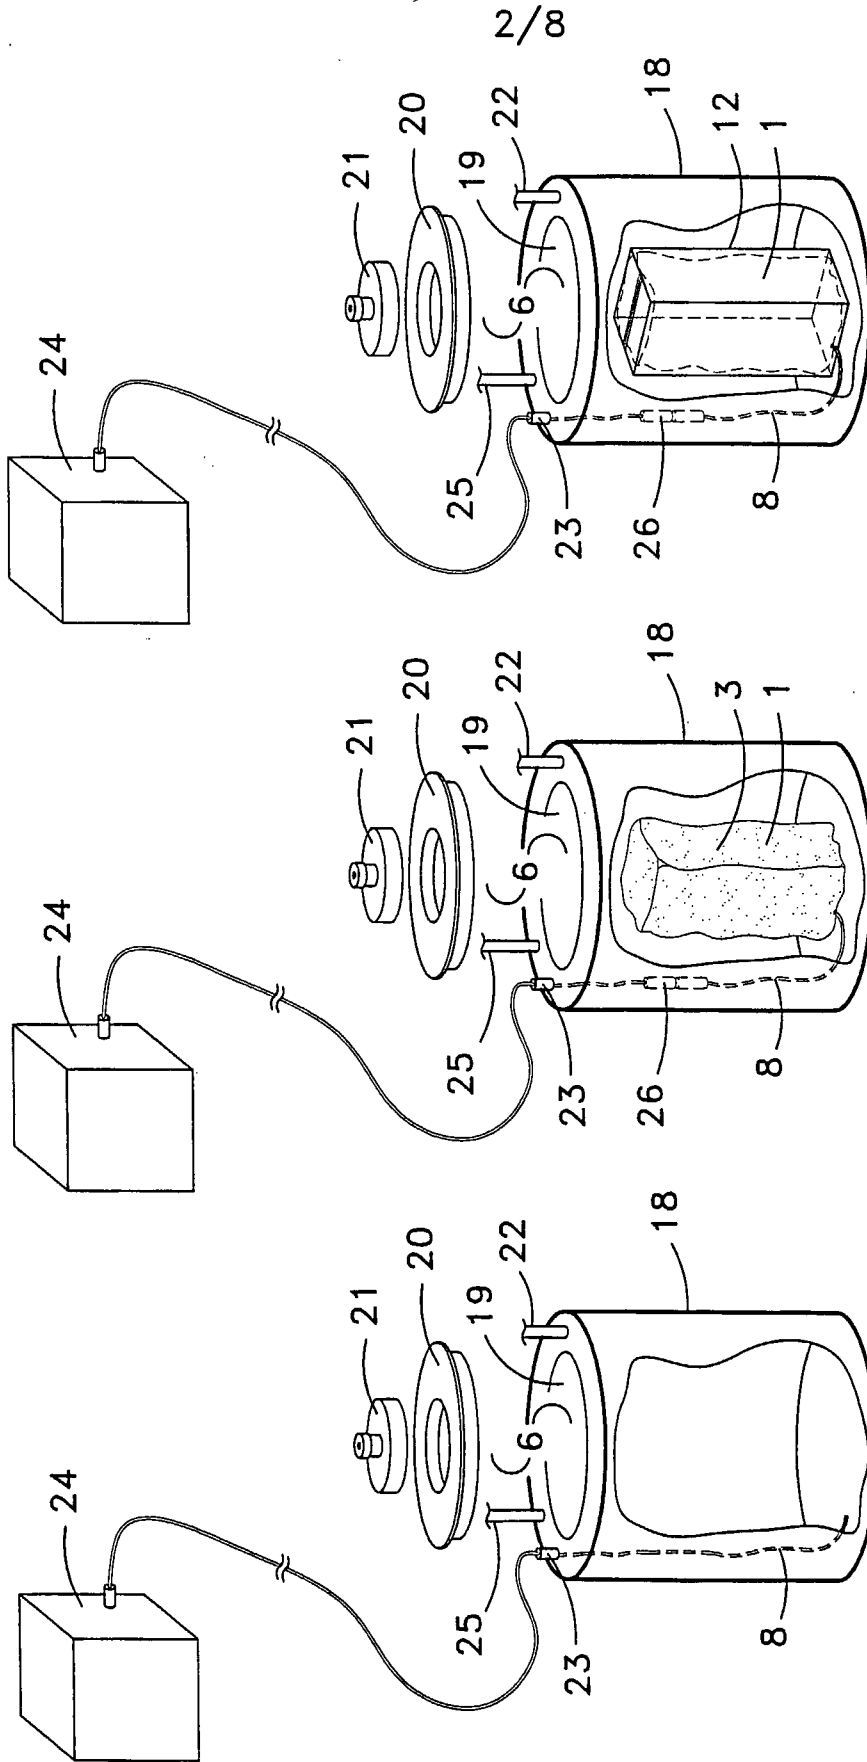


Fig. 2C

Fig. 2B

Fig. 2A

3/8

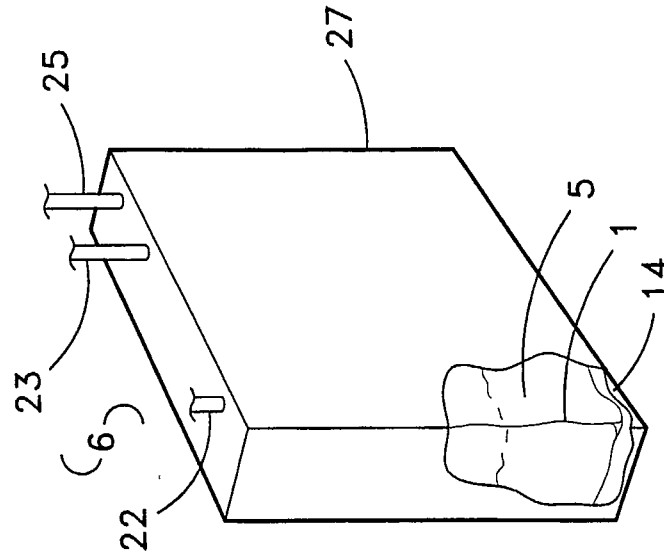


Fig. 3B

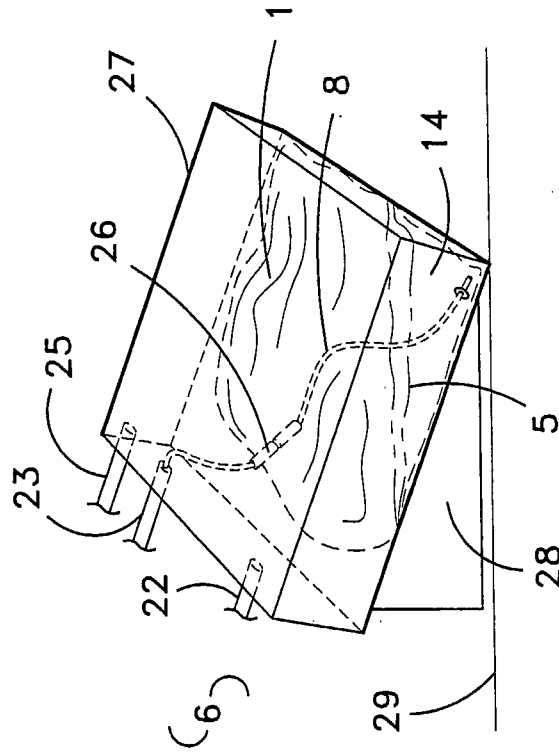


Fig. 3A

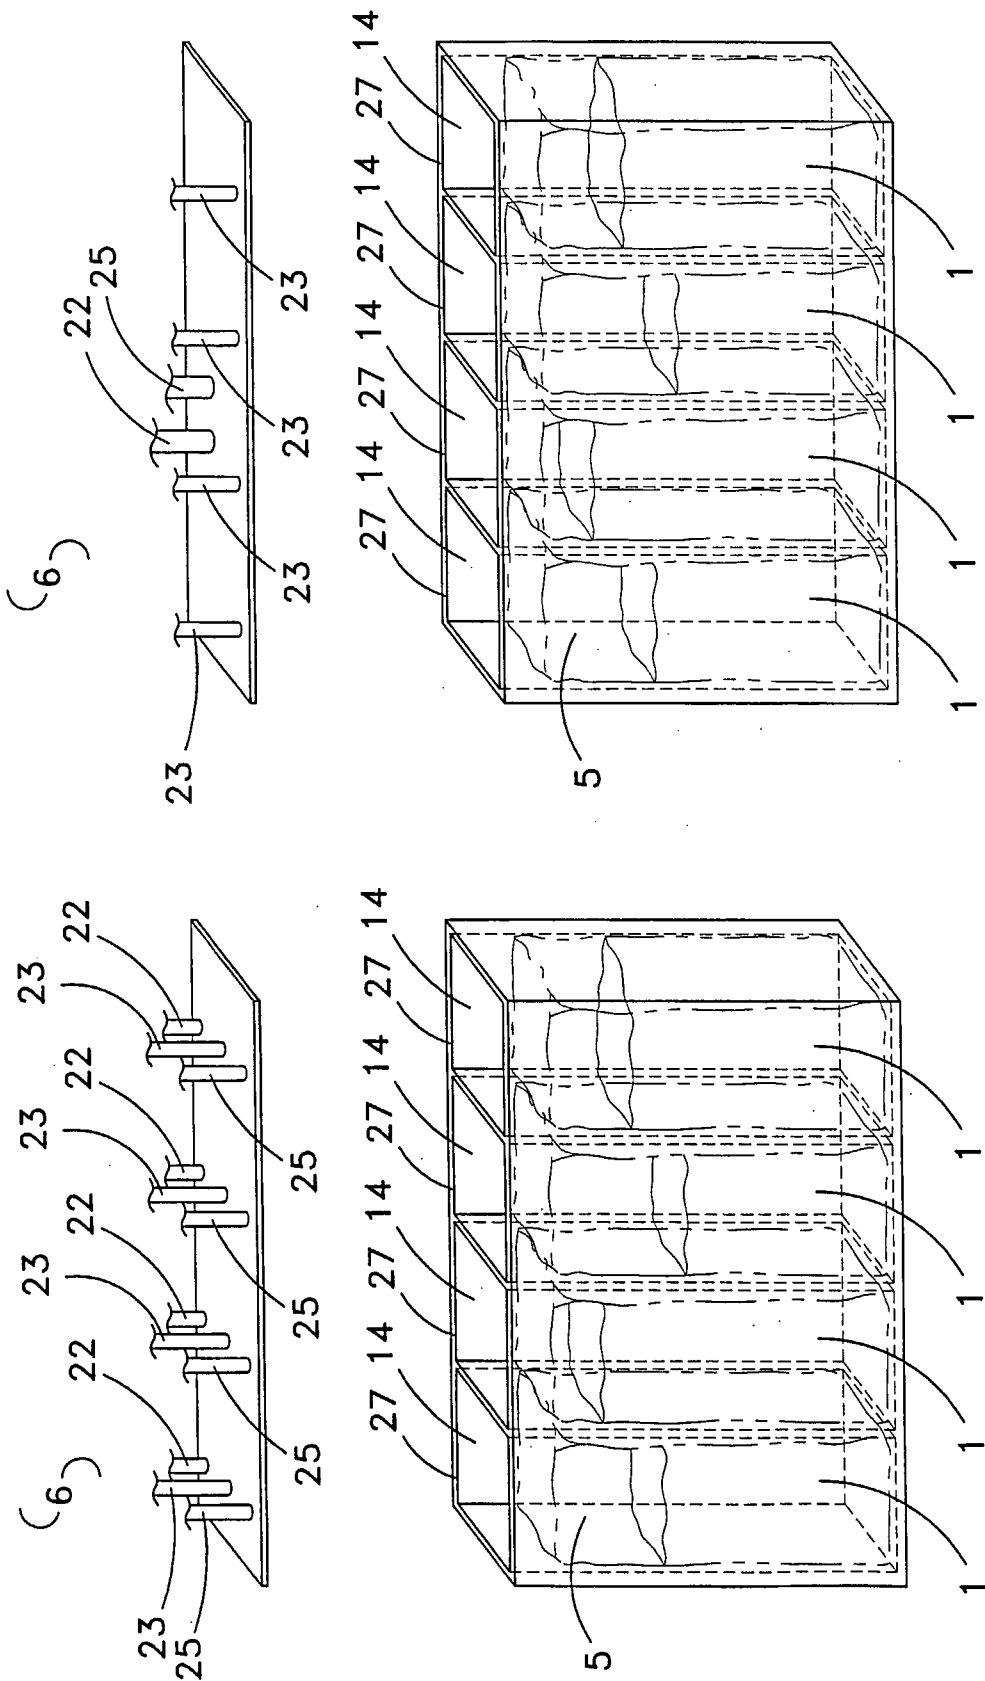


Fig. 4B

Fig. 4A

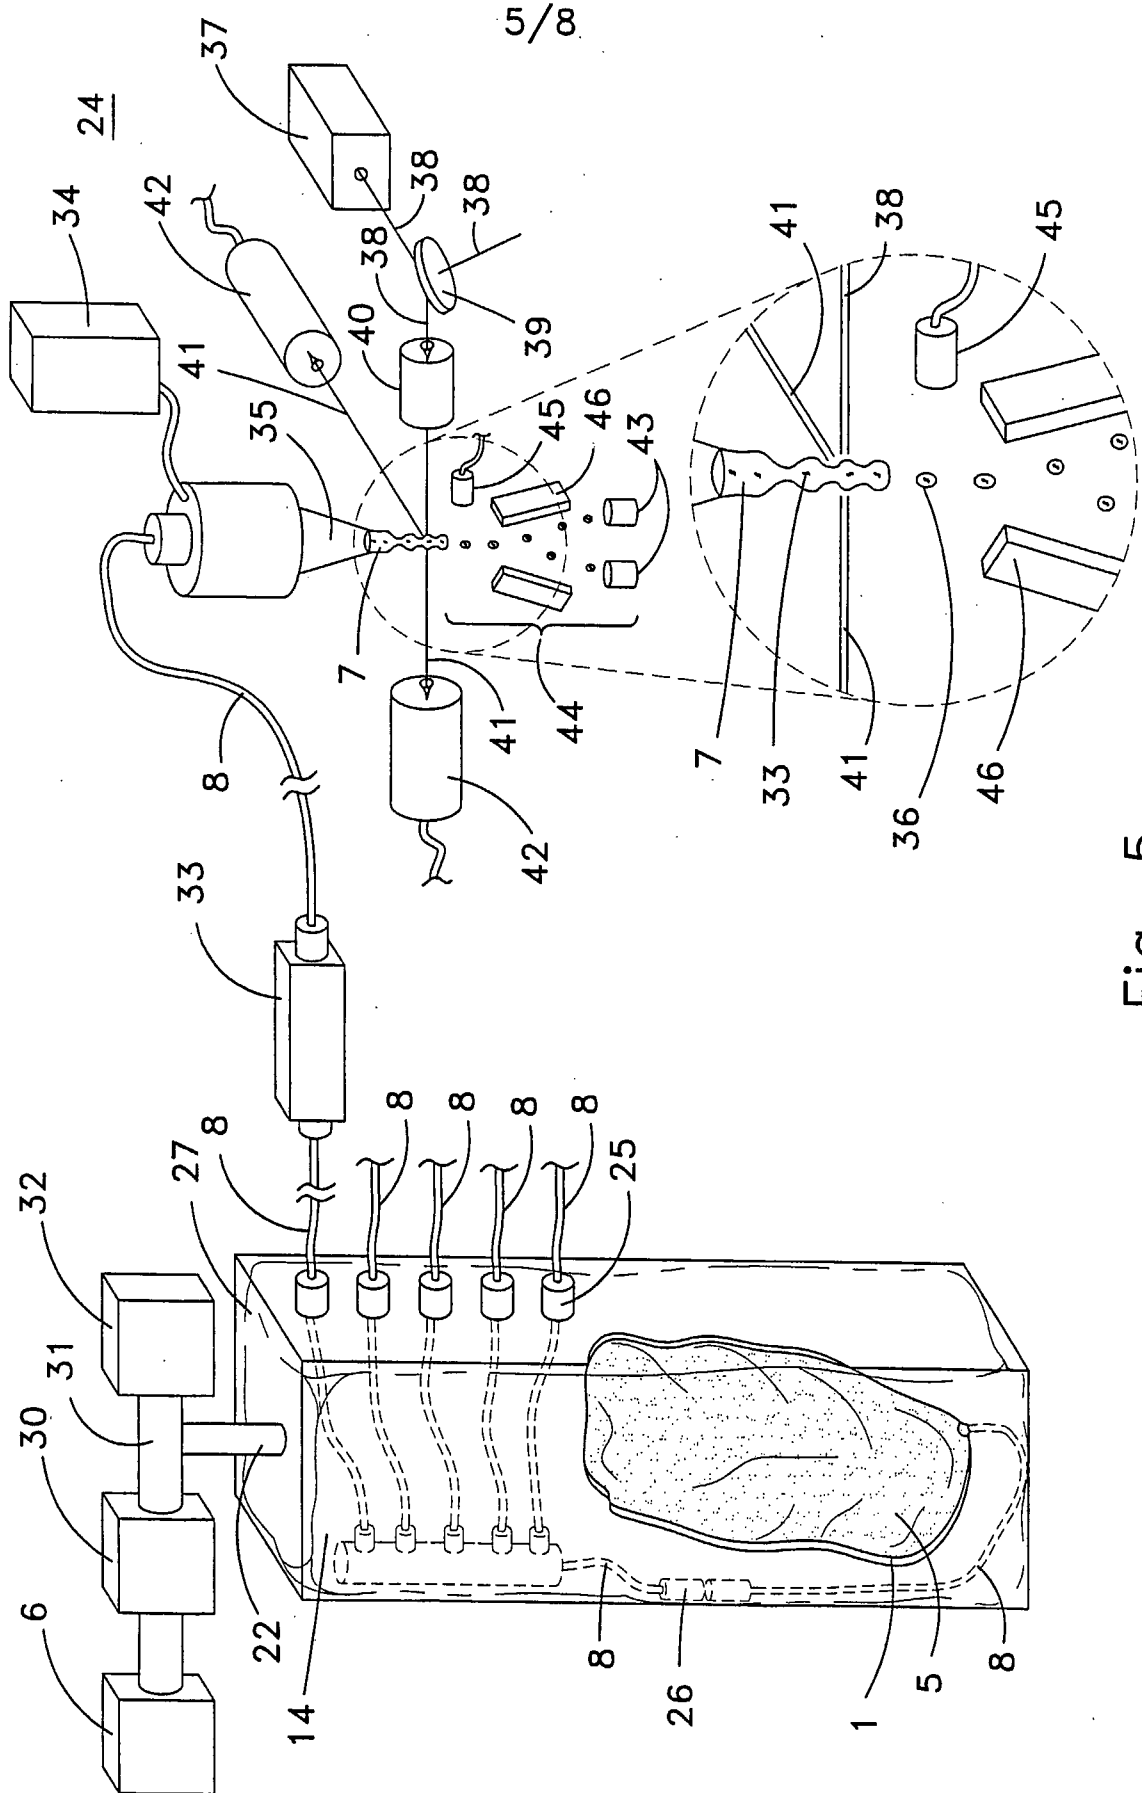


Fig. 5

6/8

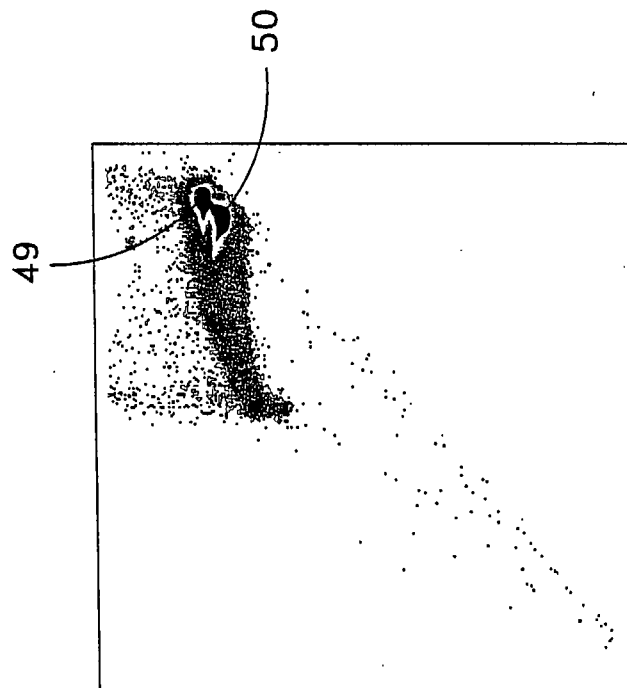
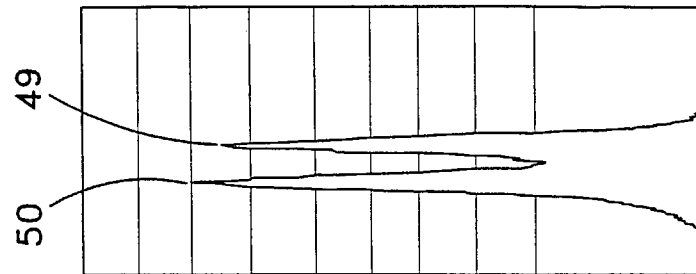


Fig. 6

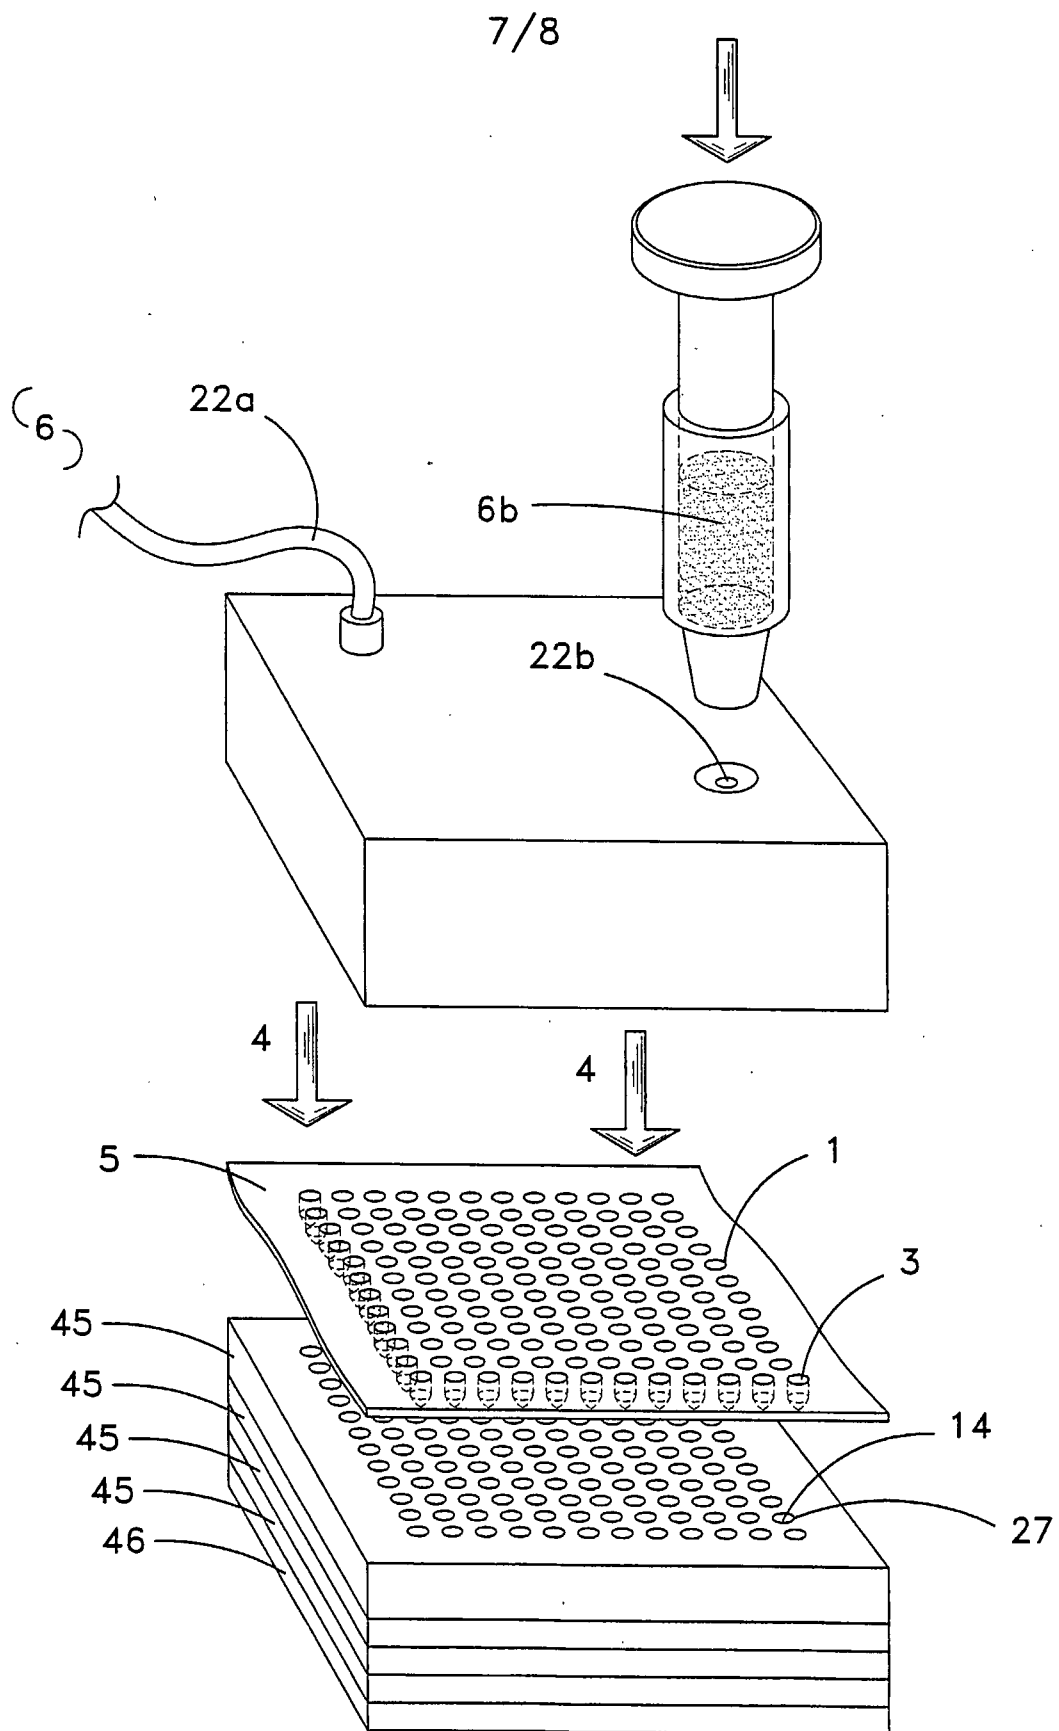


Fig. 7

8/8

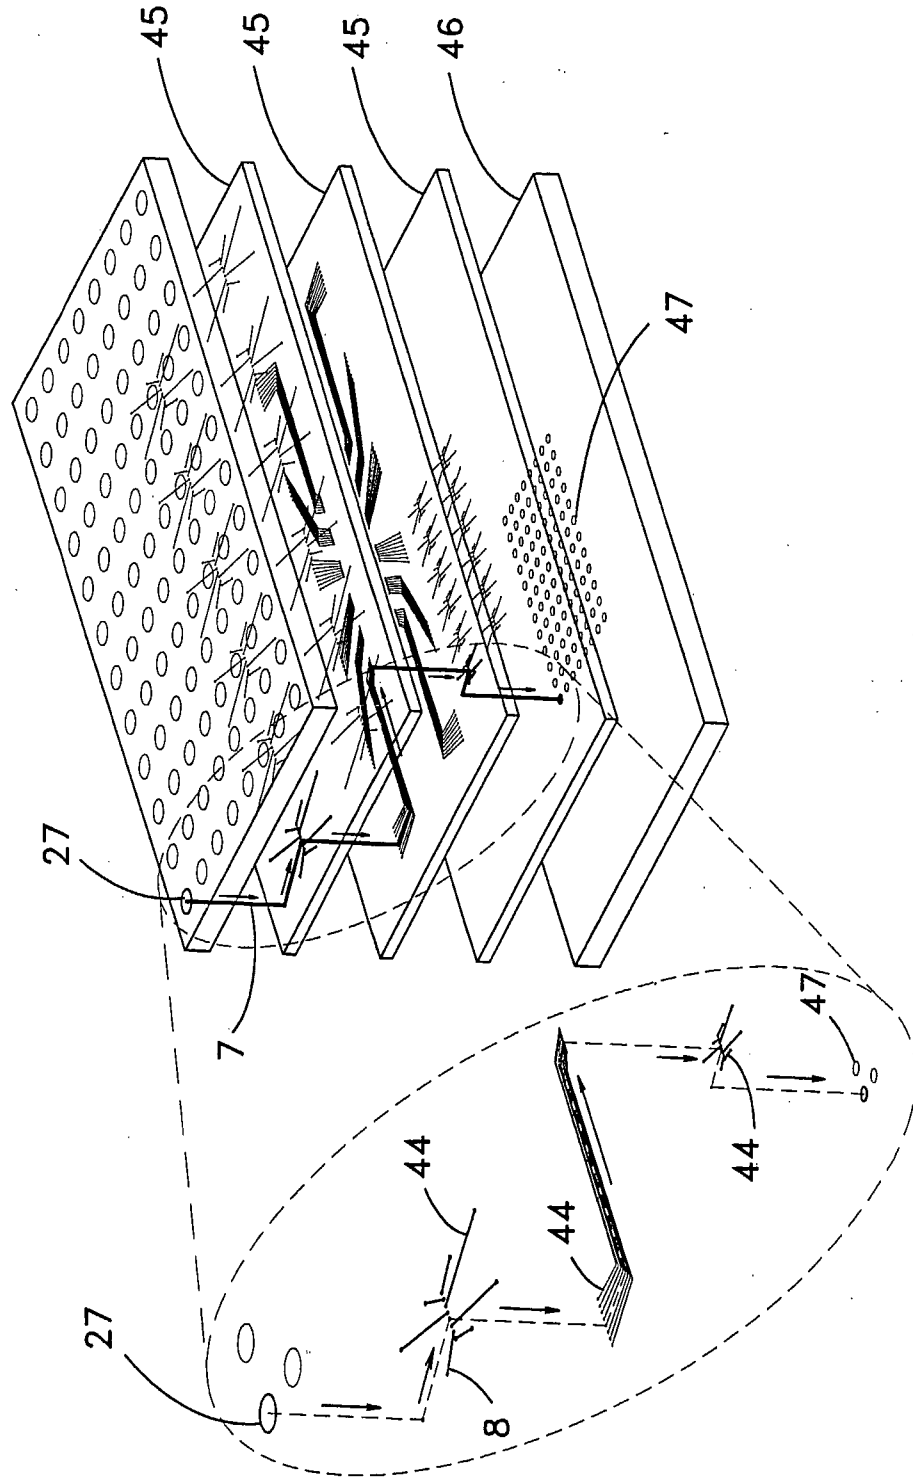


Fig. 8

