




(86) Date de dépôt PCT/PCT Filing Date: 2001/10/05
(87) Date publication PCT/PCT Publication Date: 2002/04/11
(85) Entrée phase nationale/National Entry: 2003/03/24
(86) N° demande PCT/PCT Application No.: US 2001/031237
(87) N° publication PCT/PCT Publication No.: 2002/028468
(30) Priorités/Priorities: 2000/10/05 (60/238,184) US;
2001/10/04 (09/971,410) US

(51) Cl.Int.⁷/Int.Cl.⁷ A61M 25/01, A61B 5/107
(71) Demandeur/Applicant:
BOSTON SCIENTIFIC LIMITED, BB
(72) Inventeurs/Inventors:
VRBA, ANTHONY C., US;
SKUJINS, PETER, US
(74) Agent: OYEN WIGGS GREEN & MUTALA

(54) Titre : FIL-GUIDE COMPRENANT UN SEGMENT DE MARQUAGE POUR EVALUATION DE LONGUEUR
(54) Title: GUIDEWIRE HAVING A MARKER SEGMENT FOR LENGTH ASSESSMENT

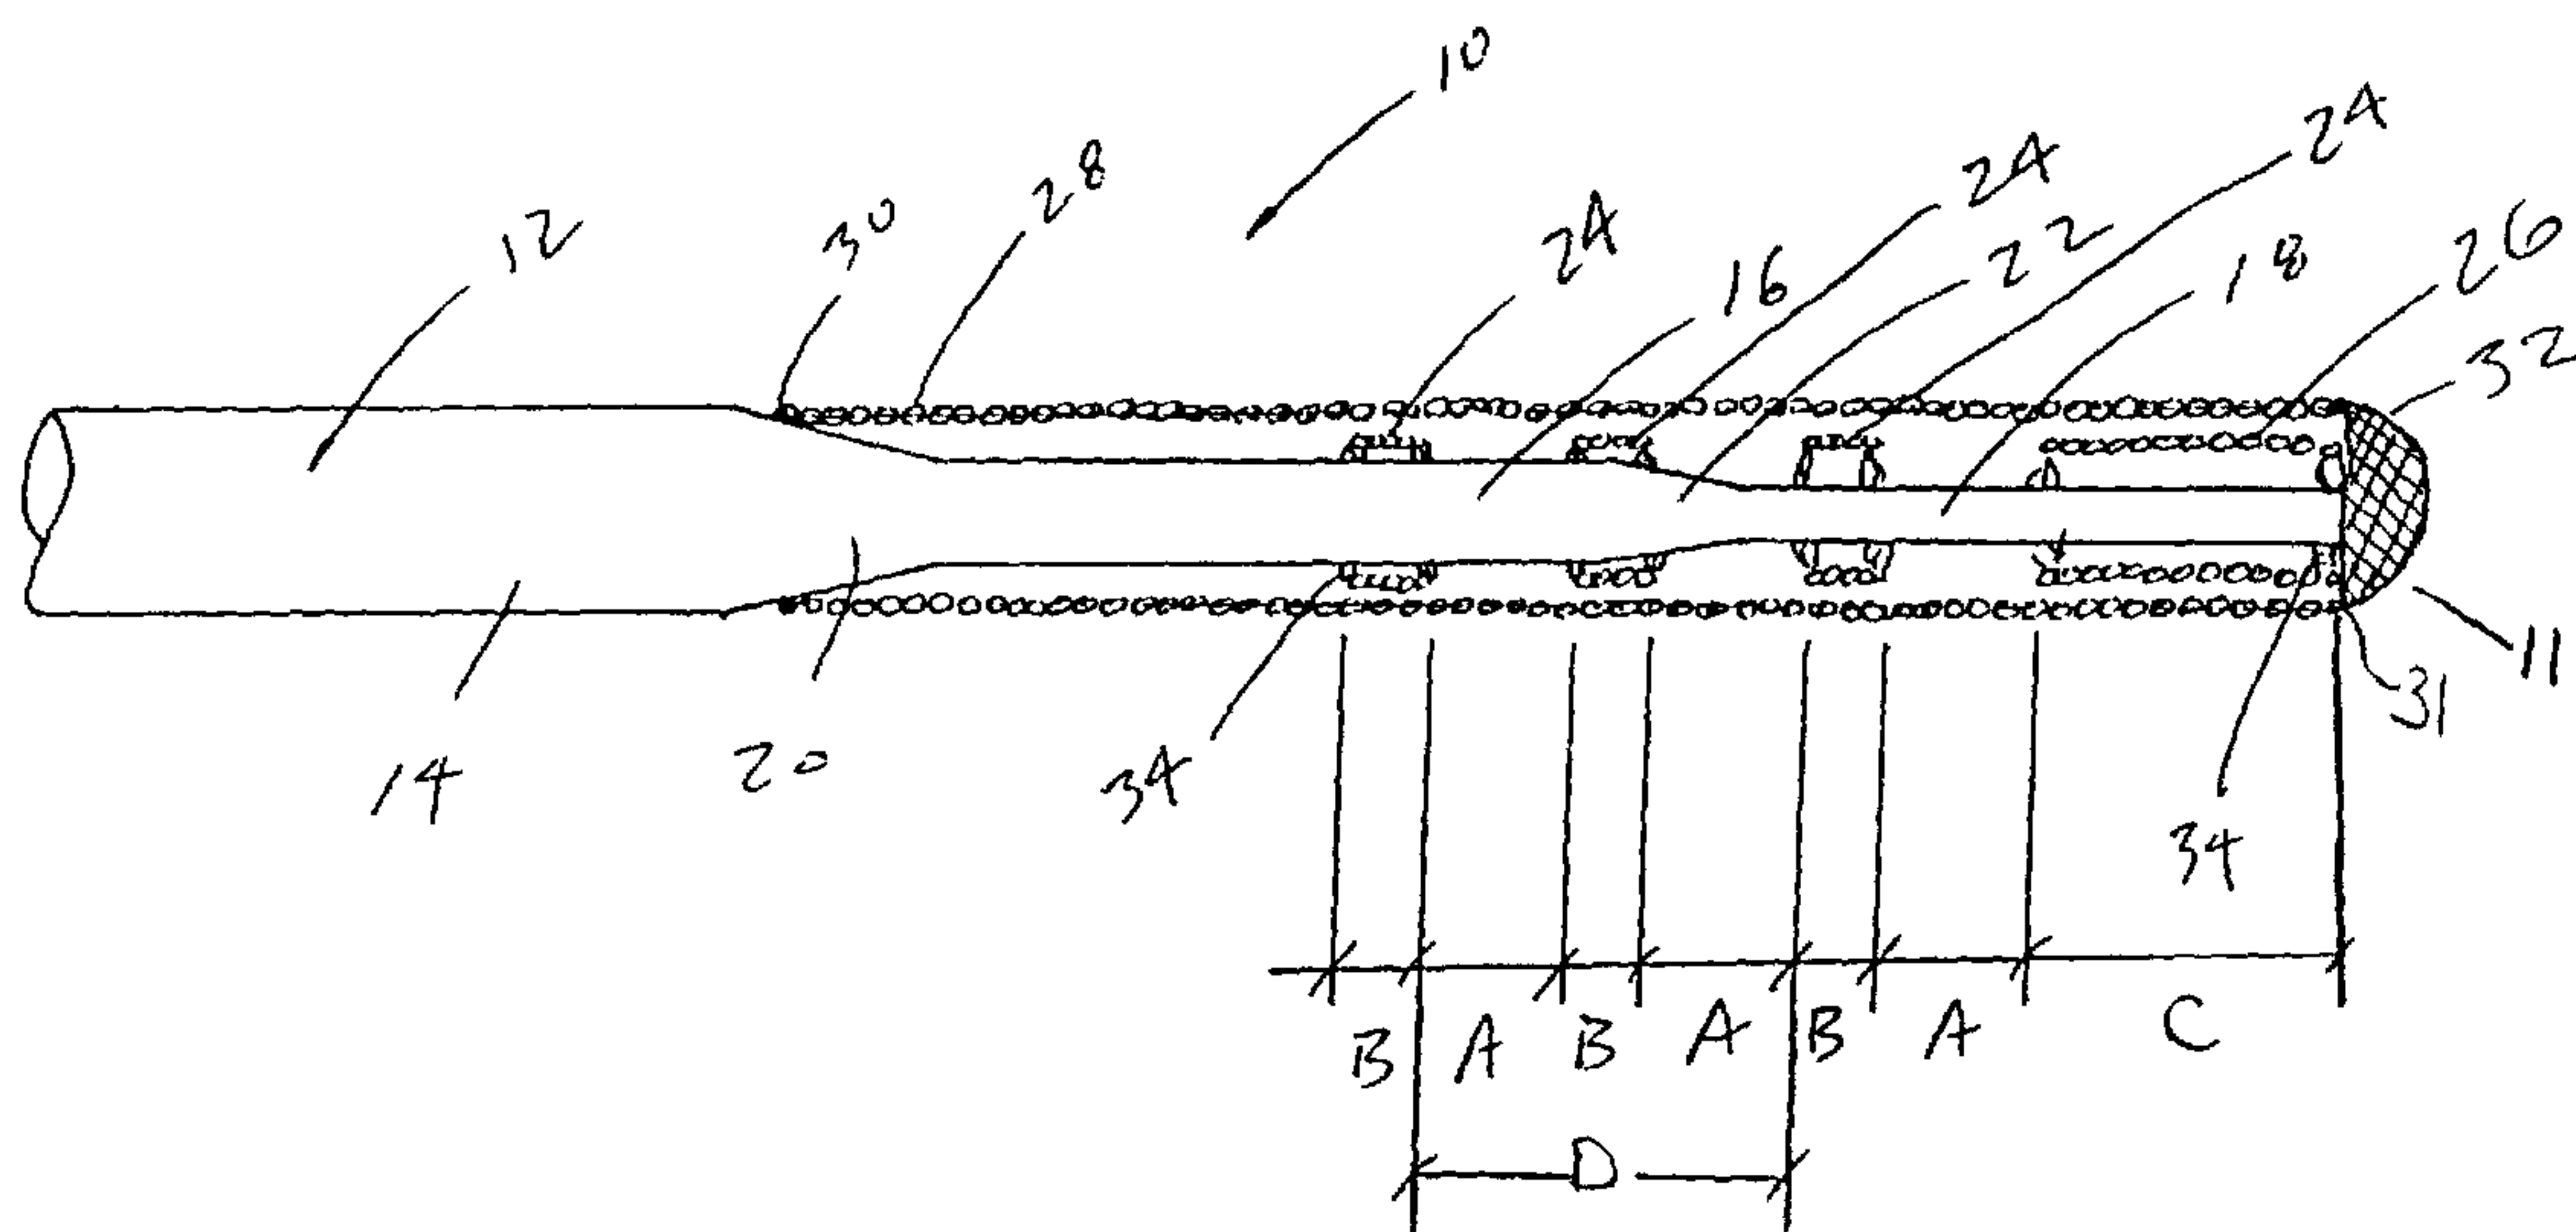

(57) Abrégé/Abstract:

A guide wire that can be placed in a patient's vasculature or body cavity. The guide wire includes one or more radiopaque markers that can be visualized by fluoroscopy or the like. The markers are preferably spaced apart longitudinally along the guide wire such that the markers and/or spaces between the markers can be used to make measurements of anatomical or artificial structures within the body.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/028468 A3

(51) International Patent Classification⁷: **A61M 25/01**,
A61B 5/107

(21) International Application Number: PCT/US01/31237

(22) International Filing Date: 5 October 2001 (05.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/238,184 5 October 2000 (05.10.2000) US
09/971,410 4 October 2001 (04.10.2001) US

(71) Applicant: **SCIMED LIFE SYSTEMS, INC.** [US/US];
One SciMed Place, Maple Grove, MN 55311 (US).

(72) Inventors: **VRBA, Anthony, C.**; 18519 83rd Avenue
North, Maple Grove, MN 55311 (US). **SKUJINS, Peter**;
1708 Irving Avenue South, Minneapolis, MN 55403 (US).

(74) Agents: **SEAGER, Glenn, M.** et al.; Crompton, Seager
& Tufte, LLC, Suite 895, 331 Second Avenue South, Min-
neapolis, MN 55401-2246 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
11 July 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: GUIDEWIRE HAVING A MARKER SEGMENT FOR LENGTH ASSESSMENT

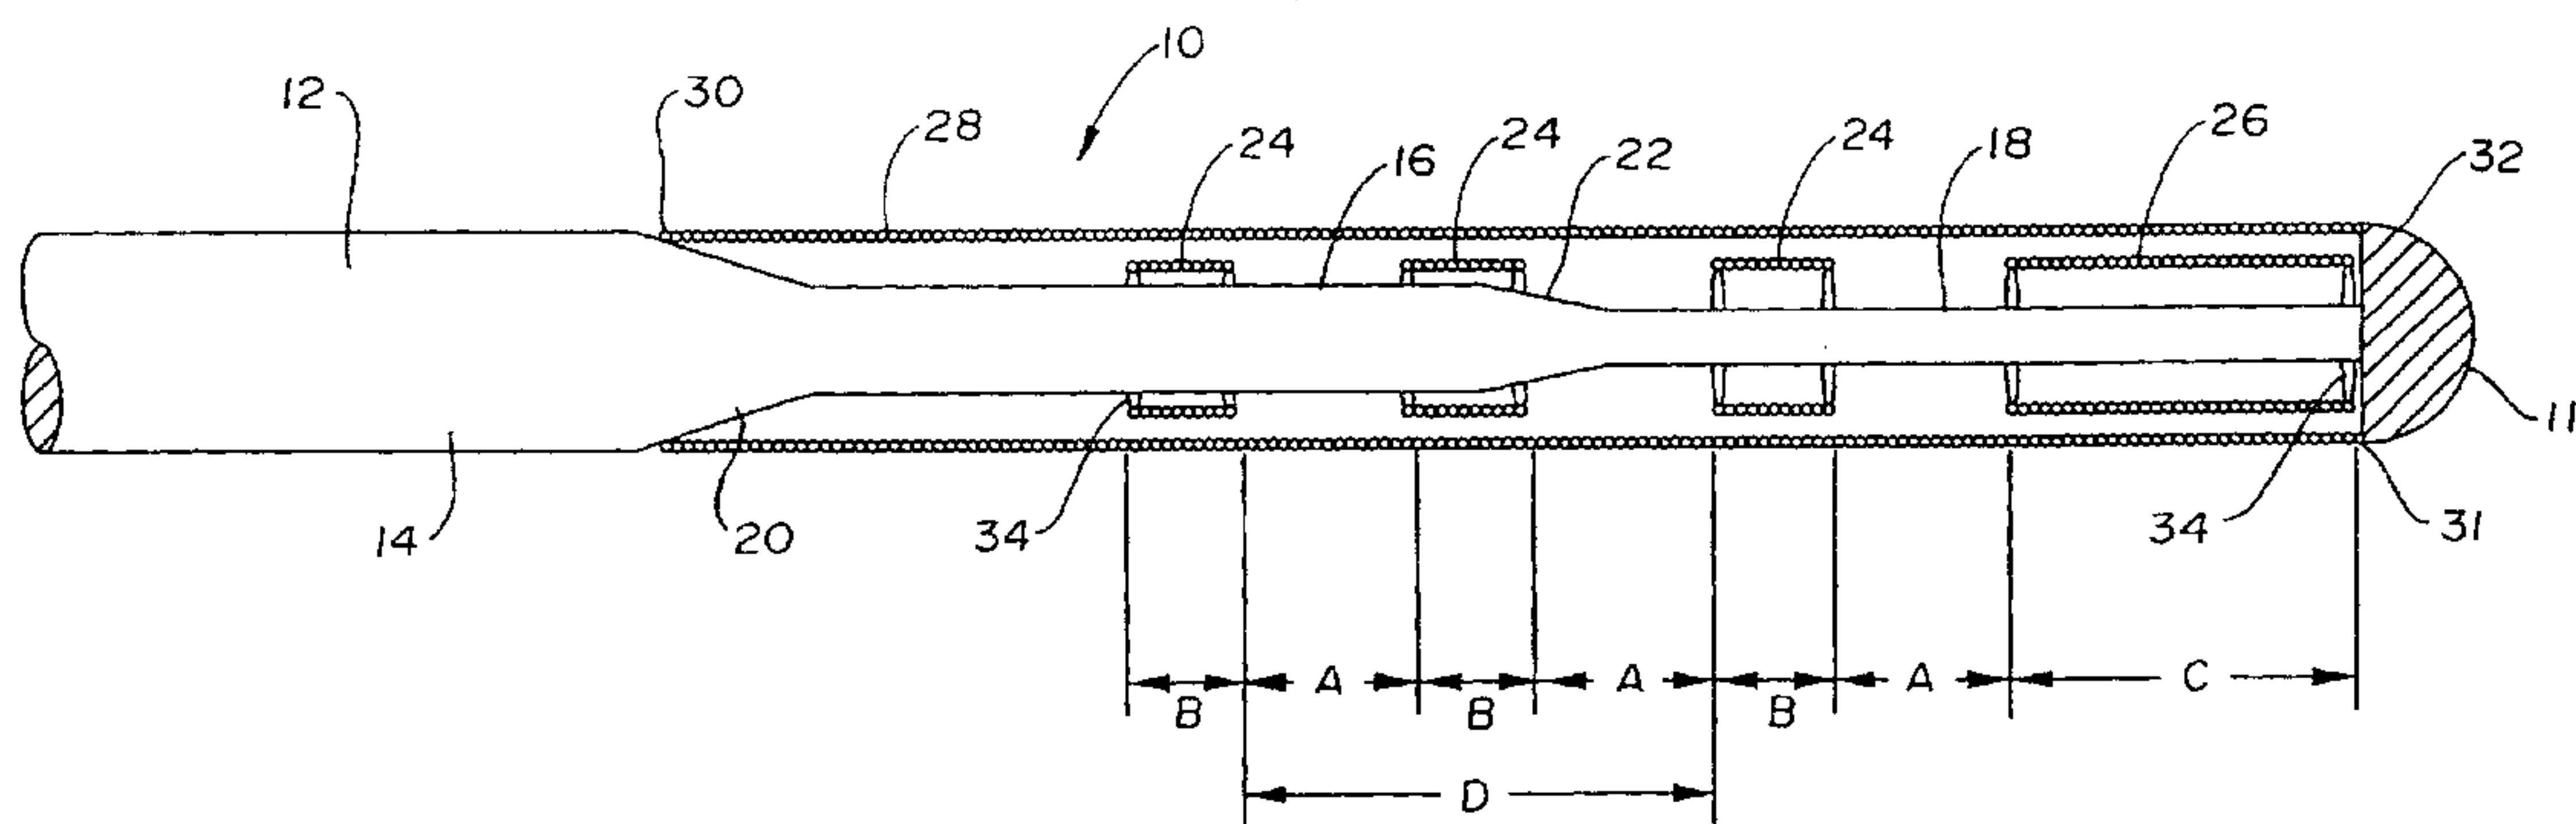

(57) Abstract: A guide wire that can be placed in a patient's vasculature or body cavity. The guide wire includes one or more radiopaque markers that can be visualized by fluoroscopy or the like. The markers are preferably spaced apart longitudinally along the guide wire such that the markers and/or spaces between the markers can be used to make measurements of anatomical or artificial structures within the body.



WO 02/028468 A3

GUIDEWIRE HAVING A MARKER SEGMENT FOR LENGTH ASSESSMENT

This application claims the benefit under 35 U.S.C. §119 of United States Provisional Patent Application No. 60/238,184, filed October 5, 2000.

Field of the Invention

5 The present invention relates to the field of guidewires for percutaneous procedures. The present invention relates particularly to a guidewire having a marker segment.

Background of the Invention

Guidewires are used in a number of procedures within various conduits of the
10 body. In particular, guidewires are used in percutaneous transluminal coronary angioplasty (PTCA) and other coronary procedures. This can involve insertion of the guide wire through an incision in the femoral artery near the groin, advancing the guide wire over the aortic arch, into a coronary artery, and across the lesion to be treated. Guidewires can be inserted directly into the vasculature or within a guide catheter. The
15 distal end of the guidewire ultimately lies directly within the vasculature.

Once the distal end of the guidewire is positioned in the vasculature, devices including catheters can be advanced into position over the guidewire and withdrawn over the guidewire. In various procedures, the length of the device, or length of a portion of the device advanced over the guidewire can be important. For example, if the guidewire
20 is being used for angioplasty, the length of the dilatation balloon is preferably sufficiently long to dilate a coronary lesion without repositioning the angioplasty catheter or exchanging the catheter for a second angioplasty catheter. The placement of a stent often

follows angioplasty. When selecting a stent for placement following angioplasty, the length of the stent is preferably sufficient to support the length of the lesion.

What is desirable and has not been provided is a guidewire that can be used to easily estimate the length of anatomic or artificial structures percutaneously. Further, what is desirable is a guidewire having a one or more easily viewable markers with a predetermined distance between each marker so that the conjunction of markers provide a scale to a position that a physician can easily and accurately determine distances within a blood vessel.

Summary of the Invention

The present invention pertains to a guide wire which can be placed in a patient's vasculature or body cavity. The guide wire includes one or more radiopaque markers which can be visualized by fluoroscopy or the like. The markers are preferably spaced apart longitudinally along the guide wire such that the markers and/or spaces between the markers can be used to make measurements of anatomical or artificial structures within the body.

Brief Description of the Drawings

Figure 1 is a cross-sectional view of a guide wire in accordance with the present invention.

Detailed Description of the Invention

Preferred embodiments of the present invention will be described in detail with reference to the drawings, wherein like reference numerals represent like parts and assemblies throughout the several views. This description does not limit the scope of the invention, which is limited only by the scope of the attached claims.

In general terms, the present invention relates to a guide wire which can be placed in a patient's vasculature or body cavity, wherein the guide wire includes one or more radiopaque markers that are preferably spaced apart longitudinally along the guide wire such that the markers and/or spaces between the markers can be used to make
5 measurements of anatomical or artificial structures within the body.

Figure 1 is a schematic, cross-sectional view of a guide wire 10 in accordance with the present invention. Guide wire 10 includes a core wire 12 having a proximal end and a distal end 11, the former not being shown. Guide wire 10 preferably includes an elongate core member wire 12. Core wire 12 may be formed in diameters and lengths
10 appropriate to the various percutaneous procedures conducted using guide wires. Core wire 12 may include a proximal first diameter section 14, a more distal, lesser diameter second section 16 and a yet more distal, and lesser diameter third section 18. In a preferred embodiment, core wire 12 includes a first parabolic shaped transition portion 20 between first diameter section 14 and second section 16, and a second parabolic shaped
15 transition portion 22 between second section 16 and third section 18. It can be appreciated that the tapering and reducing of the diameter of a distal region of core wire 12 can make the distal region of guide wire 10 more flexible to enhance steerability of the guide wire. Various combinations of core wire diameter, or cross-sectional reduction proximate distal end 11 can be made without departing from the scope of the present
20 invention.

A rounded atraumatic tip 32 may be adhered to, soldered to or formed at the third section 18 of core wire 12. Surrounding the third section 18 of core wire 12 is a coil 28. A distal end 31 and a proximal end 30 of the coil 28 may be connected by solder,

adhesive, or the like to the core wire 12. In a preferred embodiment, the coil 28 may extend proximally to a point where the thickness of core wire 12 has been transitioned to have a diameter approximately equal to the inside diameter of coil 28.

5 A plurality of radiopaque members are preferably located proximal the distal end 11, including, for example, markers 24 and distal member 26. Markers 24 can be connected to core wire 12 by solder 34, adhesive or the like, including, for example, UV adhesive or TFE (tetrafluoroethylene) tubing.

Core wire 12 and coil 28 are preferably formed from materials less radiopaque than markers 24 and distal member 26. Core wire 12 and coil 28 can be formed from, for
10 example, stainless steel, Nitinol, Inconel®, or other bio-compatible materials known to those skilled in the art. Markers 24 and distal member 26 are preferably formed from substantially radiopaque material such as platinum, gold or other substantially radiopaque material. It should be understood, however, that the materials recited herein are merely exemplary and one skilled in the art would know that alternative bio-compatible materials
15 could be advantageously used.

Markers 24 and distal member 26 may be disposed around core member 12. An outer coil 28 can be disposed around core wire 14 and markers 24 and distal member 26. Preferably, markers 24 and distal member 26 may be made of a wire coil that extend around the entire outer circumference of the core member 12. It should be understood
20 that markers 24 and distal member 26 may be formed of a marker band that extends around the entire outer circumference of the core member 12, and the marker wire coil and/or marker band may be shaped in a variety of shapes, and may extend only partially around the core member 12.

Markers 24 are preferably spaced a distance A from each other and/or distal member 26. Markers 24 preferably have a length B. Although spacing distances A are shown in Figure 1 as having equal lengths, this equal spacing distance is not required for all embodiments of the present invention. Additionally, although lengths B of marker
5 bands 24 are also shown as being equal, this is also not required for every embodiment of the present invention. Distal member 26 preferably has a length C. The length C of distal member 26 is preferably equal to the sum of spacing distance A and the length B of a single marker 24. Additionally, although length C of distal member 26 is shown as being equal to the sum of spacing distance A and the length B of a single marker 24, this
10 is not required for every embodiment of the present invention.

In a preferred embodiment, spacing distance A is a positive multiple X of marker length B, wherein the positive multiple X is not more than three. For example, spacing distance A could be 15 mm where length B is 5 mm, and wherein the positive multiple X is three. In yet another embodiment, spacing distance A could be 6 mm where length B
15 is 3 mm, wherein the positive multiple X is two. It can be appreciated that numerous spacings A can be selected as positive multiples of three or less of length B. It again should be understood that although in a preferred embodiment, each spacing distance A is equivalent and each marker length B is equivalent as shown, for example, Figure 1, this arrangement need not be made in accordance with every embodiment of the present
20 invention.

In use as one embodiment of the invention, if spacing distance A were 6 mm and length B were 3 mm, the length of an anatomical or artificial structure could be measured within the body and be estimated within 3 mm. A structure of 3 mm or less will not be

longer than the 3 mm length marker B, which under fluoroscopy will appear as a bright mark. A structure 6 mm long will appear when compared to 6 mm spacing distance A, as substantially equivalent in length. It can be appreciated that the space will appear dark under fluoroscopy if a series of 6 mm spacing distances A, are created between a series of

5 3 mm marker lengths B, and additional length measurements can then be made. The length of a structure greater than 6 mm long, but less than 9 mm long, for example, may be estimated by comparing the structure length to the 3 mm length B and an adjacent 6 mm spacing distance A. The length of a structure greater than 9 mm, but less than 12 mm long can be estimated by a comparison to the length B or two 3 mm markers and the

10 6 mm spacing distance A therebetween. It can be appreciated that additional length measurements can be made at 3 mm increments by comparing additional combinations of 3 mm marker lengths B and 6 mm spacing distances A to a structure. It can be appreciated that although a 3 mm length B and a 6 mm spacing distance A has been used for this example, other marker lengths and spacing distances can also be used in

15 accordance with the present invention.

In use as a preferred embodiment of the invention, if spacing distance A were 15 mm and length B were 5 mm, the length of an anatomical or artificial structure could be measured within the body and be estimated within 5 mm. A structure of 5 mm or less will not be longer than the 5 mm length marker, which under fluoroscopy will appear as a

20 bright mark. A structure 15 mm long will appear when compared to 15 mm spacing distance A, as substantially equivalent in length. It can be appreciated that the space will appear dark under fluoroscopy if a series of 15 mm spacing distances A, are created between a series of 5 mm marker lengths B, additional length measurements can then be

made. The length of a structure greater than 15 mm long, but less than 20 mm long, for example, may be estimated by comparing the structure length to the 5 mm length B and an adjacent 15 mm spacing distance A. The length of a structure greater than 20 mm, but less than 25 mm long can be estimated by a comparison to the length B or two 5 mm markers and the 15 mm spacing distance A therebetween. It can be appreciated that although a 5 mm length B and a 15 mm spacing distance A has been used for the preferred embodiment, other marker lengths and spacing distances can also be used in accordance with the present invention.

As shown in Figure 1, guide wire 10 includes three spacings A, three markers 24 and a distal member 26. The third marker 24 is disposed along the core wire. In a preferred embodiment, the third marker 24 has a third length that may be equal to the first and second markers 24. The third marker 24 may be spaced from the first member by a second spacing distance, D. The second spacing distance D, may be a positive multiple of the marker length B. It can be appreciated that second spacing distance D may have other spatial relations to the marker length B and spacing distance A. Further, it can be appreciated that fewer or more markers 24 and spacings A can be used in accordance with the present invention.

In a preferred embodiment, spacing distance D is a positive multiple X of marker length B. For example, spacing distance D could be 35 mm where length B is 5 mm, and wherein the positive multiple X is seven. In yet another embodiment, spacing distance D could be 12 mm where length B is 3 mm, wherein the positive multiple X is four. It can be appreciated that numerous spacings D can be selected as positive multiples of length B. It again should be understood that although in a preferred embodiment, each spacing

distance D is a positive multiple marker length B as shown, for example, Figure 1, this arrangement need not be made in accordance with every embodiment of the present invention.

The foregoing description of the invention has been presented for purposes of
5 illustration and description, and is not intended to be exhaustive or to limit the invention to the precise form disclosed. The description was selected to explain the principles of the invention in various embodiments and various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention not be limited by the specification, but defined by the claims set forth below:

What is claimed is:

1. A guidewire, comprising:
an elongate core wire; and
a first and a second substantially radiopaque members disposed along the core wire, the first radiopaque member having a first length, and the second member having a second length, and the first and second members being longitudinally spaced along the core wire at a first spacing distance which is a positive multiple X of the first length, wherein X is not more than three.
2. The guidewire in accordance with claim 1, wherein the first spacing distance is a positive multiple X of the second length, wherein X is not more than three.
3. The guidewire in accordance with claim 2, wherein the first length is equal to the second length.
4. The guidewire in accordance with claim 1, wherein the first member includes a coil.
5. The guidewire in accordance with claim 4, wherein the coil is attached to the core wire by a solder joint.
6. The guidewire in accordance with claim 4, wherein the coil includes platinum.

7. The guidewire in accordance with claim 1, wherein the second member includes a coil.

8. The guidewire in accordance with claim 7, wherein the coil is attached to the core wire by a solder joint.

9. The guidewire in accordance with claim 7, wherein the coil includes platinum.

10. The guidewire in accordance with claim 1, further comprising a third substantially radiopaque member disposed along the core wire, the third member having a third length, the third member being spaced from the first member by a second spacing distance.

11. The guidewire in accordance with claim 10, wherein the second spacing distance is a positive multiple X of the first length.

12. The guidewire in accordance with claim 11, wherein the third length is equal to the first length.

13. The guidewire in accordance with claim 10, wherein the third member includes a coil.

14. The guidewire in accordance with claim 13, wherein the coil is attached to the core wire by a solder joint.

15. The guide wire in accordance with claim 13, wherein the coil includes platinum.

16. The guide wire in accordance with claim 10, wherein a coil extends around a portion of the core wire including the first, second and third radiopaque members.

17. A guidewire, comprising:

an elongate core wire; and

a first, a second and a third substantially radiopaque members disposed along the core wire, the first radiopaque member having a first length, the second member having a second length and the third member having a third length, the first, second and third members being longitudinally spaced along the core wire at a first spacing distance which is a positive multiple X of the first length, wherein X is not more than three.

18. The guidewire in accordance with claim 17, wherein the first spacing distance is a positive multiple X of the second length, wherein X is not more than three.

19. The guidewire in accordance with claim 18, wherein the first length, second length and third length are equal.

20. The guidewire in accordance with claim 17, wherein the first spacing distance is a positive multiple X of the third length, wherein X is not more than three.

21. The guidewire in accordance with claim 20, wherein the first length, second length and third length are equal.

22. A guidewire, comprising:

an elongate core wire; and

a distal, a first and a second substantially radiopaque members disposed along the core wire, the distal member having a distal length, the first radiopaque member having a first length and the second member having a second length, the distal, first and second members being longitudinally spaced along the core wire at a first spacing distance which is a positive multiple X of the first length, wherein X is not more than three.

23. The guidewire in accordance with claim 22, wherein the first spacing distance is a positive multiple X of the second length, wherein X is not more than three.

24. The guidewire in accordance with claim 23, wherein the first length is equal to the second length.

25. The guidewire in accordance with claim 22, wherein the first member includes a coil.

26. The guidewire in accordance with claim 25, wherein the coil is attached to the core wire by a solder joint.

27. The guidewire in accordance with claim 25, wherein the coil includes platinum.

28. The guidewire in accordance with claim 22, wherein the second member includes a coil.

29. The guidewire in accordance with claim 28, wherein the coil is attached to the core wire by a solder joint.

30. The guidewire in accordance with claim 28, wherein the coil includes platinum.

31. The guidewire in accordance with claim 22, wherein the distal length is equal to the sum of the first spacing and the first length.

32. The guidewire in accordance with claim 22, wherein the distal length is equal to the sum of the first spacing and the second length.

33. The guidewire in accordance with claim 22, wherein the distal length is equal to the sum of the first spacing and the first length, and the distal length is equal to the sum of the first spacing and the second length.

34. The guidewire in accordance with claim 22, wherein the distal member includes a coil.

35. The guidewire in accordance with claim 34, wherein the coil is attached to the core wire by a solder joint.

36. The guidewire in accordance with claim 34, wherein the coil includes platinum.

37. A method of marking the position of an intravascular feature, the method comprising:

providing a guidewire having a distal, a first and a second substantially radiopaque members disposed along a core wire, the distal member having a distal length, the first radiopaque member having a first length and the second member having a second length;

inserting the guidewire into the vasculature;

positioning the guidewire such that the distal, first and second members are longitudinally spaced along the core wire at a first spacing distance which is a positive multiple X of the first length, wherein X is not more than three; and

maintaining the position of the guidewire such that the length of anatomic or artificial structures may be ascertained.

Fig. 1

