

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/019451 A1

(51) International Patent Classification⁷: **H01Q 13/10**,
21/00

(74) Agent: **RUELLAN-LEMONNIER, Brigitte**; 46 Quai
Alphonse Le Gallo, F-92648 Boulogne cedex (FR).

(21) International Application Number:
PCT/EP2003/050357

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 4 August 2003 (04.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0210507 23 August 2002 (23.08.2002) FR

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **THOM-
SON LICENSING S.A.** [FR/FR]; 46 Quai Alphonse Le
Gallo, F-92100 Boulogne-Billancourt (FR).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **PINTOS,**
Jean-François [FR/FR]; Le Bas Sommier, F-35740
Pace (FR). **CHAMBELIN, Philippe** [FR/FR]; 14 rue du
Plessix d'Essé, F-35410 Chateaugiron (FR). **LOUZIR, Ali**
[TN/FR]; 6 rue de la Godmondière, F-35000 Rennes (FR).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: RLSA ANTENNA HAVING TWO ORTHOGONAL LINEAR POLARISATIONS

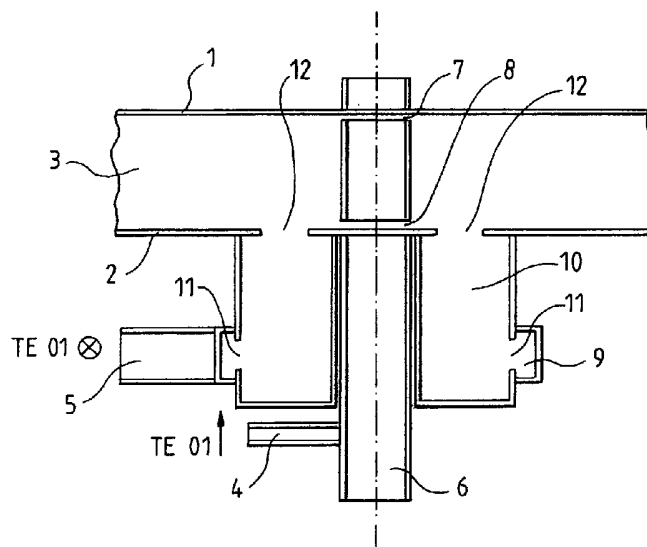

(57) Abstract: The network antenna of the RLSA type in the form of a radial waveguide (3) has a feed structure allowing simultaneous excitation of the antenna in two orthogonal linear polarizations. The feed structure, essentially placed to the rear of the antenna, consists of a circular waveguide (6) placed at the centre of the radial waveguide and coupled to the latter by two circular slots (7, 8) for the excitation of the antenna in a first linear polarization and of a coaxial waveguide (10) surrounding the circular waveguide (6) and coupled to the radial waveguide (3) by radial slots (12), the coaxial waveguide (10) being excited by a ringshaped waveguide (9) placed coaxially on the outer periphery of the coaxial waveguide and coupled to the latter by slots (11) distributed around the inner periphery of the ring for the excitation of the antenna in a second linear polarization orthogonal to the first linear polarization.

WO 2004/019451 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

RLSA ANTENNA HAVING TWO ORTHOGONAL LINEAR POLARISATIONS

The invention relates to network antennas of the radial waveguide type with linear slots, known as RLSAs (Radial Line Slot Antennas), that are intended to be more particularly used in satellite communications systems. In these communications systems, transmission to the satellite and reception from the satellite take place along two orthogonal (circular or linear) polarizations, respectively, although the transmission and reception frequency bands are generally different. This decoupling between the two links - the uplink and the downlink - of the communications system is enhanced the better the isolation between the two orthogonal polarizations in the network antenna. The identical approach of two orthogonal polarizations is used in wireless terrestrial communications systems, known as LMDSS (Local Multipoint Distribution Systems), that operate in the 40 GHz millimetric bands.

A network antenna of the RLSA type having a feed structure that allows the antenna to be excited in two orthogonal linear polarizations is known from the document by F.J. Boebels & K.C. Kelly entitled "*Arbitrary Polarization From Annular Slot Planar Antennas*" published in IRE TRANSACTIONS ON ANTENNAS AND PROPAGATION, July 1961, pages 342-349. The feed structure for this antenna consists of two radial cavities, one placed above the other inside the antenna, each cavity being excited by a circular waveguide placed at the centre of one of the two faces of the antenna. The two ports of the feed structure are thus placed on either side of the antenna, this having the effect of creating masking and perturbation regions at the front of the antenna and therefore downgrading the radiation characteristics of the latter.

The object of the invention is to remedy this drawback and for this purpose a network antenna of the RLSA type in the form of a radial waveguide according to the invention is characterized in that the feed structure, essentially placed to the rear of the antenna, consists of a circular waveguide placed at the centre of the

radial waveguide and coupled to the latter by two circular slots for the excitation of the antenna in a first linear polarization and of a coaxial waveguide surrounding the circular waveguide and coupled to the radial waveguide by radial slots, the coaxial waveguide being excited by a ring-shaped waveguide placed coaxially on the outer periphery of the coaxial waveguide and coupled to the latter by slots distributed around the inner periphery of the ring for the excitation of the antenna in a second linear polarization orthogonal to the first linear polarization.

10 According to the features of the network antenna according to the invention:

- the first linear polarization is excited by means of a first rectangular input waveguide propagating the TE_{01} fundamental mode, oriented along an axial direction of the antenna, in the circular waveguide;

- the second linear polarization is excited by means of a second rectangular input waveguide propagating the TE_{01} fundamental mode, oriented in a direction perpendicular to the axial direction of the antenna, in the ring-shaped waveguide;

- the two rectangular input waveguides are placed parallel to each other;
- the two rectangular input waveguides are placed one beneath the other.

20

With this construction of the feed structure for the antenna, the first rectangular waveguide may be above or below the second rectangular waveguide and various topologies may be envisaged for the arrangement of the electronic cards for transmitting/receiving the microwave signals. Moreover, the construction of the feed structure based on imbricated waveguides is relatively simple to produce.

25

One embodiment of an RLSA network antenna according to the invention is described below and illustrated in the drawings.

30

Figure 1 shows the network antenna with a feed structure according to the invention, the unit being seen in axial section of the antenna.

Figure 2 is a partial perspective view in axial section of the antenna.

5

In Figure 1, the RLSA-type network antenna comprises two coaxial circular conducting plates 1, 2 that may be separated from each other by a dielectric material in order to form a radial waveguide 3. Figure 2 shows the front face 1 of the antenna, which has an array of discrete radiating slots F arranged in concentric circles. It is obvious to those skilled in the art that the radiating slots may have another arrangement.

10

The feed structure for the network antenna 3 is essentially placed adjacent to the rear face 2 of the antenna such that its front face is not masked by an element that disturbs its radiation pattern.

15

The feed structure is designed to simultaneously excite, in transmission and/or reception, the two modes E_{11} and H_{11} by means of a pair of rectangular input waveguides 4, 5 that are placed at the rear of the antenna and extend, in the embodiment illustrated, perpendicular to the central axis A of the antenna. These two input waveguides 4, 5 may be placed parallel to each other and with one below the other in order to constitute two independent excitation ports. However, other arrangements may be adopted without departing from the scope of the invention.

20

25

To excite the first mode E_{11} , the first input waveguide 4 is coupled to the radial waveguide 3 via a circular waveguide 6 that is placed at the centre of the rear face 2 of the antenna. The input waveguide 4 is fed with its TE_{01} fundamental mode, the electric field of which, indicated by an arrow in Figure 1, is parallel to the direction A. The circular waveguide 6 propagates the TM_{01} mode into the radial waveguide 3 via two circular coupling slots 7, 8 spaced apart inside the

30

radial waveguide 3 along the axis A by a half-wavelength of the guided wave in the TM_{01} mode.

To excite the second mode H_{11} , the second input waveguide 5 is coupled to the radial waveguide 3 via a ring-shaped waveguide 9 that is itself coupled to a coaxial waveguide 10 surrounding the circular waveguide 6, this coaxial waveguide being coupled to the radial waveguide 3. The ring-shaped waveguide 9 is placed coaxially on the outer periphery of the coaxial waveguide 10. The input waveguide 5 is fed with its TE_{01} fundamental mode, the electric field of which, indicated in Figure 1 by an arrow (perpendicular to the plane of the sheet), is perpendicular to the direction A. The TE_{01} mode is propagated by the ring-shaped waveguide 9 into the coaxial waveguide 10 via linear coupling slots 11 distributed around the inner periphery of the ring, while the coaxial waveguide 10 is coupled to the radial waveguide 3 via radial coupling slots 12 fanning out from the rear face 2 of the antenna around the circular waveguide 6. The mean circumference of the ring-shaped waveguide 9 is a multiple of the wavelength of the guided wave in the TE_{01} mode. In the embodiment illustrated, the coaxial cavity 10 is coupled via 12 radial stops 12 to the radial waveguide 3 and the mean inside circumference of the waveguide 9 is equal to twelve times the wavelength of the guided wave in the TE_{01} mode.

Of course, the size of the coupling slots 11 and 12 and their distribution should be adjusted in order to obtain the desired performance of the antenna in terms of bandwidth, efficiency and matching.

This feed structure therefore makes it possible, from the rear face of the antenna, to excite the latter in two orthogonal linear polarizations while avoiding the presence of masking and perturbation regions at the front of the antenna.

CLAIMS

1. Network antenna of the RLSA type in the form of a radial waveguide (3) and having a feed structure allowing simultaneous excitation of the antenna in two orthogonal linear polarizations, characterized in that the feed structure, essentially placed to the rear of the antenna, consists of a circular waveguide (6) placed at the centre of the radial waveguide and coupled to the latter by two circular slots (7, 8) for the excitation of the antenna in a first linear polarization and of a coaxial waveguide (10) surrounding the circular waveguide (6) and coupled to the radial waveguide (3) by radial slots (12), the coaxial waveguide (10) being excited by a ring-shaped waveguide (9) placed coaxially on the outer periphery of the coaxial waveguide and coupled to the latter by slots (11) distributed around the inner periphery of the ring for the excitation of the antenna in a second linear polarization orthogonal to the first linear polarization.



2. Antenna according to Claim 1, in which the first linear polarization is excited by means of a first rectangular input waveguide (4) propagating the TE_{01} fundamental mode, oriented along an axial direction of the antenna, in the circular waveguide (6).

3. Antenna according to Claim 1, in which the second linear polarization is excited by means of a second rectangular input waveguide (5) propagating the TE_{01} fundamental mode, oriented in a direction perpendicular to the axial direction of the antenna, in the ring-shaped waveguide (9).

4. Antenna according to Claims 2 and 3, in which the two rectangular input waveguides (4, 5) are placed parallel to each other.

5. Antenna according to Claim 4, in which the two rectangular input waveguides (4, 5) are placed one beneath the other.

1/1

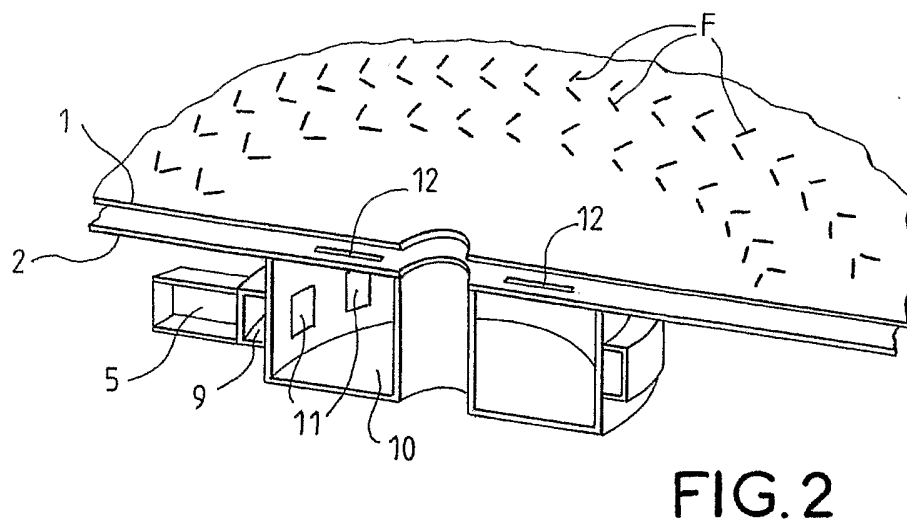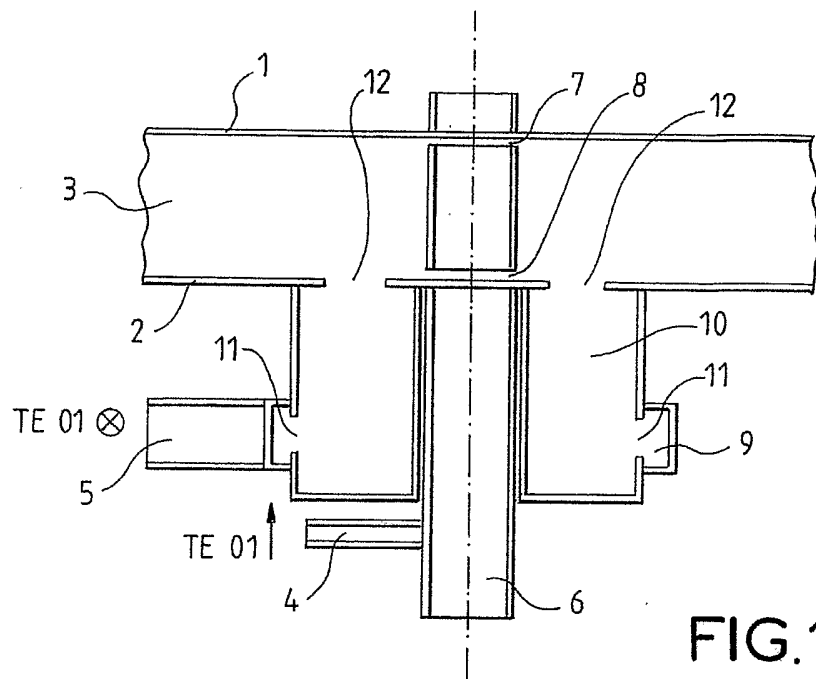

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50357

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01Q13/10 H01Q21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 42 12 886 A (HIRSCHMANN RICHARD GMBH CO) 21 October 1993 (1993-10-21) abstract; figures 1-6 column 3, line 14 -column 5, line 68 ---	1-5
A	US 5 661 498 A (GOTO NAOHISA ET AL) 26 August 1997 (1997-08-26) abstract; figures 1,2 column 3, line 17 -column 4, line 16 ---	1-5
A	US 4 716 415 A (KELLY KENNETH C) 29 December 1987 (1987-12-29) abstract column 1, line 8-19 column 3, line 35 -column 4, line 61 column 7, line 12-47 --- -/--	1-5

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

18 November 2003

Date of mailing of the international search report

20/01/2004

Name and mailing address of the ISA
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Reuss, T

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50357

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 063 049 A (KELLY KENNETH C) 6 November 1962 (1962-11-06) figures 1-3 column 1, line 68-72 column 3, line 23 -column 5, line 58 ----	1-5
A	ANDO M ET AL: "A LINEARLY POLARIZED RADIAL LINE SLOT ANTENNA" IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, IEEE INC. NEW YORK, US, vol. 36, no. 12, 1 December 1988 (1988-12-01), pages 1675-1680, XP000007860 ISSN: 0018-926X page 1675, left-hand column -page 1677, left-hand column -----	1-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/50357

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4212886	A	21-10-1993	DE 4212886 A1	21-10-1993
US 5661498	A	26-08-1997	NONE	
US 4716415	A	29-12-1987	NONE	
US 3063049	A	06-11-1962	NONE	